



TEST REPORT NUMBER: (8522)244-0297-(A)

Test Report

Applicant:	International Toy, Inc.	Fax:	---
		E-mail:	---
Address :	17682 Cowan 100,Irvine,California,United States 92614		
Test Date :	2022-09-07 to 2022-09-15		

Manufacturer or Supplier :	International Toy, Inc.
Address :	17682 Cowan 100,Irvine,California,United States 92614
Sample Description:	MVL QUANTUM CORE
Model number:	101Q123U221
Additional Model :	N/A
Rated Voltage:	DC6V (AA*4)
FCC ID :	2ACU8INT113
The submitted sample of the above equipment has been tested according to following standard(s)	
47 CFR Part 15, Subpart C 247	
CONCLUSION: The submitted sample was found to COMPLY with the test requirement	

Assistant Manager

Name: Nick Lung

Date: September 20, 2022

TEST REPORT NUMBER: (8522)244-0297-(A)

1 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS



TEST REPORT NUMBER: (8522)244-0297-(A)

2 Contents

	Page
1 TEST SUMMARY	2
2 CONTENTS	3
3 GENERAL INFORMATION	4
3.1 CLIENT INFORMATION	4
3.2 GENERAL DESCRIPTION OF EUT	4
3.3 ADDITIONAL INSTRUCTIONS	6
3.4 TEST ENVIRONMENT	7
3.5 DESCRIPTION OF SUPPORT UNITS	7
3.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
3.7 TEST LOCATION	9
3.8 TEST FACILITY	9
3.9 DEVIATION FROM STANDARDS	9
3.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
3.11 EQUIPMENT LIST	10
4 TEST RESULTS AND MEASUREMENT DATA	11
4.1 ANTENNA REQUIREMENT	11
4.2 CONDUCTED PEAK OUTPUT POWER	12
4.3 6dB OCCUPY BANDWIDTH	15
4.4 POWER SPECTRAL DENSITY	18
4.5 BAND-EDGE FOR RF CONDUCTED EMISSIONS	21
4.6 SPURIOUS RF CONDUCTED EMISSIONS	23
4.7 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	29
4.7.1 <i>Spurious Emissions</i>	29
5 PHOTOGRAPHS - EUT TEST SETUP	36
5.1 RADIATED SPURIOUS EMISSION	36
6 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	37



TEST REPORT NUMBER: (8522)244-0297-(A)

3 General Information

3.1 Client Information

Applicant:	International Toy, Inc.
Address of Applicant:	17682 Cowan 100,Irvine,California,United States 92614
Manufacturer:	International Toy, Inc.
Address of Manufacturer:	17682 Cowan 100,Irvine,California,United States 92614

3.2 General Description of EUT

Product Name:	MVL QUANTUM CORE
Model No.:	101Q123U221
Test Model No.:	101Q123U221
Trade Mark:	N/A
Software Version:	BK6988V2.3P40F.8M-16M-BTS84-(Quantum Core)-LY-TF-USB-PWD-V1.1-20220531-CRC-(f831)
Hardware Version:	22071A-V3(20220818)
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V5.0
Modulation Type:	GFSK
Transfer Rate:	1Mbps
Number of Channel:	40
Product Type:	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Test Software of EUT:	BK32xx RF Test - V1.82_en
Antenna Type:	PCB antenna
Antenna Gain:	0dBi
EUT Power Supply:	DC6V (AA*4)

TEST REPORT NUMBER: (8522)244-0297-(A)

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Note:


In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel (CH0)	2402MHz
The middle channel (CH19)	2440MHz
The highest channel (CH39)	2480MHz

3.3 Additional Instructions

EUT Test Software Settings:		
Mode:	<input checked="" type="checkbox"/> Special software is used. <input type="checkbox"/> Through engineering command into the engineering mode. engineering command: <code>###3646633###</code>	
EUT Power level:	Class2 (Power level is built-in set parameters and cannot be changed and selected)	
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.		
Mode	Channel	Frequency(MHz)
GFSK	CH0	2402
	CH19	2440
	CH39	2480

Run Software:

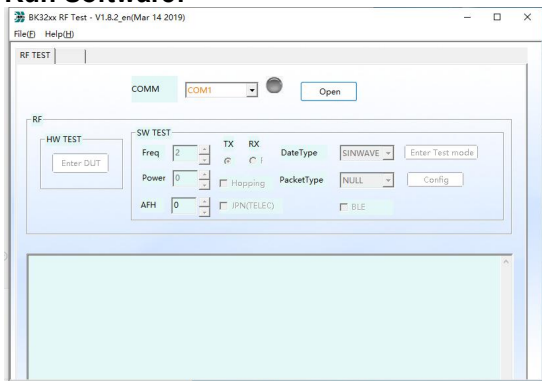

TEST REPORT NUMBER: (8522)244-0297-(A)

3.4 Test Environment

Operating Environment:	
Temperature:	24.5°C
Humidity:	59% RH
Atmospheric Pressure:	1009mbar
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

3.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

3.6 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty
1	Radiated Emission (Below 1GHz)	5.12dB
2	Radiated Emission (Above 1GHz)	4.60dB
3	Conducted Disturbance (0.15~30MHz)	3.34dB
4	Radio Frequency	3×10^{-8}
5	Duty cycle	0.6 %
6	Occupied Bandwidth	1.1%
7	RF conducted power	0.86dB
8	RF power density	0.74
9	Conducted Spurious emissions	0.86dB
10	Temperature test	0.8°C
11	Humidity test	2.0%
12	Supply voltages	0.5 %
13	Frequency Error	5.5 Hz



TEST REPORT NUMBER: (8522)244-0297-(A)

3.7 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

3.8 Test Facility

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

3.9 Deviation from Standards

None.

3.10 Other Information Requested by the Customer

None.



TEST REPORT NUMBER: (8522)244-0297-(A)

3.11 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2022/9/9	2023/9/8
Spectrum analyzer	R&S	FSU26	CQA-038	2022/9/9	2023/9/8
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2022/9/9	2023/9/8
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/9/16	2024/9/15
Bilog Antenna	R&S	HL562	CQA-011	2021/9/16	2024/9/15
Horn Antenna	R&S	HF906	CQA-012	2021/9/16	2024/9/15
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/9/16	2024/9/15
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2022/9/9	2023/9/8
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2022/9/9	2023/9/8
Antenna Connector	CQA	RFC-01	CQA-080	2022/9/9	2023/9/8
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2022/9/9	2023/9/8
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2022/9/9	2023/9/8


Note:

The temporary antenna connector is soldered on the pcb board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

TEST REPORT NUMBER: (8522)244-0297-(A)


4 Test results and Measurement Data

4.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
EUT Antenna:	
<p>The antenna is PCB antenna. The best case gain of the antenna is 0 dBi.</p>	

TEST REPORT NUMBER: (8522)244-0297-(A)

4.2 Conducted Peak Output Power

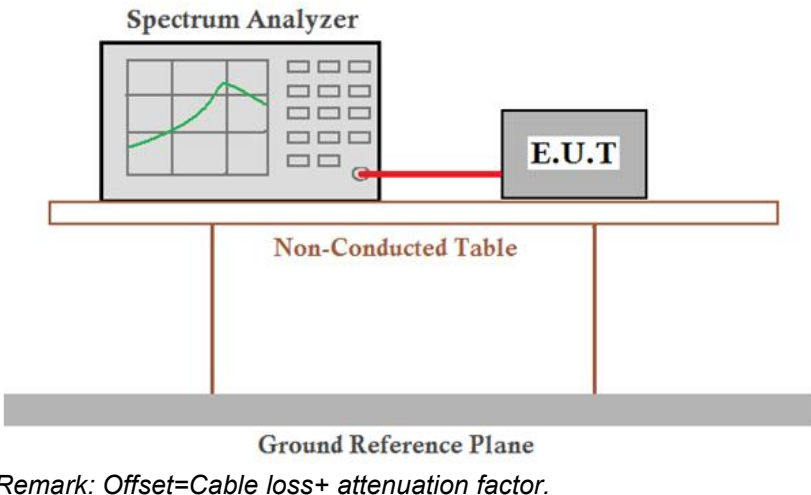Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Limit:	30dBm
Test Mode:	Transmitting with GFSK modulation.
Test Results:	Pass

Measurement Data


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-0.74	≤30	PASS
		2440	0.86	≤30	PASS
		2480	0.13	≤30	PASS



BUREAU
VERITAS

TEST REPORT NUMBER: (8522)244-0297-(A)

Test Graphs

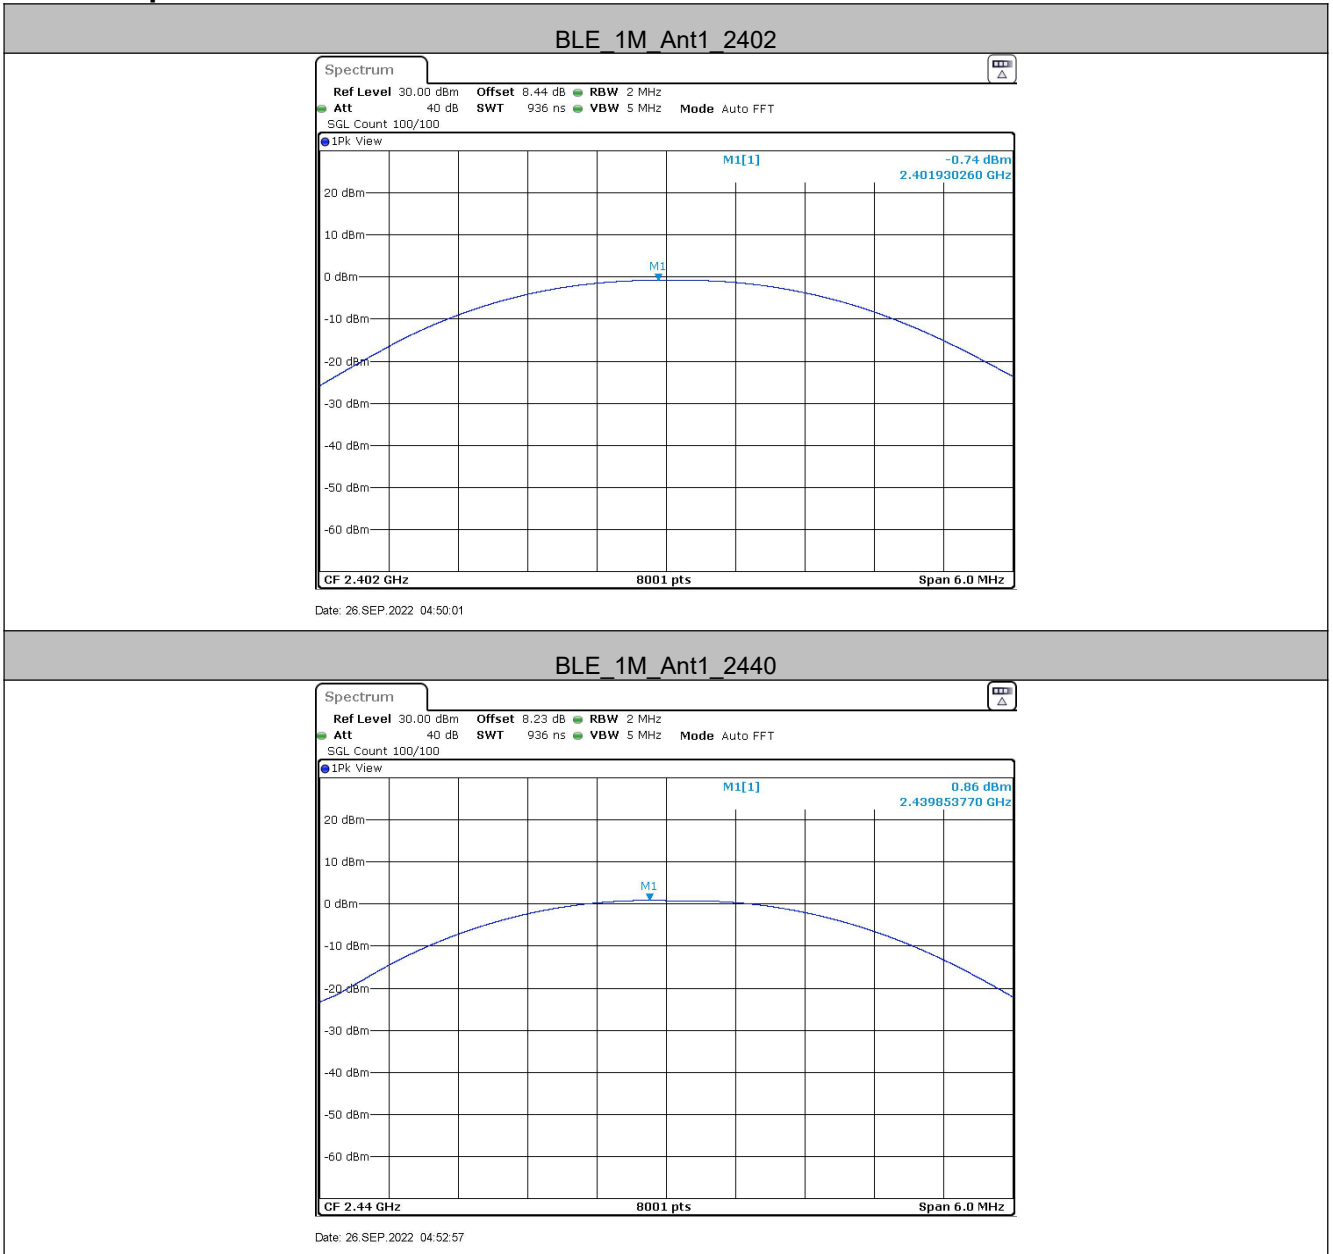

Bureau Veritas Shenzhen Co., Ltd


1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China

Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>



**BUREAU
VERITAS**

TEST REPORT NUMBER: (8522)244-0297-(A)

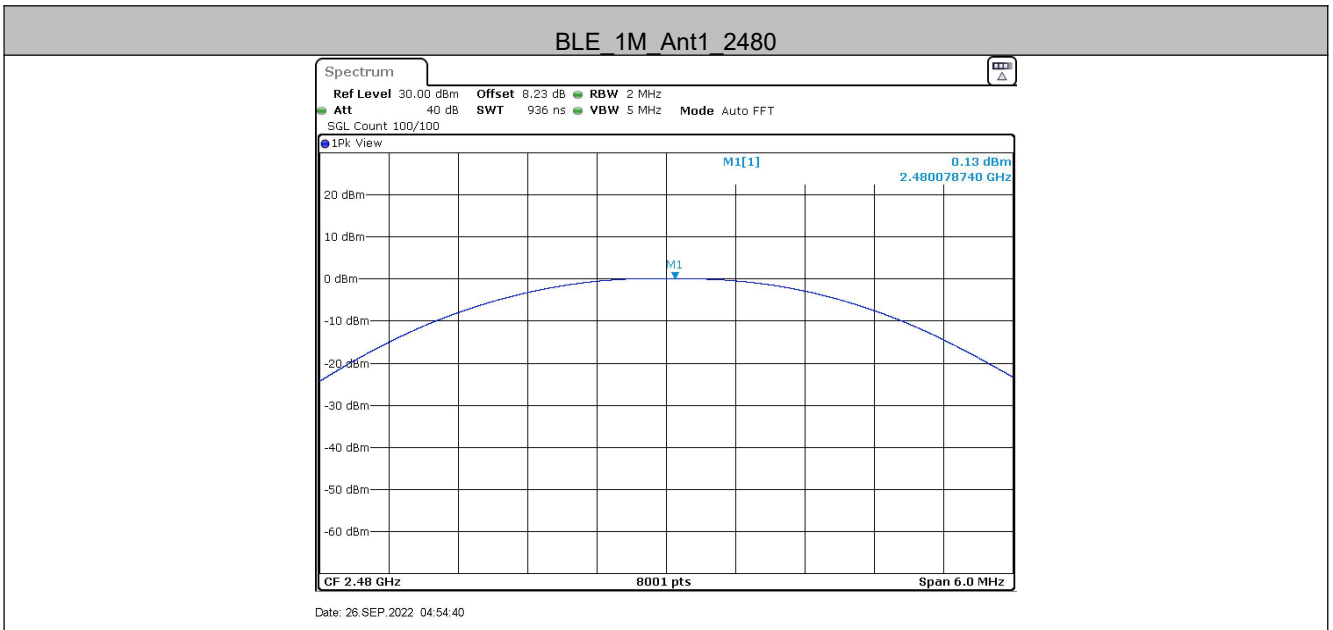

Bureau Veritas Shenzhen Co., Ltd

1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China

Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>



4.3 6dB Occupancy Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10 2013
Test Setup:	<p style="text-align: center;"><i>Remark: Offset=Cable loss+ attenuation factor.</i></p>
Limit:	≥ 500 kHz
Instruments Used:	Refer to section 4.11 for details.
Test Results:	Pass

Measurement Data

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.520	2401.768	2402.288	0.5	PASS
		2440	0.512	2439.776	2440.288	0.5	PASS
		2480	0.520	2479.772	2480.292	0.5	PASS




BUREAU VERITAS

TEST REPORT NUMBER: (8522)244-0297-(A)


Test Graphs

BLE 1M Ant1 2402

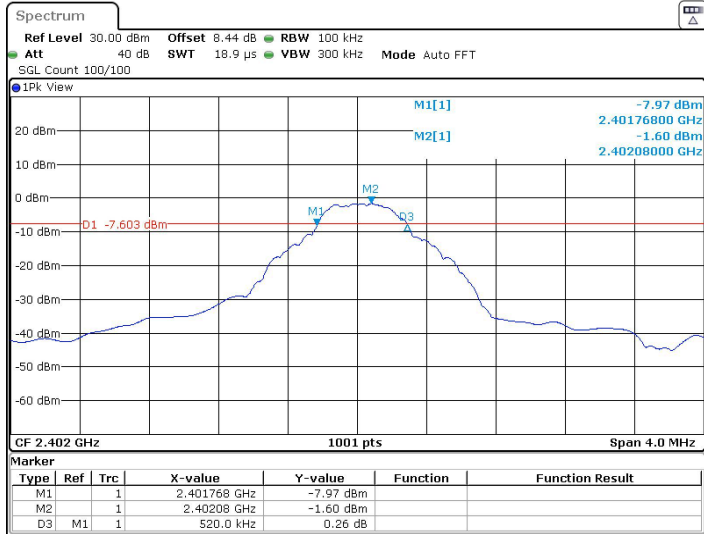

Date: 26.SEP.2022 04:49:43

BLE 1M Ant1 2440

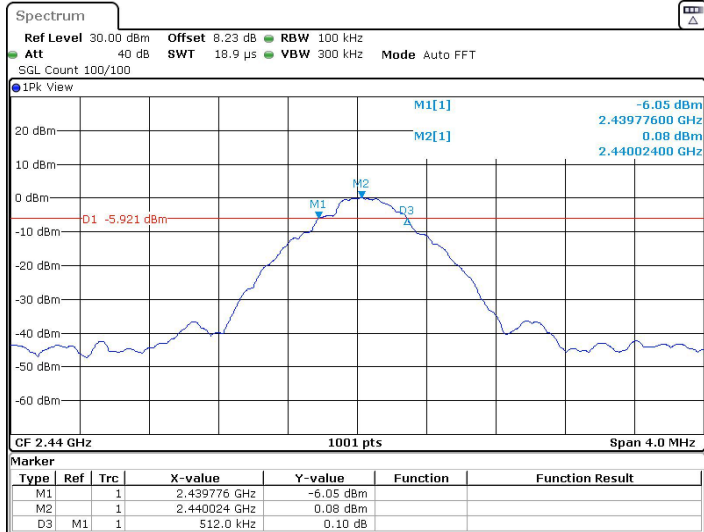

Date: 26.SEP.2022 04:52:38

Bureau Veritas Shenzhen Co., Ltd


1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China

Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>



BUREAU VERITAS

TEST REPORT NUMBER: (8522)244-0297-(A)

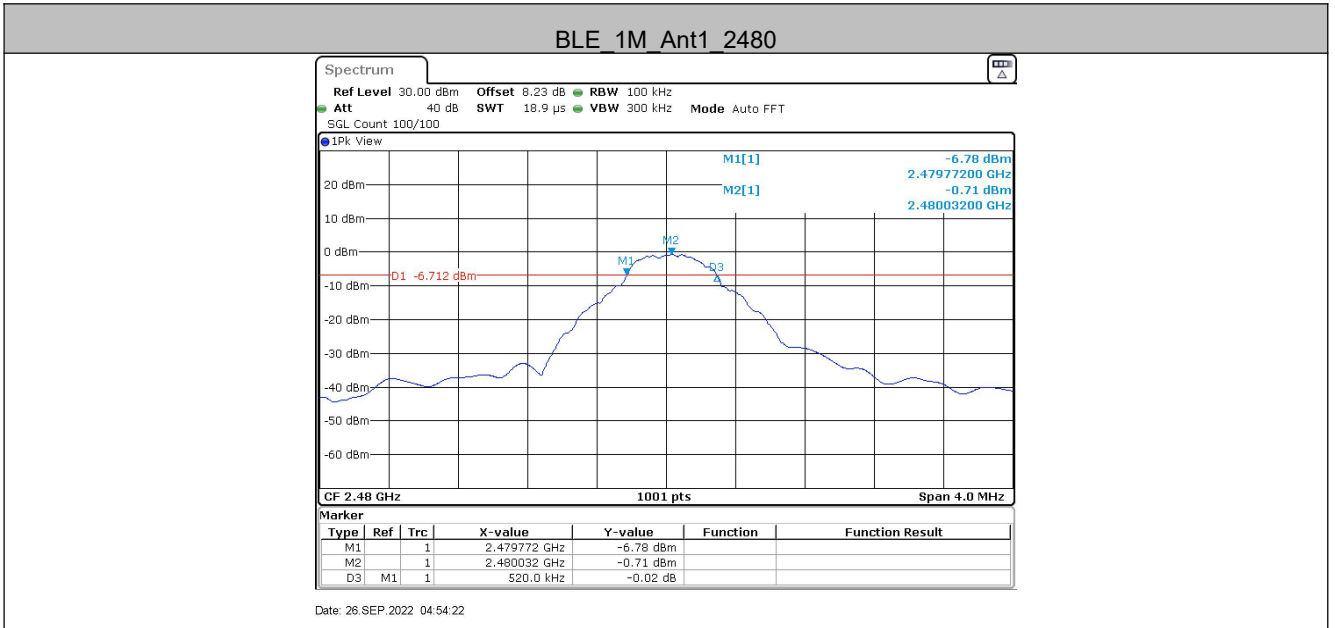

Bureau Veritas Shenzhen Co., Ltd

1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China

Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>



4.4 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 2013
Test Setup:	<p style="text-align: center;"><i>Remark: Offset=Cable loss+ attenuation factor.</i></p>
Limit:	≤8.00dBm/3kHz
Test Mode:	Transmitting with GFSK modulation.
Test Results:	Pass

Measurement Data


TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-13.22	≤8	PASS
		2440	-11.5	≤8	PASS
		2480	-12.28	≤8	PASS



BUREAU
VERITAS

TEST REPORT NUMBER: (8522)244-0297-(A)

Test plot as follows:

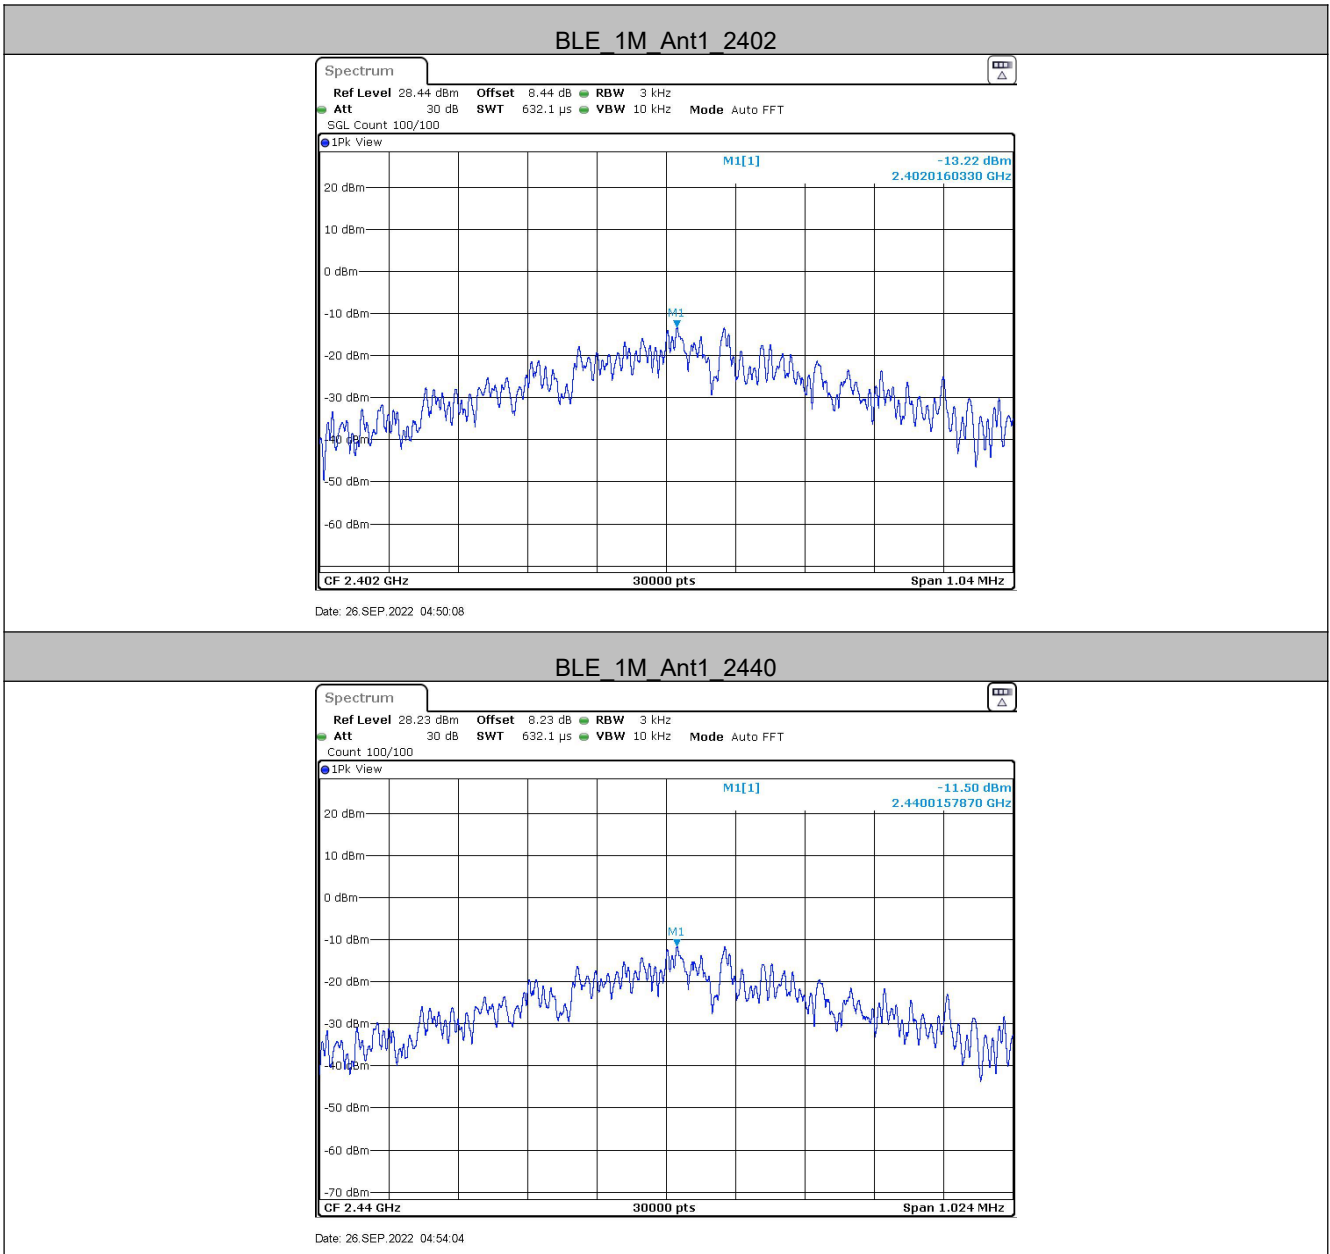

Bureau Veritas Shenzhen Co., Ltd


1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China

Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>



BUREAU
VERITAS

TEST REPORT NUMBER: (8522)244-0297-(A)

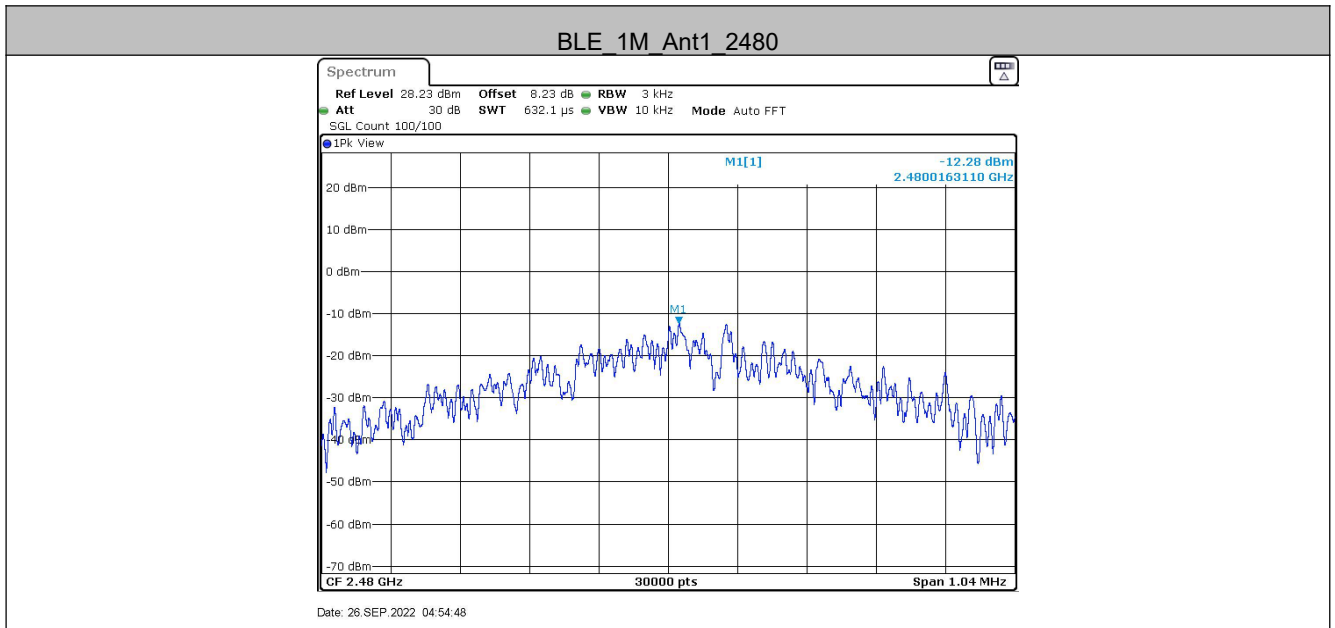


Bureau Veritas Shenzhen Co., Ltd

1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China

Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>

TEST REPORT NUMBER: (8522)244-0297-(A)

4.5 Band-edge for RF Conducted Emissions

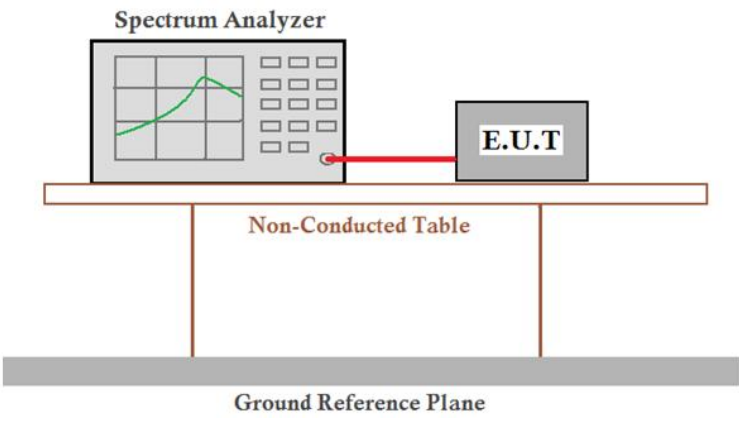Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p><i>Remark: Offset=Cable loss+ attenuation factor.</i></p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with GFSK modulation.
Test Results:	Pass

Measurement Data


TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-1.20	-44.47	≤-21.2	PASS
		High	2480	-0.36	-48.93	≤-20.36	PASS



BUREAU VERITAS


TEST REPORT NUMBER: (8522)244-0297-(A)

Test plot as follows:

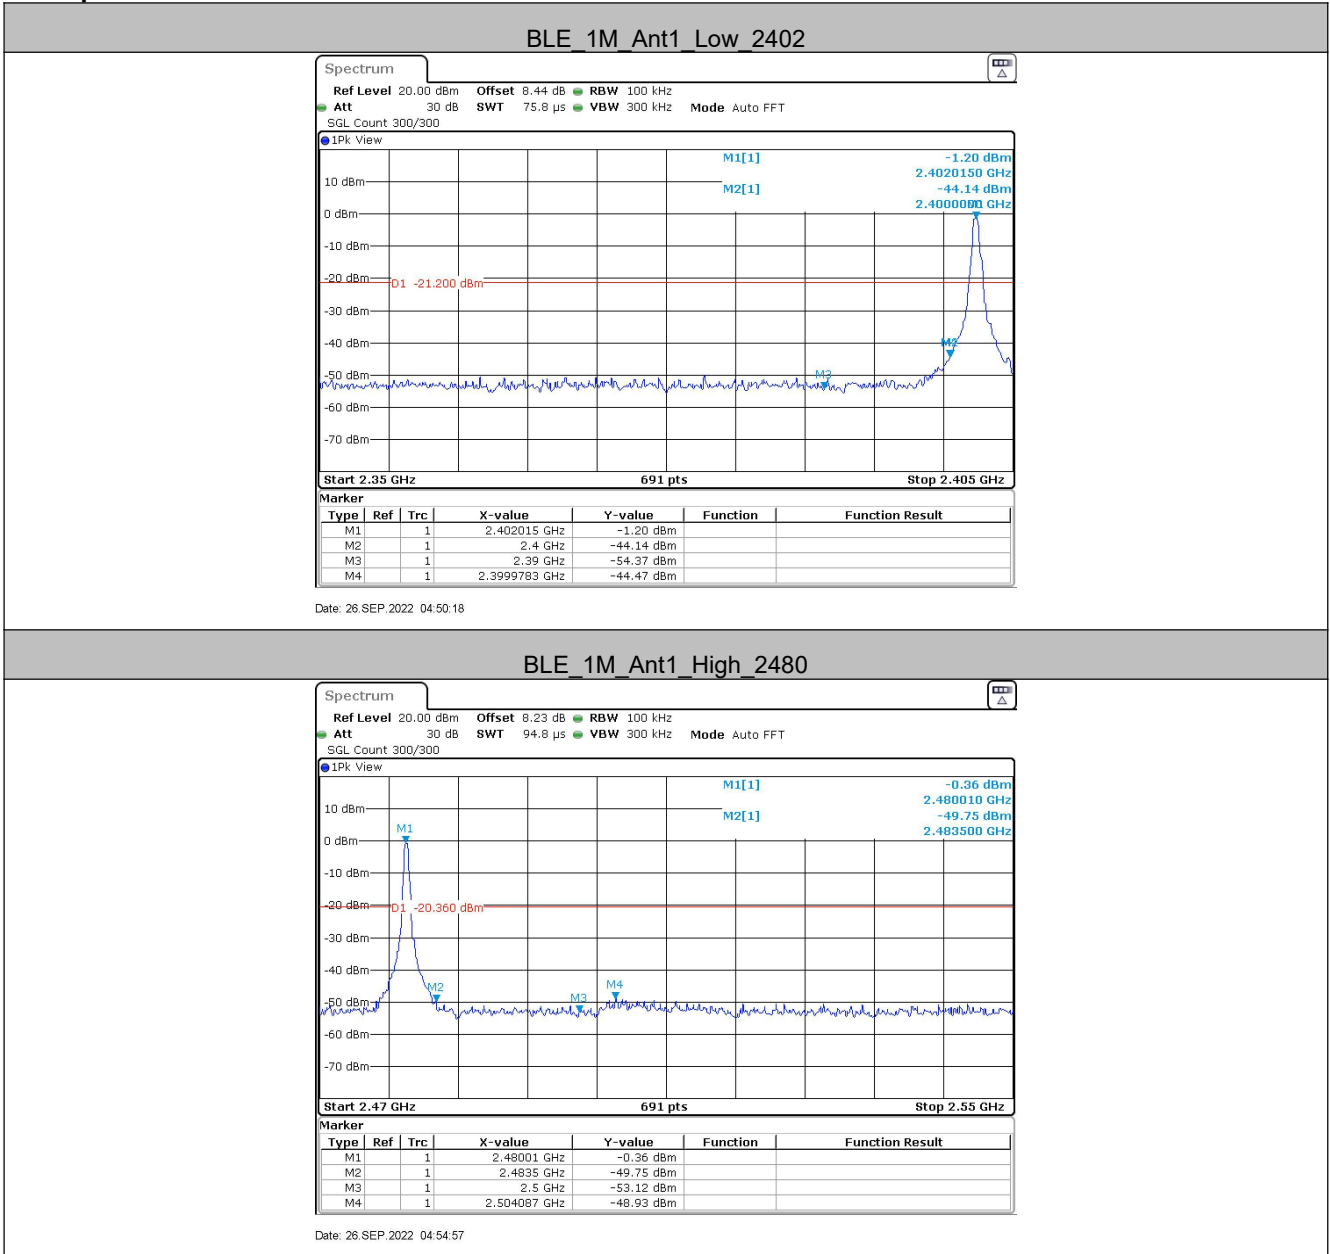

TEST REPORT NUMBER: (8522)244-0297-(A)

4.6 Spurious RF Conducted Emissions

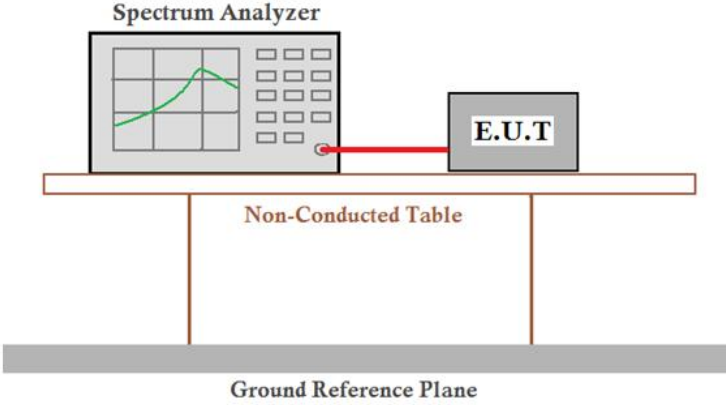Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p><i>Remark: Offset=Cable loss+ attenuation factor.</i></p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with GFSK modulation.
Test Results:	Pass

Measurement Data


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	-1.28	-1.28	---	PASS
			30~1000	-1.28	-59.07	≤-21.28	PASS
			1000~26500	-1.28	-39.58	≤-21.28	PASS
		2440	Reference	0.35	0.35	---	PASS
			30~1000	0.35	-59.29	≤-19.65	PASS
			1000~26500	0.35	-41.03	≤-19.65	PASS
		2480	Reference	-0.39	-0.39	---	PASS
			30~1000	-0.39	-59.35	≤-20.39	PASS
			1000~26500	-0.39	-40.38	≤-20.39	PASS



BUREAU VERITAS

TEST REPORT NUMBER: (8522)244-0297-(A)

Test plot as follows:

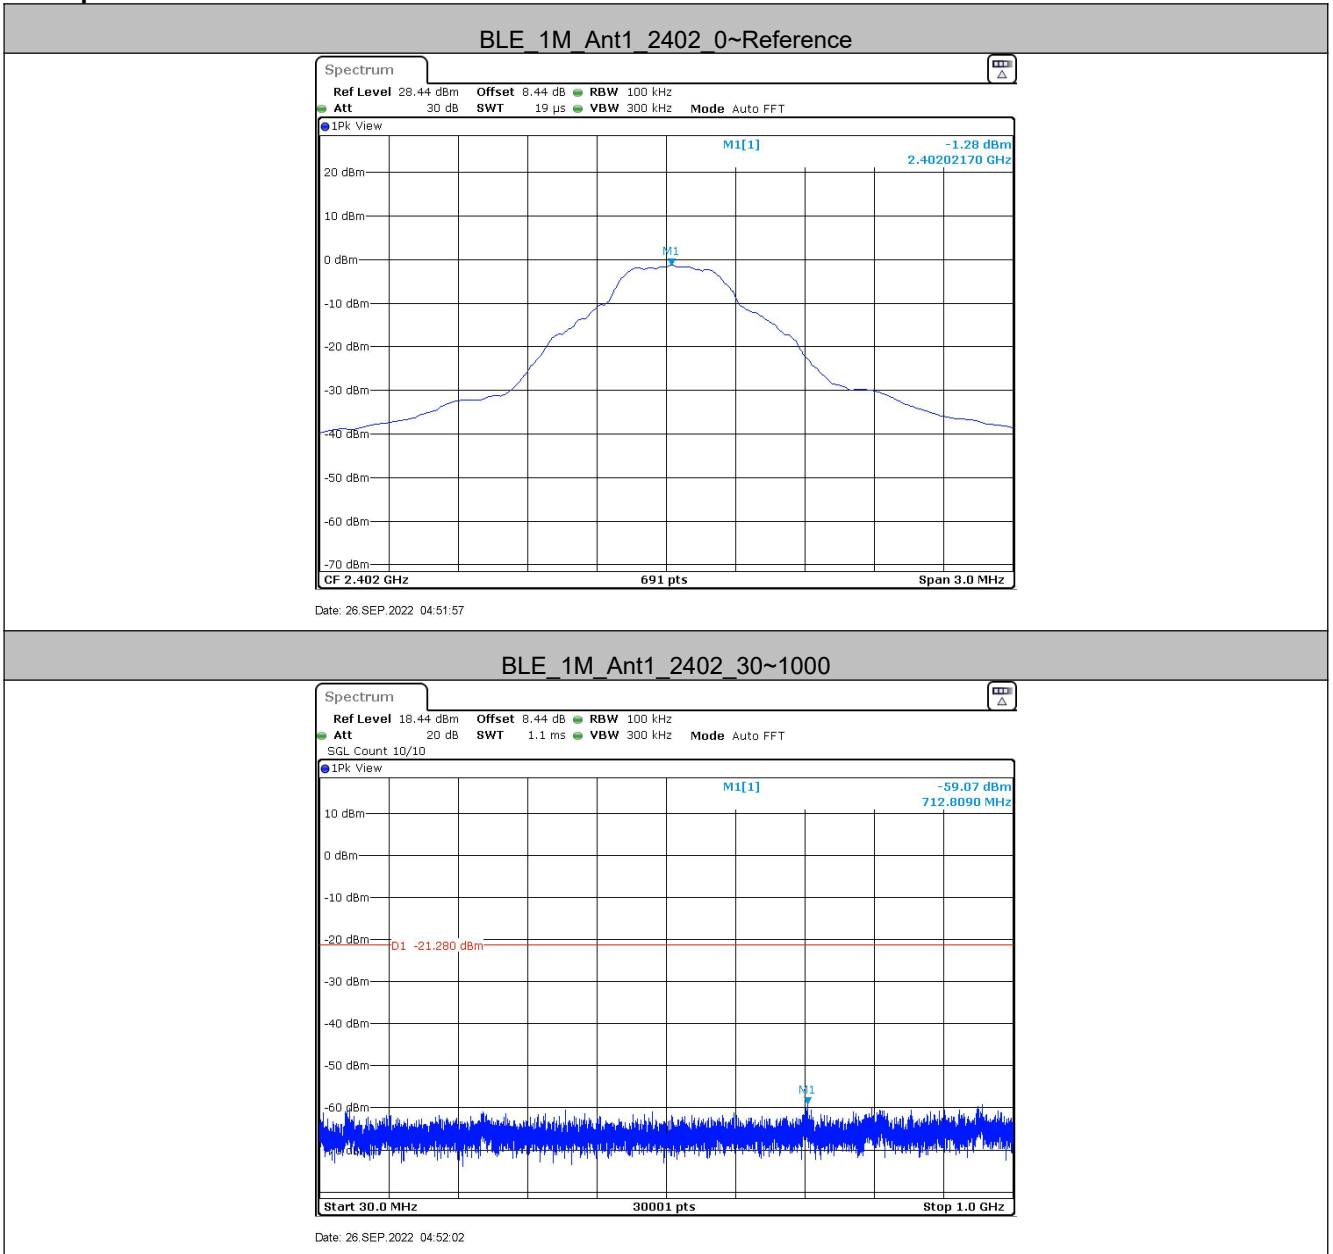

Bureau Veritas Shenzhen Co., Ltd

1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China


Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>



BUREAU VERITAS


TEST REPORT NUMBER: (8522)244-0297-(A)

BLE_1M_Ant1_2402_1000~26500

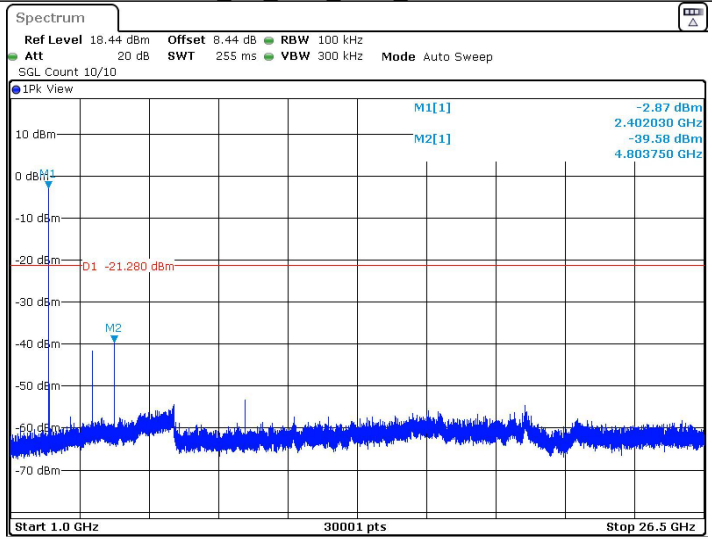

Date: 26.SEP.2022 04:52:24

BLE_1M_Ant1_2440_0~Reference

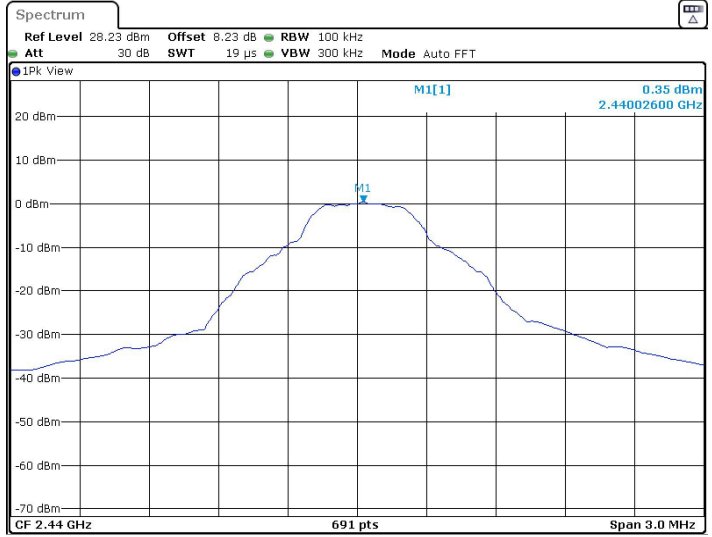

Date: 26.SEP.2022 04:53:15

Bureau Veritas Shenzhen Co., Ltd

1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China


Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>



BUREAU
VERITAS


TEST REPORT NUMBER: (8522)244-0297-(A)

BLE 1M Ant1_2440_30~1000

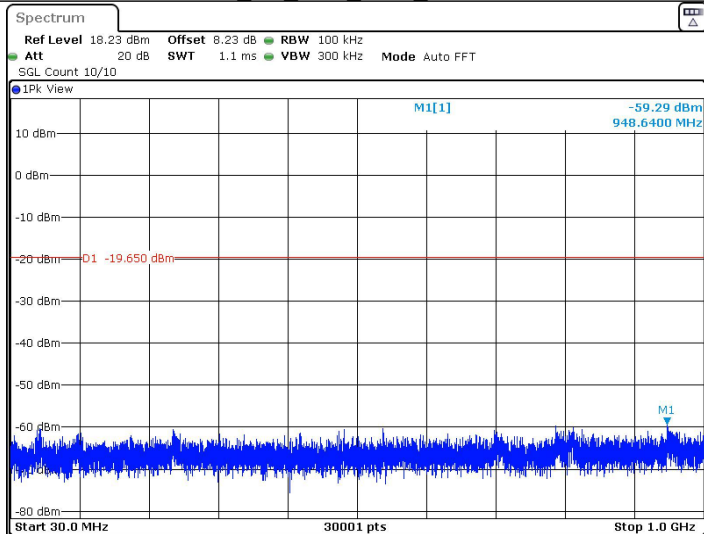

Date: 26.SEP.2022 04:53:19

BLE 1M Ant1_2440_1000~26500

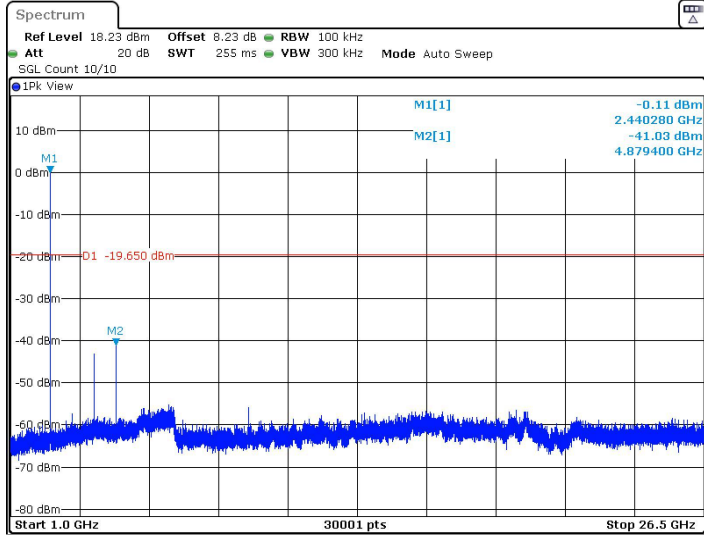

Date: 26.SEP.2022 04:53:41

Bureau Veritas Shenzhen Co., Ltd

1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China


Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>



BUREAU VERITAS


TEST REPORT NUMBER: (8522)244-0297-(A)

BLE_1M_Ant1_2480_0~Reference

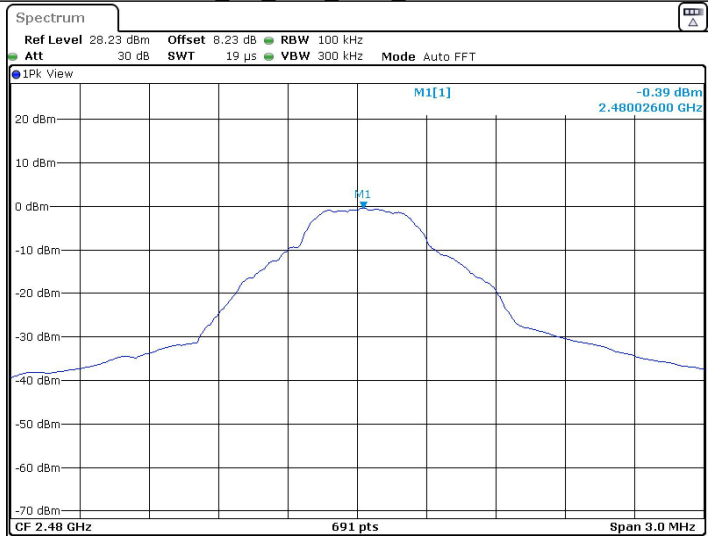

Date: 26.SEP.2022 04:56:52

BLE_1M_Ant1_2480_30~1000

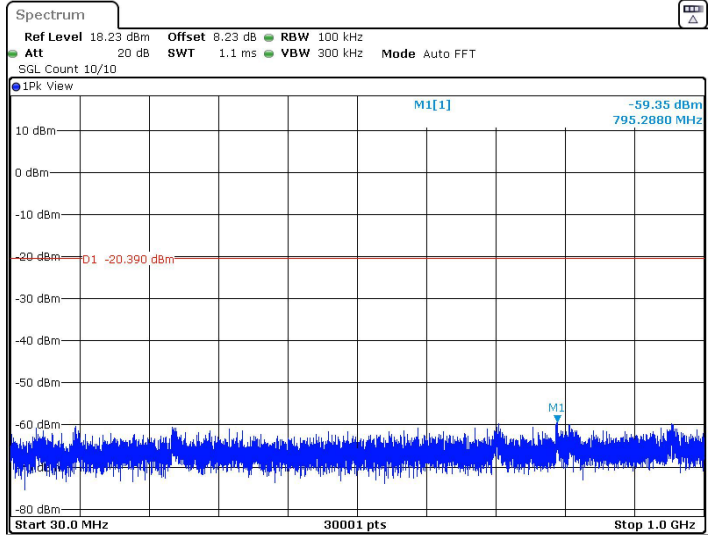

Date: 26.SEP.2022 04:56:57

Bureau Veritas Shenzhen Co., Ltd


1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China

Tel: +86 755 8600 0151
Email: <http://www.bureauveritas.com>



BUREAU VERITAS

TEST REPORT NUMBER: (8522)244-0297-(A)

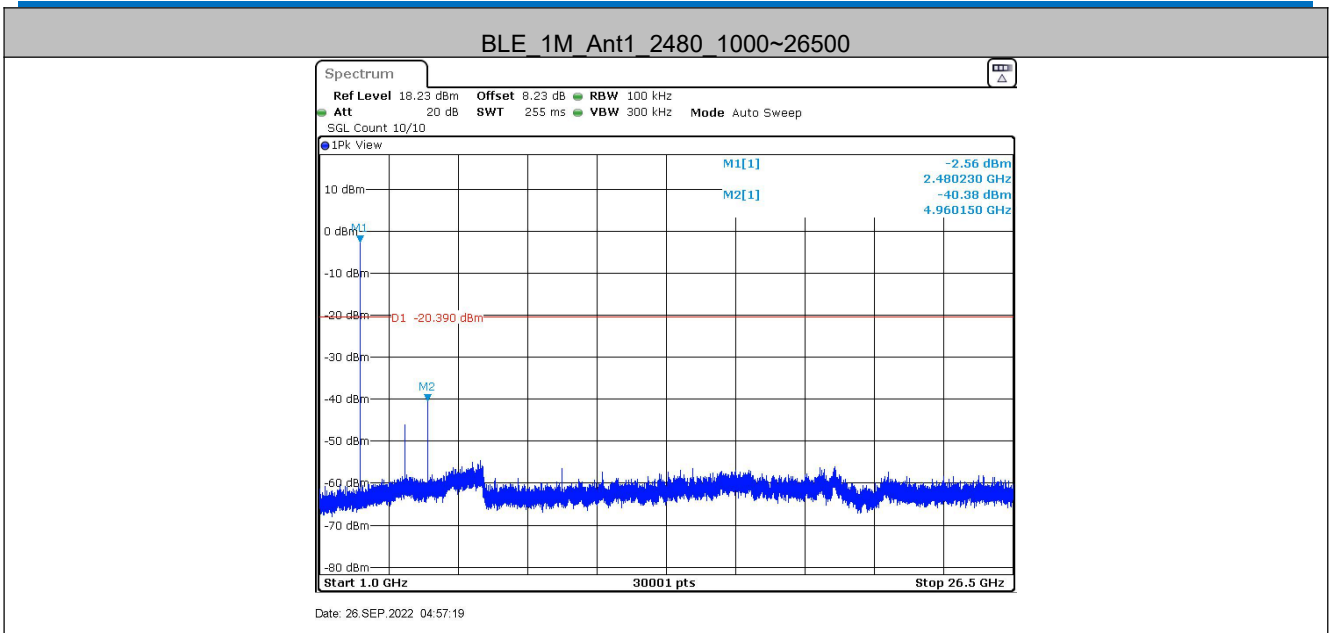

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

4.7 Radiated Spurious Emission & Restricted bands

4.7.1 Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

TEST REPORT NUMBER: (8522)244-0297-(A)

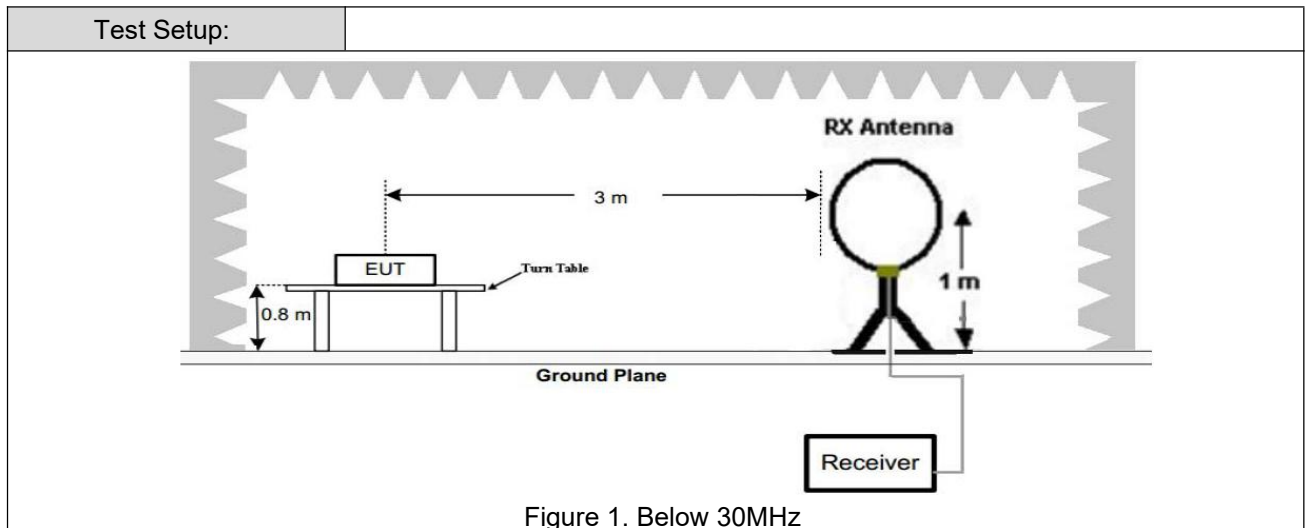


Figure 1. Below 30MHz

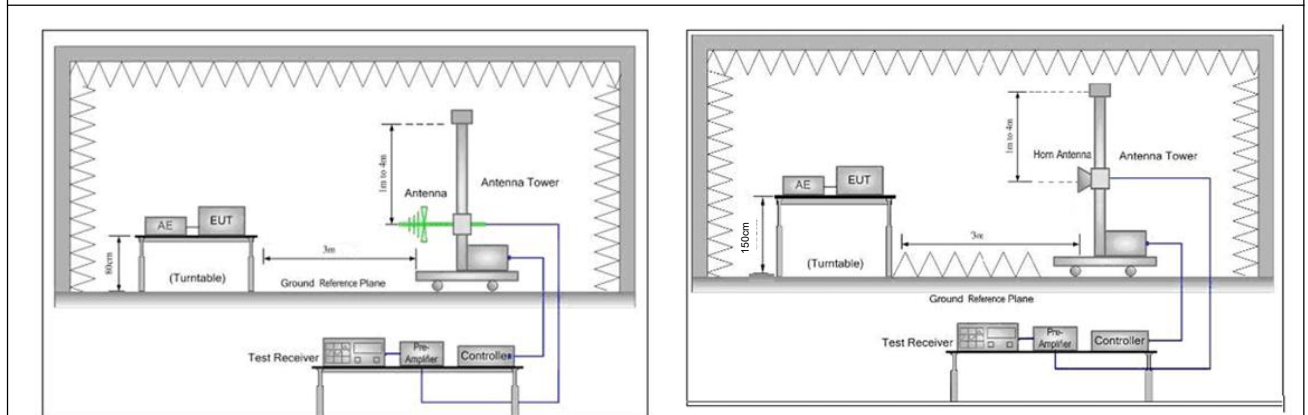


Figure 2. 30MHz to 1GHz

Figure 3. Above 1 GHz

<p>Test Procedure:</p>	<p>a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation</p>
------------------------	---



TEST REPORT NUMBER: (8522)244-0297-(A)

	<p>for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both</p>
	<p>horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
<p>Exploratory Test Mode:</p>	<p>Transmitting with GFSK modulation. Transmitting mode.</p>
<p>Final Test Mode:</p>	<p>Through Pre-scan, find the 1Mbps of data type and GFSK modulation is the worst case. For below 1GHz part, through pre-scan, the worst case is the highest channel. Only the worst case is recorded in the report.</p>
<p>Test Results:</p>	<p>Pass</p>




**BUREAU
VERITAS**

TEST REPORT NUMBER: (8522)244-0297-(A)

Radiated Emission below 1GHz

30MHz~1GHz, the worst case
 Test mode: Transmitting mode Horizontal

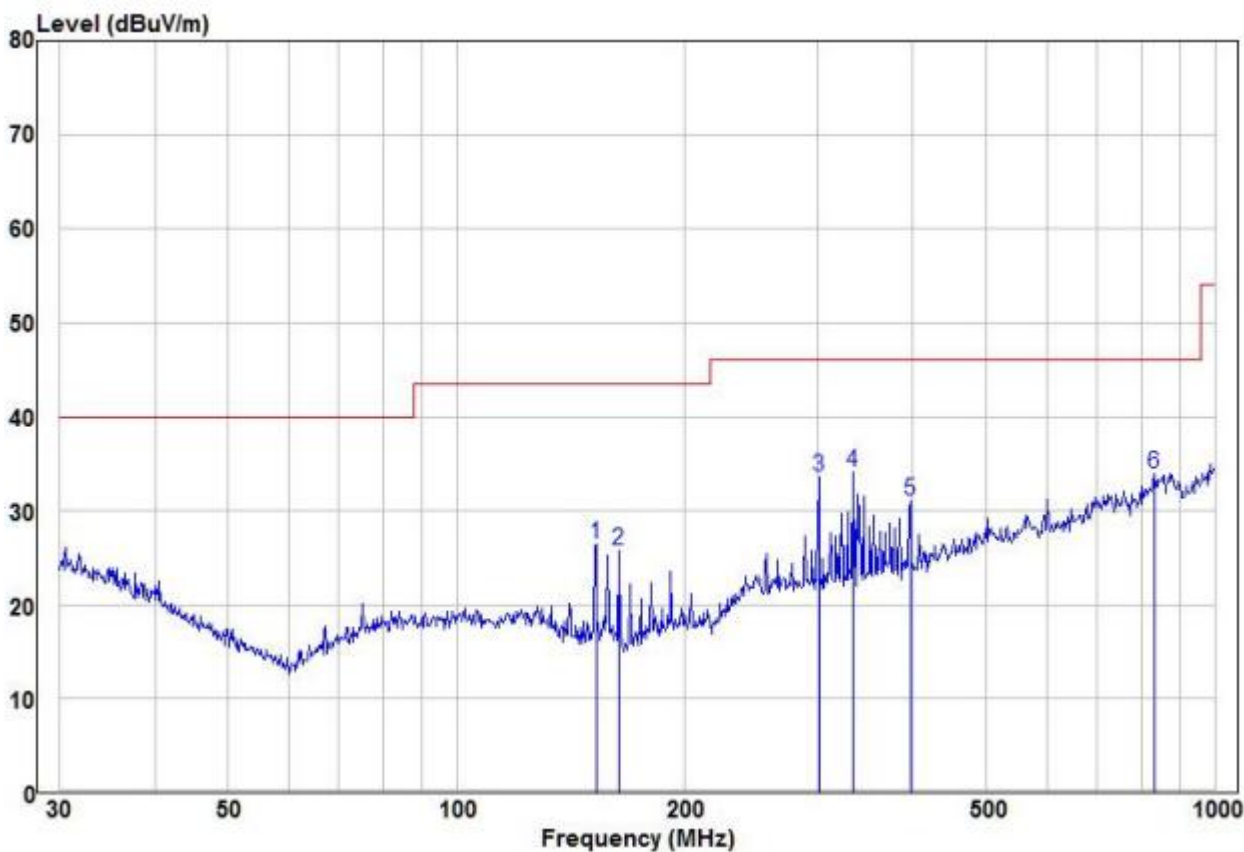

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	152.66	18.20	8.29	26.49	43.50	-17.01	Peak	HORIZONTAL
2	163.76	18.10	7.72	25.82	43.50	-17.68	Peak	HORIZONTAL
3	300.37	19.84	13.74	33.58	46.00	-12.42	Peak	HORIZONTAL
4 pp	333.69	19.50	14.55	34.05	46.00	-11.95	Peak	HORIZONTAL
5	396.24	15.92	15.06	30.98	46.00	-15.02	Peak	HORIZONTAL
6	833.32	9.97	23.97	33.94	46.00	-12.06	Peak	HORIZONTAL

Bureau Veritas Shenzhen Co., Ltd

1st Floor, Block A, Minlida Industrial Building, 4th
 Zone of Honghualing Industrial Park, Shenzhen,
 Guangdong Province, China


Tel: +86 755 8600 0151
 Email: <http://www.bureauveritas.com>



BUREAU VERITAS

TEST REPORT NUMBER: (8522)244-0297-(A)

30MHz~1GHz, the worst case		
Test mode:	Transmitting mode	Vertical

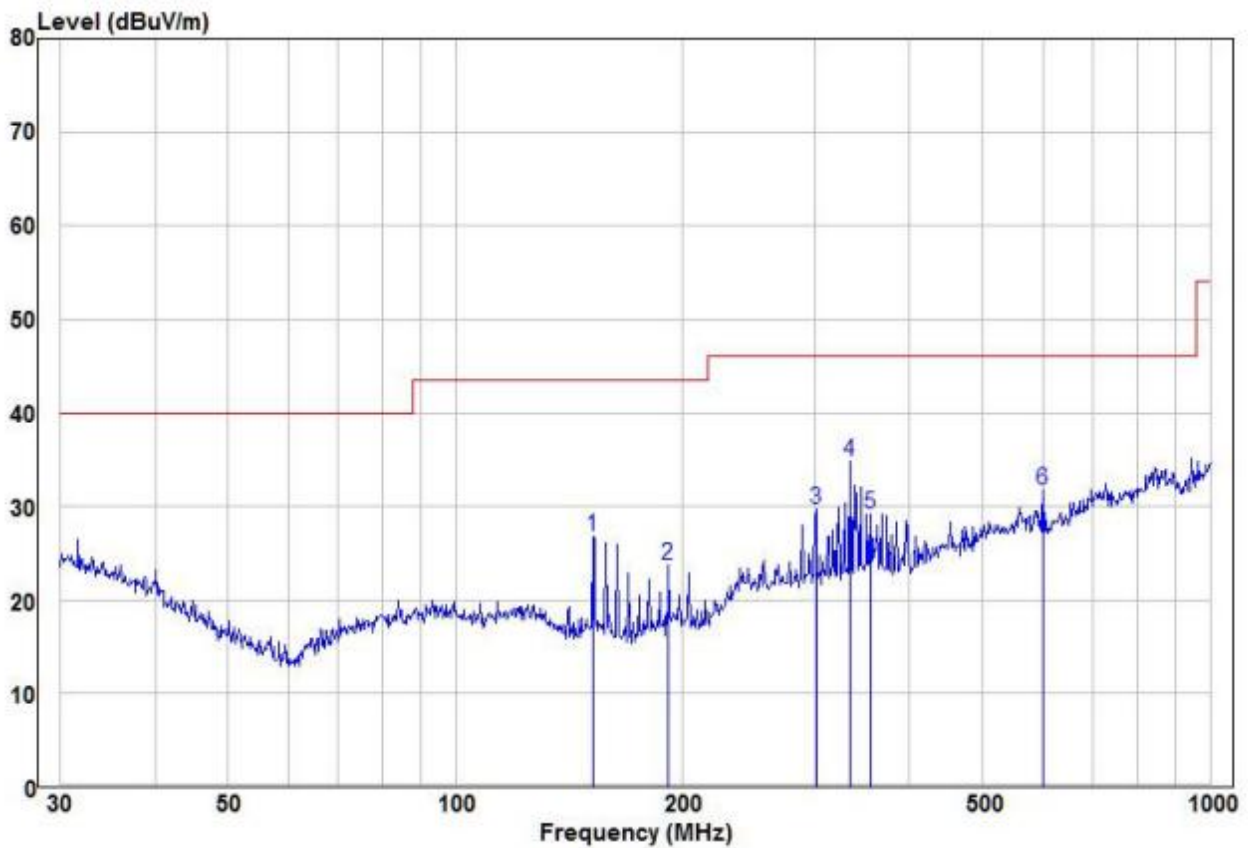

1	152.13	18.50	8.33	26.83	43.50	-16.67	Peak
2	191.75	15.72	8.06	23.78	43.50	-19.72	Peak
3	300.37	15.96	13.74	29.70	46.00	-16.30	Peak
4 pp	333.69	20.20	14.55	34.75	46.00	-11.25	Peak
5	355.43	14.11	15.08	29.19	46.00	-16.81	Peak
6	601.43	12.95	18.82	31.77	46.00	-14.23	Peak

Bureau Veritas Shenzhen Co., Ltd

1st Floor, Block A, Minlida Industrial Building, 4th
 Zone of Honghualing Industrial Park, Shenzhen,
 Guangdong Province, China

Tel: +86 755 8600 0151
 Email: <http://www.bureauveritas.com>

TEST REPORT NUMBER: (8522)244-0297-(A)

Transmitter Emission above 1GHz

Worse case mode:		GFSK(1Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		H/V
2390	56.21	-9.2	47.01	74	-26.99	Peak	H
2400	56.70	-9.39	47.31	74	-26.69	Peak	H
4804	53.81	-4.33	49.48	74	-24.52	Peak	H
7206	49.45	1.01	50.46	74	-23.54	Peak	H
2390	52.31	-9.2	43.11	74	-30.89	Peak	V
2400	52.86	-9.39	43.47	74	-30.53	Peak	V
4804	54.60	-4.33	50.27	74	-23.73	Peak	V
7206	48.78	1.01	49.79	74	-24.21	Peak	V

Worse case mode:		GFSK(1Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		H/V
4880	51.54	-4.11	47.43	74	-26.57	peak	H
7320	50.74	1.51	52.25	74	-21.75	peak	H
4880	53.27	-4.11	49.16	74	-24.84	peak	V
7320	49.60	1.51	51.11	74	-22.89	peak	V

Worse case mode:		GFSK(1Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		H/V
2483.5	56.11	-9.29	46.82	74	-27.18	Peak	H
4960	50.31	-4.04	46.27	74	-27.73	Peak	H
7440	48.57	1.57	50.14	74	-23.86	Peak	H
2483.5	55.24	-9.29	45.95	74	-28.05	Peak	V
4960	51.72	-4.04	47.68	74	-26.32	Peak	V
7440	51.16	1.57	52.73	74	-21.27	Peak	V

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:



TEST REPORT NUMBER: (8522)244-0297-(A)

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor


- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

TEST REPORT NUMBER: (8522)244-0297-(A)


5 Photographs - EUT Test Setup

5.1 Radiated Spurious Emission

9kHz~30MHz:

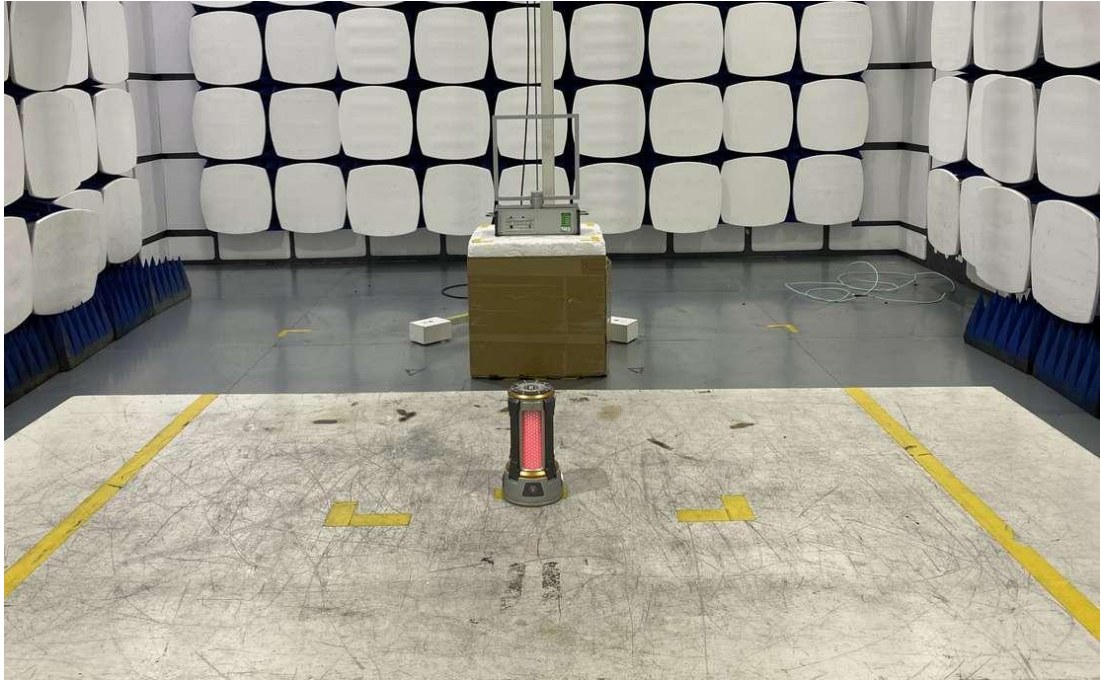


30MHz~1GHz:

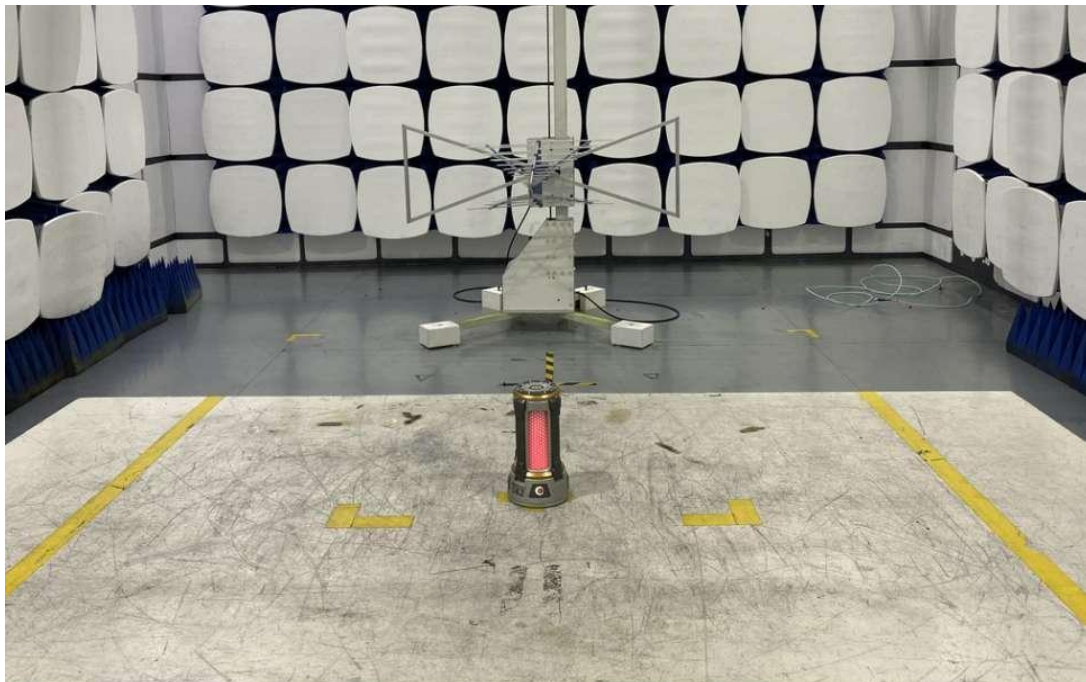

TEST REPORT NUMBER: (8522)244-0297-(A)

Above 1GHz:

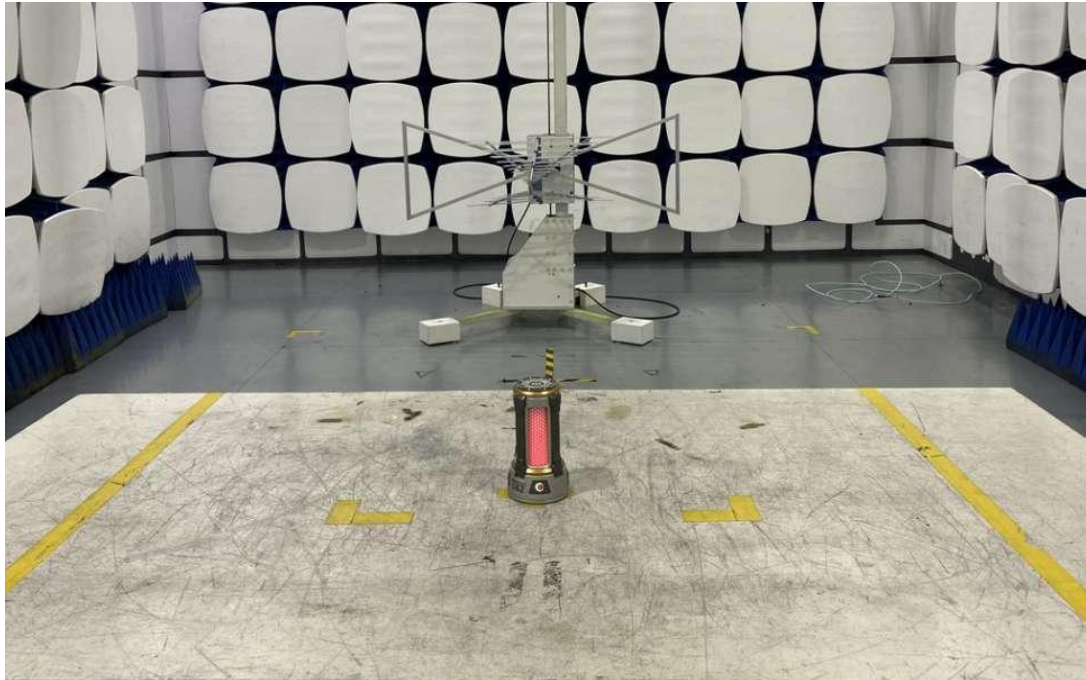

6 Photographs - EUT Constructional Details

Refer to Photographs - EUT Constructional Details OF EUT for (8522)244-0297

***** END OF REPORT *****