


**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 36: 5180 MHz

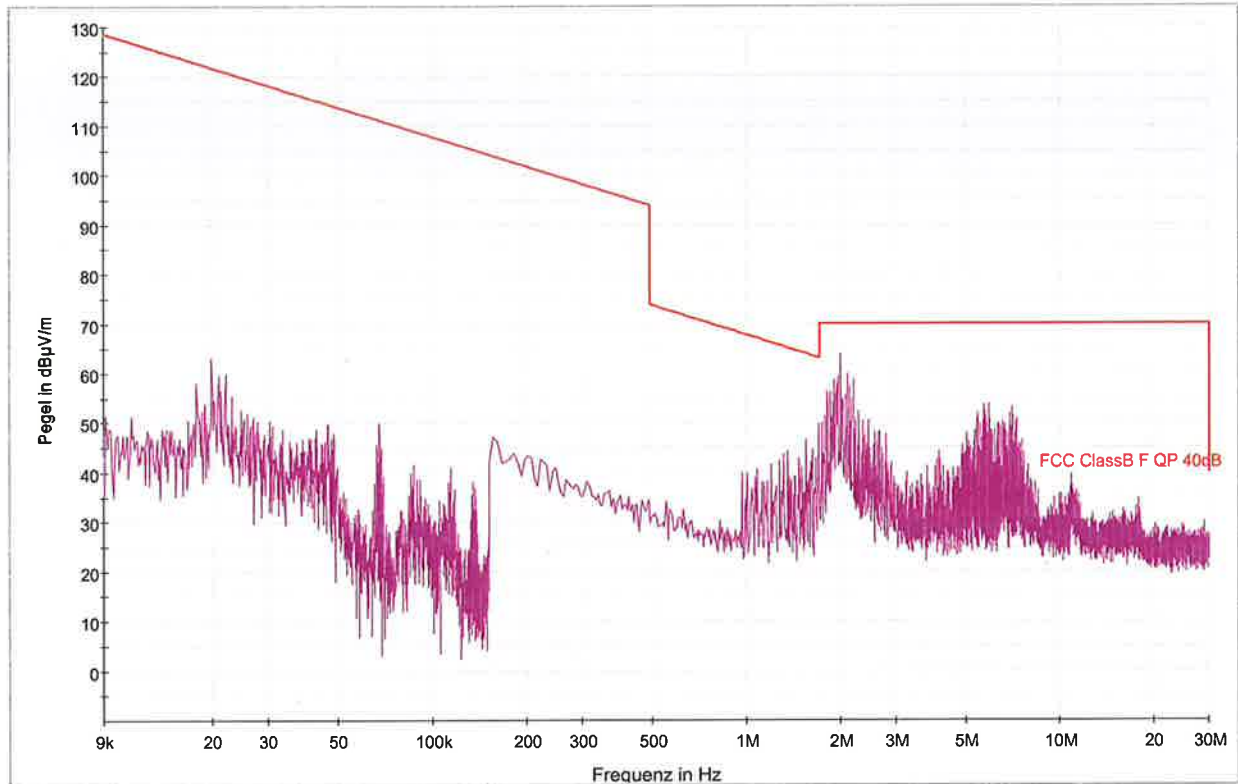

PK+\_CLRWR@Naim F0    FCC ClassB F QP 40dB

Worst case emission: 64,4 dBµV/m @ 1,92 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT                      SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 36: 5180 MHz

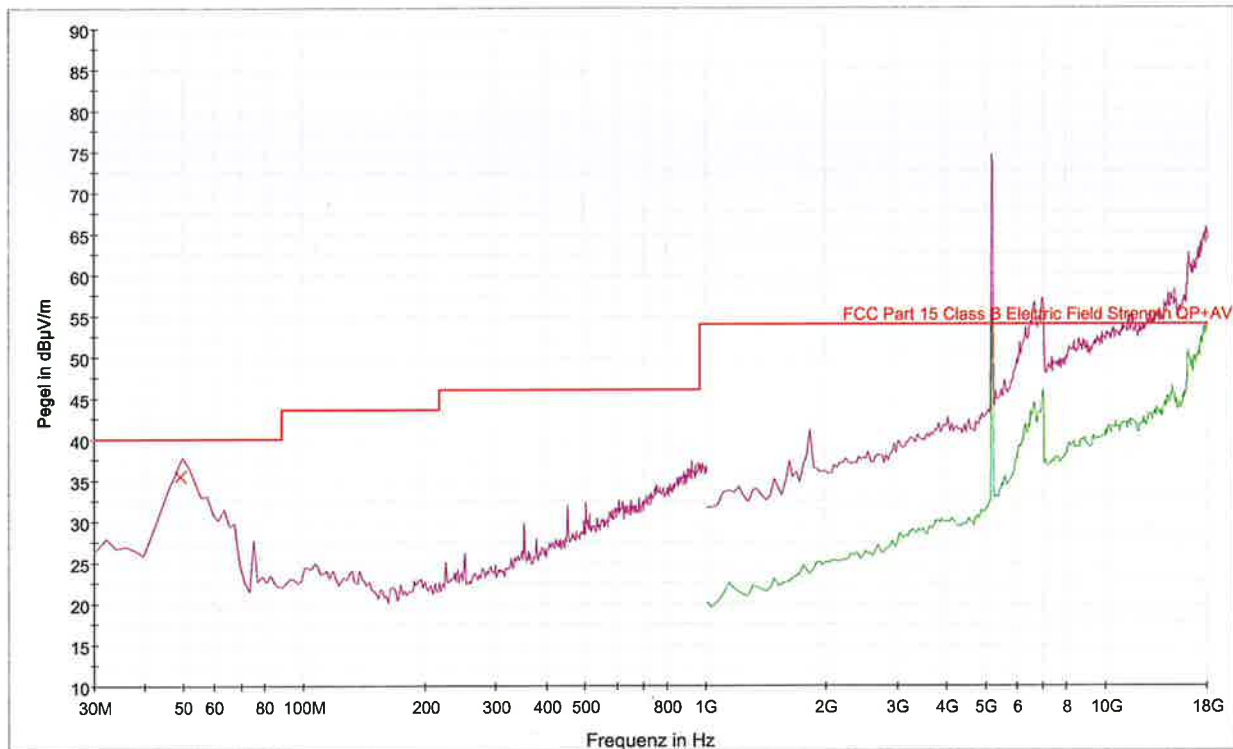

Worst case emission: 35,5 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the tenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line): Band Edge requirement

Setup: CH 36: 5180 MHz – Antennas used: ANT1612

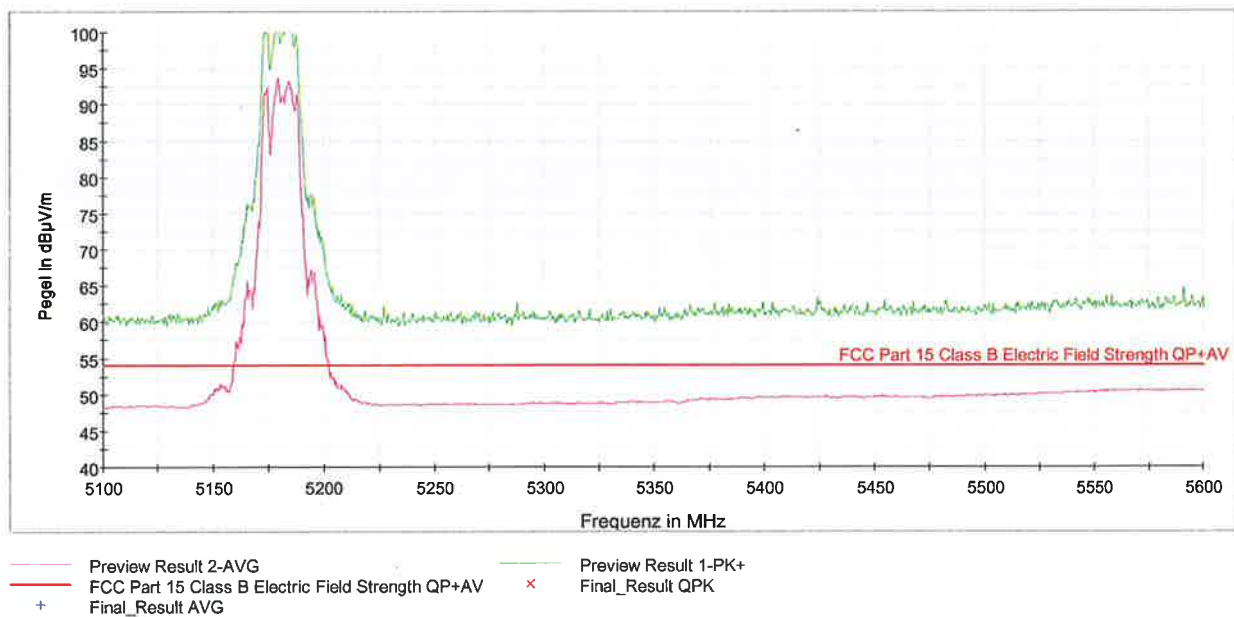

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Band edge of the nearest restricted band: 5150 MHz.

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-139; NT-207




**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 48: 5240 MHz

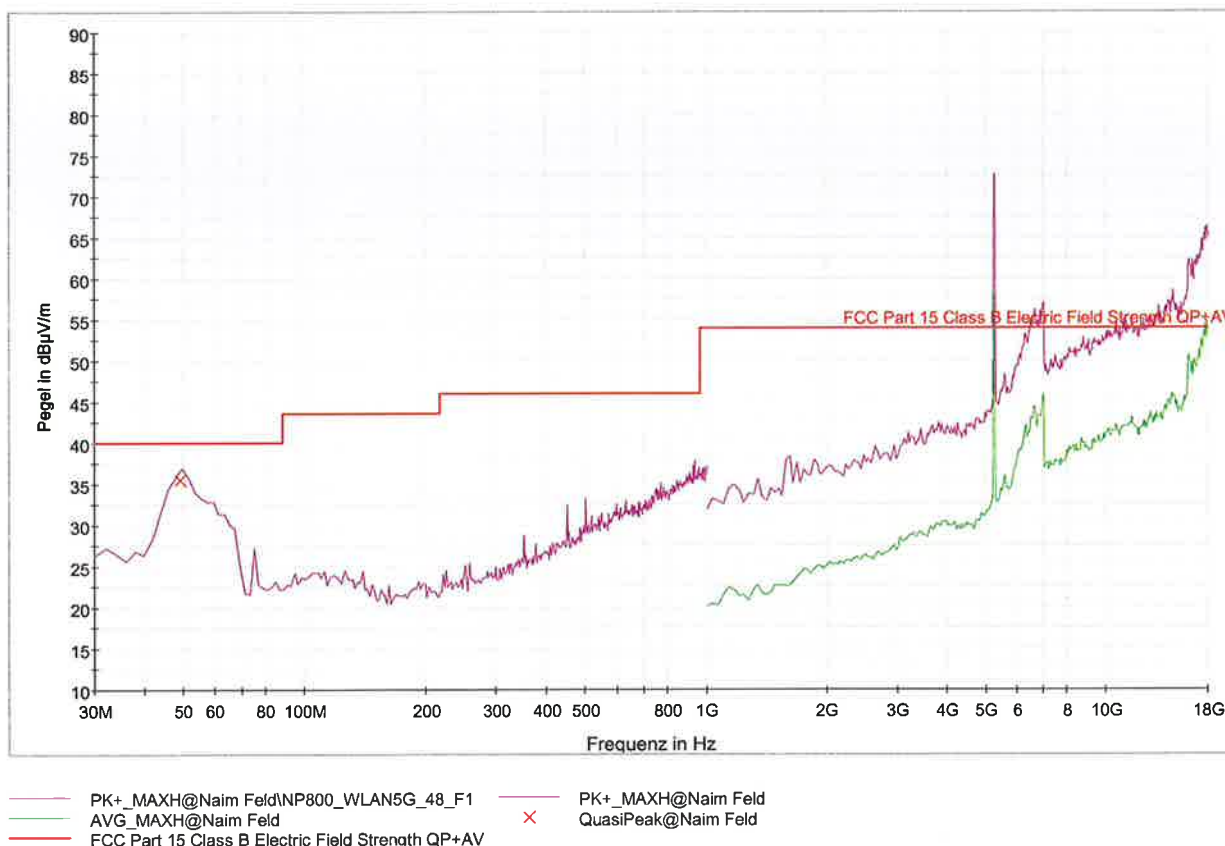

Worst case emission: 35,4 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the tenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 36-40: 5190 MHz

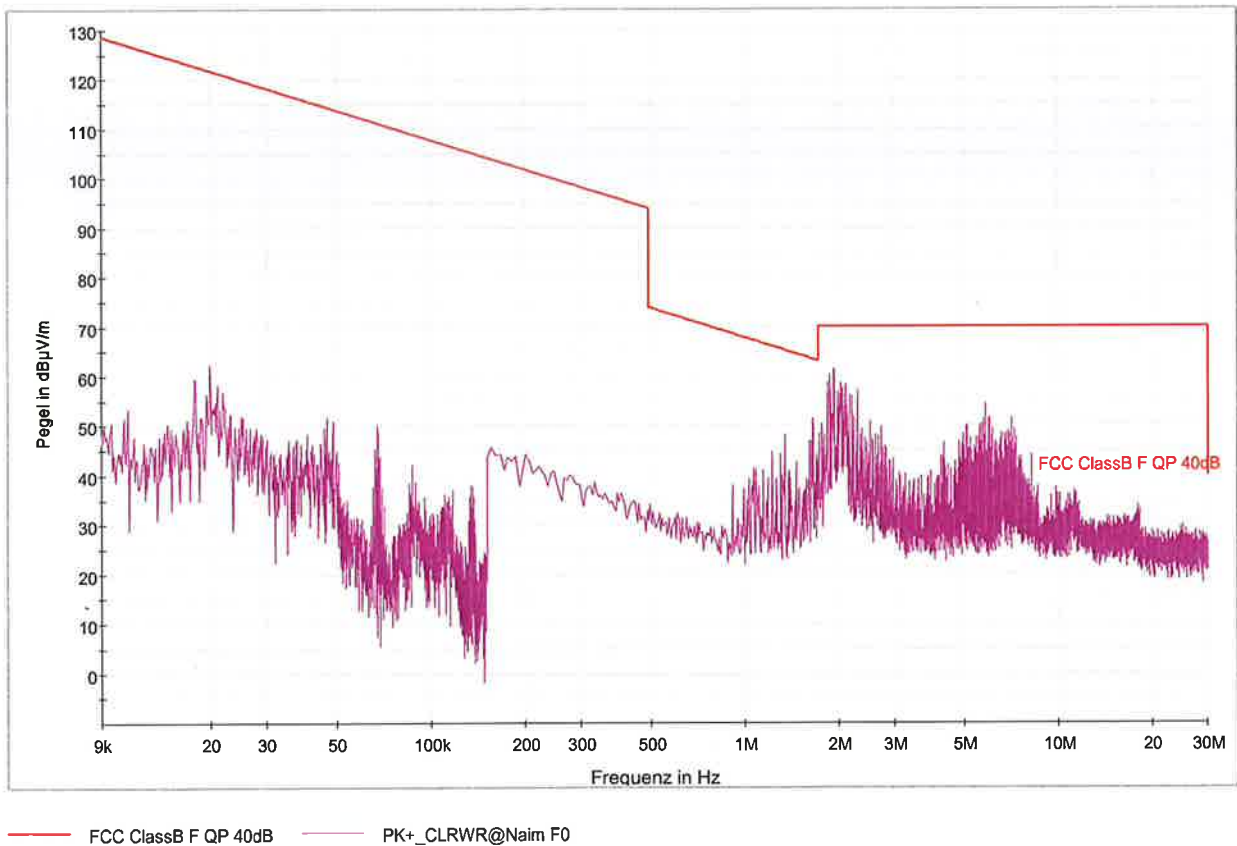

Worst case emission: 63,1 dBµV/m @ 19,8 kHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 36-40: 5190 MHz

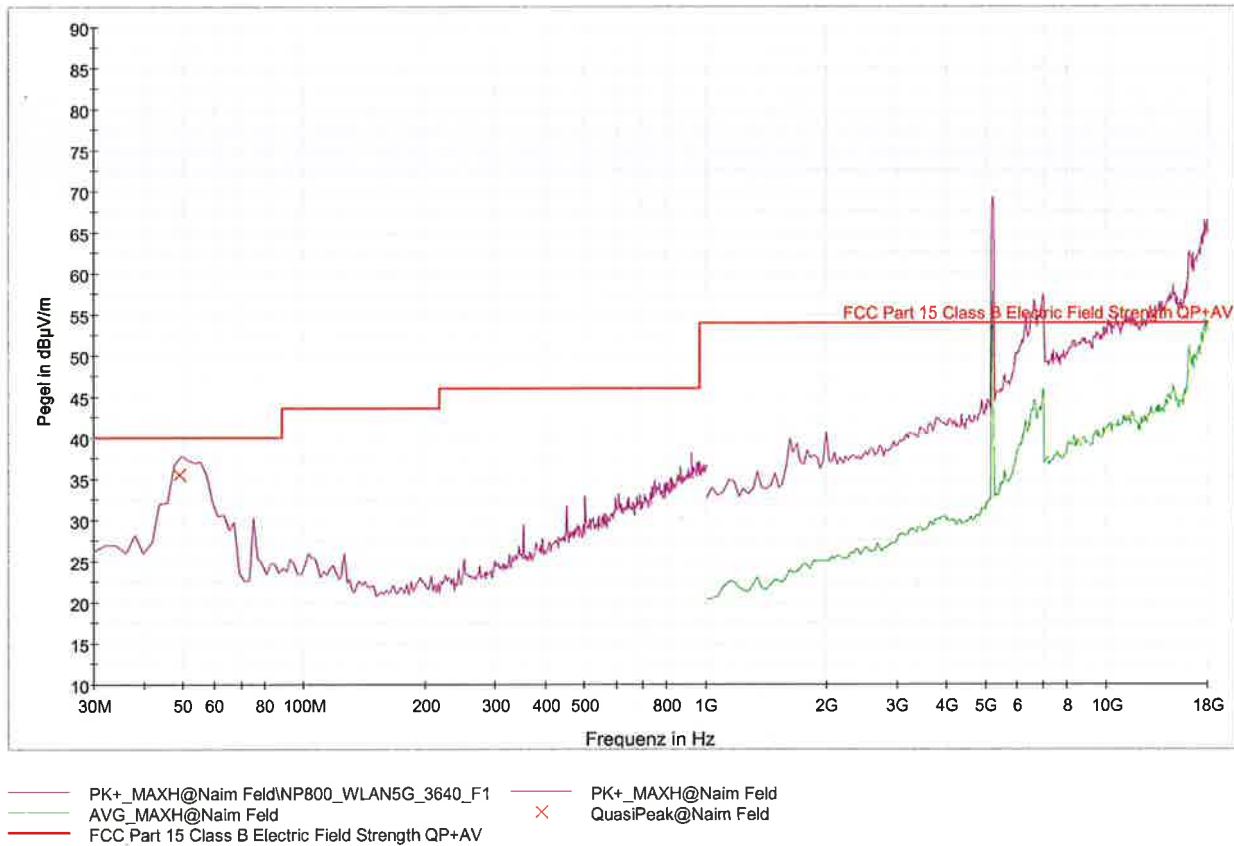

Worst case emission: 35,5 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the thenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line): Band Edge requirement

Setup: CH 36-40: 5190 MHz – Antennas used: ANT1612

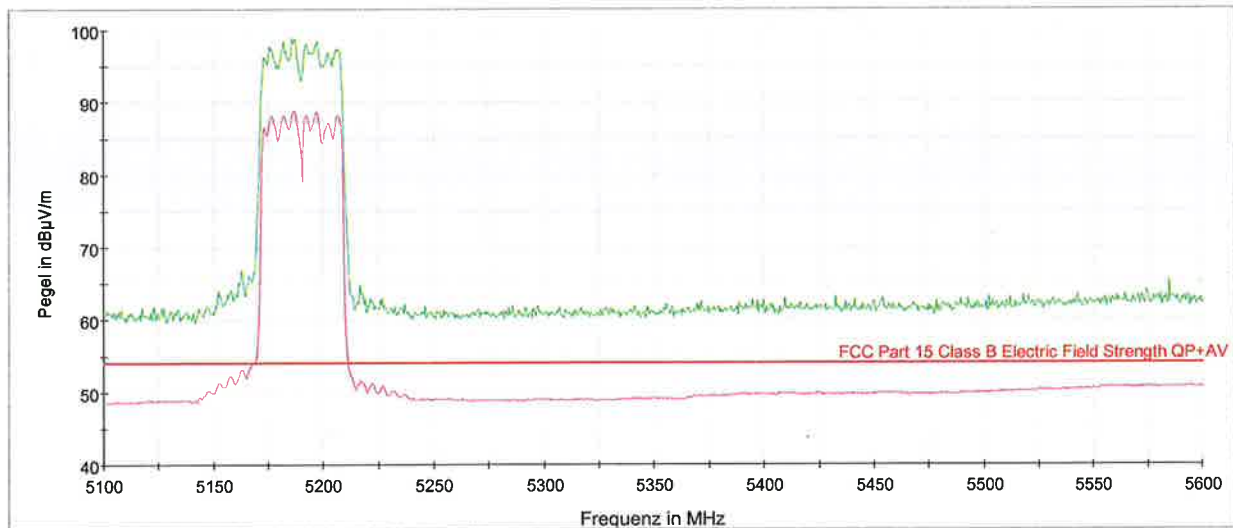

— Preview Result 2-AVG  
— FCC Part 15 Class B Electric Field Strength QP+AV  
— Preview Result 1-PK+  
+ Final\_Result AVG  
x Final\_Result QPK

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Band edge of the nearest restricted band: 5150 MHz.

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-139; NT-207




**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 44-48: 5230 MHz

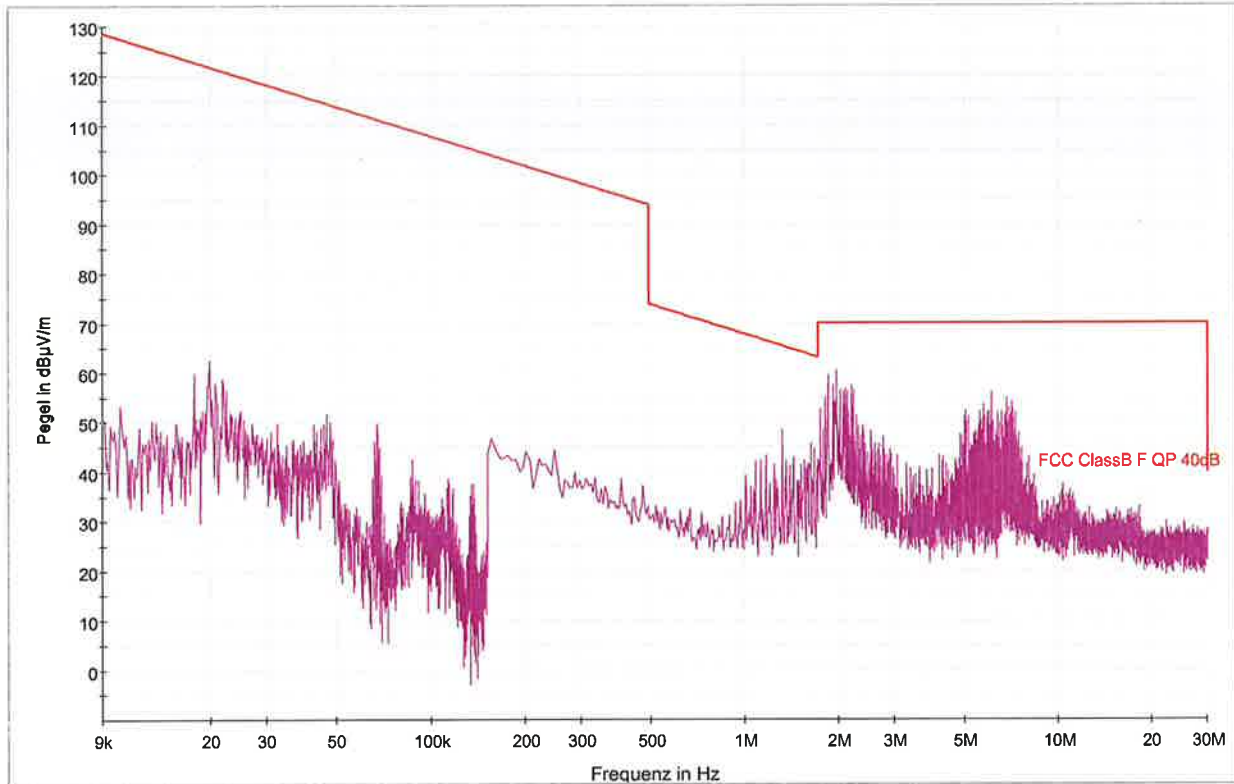

— FCC ClassB F QP 40dB — PK+\_CLRWR@Naim F0

Worst case emission: 62,4 dBµV/m @ 19,8 kHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 44-48: 5230 MHz

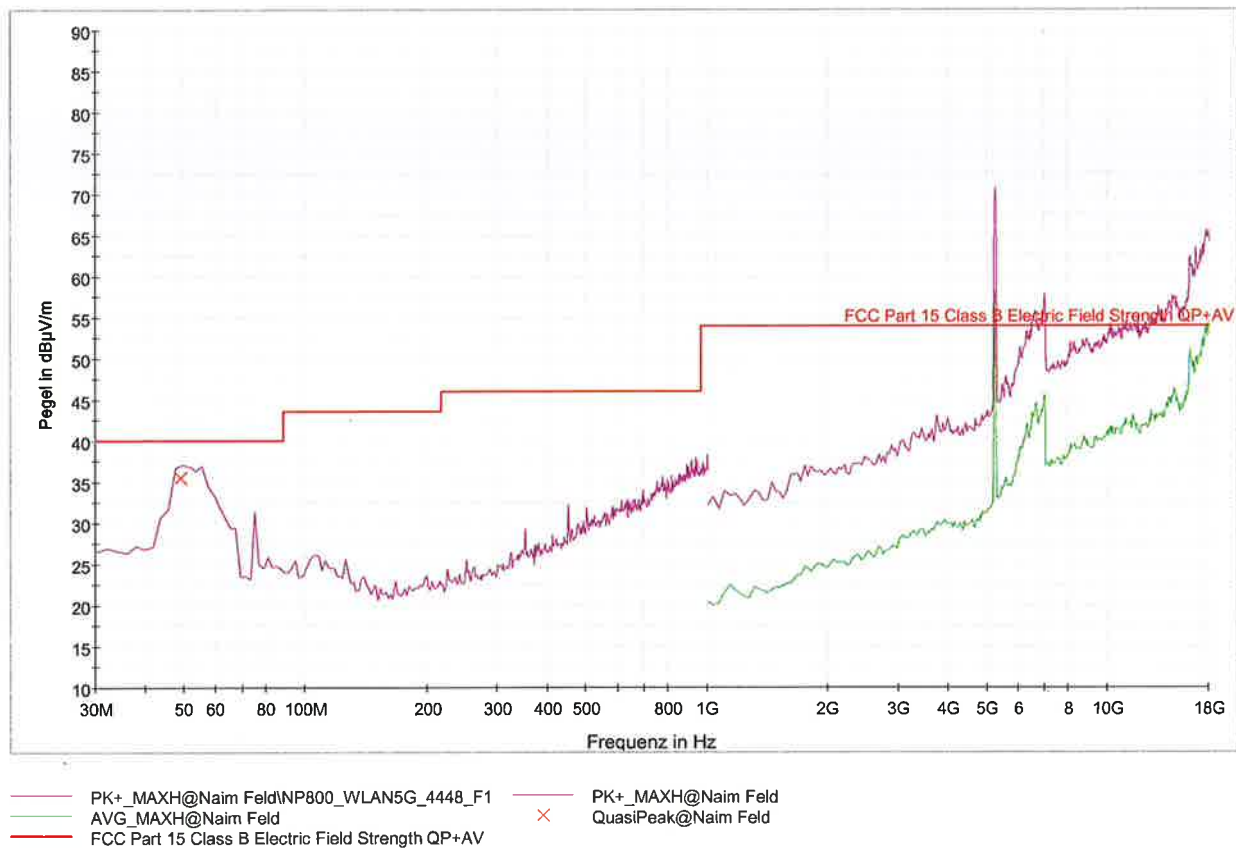

Worst case emission: 35,3 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the thenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 36-48: 5210 MHz

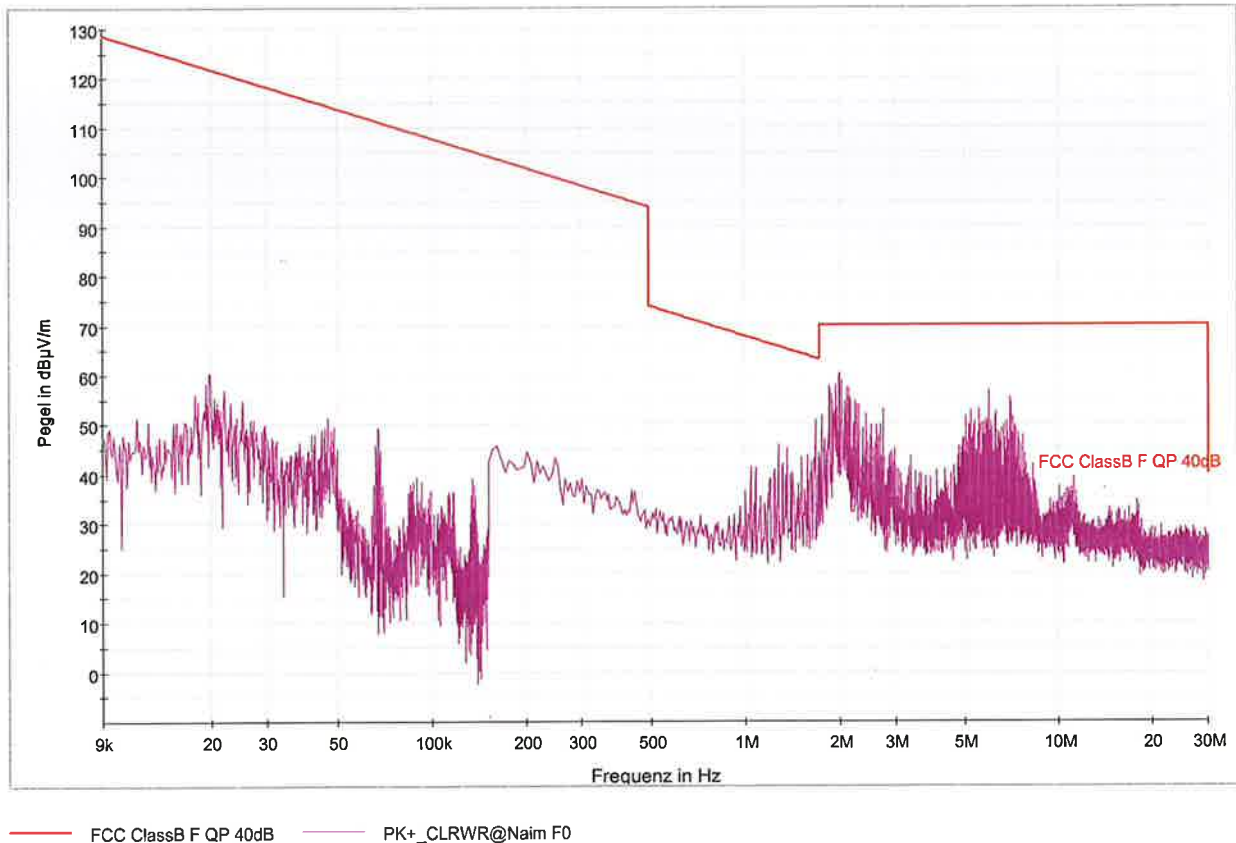

Worst case emission: 60,4 dBµV/m @ 19,8 kHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 36-48: 5210 MHz

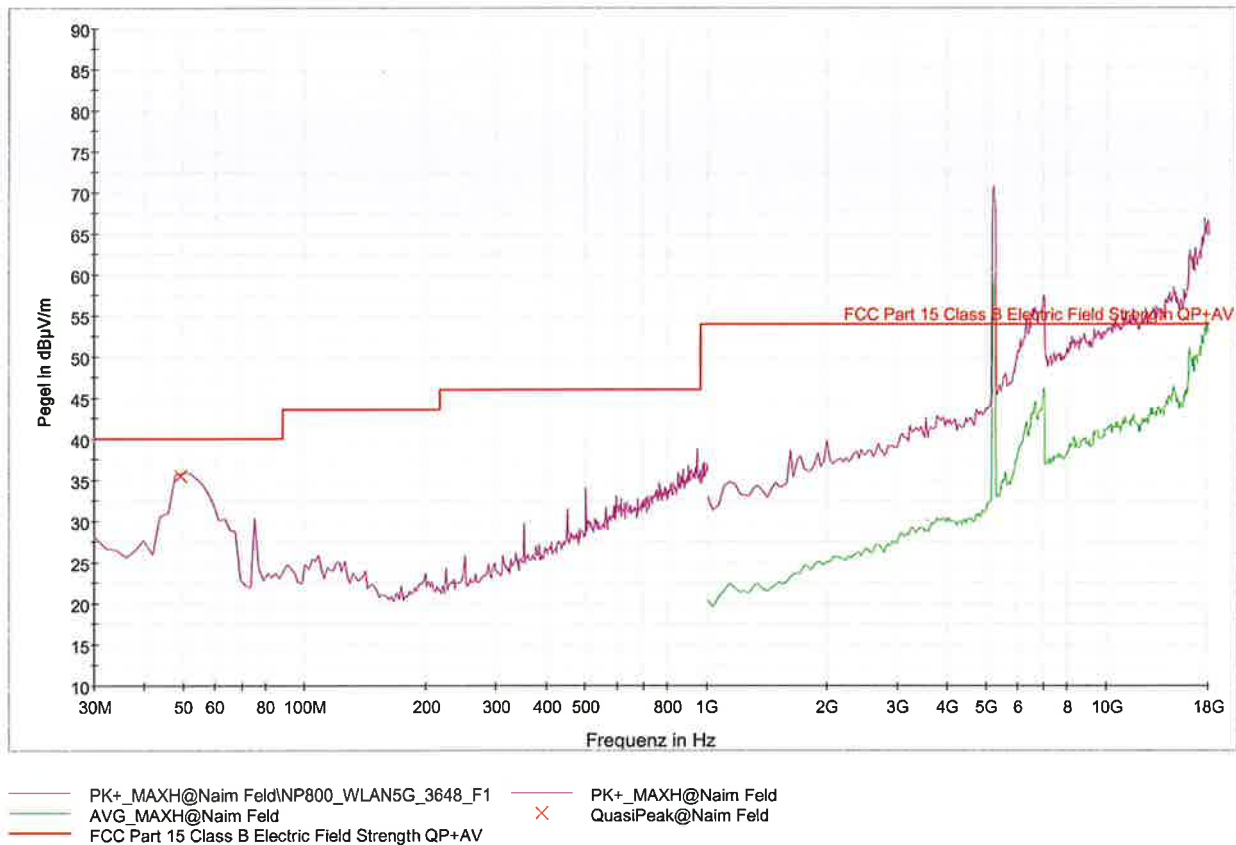

Worst case emission: 35,3 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the tenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line): Band Edge requirement

Setup: CH 36-48: 5210 MHz – Antennas used: ANT1612

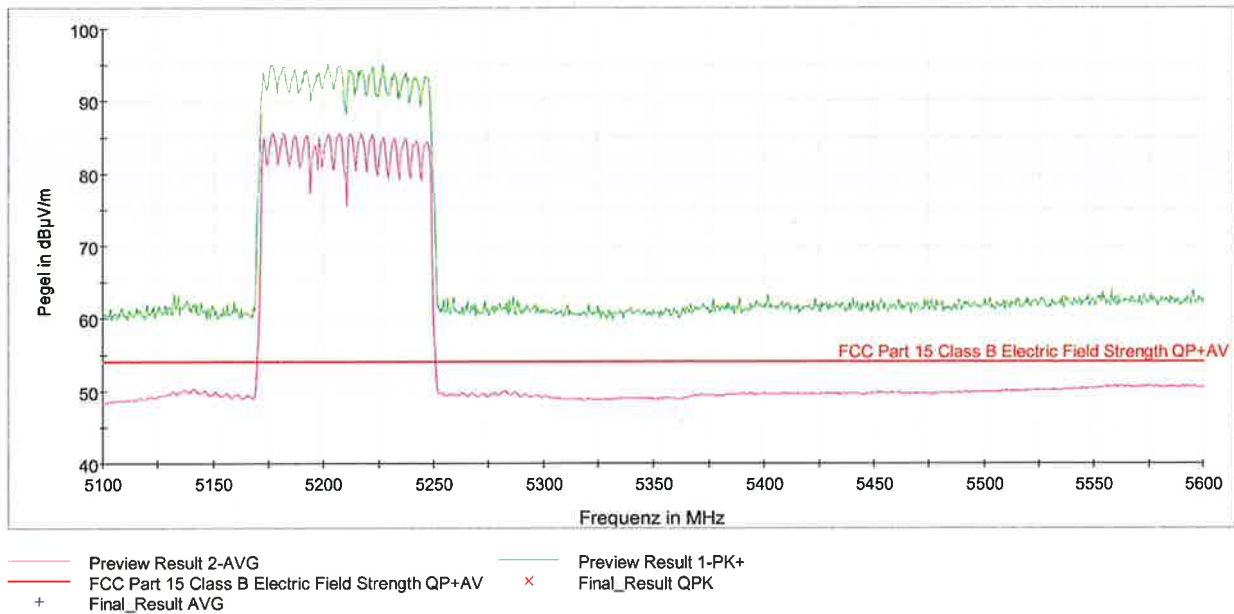

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Band edge of the nearest restricted band: 5150 MHz.


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-139; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 52: 5260 MHz

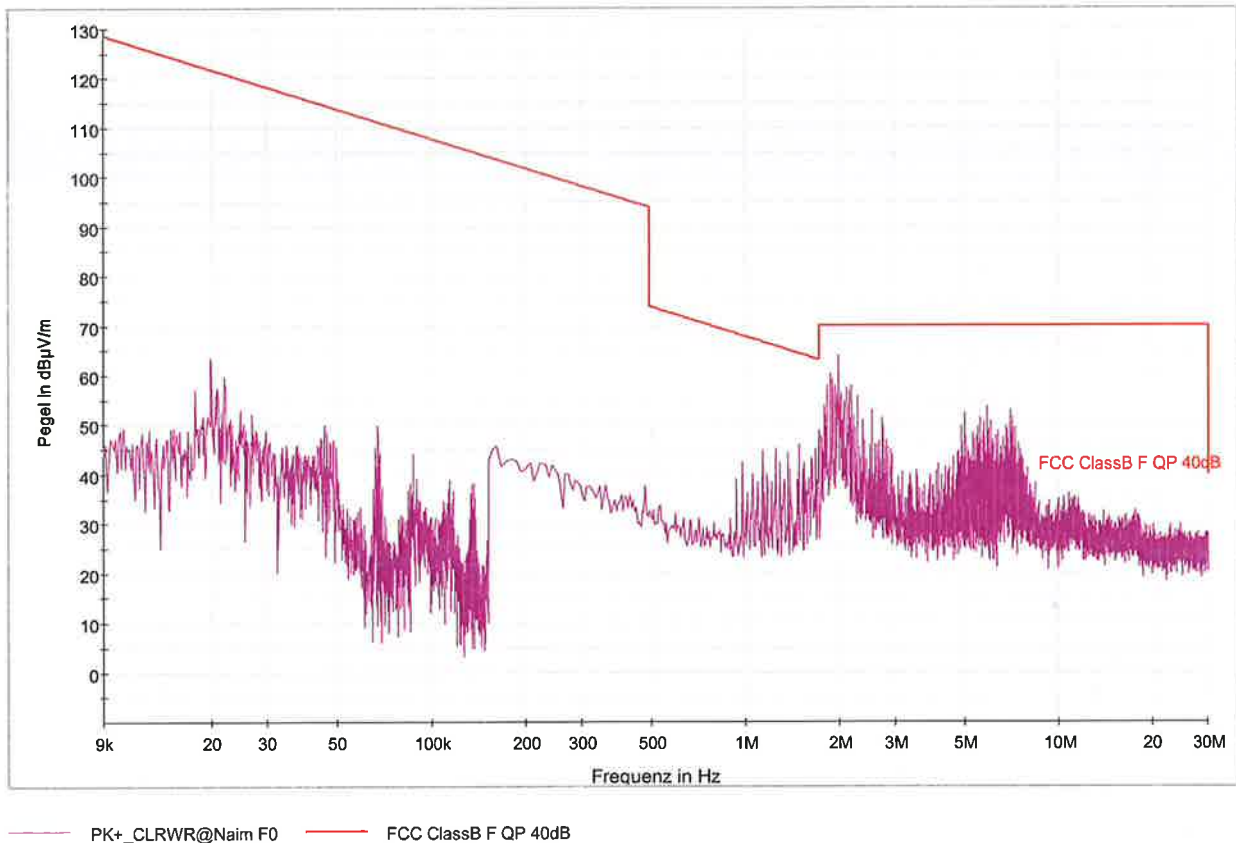

Worst case emission: 64,6 dBµV/m @ 1,92 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 52: 5260 MHz

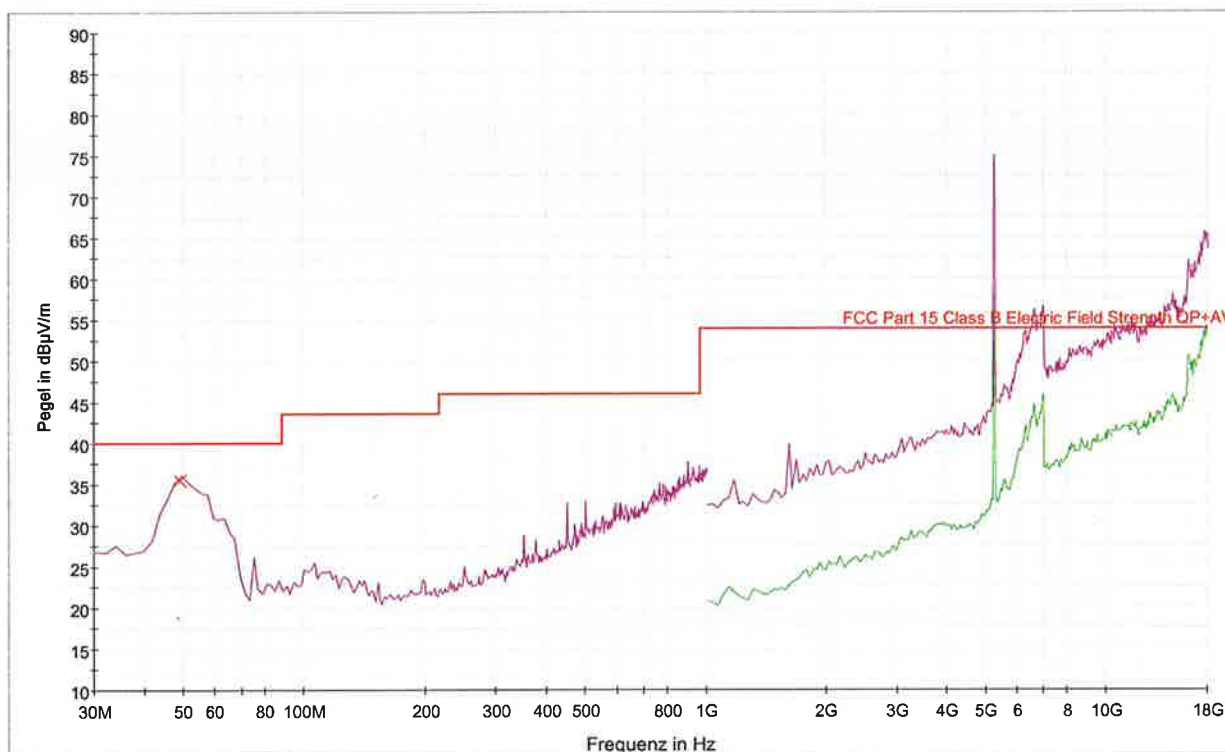

— PK+\_MAXH@Naim Feld\NP800\_WLAN5G\_52\_F1     × PK+\_MAXH@Naim Feld  
— AVG\_MAXH@Naim Feld     — QuasiPeak@Naim Feld  
— FCC Part 15 Class B Electric Field Strength QP+AV

Worst case emission: 35,4 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the tenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 64: 5320 MHz

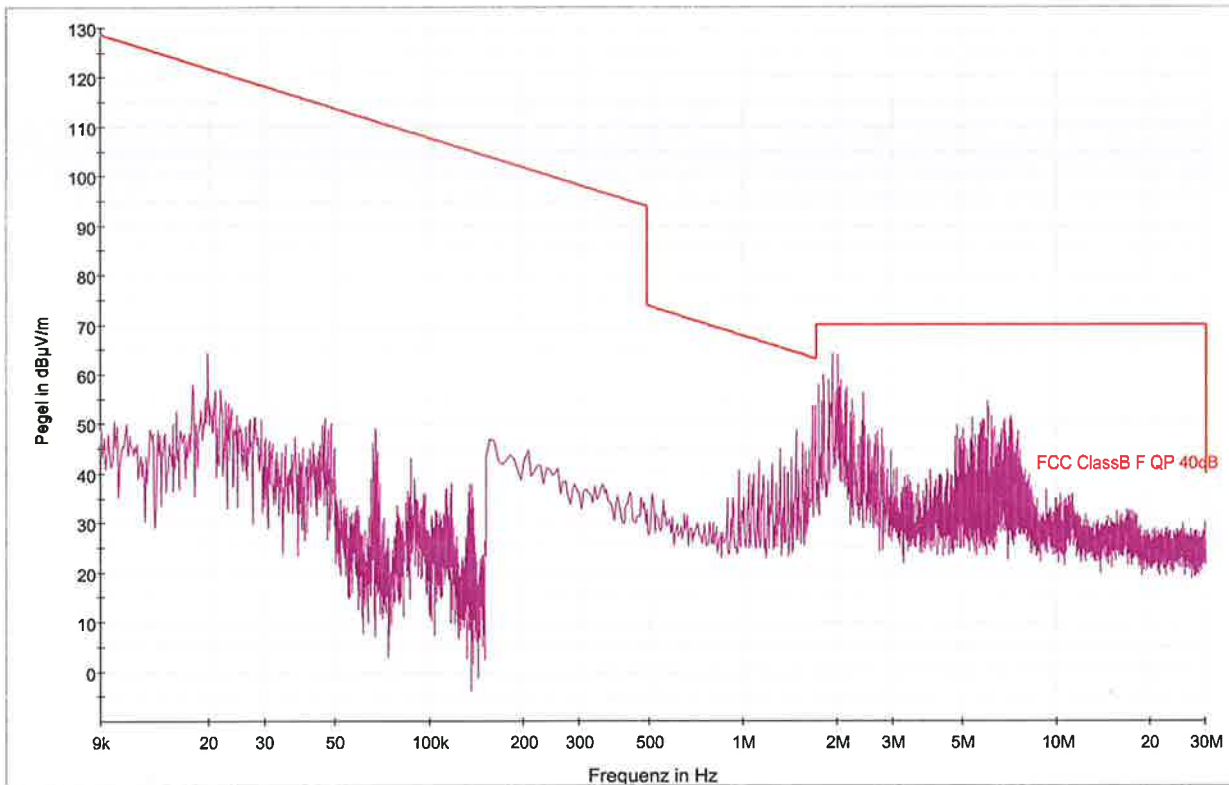

PK+\_CLRWR@Naim F0      FCC ClassB F QP 40dB

Worst case emission: 64,6 dBµV/m @ 19,8 kHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT                      SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207




**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 64: 5320 MHz

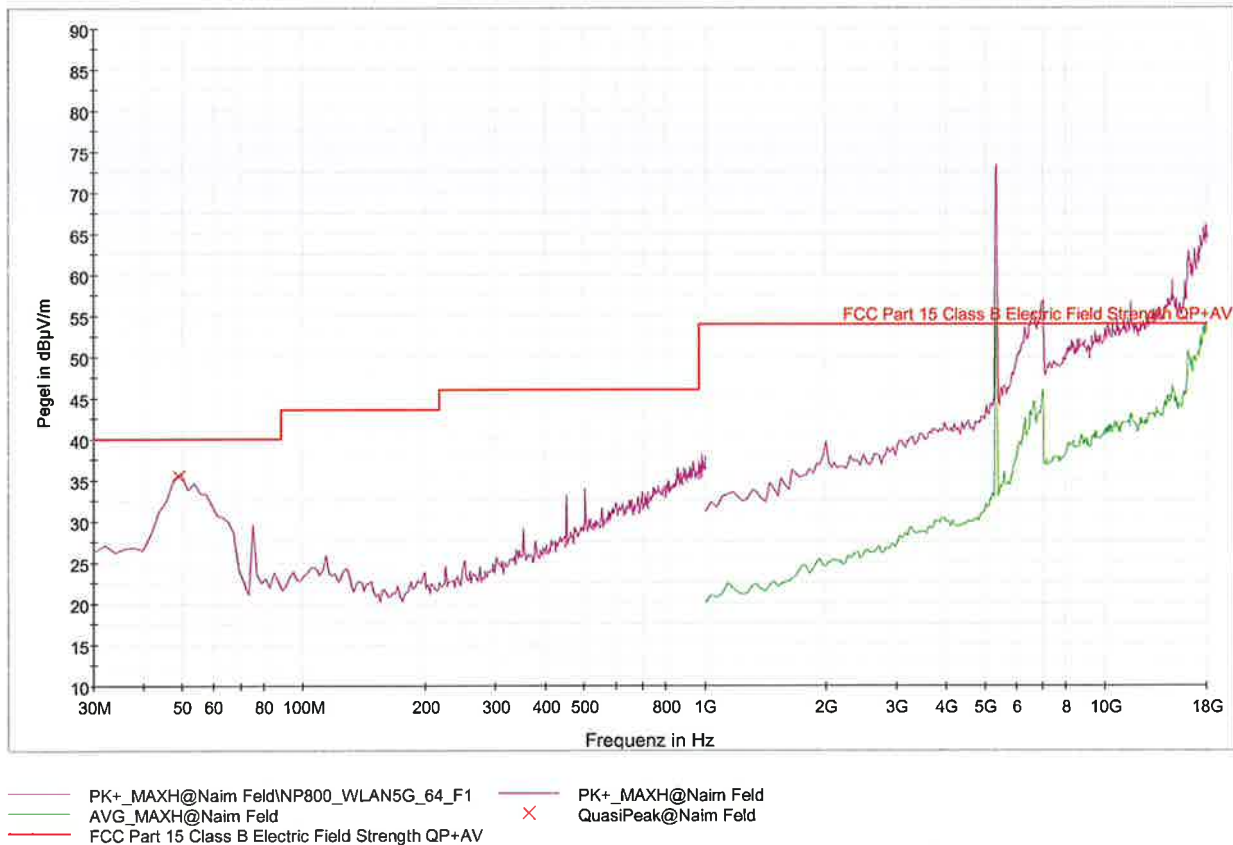

Worst case emission: 35,3 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the tenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line): Band Edge requirement

Setup: CH 64: 5320 MHz – Antennas used: ANT1612

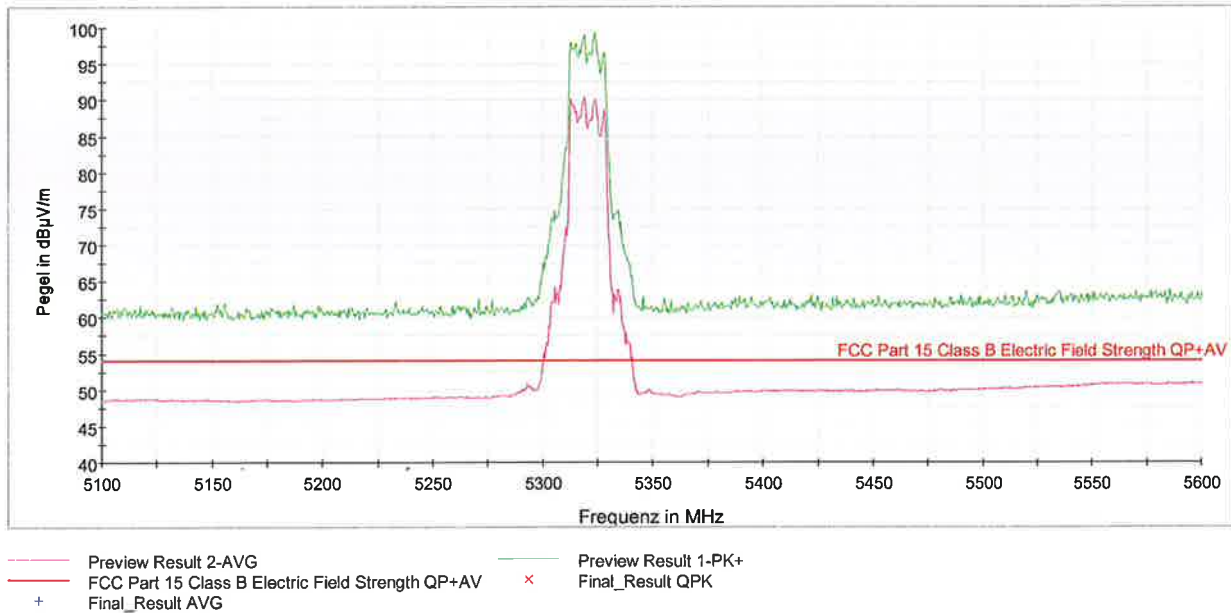

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Band edge of the nearest restricted band: 5350 MHz.


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-139; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 52-56: 5270 MHz

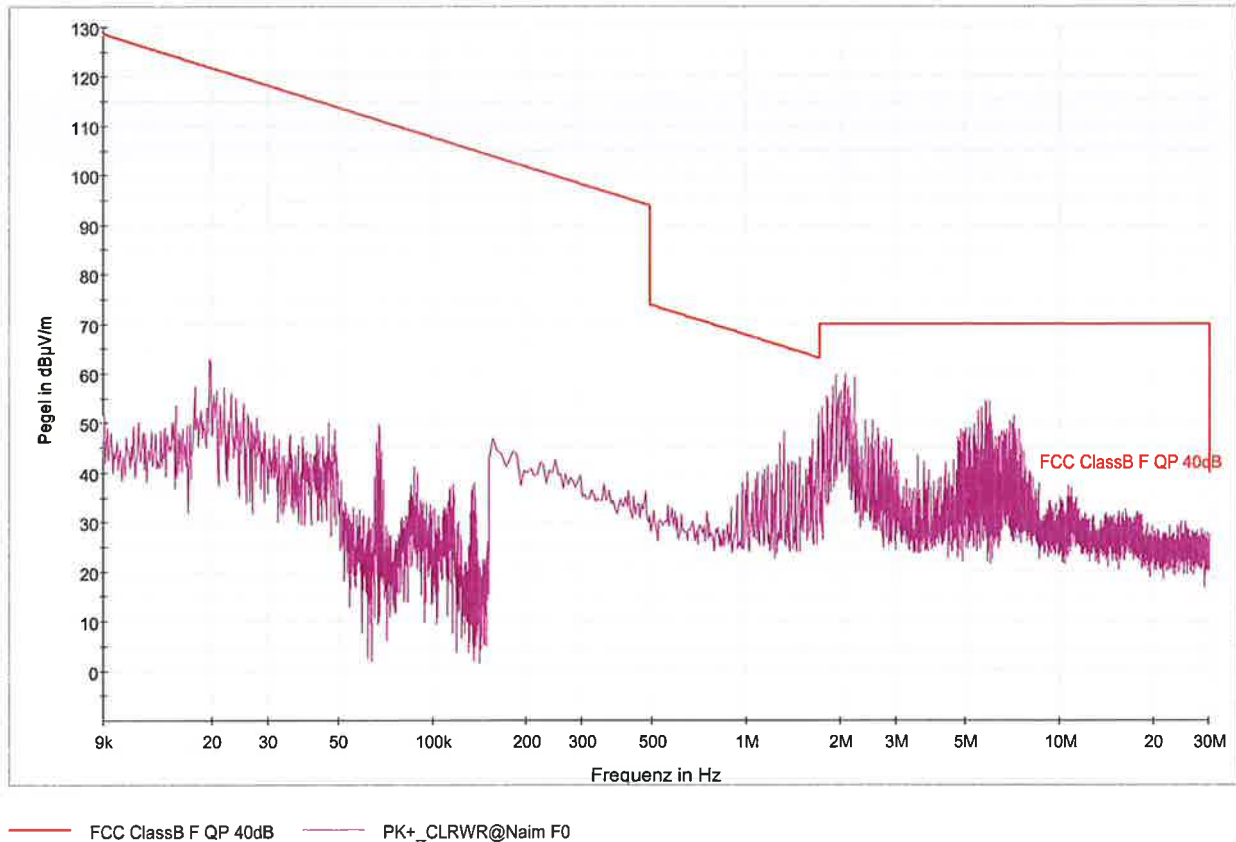

Worst case emission: 63,8 dBµV/m @ 19,8 kHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 52-56: 5270 MHz

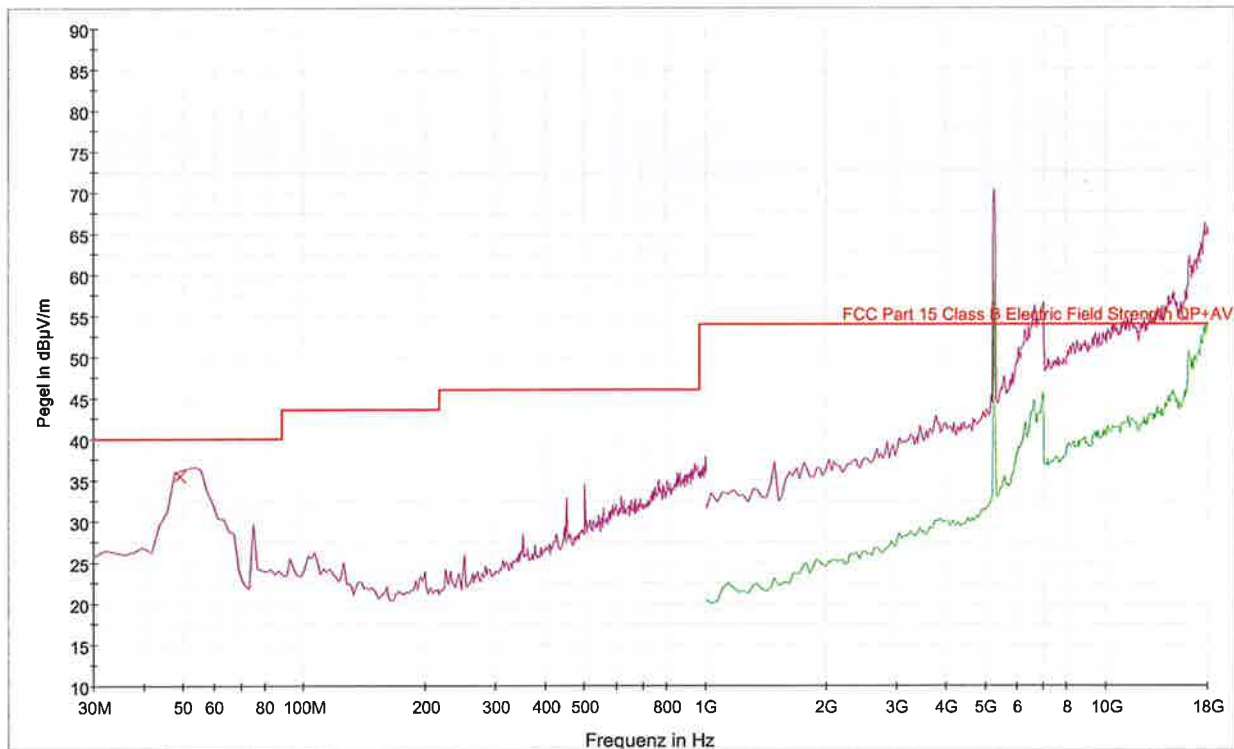

— PK+\_MAXH@Naim Feld  
— AVG\_MAXH@Naim Feld\NP800\_WLAN5G\_5256\_F2  
— FCC Part 15 Class B Electric Field Strength QP+AV  
x QuasiPeak@Naim Feld

Worst case emission: 35,6 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the tenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 60-64: 5310 MHz

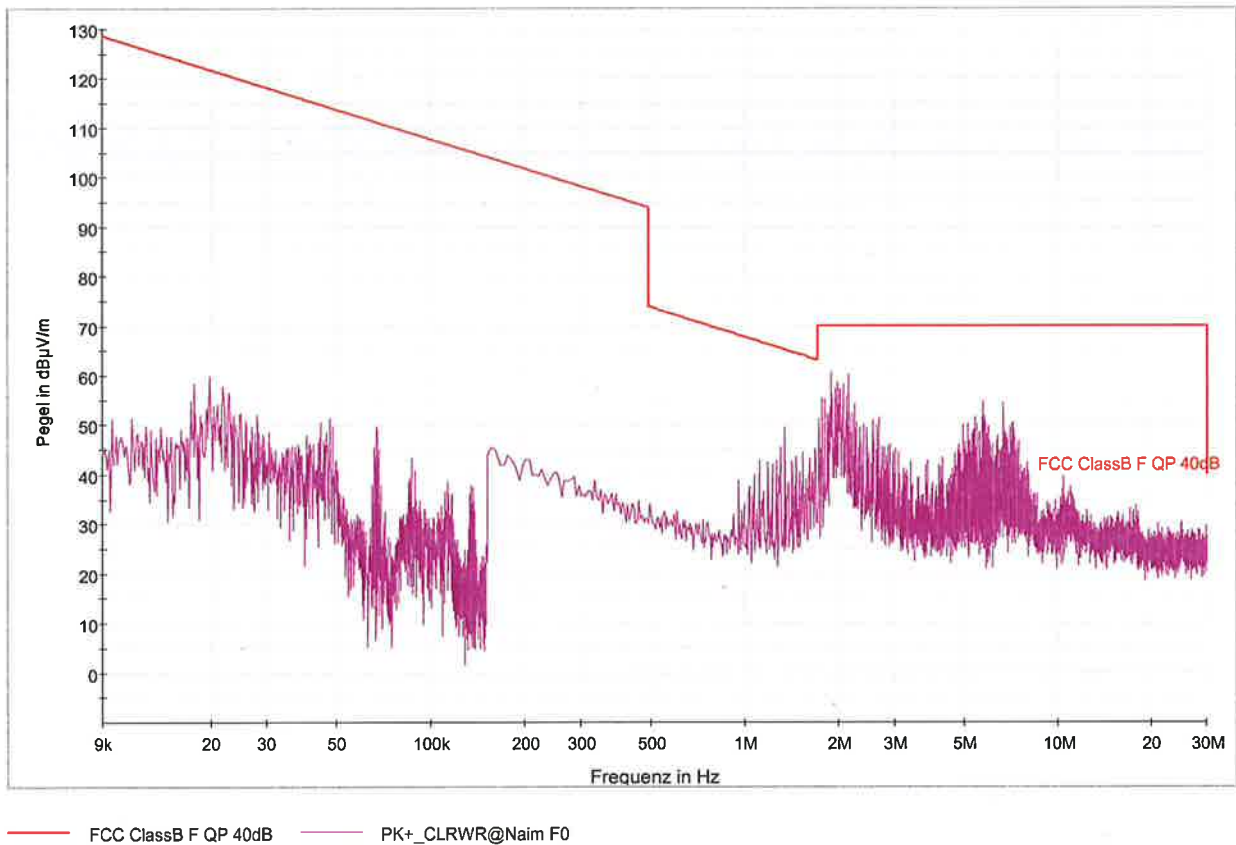

Worst case emission: 60,6 dBµV/m @ 1,92 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 60-64: 5310 MHz

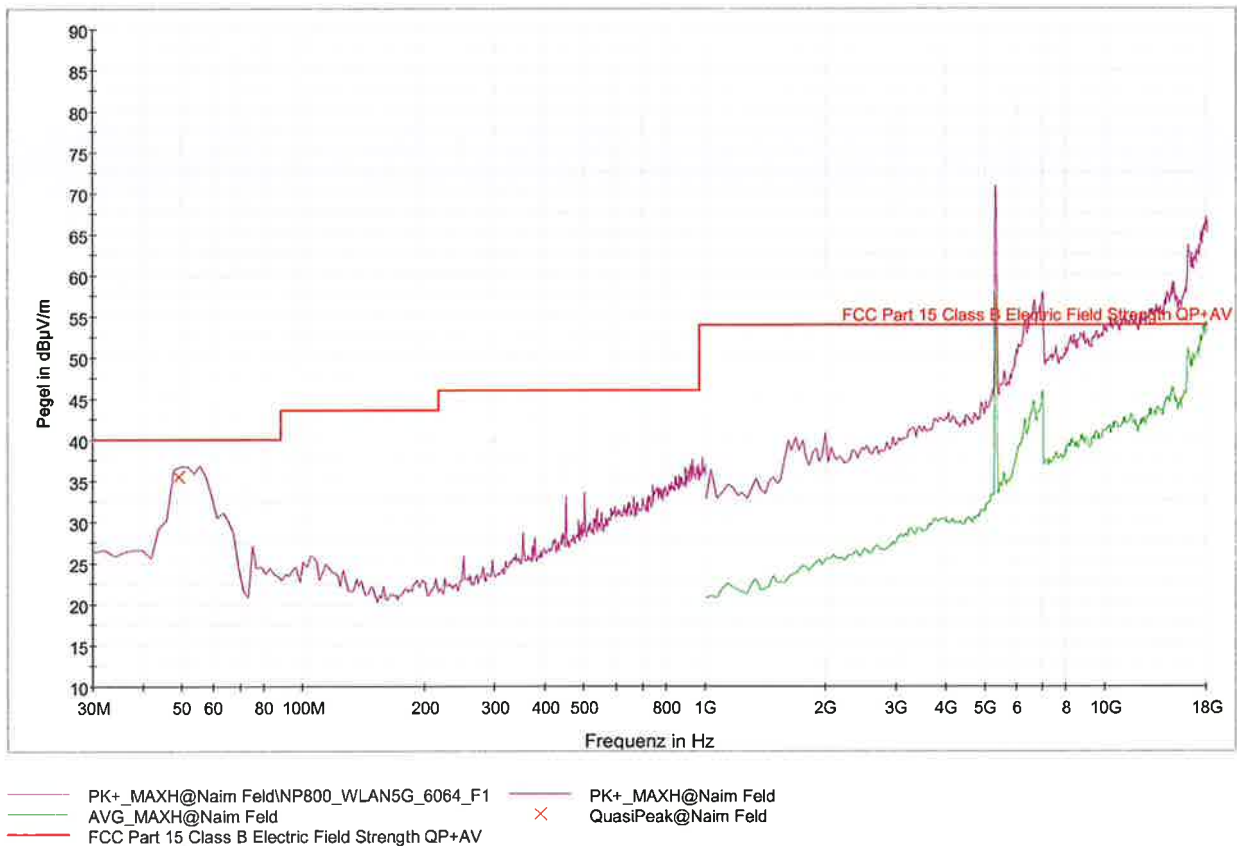

Worst case emission: 35,6 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the thenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line): Band Edge requirement

Setup: CH 60-64: 5310 MHz – Antennas used: ANT1612

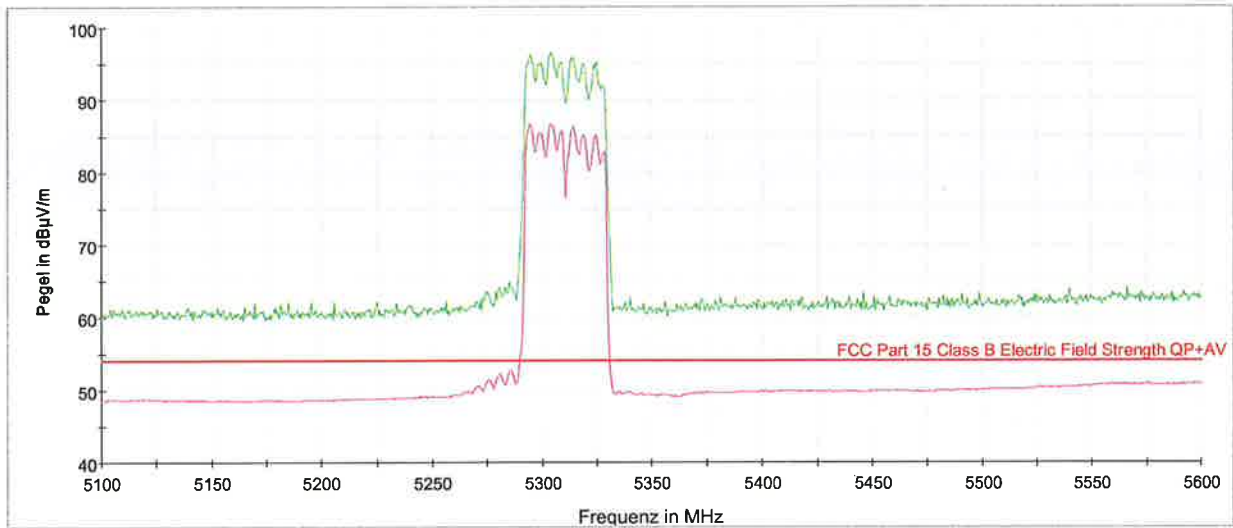

— Preview Result 2-AVG      — Preview Result 1-PK+  
— FCC Part 15 Class B Electric Field Strength QP+AV      x Final\_Result QPK  
+ Final\_Result AVG

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Band edge of the nearest restricted band: 5350 MHz.


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-139; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 52-64: 5290 MHz

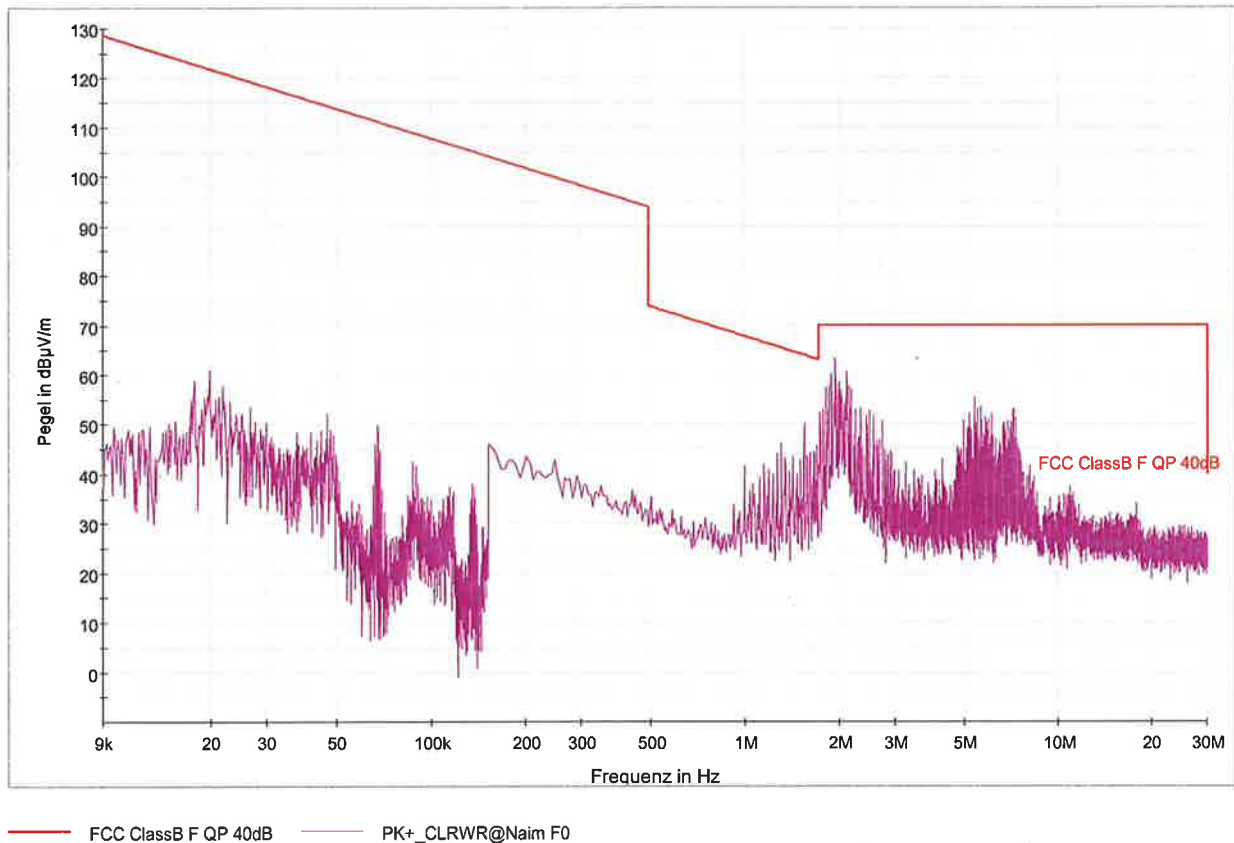

Worst case emission: 63,5 dBµV/m @ 1,92 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207




**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 52-64: 5290 MHz

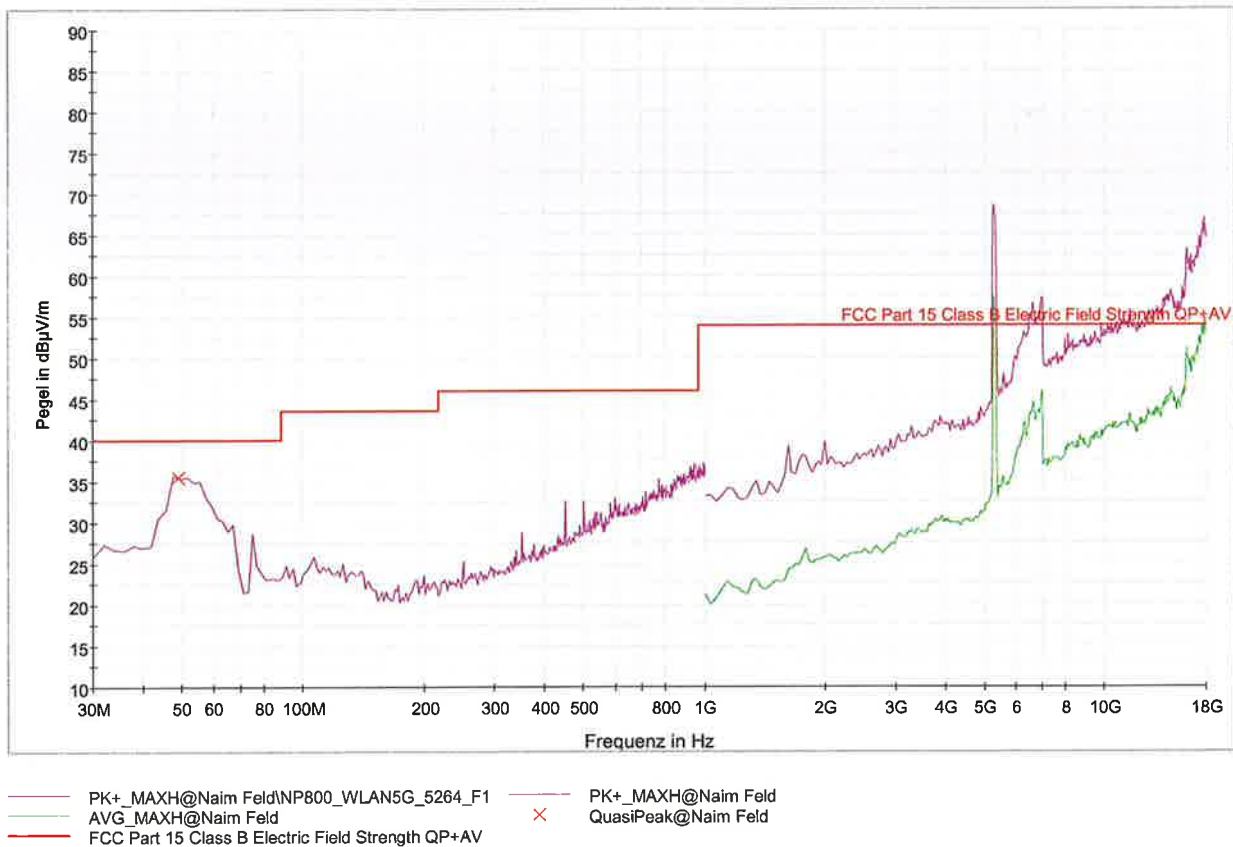

Worst case emission: 35,3 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the tenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line): Band Edge requirement

Setup: CH 52-64: 5290 MHz – Antennas used: ANT1612

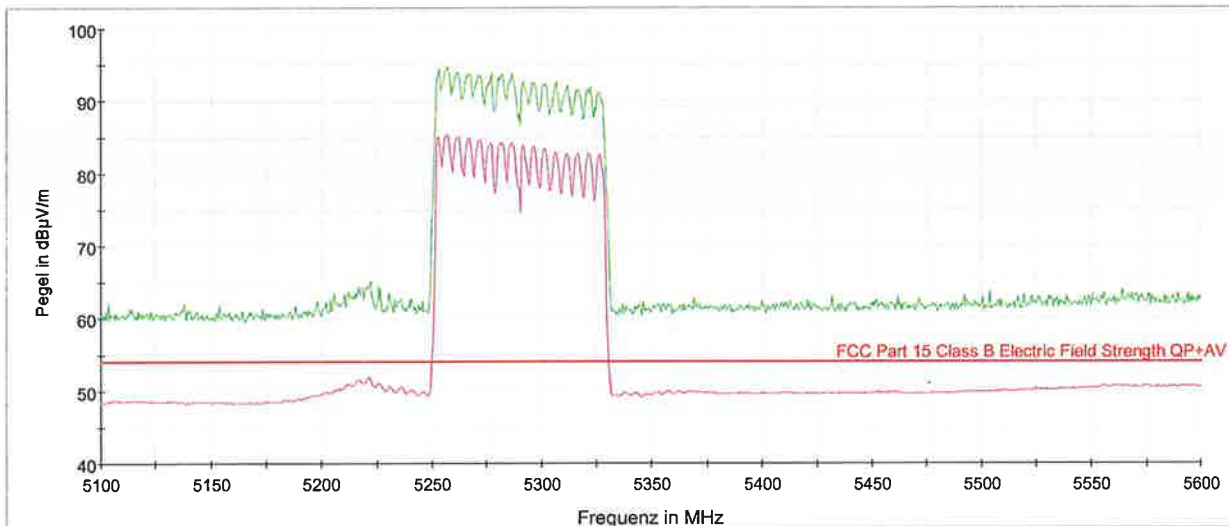

— Preview Result 2-AVG  
— FCC Part 15 Class B Electric Field Strength QP+AV  
— Preview Result 1-PK+  
— Final\_Result QPK  
+ Final\_Result AVG

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Band edge of the nearest restricted band: 5350 MHz.


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-139; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 100: 5500 MHz

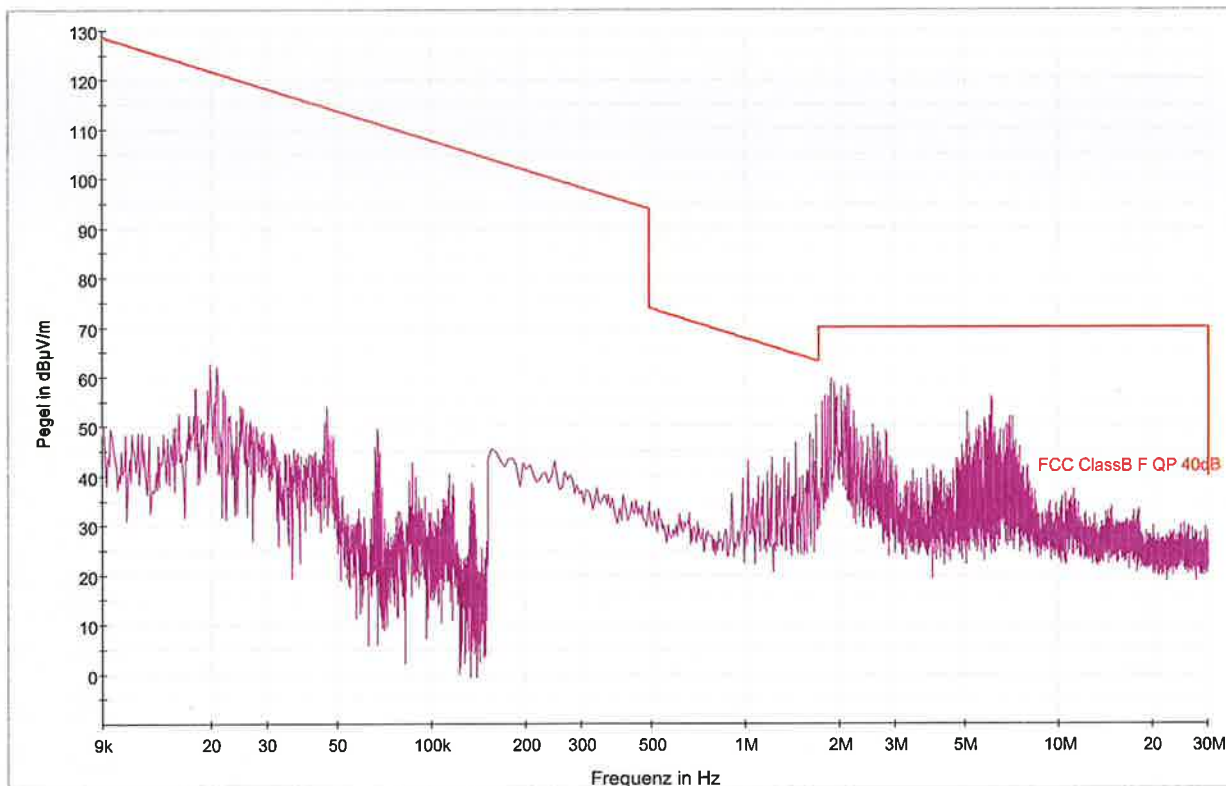

PK+\_CLRWR@Naim F0      FCC ClassB F QP 40dB

Worst case emission: 63,8 dBµV/m @ 19,8 kHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT                      SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 100: 5500 MHz

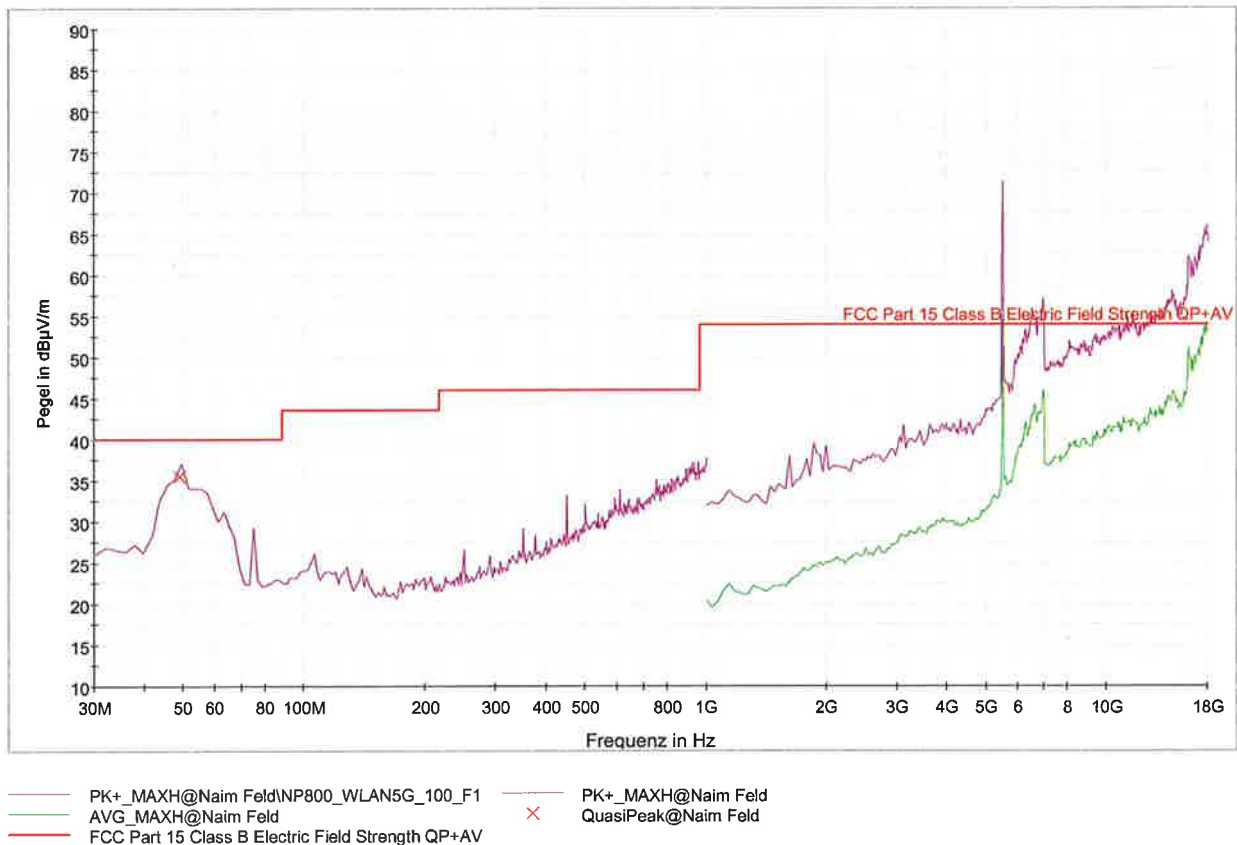

Worst case emission: 35,7 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the thenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line): Band Edge requirement

Setup: CH 100: 5500 MHz – Antennas used: ANT1612

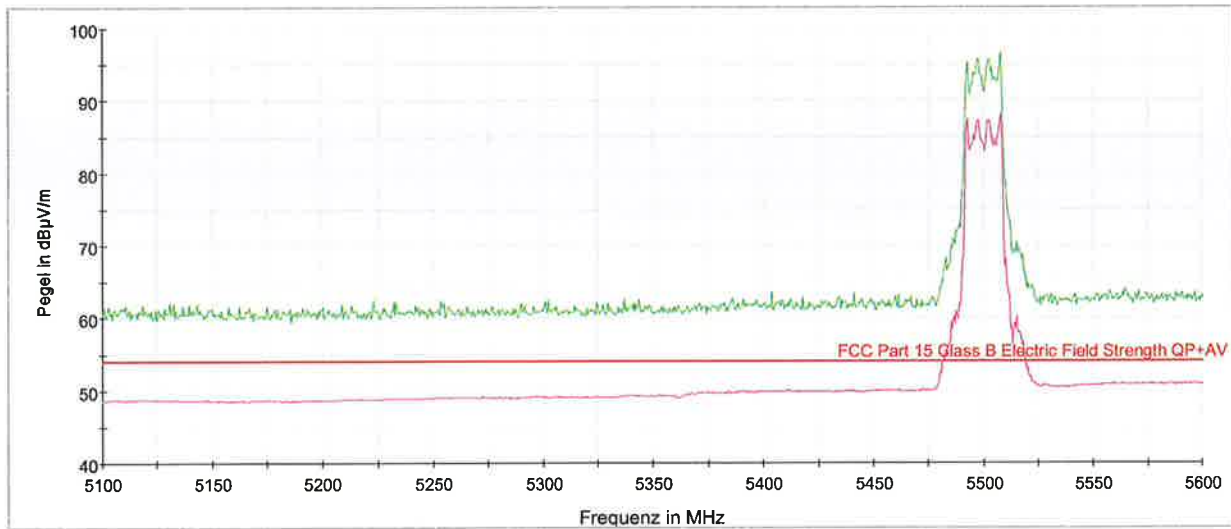

— Preview Result 2-AVG  
— FCC Part 15 Class B Electric Field Strength QP+AV  
— Preview Result 1-PK+  
+ Final\_Result AVG  
x Final\_Result QPK

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Band edge of the nearest restricted band: 5460 MHz.

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-139; NT-207




**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 140: 5700 MHz

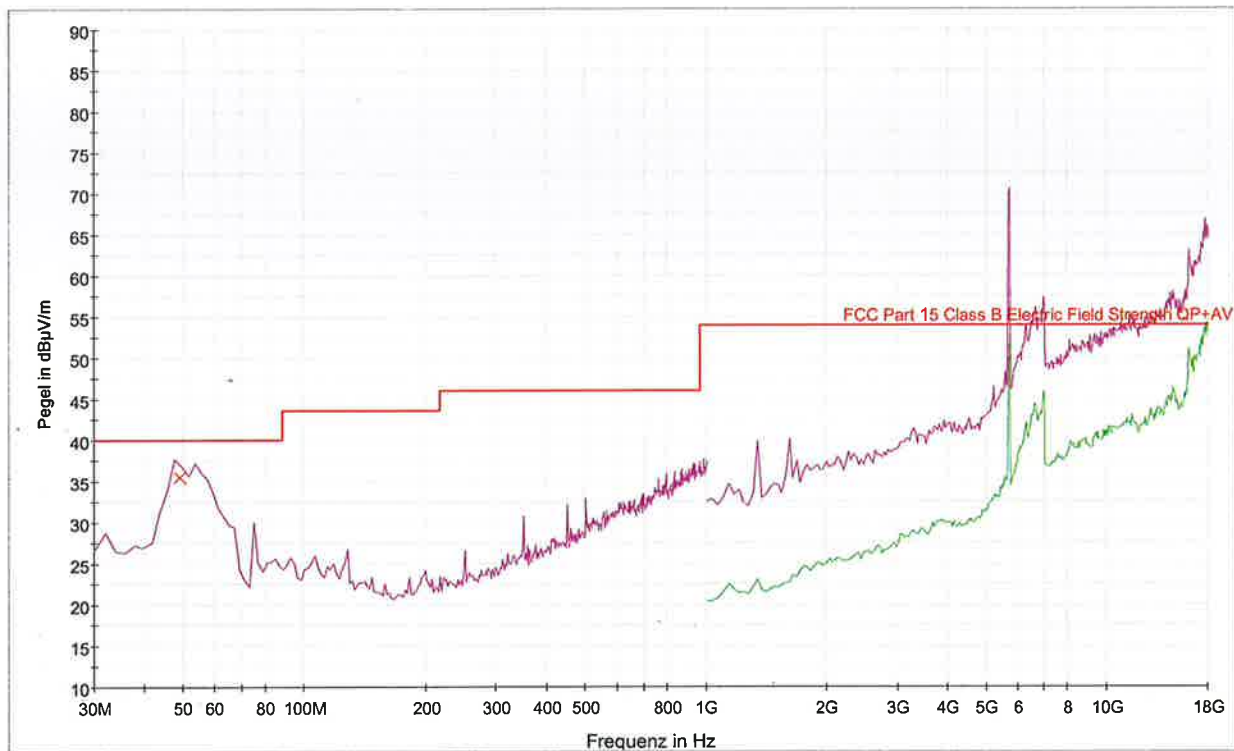

— PK+\_MAXH@Naim Feld  
— AVG\_MAXH@Naim Feld  
— FCC Part 15 Class B Electric Field Strength QP+AV  
× QuasiPeak@Naim Feld

Worst case emission: 35,3 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the thenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 100-104: 5510 MHz

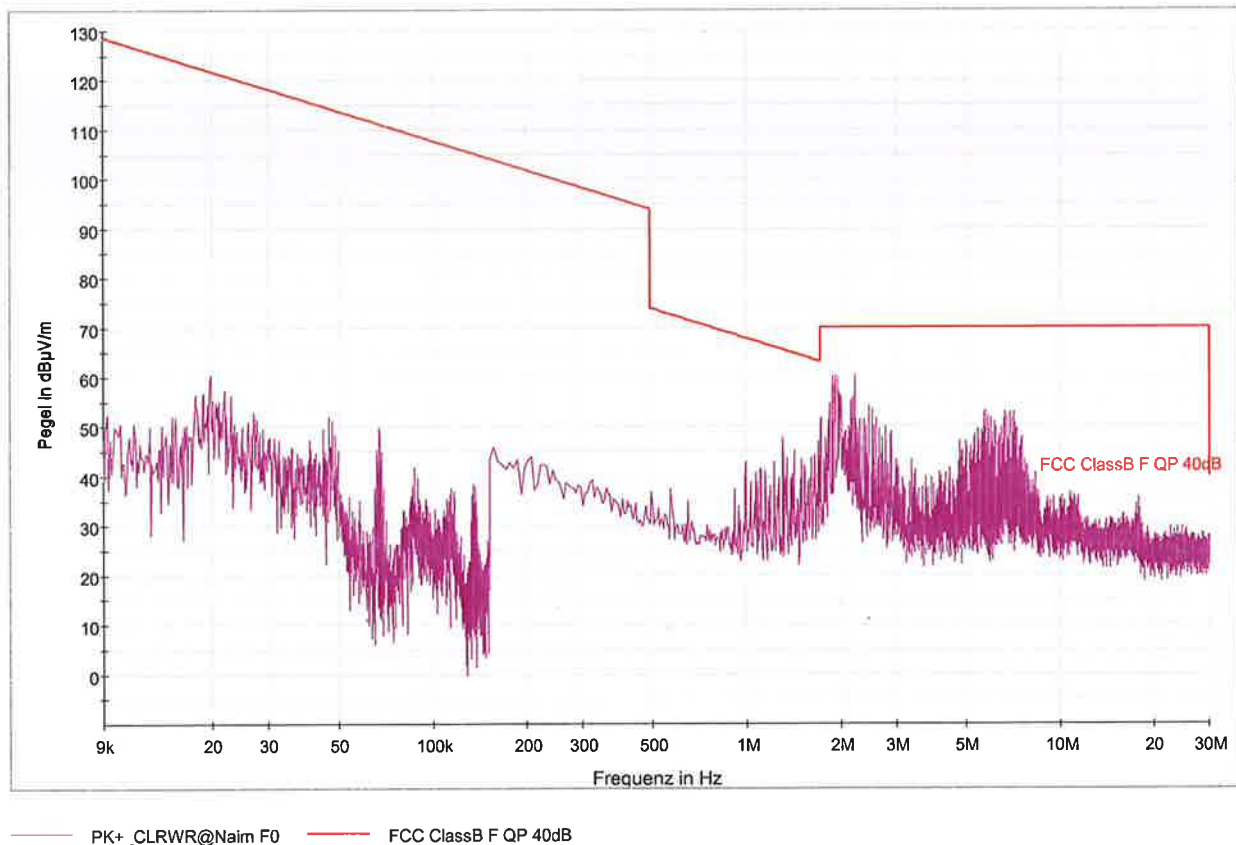

Worst case emission: 60,6 dBµV/m @ 19,8 kHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207




**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 100-104: 5510 MHz

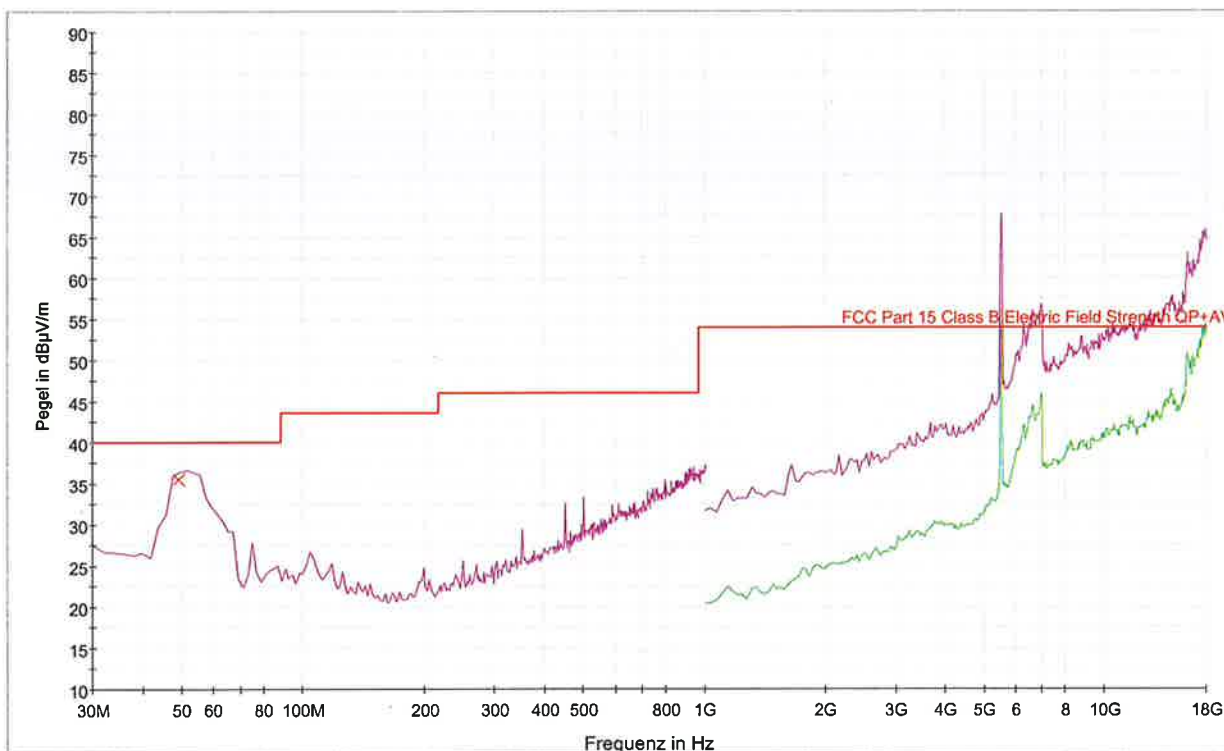

— PK+\_MAXH@Naim Feld\NP800\_WLAN5G\_100104\_F1  
— AVG\_MAXH@Naim Feld  
— FCC Part 15 Class B Electric Field Strength QP+AV  
x PK+\_MAXH@Naim Feld QuasiPeak@Naim Feld

Worst case emission: 35,7 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the tenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line): Band Edge requirement

Setup: CH 100-104: 5510 MHz – Antennas used: ANT1612

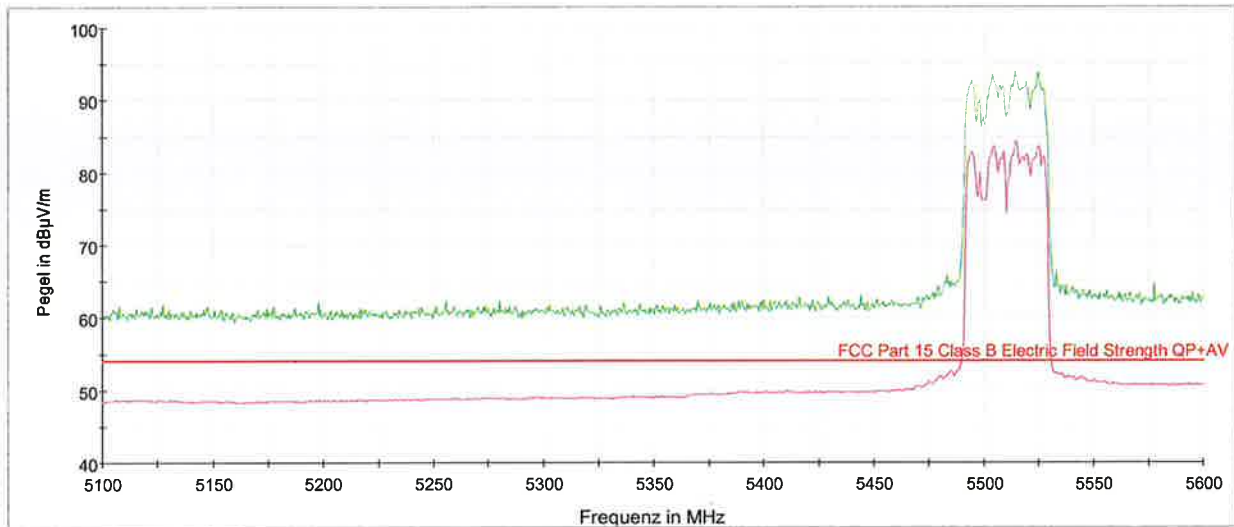

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Band edge of the nearest restricted band: 5460 MHz.


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-139; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 132-136: 5670 MHz

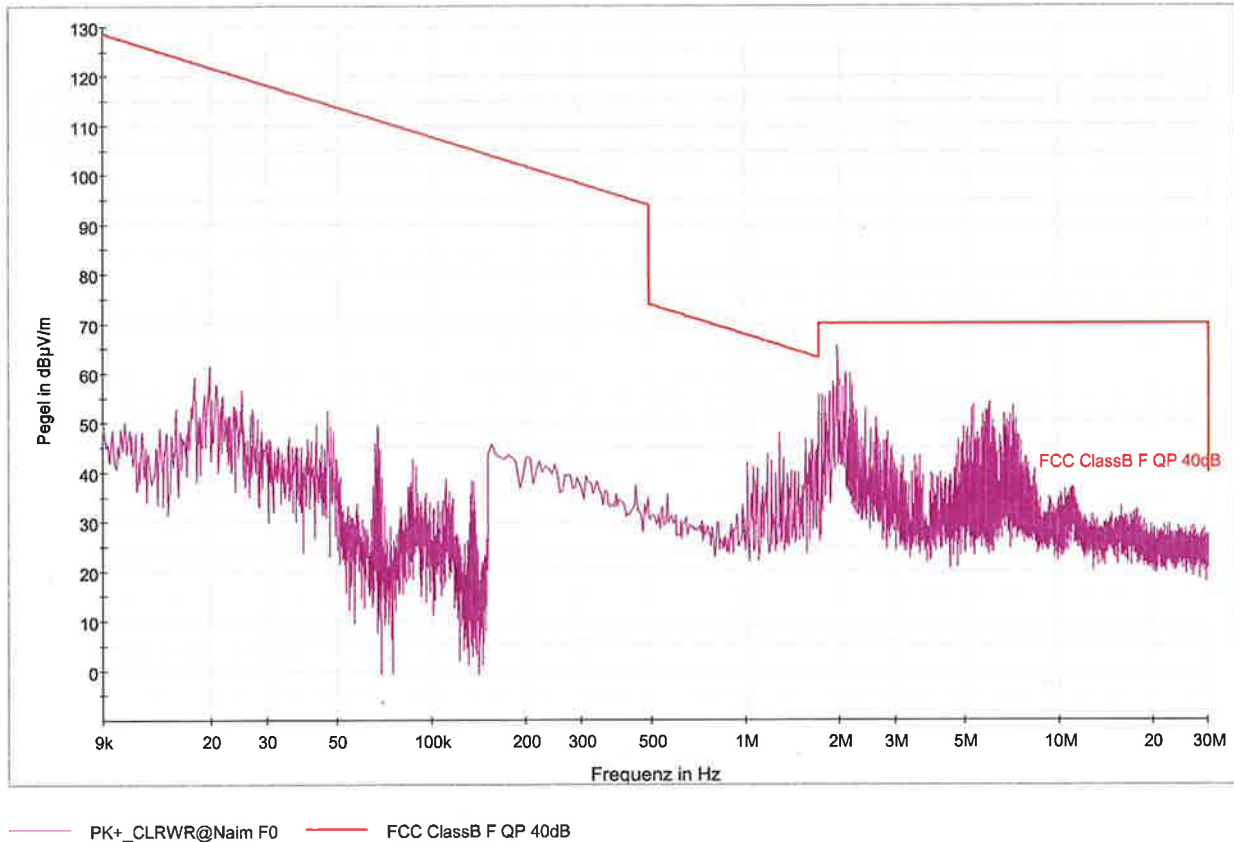

Worst case emission: 65,5 dBµV/m @ 1,92 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 132-136: 5670 MHz

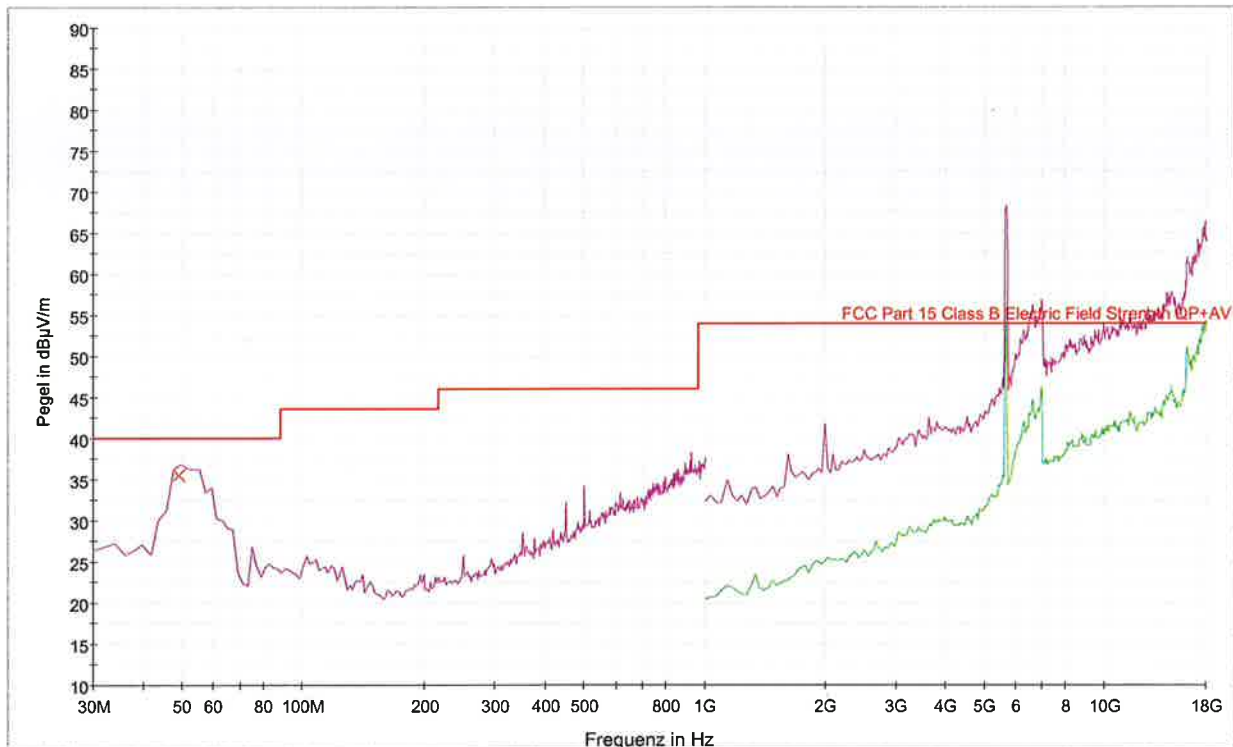

— PK+\_MAXH@Naim Feld\NP800\_WLAN5G\_132136\_F1     — PK+\_MAXH@Naim Feld  
— AVG\_MAXH@Naim Feld     x QuasiPeak@Naim Feld  
— FCC Part 15 Class B Electric Field Strength QP+AV

Worst case emission: 35,4 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the thenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 100-112: 5530 MHz

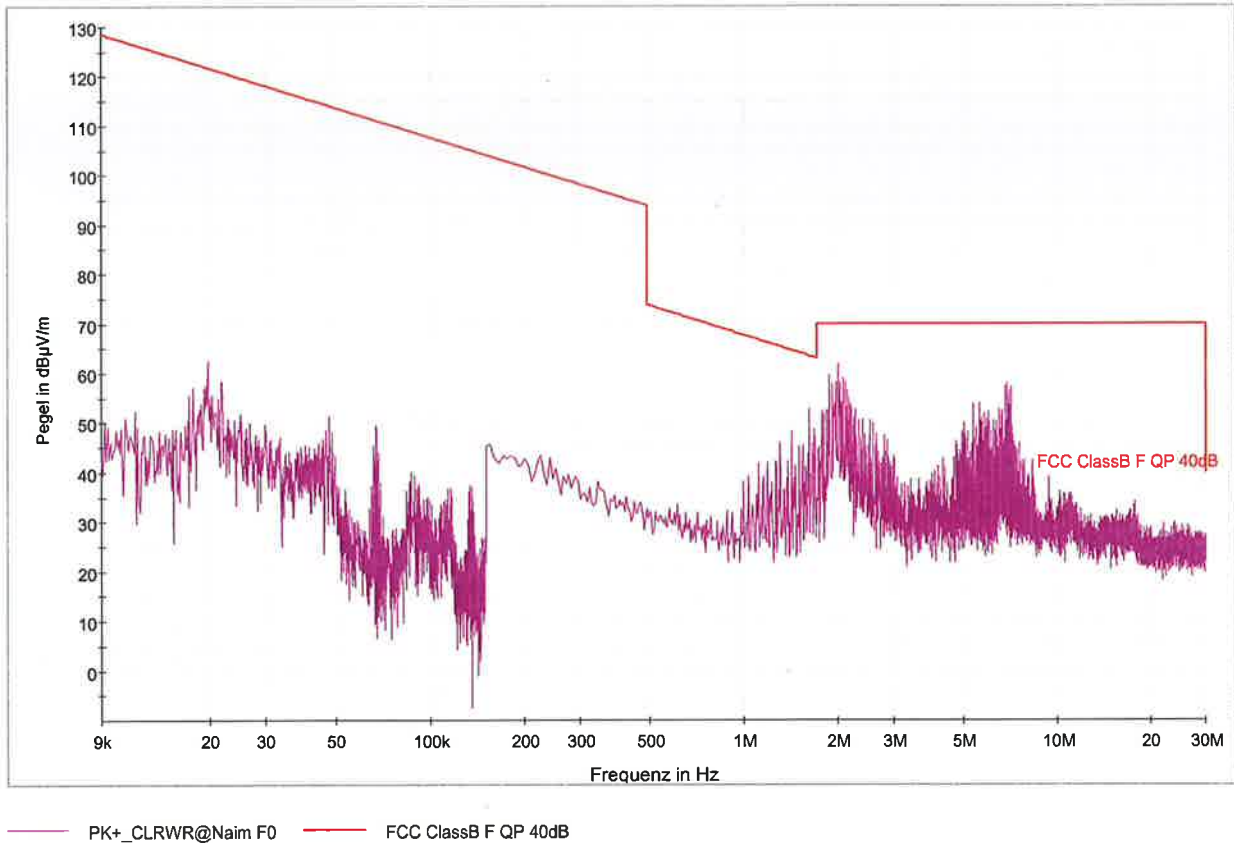

Worst case emission: 62,6 dBµV/m @ 19,8 kHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 100-112: 5530 MHz

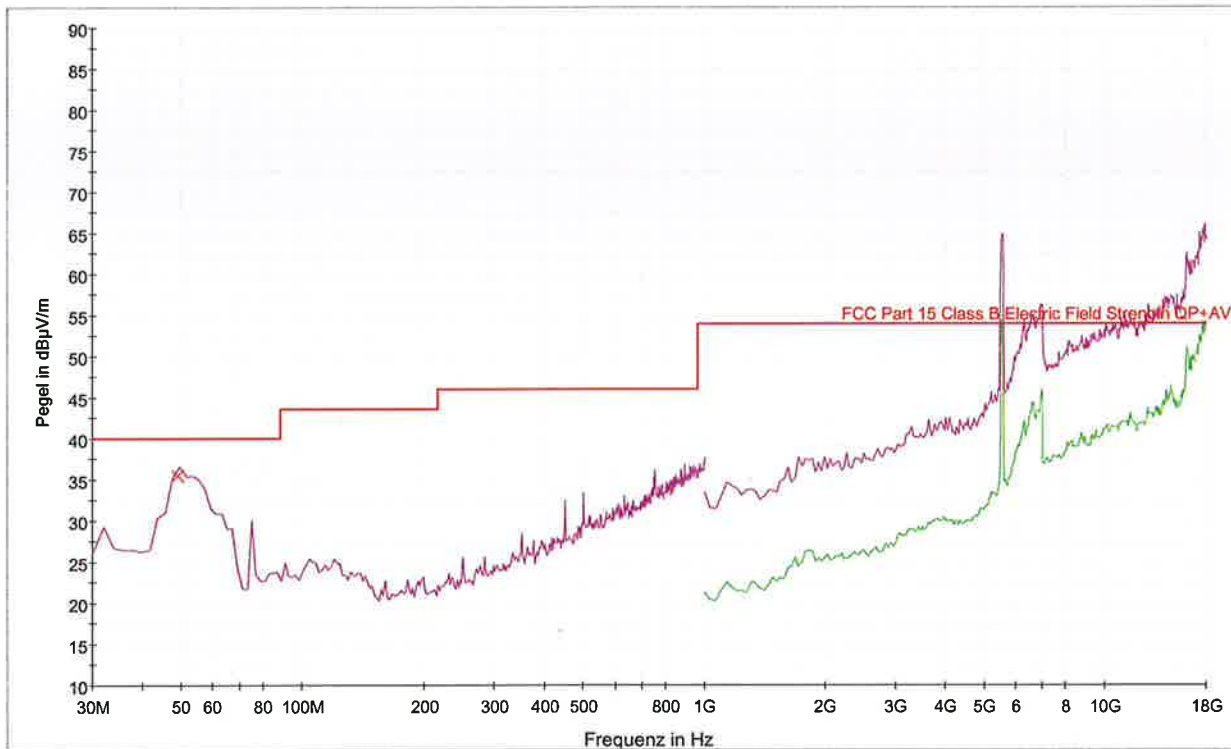

— PK+\_MAXH@Naim Feld\NP800\_WLAN5G\_100112\_F1     — PK+\_MAXH@Naim Feld  
— AVG\_MAXH@Naim Feld     x QuasiPeak@Naim Feld  
— FCC Part 15 Class B Electric Field Strength QP+AV

Worst case emission: 35,4 dB $\mu$ V/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the thenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line): Band Edge requirement

Setup: CH 100-112: 5530 MHz – Antennas used: ANT1612

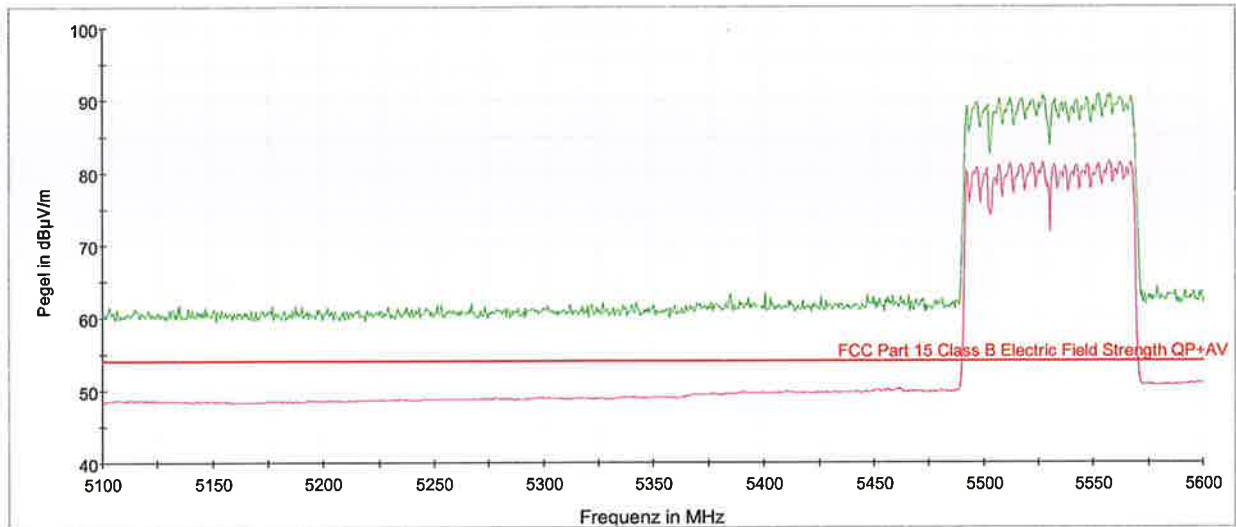

— Preview Result 2-AVG  
— FCC Part 15 Class B Electric Field Strength QP+AV  
— Preview Result 1-PK+  
+ Final\_Result AVG  
+ Final\_Result QPK

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Band edge of the nearest restricted band: 5460 MHz.


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-139; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 132-144: 5690 MHz

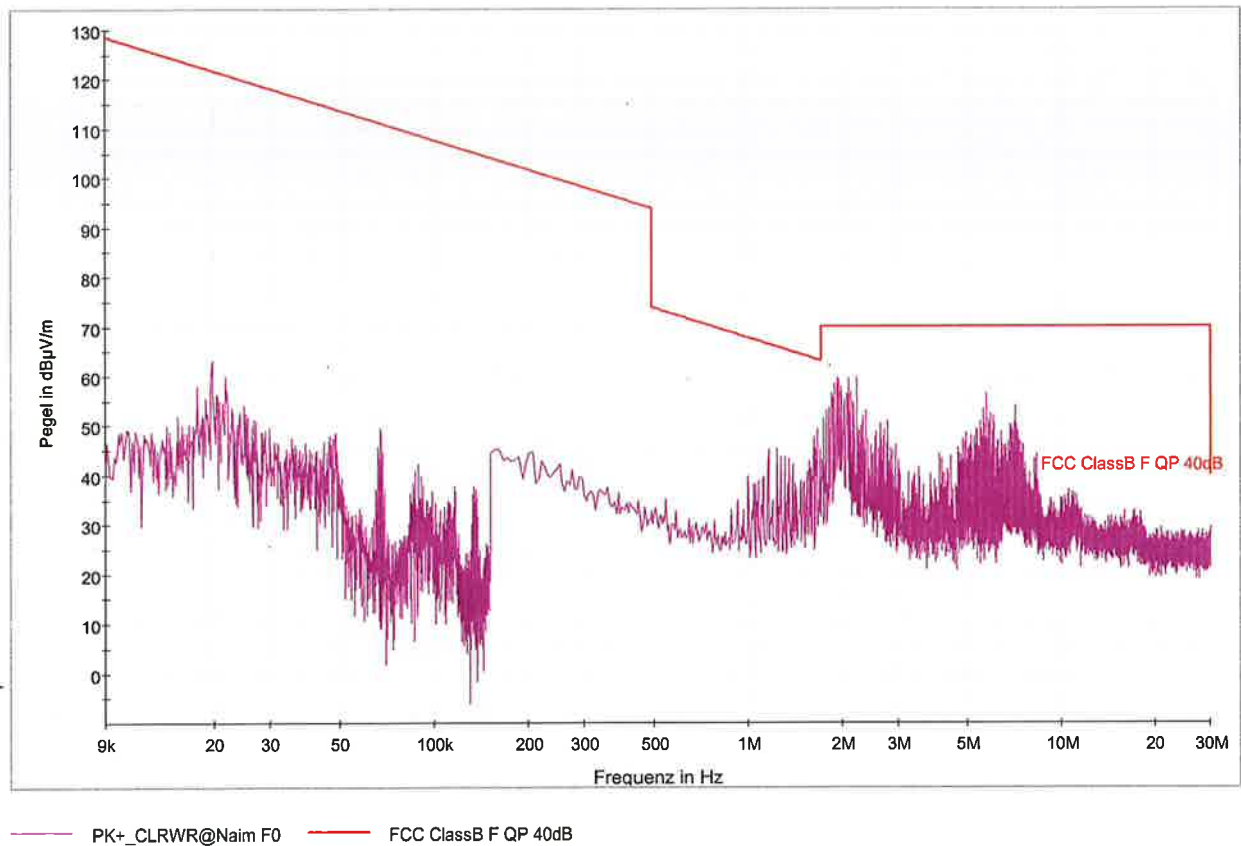

Worst case emission: 63,6 dBµV/m @ 19,8 kHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207




**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 132-144: 5690 MHz

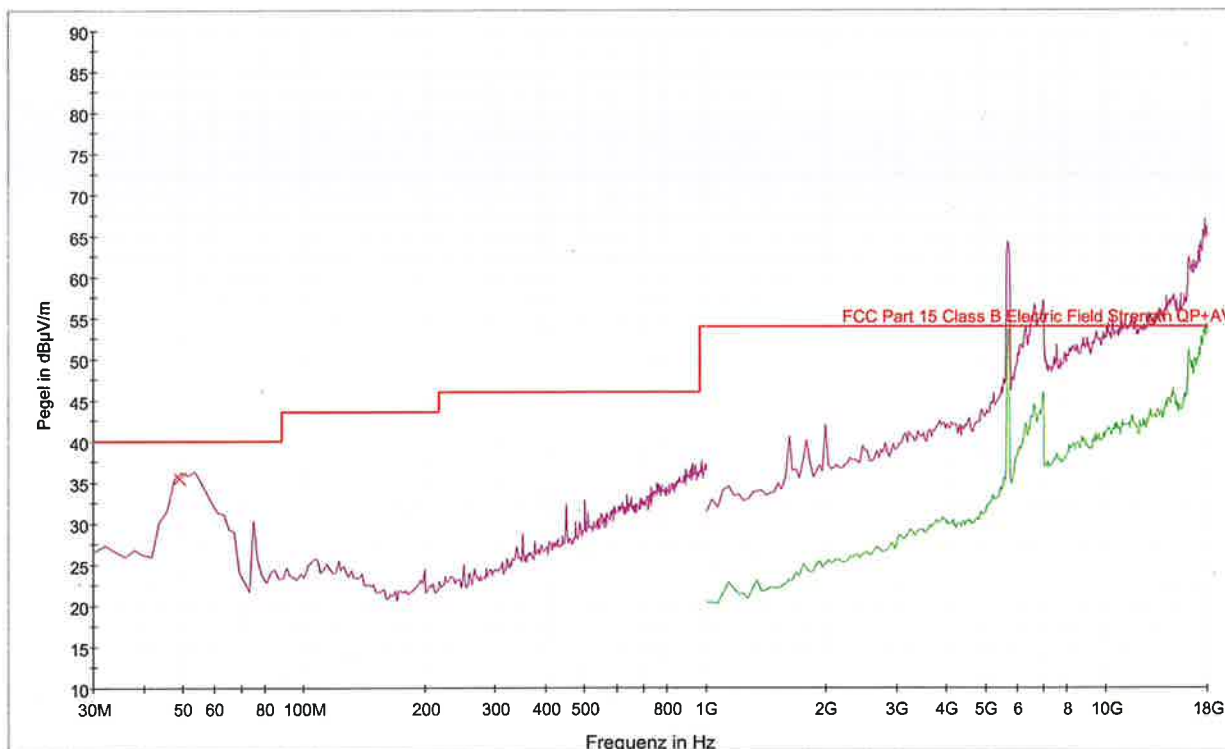

— PK+\_MAXH@Naim Feld\NP800\_WLAN5G\_132144\_F1  
— AVG\_MAXH@Naim Feld  
— FCC Part 15 Class B Electric Field Strength QP+AV  
x PK+\_MAXH@Naim Feld QuasiPeak@Naim Feld

Worst case emission: 35,5 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the thenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 149: 5745 MHz

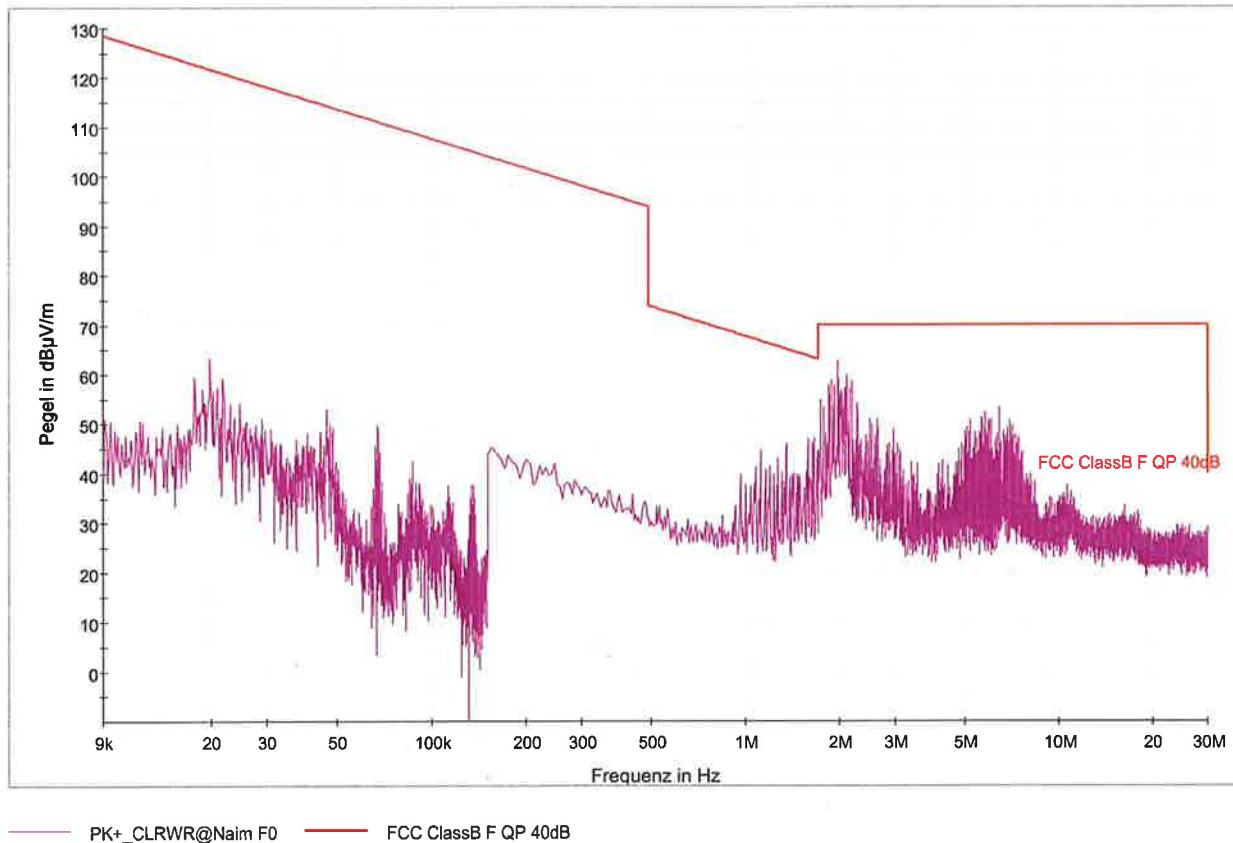

Worst case emission: 63,9 dBµV/m @ 19,8 kHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 149: 5745 MHz

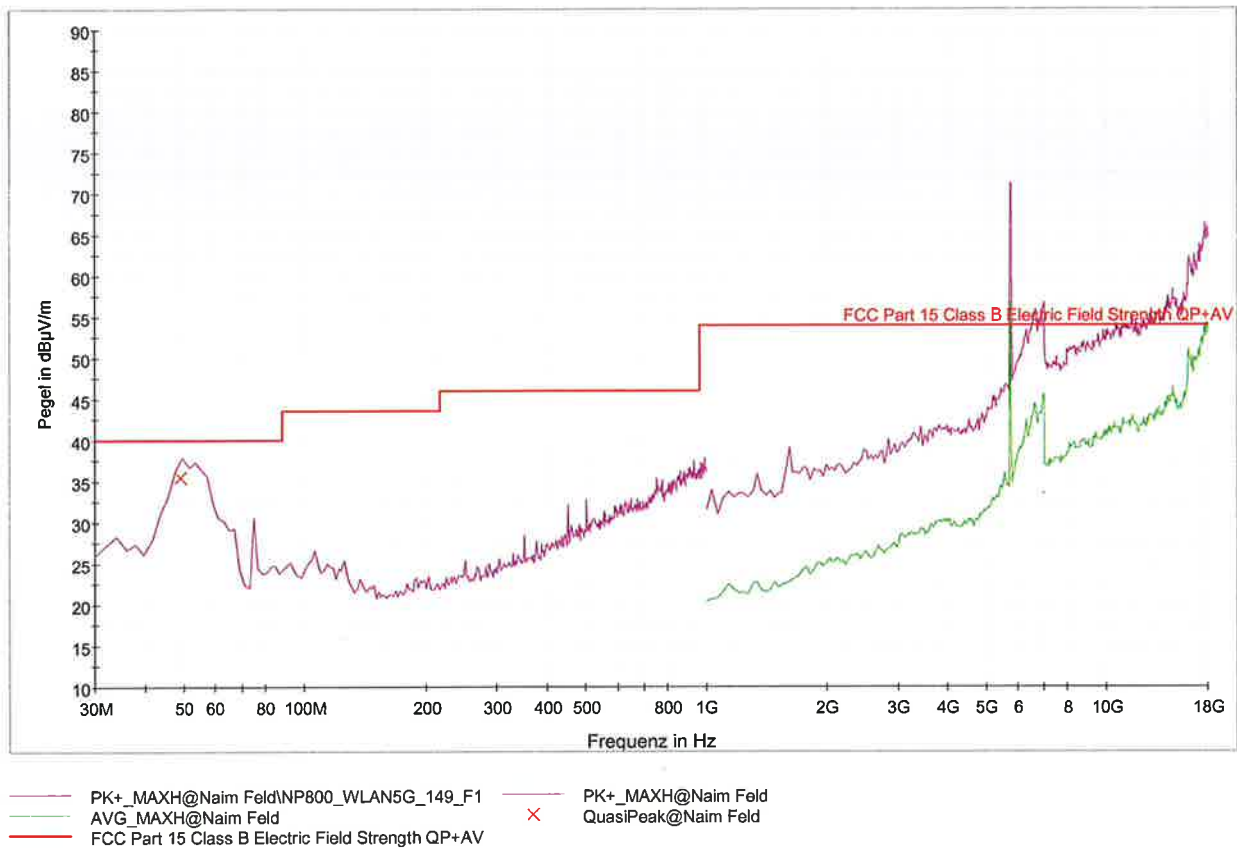

Worst case emission: 35,3 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the thenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 165: 5825 MHz

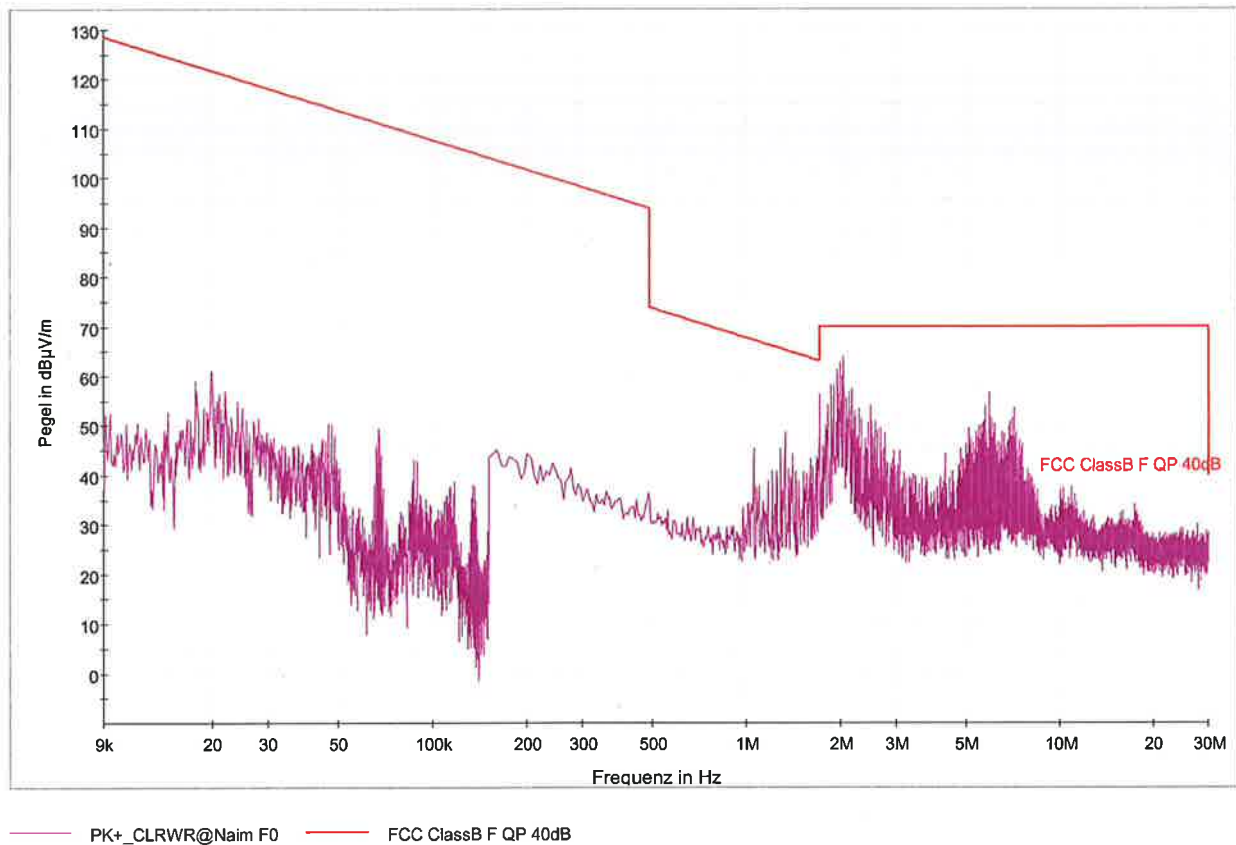

Worst case emission: 64,3 dBµV/m @ 1,92 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 165: 5825 MHz

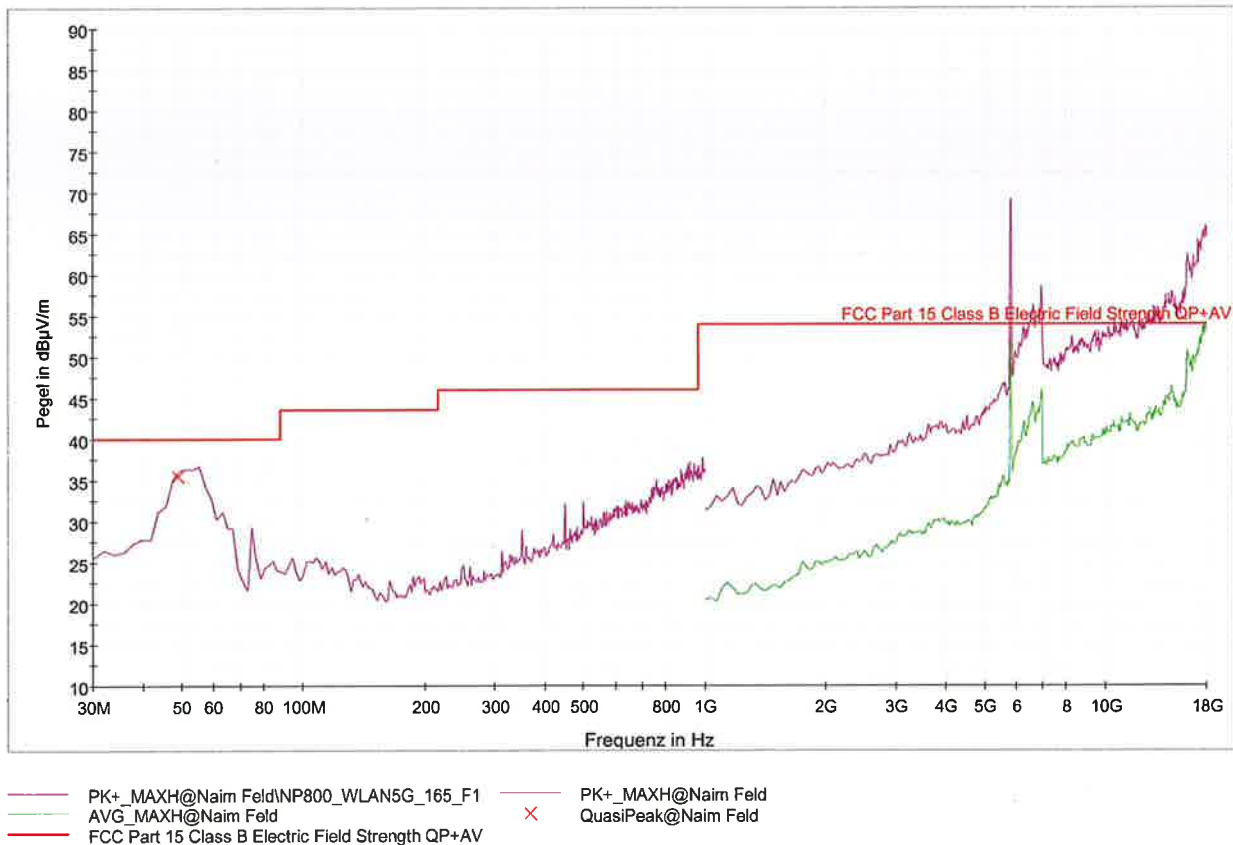

Worst case emission: 35,5 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the thenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 149-153: 5755 MHz

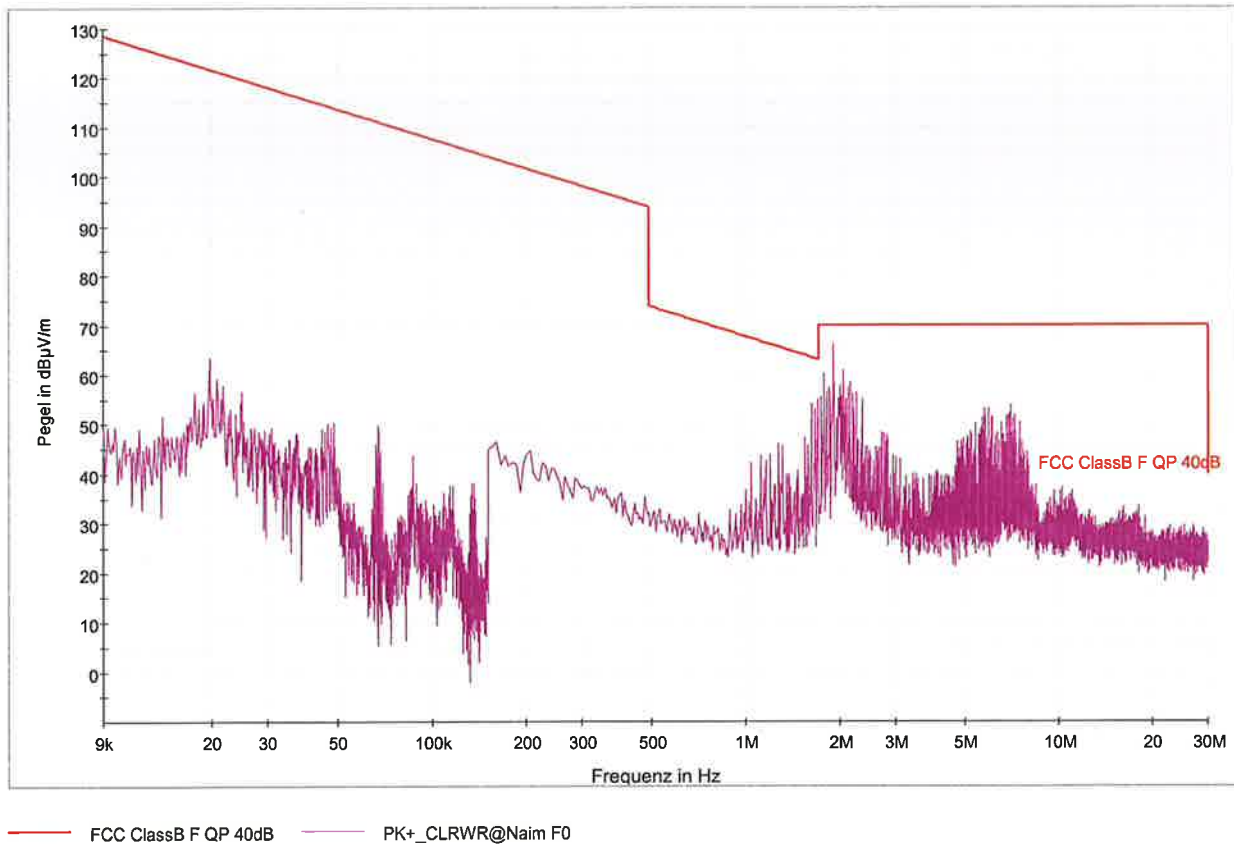

Worst case emission: 65,8 dBµV/m @ 1,92 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 149-153: 5755 MHz

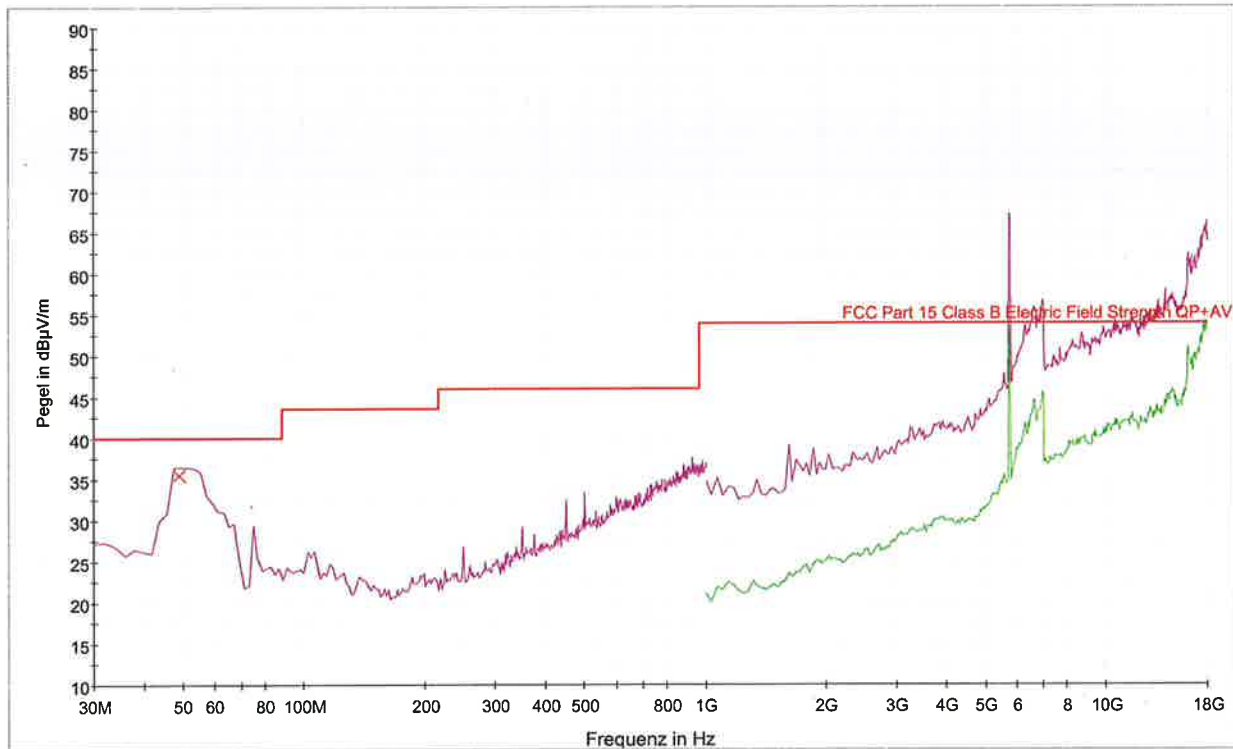

— PK+\_MAXH@Naim Feld\NP800\_WLAN5G\_149153\_F1  
— AVG\_MAXH@Naim Feld  
— FCC Part 15 Class B Electric Field Strength QP+AV  
x PK+\_MAXH@Naim Feld QuasiPeak@Naim Feld

Worst case emission: 35,4 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the thenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 157-161: 5795 MHz

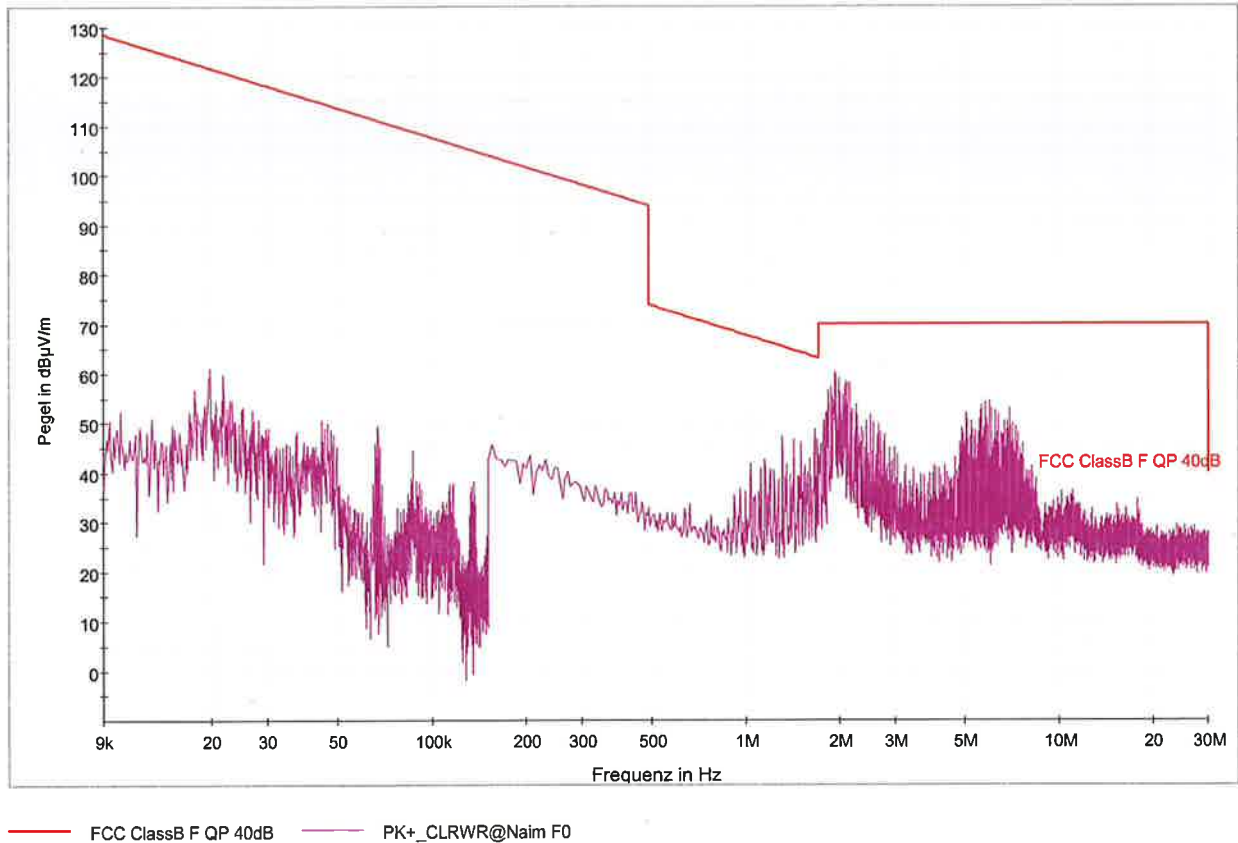

Worst case emission: 61,4 dBµV/m @ 19,8 kHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207




**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 157-161: 5795 MHz

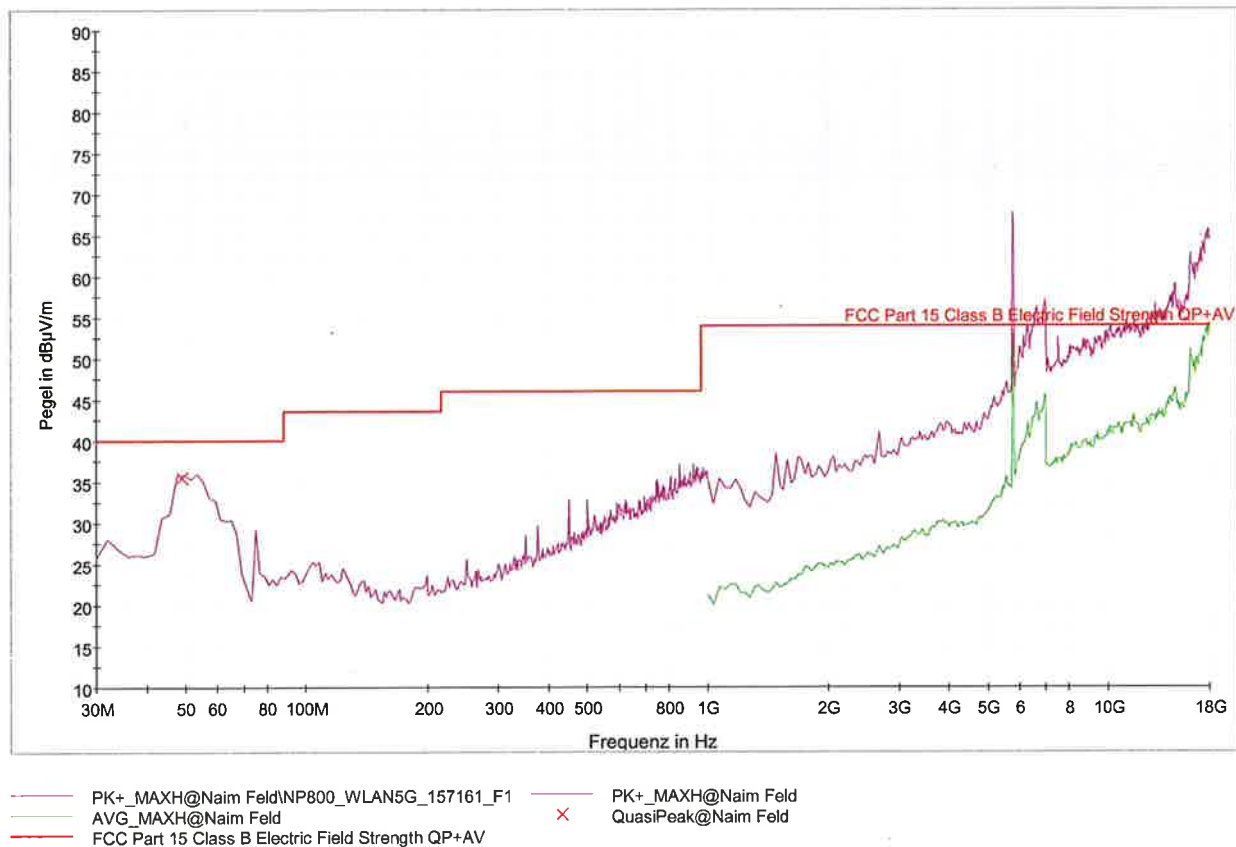

Worst case emission: 35,4 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the thenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector:

Setup: CH 149-161: 5775 MHz

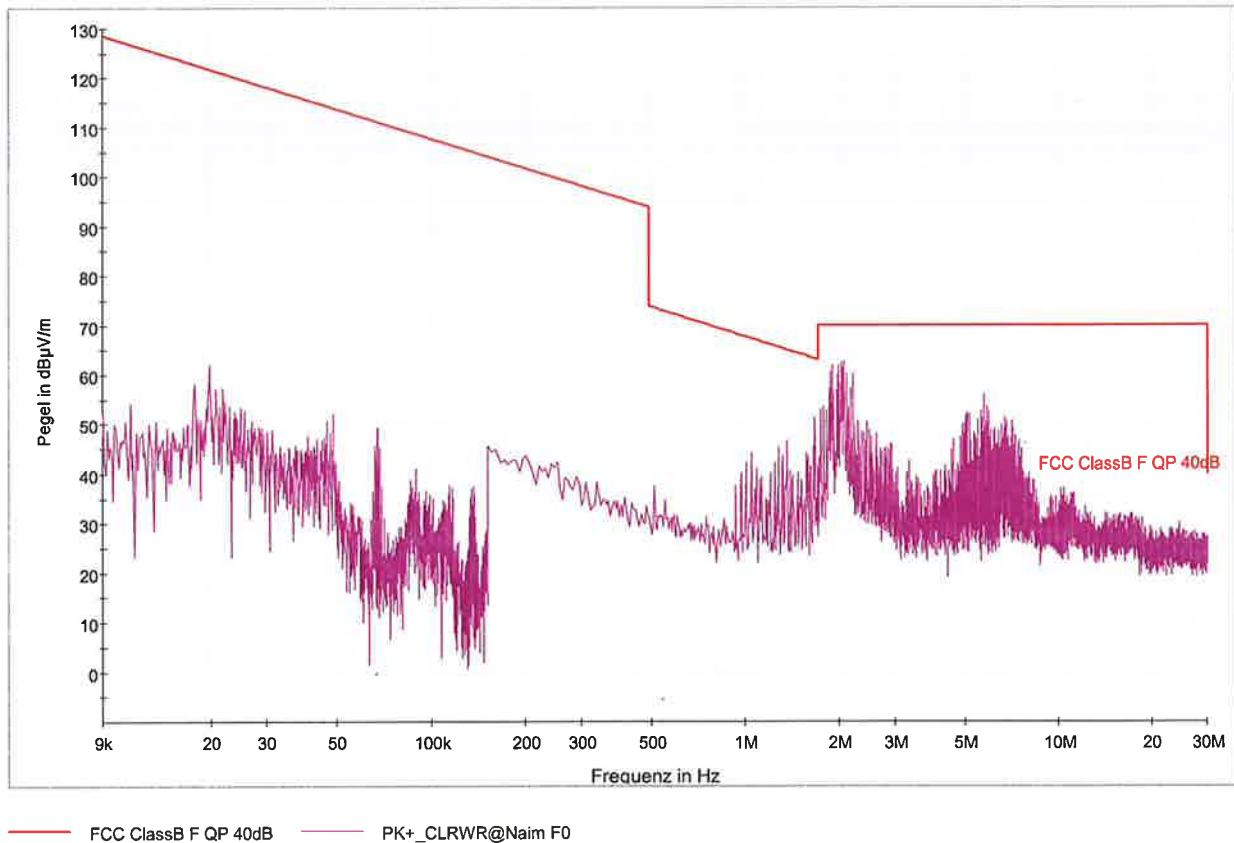

Worst case emission: 62,4 dBµV/m @ 19,8 kHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-207

**Emissions in restricted bands**  
**Emissions falling within restricted frequency bands**

**§ 15.209(a)**  
**RSS-Gen**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 149-161: 5775 MHz

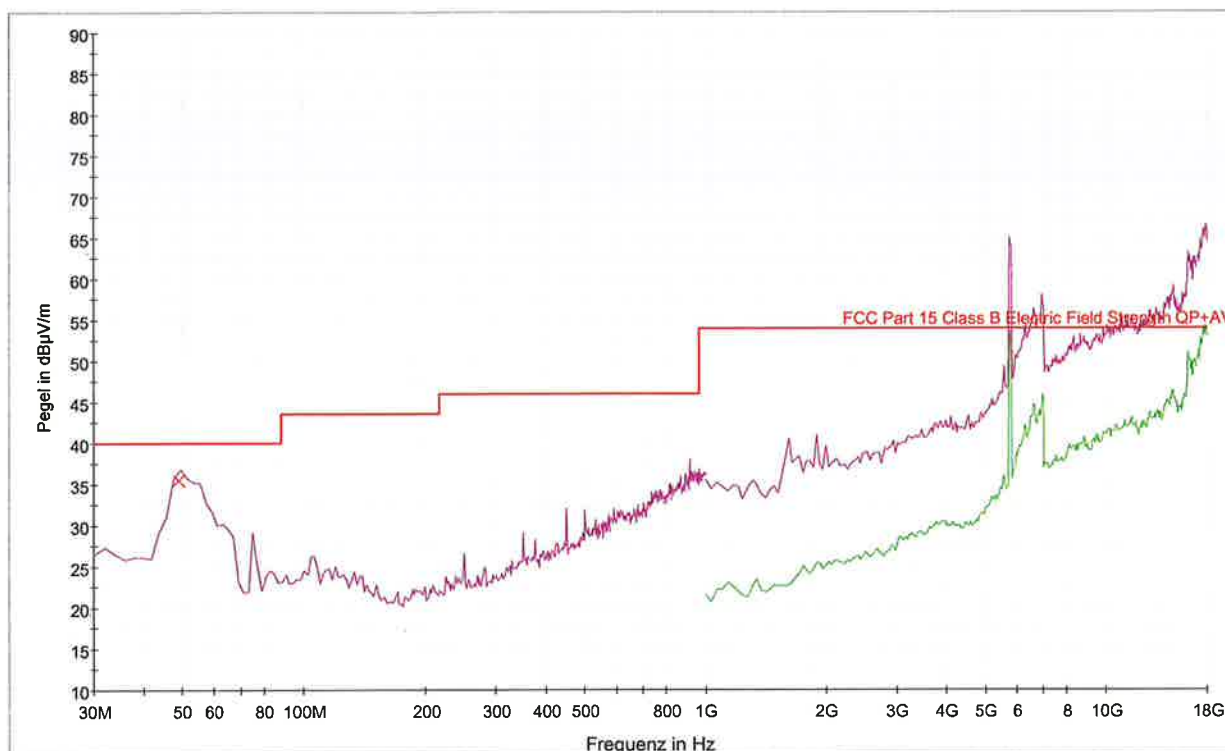

PK+\_MAXH@Naim Feld (magenta line)  
AVG\_MAXH@Naim Feld (green line)  
FCC Part 15 Class B Electric Field Strength QP+AV (red line)  
QuasiPeak@Naim Feld (magenta X)

Worst case emission: 35,3 dBµV/m @ 48,6 MHz

Remark: As the highest spurious conducted emission was measured as to be -48 dBm in 1 MHz Bandwidth, all radiated measurements (except Band edges) were made with RF connector terminated with 50 ohm load. Although the measurement above ends at 18 GHz, all measurements were performed up to the thenth harmonics of the transmitter frequency.

**LIMIT SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-126; NT-129; NT-131; NT-139; NT-207; NT-211; NT-214; NT-218; NT-337

**Conducted Limits**

**§ 15.207  
RSS-Gen 8.8**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 3648: 5210 MHz – for each frequency band the mode with highest RF output power was measured

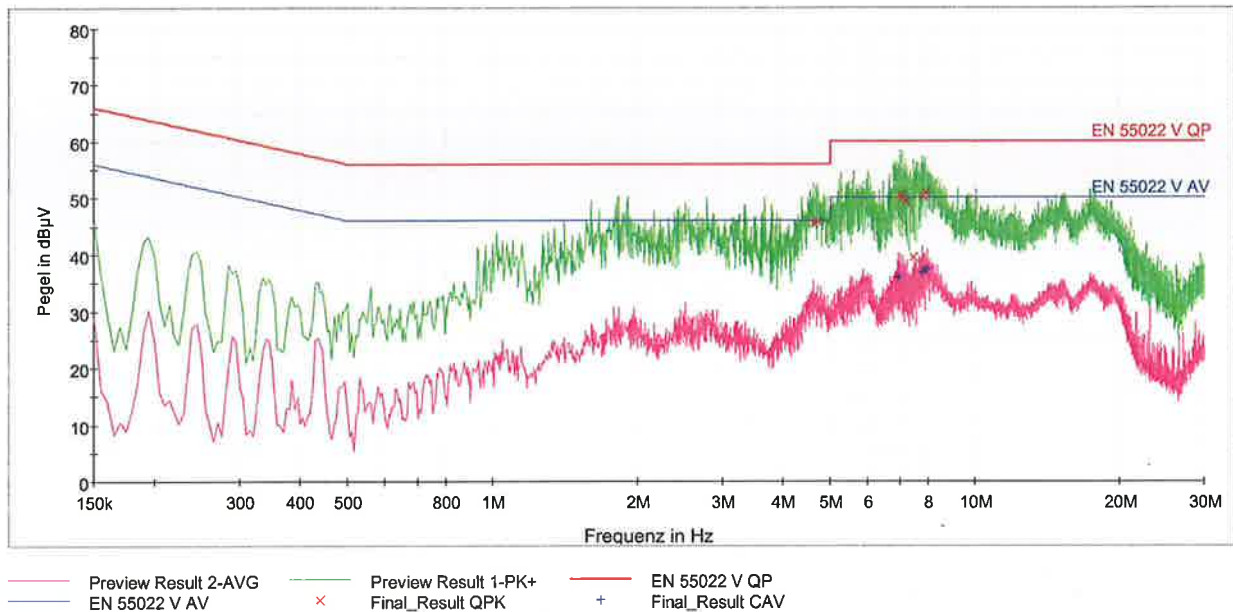

**LIMIT**

**SUBCLAUSE 15.207(a) – RSS-Gen 8.8**

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


Test Equipment used: NT-300; NT-554; NT-441; NT-207

**Conducted Limits**

**§ 15.207  
RSS-Gen 8.8**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 64: 5320 MHz – for each frequency band the mode with highest RF output power was measured

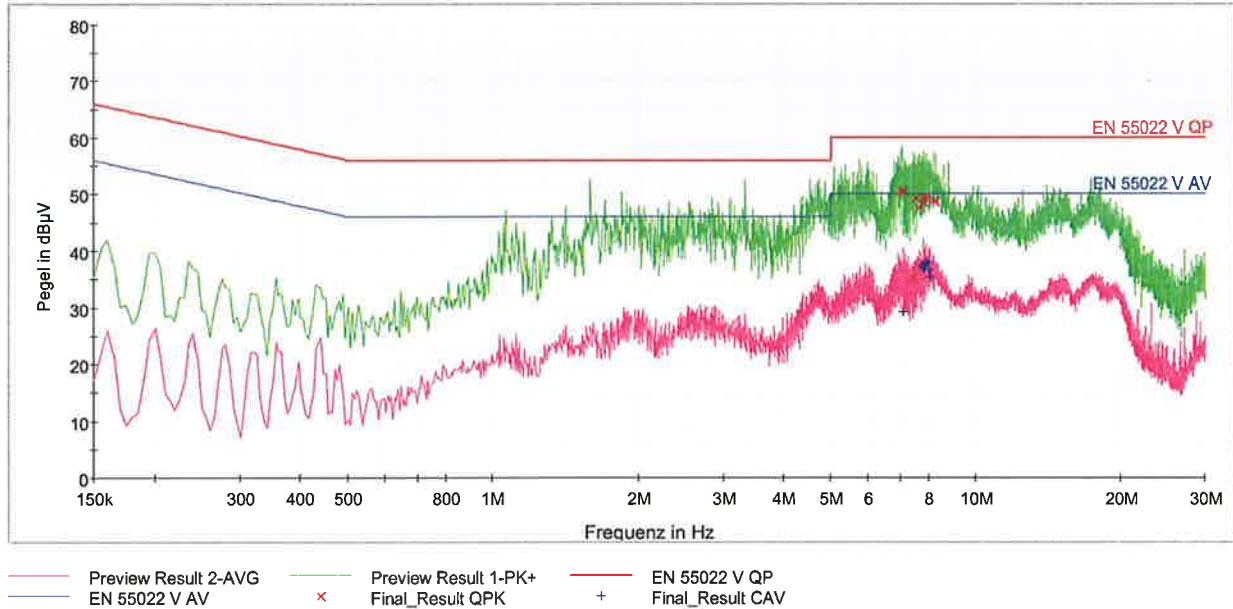

**LIMIT SUBCLAUSE 15.207(a) – RSS-Gen 8.8**

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


Test Equipment used: NT-300; NT-554; NT-441; NT-207

**Conducted Limits**

**§ 15.207  
RSS-Gen 8.8**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 132136: 5670 MHz – for each frequency band the mode with highest RF output power was measured

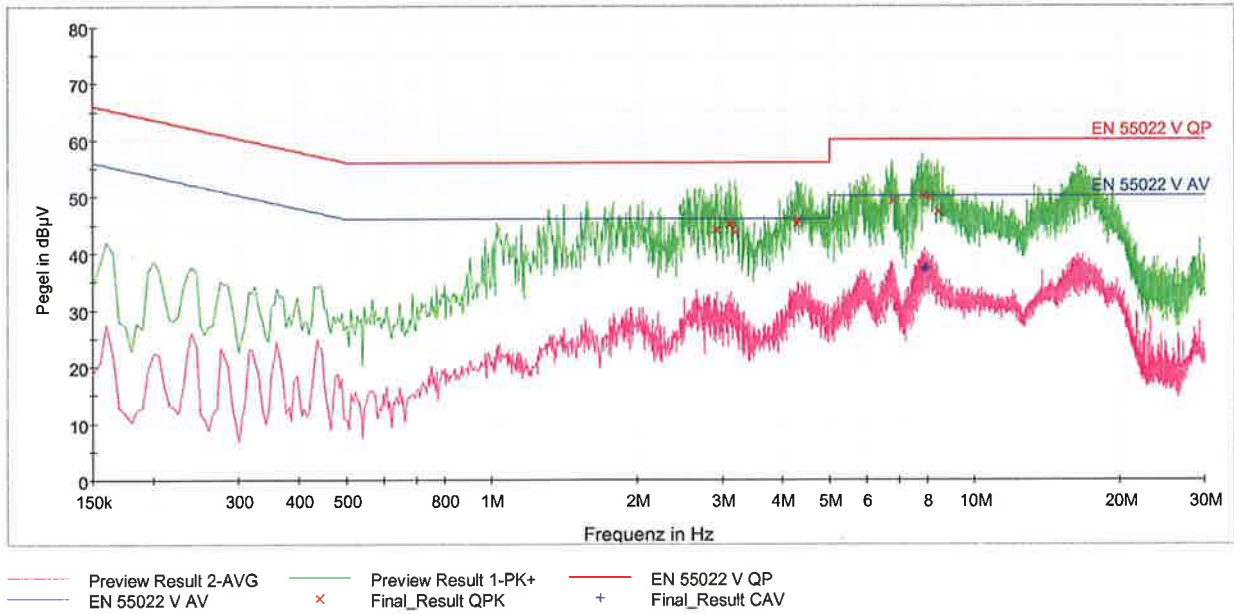

**LIMIT SUBCLAUSE 15.207(a) – RSS-Gen 8.8**

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


Test Equipment used: NT-300; NT-554; NT-441; NT-207

**Conducted Limits**

**§ 15.207  
RSS-Gen 8.8**

Measurement with Peak-Detector (magenta line) and Average detector (green line):

Setup: CH 165: 5825 MHz – for each frequency band the mode with highest RF output power was measured

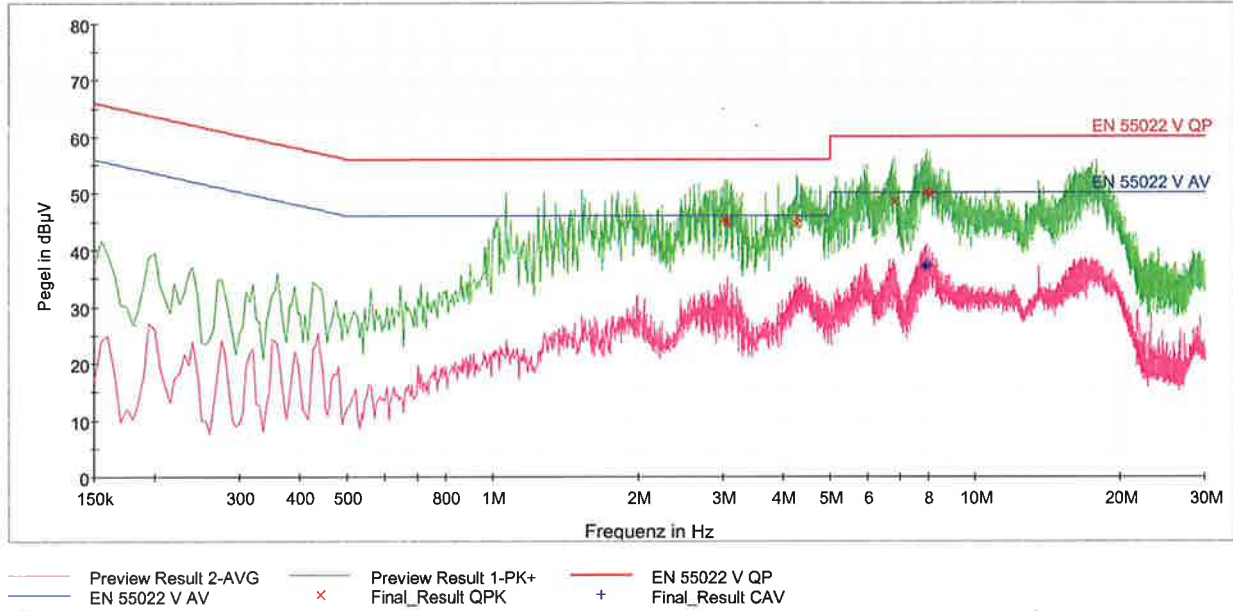

**LIMIT SUBCLAUSE 15.207(a) – RSS-Gen 8.8**

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

Test Equipment used: NT-300; NT-554; NT-441; NT-207

Test Report Reference:  
M/FG-16/110

Ambient temperature: 27°C

Relative humidity: 36%



## **Maximum permissible Exposure**

**§2.1091**

A mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons.



# Appendix 1

## Test equipment used

<input type="checkbox"/>	Anechoic Chamber with 3m measurement distance	NT-100	<input type="checkbox"/>	Power quality analyzer Fluke 1760 (complete set)	NT-160 - NT-173
<input type="checkbox"/>	Stripline according to ISO 11452-5	NT-108	<input type="checkbox"/>	Spectrum analyzer – FSP7 9 kHz – 7 GHz	NT-200
<input type="checkbox"/>	MA4000 - Antenna mast 1 - 4 m height	NT-110/1	<input type="checkbox"/>	ESCI - Test receiver 9 kHz - 7 GHz	NT-203/1
<input type="checkbox"/>	DS - Turntable 0 - 400 ° Azimuth	NT-111/1	<input type="checkbox"/>	ESI26 – Test receiver 20 Hz – 26,5 GHz	NT-207
<input type="checkbox"/>	CO3000 Controller Mast+Turntable	NT-112/1	<input type="checkbox"/>	Digital Radio Tester CTS55	NT-208
<input type="checkbox"/>	HUF-Z3 - Log. Per. Antenna 200 - 1000 MHz	NT-121	<input type="checkbox"/>	Noise-gen., ITU-R 559-2 20 Hz – 20 kHz	NT-209
<input type="checkbox"/>	HFH-Z2 - Loop Antenna 9 kHz - 30 MHz	NT-122	<input type="checkbox"/>	CMTA - Radiocommunication analyzer ; 0,1 - 1000 MHz	NT-210
<input type="checkbox"/>	HFH-Z6 - Rod Antenna 9 kHz - 30 MHz	NT-123	<input type="checkbox"/>	3271 - Spectrum analyzer 100 Hz - 26,5 GHz	NT-211
<input type="checkbox"/>	3121C - Dipole Antenna 28 - 1000 MHz	NT-124	<input type="checkbox"/>	Digital Radio Tester Aeroflex 3920	NT-212/1
<input type="checkbox"/>	3115 - Horn Antenna 1 - 18 GHz (immunity)	NT-125	<input type="checkbox"/>	Mixer M28HW 26,5 GHz - 40 GHz	NT-214
<input type="checkbox"/>	3116 - Horn Antenna 18 - 40 GHz	NT-126	<input type="checkbox"/>	RubiSource T&M Timing reference	NT-216
<input type="checkbox"/>	SAS-200/543 - Bicon. Antenna 20 MHz - 300 MHz	NT-127	<input type="checkbox"/>	Radiocommunication analyzer SWR 1180 MD	NT-217
<input type="checkbox"/>	AT-1080 - Log. Per. Antenna 80 - 1000 MHz	NT-128	<input type="checkbox"/>	Mixer M19HWD 40 GHz – 60 GHz	NT-218
<input type="checkbox"/>	HK-116 - bicon. Antenna 20 MHz - 300 MHz	NT-129	<input type="checkbox"/>	Mixer M12HWD 60 GHz – 90 GHz	NT-219
<input type="checkbox"/>	HK-116 - bicon. Antenna 20 MHz - 300 MHz	NT-130	<input type="checkbox"/>	DSO9104 Digital scope	NT-220/1
<input type="checkbox"/>	3146 - Log. Per. Antenna 200 – 1000 MHz	NT-131	<input type="checkbox"/>	TPS 2014 Digital scope	NT-222
<input type="checkbox"/>	VULB 9163 Trilog Antenna 30 – 3000 MHz	NT-131/1	<input type="checkbox"/>	Artificial Ear according to IEC 60318	NT-224
<input type="checkbox"/>	Loop Antenna H-Field	NT-132	<input type="checkbox"/>	1 kHz Sound calibrator	NT-225
<input type="checkbox"/>	Horn Antenna 500 MHz - 2900 MHz	NT-133	<input type="checkbox"/>	B10 - Harmonics and flicker analyzer	NT-232
<input type="checkbox"/>	Horn Antenna 500 MHz - 6000 MHz	NT-133/1	<input type="checkbox"/>	SRM-3000 Spectrum analyzer	NT-233
<input type="checkbox"/>	Log. per. Antenna 800 MHz - 2500 MHz	NT-134	<input type="checkbox"/>	SRM-3006 Spectrum analyzer	NT-233/1a
<input type="checkbox"/>	Log. per. Antenna 800 MHz - 2500 MHz	NT-135	<input type="checkbox"/>	E-field probe SRM 75 MHz – 3 GHz	NT-234
<input type="checkbox"/>	BiConiLog Antenna 26 MHz – 2000 MHz	NT-137	<input type="checkbox"/>	Field Meter NBM-500 incl. E- and H-Field probes	NT-240a-d
<input type="checkbox"/>	Conical Dipol Antenna PCD8250	NT-138	<input type="checkbox"/>	Hall-Teslameter ETM-1	NT-241
<input type="checkbox"/>	HF 906 - Horn Antenna 1 - 18 GHz (emission)	NT-139	<input type="checkbox"/>	EFA-3 H-field- / E-field probe	NT-243
<input type="checkbox"/>	HZ-1 Antenna tripod	NT-150	<input type="checkbox"/>	Field Meter EMR-200 100 kHz – 3 GHz	NT-244
<input type="checkbox"/>	BN 1500 Antenna tripod	NT-151	<input type="checkbox"/>	E-field probe 100 kHz – 3 GHz	NT-245
<input type="checkbox"/>	Ant. tripod for EN61000-4-3 Model TP1000A	NT-156	<input type="checkbox"/>	H-field probe 300 kHz – 30 MHz	NT-246

**Division:**  
Industry & Energy

Department: FG

Test report number:  
M/FG-16/110

Page: 1 of 4

Date: 15.12.2016

Checked by: 

# Appendix 1 (continued)

## Test equipment used

<input type="checkbox"/>	E-field probe 3 MHz – 18 GHz	NT-247	<input type="checkbox"/>	Oscillatory Wave Simulator incl. Coupling networks	NT-328a+b+c
<input type="checkbox"/>	H-field probe 27 MHz – 1 GHz	NT-248	<input type="checkbox"/>	BTA-250 - RF-Amplifier 9 kHz - 220 MHz / 250 W	NT-330
<input type="checkbox"/>	ELT-400 1 Hz – 400 kHz	NT-249	<input type="checkbox"/>	T82-50 RF-Amplifier 2 GHz – 8 GHz	NT-331
<input type="checkbox"/>	MDS 21 - Absorbing clamp 30 - 1000 MHz	NT-250	<input type="checkbox"/>	500W1000M7 - RF-Amplifier 80 - 1000 MHz / 500 W	NT-332
<input type="checkbox"/>	FCC-203I EM Injection clamp	NT-251	<input type="checkbox"/>	AS0102-65R - RF-Amplifier 1 GHz - 2 GHz	NT-333
<input type="checkbox"/>	FCC-203I-DCN Ferrite decoupling network	NT-252	<input type="checkbox"/>	APA01 – RF-Amplifier 0,5 GHz – 2,5 GHz	NT-334
<input type="checkbox"/>	PR50 Current Probe	NT-253	<input type="checkbox"/>	Preamplifier 1 GHz - 4 GHz	NT-335
<input type="checkbox"/>	i310s Current Probe	NT-254/1	<input type="checkbox"/>	Preamplifier for GPS MKU 152 A	NT-336
<input type="checkbox"/>	Fluke 87 V True RMS Multimeter	NT-260	<input type="checkbox"/>	Preamplifier 100 MHz – 23 GHz	NT-337
<input type="checkbox"/>	Model 2000 Digital Multimeter	NT-261	<input type="checkbox"/>	DC Block 10 MHz – 18 GHz Model 8048	NT-338
<input type="checkbox"/>	Fluke 87 V Digital Multimeter	NT-262/1	<input type="checkbox"/>	2-97201 Electronic load	NT-341
<input type="checkbox"/>	ESH2-Z5-U1 Artificial mains network 4x25A	NT-300	<input type="checkbox"/>	TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-344
<input type="checkbox"/>	ESH3-Z5-U1 Artificial mains network 2x10A	NT-301	<input type="checkbox"/>	TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-345
<input type="checkbox"/>	ESH3-Z6-U1 Artificial mains network 1x100A	NT-302	<input type="checkbox"/>	VDS 200 Mobil-impuls-generator	NT-350
<input type="checkbox"/>	ESH3-Z6-U1 Artificial mains network 1x100A	NT-302a	<input type="checkbox"/>	LD 200 Mobil-impuls-generator	NT-351
<input type="checkbox"/>	PHE 4500/B Power amplifier	NT-304	<input type="checkbox"/>	MPG 200 Mobil-Impuls-Generators	NT-352
<input type="checkbox"/>	EZ10 T-Artificial Network	NT-305	<input type="checkbox"/>	EFT 200 Mobil-impuls-generator	NT-353
<input type="checkbox"/>	SMG - Signal generator 0,1 - 1000 MHz	NT-310	<input type="checkbox"/>	AN 200 S1 Artificial Network	NT-354
<input type="checkbox"/>	SMA100A - Signal generator 9 kHz - 6 GHz	NT-310/1	<input type="checkbox"/>	FP-EFT 32M 3 ph. Coupling filter (Burst)	NT-400/1
<input type="checkbox"/>	RefRad Reference generator	NT-312	<input type="checkbox"/>	PHE 4500 - Mains impedance network	NT-401
<input type="checkbox"/>	SMP 02 Signal generator 10 MHz - 20 GHz	NT-313	<input type="checkbox"/>	IP 6.2 Coupling filter for data lines (Surge)	NT-403
<input type="checkbox"/>	40 MHz Arbitrary Generator TGA1241	NT-315	<input type="checkbox"/>	TK 9421 High Power Volt. Probe 150 kHz - 30 MHz	NT-409
<input type="checkbox"/>	Artificial mains network NSLK 8127-PLC	NT-316	<input type="checkbox"/>	ESH2-Z3 - Probe 9 kHz - 30 MHz	NT-410
<input type="checkbox"/>	PEFT - Burst generator up to 4 kV	NT-320	<input type="checkbox"/>	IP 4 - Capacitive clamp (Burst)	NT-411
<input type="checkbox"/>	ESD 30 System up to 25 kV	NT-321	<input type="checkbox"/>	Highpass-Filter 100 MHz – 3 GHz	NT-412
<input type="checkbox"/>	PSURGE 4.1 Surge generator	NT-324	<input type="checkbox"/>	Highpass-Filter 600 MHz – 4 GHz	NT-413
<input type="checkbox"/>	IMU4000 Immunity test system	NT-325/1	<input type="checkbox"/>	Highpass-Filter 1250 MHz – 4 GHz	NT-414
<input type="checkbox"/>	VCS 500-M6 Surge-Generator	NT-326	<input type="checkbox"/>	Highpass-Filter 1800 MHz – 16 GHz	NT-415

**Division:**  
Industry & Energy

Department: FG

Test report number:  
M/FG-16/110

Page: 2 of 4

Date: 15.12.2016

Checked by: 

# Appendix 1 (continued)

## Test equipment used

<input type="checkbox"/>	Highpass-Filter 3500 MHz – 18 GHz	NT-416	<input type="checkbox"/>	FCC-801-S25 Coupling decoupling network	NT-462
<input type="checkbox"/>	RF-Attenuator 10 dB DC – 18 GHz / 50 W	NT-417	<input type="checkbox"/>	FCC-801-T4 Coupling decoupling network	NT-463
<input type="checkbox"/>	RF-Attenuator 6 dB DC – 18 GHz / 50 W	NT-418	<input type="checkbox"/>	FCC-801-C1 Coupling decoupling network	NT-464
<input type="checkbox"/>	RF-Attenuator 3 dB DC – 18 GHz / 50 W	NT-419	<input type="checkbox"/>	SW 9605 - Current probe 150 kHz – 30 MHz	NT-465/1
<input type="checkbox"/>	RF-Attenuator 20 dB DC - 1000 MHz / 25 W	NT-421	<input type="checkbox"/>	95242-1 – Current probe 1 MHz – 400 MHz	NT-468
<input type="checkbox"/>	RF-Attenuator 30 dB DC - 1000 MHz / 1 W	NT-423	<input type="checkbox"/>	94106-1L-1 – Current probe 100 kHz – 450 MHz	NT-471
<input type="checkbox"/>	RF-Attenuator 30 dB	NT-424	<input type="checkbox"/>	GA 1240 Power amplifier according to EN 61000-4-16	NT-480
<input type="checkbox"/>	RF-Attenuator 6 dB DC - 1000 MHz / 1 W	NT-425	<input type="checkbox"/>	Coupling networks according to EN 61000-4-16	NT-481 - NT-483
<input type="checkbox"/>	RF-Attenuator 6 dB DC - 1000 MHz / 1 W	NT-426	<input type="checkbox"/>	Van der Hoofden Test Head	NT-484
<input type="checkbox"/>	RF-Attenuator 6 dB	NT-428	<input type="checkbox"/>	PC P4 3 GHz Test computer	NT-500
<input type="checkbox"/>	RF-Attenuator 0 dB - 81 dB	NT-429	<input type="checkbox"/>	PC P4 1700 MHz Notebook	NT-505
<input type="checkbox"/>	WRU 27 - Band blocking 27 MHz	NT-430	<input type="checkbox"/>	Monitoring camera with Monitor	NT-511
<input type="checkbox"/>	WHJ450C9 AA - High pass 450 MHz	NT-431	<input type="checkbox"/>	ES-K1 Version 1.71 SP2 Test software	NT-520
<input type="checkbox"/>	WHJ250C9 AA - High pass 250 MHz	NT-432	<input type="checkbox"/>	EMC32 Version 10.01 Test software	NT-520/1
<input type="checkbox"/>	RF-Load 150 W	NT-433	<input type="checkbox"/>	SRM-TS Version 1.3 software for SRM-3000	NT-522
<input type="checkbox"/>	Impedance transducer 1:4 ; 1:9 ; 1:16	NT-435	<input type="checkbox"/>	SRM-TS Version 1.3.1 software for SRM-3006	NT-522/1
<input type="checkbox"/>	RF-Attenuator DC – 18 GHz 6 dB	NT-436	<input type="checkbox"/>	Spitzenberger und Spies Test software V4.1	NT-525
<input type="checkbox"/>	RF-Attenuator DC – 18 GHz 6 dB	NT-437	<input type="checkbox"/>	Noise power test apparatus according to EN 55014	NT-530
<input type="checkbox"/>	RF-Attenuator DC – 18 GHz 10 dB	NT-438	<input type="checkbox"/>	Vertical coupling plane (ESD)	NT-531
<input type="checkbox"/>	RF-Attenuator DC – 18 GHz 20 dB	NT-439	<input type="checkbox"/>	Test cable #4 for EN 61000-4-6	NT-553
<input type="checkbox"/>	I+P 7780 Directional coupler 100 - 2000 MHz	NT-440	<input type="checkbox"/>	Test cable #3 for conducted emission	NT-554
<input type="checkbox"/>	ESH3-Z2 - Pulse limiter 9 kHz - 30 MHz	NT-441	<input type="checkbox"/>	Test cable #5+#6 ESD-cable (2x470k)	NT-555 + NT-556
<input type="checkbox"/>	Power Divider 6 dB/1 W/50 Ohm	NT-443	<input type="checkbox"/>	Test cable #8 Sucoflex 104EA	NT-559
<input type="checkbox"/>	Directional coupler 0,1 MHz – 70 MHz	NT-444	<input type="checkbox"/>	Test cable #9 (for outdoor measurements)	NT-580
<input type="checkbox"/>	Directional coupler 0,1 MHz – 70 MHz	NT-445	<input type="checkbox"/>	Test cable #10 (for outdoor measurements)	NT-581
<input type="checkbox"/>	Tube imitations according to EN 55015	NT-450	<input type="checkbox"/>	Test cable #13 Sucoflex 104PE	NT-584
<input type="checkbox"/>	FCC-801-M3-16A Coupling decoupling network	NT-458	<input type="checkbox"/>	Test cable #21 for SRM-3000	NT-592
<input type="checkbox"/>	FCC-801-M2-50A Coupling decoupling network	NT-459	<input type="checkbox"/>	Shield chamber	NT-600
<input type="checkbox"/>	FCC-801-M5-25 Coupling decoupling network	NT-460	<input type="checkbox"/>	Climatic chamber	M-1200
<input type="checkbox"/>	FCC-801-AF10 Coupling decoupling network	NT-461			

**Division:**  
Industry & Energy

Department: FG

Test report number:  
M/FG-16/110

Page: 3 of 4

Date: 15.12.2016

Checked by: 

# Appendix 1 (continued)

## Test equipment used

<input type="checkbox"/>	Anechoic Chamber 3 m / 5 m measuring distance	EMV-100	<input type="checkbox"/>	Log.per Antenna 80-2700 MHz STLP 9128 E special	EMV-304
<input type="checkbox"/>	Turntabel 6 m diameter	EMV-101	<input type="checkbox"/>	Log.per Antenna 0,7 – 9 GHz STLP9149	EMV-305
<input type="checkbox"/>	Antenna mast 1 – 4 m	EMV-102	<input type="checkbox"/>	Load Dump Generator LD 200N	EMV-350
<input type="checkbox"/>	Mast and Turntable controller FC-06	EMV-103	<input type="checkbox"/>	Ultra Compact Symulator UCS 200N100	EMV-351
<input type="checkbox"/>	EMC Video/Audiosystem	EMV-104	<input type="checkbox"/>	Automotive Power fail module PFM 200N100.1	EMV-352
<input type="checkbox"/>	EMC Software EMC32 Version 10.01	EMV-105	<input type="checkbox"/>	Voltage Drop Symulator VDS 200Q100	EMV-353
<input type="checkbox"/>	Hornantenna 1 – 18 GHz HF 907	EMV-110	<input type="checkbox"/>	Arb. Generator AutoWave	EMV-354
<input type="checkbox"/>	Antennapre.amp. 1 – 18 GHz ERZ-LNA0200-1800-30-2	EMV-111	<input type="checkbox"/>	Ultra Compact Symulator UCS 500N7	EMV-355
<input type="checkbox"/>	Trilog Antenna 30-3000 MHz VULB9163	EMV-112	<input type="checkbox"/>	Coupling decoupling network CNI 503B7 / 32 A	EMV-356
<input type="checkbox"/>	Monopol 9 kHz – 30 MHz VAMP 9243	EMV-113	<input type="checkbox"/>	Coupling decoupling network CNI 503B7 / 63 A	EMV-357
<input type="checkbox"/>	Antennapre.amp 18 – 40 GHz BBV 9721	EMV-114	<input type="checkbox"/>	Telecom Surge Generator TSurge 7	EMV-358
<input type="checkbox"/>	DC Artificial Network PVDC 8300	EMV-150	<input type="checkbox"/>	Coupling decoupling network CNI 508N2	EMV-359
<input type="checkbox"/>	AC Artificial Network NNLK 8121 RC	EMV-151	<input type="checkbox"/>	Coupling decoupling network CNV 504N2.2	EMV-360
<input type="checkbox"/>	EMI Receiver ESR26	EMV-200	<input type="checkbox"/>	Immunity generator NSG4060/NSG4060-1	EMV-361
<input type="checkbox"/>	Signalgenerator 9 kHz – 40 GHz N5173B	EMV-201	<input type="checkbox"/>	Coupling network CDND M316-2	EMV-362
<input type="checkbox"/>	GPS Frequency normal B-88	EMV-202	<input type="checkbox"/>	Coupling network CT419-5	EMV-363
<input type="checkbox"/>	DC Power supply N5745A	EMV-203	<input type="checkbox"/>	ESD Generator NSG 437	EMV-364
<input type="checkbox"/>	DC Power supply N5745A	EMV-204	<input type="checkbox"/>	Pulse Limiter VTSD 9561-F BNC	EMV-405
<input type="checkbox"/>	Spektrum Analyzator FSV40	EMV-205	<input type="checkbox"/>	Transient emission BSM200N40+BS200N100	EMV-450+451
<input type="checkbox"/>	Thd Multimeter Model 2015	EMV-206	<input type="checkbox"/>	Cap. Coupling Clamp HFK	EMV-455
<input type="checkbox"/>	Poweramplifier PAS15000	EMV-207/abc	<input type="checkbox"/>	Mag. Field System MS100N+MC26100+MC2630	EMV-456-458
<input type="checkbox"/>	Inrush Current Source	EMV-208/abc	<input type="checkbox"/>	Coupling network CDN M2-100A	EMV-459
<input type="checkbox"/>	Arb.-generator Sycore	EMV-209	<input type="checkbox"/>	Coupling network CDN M3-32A	EMV-460
<input type="checkbox"/>	Harmonics/Flicker analyzer ARS 16/3	EMV-210	<input type="checkbox"/>	Coupling network CDN M5-100A	EMV-461
<input type="checkbox"/>	HF- Amplifier 9 kHz-250 MHz BBA150	EMV-300	<input type="checkbox"/>	Current Clamp CIP 9136A	EMV-462
<input type="checkbox"/>	HF- Amplifier 80 -1000 MHz BBA150	EMV-301	<input type="checkbox"/>	DC Artificial Network HV-AN 150	EMV-464+465
<input type="checkbox"/>	HF- Amplifier 0,8 - 6 GHz BBA150	EMV-302	<input type="checkbox"/>	Coupling Clamp EM 101	EMV-466
<input type="checkbox"/>	High Power Ant. 20-200 MHz VHBD 9134	EMV-303	<input type="checkbox"/>	Decoupling Clamp FTC 101	EMV-467
			<input type="checkbox"/>	Power attenuator DG 250 W 6 GHz 6 dB	EMV-469

**Division:**  
Industry & Energy

Department: FG

Test report number:  
M/FG-16/110

Page: 4 of 4

Date: 15.12.2016

Checked by: 