

**TEST REPORT**  
No.: 6-0196-12-1-2b-C1

According to:  
**FCC Regulations**  
Part 15.109,  
Part 15.209 & Part15.247







**IC Regulations**  
RSS-Gen Issue 3 & RSS-210 Issue 8

for

Miele & Cie. KG

Communication unit for household appliances EI 7800  
(ZigBee Wireless Technology)

FCC-ID: 2ACUWEI7800  
IC: 5669C-EI7800

| Laboratory Accreditation and Listings                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                           |                                                                                                                                                                        |                                                                                                                                                                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>DAkks</b><br>Deutsche<br>Akkreditierungsstelle<br>D-PL-12047-01-01                                                                                                                                                                                                                                                                                                                         | <br>Reg. No.: 736496<br>MRA US-EU 0003 | <br>Industry Canada<br>Reg. No.: 3462D-1<br>Reg. No.: 3462D-2<br>Reg. No.: 3462D-3 | <br>Voluntary Controls for<br>Electromagnetic Emissions<br>Reg. No.: R-2665, R-2666 C-2914,<br>T-1967, G-301 |
|  AUTHORIZED<br>RF LABORATORY                                                                                                                                                                                                                                                                                                                                                                      | <br><b>LAB CODE 20011130-00</b>       |                                                                                                                                                                        |                                                                                                                                                                                                   |
| accredited according to DIN EN ISO/IEC 17025                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                           |                                                                                                                                                                        |                                                                                                                                                                                                   |
| <p align="center"> <b>CETECOM GmbH</b><br/>                     Laboratory Radio Communications &amp; Electromagnetic Compatibility<br/>                     Im Teelbruch 116 • 45219 Essen • Germany<br/>                     Registered in Essen, Germany, Reg. No.: HRB Essen 8984<br/>                     Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964<br/>                     E-mail: info@cetecom.com • Internet: www.cetecom.com                 </p> |                                                                                                                           |                                                                                                                                                                        |                                                                                                                                                                                                   |

## Table of contents

|                                                                                           |           |
|-------------------------------------------------------------------------------------------|-----------|
| <b>1. SUMMARY OF TEST RESULTS</b> .....                                                   | <b>3</b>  |
| <b>2. ADMINISTRATIVE DATA</b> .....                                                       | <b>5</b>  |
| 2.1. Identification of the testing laboratory.....                                        | 5         |
| 2.2. Test location .....                                                                  | 5         |
| 2.3. Organizational items.....                                                            | 5         |
| 2.4. Applicant’s details .....                                                            | 5         |
| 2.5. Manufacturer’s details .....                                                         | 5         |
| <b>3. EQUIPMENT UNDER TEST (EUT)</b> .....                                                | <b>6</b>  |
| 3.1. Technical data of main EUT declared by applicant .....                               | 6         |
| 3.2. EUT: Type, S/N etc. and short descriptions used in this test report .....            | 7         |
| 3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions.....                 | 7         |
| 3.4. EUT set-ups .....                                                                    | 8         |
| 3.5. EUT operating modes .....                                                            | 8         |
| 3.6. Configuration of cables used for testing .....                                       | 9         |
| <b>4. DESCRIPTION OF TEST SYSTEM SET-UP’S</b> .....                                       | <b>10</b> |
| 4.1. Test system set-up for conducted RF-measurement at antenna port.....                 | 10        |
| 4.2. Test system set-up for radiated magnetic field measurements below 30 MHz.....        | 10        |
| 4.3. Test system set-up for electric field measurement in the range 30 MHz to 1 GHz ..... | 12        |
| 4.4. Test system set-up for electric field measurement above 1 GHz.....                   | 13        |
| <b>5. MEASUREMENTS</b> .....                                                              | <b>14</b> |
| 5.1. General Limit - Radiated field strength emissions below 30 MHz.....                  | 14        |
| 5.2. General Limit - Radiated field strength emissions, 30 MHz - 1 GHz.....               | 16        |
| 5.3. General Limit - Radiated emissions, above 1 GHz.....                                 | 18        |
| 5.4. RF Parameter - Band-Edge compliance measurements .....                               | 20        |
| 5.5. RF Parameter – Power Radiated - E.I.R.P. ....                                        | 21        |
| 5.6. RF-Parameter - RF Power Conducted .....                                              | 22        |
| 5.7. RF Parameter - Power Spectral Density .....                                          | 24        |
| 5.8. RF Parameter - 20dBc Emission specification .....                                    | 25        |
| 5.9. RF Parameter - 6 dB and 99% occupied Bandwidth .....                                 | 26        |
| 5.10. RF Parameter - Frequency stability .....                                            | 28        |
| 5.11. Measurement uncertainties .....                                                     | 31        |
| <b>6. ABBREVIATIONS USED IN THIS REPORT</b> .....                                         | <b>31</b> |
| <b>7. ACCREDITATION DETAILS OF CETECOM’S LABORATORIES AND TEST SITES</b> .....            | <b>32</b> |
| <b>8. INSTRUMENTS AND ANCILLARY</b> .....                                                 | <b>33</b> |
| 8.1. Used equipment “CTC” .....                                                           | 33        |
| <b>9. VERSIONS OF TEST REPORTS (CHANGE HISTORY)</b> .....                                 | <b>37</b> |

## Table of annex

|                                  | <b>Total pages</b> |
|----------------------------------|--------------------|
| Annex 1: External photographs    | 4                  |
| Annex 2: Internal photographs    | 5                  |
| Annex 3: Test set-up photographs | 4                  |
| Annex 4: Measurement diagrams    | 37                 |

The listed attachments are an integral part of this report.

## 1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests.

The Equipment Under Test (in this report, hereinafter referred as EUT) supports radiofrequency technology. The presented device integrate a ZigBee wireless transmitter at 2.405 to 2.480 GHz frequency range. This test report have been corrected for including the certification IDs, especially chapter 8 reflects the situation of the calibrated equipment on the date of the tests.

Following test cases have been performed to show compliance with valid Part 15.109/15.209/15.247 of the FCC CFR 47 Rules, Edition 1<sup>st</sup> October 2013 and IC RSS-210 Issue 8/ RSS-Gen Issue 3 standards.

### 1.1. Tests overview FCC and Canada IC Standards (RSS)

| TEST CASES                                          | PORT                                         | REFERENCES & LIMITS               |                                                                      |                                                                                    | EUT set-up | EUT operating mode | Result |
|-----------------------------------------------------|----------------------------------------------|-----------------------------------|----------------------------------------------------------------------|------------------------------------------------------------------------------------|------------|--------------------|--------|
|                                                     |                                              | FCC Standard                      | RSS Section                                                          | TEST LIMIT                                                                         |            |                    |        |
| TX-Mode                                             |                                              |                                   |                                                                      |                                                                                    |            |                    |        |
| 6 dB bandwidth                                      | Antenna terminal (conducted)                 | §15.247(a)(2)                     | RSS-210 Issue 8: A8.2 (a)<br>RSS-Gen Issue 3: Chapter 4.6.2          | ≥ 500 kHz for DTS systems                                                          | 2          | 1                  | passed |
| 99% occupied bandwidth                              | Antenna terminal (conducted)                 | --                                | RSS-Gen Issue 3: Chapter 4.6.1                                       | 99% Power bandwidth                                                                | 2          | 1                  | passed |
| Transmitter Peak output power                       | Antenna terminal (conducted)                 | §15.247(b)(1)                     | RSS-210 Issue 8: A8.4 (4)                                            | 1 Watt Peak                                                                        | 2          | 1                  | passed |
| Transmitter Peak output power radiated              | Cabinet (radiated)                           | §15.247(b)(4)                     | RSS-210 Issue 8:A8.4 (4)                                             | < 4 Watt (EIRP) for antenna with directional gain less 6dBi                        | 1 + 2      | 1                  | passed |
| Out-Of-Band RF- emissions<br>Band-Edge emissions    | Antenna terminal (conducted)                 | §15.247 (d)                       | RSS-210 Issue 8: A8.5                                                | 20 dBc                                                                             | 2          | 1                  | passed |
| Power spectral density                              | Antenna terminal (conducted)                 | §15.247(e)                        | RSS-210 Issue 8: A8.2 (b)                                            | 8dBm in any 3 kHz band                                                             | 2          | 1                  | passed |
| Transmitter frequency stability                     | Antenna terminal (conducted)                 | --                                | RSS-Gen, Issue 3, Chapter 4.7 and Chapter 7.2.6                      | Operation within designated operational band                                       | 2          | 2                  | passed |
| General field strength emissions + restricted bands | Cabinet + Inter-connecting cables (radiated) | §15.247 (d)<br>§15.205<br>§15.209 | RSS-210 Issue 8, Chapter 2.5<br>RSS-Gen: Issue 3: §7.2.5 Table 3+5+6 | Emissions in restricted bands must meet the general field-strength radiated limits | 3 + 4      | 1                  | passed |

|                |                                              |                             |                                          |                                                                         |       |     |            |
|----------------|----------------------------------------------|-----------------------------|------------------------------------------|-------------------------------------------------------------------------|-------|-----|------------|
| AC-Power Lines | AC-Power lines                               | §15.207                     | RSS-Gen, Issue 3: Chapter 7.2.4, Table 4 | FCC §15.107 class B limits §15.207 limits<br>IC: Table 4, Chapter 7.2.4 | N/A   | N/A | remark 1.) |
| RX Mode        |                                              |                             |                                          |                                                                         |       |     |            |
| RECEIVER       | Cabinet + Inter-connecting cables (radiated) | §15.109<br>§15.33<br>§15.35 | RSS-Gen, Issue 3: Chapter 6.1            | FCC 15.109 class B limits<br>IC-limits: Table 2                         | 5 + 6 | 3   | passed     |

Remark: 1.) N/A : not applicable, EUT only DC powered.

**ATTESTATION:**

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All requirements as shown in above table are met in accordance with enumerated standards.

The current version of the test report 6-0196-12-1-2b-C1, dated 15.09.2014 replaces the test report 6-0196-12-1-2b dated 2012-09-17. The substituted report is declared invalid herewith.

D. Franke  
Responsible for test section

GmbH  
Im Teichbruch 116  
45819 Essen  
Tel: +49 (0) 20 64 7 87 19-49  
Fax: +49 (0) 20 64 7 87 19-1327

Dipl.-Ing. Christian Lorenz  
Responsible for test report

## 2. Administrative Data

### 2.1. Identification of the testing laboratory

|                                     |                                                      |
|-------------------------------------|------------------------------------------------------|
| Company name:                       | CETECOM GmbH                                         |
| Address:                            | Im Teelbruch 116<br>45219 Essen - Kettwig<br>Germany |
| Responsible for testing laboratory: | Dipl.-Ing. Niels Jeß                                 |
| Deputy:                             | Dipl.-Ing. Rachid Acharkaoui                         |

### 2.2. Test location

#### 2.2.1. Test laboratory “CTC”

|               |                                                           |
|---------------|-----------------------------------------------------------|
| Company name: | see chapter 2.1. Identification of the testing laboratory |
|---------------|-----------------------------------------------------------|

### 2.3. Organizational items

|                                             |                                               |
|---------------------------------------------|-----------------------------------------------|
| Responsible for test report project leader: | Dipl.-Ing. C. Lorenz<br>Dipl.-Ing. B. Taslica |
| Receipt of EUT:                             | April 2012                                    |
| Date(s) of test:                            | April 2012 – August 2012 (see diagrams)       |
| Date of report:                             | 2012-09-17                                    |
| -----                                       |                                               |
| Version of template:                        | 12.08                                         |

### 2.4. Applicant’s details

|                   |                                                     |
|-------------------|-----------------------------------------------------|
| Applicant’s name: | Miele & Cie. KG                                     |
| Address:          | Carl-Miele-Straße<br>33332 Gütersloh<br><br>Germany |
| Contact person:   | Mr. Gunnar Borgelt                                  |

### 2.5. Manufacturer’s details

|                      |                                |
|----------------------|--------------------------------|
| Manufacturer’s name: | please see Applicant's details |
| Address:             | please see Applicant's details |

### 3. Equipment under test (EUT)

#### 3.1. Technical data of main EUT declared by applicant

|                                                        |                                                                                                                                                                              |                                                    |                                                                        |
|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|------------------------------------------------------------------------|
| Main function                                          | Communication unit for household appliances with integrated IEEE 802.15.4 ZigBee technology                                                                                  |                                                    |                                                                        |
| Type                                                   | EI 7800                                                                                                                                                                      |                                                    |                                                                        |
| Frequency range and channels (US/Canada -bands)        | 2405 MHz (Channel 11) to 2480 MHz (Channel 26)                                                                                                                               |                                                    |                                                                        |
| Type of modulation (packet types)                      | QPSK                                                                                                                                                                         |                                                    |                                                                        |
| Number of channels (USA/Canada -bands)                 | 1 to 16                                                                                                                                                                      |                                                    |                                                                        |
| EMISSION DESIGNATOR(S)                                 | 2M62G1D                                                                                                                                                                      |                                                    |                                                                        |
| Antenna Type                                           | <input checked="" type="checkbox"/> Integrated<br><input type="checkbox"/> External, no RF- connector<br><input type="checkbox"/> External, separate RF-connector            |                                                    |                                                                        |
| Antenna Gain                                           | 2 dBi average according applicants information in 2.4GHz band                                                                                                                |                                                    |                                                                        |
| MAX Field strength (radiated):                         | 102.3 dB $\mu$ V/m@3m distance on nominal 2.405 GHz (PK)<br>97.3 dB $\mu$ V/m@3m distance on nominal 2.405 GHz (AV)<br>(measured as electrical field strength with RBW=1MHz) |                                                    |                                                                        |
| MAX PEAK Output Power: (conducted)                     | 2.4 mW on nominal 2405 MHz                                                                                                                                                   |                                                    |                                                                        |
| FCC-ID                                                 | 2ACUWEI7800                                                                                                                                                                  |                                                    |                                                                        |
| IC                                                     | 5669C-EI7800                                                                                                                                                                 |                                                    |                                                                        |
| Installed options (not tested within this test report) | <input checked="" type="checkbox"/> no other technology installed                                                                                                            |                                                    |                                                                        |
| Power supply                                           | <input checked="" type="checkbox"/> Range 4.8 V to 5.2 V, nominal Uart = 5.0 V DC<br><input checked="" type="checkbox"/> over DC                                             |                                                    |                                                                        |
| Special EMI components                                 | --                                                                                                                                                                           |                                                    |                                                                        |
| EUT sample type                                        | <input type="checkbox"/> Production                                                                                                                                          | <input checked="" type="checkbox"/> Pre-Production | <input type="checkbox"/> Engineering                                   |
| Firmware                                               | <input type="checkbox"/> for normal use                                                                                                                                      |                                                    | <input checked="" type="checkbox"/> Special version for test execution |
| FCC label attached                                     | <input type="checkbox"/> yes                                                                                                                                                 | <input checked="" type="checkbox"/> no             |                                                                        |

### 3.2. EUT: Type, S/N etc. and short descriptions used in this test report

| Short description*) | EUT                                         | Type    | S/N serial number                        | HW hardware status               | SW software status |
|---------------------|---------------------------------------------|---------|------------------------------------------|----------------------------------|--------------------|
| EUT A               | Communication unit for household appliances | EI 7800 | # 12/14/17<br>(Low/Middle/High channels) | 08052012<br>(TX unit, conducted) | 1.0                |
| EUT B               | Communication unit for household appliances | EI 7800 | # 3/4/5<br>(Low/Middle/High channels)    | 05032012<br>(TX unit, conducted) | 1.0                |
| EUT C               | Communication unit for household appliances | EI 7800 | # 2/5/7<br>(Low/Middle/High channels)    | 05032012<br>(TX unit, radiated)  | 1.0                |
| EUT D               | Communication unit for household appliances | EI 7800 | # 9/15<br>(Middle/High channels)         | 05032012<br>(TX unit, radiated)  | 1.0                |
| EUT E               | Communication unit for household appliances | EI 7800 | # 11                                     | 08052012<br>(RX unit)            | 1.0                |
| EUT F               | Communication unit for household appliances | EI 7800 | # 14                                     | 08052012<br>(RX unit)            | 1.0                |

\*) EUT short description is used to simplify the identification of the EUT in this test report.

### 3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

| AE short description *) | Auxiliary Equipment            | Type          | S/N serial number | HW hardware status | SW software status |
|-------------------------|--------------------------------|---------------|-------------------|--------------------|--------------------|
| AE 1                    | USB to U <sub>art</sub> dongle | B75937        | --                | CP2101             | --                 |
| AE 2                    | Notebook Dell                  | Latitude 2120 | CTC062011         | --                 | Windows 7          |
| AE3                     | Housing for EUT                | --            | --                | --                 | --                 |

\*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

### 3.4. EUT set-ups

| EUT set-up no. *) | Combination of EUT and AE    | Remarks                                                                                                                                           |
|-------------------|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Set. 1            | EUT A + AE 1+ AE 2           | Set-up for conducted RF-TX EMI measurements                                                                                                       |
| Set. 2            | EUT B + AE 1 + AE 2          | Set-up for conducted RF-TX EMI measurements                                                                                                       |
| Set. 3            | EUT C + AE 3 (+ AE 1 + AE 2) | Set-up for radiated measurements: after establishing a RF-communication, the PC is disconnected and removed from set-up due PC unwanted emissions |
| Set. 4            | EUT D + AE 3 (+ AE 1 + AE 2) | Set-up for radiated measurements: after establishing a RF-communication, the PC is disconnected and removed from set-up due PC unwanted emissions |
| Set. 5            | EUT E + AE 3 (+AE 1 + AE 2)  | Set-up for radiated measurements: after establishing a RF-communication, the PC is disconnected and removed from set-up due PC unwanted emissions |
| Set. 6            | EUT F +AE3 (+ AE 1 + AE 2)   | Set-up for radiated measurements: after establishing a RF-communication, the PC is disconnected and removed from set-up due PC unwanted emissions |

\*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

### 3.5. EUT operating modes

| EUT operating mode no. *) | Description of operating modes        | Additional information                                                                                                                                                                                                                                                                                                                           |
|---------------------------|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| op. 1                     | ZigBee Continuous TX-Mode (modulated) | Pre-programmed Module<br><br>The transmitter (modulated) is set to certain transmission frequency within the operational range and send a modulated carrier (100% duty cycle factor). The EUT could be set to lowest (2405 MHz), middle (2440 MHz) and highest (2480 MHz) possible working frequencies within the assigned operational band.     |
| op. 2                     | ZigBee Continuous TX-Mode (unmod.)    | Pre-programmed Module<br><br>The transmitter (unmodulated) is set to certain transmission frequency within the operational range and send a unmodulated carrier (100% duty cycle factor). The EUT could be set to lowest (2405 MHz), middle (2440 MHz) and highest (2480 MHz) possible working frequencies within the assigned operational band. |
| op. 3                     | ZigBee RX mode                        | Pre-programmed Module<br><br>The EUT E/F is programmed by applicant as receiver mode. The test sample is showing the received packets with a corresponding installed software.<br><br>Ch 15 Middle (2425 MHz)<br><br>Outputs Statistics via UART. RX only if PER_TX absent (=Idle)                                                               |

\*) EUT operating mode no. is used to simplify the test report.



### 3.6. Configuration of cables used for testing

| Cable number | Item                       | Type     | S/N serial number | HW hardware status | Cable length |
|--------------|----------------------------|----------|-------------------|--------------------|--------------|
| Cable 1      | DC connection cable of EUT | shielded | --                | E111235            | 0.3m         |


## 4. Description of test system set-up's

### 4.1. Test system set-up for conducted RF-measurement at antenna port

Specification: ANSI C63.10-2009

General Description: The EUT's RF-signal is first attenuated before it is connected to the spectrum analyzer to avoid overload. The specific attenuation is determined prior to the measurement within a set-up calibration. The value is taken into account by correcting the measurement readings on the spectrum-analyzer either by a transducer factor (TDF) or an relative offset to reference level.

Schematic:

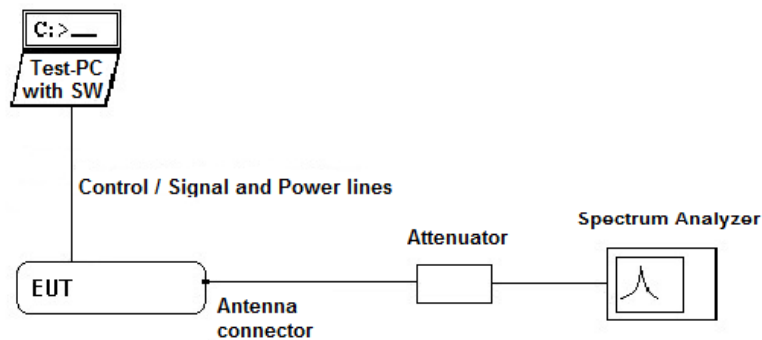

Testing method: According to ANSI C63.10-2009 for each individual test, see details in each chapter.


### 4.2. Test system set-up for radiated magnetic field measurements below 30 MHz

Specification: ANSI C63.4-2009 chapter 8.2.1, ANSI C63.10-2009 chapter 6.4

General Description: Evaluating the radiated field emissions to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter "General Limit - Radiated field strength emissions below 30 MHz". The tests are performed in the semi anechoic room recognized by the regulatory commissions.

Schematic:

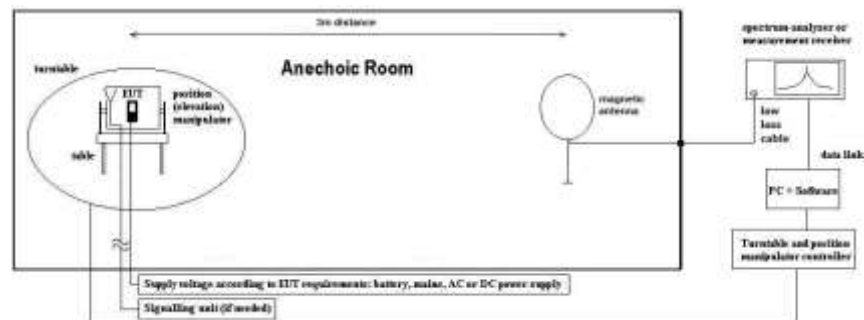

**Testing method:**

**Exploratory, preliminary measurement**

The EUT and it's associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum and it's characteristics was recorded with an EMI-receiver, broadband loop antenna and software.

The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

**Final measurement on critical frequencies**

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C<sub>L</sub> = Cable loss

D<sub>F</sub> = Distance correction factor

E<sub>C</sub> = Electrical field – corrected value

E<sub>R</sub> = Receiver reading

G<sub>A</sub> = Gain of pre-amplifier (if used)

L<sub>T</sub> = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

**Distance correction:**

Reference for applied correction (extrapolating) factors:

IEEE Transaction EMC, Vol. 47, No. 3, Aug. 2005, Journal Paper


“*Extrapolating Near-field emissions of low frequency loop transmitters*”.

### 4.3. Test system set-up for electric field measurement in the range 30 MHz to 1 GHz

**Specification:** ANSI C63.4-2009 chapter 8, ANSI C63.10-2009 chapter 6.5

**General Description:** Evaluating the field emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a NSA-compliant semi anechoic room (SAR) recognized by the regulatory commissions.

**Schematic:**

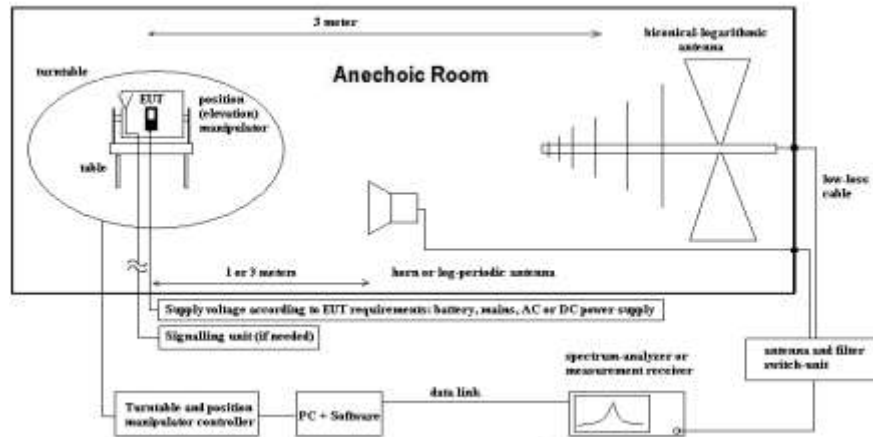

**Testing method:**

**Exploratory, preliminary measurements**

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 90°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1,0 m and 1,82 m. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

**Final measurement on critical frequencies**

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height between 1 m and 4 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

- AF = Antenna factor
- C<sub>L</sub> = Cable loss
- D<sub>F</sub> = Distance correction factor
- E<sub>C</sub> = Electrical field – corrected value
- E<sub>R</sub> = Receiver reading
- G<sub>A</sub> = Gain of pre-amplifier (if used)
- L<sub>T</sub> = Limit
- M = Margin


All units are dB-units, positive margin means value is below limit.

#### 4.4. Test system set-up for electric field measurement above 1 GHz

**Specification:** ANSI C63.4-2009 chapter 8, ANSI C63.10-2009 chapter 6.6

**General Description:** Evaluating the field emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-4 compliant fully anechoic room (FAR) recognized by the regulatory commissions. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 1 meter above 18 GHz. Logarithmic periodic antenna is used for frequency range 1 GHz to 18 GHz, above 18 GHz a horn antenna is used. The antennas are set to fixed antenna height of 1.55 m and the EUT aligned within 3 dB cone of radiation pattern.

**Schematic:**

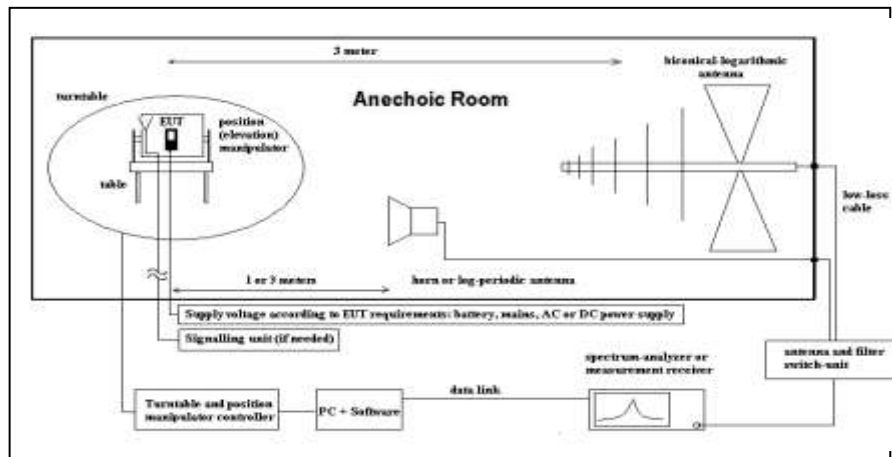

**Testing method:**

**Exploratory, preliminary measurements**

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.55 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 45°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

**Final measurement on critical frequencies**

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height is fixed to 1.55 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

$E_C$  = Electrical field – corrected value

$E_R$  = Receiver reading

$M$  = Margin

$L_T$  = Limit

$AF$  = Antenna factor

$C_L$  = Cable loss

$D_F$  = Distance correction factor

$G_A$  = Gain of pre-amplifier (if used)

All units are dB-units, positive margin means value is below limit.

## 5. Measurements

### 5.1. General Limit - Radiated field strength emissions below 30 MHz

#### 5.1.1. Test location and equipment

|                 |                                                                    |                                             |                                                                                         |                                            |                                                    |                                      |
|-----------------|--------------------------------------------------------------------|---------------------------------------------|-----------------------------------------------------------------------------------------|--------------------------------------------|----------------------------------------------------|--------------------------------------|
| test location   | <input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1) |                                             | <input type="checkbox"/> Please see Chapter. 2.2.2                                      |                                            | <input type="checkbox"/> Please see Chapter. 2.2.3 |                                      |
| test site       | <input checked="" type="checkbox"/> 441 EMI SAR                    | <input type="checkbox"/> 487 SAR NSA        | <input type="checkbox"/> 347 Radio.lab.                                                 |                                            | <input type="checkbox"/>                           | <input type="checkbox"/>             |
| receiver        | <input type="checkbox"/> 377 ESCS30                                | <input checked="" type="checkbox"/> 001 ESS | <input type="checkbox"/>                                                                | <input type="checkbox"/>                   | <input type="checkbox"/>                           | <input type="checkbox"/>             |
| spectr. analys. | <input type="checkbox"/> 584 FSU                                   | <input type="checkbox"/> 120 FSEM           | <input type="checkbox"/> 264 FSEK                                                       | <input type="checkbox"/>                   | <input type="checkbox"/>                           | <input type="checkbox"/>             |
| antenna         | <input type="checkbox"/> 574 BTA-L                                 | <input type="checkbox"/> 133 EMCO3115       | <input type="checkbox"/> 302 BBHA9170                                                   | <input type="checkbox"/> 289 CBL 6141      | <input checked="" type="checkbox"/> 030 HFH-Z2     | <input type="checkbox"/> 477 GPS     |
| signaling       | <input type="checkbox"/> 392 MT8820A                               | <input type="checkbox"/> 436 CMU            | <input type="checkbox"/> 547 CMU                                                        | <input type="checkbox"/> 594 CMW           |                                                    |                                      |
| otherwise       | <input type="checkbox"/> 400 FTC40x15E                             | <input type="checkbox"/> 401 FTC40x15E      | <input type="checkbox"/> 110 USB LWL                                                    | <input type="checkbox"/> 482 Filter Matrix | <input type="checkbox"/> 378 RadiSense             |                                      |
| DC power        | <input checked="" type="checkbox"/> 456 EA 3013A                   | <input type="checkbox"/> 457 EA 3013A       | <input type="checkbox"/> 459 EA 2032-50                                                 | <input type="checkbox"/> 268 EA- 3050      | <input type="checkbox"/> 494 AG6632A               | <input type="checkbox"/> 498 NGPE 40 |
| line voltage    | <input type="checkbox"/> 230 V 50 Hz via public mains              |                                             | <input type="checkbox"/> 060 110 V 60 Hz via PAS 5000 bei Bedarf andere Werte einsetzen |                                            |                                                    |                                      |

#### 5.1.2. Requirements

| FCC             | Part 15, Subpart C, §15.205 & §15.209 |                       |              |                                                           |  |
|-----------------|---------------------------------------|-----------------------|--------------|-----------------------------------------------------------|--|
| IC              | RSS-Gen., Issue 3                     |                       |              |                                                           |  |
| ANSI            | C63.10-2009                           |                       |              |                                                           |  |
| Frequency [MHz] | Field strength limit                  |                       | Distance [m] | Remarks                                                   |  |
|                 | [ $\mu$ V/m]                          | [dB $\mu$ V/m]        |              |                                                           |  |
| 0.009 – 0.490   | 2400/f (kHz)                          | 67.6 – 20Log(f) (kHz) | 300          | Correction factor used due to measurement distance of 3 m |  |
| 0.490 – 1.705   | 24000/f (kHz)                         | 87.6 – 20Log(f) (kHz) | 30           | Correction factor used due to measurement distance of 3 m |  |
| 1.705 – 30      | 30                                    | 29.5                  | 30           | Correction factor used due to measurement distance of 3 m |  |

#### 5.1.3. Test condition and test set-up

|                                   |                                                                                           |                                                                                                                 |                                                                                                                              |
|-----------------------------------|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| link to test system (if used):    | <input checked="" type="checkbox"/> air link                                              | <input type="checkbox"/> cable connection                                                                       | <input type="checkbox"/>                                                                                                     |
| EUT-grounding                     | <input type="checkbox"/> none                                                             | <input checked="" type="checkbox"/> with power supply                                                           | <input type="checkbox"/> additional connection: between potential equalisation connector (EUT) and GND with a lab wire 1,2 m |
| Equipment set up                  | <input checked="" type="checkbox"/> table top                                             |                                                                                                                 | <input type="checkbox"/> floor standing                                                                                      |
| Climatic conditions               | Temperature: (22 $\pm$ 3°C)                                                               |                                                                                                                 | Rel. humidity: (40 $\pm$ 20)%                                                                                                |
| EMI-Receiver or Analyzer Settings | Scan data                                                                                 | <input checked="" type="checkbox"/> 9 kHz – 150 kHz RBW/VBW = 200 Hz                                            | Scan step = 80 Hz                                                                                                            |
|                                   |                                                                                           | <input checked="" type="checkbox"/> 150 kHz – 30 MHz RBW/VBW = 9 kHz                                            | Scan step = 4 kHz                                                                                                            |
|                                   | Scan-Mode                                                                                 | <input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3 dB Spectrum analyser Mode |                                                                                                                              |
|                                   | Detector Mode:                                                                            | Peak (pre-measurement) and Quasi-PK/Average (final if applicable)                                               |                                                                                                                              |
|                                   | Sweep-Time                                                                                | Repetitive-Scan, max-hold                                                                                       |                                                                                                                              |
| General measurement procedures    | Please see chapter "Test system set-up radiated magnetic field measurements below 30 MHz" |                                                                                                                 |                                                                                                                              |

#### 5.1.4. Measurement Results

The results are presented below in summary form only. For more information please see the diagrams.

Table of measurement results:

| Diagram No. | Carrier Channel |     | Frequency range | Set-up no. | OP-mode no. | Remark | Used detector                       |                          |                          | Result |
|-------------|-----------------|-----|-----------------|------------|-------------|--------|-------------------------------------|--------------------------|--------------------------|--------|
|             | Range           | No. |                 |            |             |        | PK                                  | AV                       | QP                       |        |
| 2.01        | Low             | 11  | 9 kHz-30 MHz    | 3          | 1           | --     | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | passed |
| 2.02        | Middle          | 18  | 9 kHz-30 MHz    |            |             | --     | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | passed |
| 2.03        | High            | 26  | 9 kHz-30 MHz    |            |             | --     | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | passed |



**5.1.5. Correction factors due to reduced meas. distance (f< 30 MHz)**

The used correction factors when the measurement distance is reduced, are taken from IEEC Transaction EMC, Vol 47, No.3, Aug. 2005, Journal Paper "EXTRAPOLATING NEAR-FIELD EMISSIONS OF LOW-FREQUENCY LOOP TRANSMITTERS".

| Used Transducer factors (f < 30 MHz) |                |                  |           |            |                   |
|--------------------------------------|----------------|------------------|-----------|------------|-------------------|
| 1                                    | 2              | 3                | 4         | 5          | 6                 |
|                                      |                |                  |           |            | =2+3+4+5          |
| Frequency                            | Antenna factor | Corection factor |           | Cable loss | Transducer factor |
|                                      |                | 300m to 3m       | 30m to 3m |            |                   |
| kHz                                  | dB µV/m        | dB               | dB        | dB         | dB µV/m           |
| 9,0                                  | 20,0           | -116,7           |           | 0,0        | -96,7             |
| 10,6                                 | 20,0           | -116,7           |           | 0,0        | -96,7             |
| 12,6                                 | 20,0           | -116,7           |           | 0,0        | -96,7             |
| 14,8                                 | 20,0           | -116,7           |           | 0,0        | -96,7             |
| 17,5                                 | 20,0           | -116,6           |           | 0,0        | -96,6             |
| 20,7                                 | 20,0           | -116,6           |           | 0,0        | -96,6             |
| 24,4                                 | 20,0           | -116,6           |           | 0,0        | -96,6             |
| 28,9                                 | 20,0           | -116,6           |           | 0,0        | -96,6             |
| 34,1                                 | 20,0           | -116,5           |           | 0,0        | -96,5             |
| 40,3                                 | 20,0           | -116,4           |           | 0,0        | -96,4             |
| 47,6                                 | 20,0           | -116,3           |           | 0,0        | -96,3             |
| 56,2                                 | 20,0           | -116,2           |           | 0,0        | -96,2             |
| 66,4                                 | 20,0           | -116,0           |           | 0,0        | -96,0             |
| 78,4                                 | 20,0           | -115,8           |           | 0,0        | -95,8             |
| 92,7                                 | 20,0           | -115,4           |           | 0,0        | -95,4             |
| 109,4                                | 20,0           | -115,0           |           | 0,0        | -95,0             |
| 129,3                                | 20,0           | -114,5           |           | 0,0        | -94,5             |
| 152,7                                | 20,0           | -113,9           |           | 0,0        | -93,9             |
| 180,4                                | 20,0           | -113,1           |           | 0,0        | -93,1             |
| 213,1                                | 20,0           | -112,2           |           | 0,0        | -92,2             |
| 251,7                                | 20,0           | -111,3           |           | 0,0        | -91,3             |
| 297,3                                | 20,0           | -108,3           |           | 0,0        | -88,3             |
| 351,2                                | 20,0           | -105,2           |           | 0,0        | -85,2             |
| 414,8                                | 20,0           | -102,1           |           | 0,0        | -82,1             |
| 490,0                                | 20,0           | -99,1            |           | 0,0        | -79,1             |
| 490,0                                | 20,0           |                  | -56,4     | 0,1        | -36,3             |
| 582,0                                | 20,0           |                  | -56,2     | 0,1        | -36,1             |
| 690,0                                | 20,0           |                  | -56,0     | 0,2        | -35,8             |
| 820,0                                | 20,0           |                  | -55,7     | 0,2        | -35,5             |
| 973,0                                | 20,0           |                  | -55,4     | 0,2        | -35,2             |
| 1.155,0                              | 20,0           |                  | -54,9     | 0,3        | -34,6             |
| 1.371,0                              | 20,0           |                  | -54,4     | 0,3        | -34,1             |
| 1.627,0                              | 20,0           |                  | -53,7     | 0,3        | -33,4             |
| 1.931,0                              | 20,0           |                  | -52,9     | 0,4        | -32,5             |
| 2.292,0                              | 20,0           |                  | -52,0     | 0,4        | -31,6             |
| 2.721,0                              | 20,0           |                  | -49,8     | 0,5        | -29,3             |
| 3.230,0                              | 20,0           |                  | -46,6     | 0,5        | -26,1             |
| 3.834,0                              | 20,0           |                  | -43,3     | 0,6        | -22,7             |
| 4.551,0                              | 20,0           |                  | -40,1     | 0,6        | -19,5             |
| 5.402,0                              | 20,0           |                  | -36,8     | 0,7        | -16,1             |
| 6.412,0                              | 20,0           |                  | -33,5     | 0,7        | -12,8             |
| 7.612,0                              | 20,0           |                  | -30,3     | 0,8        | -9,5              |
| 9.035,0                              | 20,0           |                  | -27,0     | 0,8        | -6,2              |
| 10.725,0                             | 20,0           |                  | -23,9     | 0,9        | -3,0              |
| 12.730,0                             | 20,0           |                  | -21,2     | 0,9        | -0,3              |
| 15.111,0                             | 20,0           |                  | -19,3     | 1,0        | 1,7               |
| 17.937,0                             | 20,0           |                  | -18,4     | 1,0        | 2,6               |
| 21.292,0                             | 20,0           |                  | -18,2     | 1,1        | 2,9               |
| 25.274,0                             | 20,0           |                  | -18,3     | 1,1        | 2,8               |
| 30.000,0                             | 20,0           |                  | -18,4     | 1,2        | 2,8               |

## 5.2. General Limit - Radiated field strength emissions, 30 MHz - 1 GHz

### 5.2.1. TEST LOCATION AND EQUIPMENT

|                 |                                                                                                 |                                                                                            |                                                                        |
|-----------------|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| test location   | <input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)                              | <input type="checkbox"/> Please see Chapter. 2.2.2                                         | <input type="checkbox"/> Please see Chapter. 2.2.3                     |
| test site       | <input checked="" type="checkbox"/> 441 EMI SAR <input checked="" type="checkbox"/> 487 SAR NSA |                                                                                            |                                                                        |
| receiver        | <input type="checkbox"/> 377 ESCS30 <input checked="" type="checkbox"/> 001 ESS                 | <input type="checkbox"/> 489 ESU 40 <input type="checkbox"/> 620 ESU 26                    |                                                                        |
| spectr. analys. | <input type="checkbox"/> 584 FSU <input type="checkbox"/> 120 FSEM                              | <input type="checkbox"/> 264 FSEK                                                          |                                                                        |
| antenna         | <input checked="" type="checkbox"/> 574 BTA-L <input type="checkbox"/> 133 EMCO3115             | <input type="checkbox"/> 302 BBHA9170 <input type="checkbox"/> 289 CBL 6141                | <input type="checkbox"/> 030 HFH-Z2 <input type="checkbox"/> 477 GPS   |
| signaling       | <input type="checkbox"/> 392 MT8820A <input type="checkbox"/> 436 CMU                           | <input type="checkbox"/> 547 CMU <input type="checkbox"/> 594 CMW                          |                                                                        |
| otherwise       | <input type="checkbox"/> 400 FTC40x15E <input type="checkbox"/> 401 FTC40x15E                   | <input type="checkbox"/> 110 USB LWL <input checked="" type="checkbox"/> 482 Filter Matrix |                                                                        |
| DC power        | <input checked="" type="checkbox"/> 456 EA 3013A <input type="checkbox"/> 457 EA 3013A          | <input type="checkbox"/> 459 EA 2032-50 <input type="checkbox"/> 268 EA- 3050              | <input type="checkbox"/> 494 AG6632A <input type="checkbox"/> 498 NGPE |
| line voltage    | <input type="checkbox"/> 230 V 50 Hz via public mains                                           | <input type="checkbox"/> 060 110 V 60 Hz via PAS 5000                                      |                                                                        |

### 5.2.2. Requirements/Limits

|              |                 |                                                                                                                                                                            |                                         |
|--------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| <b>FCC</b>   |                 | <input checked="" type="checkbox"/> Part 15 Subpart B, §15.109, class B<br><input checked="" type="checkbox"/> Part 15 Subpart C, §15.209 @ frequencies defined in §15.205 |                                         |
| <b>IC</b>    |                 | RSS-Gen., Issue 3                                                                                                                                                          |                                         |
| <b>ANSI</b>  |                 | <input checked="" type="checkbox"/> C63.4-2009 for RX-Mode<br><input checked="" type="checkbox"/> C63.10-2009 for TX-mode                                                  |                                         |
| <b>Limit</b> | Frequency [MHz] | Radiated emissions limits, Class B, 3 meters                                                                                                                               |                                         |
|              |                 | QUASI Peak [ $\mu\text{V/m}$ ]                                                                                                                                             | QUASI-Peak [ $\text{dB}\mu\text{V/m}$ ] |
|              | 30 - 88         | 100                                                                                                                                                                        | 40.0                                    |
|              | 88 - 216        | 150                                                                                                                                                                        | 43.5                                    |
|              | 216 - 960       | 200                                                                                                                                                                        | 46.0                                    |
|              | above 960       | 500                                                                                                                                                                        | 54.0                                    |

### 5.2.3. Restricted bands of operation, §15.205

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 0.495-0.505       | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.20725-4.20775   | 37.5-38.25          | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 73-74.6             | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 74.8-75.2           | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 108-121.94          | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 123-138             | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 149.9-150.05        | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.52475-156.52525 | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 156.7-156.9         | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 162.0125-167.17     | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 167.72-173.2        | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 240-285             | 3600-4400     | --          |
| 13.36-13.41       | 322-335.4           | --            | --          |

Remark: only spurious emissions are allowed within these frequency bands not exceeding the limits per §15.209

### 5.2.4. Test condition and measurement test set-up

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| link to test system (if used):   | <input checked="" type="checkbox"/> air link <input type="checkbox"/> cable connection                                                                                                                                                                                                                                                                                                                                                          |
| EUT-grounding                    | <input type="checkbox"/> none <input checked="" type="checkbox"/> with power supply <input type="checkbox"/> additional connection                                                                                                                                                                                                                                                                                                              |
| Equipment set up                 | <input checked="" type="checkbox"/> table top 0.8m height <input type="checkbox"/> floor standing                                                                                                                                                                                                                                                                                                                                               |
| Climatic conditions              | Temperature: (22±3°C) Rel. humidity: (40±20)%                                                                                                                                                                                                                                                                                                                                                                                                   |
| EMI-Receiver (Analyzer) Settings | Scan frequency range: <input checked="" type="checkbox"/> 30 – 1000 MHz <input type="checkbox"/> other:<br><input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3 dB spectrum analyser mode<br>Peak / Quasi-peak<br>100 kHz/300 kHz<br>Mode: Repetitive-Scan, max-hold<br>Scan step: 80 kHz<br>Sweep-Time: Coupled – calibrated display if continuous tx-signal otherwise adapted to EUT's individual duty-cycle |
| General measurement procedures   | Please see chapter "Test system set-up for radiated measurements"                                                                                                                                                                                                                                                                                                                                                                               |



**5.2.5. MEASUREMENT RESULTS: TX-MODE**

The results are presented below in summary form only. For more information please see diagrams.

Table of measurement results:

| Diagram no. | Carrier Channel |     | Frequency range | Set-up no. | OP-mode no. | Remark | Used detector                       |                          |                                     | Result |
|-------------|-----------------|-----|-----------------|------------|-------------|--------|-------------------------------------|--------------------------|-------------------------------------|--------|
|             | Range           | No. |                 |            |             |        | PK                                  | AV                       | QP                                  |        |
| 3.01        | Low             | 11  | 30 MHz..1 GHz   | 3          | 1           | --     | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | passed |
| 3.02        | Mid.            | 18  |                 |            |             |        | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | passed |
| 3.03        | High            | 26  |                 |            |             |        | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | passed |

Remark: --

**5.2.6. MEASUREMENT RESULTS RX-MODE**

The results are presented below in summary form only. For more information please see diagrams.

| Diagram no. | Frequency range | Set-up no. | OP-mode no. | Remark | Used detector                       |                          |                          | Result |
|-------------|-----------------|------------|-------------|--------|-------------------------------------|--------------------------|--------------------------|--------|
|             |                 |            |             |        | PK                                  | AV                       | QP                       |        |
| 3.04        | 30 MHz..1 GHz   | 5          | 3           | --     | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | passed |

Remark: --

### 5.3. General Limit - Radiated emissions, above 1 GHz

#### 5.3.1. Test location and equipment

|                 |                                                       |                                                |                                                       |                                                |                                          |                                  |
|-----------------|-------------------------------------------------------|------------------------------------------------|-------------------------------------------------------|------------------------------------------------|------------------------------------------|----------------------------------|
| test site       | <input type="checkbox"/> 441 EMI SAR                  | <input type="checkbox"/> 348 EMI cond.         | <input checked="" type="checkbox"/> 443 EMI FAR       | <input type="checkbox"/> 347 Radio.lab.        | <input type="checkbox"/> 337 OATS        | <input type="checkbox"/>         |
| equipment       | <input type="checkbox"/> 331 HC 4055                  | <input type="checkbox"/>                       | <input type="checkbox"/>                              | <input type="checkbox"/>                       | <input type="checkbox"/>                 | <input type="checkbox"/>         |
| spectr. analys. | <input type="checkbox"/> 584 FSU                      | <input type="checkbox"/> 120 FSEM              | <input type="checkbox"/> 264 FSEK                     | <input checked="" type="checkbox"/> 489 ESU 40 | <input type="checkbox"/>                 | <input type="checkbox"/>         |
| antenna meas    | <input type="checkbox"/> 574 BTA-L                    | <input type="checkbox"/> 289 CBL 6141          | <input checked="" type="checkbox"/> 608 HL 562        | <input checked="" type="checkbox"/> 549 HL025  | <input type="checkbox"/> 302 BBHA9170    | <input type="checkbox"/> 477 GPS |
| antenna meas    | <input type="checkbox"/> 123 HUF-Z2                   | <input type="checkbox"/> 132 HUF-Z3            | <input type="checkbox"/> 030 HFH-Z2                   | <input type="checkbox"/>                       | <input type="checkbox"/>                 | <input type="checkbox"/>         |
| antenna subst   | <input type="checkbox"/> 071 HUF-Z2                   | <input type="checkbox"/> 020 EMCO3115          | <input type="checkbox"/> 063 LP 3146                  | <input type="checkbox"/> 303 BBHA9170          | <input type="checkbox"/>                 | <input type="checkbox"/>         |
| power meter     | <input type="checkbox"/> 009 NRV                      | <input type="checkbox"/> 010 URV5-Z2           | <input type="checkbox"/> 011 URV5-Z2                  | <input type="checkbox"/>                       | <input type="checkbox"/>                 | <input type="checkbox"/>         |
| signalgener.    | <input type="checkbox"/> 008 SMG                      | <input type="checkbox"/> 140 SMHU              | <input type="checkbox"/> 263 SMP04                    | <input type="checkbox"/>                       | <input type="checkbox"/>                 | <input type="checkbox"/>         |
| power meter     | <input type="checkbox"/> 262 NRV-S                    | <input type="checkbox"/> 266 NRV-Z31           | <input type="checkbox"/> 265 NRV-Z33                  | <input type="checkbox"/> 261 NRV-Z55           | <input type="checkbox"/> 356 NRV-Z1      | <input type="checkbox"/>         |
| multimeter      | <input checked="" type="checkbox"/> 341 Fluke 112     | <input type="checkbox"/>                       | <input type="checkbox"/>                              | <input type="checkbox"/>                       | <input type="checkbox"/>                 | <input type="checkbox"/>         |
| signaling       | <input type="checkbox"/> 392 MT8820A                  | <input type="checkbox"/> 436 CMU               | <input type="checkbox"/> 547 CMU                      | <input type="checkbox"/> 594 CMW               |                                          |                                  |
| DCpower         | <input type="checkbox"/> 086 LNG50-10                 | <input checked="" type="checkbox"/> 087 EA3013 | <input type="checkbox"/> 354 NGPE 40                  | <input type="checkbox"/> 349 car battery       | <input type="checkbox"/> 350 Car battery | <input type="checkbox"/>         |
| line voltage    | <input type="checkbox"/> 230 V 50 Hz via public mains |                                                | <input type="checkbox"/> 060 110 V 60 Hz via PAS 5000 |                                                |                                          |                                  |

#### 5.3.2. Requirements/Limits

|                 |                                                                                                                                                                           |                |                |                  |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------|------------------|
| FCC             | <input checked="" type="checkbox"/> Part 15 Subpart B, §15.109 class B<br><input checked="" type="checkbox"/> Part 15 subpart C, §15.209 @ frequencies defined in §15.205 |                |                |                  |
| IC              | RSS-Gen., Issue 3                                                                                                                                                         |                |                |                  |
| ANSI            | <input checked="" type="checkbox"/> C63.4-2009 for RX-Mode<br><input checked="" type="checkbox"/> C63.10-2009 for TX-mode                                                 |                |                |                  |
| Frequency [MHz] | Limits                                                                                                                                                                    |                |                |                  |
|                 | AV<br>[µV/m]                                                                                                                                                              | AV<br>[dBµV/m] | Peak<br>[µV/m] | Peak<br>[dBµV/m] |
| above 1 GHz     | 500                                                                                                                                                                       | 54.0           | 5000           | 74.0             |

#### 5.3.3. Test condition and measurement test set-up

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                       |                                                |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|------------------------------------------------|
| link to test system (if used): | <input checked="" type="checkbox"/> air link                                                                                                                                                                                                                                                                                                                                                                                                                                            | <input type="checkbox"/> cable connection             |                                                |
| EUT-grounding                  | <input type="checkbox"/> none                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <input checked="" type="checkbox"/> with power supply | <input type="checkbox"/> additional connection |
| Equipment set up               | <input checked="" type="checkbox"/> table top 1.5m height                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                       | <input type="checkbox"/> floor standing        |
| Climatic conditions            | Temperature: (22±3°C)                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                       | Rel. humidity: (40±20)%                        |
| Spectrum-Analyzer settings     | Scan frequency range: <input checked="" type="checkbox"/> 1 – 18 GHz <input checked="" type="checkbox"/> 18 – 25 GHz <input type="checkbox"/> 18 – 40 GHz <input type="checkbox"/> other:<br><input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3 dB Spectrum analyser Mode<br>Peak and Average<br>1 MHz / 3 MHz<br>Repetitive-Scan, max-hold<br>400 kHz<br>Coupled – calibrated display if CW signal otherwise adapted to EUT’s individual duty-cycle |                                                       |                                                |
| General measurement procedures | Please see chapter “Test system set-up for radiated measurements”                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                       |                                                |

**5.3.4. Measurement Results TX-Mode:**

The results are presented below in summary form only. For more information please see diagrams.

Table of measurement results:

| Diagram no. | Carrier Channel |     | Frequency range | Set-up no. | OP-mode no. | Remark           | Used detector                       |                                     |                          | Result |
|-------------|-----------------|-----|-----------------|------------|-------------|------------------|-------------------------------------|-------------------------------------|--------------------------|--------|
|             | Range           | No. |                 |            |             |                  | PK                                  | AV                                  | QP                       |        |
| 4.01        | Low             | 11  | 1 .. 18 GHz     | 3          | 1           | --               | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | passed |
| 4.02        | Mid.            | 18  |                 |            |             |                  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | passed |
| 4.03        | High            | 26  |                 |            |             |                  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | passed |
| 4.04        | Low             | 11  | 18 .. 25 GHz    | 3          | 1           | Only noise-floor | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | passed |
| 4.05        | Mid.            | 18  |                 |            |             |                  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | passed |
| 4.06        | High            | 26  |                 |            |             |                  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | passed |

Remark: --

**5.3.5. Measurement Results RX-Mode:**

The results are presented below in summary form only. For more information please see diagrams.

| Diagram no. | Frequency range | Set-up no. | OP-mode no. | Remark | Used detector                       |                                     |                          | Result |
|-------------|-----------------|------------|-------------|--------|-------------------------------------|-------------------------------------|--------------------------|--------|
|             |                 |            |             |        | PK                                  | AV                                  | QP                       |        |
| 4.07        | 1 .. 10 GHz     | 6          | 3           | --     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | passed |

Remark: --

### 5.4. RF Parameter - Band-Edge compliance measurements

#### 5.4.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

|                 |                                                                    |                                                             |                                                    |
|-----------------|--------------------------------------------------------------------|-------------------------------------------------------------|----------------------------------------------------|
| test location   | <input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1) | <input checked="" type="checkbox"/> 443 System CTC-FAR-EMI- | <input type="checkbox"/> Please see Chapter. 2.2.3 |
| test site       | <input type="checkbox"/> 441 EMI SAR                               | <input type="checkbox"/> 487 SAR NSA                        | <input type="checkbox"/> 337 OATS                  |
| receiver        | <input type="checkbox"/> 377 ESCS30                                | <input type="checkbox"/> 001 ESS                            | <input type="checkbox"/> 347 Radio.lab.            |
| spectr. analys. | <input type="checkbox"/> 264 FSEK                                  | <input type="checkbox"/> 120 FSEM                           | <input checked="" type="checkbox"/> 489 ESU        |
| power supply    | <input type="checkbox"/> 456 EA 3013A                              | <input type="checkbox"/> 457 EA 3013A                       | <input type="checkbox"/> 620 ESU 26                |
| otherwise       | <input checked="" type="checkbox"/> 530 10 dB Attenuator           | <input type="checkbox"/> 264 FSEK                           | <input type="checkbox"/> 494 AG6632A               |
|                 |                                                                    | <input checked="" type="checkbox"/> cable K4                | <input checked="" type="checkbox"/> 498 NGPE 40    |

#### 5.4.2. Reference

|      |                                                                                                 |
|------|-------------------------------------------------------------------------------------------------|
| FCC  | <input checked="" type="checkbox"/> §15.247(d) , §15.209(a) @ frequencies defined in §15.205(a) |
| IC   | <input checked="" type="checkbox"/> RSS-Gen, Issue 3(7.2.2.)                                    |
| ANSI | <input checked="" type="checkbox"/> C63.10-2009(6.9)                                            |

#### 5.4.3. Measurement method

A Delta marker method was used for showing compliance to restricted bands according §15.205. The method is according Public Notice “Marker-Delta method”, Extract from ANSI-C63.10:2009. The method consists of three independent steps:

- Step:** Prior to the measurement the fundamental radiated In-Band field strength was performed. The determined value is used as reference value.
- Step:** Second step consist of finding the relative attenuation between the fundamental emission and the maximum local out-of-band emission (within 2 MHz range around the band edge either on the band-edge directly or some modulation product if the level is greater than that on the band-edge) when measured with lower resolution bandwidth.
- Step:** The delta value recorded in step 2 will be subtracted from value recorded in step 1, thus giving the required field strength at the band-edge. This value must fulfil the requirements for radiated spurious emissions in restricted bands in §15.205 with the general limits of §15.209.

#### 5.4.4. EUT settings:

The EUT was instructed to send with maximum power (if adjustable) according to applicants instructions.

#### 5.4.5. RESULTS

| Set-up: 1 & 4<br>Op. Mode. 1 |                  |                                 |                                     |                                                 |                    |           |         |
|------------------------------|------------------|---------------------------------|-------------------------------------|-------------------------------------------------|--------------------|-----------|---------|
| Tnom= 21°C<br>Vnom= 5.0 V    |                  | Delta Marker Value              | Fundamental field strength-radiated | Subtraction: Fund. field strength – Delta value | Value at Band-Edge | Limit     | Verdict |
| Diagram No.                  | Channel No.      |                                 |                                     |                                                 |                    |           |         |
|                              |                  | [dB]                            | [dBµV/m]                            | [dBc]                                           | [dBµV/m]           |           |         |
| 4.01_BE / 4.01_EIRP          | Channel Low= 11  | 99.01(PK_h) – 48.21(PK_l)= 50.8 | 102.3 (PK) 97.3 (AV)                | 102.3-50.8 = 51.5                               | --                 | >20dBc    | Passed  |
| 4.03_BE / 4.03_EIRP          | Channel High= 26 | 85.6 (PK_h) – 44.3(PK_l)= 41.3  | 92.8 (PK) - 41.3dB = 51.5           | --                                              | 51.5 (PK)          | 74 dBµV/m | Passed  |
|                              |                  |                                 | 89.3 (AV) - 41.3 = 48.0             | --                                              | 48.0 (AV)          | 54 dBµV/m | Passed  |

#### 5.4.6. Test results: Passed

## 5.5. RF Parameter – Power Radiated - E.I.R.P.

### 5.5.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

|                 |                                               |                                                |                                                 |                                          |                                          |                                  |
|-----------------|-----------------------------------------------|------------------------------------------------|-------------------------------------------------|------------------------------------------|------------------------------------------|----------------------------------|
| test site       | <input type="checkbox"/> 441 EMI SAR          | <input type="checkbox"/> 348 EMI cond.         | <input checked="" type="checkbox"/> 443 EMI FAR | <input type="checkbox"/> 347 Radio.lab.  | <input type="checkbox"/> 337 OATS        | <input type="checkbox"/>         |
| Spectr. analys. | <input checked="" type="checkbox"/> 489 ESU   | <input type="checkbox"/> 120 FSEM              | <input type="checkbox"/> 264 FSEK               | <input type="checkbox"/> 620 ESU 26      | <input type="checkbox"/>                 | <input type="checkbox"/>         |
| antenna meas    | <input checked="" type="checkbox"/> 549 HL025 | <input type="checkbox"/> 289 CBL 6141          | <input type="checkbox"/> 439 HL 562             | <input type="checkbox"/> 133 EMCO3115    | <input type="checkbox"/> 302 BBHA9170    | <input type="checkbox"/> 477 GPS |
| DCpower         | <input type="checkbox"/> 086 LNG50-10         | <input checked="" type="checkbox"/> 087 EA3013 | <input type="checkbox"/> 354 NGPE 40            | <input type="checkbox"/> 349 car battery | <input type="checkbox"/> 350 Car battery | <input type="checkbox"/>         |

### 5.5.2. EUT Settings:

For DSSS-systems were three different channels measured.

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.

Different modulation characteristics have been checked, e.g. data rates which EUT can operate.

### 5.5.3. Requirements/Limits

|              |                                                        |
|--------------|--------------------------------------------------------|
| <b>FCC</b>   | <input checked="" type="checkbox"/> §15.247(b)(4)      |
| <b>IC</b>    | <input checked="" type="checkbox"/> RSS-210, Issue 8   |
| <b>ANSI</b>  | <input checked="" type="checkbox"/> C63.10-2009(6.3.1) |
| <b>Limit</b> | 1 Watt (30 dBm) Peak                                   |

**5.5.4. Measurement method:** The method is according ANSI/TIA/EIA-603-C-2004 and consist of two steps.

**First step:** The maximum power was recorded by turning the EUT continuously 360 degree steps, the EUT in horizontal (laying) and vertical (standing) position. Measurements have been performed with the measurement antenna set to horizontal and vertical polarisation. The spectrum analyzer was set to MAX-PEAK Detector, MAX-Hold Mode. The RBW used was bigger or equal than e.g. 6, 20 or 26 -dB bandwidth of the EUT and set to 3 MHz. VBW set to 10 MHz with coupled sweep time. The maximum trace peak value was recorded.

**Second step:** A horn antenna was set instead of the EUT and connected to the signal generator. The level was adjusted such as the same level as in step 1 could be reached. The conducted power delivered to the antenna was measured and the value corrected with the known antenna eirp gain.

**Alternative measurement method:** A field strength measurement was performed in 3m distance to the EUT. General measurement procedures as shown in chapter 5.3 applies therefore. Using transformation formula between field strength and e.i.r.p. power as shown in ANSI63.10: 2009, chapter 7.8.2 is used for conversion. In addition a bandwidth correction factor applied:  $10 * \log(6 \text{ dB BW/RBW}=1 \text{ MHz})$

### 5.5.5. Results: Max. Field Strength measured in 3m distance

| Diagram no.                                                                                                                 | 4.01_EIRP                      | 4.02_EIRP                         | 4.03_EIRP                       |
|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------|-----------------------------------|---------------------------------|
| Set-up no.: 3 & 4<br>Op. Mode: 1                                                                                            | Low channel = 11<br>(2405 MHz) | Middle channel = 18<br>(2440 MHz) | High channel = 26<br>(2480 MHz) |
| Determined field strength [dBμV/m] in 3 m distance with RBW=1 MHz                                                           | 102.3 (PK)<br>97.3 (AV)        | 101.0 (PK)<br>97.2 (AV)           | 92.8 (PK)<br>89.3 (AV)          |
| Value in dBm using conversion formula and assumed numeric Gain=1:<br>$E = \sqrt{\left(\frac{30 * P * G}{d^2}\right)}$ [dBm] | 4.0 (PK)                       | 3.4 (PK)                          | 1.3 (PK)                        |
| Bandwidth correction factor <sup>1.)</sup> [dB]                                                                             | 2.25                           | 1.73                              | 2.28                            |
| e.i.r.p. power [dBm] assumed 0dBi gain                                                                                      | 6.25                           | 5.17                              | 3.62                            |
| Actual declared gain of antenna by applicant [dBi]                                                                          | 2                              |                                   |                                 |
| <b>Final Result e.i.r.p. [dBm]:</b>                                                                                         | <b>8.25</b>                    | <b>7.17</b>                       | <b>5.62</b>                     |

**Remark:** 1.) Please see 6 dB BW results at chapter , RF Parameter - 6 dB and 99% occupied bandwidth<sup>4</sup>

**5.5.6. Verdict:** Passed, Maximum value: 8.25 dBm (antenna gain < 6 dBi)

## 5.6. RF-Parameter - RF Power Conducted

### 5.6.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

|                 |                                                                    |                                                             |                                                    |
|-----------------|--------------------------------------------------------------------|-------------------------------------------------------------|----------------------------------------------------|
| test location   | <input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1) | <input checked="" type="checkbox"/> 443 System CTC-FAR-EMI- | <input type="checkbox"/> Please see Chapter. 2.2.3 |
| test site       | <input type="checkbox"/> 441 EMI SAR                               | <input type="checkbox"/> 487 SAR NSA                        | <input type="checkbox"/> 337 OATS                  |
| receiver        | <input type="checkbox"/> 377 ESCS30                                | <input type="checkbox"/> 001 ESS                            | <input checked="" type="checkbox"/> 347 Radio.lab. |
| spectr. analys. | <input type="checkbox"/> 215 FSU                                   | <input type="checkbox"/> 120 FSEM                           | <input type="checkbox"/> 489 ESU 40                |
| power supply    | <input type="checkbox"/> 456 EA 3013A                              | <input type="checkbox"/> 457 EA 3013A                       | <input type="checkbox"/> 620 ESU 26                |
| otherwise       | <input checked="" type="checkbox"/> 530 10 dB Attenuator           | <input type="checkbox"/> 264 FSEK                           | <input type="checkbox"/> 494 AG6632A               |
|                 |                                                                    | <input checked="" type="checkbox"/> cable K5                | <input checked="" type="checkbox"/> 498 NGPE 40    |

### 5.6.2. Reference:

|              |                                                         |
|--------------|---------------------------------------------------------|
| <b>FCC</b>   | <input checked="" type="checkbox"/> §15.247(b)(3)       |
| <b>IC</b>    | <input checked="" type="checkbox"/> RSS-210, Issue 8    |
| <b>ANSI</b>  | <input checked="" type="checkbox"/> C63.10-2009(6.10.2) |
| <b>Limit</b> | 1 Watt (30 dBm) Peak                                    |

### 5.6.3. Antenna characteristics:

According §15.247(b)(4):

- directional gain < 6 dBi (measured: difference between measured conducted and radiated eirp. power)
- directional gain > 6 dBi (measured / applicant's declaration) -> conducted power reduction necessary

### 5.6.4. EUT settings:

For DSSS-systems were three different channels could be measured.

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions. Different modulation characteristics have been checked, e.g. data rates which EUT can operate.

### 5.6.5. Measurement method:

The measurement was performed in DSSS transmission mode with the carrier set to lowest/middle and highest channel. The power was also checked for different data rates, modulation scheme or packet types if applicable.

### 5.6.6. Settings on Spectrum-Analyzer:

|                            |                                       |
|----------------------------|---------------------------------------|
| Center Frequency           | Nominal channel frequency             |
| Span                       | 150 MHz                               |
| Resolution Bandwidth (RBW) | 10 MHz > 6 dB-Bandwidth of the signal |
| Video Bandwidth (VBW)      | 10 MHz                                |
| Sweep time                 | coupled                               |
| Detector                   | Peak, Max hold mode                   |
| Sweep Mode                 | Repetitive mode                       |

**5.6.7. Conducted measurement: Max. Peak Power**

- Maximum declared antenna gain [isotropical]: 2.0 dBi

**Results**

| Set-up no.: 1<br>&<br>Op-Mode: 1 | MAX PEAK POWER (conducted)                                       |                                   |                                   |                                 |
|----------------------------------|------------------------------------------------------------------|-----------------------------------|-----------------------------------|---------------------------------|
|                                  | Diagram no.                                                      | 10.01                             | 10.02                             | 10.03                           |
|                                  | Channel                                                          | Low channel = 11<br>(2405 MHz)    | Middle channel = 18<br>(2440 MHz) | High channel = 26<br>(2480 MHz) |
|                                  | Ext. Path loss [dB]<br>(10 dB Attenuator +<br>Cable attenuation) | 10.80                             | 10.80                             | 10.80                           |
|                                  | Resulting Peak<br>Power                                          | <b>3.81 dBm</b><br><b>2.40 mW</b> | 3.46 dBm<br>2.22 mW               | -2.14 dBm<br>0.61 mW            |
| Limit                            | 1 Watt (30 dBm) Peak                                             |                                   |                                   |                                 |

**Remark:** The results were taken directly from the spectrum analyzer display, the path loss and attenuators were included as reference level offset in the spectrum analyzer. Please refer the diagrams at annex 4.

**5.6.8. Final verdict:** Passed

### 5.7. RF Parameter - Power Spectral Density

#### 5.7.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

|                 |                                                                    |                                                    |                                                    |
|-----------------|--------------------------------------------------------------------|----------------------------------------------------|----------------------------------------------------|
| test location   | <input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1) | <input type="checkbox"/> Please see Chapter. 2.2.2 | <input type="checkbox"/> Please see Chapter. 2.2.3 |
| test site       | <input type="checkbox"/> 441 EMI SAR                               | <input type="checkbox"/> 487 SAR NSA               | <input type="checkbox"/> 337 OATS                  |
| receiver        | <input type="checkbox"/> 377 ESCS30                                | <input type="checkbox"/> 001 ESS                   | <input checked="" type="checkbox"/> 489 ESU        |
| spectr. analys. | <input type="checkbox"/> 215 FSU                                   | <input type="checkbox"/> 120 FSEM                  | <input type="checkbox"/> 264 FSEK                  |
| power supply    | <input type="checkbox"/> 456 EA 3013A                              | <input type="checkbox"/> 457 EA 3013A              | <input type="checkbox"/> 459 EA 2032-50            |
| otherwise       | <input checked="" type="checkbox"/> 530 10dB Attenuator            | <input checked="" type="checkbox"/> cable K15      | <input type="checkbox"/> 268 EA- 3050              |

#### 5.7.2. ReferenceS: §15.247(e), RSS-210:A8.3

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### 5.7.3. EUT settings:

For DSSS-systems were three different channels measured.

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.

Different modulation characteristics have been checked, e.g. data rates which EUT can operate.

#### 5.7.4. Measurement Method:

A frequency sweep around nominal carrier frequency is performed over the complete power envelope of the signal with PEAK detector, MAX hold mode. The maximum peak is located and the frequency recorded. With the nominal frequency set to the determined frequency in the step before, a new frequency sweep is performed with a reduced resolution bandwidth of 3kHz. The measured value is corrected due to external measuring set-up and the resulting value is compared with the standard requirement.

#### 5.7.5. Results

| Set-up no.: 2<br>&<br>Op. Mode: 1 | Power spectral density                                         |                               |                                   |                                 |
|-----------------------------------|----------------------------------------------------------------|-------------------------------|-----------------------------------|---------------------------------|
|                                   | Diagram no.                                                    | 11.01                         | 11.02                             | 11.03                           |
|                                   | Channel                                                        | Low channel =11<br>(2405 MHz) | Middle channel = 18<br>(2440 MHz) | High channel = 26<br>(2480 MHz) |
|                                   | Measured Level [dBm/3kHz]                                      | -25.52                        | -25.92                            | -27.23                          |
|                                   | Ext. Path loss [dB]+<br>10 dB Attenuator+<br>Cable attenuation | 17.0                          | 17.0                              | 17.0                            |
|                                   | Resulting Power spectral density [dBm/3kHz]                    | -9.16                         | <b>-9.03</b>                      | -9.50                           |
| Limit                             |                                                                | < 8 dBm/ 3 kHz                |                                   |                                 |

**Remark:** The results were taken directly from the spectrum analyzer display, the path loss and attenuators were included as transducer factor in the spectrum analyzer. Please refer the diagrams at annex 4.

5.7.6.

Final

verdict:

Passed



### 5.8. RF Parameter - 20dBc Emission specification

#### 5.8.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

|                 |                                                                    |                                                    |                                                    |
|-----------------|--------------------------------------------------------------------|----------------------------------------------------|----------------------------------------------------|
| test location   | <input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1) | <input type="checkbox"/> Please see Chapter. 2.2.2 | <input type="checkbox"/> Please see Chapter. 2.2.3 |
| test site       | <input type="checkbox"/> 441 EMI SAR                               | <input type="checkbox"/> 487 SAR NSA               | <input type="checkbox"/> 337 OATS                  |
| receiver        | <input type="checkbox"/> 377 ESCS30                                | <input type="checkbox"/> 001 ESS                   | <input checked="" type="checkbox"/> 347 Radio.lab. |
| spectr. analys. | <input type="checkbox"/> 215 FSU                                   | <input type="checkbox"/> 120 FSEM                  | <input type="checkbox"/> 264 FSEK                  |
| power supply    | <input type="checkbox"/> 456 EA 3013A                              | <input type="checkbox"/> 457 EA 3013A              | <input type="checkbox"/> 459 EA 2032-50            |
| otherwise       | <input checked="" type="checkbox"/> 530 10dB Attenuator            | <input checked="" type="checkbox"/> cable K15      |                                                    |

#### 5.8.2. References: §15.247, §15.205, RSS-210: A8.5

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

#### 5.8.3. EUT settings:

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.

#### 5.8.4. Measurement method:

The frequency spectrum was investigated for **conducted/radiated** spurious emissions values lower than 20dB related to the RF-carrier power value. Three carrier frequencies (low/middle/high channel) were used for showing the compliance with this requirement. The detector were chosen according §15.209(d). The video bandwidth (VBW) was chosen 10 times the resolution bandwidth (RBW). The frequency scan was up to 10 times the highest channel frequency within the operational mode. The spectrum-analyzer was set to MAX-PEAK Detector, MAX-Hold Mode.

For DSSS-systems were three different channels measured.

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.

#### 5.8.5. Results

| Set-up no.: 2<br>Op. mode: 1 | RF-Conducted test: 20 dBc spurious emissions |                                                                  |                                            |                                                                  |                                            |                                                                  |
|------------------------------|----------------------------------------------|------------------------------------------------------------------|--------------------------------------------|------------------------------------------------------------------|--------------------------------------------|------------------------------------------------------------------|
| Diagram no.                  | 12.01                                        |                                                                  | 12.02                                      |                                                                  | 12.03                                      |                                                                  |
| Frequency Range              | Low channel =11<br>(2405 MHz)                |                                                                  | Middle channel = 18<br>(2440 MHz)          |                                                                  | High channel = 26<br>(2480 MHz)            |                                                                  |
|                              | Level Reference (In-Band)<br>= 109.29 dBµV   |                                                                  | Level Reference (In-Band)<br>= 108.62 dBµV |                                                                  | Level Reference (In-Band)<br>= 108.33 dBµV |                                                                  |
|                              | Frequency [MHz]                              | Value [dBc]                                                      | Frequency [MHz]                            | Value [dBc]                                                      | Frequency [MHz]                            | Value [dBc]                                                      |
| 30 .. 1000 MHz               | --                                           | No remarkable peaks found<br><br>Margin>29dB to limit 89.29 dBµV | --                                         | No remarkable peaks found<br><br>Margin>28dB to limit 88.62 dBµV | --                                         | No remarkable peaks found<br><br>Margin>26dB to limit 88.33 dBµV |
| 1 GHz .. 18 GHz              | 7216                                         | 71.91 dBµV<br>Margin +17dB                                       | 7325                                       | 69.10 dBµV<br>Margin +19dB                                       | 7441                                       | 71.17 dBµV<br>Margin +17dB                                       |
| 18..25GHz                    | No remarkable peaks found                    |                                                                  |                                            |                                                                  |                                            |                                                                  |

**Remark:** The limit on the diagrams is 20 dB under the reference level measured In-Band for each channel.

#### 5.8.6. Final verdict: Passed

## 5.9. RF Parameter - 6 dB and 99% occupied Bandwidth

### 5.9.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

|                 |                                                       |                                              |                                                       |                                                    |                                   |                          |
|-----------------|-------------------------------------------------------|----------------------------------------------|-------------------------------------------------------|----------------------------------------------------|-----------------------------------|--------------------------|
| test site       | <input type="checkbox"/> 441 EMI SAR                  | <input type="checkbox"/> 348 EMI cond.       | <input type="checkbox"/> 443 EMI FAR                  | <input checked="" type="checkbox"/> 347 Radio.lab. | <input type="checkbox"/> 337 OATS | <input type="checkbox"/> |
| spectr. analys. | <input type="checkbox"/> 584 FSU                      | <input checked="" type="checkbox"/> 120 FSEM | <input type="checkbox"/> 264 FSEK                     | <input checked="" type="checkbox"/> 489 ESU        | <input type="checkbox"/>          | <input type="checkbox"/> |
| attenuator      | <input checked="" type="checkbox"/> 530 10 dB         | <input type="checkbox"/>                     | <input type="checkbox"/>                              | <input type="checkbox"/>                           | <input type="checkbox"/>          | <input type="checkbox"/> |
| signaling       | <input type="checkbox"/> 392 MT8820A                  | <input type="checkbox"/> 436 CMU             | <input type="checkbox"/> 547 CMU                      |                                                    |                                   |                          |
| DCpower         | <input type="checkbox"/> 463 Power source             | <input type="checkbox"/> 087 EA3013          | <input checked="" type="checkbox"/> 354 NGPE 40       | <input type="checkbox"/> 086 LNG50-10              | <input type="checkbox"/>          | <input type="checkbox"/> |
| line voltage    | <input type="checkbox"/> 230 V 50 Hz via public mains |                                              | <input type="checkbox"/> 060 110 V 60 Hz via PAS 5000 |                                                    |                                   |                          |

### 5.9.2. Test condition and measurement test set-up

|                                |                                   |                                                      |                          |
|--------------------------------|-----------------------------------|------------------------------------------------------|--------------------------|
| link to test system (if used): | <input type="checkbox"/> air link | <input checked="" type="checkbox"/> cable connection | <input type="checkbox"/> |
| Climatic conditions            | Temperature: (22±3°C)             |                                                      | Rel. humidity: (40±20)%  |

### 5.9.3. References of occupied and emission bandwidth

§15.247(a)(1), RSS-210: A8.1(b)

(1) *Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.*

(2) *DSSS Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.*

### 5.9.4. EUT Settings:

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions. Different modulation characteristics have been checked, e.g. data rates which EUT can operate.

### 5.9.5. Measurement method:

The measurement was performed with the RBW set to 100 kHz. The span was set to cover the complete carrier. Three carrier frequencies (low/middle/high) were used for showing the compliance with this requirement. A DELTA Marker method was set to measure the bandwidth compared to the highest In-Band power. The operating modes have been varied (e.g. data rate, modulation scheme, etc.). If applicable the hopping-mode is switched off.

Also the **99% emission bandwidth** was measured. Two markers are placed on frequency points such that left to lower f-marker and right to higher f-marker only 1% of the TX-power is contained. Between the markers, 99% of the power is laying. The RBW value is readjusted and the measurement repeated until the RBW/EBW ratio is around 1%.

### 5.9.6. Spectrum-Analyzer Settings:

|                            |                                                                                             |
|----------------------------|---------------------------------------------------------------------------------------------|
| Span                       | Set as to fully display the emissions and at least 20dB below the PEAK level                |
| Resolution Bandwidth (RBW) | Set to approx 1% to 5% of the emission width                                                |
| Video Bandwidth (VBW)      | 3 times the resolution bandwidth                                                            |
| Sweep time                 | Coupled and low enough to have no gaps within power envelope                                |
| Detector                   | Sample (if bin width: Span/no. of frequency points SA < 0.5*RBW SA otherwise Peak detector) |
| Sweep mode                 | Repetitive Mode, MAX-HOLD                                                                   |

**5.9.7. Results:**

|                                               |       |                                |                             |
|-----------------------------------------------|-------|--------------------------------|-----------------------------|
| Set-up no.:                                   |       |                                | 2                           |
| Op. Mode:                                     |       |                                | 1                           |
| $T_{NOM} = 21.4^{\circ}C$<br>$V_{NOM} = 5.0V$ |       |                                | <b>6 dB Bandwidth [MHz]</b> |
| Diagram no.                                   | 13.01 | Low channel = 11 (2405 MHz)    | 1.68                        |
|                                               | 13.02 | Middle channel = 18 (2440 MHz) | 1.49                        |
|                                               | 13.03 | High channel = 26 (2480 MHz)   | 1.65                        |

**Remark:** See extract of diagrams in separate document A4.

**Conclusion:** 6 dB bandwidth is bigger than 500 kHz so tests according Part 15.247 should apply for this wireless technology.

|                                               |       |                                |                                     |
|-----------------------------------------------|-------|--------------------------------|-------------------------------------|
| Set-up no.:                                   |       |                                | 2                                   |
| Op. Mode:                                     |       |                                | 1                                   |
| $T_{NOM} = 21.7^{\circ}C$<br>$V_{NOM} = 5.0V$ |       |                                | <b>99% Emission Bandwidth [MHz]</b> |
| Diagram no.                                   | 14.01 | Low channel = 11 (2405 MHz)    | 2.62                                |
|                                               | 14.02 | Middle channel = 18 (2440 MHz) | 2.62                                |
|                                               | 14.03 | High channel = 26 (2480 MHz)   | 2.62                                |

**Remark:** See extract of diagrams) in separate document A4

**5.9.8. Verdict (assignment):** As 6dB bandwidth is bigger than 500 kHz standard Part **§15.247(a)(2)** apply.

## 5.10. RF Parameter - Frequency stability

### 5.10.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

|                       |                                                                    |                                                       |                                                    |
|-----------------------|--------------------------------------------------------------------|-------------------------------------------------------|----------------------------------------------------|
| test location         | <input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1) | <input type="checkbox"/> Please see Chapter. 2.2.2    | <input type="checkbox"/> Please see Chapter. 2.2.3 |
| test site             | <input type="checkbox"/> 441 EMI SAR                               | <input type="checkbox"/> 487 SAR NSA                  | <input checked="" type="checkbox"/> 347 Radio.lab. |
| receiver              | <input type="checkbox"/> 377 ESCS30                                | <input type="checkbox"/> 001 ESS                      | <input type="checkbox"/> 489 ESU 40                |
| spectr. analys.       | <input type="checkbox"/> 584 FSU                                   | <input type="checkbox"/> 120 FSEM                     | <input checked="" type="checkbox"/> 264 FSEK       |
| antenna               | <input type="checkbox"/> 574 BTA-L                                 | <input type="checkbox"/> 133 EMCO3115                 | <input type="checkbox"/> 302 BBHA9170              |
| signaling             | <input type="checkbox"/> 392 MT8820A                               | <input type="checkbox"/> 436 CMU                      | <input checked="" type="checkbox"/> 547 CMU        |
| otherwise             | <input type="checkbox"/> 400 FTC40x15E                             | <input type="checkbox"/> 401 FTC40x15E                | <input type="checkbox"/> 110 USB LWL               |
| DC power              | <input type="checkbox"/> 456 EA 3013A                              | <input type="checkbox"/> 457 EA 3013A                 | <input type="checkbox"/> 459 EA 2032-50            |
| Climatic test chamber | <input checked="" type="checkbox"/> 331 HC 4055                    |                                                       |                                                    |
| attenuator            | <input checked="" type="checkbox"/> 530 10 dB                      |                                                       |                                                    |
| line voltage          | <input type="checkbox"/> 230 V 50 Hz via public mains              | <input type="checkbox"/> 060 110 V 60 Hz via PAS 5000 |                                                    |

### 5.10.2. Requirements

|              |                                                                                                                                                                                   |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>FCC</b>   | --                                                                                                                                                                                |
| <b>IC</b>    | <input checked="" type="checkbox"/> RSS-Gen Issue 3,chapter 4.7 and 7.2.6                                                                                                         |
| <b>Limit</b> | "Measurement of the frequency stability is not required provided that the occupied bandwidth of the licence-exempt radio apparatus lies entirely outside the restricted bands..." |

### 5.10.3. Test condition and measurement test set-up

|                                |                                   |                                                      |                          |
|--------------------------------|-----------------------------------|------------------------------------------------------|--------------------------|
| link to test system (if used): | <input type="checkbox"/> air link | <input checked="" type="checkbox"/> cable connection | <input type="checkbox"/> |
| Climatic conditions            | Temperature: (22±3°C)             | Rel.humidity: (40±20)%                               |                          |

### 5.10.4. Test Set-up

In order to maintain the voltage constant over the time period of the tests, a radial field cable for DC was connected to a laboratory power supply. The power supply voltage was controlled on the input of the power supply terminals of the EUT. A conducted measurement test set-up like described in chapter 4.1 was used.

### 5.10.5. EUT settings

The measurements were made at the upper, middle, and lower carrier frequencies of the operating band. Choosing two representative TX-carrier frequencies of the EUT within each operable licence-exempt radio apparatus band, should be sufficient to demonstrate compliance.

### 5.10.6. Test method

In order to accurately determine the frequency of a signal, ESU is equipped with a frequency counter. The RF channel span was taken in 1 kHz (RBW=VBW= 50 Hz and SWT 20 s) at the spectrum analyzer and the counter resolution in 1 Hz. The aim of the EUT is to function under all extreme conditions within authorized band in regard to temperature and voltage variations. The frequency deviation was recorded with the spectrum analyzer. As the standard requires that the fundamental emissions stays within the occupied bandwidth, a table shows the pass criteria of the positive margin at measurement results mentioned-below.

### 5.10.7. Frequency shift of carrier against temperature at different power supply voltages

- 1.) Determine the carrier frequency for the lowest and highest channels at room temperature in nominal-, low- and high- voltage [20°C]
- 2.) Expose the EUT to +50°C, wait sufficient time to have constant temperature.
- 3.) Perform the carrier frequencies measurements at low and high voltages and afterwards decrease to -20°C, wait sufficient time to have constant temperature.
- 4.) At the specified temperatures the EUT was powered-off. After powering-on, the measurements were made within 2 minute for the lower and higher channel, in order to prevent self-warming of the EUT.

5.10.8. Measurement results:

Op. mode 2, Set-up no. 2

| Frequency Stability @ 20 °C |                 |                       |                 |                                |                                 |
|-----------------------------|-----------------|-----------------------|-----------------|--------------------------------|---------------------------------|
| Channel Number              | Frequency (MHz) | Input Voltage (Volts) | Temp. (Celsius) | Measured Frequency Error (GHz) | Results of Frequency Error (Hz) |
| 11                          | 2405            | 4.25                  | 20              | 2.4049962                      | -3797                           |
| 11                          | 2405            | 5.0                   | 20              | 2.4049960                      | -3974                           |
| 11                          | 2405            | 5.75                  | 20              | 2.4049961                      | -3880                           |
| 26                          | 2480            | 4.25                  | 20              | 2.4800014                      | 1404                            |
| 26                          | 2480            | 5.0                   | 20              | 2.4800013                      | 1308                            |
| 26                          | 2480            | 5.75                  | 20              | 2.4800014                      | 1439                            |

| CHANNEL 11=2405 MHz @ -20 °C / +50°C |                 |                       |                       |                      |                                         |         |
|--------------------------------------|-----------------|-----------------------|-----------------------|----------------------|-----------------------------------------|---------|
| Channel Number                       | Frequency (MHz) | Input Voltage (Volts) | Temperature (Celsius) | Frequency Error (Hz) | Frequency Error referenced to 20°C (Hz) | PPM     |
| 11                                   | 2405            | 4.25                  | -20                   | 384                  | 4181                                    | 1.7385  |
| 11                                   | 2405            | 4.25                  | 50                    | -11861               | -8064                                   | -3.3530 |
| 11                                   | 2405            | 5.75                  | -20                   | -645                 | 3235                                    | 1.3451  |
| 11                                   | 2405            | 5.75                  | 50                    | -11253               | -7373                                   | -3.0657 |

| Input Voltage (Volts) | Temperature (Celsius) | Frequency Error (GHz) | OBW Low limit | OBW High Limit | Pass criteria: Positive Margin to OBW low limit | Pass criteria: Positive Margin to OBW high limit | Verdict |
|-----------------------|-----------------------|-----------------------|---------------|----------------|-------------------------------------------------|--------------------------------------------------|---------|
| 4.25                  | -20                   | 2.4050004             | 2.4036859     | 2.4063141      | 0.0013145                                       | 0.0013137                                        | Passed  |
| 4.25                  | 50                    | 2.4049881             | 2.4036859     | 2.4063141      | 0.0013022                                       | 0.0013260                                        | Passed  |
| 5.75                  | -20                   | 2.4049994             | 2.4036859     | 2.4063141      | 0.0013135                                       | 0.0013147                                        | Passed  |
| 5.75                  | 50                    | 2.4049887             | 2.4036859     | 2.4063141      | 0.0013029                                       | 0.0013254                                        | Passed  |

**CHANNEL 26=2480 MHz @ -20 °C / +50°C**

| Channel Number | Frequency (MHz) | Input Voltage (Volts) | Temperature (Celsius) | Frequency Error (Hz) | Frequency Error referenced to 20 °C (Hz) | PPM    |
|----------------|-----------------|-----------------------|-----------------------|----------------------|------------------------------------------|--------|
| 26             | 2480            | 4.25                  | -20                   | 3354                 | 1950                                     | 0.7863 |
| 26             | 2480            | 4.25                  | 50                    | 3479                 | 2075                                     | 0.8367 |

|    |      |      |     |      |      |        |
|----|------|------|-----|------|------|--------|
| 26 | 2480 | 5.75 | -20 | 5832 | 4393 | 1.7714 |
| 26 | 2480 | 5.75 | 50  | 3462 | 2023 | 0.8157 |

| Input Voltage (Volts) | Temperature (Celsius) | Frequency Error (GHz) | OBW Low Limit | OBW High Limit | Pass criteria: Positive Margin to OBW LL | Pass criteria: Positive Margin to OBW HL | Verdict |
|-----------------------|-----------------------|-----------------------|---------------|----------------|------------------------------------------|------------------------------------------|---------|
| 4.25                  | -20                   | 2.4800034             | 2.4786859     | 2.4813141      | 0.0013175                                | 0.0013107                                | Passed  |
| 4.25                  | 50                    | 2.4800035             | 2.4786859     | 2.4813141      | 0.0013176                                | 0.0013106                                | Passed  |

|      |     |           |           |           |           |           |        |
|------|-----|-----------|-----------|-----------|-----------|-----------|--------|
| 5.75 | -20 | 2.4800058 | 2.4786859 | 2.4813141 | 0.0013199 | 0.0013083 | Passed |
| 5.75 | 50  | 2.4800035 | 2.4786859 | 2.4813141 | 0.0013176 | 0.0013106 | Passed |

### 5.11. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according it's statistical distribution calculated.

Following table shows expectable uncertainties for each measurement type performed.

| RF-Measurement                                             | Frequency range   | Calculated uncertainty based on a confidence level of 95% | Remarks:            |
|------------------------------------------------------------|-------------------|-----------------------------------------------------------|---------------------|
| Power Output conducted                                     | 9 kHz .. 20 GHz   | 1.0 dB                                                    | --                  |
| Power Output radiated                                      | 30 MHz .. 4 GHz   | 3.17 dB                                                   | Substitution method |
| Conducted emissions on antenna ports                       | 9 kHz .. 20 GHz   | 1.0 dB                                                    | --                  |
| Radiated emissions enclosure                               | 150 kHz .. 30 MHz | 5.0 dB                                                    | Magnetic field      |
|                                                            | 30 MHz .. 1 GHz   | 4.2 dB                                                    | E-Field             |
|                                                            | 1 GHz .. 20 GHz   | 3.17 dB                                                   | Substitution method |
| Occupied bandwidth                                         | 9 kHz .. 4 GHz    | 0.1272 ppm (Delta Marker )                                | Frequency error     |
|                                                            |                   | 1.0 dB                                                    | Power               |
| Emission bandwidth                                         | 9 kHz .. 4 GHz    | 0.1272 ppm (Delta Marker)                                 | Frequency error     |
|                                                            |                   | 1.0 dB                                                    | Power               |
| Frequency stability                                        | 9 kHz .. 20 GHz   | 0.0636 ppm                                                | --                  |
| Conducted emissions on AC-mains port (U <sub>CISPR</sub> ) | 9 kHz .. 150 kHz  | 4.0 dB                                                    | --                  |
|                                                            | 150 kHz .. 30 MHz | 3.6 dB                                                    | --                  |

**Table: measurement uncertainties, valid for conducted/radiated measurements**

### 6. Abbreviations used in this report

| The abbreviations |                                                                                   |
|-------------------|-----------------------------------------------------------------------------------|
| ANSI              | American National Standards Institute                                             |
| AV or AVG         | Average detector                                                                  |
| CAV               | Average detector                                                                  |
| EIRP              | Equivalent isotropically radiated power, determined within a separate measurement |
| EGPRS             | Enhanced General Packet Radio Service                                             |
| EUT               | Equipment Under Test                                                              |
| FCC               | Federal Communications Commission, USA                                            |
| IC                | Industry Canada                                                                   |
| n.a.              | not applicable                                                                    |
| Op-Mode           | Operating mode of the equipment                                                   |
| PK                | Peak                                                                              |
| RBW               | resolution bandwidth                                                              |
| RF                | Radio frequency                                                                   |
| RSS               | Radio Standards Specification, Dokuments from Industry Canada                     |
| Rx                | Receiver                                                                          |
| TCH               | Traffic channel                                                                   |
| Tx                | Transmitter                                                                       |
| QP                | Quasi peak detector                                                               |
| VBW               | Video bandwidth                                                                   |
| ERP               | Effective radiated power                                                          |

## 7. Accreditation details of CETECOM's laboratories and test sites

| Ref.-No.                        | Accreditation Certificate                     | Valid for laboratory area or test site                                                                                                                                                                                                                                       | Accreditation Body                                                                          |
|---------------------------------|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| -                               | D-PL-12047-01-01                              | All laboratories and test sites of CETECOM GmbH, Essen                                                                                                                                                                                                                       | DAkkS, Deutsche Akkreditierungsstelle GmbH                                                  |
| 337<br>487<br>558<br>348<br>348 | 736496                                        | Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS)<br>Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR)<br>Radiated Measurements above 1 GHz, 3 m (FAR)<br>Mains Ports Conducted Interference Measurements<br>Telecommunication Ports Conducted Interference Measur.    | FCC, Federal Communications Commission<br>Laboratory Division, USA<br>(MRA US-EU 0003)      |
| 337<br>487<br>550<br>558        | 3462D-1<br>3462D-2<br>3462D-2<br>3462D-3      | Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS)<br>Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR)<br>Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR)<br>Radiated Measurements above 1 GHz, 3 m (FAR)                                                              | IC, Industry Canada<br>Certification and Engineering Bureau                                 |
| 337<br>487<br>550<br>348<br>348 | R-2665<br>R-2666<br>G-301<br>C-2914<br>T-1967 | Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS)<br>Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR)<br>Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR)<br>Mains Ports Conducted Interference Measurements<br>Telecommunication Ports Conducted Interference Measur. | VCCI, Voluntary Control Council for Interference by Information Technology Equipment, Japan |

OATS = Open Area Test Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room



## 8. Instruments and Ancillary

### 8.1. Used equipment “CTC”

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

#### 8.1.1. Test software and firmware of equipment

| Ref.-No. | Equipment                               | Type                   | Serial-No.     | Version of Firmware or Software during the test                                                 |
|----------|-----------------------------------------|------------------------|----------------|-------------------------------------------------------------------------------------------------|
| 001      | EMI Test Receiver                       | ESS                    | 825132/017     | Firm.= 1.21 , OTP=2.0, GRA=2.0                                                                  |
| 012      | Signal Generator (EMS-cond.)            | SMY 01                 | 839069/027     | Firm.= V 2.02                                                                                   |
| 013      | Power Meter (EMS cond.)                 | NRVD                   | 839111/003     | Firm.= V 1.51                                                                                   |
| 017      | Digital Radiocommunication Tester       | CMD 60 M               | 844365/014     | Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99                                              |
| 053      | Audio Analyzer                          | UPA3                   | 860612/022     | Firm. V 4.3                                                                                     |
| 119      | RT Harmonics Analyzer dig. Flickermeter | B10                    | G60547         | Firm.= V 3.1DHG                                                                                 |
| 140      | Signal Generator                        | SMHU                   | 831314/006     | Firm.= 3.21                                                                                     |
| 261      | Thermal Power Sensor                    | NRV-Z55                | 825083/0008    | EPROM-Datum 02.12.04, SE EE 1 B                                                                 |
| 262      | Power Meter                             | NRV-S                  | 825770/0010    | Firm.= 2.6                                                                                      |
| 263      | Signal Generator                        | SMP 04                 | 826190/0007    | Firm.=3.21                                                                                      |
| 264      | Spectrum Analyzer                       | FSEK 30                | 826939/005     | Bios=2.1, Analyzer= 3.20                                                                        |
| 295      | Racal Digital Radio Test Set            | 6103                   | 1572           | UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02       |
| 298      | Univ. Radio Communication Tester        | CMU 200                | 832221/091     | R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used                              |
| 323      | Digital Radiocommunication Tester       | CMD 55                 | 825878/0034    | Firm.= 3.52 .22.01.99                                                                           |
| 331      | Climatic Test Chamber -40/+80 Grad      | HC 4055                | 43146          | TSI 1.53                                                                                        |
| 335      | CTC-EMS-Conducted                       | System EMS Conducted   | -              | EMC 32 V 8.52                                                                                   |
| 340      | Digital Radiocommunication Tester       | CMD 55                 | 849709/037     | Firm.= 3.52 .22.01.99                                                                           |
| 355      | Power Meter                             | URV 5                  | 891310/027     | Firm.= 1.31                                                                                     |
| 365      | 10V Insertion Unit 50 Ohm               | URV5-Z2                | 100880         | Eprom Data = 31.03.08                                                                           |
| 366      | Ultra Compact Simulator                 | UCS 500 M4             | V0531100594    | Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10                                                    |
| 371      | Bluetooth Tester                        | CBT32                  | 100153         | CBT V5.30+ SW-Option K55, K57                                                                   |
| 377      | EMI Test Receiver                       | ESCS 30                | 100160         | Firm.= 2.30, OTP= 02.01, GRA= 02.36                                                             |
| 378      | Broadband RF Field Monitor              | RadiSense III          | 03D00013SNO-08 | Firm.= V.03D13                                                                                  |
| 383      | Signal Generator                        | SME 03                 | 842 828 /034   | Firm.= 4.61                                                                                     |
| 389      | Digital Multimeter                      | Keithley 2000          | 0583926        | Firm. = A13 (Mainboard) A02 (Display)                                                           |
| 392      | Radio Communication Tester              | MT8820A                | 6K00000788     | Firm.= 4.50 #005, IPL=4.01#001,OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario= 4.52#002  |
| 436      | Univ. Radio Communication Tester        | CMU 200                | 103083         | R&S Test Firmware Base=5.14, Mess-Software= GSM:5.14 WCDMA:5.14 (current Testsoftw. F. all band |
| 441      | CTC-SAR-EMI Cable Loss                  | System EMI field (SAR) | -              | EMC 32 Version 8.52                                                                             |
| 442      | CTC-SAR-EMS                             | System EMS field (SAR) | -              | EMC 32 Version 8.40                                                                             |
| 443      | CTC-FAR-EMI-RSE                         | System CTC-FAR-EMI-RSE | -              | Spuri 7.2.5 or EMC 32 Ver. 8.53                                                                 |
| 444      | CTC-FAR-EMS field                       | System-EMS-Field (FAR) | -              | EMC 32 Version 8.40                                                                             |
| 460      | Univ. Radio Communication Tester        | CMU 200                | 108901         | R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used,    |
| 489      | EMI Test Receiver                       | ESU40                  | 1000-30        | Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00                                                 |
| 491      | ESD Simulator dito                      | ESD dito               | dito307022     | V 2.30                                                                                          |
| 524      | Voltage Drop Simulator                  | VDS 200                | 0196-16        | Software Nr: 000037 Version V4.20a01                                                            |
| 526      | Burst Generator                         | EFT 200 A              | 0496-06        | Software Nr. 000034 Version V2.32                                                               |
| 527      | Micro Pulse Generator                   | MPG 200 B              | 0496-05        | Software-Nr. 000030 Version V2.43                                                               |
| 528      | Load Dump Simulator                     | LD 200B                | 0496-06        | Software-Nr. 000031 Version V2.35a01                                                            |
| 546      | Univ. Radio Communication Tester        | CMU 200                | 106436         | R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used     |
| 547      | Univ. Radio Communication Tester        | CMU 200                | 835390/014     | R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14  |
| 584      | Spectrum Analyzer                       | FSU 8                  | 100248         | 2.82_SP3                                                                                        |
| 594      | Wideband Radio Communication Tester     | CMW500                 | 101757         | Firmware Base=2.0.20.9, LTE=2.0.20.8. CDMA= 2.0.10                                              |
| 597      | Univ. Radio Communication Tester        | CMU 200                | 100347         | R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= µP1=V.850                |
| 598      | Spectrum Analyzer                       | FSEM 30 (Reserve)      | 831259/013     | Firmware Bios 3.40 , Analyzer 3.40 Sp 2                                                         |
| 620      | EMI Test Receiver                       | ESU 26                 | 100362         | 4.43_SP3                                                                                        |
| 642      | Wideband Radio Communication Tester     | CMW 500                | 126089         |                                                                                                 |

### 8.1.2. Single instruments and test systems

| Ref.-No. | Equipment                               | Type                      | Serial-No.      | Manufacturer          | Interval of calibration | Remark | Cal due    |
|----------|-----------------------------------------|---------------------------|-----------------|-----------------------|-------------------------|--------|------------|
| 001      | EMI Test Receiver                       | ESS                       | 825132/017      | Rohde & Schwarz       | 12 M                    | -      | 31.03.2013 |
| 005      | AC - LISN (50 Ohm/50µH, test site 1)    | ESH2-Z5                   | 861741/005      | Rohde & Schwarz       | 24/12 M                 | -      | 31.03.2014 |
| 007      | Single-Line V-Network (50 Ohm/5µH)      | ESH3-Z6                   | 892563/002      | Rohde & Schwarz       | 24/12 M                 | -      | 31.03.2014 |
| 009      | Power Meter (EMS-radiated)              | NRV                       | 863056/017      | Rohde & Schwarz       | 24 M                    | -      | 31.03.2013 |
| 016      | Line Impedance Simulating Network       | Op. 24-D                  | B6366           | Spitzenberger+Spies   | 36 M                    | -      | 31.03.2013 |
| 020      | Horn Antenna 18 GHz (Subst 1)           | 3115                      | 9107-3699       | EMCO                  | 36/12 M                 | -      | 31.03.2013 |
| 021      | Loop Antenna (H-Field)                  | 6502                      | 9206-2770       | EMCO                  | 36 M                    | -      | 31.03.2015 |
| 030      | Loop Antenna (H-field)                  | HFH-Z2                    | 879604/026      | Rohde & Schwarz       | 36 M                    | -      | 31.03.2015 |
| 033      | RF-current probe (100kHz-30MHz)         | ESH2-Z1                   | 879581/18       | Rohde & Schwarz       | 24 M                    | -      | 31.03.2013 |
| 057      | relay-switch-unit (EMS system)          | RSU                       | 494440/002      | Rohde & Schwarz       | pre-m                   | 1a     |            |
| 060      | power amplifier (DC-2kHz)               | PAS 5000                  | B6363           | Spitzenberger+Spies   | -                       | 3      |            |
| 066      | notch filter (WCDMA; FDD1)              | WRCT 1900/2200-5/40-10EEK | 5               | Wainwright GmbH       | 12 M                    | 1g     | 30.06.2013 |
| 086      | DC - power supply, 0 -10 A              | LNG 50-10                 | -               | Heinzinger Electronic | pre-m                   | 2      |            |
| 087      | DC - power supply, 0 -5 A               | EA-3013 S                 | -               | Elektro Automatik     | pre-m                   | 2      |            |
| 090      | Helmholtz coil: 2x10 coils in series    | -                         | -               | RWTÜV                 | -                       | 4      |            |
| 091      | USB-LWL-Converter                       | OLS-1                     | 007/2006        | Ing. Büro Scheiba     | -                       | 4      |            |
| 099      | passive voltage probe                   | ESH2-Z3                   | 299.7810.52     | Rohde & Schwarz       | 36 M                    | -      | 31.03.2015 |
| 100      | passive voltage probe                   | Probe TK 9416             | without         | Schwarzbeck           | 36 M                    | -      | 31.03.2015 |
| 110      | USB-LWL-Converter                       | OLS-1                     | -               | Ing. Büro Scheiba     | -                       | 4      |            |
| 119      | RT Harmonics Analyzer dig. Flickermeter | B10                       | G60547          | BOCONSULT             | 36 M                    | -      | 31.03.2013 |
| 134      | horn antenna 18 GHz (Subst 2)           | 3115                      | 9005-3414       | EMCO                  | 12 M                    | -      | 31.03.2014 |
| 136      | adjustable dipole antenna (Dipole 1)    | 3121C-DB4                 | 9105-0697       | EMCO                  | 36 M                    | -      | 31.03.2015 |
| 140      | Signal Generator                        | SMHU                      | 831314/006      | Rohde & Schwarz       | 24 M                    | -      | 31.03.2014 |
| 248      | attenuator                              | SMA 6dB 2W                | -               | Radiall               | pre-m                   | 2      |            |
| 249      | attenuator                              | SMA 10dB 10W              | -               | Radiall               | pre-m                   | 2      |            |
| 252      | attenuator                              | N 6dB 12W                 | -               | Radiall               | pre-m                   | 2      |            |
| 256      | attenuator                              | SMA 3dB 2W                | -               | Radiall               | pre-m                   | 2      |            |
| 257      | hybrid                                  | 4031C                     | 04491           | Narda                 | pre-m                   | 2      |            |
| 260      | hybrid coupler                          | 4032C                     | 11342           | Narda                 | pre-m                   | 2      |            |
| 261      | Thermal Power Sensor                    | NRV-Z55                   | 825083/0008     | Rohde & Schwarz       | 24 M                    | -      | 31.03.2014 |
| 262      | Power Meter                             | NRV-S                     | 825770/0010     | Rohde & Schwarz       | 24 M                    | -      | 31.03.2014 |
| 263      | Signal Generator                        | SMP 04                    | 826190/0007     | Rohde & Schwarz       | 36 M                    | -      | 31.03.2013 |
| 264      | Spectrum Analyzer                       | FSEK 30                   | 826939/005      | Rohde & Schwarz       | 12 M                    | -      | 31.03.2013 |
| 265      | peak power sensor                       | NRV-Z33, Model 04         | 840414/009      | Rohde & Schwarz       | 24 M                    | -      | 31.03.2014 |
| 266      | peak power sensor                       | NRV-Z31, Model 04         | 843383/016      | Rohde & Schwarz       | 24 M                    | -      | 31.03.2014 |
| 267      | notch filter GSM 850                    | WRCA 800/960-6EEK         | 9               | Wainwright GmbH       | pre-m                   | 2      |            |
| 270      | termination                             | 1418 N                    | BB6935          | Weinschel             | pre-m                   | 2      |            |
| 271      | termination                             | 1418 N                    | BE6384          | Weinschel             | pre-m                   | 2      |            |
| 272      | attenuator (20 dB) 50 W                 | Model 47                  | BF6239          | Weinschel             | pre-m                   | 2      |            |
| 273      | attenuator (10 dB) 100 W                | Model 48                  | BF9229          | Weinschel             | pre-m                   | 2      |            |
| 274      | attenuator (10 dB) 50 W                 | Model 47 (10 dB) 50 W     | BG0321          | Weinschel             | pre-m                   | 2      |            |
| 275      | DC-Block                                | Model 7003 (N)            | C5129           | Weinschel             | pre-m                   | 2      |            |
| 276      | DC-Block                                | Model 7006 (SMA)          | C7061           | Weinschel             | pre-m                   | 2      |            |
| 279      | power divider                           | 1515 (SMA)                | LH855           | Weinschel             | pre-m                   | 2      |            |
| 287      | pre-amplifier 25MHz - 4GHz              | AMF-2D-100M4G-35-10P      | 379418          | Miteq                 | 12 M                    | 1c     | 30.06.2013 |
| 291      | high pass filter GSM 850/900            | WHJ 2200-4EE              | 14              | Wainwright GmbH       | 12 M                    | 1c     | 30.06.2013 |
| 298      | Univ. Radio Communication Tester        | CMU 200                   | 832221/091      | Rohde & Schwarz       | pre-m                   | 3      |            |
| 300      | AC LISN (50 Ohm/50µH, 1-phase)          | ESH3-Z5                   | 892 239/020     | Rohde & Schwarz       | 24/12 M                 | -      | 31.03.2014 |
| 301      | attenuator (20 dB) 50W, 18GHz           | 47-20-33                  | AW0272          | Lucas Weinschel       | pre-m                   | 2      |            |
| 302      | horn antenna 40 GHz (Meas 1)            | BBHA9170                  | 155             | Schwarzbeck           | 36 M                    | -      | 31.03.2014 |
| 303      | horn antenna 40 GHz (Subst 1)           | BBHA9170                  | 156             | Schwarzbeck           | 36 M                    | -      | 31.03.2014 |
| 331      | Climatic Test Chamber -40/+80 Grad      | HC 4055                   | 43146           | Heraeus Vötsch        | 24 M                    | -      | 30.11.2012 |
| 341      | Digital Multimeter                      | Fluke 112                 | 81650455        | Fluke                 | 24 M                    | -      | 31.03.2014 |
| 342      | Digital Multimeter                      | Voltcraft M-4660A         | IB 255466       | Voltcraft             | 24 M                    | -      | 31.03.2013 |
| 347      | laboratory site                         | radio lab.                | -               | -                     | -                       | 5      |            |
| 348      | laboratory site                         | EMI conducted             | -               | -                     | -                       | 5      |            |
| 354      | DC - Power Supply 40A                   | NGPE 40/40                | 448             | Rohde & Schwarz       | pre-m                   | 2      |            |
| 355      | Power Meter                             | URV 5                     | 891310/027      | Rohde & Schwarz       | 24 M                    | -      | 31.03.2014 |
| 356      | power sensor                            | NRV-Z1                    | 882322/014      | Rohde & Schwarz       | 24 M                    | -      | 31.03.2013 |
| 357      | power sensor                            | NRV-Z1                    | 861761/002      | Rohde & Schwarz       | 24 M                    | -      | 31.03.2013 |
| 371      | Bluetooth Tester                        | CBT32                     | 100153          | R&S                   | 12 M                    | -      | 31.03.2013 |
| 373      | Single-Line V-Network (50 Ohm/5µH)      | ESH3-Z6                   | 100535          | Rohde & Schwarz       | 24/12 M                 | -      | 31.03.2014 |
| 376      | Horn Antenna 6 GHz                      | BBHA9120 E                | BBHA 9120 E 179 | Schwarzbeck           | 12 M                    | -      | 31.03.2013 |
| 377      | EMI Test Receiver                       | ESCS 30                   | 100160          | Rohde & Schwarz       | 12 M                    | -      | 31.03.2013 |
| 389      | Digital Multimeter                      | Keithley 2000             | 0583926         | Keithley              | 24 M                    | -      | 31.03.2013 |
| 392      | Radio Communication Tester              | MT8820A                   | 6K00000788      | Anritsu               | 12 M                    | -      | 31.03.2013 |
| 431      | Model 7405                              | Near-Field Probe Set      | 9305-2457       | EMCO                  | -                       | 4      |            |
| 436      | Univ. Radio Communication Tester        | CMU 200                   | 103083          | Rohde & Schwarz       | 12 M                    | -      | 31.03.2013 |
| 441      | CTC-SAR-EMI Cable Loss                  | System EMI field (SAR)    | -               | CETECOM               | 12 M                    | 5      | 31.10.2012 |

| Ref.-No. | Equipment                               | Type                        | Serial-No.                 | Manufacturer                | Interval of calibration | Remark | Cal due    |
|----------|-----------------------------------------|-----------------------------|----------------------------|-----------------------------|-------------------------|--------|------------|
|          |                                         | Cable                       |                            |                             |                         |        |            |
| 443      | CTC-FAR-EMI-RSE                         | System CTC-FAR-EMI-RSE      | -                          | ETS-Lindgren / CETECOM      | 12 M                    | 5      | 30.06.2013 |
| 448      | notch filter WCDMA_FDD II               | WRCT 1850.0/2170.0-5/40-    | 5                          | Wainwright Instruments GmbH | 12 M                    | 1c     | 30.06.2013 |
| 449      | notch filter WCDMA FDD V                | WRCT 824.0/894.0-5/40-8SSK  | 1                          | Wainwright                  | 12 M                    | 1c     | 30.06.2013 |
| 454      | Oscilloscope                            | HM 205-3                    | 9210 P 29661               | Hameg                       | -                       | 4      |            |
| 456      | DC-Power supply 0-5 A                   | EA 3013 S                   | 207810                     | Elektro Automatik           | pre-m                   | 2      |            |
| 459      | DC -Power supply 0-5 A , 0-32 V         | EA-PS 2032-50               | 910722                     | Elektro Automatik           | pre-m                   | 2      |            |
| 460      | Univ. Radio Communication Tester        | CMU 200                     | 108901                     | Rohde & Schwarz             | 12 M                    | -      | 31.03.2013 |
| 463      | Universal source                        | HP3245A                     | 2831A03472                 | Agilent                     | -                       | 4      |            |
| 466      | Digital Multimeter                      | Fluke 112                   | 89210157                   | Fluke USA                   | 24 M                    | -      | 31.03.2014 |
| 467      | Digital Multimeter                      | Fluke 112                   | 89680306                   | Fluke USA                   | 24 M                    | -      | 31.03.2014 |
| 468      | Digital Multimeter                      | Fluke 112                   | 90090455                   | Fluke USA                   | 24 M                    | -      | 31.03.2014 |
| 477      | ReRadiating GPS-System                  | AS-47                       | -                          | Automotive Cons. Fink       | -                       | 3      |            |
| 480      | power meter (Fula)                      | NRVS                        | 838392/031                 | Rohde & Schwarz             | 24 M                    | -      | 31.03.2013 |
| 482      | filter matrix                           | Filter matrix SAR 1         | -                          | CETECOM (Brl)               | -                       | 1d     |            |
| 484      | pre-amplifier 2,5 - 18 GHz              | AMF-5D-02501800-25-10P      | 1244554                    | Miteq                       | 12 M                    | -      | 30.06.2013 |
| 487      | System CTC NSA-Verification SAR-EMI     | System EMI field (SAR) NSA  | -                          | ETS Lindgren / CETECOM      | 24 M                    | -      | 30.09.2013 |
| 489      | EMI Test Receiver                       | ESU40                       | 1000-30                    | Rohde & Schwarz             | 12 M                    | -      | 31.03.2013 |
| 502      | band reject filter                      | WRCG 1709/1786-1699/1796-   | SN 9                       | Wainwright                  | pre-m                   | 2      |            |
| 503      | band reject filter                      | WRCG 824/849-814/859-       | SN 5                       | Wainwright                  | pre-m                   | 2      |            |
| 512      | notch filter GSM 850                    | WRCA 800/960-02/40-6EEK     | SN 24                      | Wainwright                  | 12 M                    | 1c     | 30.06.2013 |
| 517      | relais switch matrix                    | HF Relais Box Keithley      | SE 04                      | Keithley                    | pre-m                   | 2      |            |
| 523      | Digital Multimeter                      | L4411A                      | MY46000154                 | Agilent                     | 24 M                    | -      | 31.03.2013 |
| 529      | 6 dB Broadband resistive power divider  | Model 1515                  | LH 855                     | Weinschel                   | pre-m                   | 2      |            |
| 530      | 10 dB Broadband resistive power divider | R 416110000                 | LOT 9828                   | -                           | pre-m                   | 2      |            |
| 546      | Univ. Radio Communication Tester        | CMU 200                     | 106436                     | R&S                         | 12 M                    | -      | 31.03.2013 |
| 547      | Univ. Radio Communication Tester        | CMU 200                     | 835390/014                 | Rohde & Schwarz             | 12 M                    | -      | 31.03.2013 |
| 548      | Digital-Barometer                       | GBP 2300                    | without                    | Greisinger GmbH             | 36 M                    | -      | 30.06.2015 |
| 549      | Log.Per-Antenna                         | HL025                       | 1000060                    | Rohde & Schwarz             | 36/12 M                 | -      | 31.03.2015 |
| 552      | high pass filter 2,8-18GHz              | WHKX 2.8/18G-10SS           | 4                          | Wainwright                  | 12 M                    | 1c     | 30.06.2013 |
| 558      | System CTC FAR S-VSWR                   | System CTC FAR S-VSWR       | -                          | CTC                         | 24 M                    | -      | 31.07.2013 |
| 574      | Biconilog Hybrid Antenna                | BTA-L                       | 980026L                    | Frankonia                   | 36/12 M                 | -      | 30.03.2013 |
| 584      | Spectrum Analyzer                       | FSU 8                       | 100248                     | Rohde & Schwarz             | 12 M                    | -      | 31.03.2013 |
| 594      | Wideband Radio Communication Tester     | CMW500                      | 101757                     | Rohde & Schwarz             | 24 M                    | -      | 31.03.2014 |
| 597      | Univ. Radio Communication Tester        | CMU 200                     | 100347                     | Rohde & Schwarz             | 12 M                    | -      | 31.03.2013 |
| 598      | Spectrum Analyzer                       | FSEM 30 (Reserve)           | 831259/013                 | Rohde & Schwarz             | 24 M                    | -      | 13.01.2013 |
| 600      | power meter                             | NRVD (Reserve)              | 834501/018                 | Rohde & Schwarz             | 24 M                    | -      | 31.03.2013 |
| 601      | medium-sensitivity diode sensor         | NRV-Z5 (Reserve)            | 8435323/003                | Rohde & Schwarz             | 24 M                    | -      | 12.01.2013 |
| 602      | peak power sensor                       | NRV-Z32 (Reserve)           | 835080                     | Rohde & Schwarz             | 24 M                    | -      | 12.01.2013 |
| 608      | UltraLog-Antenna                        | HL 562                      | 830547/009                 | Rohde & Schwarz             | 36/12 M                 | -      | 31.03.2014 |
| 611      | DC power supply                         | E3632A                      | KR 75305854                | Agilent                     | pre-m                   | 2      |            |
| 612      | DC power supply                         | E3632A                      | MY 40001321                | Agilent                     | pre-m                   | 2      |            |
| 613      | Attenuator                              | R416120000 20dB 10W         | Lot. 9828                  | Radiall                     | pre-m                   | 2      |            |
| 616      | Digitalmultimeter                       | Fluke 177                   | 88900339                   | Fluke                       | 24 M                    | -      | 31.03.2014 |
| 617      | Power Splitter/Combiner                 | ZFSC-2-2-S+                 | S F987001108               | Mini Circuits               | -                       | 2      |            |
| 618      | Power Splitter/Combiner                 | 50PD-634                    | 600994                     | JFW Industries USA          | -                       | 2      |            |
| 619      | Power Splitter/Combiner                 | 50PD-634                    | 600995                     | JFW Industries, USA         | -                       | 3      |            |
| 620      | EMI Test Receiver                       | ESU 26                      | 100362                     | Rohde-Schwarz               | 12 M                    | -      | 01.01.2013 |
| 621      | Step Attenuator 0-139 dB                | RSP                         | 100017                     | Rohde & Schwarz             | pre-m                   | 2      |            |
| 625      | Generic Test Load USB                   | Generic Test Load USB       | -                          | CETECOM                     | -                       | 2      |            |
| 627      | data logger                             | OPUS 1                      | 201.0999.9302.6.4.1.4<br>3 | G. Luft GmbH                | 24 M                    | -      | 30.05.2014 |
| 634      | Spectrum Analyzer                       | FSM (HF-Unit)               | 826188/010                 | Rohde & Schwarz             | pre-m                   | 2      |            |
| 635      | DFS Testbox                             | DFS Testbox                 | 2012 V01                   | CETECOM SHA                 | -                       | -      |            |
| 636      | Wärmebildkamera                         | Ti32                        | Ti32-12060213, Tele        | Fluke Corporation           | 24 M                    | -      | 31.07.2014 |
| 637      | High Speed HDMI with Ethernet 1m        | HDMI cable with Ethernet 1m | -                          | KogiLink                    | -                       | 2      |            |
| 638      | HDMI Kabel with Ethernet 1,5 m flach    | HDMI cable with Ethernet    | -                          | Reichelt                    | -                       | 2      |            |
| 640      | HDMI cable 2m rund                      | HDMI cable 2m rund          | -                          | Reichelt                    | -                       | 2      |            |
| 641      | HDMI cable with Ethernet                | Certified HDMI cable with   | -                          | PureLink                    | -                       | 2      |            |
| 642      | Wideband Radio Communication Tester     | CMW 500                     | 126089                     | Rohde&Schwarz               | 24 M                    | -      | 31.03.2014 |

### 8.1.3. Legend

| Note / remarks |     | Calibrated during system calibration:                                                     |
|----------------|-----|-------------------------------------------------------------------------------------------|
|                | 1a  | System CTC-SAR-EMS (Ref.-No. 442)                                                         |
|                | 1b  | System-CTC-EMS-Conducted (Ref.-No. 335)                                                   |
|                | 1c  | System CTC-FAR-EMI-RSE (Ref.-No . 443)                                                    |
|                | 1d  | System CTC-SAR-EMI (Ref.-No . 441)                                                        |
|                | 1e  | System CTC-OATS (EMI radiated) (Ref.-No. 337)                                             |
|                | 1 f | System CTC-CTIA-OTA (Ref.-No . 420)                                                       |
|                | 1 g | System CTC-FAR-EMS (Ref.-No . 444)                                                        |
|                | 2   | Calibration or equipment check immediately before measurement                             |
|                | 3   | Regulatory maintained equipment for functional check or support purpose                   |
|                | 4   | Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment |
|                | 5   | Test System                                                                               |

| Interval of calibration |         |                                                                               |
|-------------------------|---------|-------------------------------------------------------------------------------|
|                         | 12 M    | 12 month                                                                      |
|                         | 24 M    | 24 month                                                                      |
|                         | 36 M    | 36 month                                                                      |
|                         | 24/12 M | Calibration every 24 months, between this every 12 months internal validation |
|                         | 36/12 M | Calibration every 36 months, between this every 12 months internal validation |
|                         | Pre-m   | Check before starting the measurement                                         |
|                         | -       | Without calibration                                                           |

## 9. Versions of test reports (change history)

| Version           | Applied changes               | Date of release |
|-------------------|-------------------------------|-----------------|
| 6-0196-12-1-2b    | Initial release               | 2012-09-17      |
| 6-0196-12-1-2b-C1 | FCC-ID and IC Number included | 2014-09-15      |
| --                | --                            | --              |