



REPORT No.: SZ15050155W01

FCC RF TEST REPORT

APPLICANT : Testo Instruments (Shenzhen) Co., Ltd
PRODUCT NAME : testo Saveris 2
MODEL NAME : T1
TRADE NAME : testo
BRAND NAME : testo
FCC ID : 2ACVD-05722001
STANDARD(S) : 47 CFR Part 15 Subpart C
ISSUE DATE : 2015-7-17



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION.....4

1. TECHNICAL INFORMATION5

1.1 APPLICANT INFORMATION5

1.2 EQUIPMENT UNDER TEST (EUT) DESCRIPTION5

1.2.1 IDENTIFICATION OF ALL USED EUTS5

1.3 TEST STANDARDS AND RESULTS6

1.3.1 TEST ENVIRONMENT CONDITIONS6

2. 47 CFR PART 15C REQUIREMENTS.....7

2.1 ANTENNA REQUIREMENT7

2.1.1 APPLICABLE STANDARD7

2.1.2 RESULT: COMPLIANT7

2.2 PEAK OUTPUT POWER.....7

2.2.1 REQUIREMENT7

2.2.2 TEST DESCRIPTION7

2.2.3 TEST RESULT.....8

2.3 BANDWIDTH9

2.3.1 REQUIREMENT9

2.3.2 TEST DESCRIPTION9

2.3.3 TEST RESULT.....9

2.4 CONDUCTED SPURIOUS EMISSIONS AND BAND EDGE16

2.4.1 REQUIREMENT 16

2.4.2 TEST DESCRIPTION 16

2.4.3 TEST RESULT..... 16

2.5 POWER SPECTRAL DENSITY (PSD)26

2.5.1 REQUIREMENT 26

2.5.2 TEST DESCRIPTION 26

2.5.3 TEST RESULT..... 27

2.6 RESTRICTED FREQUENCY BANDS33

2.6.1 REQUIREMENT 33

2.6.2 TEST DESCRIPTION 33

2.6.3 TEST RESULT..... 34



2.7 CONDUCTED EMISSION.....42
2.7.1 REQUIREMENT..... 42
2.7.2 TEST DESCRIPTION 42
2.7.3 TEST RESULT..... 43
2.8 RADIATED EMISSION45
2.8.1 REQUIREMENT..... 45
2.8.2 TEST DESCRIPTION 46
2.8.3 TEST RESULT..... 48

ANNEX A GENERAL INFORMATION.....58

| Change History | | |
|----------------|-----------|-------------------|
| Issue | Date | Reason for change |
| 1.0 | 2015-7-17 | First edition |
| | | |

**TEST REPORT DECLARATION**

| | |
|----------------------|--|
| Applicant | Testo Instruments (Shenzhen) Co., Ltd |
| Applicant Address | Block A, B4 Building, China Merchants Guangming Sci&Tech Park, No.3009 Guan Guang Road, Guangming New District, Shenzhen City |
| Manufacturer | Testo Instruments (Shenzhen) Co., Ltd |
| Manufacturer Address | Block A, B4 Building, China Merchants Guangming Sci&Tech Park, No.3009 Guan Guang Road, Guangming New District, Shenzhen City |
| Product Name | testo Saveris 2 |
| Model Name | T1 |
| Brand Name | testo |
| HW Version | V1.1 |
| SW Version | V1.42 |
| Test Standards | 47 CFR Part 15 Subpart C |
| Test Date | 2014-7-21 to 2015-6-30 |
| Test Result | PASS |

Tested by : Zou Jian
Zou Jian(Test Engineer)

Reviewed by : Qiu Xiaojun
Qiu Xiaojun(RF Manager)

Approved by : Zeng Dexin
Zeng Dexin(Chief Engineer)



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 Applicant Information

| | |
|----------|--|
| Company: | Testo Instruments (Shenzhen) Co., Ltd |
| Address: | Block A, B4 Building, China Merchants Guangming Sci&Tech Park, No.3009 Guan Guang Road, Guangming New District, Shenzhen City |

1.2 Equipment under Test (EUT) Description

| | |
|------------------|--|
| Brand Name: | testo |
| Trade Name: | testo |
| Model Name: | T1 |
| Frequency Range: | 802.11b/g/n-20MHz: 2.412GHz - 2.462GHz |
| Channel Number: | 802.11b/g/n-20MHz: 11 |
| Modulation Type: | DSSS, OFDM |
| Antenna Type: | PFIA Antenna |
| Antenna Gain: | -3.4dBi |

NOTE:

The EUT is a testo Saveris 2, it contains WIFI Module operating at 2.4GHz ISM; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.

For 802.11b/g/n-20MHz (2.4GHz band), the frequencies allocated is $F \text{ (MHz)} = 2412 + 5 * (n - 1)$ ($1 \leq n \leq 11$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

The antenna connector of EUT is designed with permanent attachment and no consideration of replacement.

1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

| EUT Identity | Hardware Version | Software Version |
|--------------|------------------|------------------|
| A01 | V1.1 | V1.42 |



1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

| No. | Identity | Document Title |
|-----|-------------------------------------|-------------------------|
| 1 | 47 CFR Part 15 (10-1-13 Edition) | Radio Frequency Devices |

Test detailed items/section required by FCC rules and results are as below:

| No. | Section | Description | Test Date | Result |
|-----|-------------------|---|--------------|-------------|
| 1 | 15.203 | Antenna Requirement | N.A | <u>PASS</u> |
| 2 | 15.247(b) | Peak Output Power | Jul 23, 2014 | <u>PASS</u> |
| 3 | 15.247(a) | Bandwidth | Jul 23, 2014 | <u>PASS</u> |
| 4 | 15.247(d) | Conducted Spurious Emission and Band Edge | Jul 23, 2014 | <u>PASS</u> |
| 5 | 15.247(d) | Restricted Frequency Bands | Jun 30, 2015 | <u>PASS</u> |
| 6 | 15.207 | Conducted Emission | Jul 26, 2014 | <u>PASS</u> |
| 7 | 15.209 ,15.247(d) | Radiated Emission | Jun 30, 2015 | <u>PASS</u> |
| 8 | 15.247(e) | Power spectral density (PSD) | Jul 23, 2014 | <u>PASS</u> |

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.4 2009.

These RF tests were performed according to the method of measurements prescribed in KDB558074 D01 v03r03 (06/09/2015).

1.3.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

| | |
|-----------------------------|---------|
| Temperature (°C): | 15 - 35 |
| Relative Humidity (%): | 30 -60 |
| Atmospheric Pressure (kPa): | 86-106 |

2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2 Peak Output Power

2.2.1 Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2 Test Description

KDB 558074 Section 9.1.3 was used in order to prove compliance.

The measured output power was calculated by the reading of the Power Meter and calibration.

A. Test Setup:



The EUT (Equipment under the test) which is coupled to the Power Meter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in power meter.

**B. Equipments List:**

Please reference ANNEX A(1.4).

2.2.3 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

2.2.3.1 802.11b Test Mode

| Channel | Frequency (MHz) | Measured Output Peak Power | | Limit | | Verdict |
|---------|-----------------|----------------------------|----------|-------|---|---------|
| | | dBm | W | dBm | W | |
| 1 | 2412 | 14.12 | 0.025823 | 30 | 1 | PASS |
| 6 | 2437 | 13.13 | 0.020559 | | | PASS |
| 11 | 2462 | 13.39 | 0.021827 | | | PASS |

2.2.3.2 802.11g Test mode

| Channel | Frequency (MHz) | Measured Output Peak Power | | Limit | | Verdict |
|---------|-----------------|----------------------------|----------|-------|---|---------|
| | | dBm | W | dBm | W | |
| 1 | 2412 | 16.44 | 0.044055 | 30 | 1 | PASS |
| 6 | 2437 | 15.64 | 0.036644 | | | PASS |
| 11 | 2462 | 15.61 | 0.036392 | | | PASS |

2.2.3.3 802.11n-20MHz Test mode

| Channel | Frequency (MHz) | Measured Output Peak Power | | Limit | | Verdict |
|---------|-----------------|----------------------------|----------|-------|---|---------|
| | | dBm | W | dBm | W | |
| 1 | 2412 | 16.82 | 0.048084 | 30 | 1 | PASS |
| 6 | 2437 | 15.59 | 0.036224 | | | PASS |
| 11 | 2462 | 15.38 | 0.034514 | | | PASS |


2.3 Bandwidth

2.3.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2 Test Description

A. Test Set:

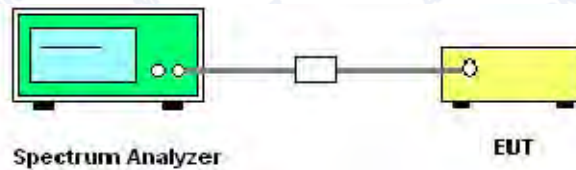

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 8.1 Option 1 was used in order to prove compliance.

B. Equipments List:

Please reference ANNEX A(1.4).

2.3.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.




2.3.3.1 802.11b Test mode


A. Test Verdict:

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Limits(kHz) | Result |
|---------|-----------------|----------------------|-------------|--------|
| 1 | 2412 | 10.139 | ≥500 | PASS |
| 6 | 2437 | 10.120 | ≥500 | PASS |
| 11 | 2462 | 9.666 | ≥500 | PASS |


B. Test Plots

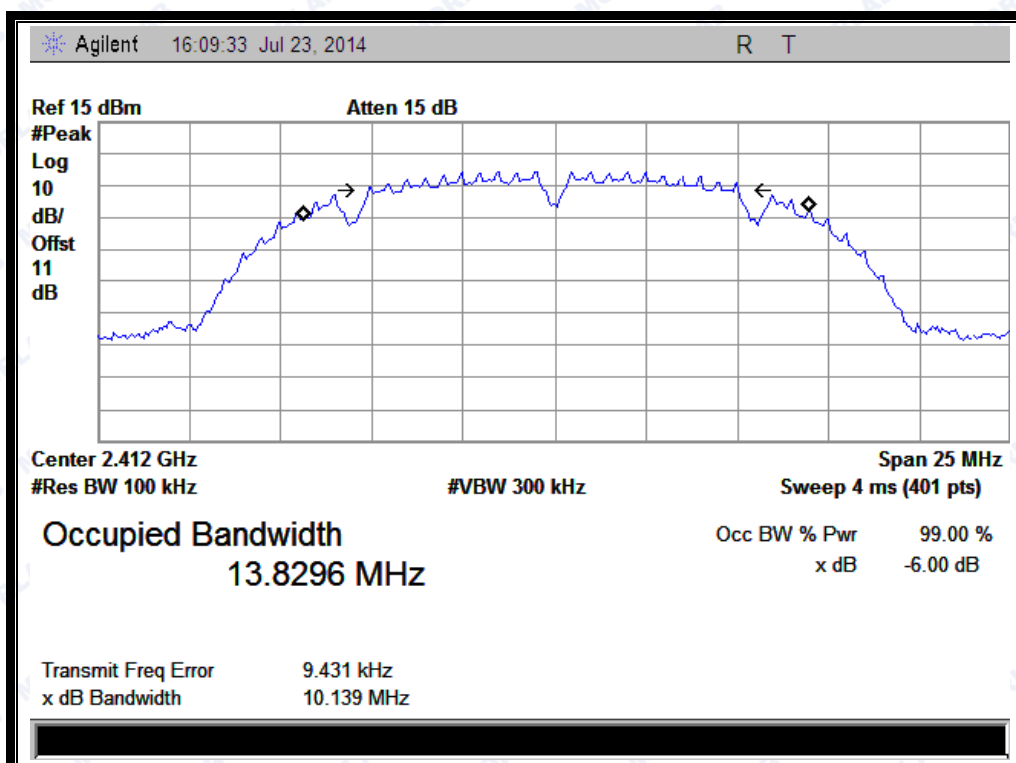

(Channel 1: 2412MHz @ 802.11b)

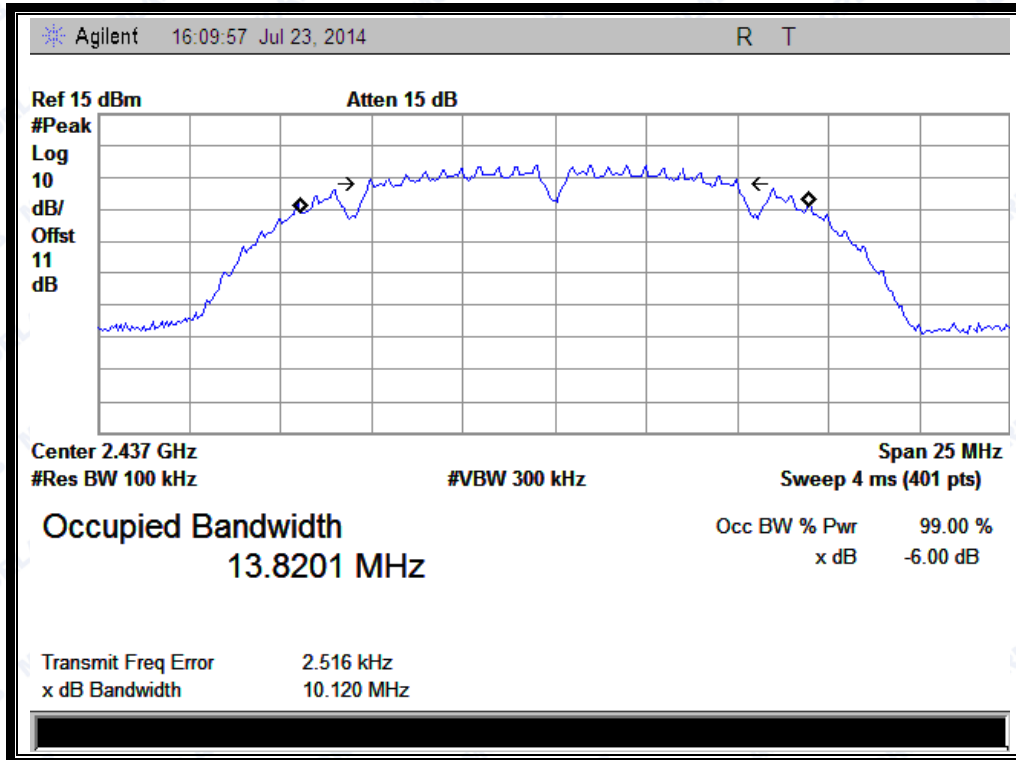

(Channel 6: 2437 MHz @ 802.11b)

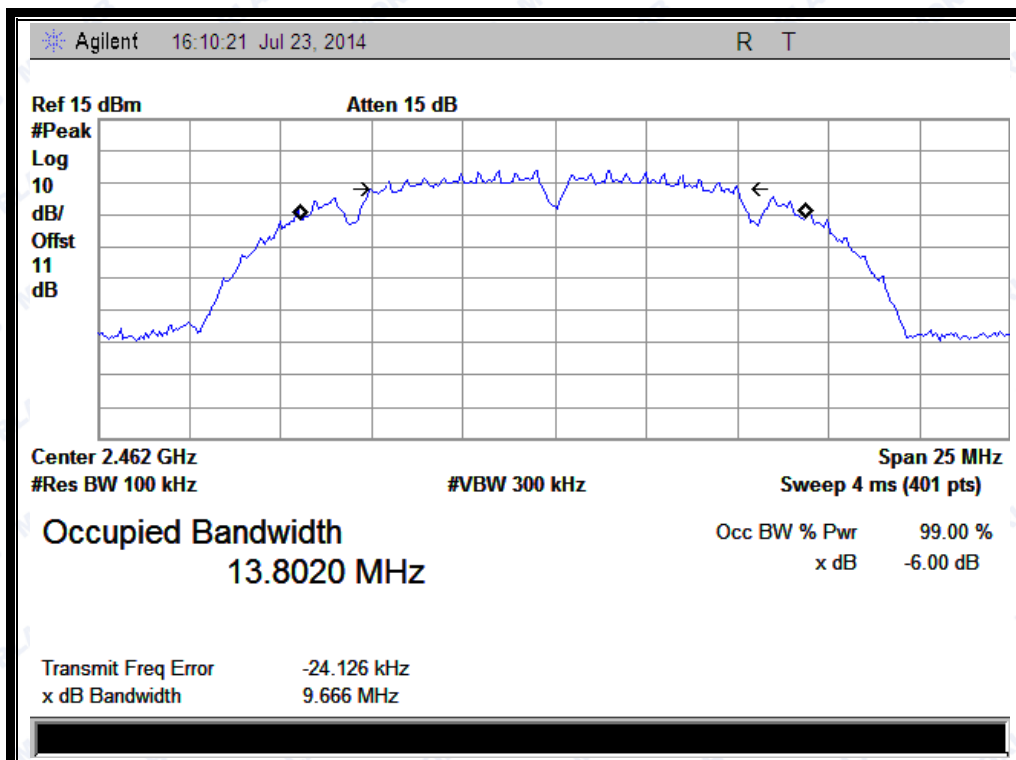

(Channel 11: 2462MHz @ 802.11b)




2.3.3.2 802.11g Test mode


A. Test Verdict:

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Limits (kHz) | Result |
|---------|-----------------|----------------------|--------------|--------|
| 1 | 2412 | 16.555 | ≥500 | PASS |
| 6 | 2437 | 16.580 | ≥500 | PASS |
| 11 | 2462 | 16.575 | ≥500 | PASS |


B. Test Plots:

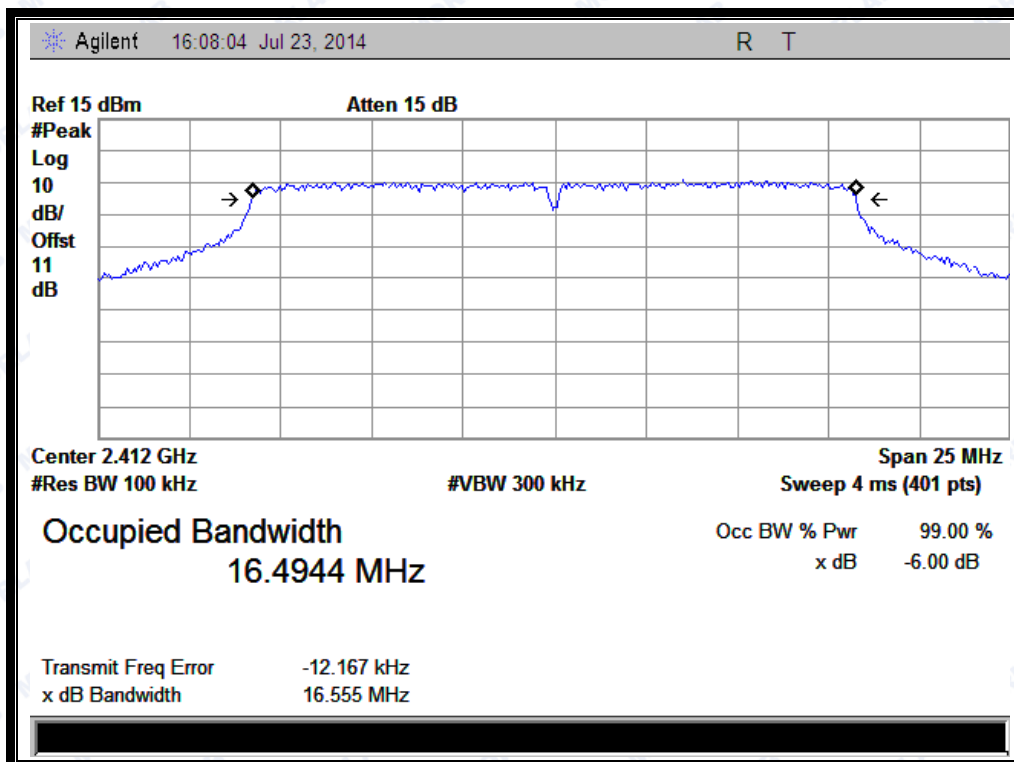

(Channel 1: 2412MHz @ 802.11g)

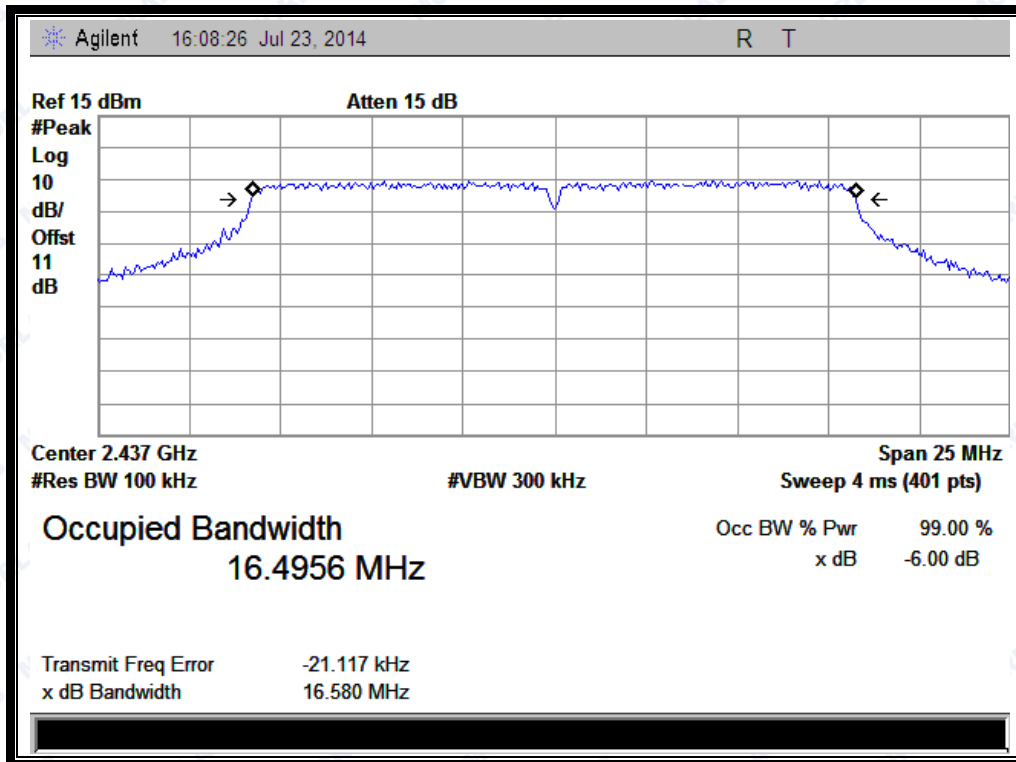

(Channel 6: 2437MHz @ 802.11g)

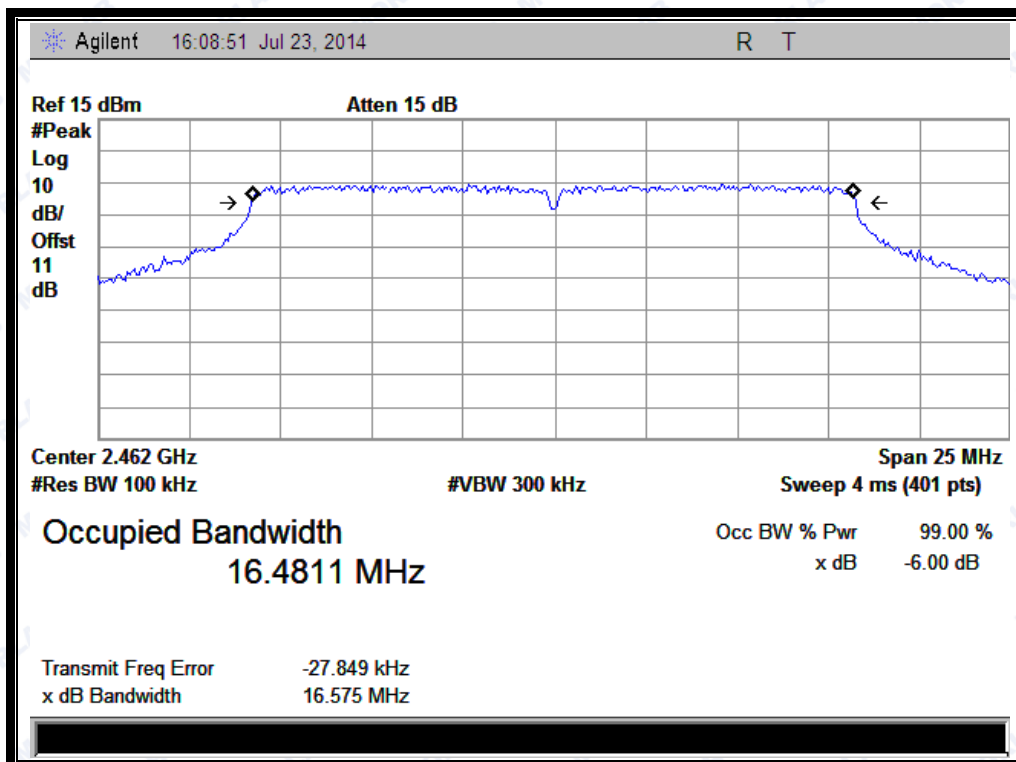

(Channel 11: 2462MHz @ 802.11g)




2.3.3.3 802.11n-20 Test mode


A. Test Verdict:

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Limits (kHz) | Result |
|---------|-----------------|----------------------|--------------|--------|
| 1 | 2412 | 17.797 | ≥500 | PASS |
| 6 | 2437 | 17.743 | ≥500 | PASS |
| 11 | 2462 | 17.802 | ≥500 | PASS |


B. Test Plots:

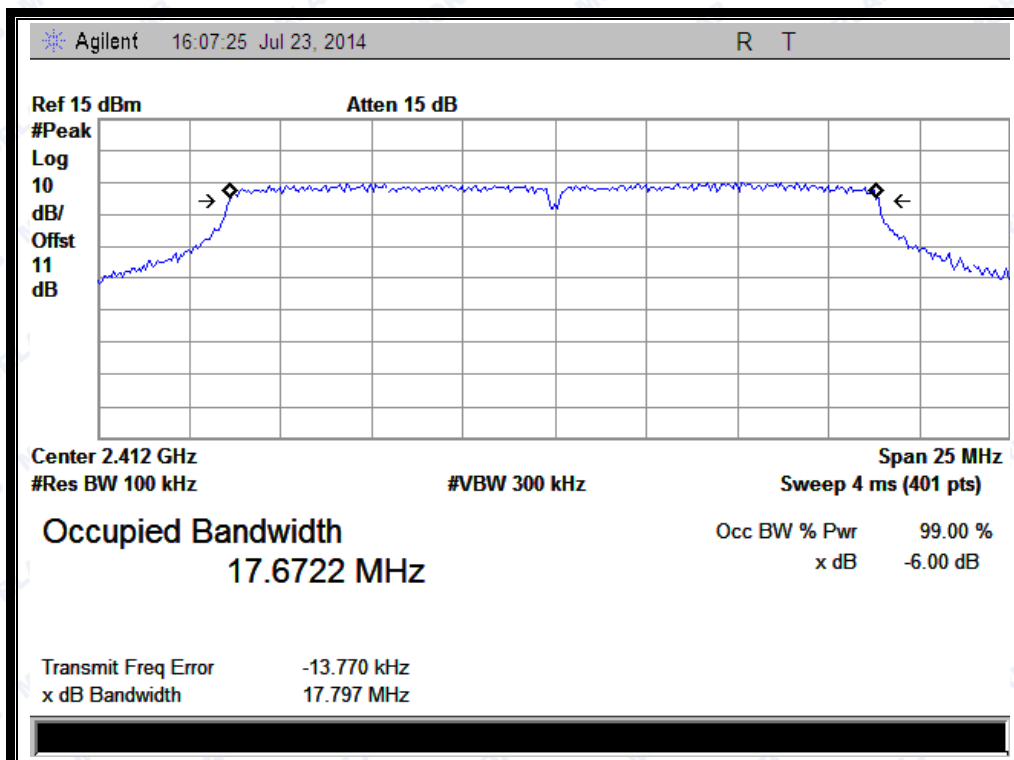

(Channel 1: 2412MHz @ 802.11n-20)

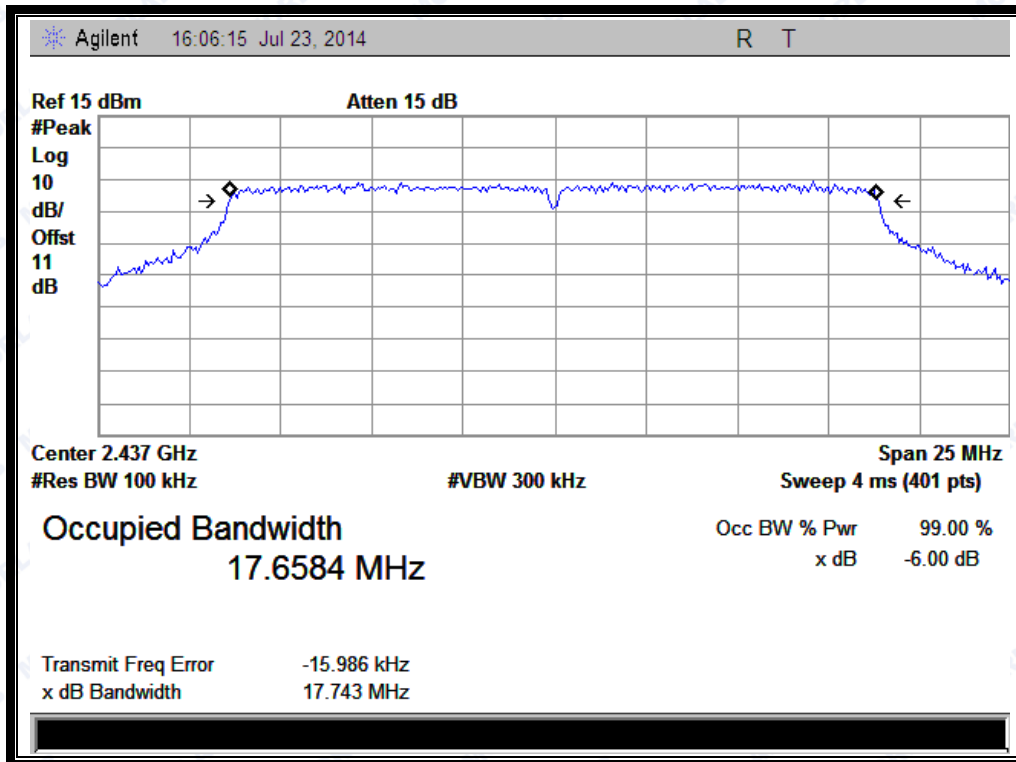

(Channel 6: 2437MHz @ 802.11n-20)

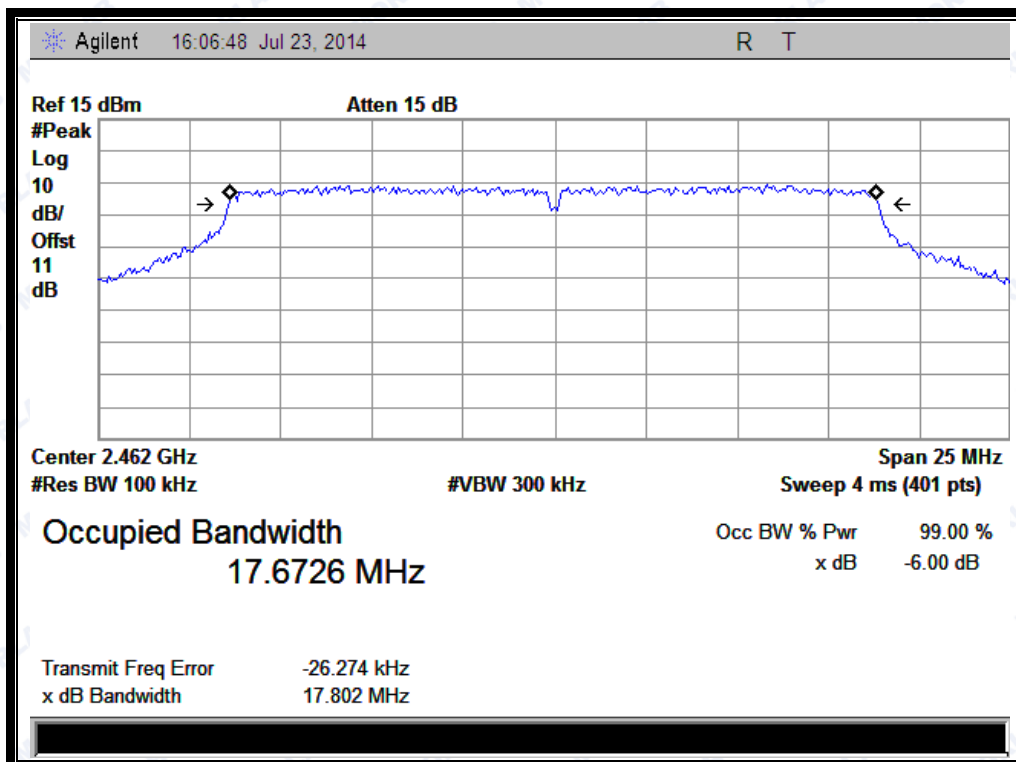

(Channel 11: 2462MHz @ 802.11n-20)


2.4 Conducted Spurious Emissions and Band Edge

2.4.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2 Test Description

A. Test Set:

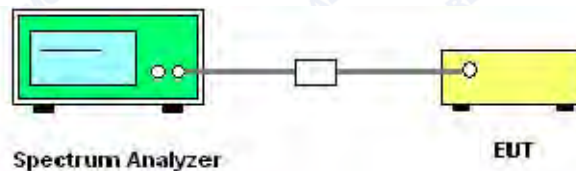

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 11.0 was used in order to prove compliance.

B. Equipments List:

Please reference ANNEX A(1.4).

2.4.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.




2.4.3.1 802.11b Test mode

A. Test Verdict:


| Channel | Frequency (MHz) | Measured Max. Out of Band Emission (dBm) | Limit (dBm) | | Verdict |
|---------|-----------------|--|---------------|-------------------------|---------|
| | | | Carrier Level | Calculated -20dBc Limit | |
| 1 | 2412 | -47.56 | -0.922 | -20.9 | PASS |
| 6 | 2437 | -47.64 | -3.498 | -23.5 | PASS |
| 11 | 2462 | -46.42 | -1.827 | -21.8 | PASS |

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

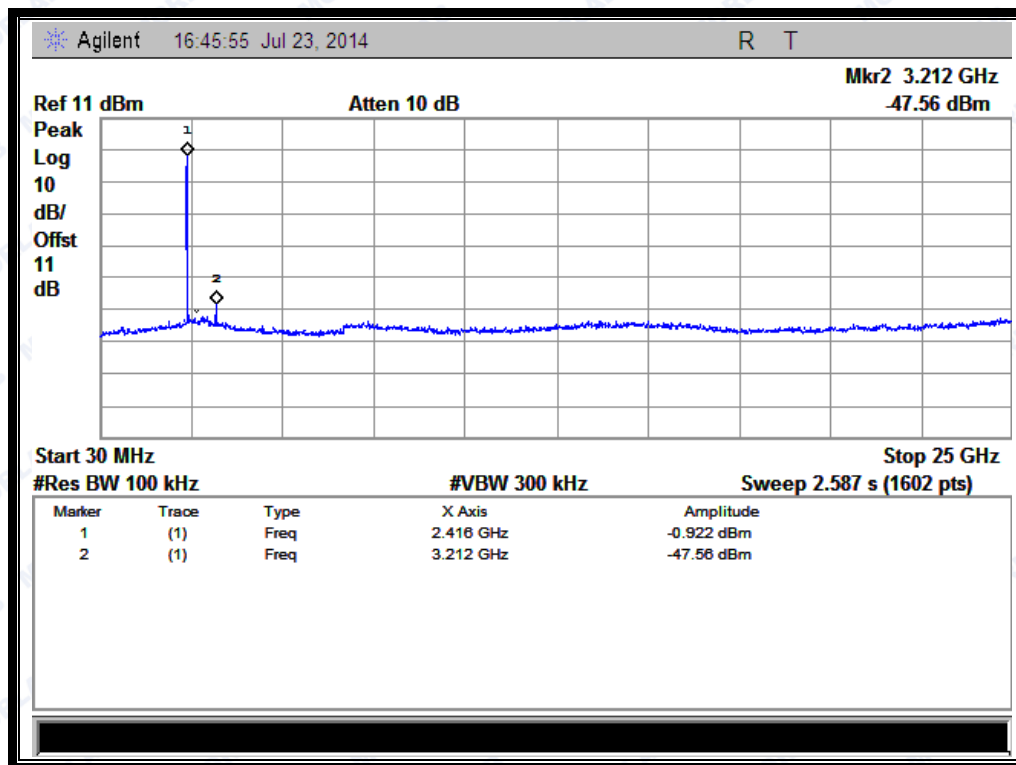


(Channel = 1, 30MHz to 25GHz)

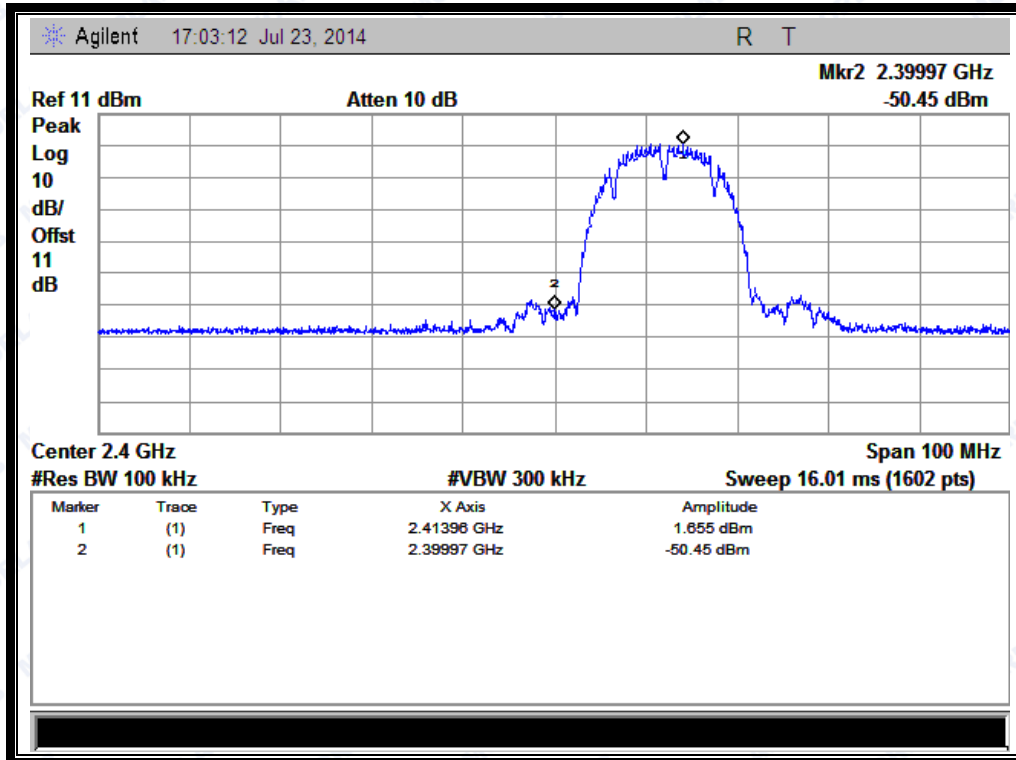


(Band Edge @ Channel = 1)

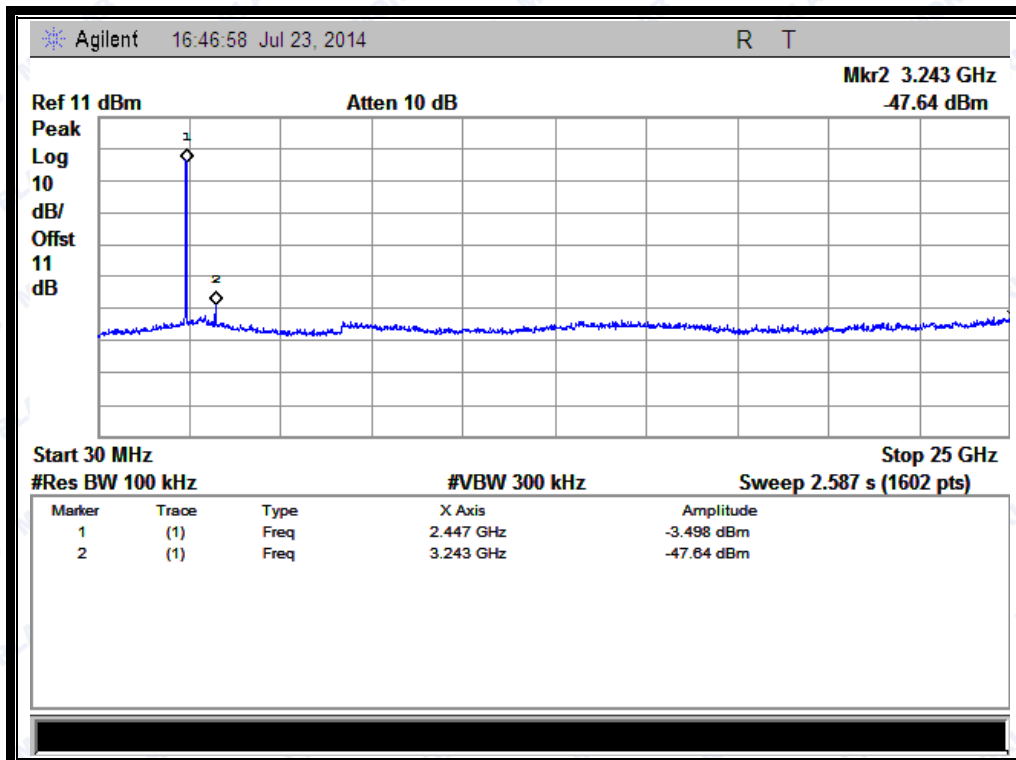

(Channel = 6, 30MHz to 25GHz)

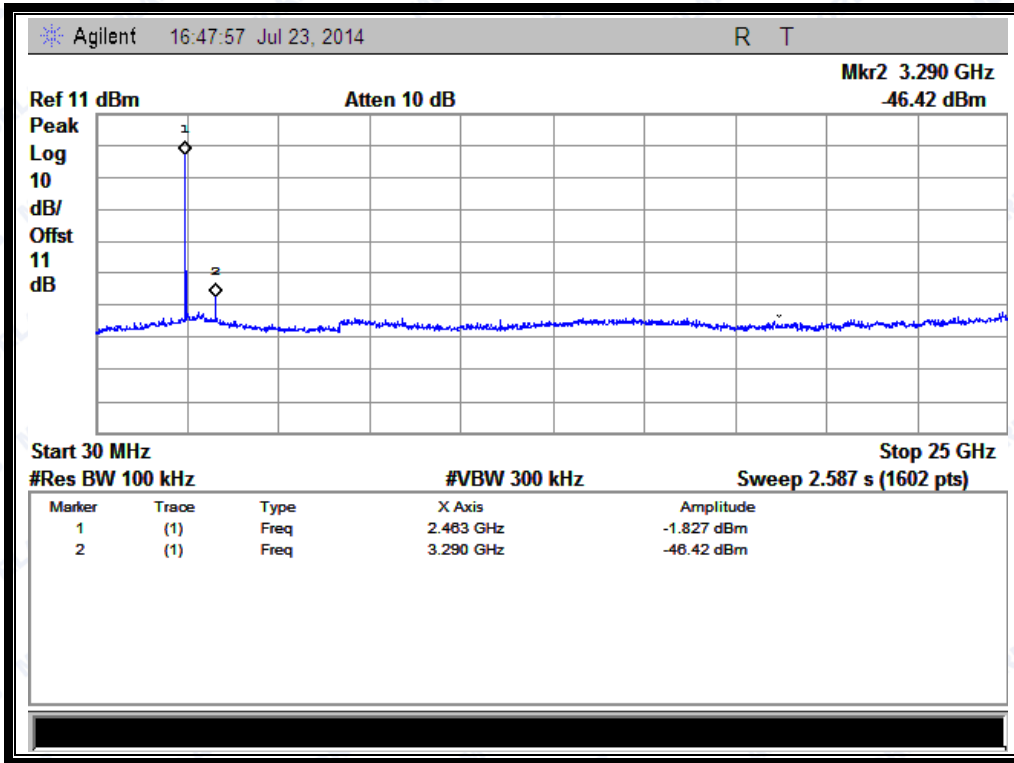

(Channel = 11, 30MHz to 25GHz)

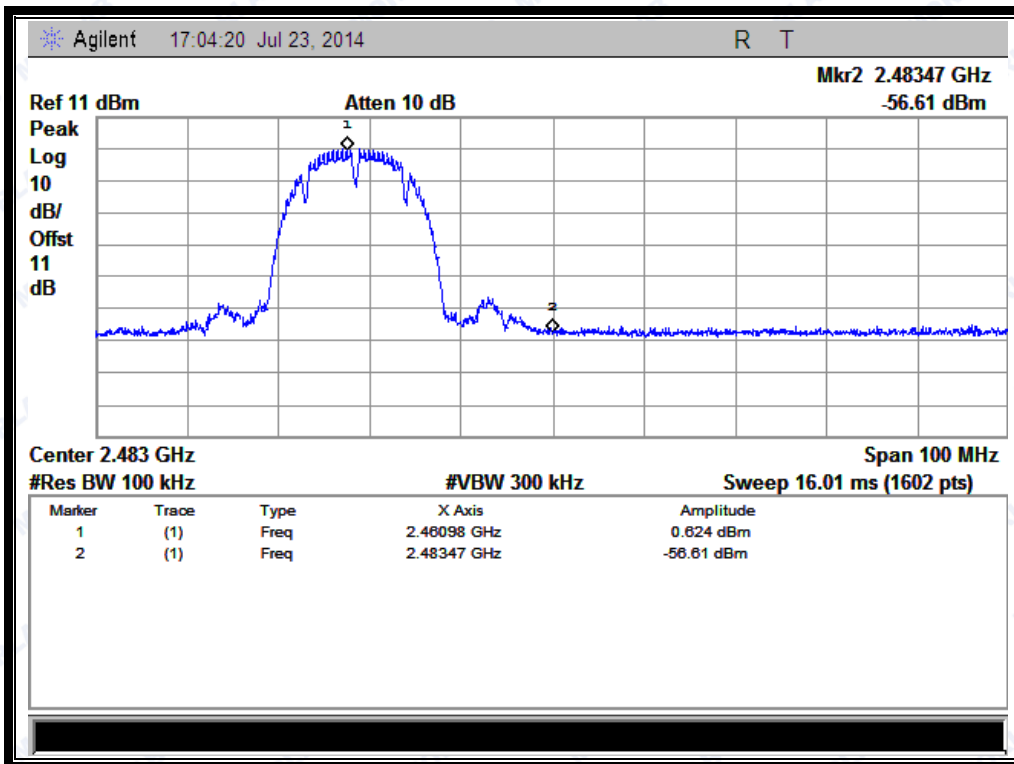

(Band Edge @ Channel = 11)




2.4.3.2 802.11g Test mode

A. Test Verdict:


| Channel | Frequency (MHz) | Measured Max. Out of Band Emission (dBm) | Limit (dBm) | | Verdict |
|---------|-----------------|--|---------------|-------------------------|---------|
| | | | Carrier Level | Calculated -20dBc Limit | |
| 1 | 2412 | -47.16 | -5.332 | -25.3 | PASS |
| 6 | 2437 | -46.64 | -6.324 | -26.3 | PASS |
| 11 | 2462 | -46.28 | -1.827 | -21.8 | PASS |

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

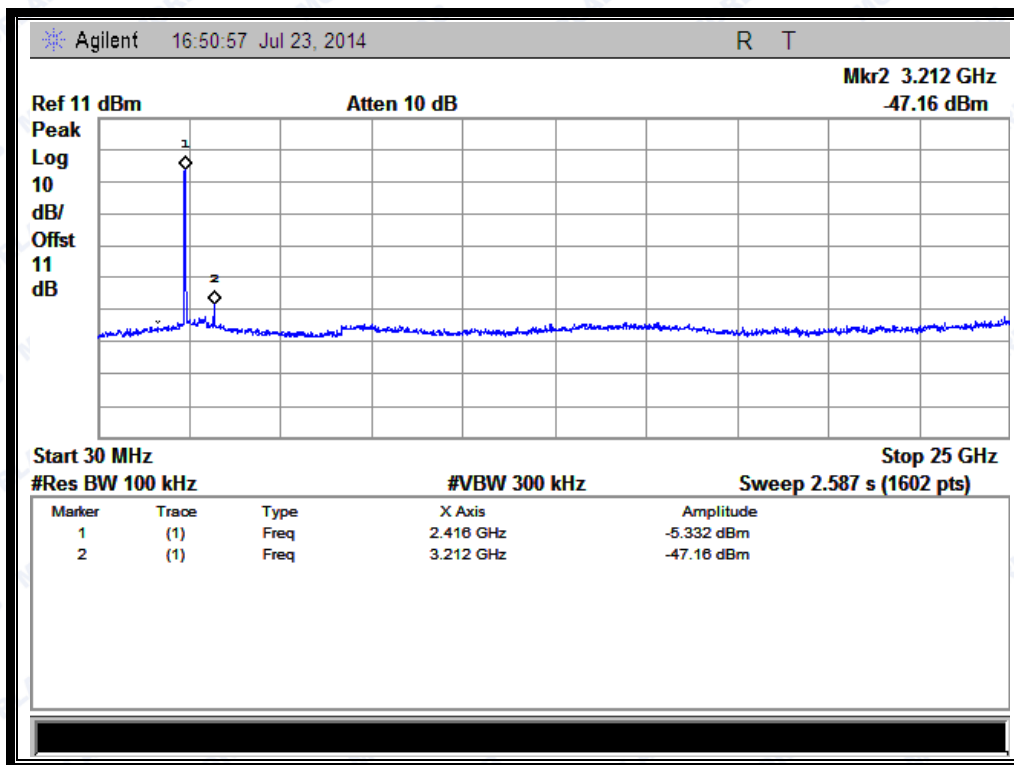


(Channel = 1, 30MHz to 25GHz)

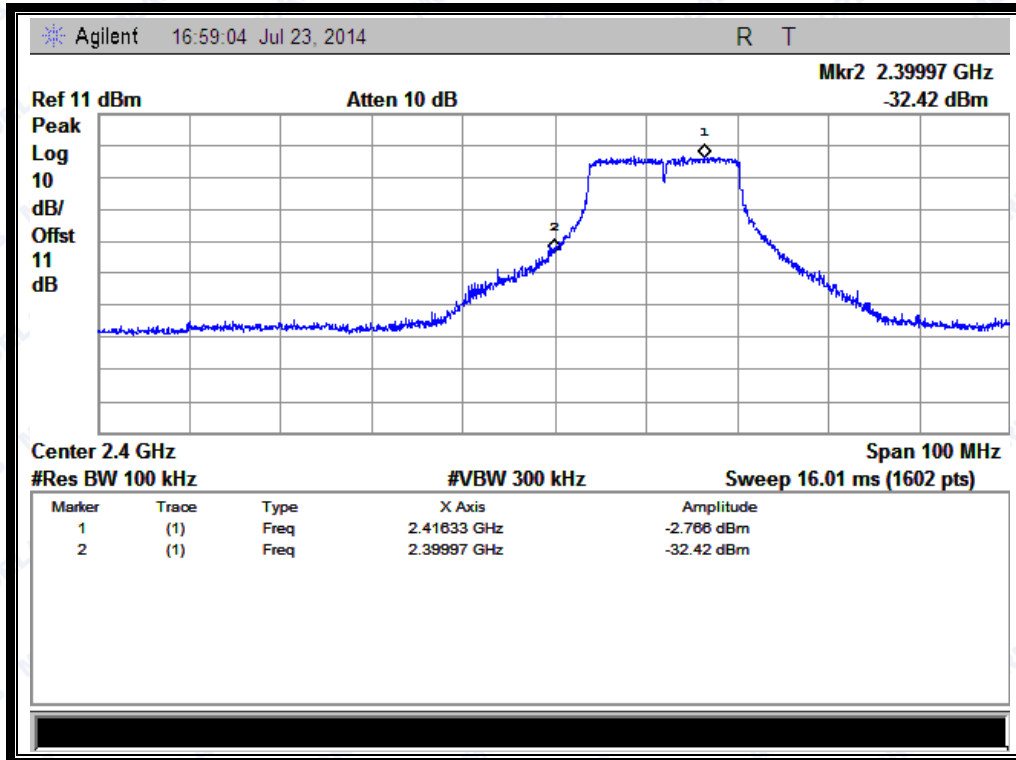


(Band Edge @ Channel = 1)

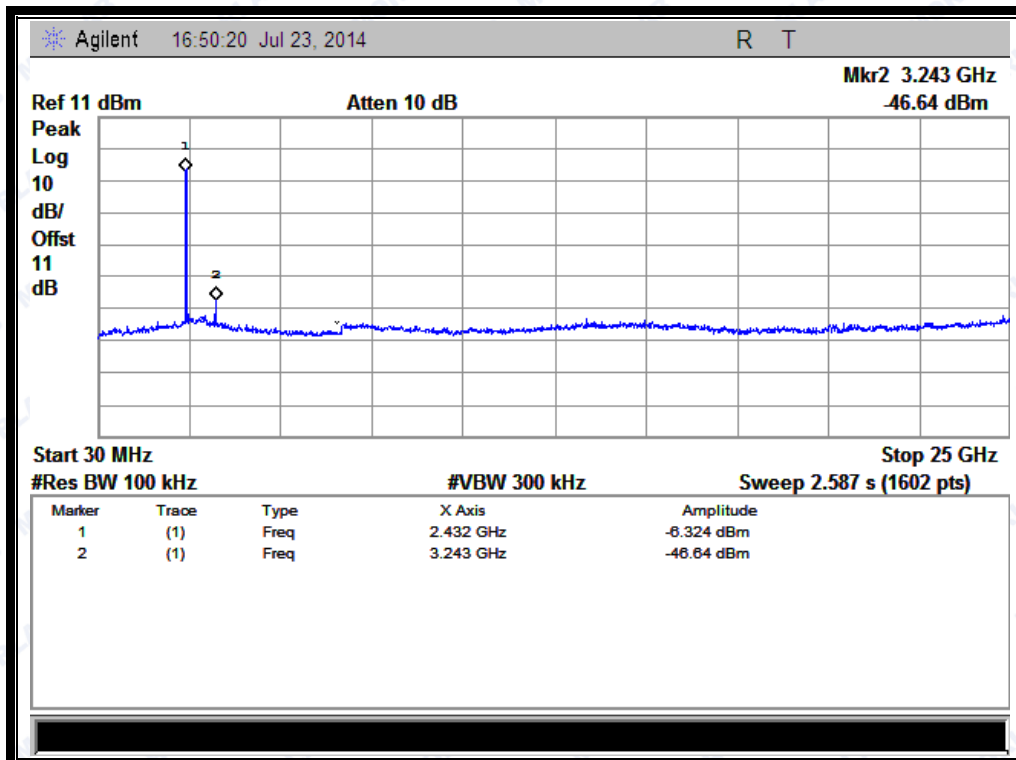

(Channel = 6, 30MHz to 25GHz)

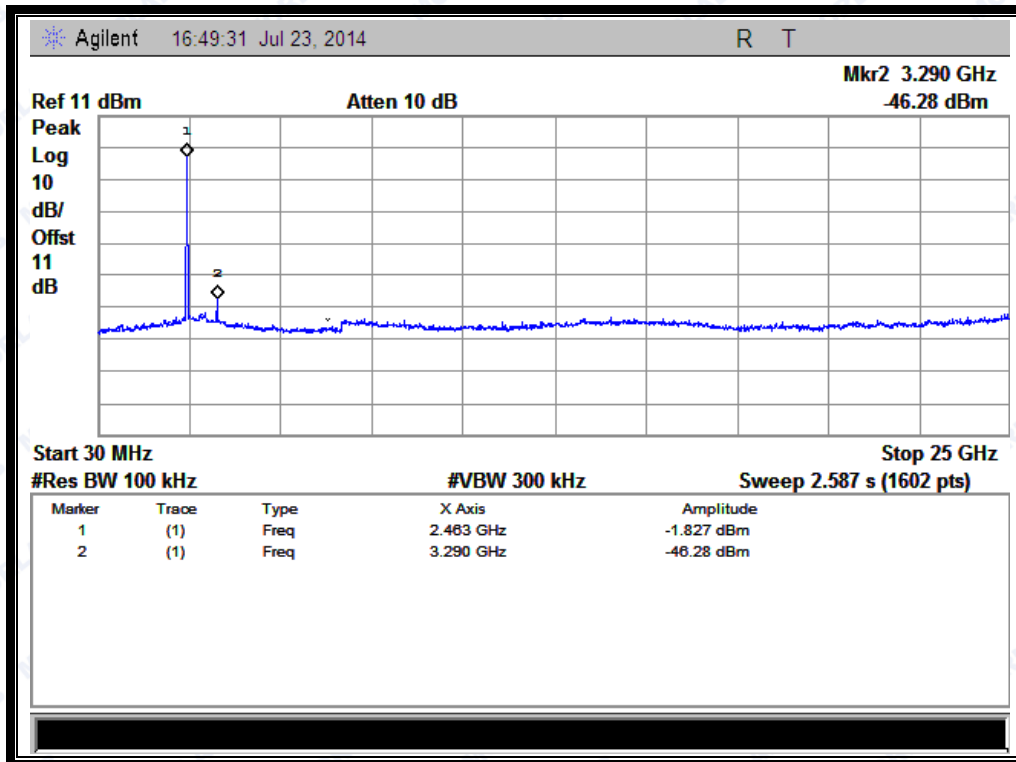

(Channel = 11, 30MHz to 25GHz)

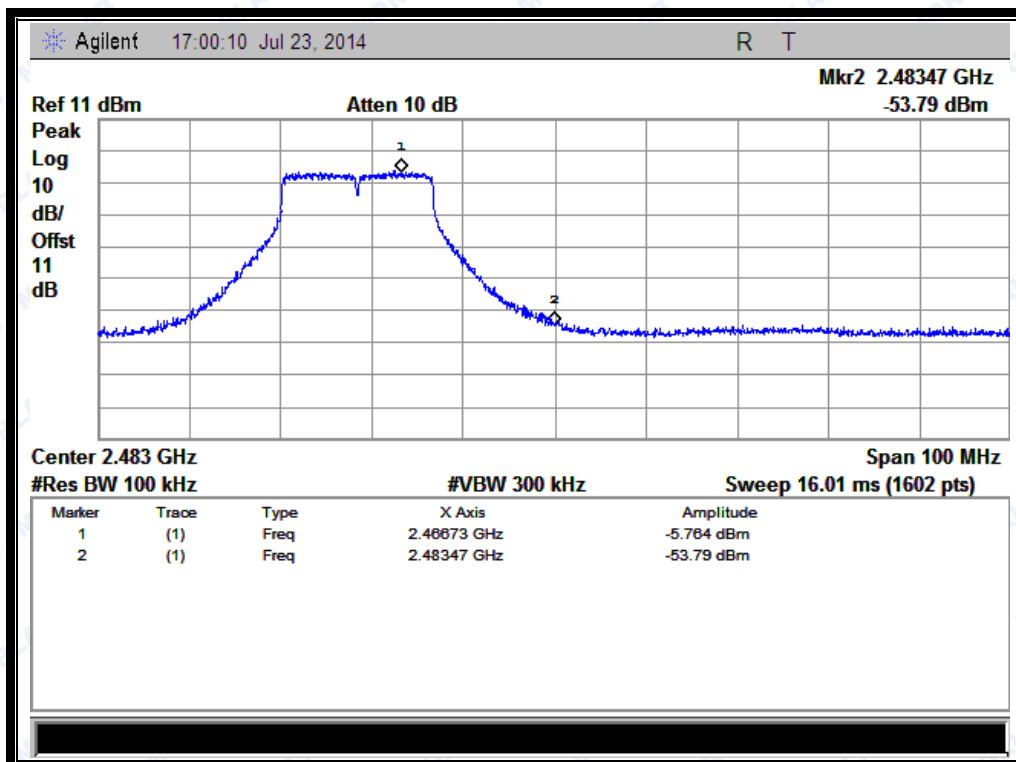

(Band Edge @ Channel = 11)




2.4.3.3 802.11n -20MHz Test mode

A. Test Verdict:


| Channel | Frequency (MHz) | Measured Max. Out of Band Emission (dBm) | Limit (dBm) | | Verdict |
|---------|-----------------|--|---------------|-------------------------|---------|
| | | | Carrier Level | Calculated -20dBc Limit | |
| 1 | 2412 | -46.96 | -5.45 | -25.5 | PASS |
| 6 | 2437 | -46.82 | -6.155 | -26.2 | PASS |
| 11 | 2462 | -46.91 | -6.172 | -26.2 | PASS |

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

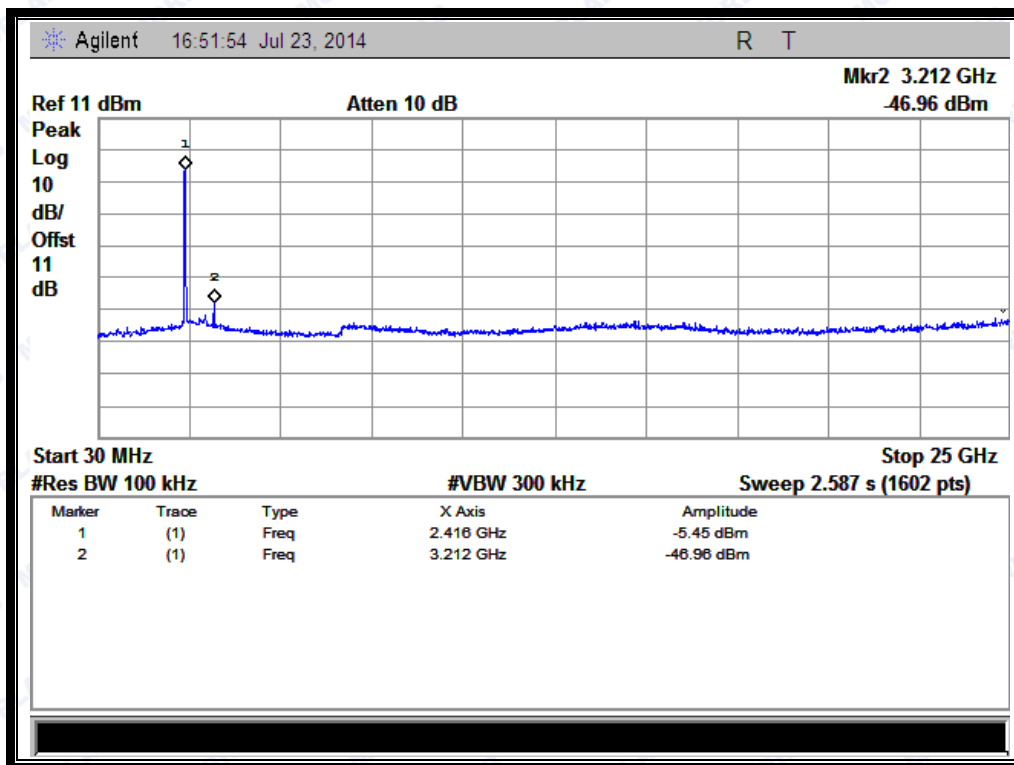


(Channel = 1, 30MHz to 25GHz)

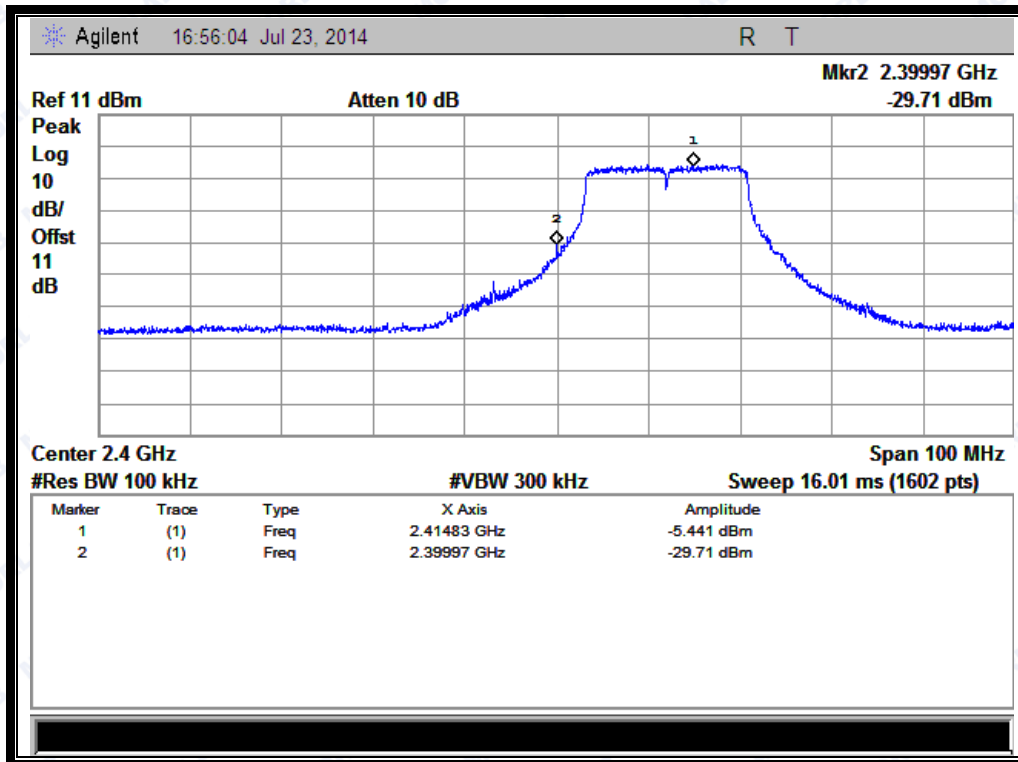


(Band Edge @ Channel = 1)

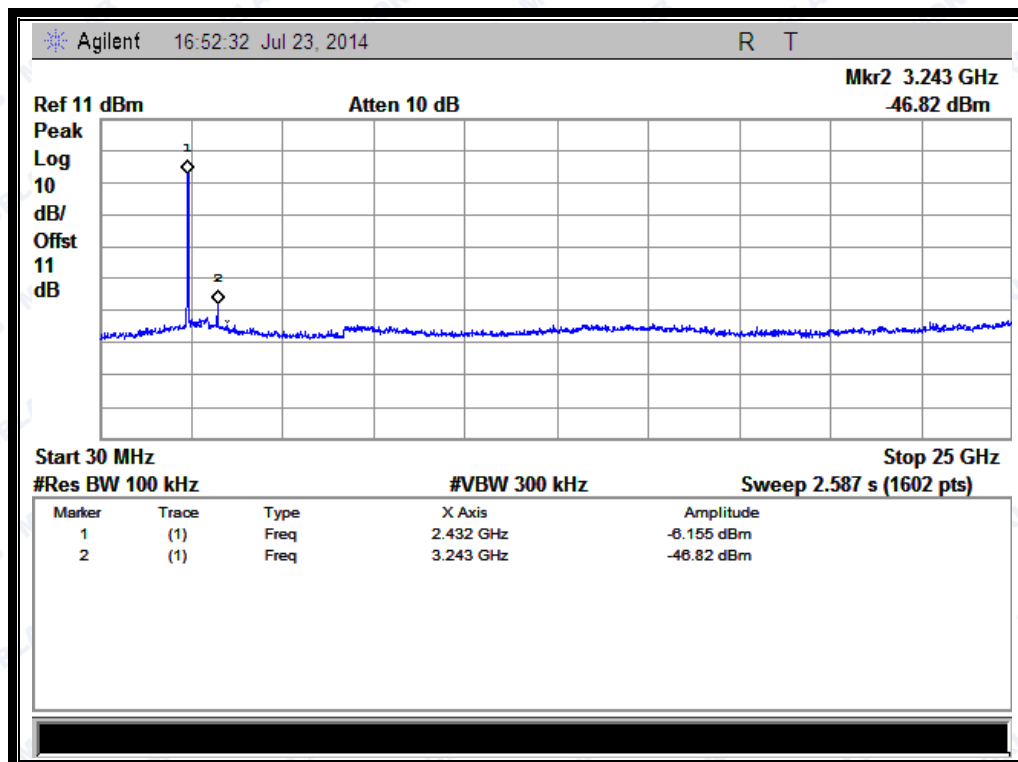

(Channel = 6, 30MHz to 25GHz)

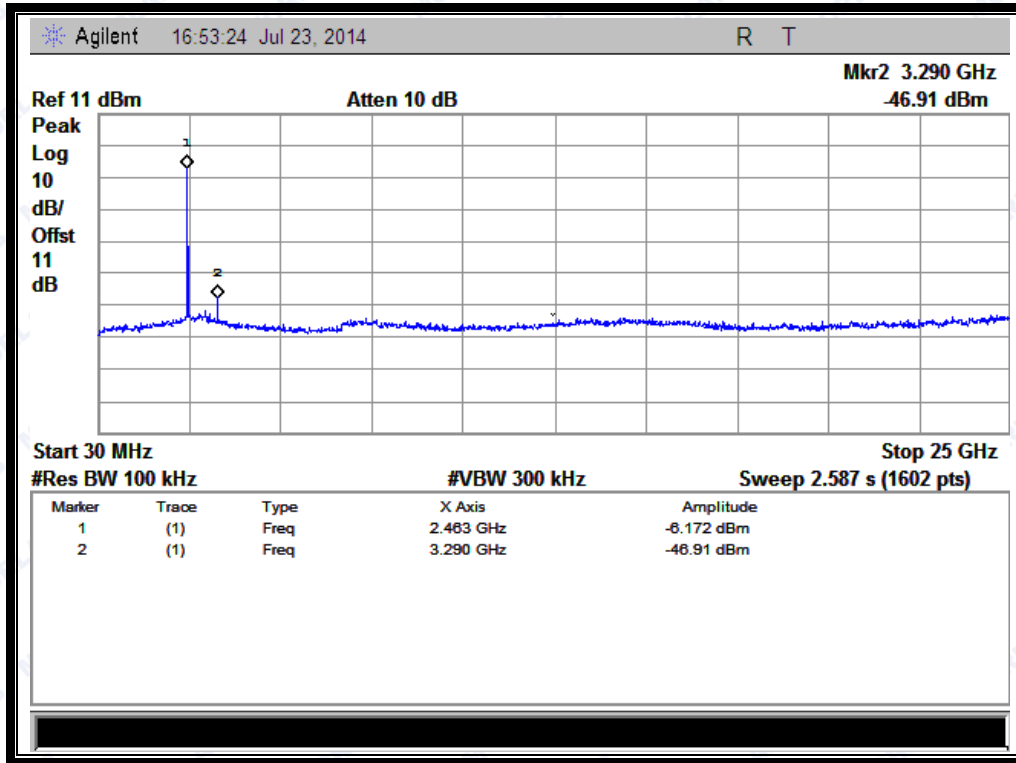

(Channel = 11, 30MHz to 25GHz)

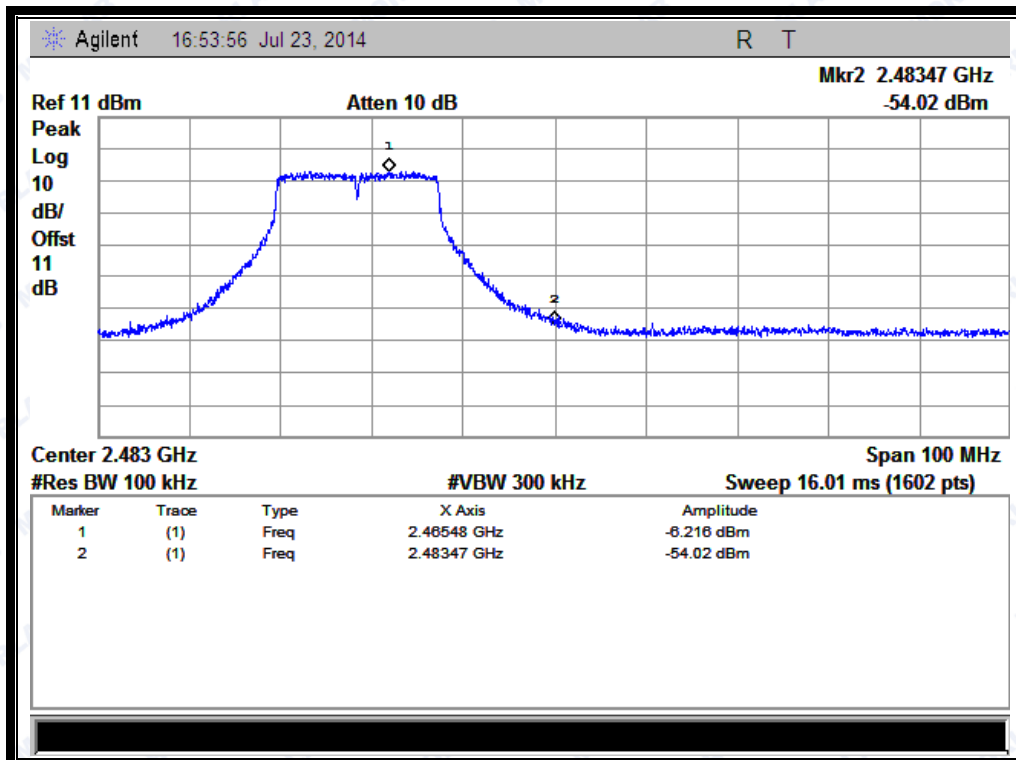

(Band Edge @ Channel = 11)


2.5 Power spectral density (PSD)

2.5.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.5.2 Test Description

A. Test Set:

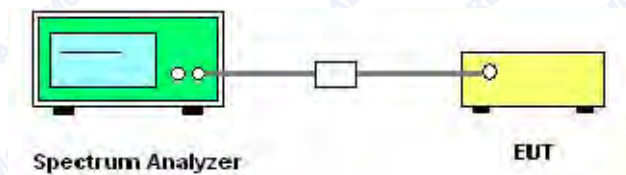

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

KDB 558074 Section 10.2 was used in order to prove compliance.

B. Equipments List:

Please reference ANNEX A(1.4).




2.5.3 Test Result

2.5.3.1 802.11b Test mode


A. Test Verdict:

| Spectral power density (dBm/3kHz) | | | | |
|-----------------------------------|-----------------|-------------------------|------------------|---------|
| Channel | Frequency (MHz) | Measured PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
| 1 | 2412 | -12.64 | 8 | PASS |
| 6 | 2437 | -13.09 | 8 | PASS |
| 11 | 2462 | -13.78 | 8 | PASS |
| Measurement uncertainty: ±1.3dB | | | | |


B. Test Plots:

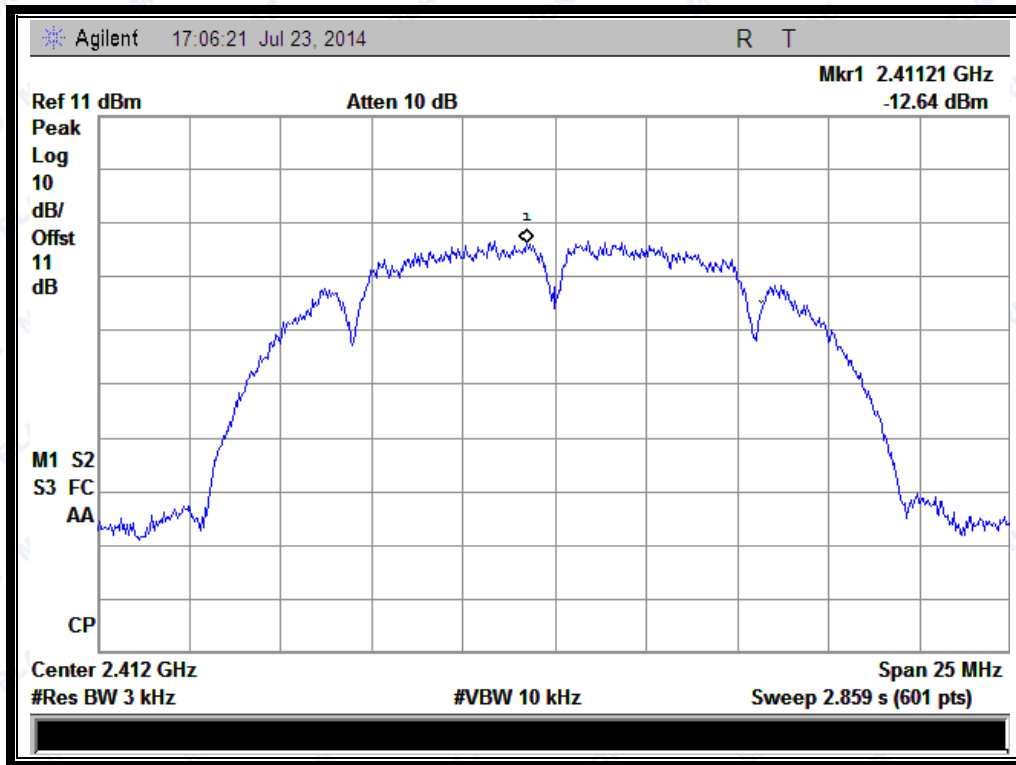

(Channel = 1 @ 802.11b)

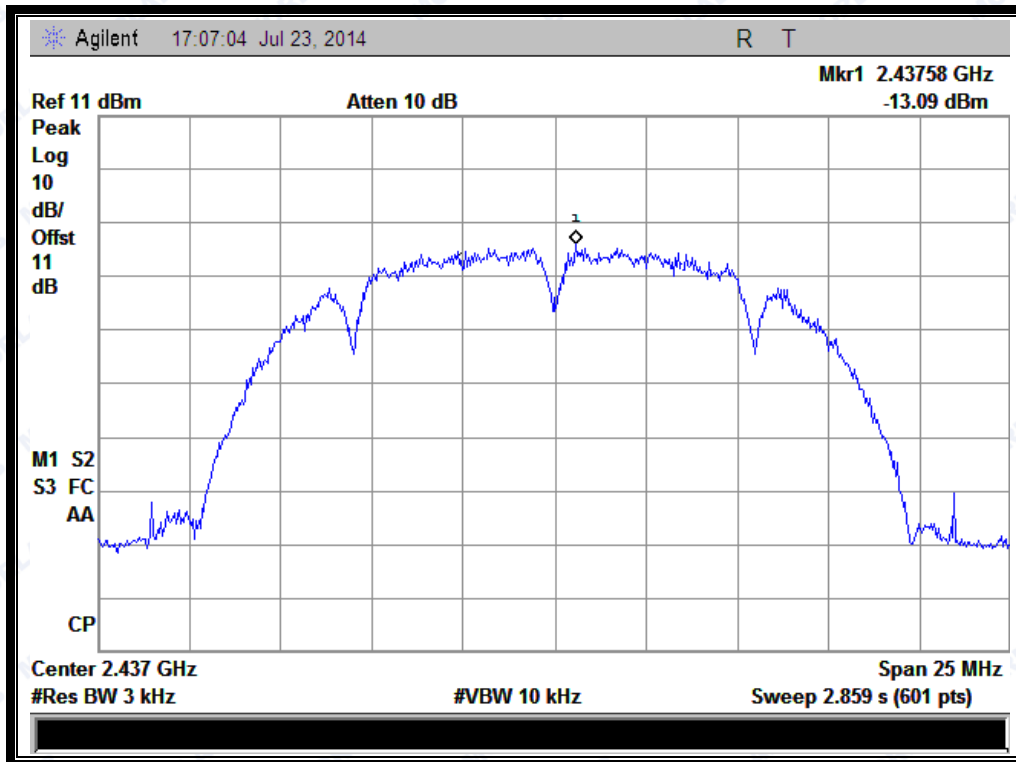

(Channel = 6 @ 802.11b)

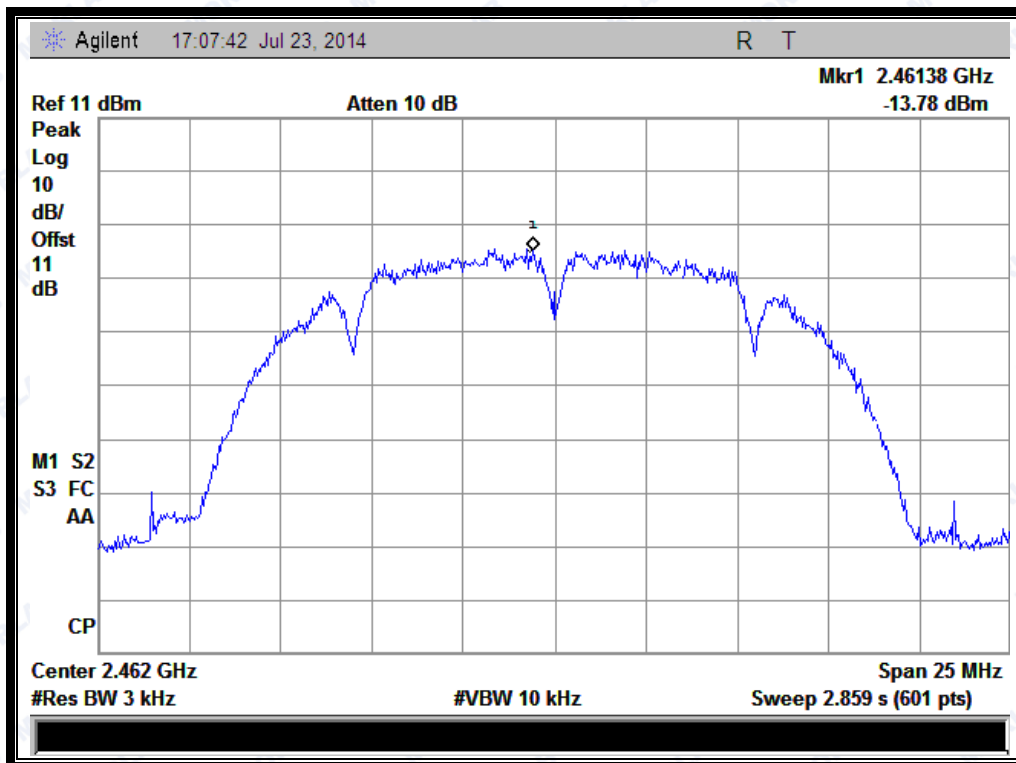

(Channel = 11 @ 802.11b)




2.5.3.2 802.11g Test mode

A. Test Verdict:


| Spectral power density (dBm/3kHz) | | | | |
|-----------------------------------|-----------------|-------------------------|------------------|---------|
| Channel | Frequency (MHz) | Measured PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
| 1 | 2412 | -12.95 | 8 | PASS |
| 6 | 2437 | -12.99 | 8 | PASS |
| 11 | 2462 | -13.45 | 8 | PASS |

Measurement uncertainty: ± 1.3 dB


B. Test Plots:

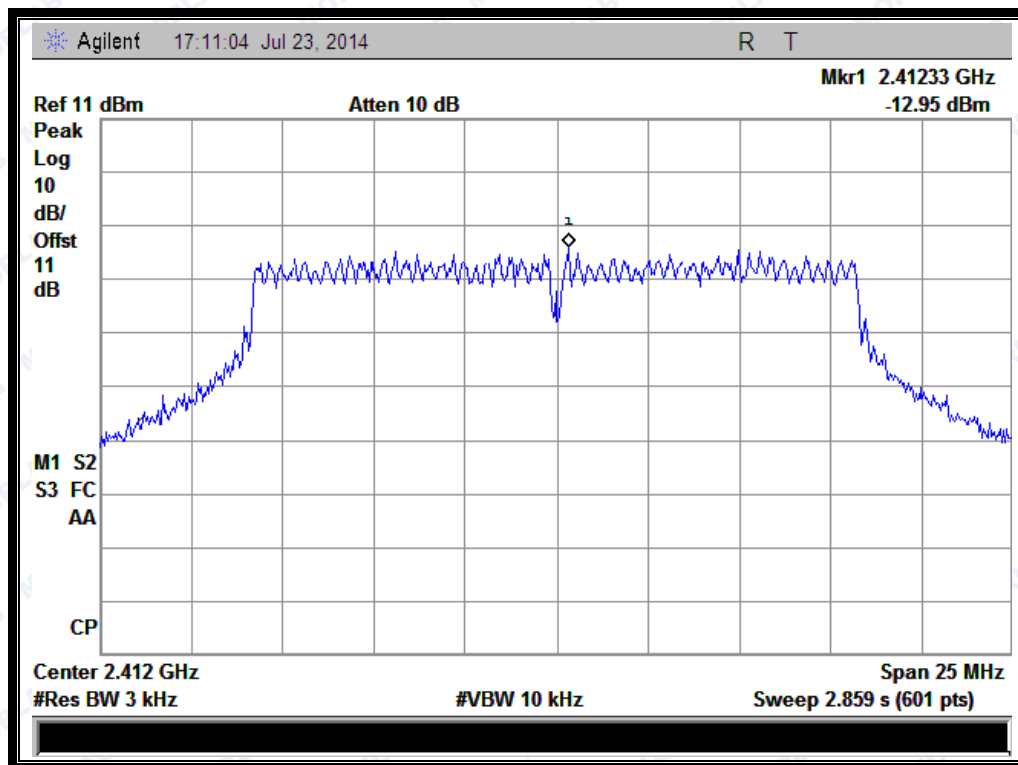

(Channel = 1 @ 802.11g)

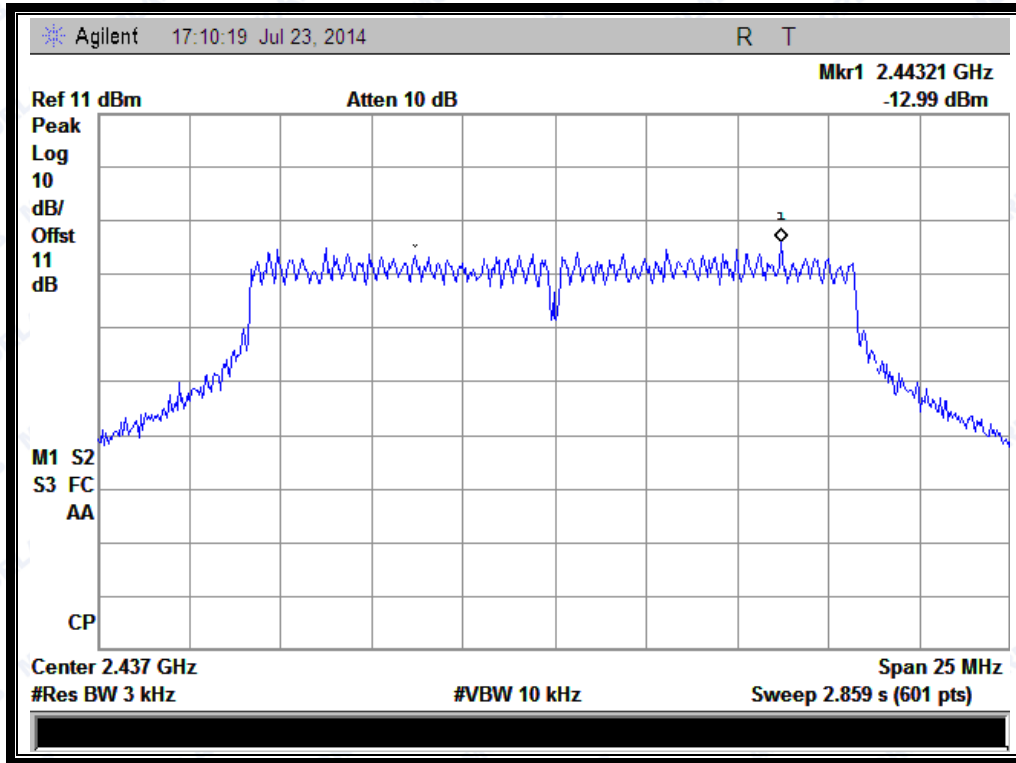

(Channel = 6 @ 802.11g)

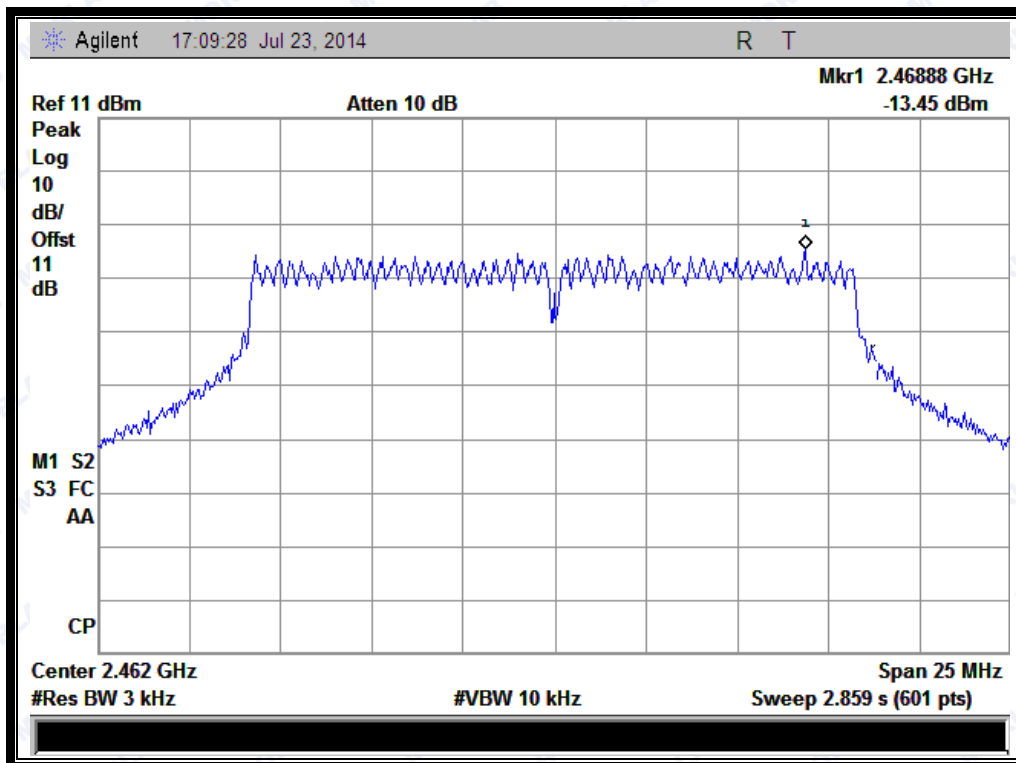

(Channel = 11 @ 802.11g)




2.5.3.3 802.11n-20MHz Test mode

A. Test Verdict:


| Spectral power density (dBm/3kHz) | | | | |
|-----------------------------------|-----------------|-------------------------|------------------|---------|
| Channel | Frequency (MHz) | Measured PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
| 1 | 2412 | -13.43 | 8 | PASS |
| 6 | 2437 | -15.76 | 8 | PASS |
| 11 | 2462 | -14.09 | 8 | PASS |

Measurement uncertainty: $\pm 1.3\text{dB}$


B. Test Plots:

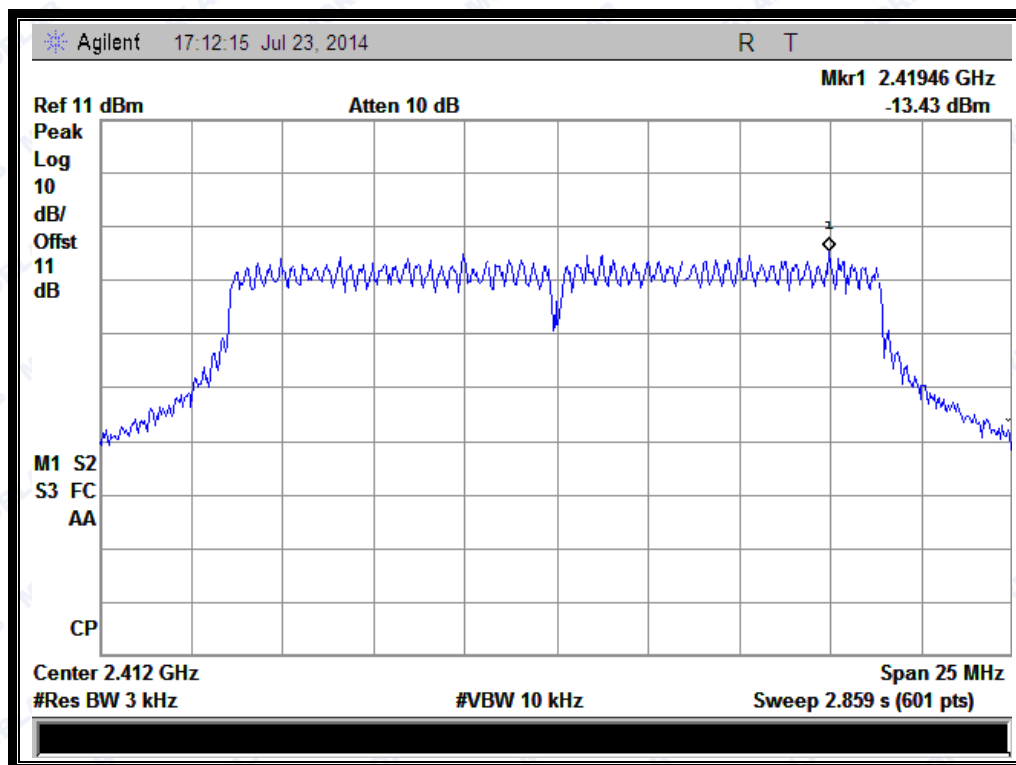

(Channel = 1 @ 802.11n-20MHz)

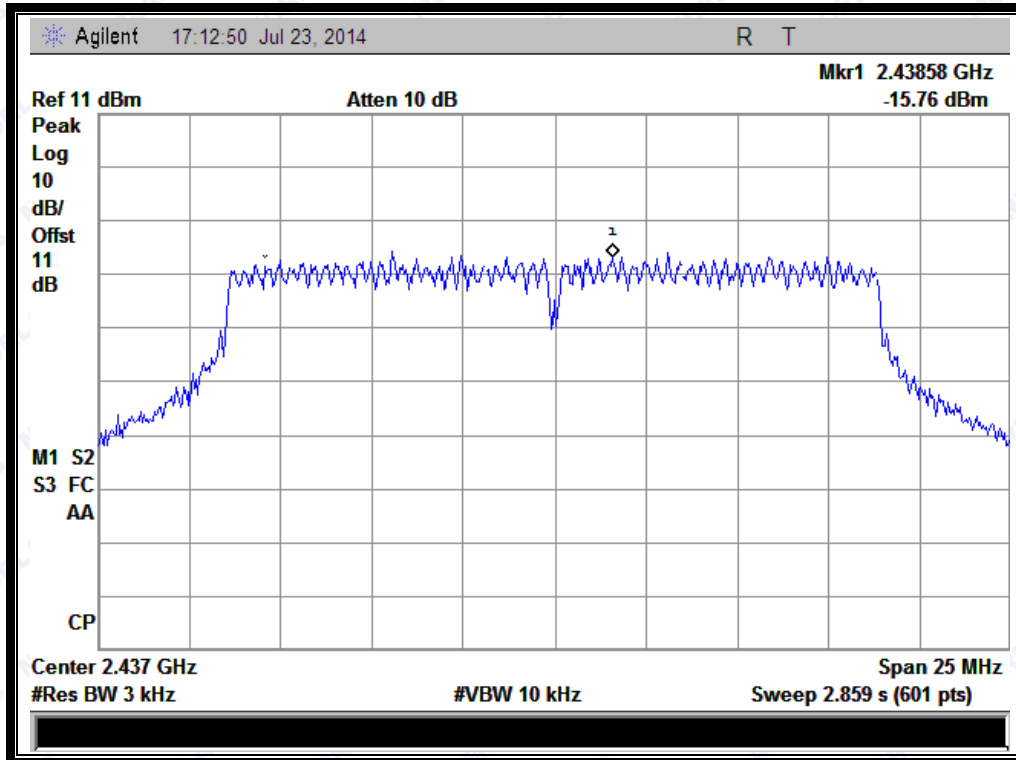

(Channel = 6 @ 802.11n-20MHz)

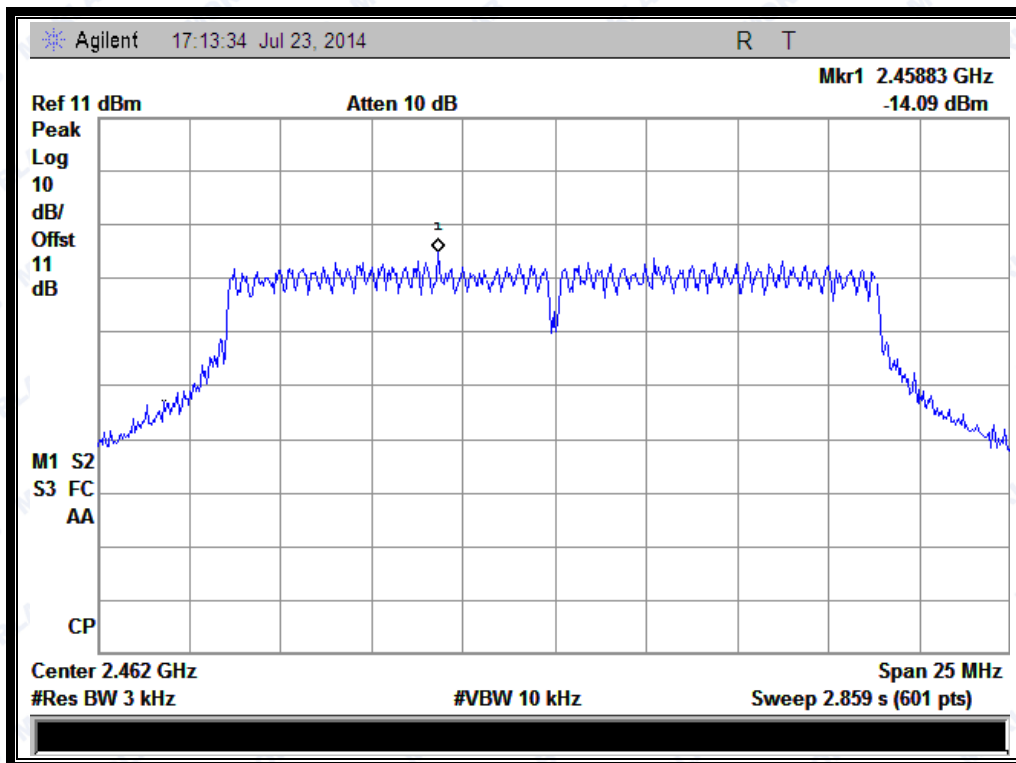

(Channel = 11 @ 802.11n-20MHz)


2.6 Restricted Frequency Bands

2.6.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.6.2 Test Description

A. Test Setup

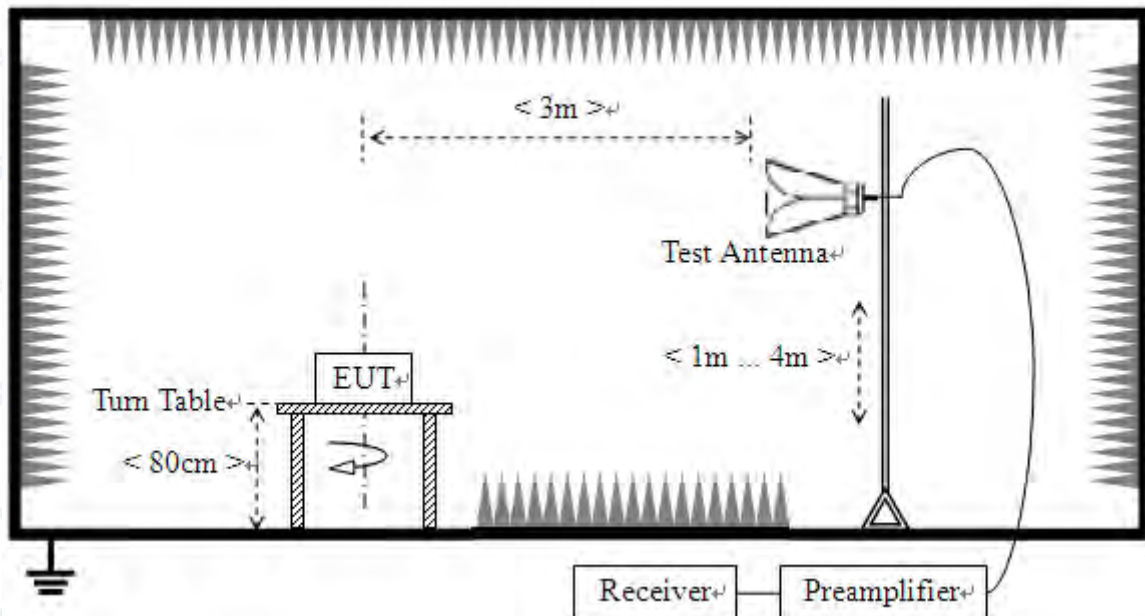

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

KDB 558074 Section 12.1 was used in order to prove compliance.

B. Equipments List:

Please reference ANNEX A(1.4).



2.6.3 Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


2.6.3.1 802.11b Test mode

The lowest and highest channels are tested to verify the band edge emissions.


A. Test Verdict:

| Channel | Frequency (MHz) | Detector | Receiver Reading U_R (dBuV) | A_T (dB) | A_{Factor} (dB@3m) | Max. Emission E (dB μ V/m) | Limit (dB μ V/m) | Verdict |
|---------|-----------------|----------|-------------------------------|------------|-----------------------------|--------------------------------|----------------------|---------|
| | | PK/ AV | | | | | | |
| 1 | 2340.45 | PK | 61.75 | -33.63 | 32.56 | 60.68 | 74 | Pass |
| 1 | 2352.05 | AV | 36.28 | -33.63 | 32.56 | 35.21 | 54 | Pass |
| 11 | 2484.15 | PK | 59.25 | -33.18 | 32.5 | 58.57 | 74 | Pass |
| 11 | 2488.31 | AV | 34.89 | -33.18 | 32.5 | 34.21 | 54 | Pass |


B. Test Plots:

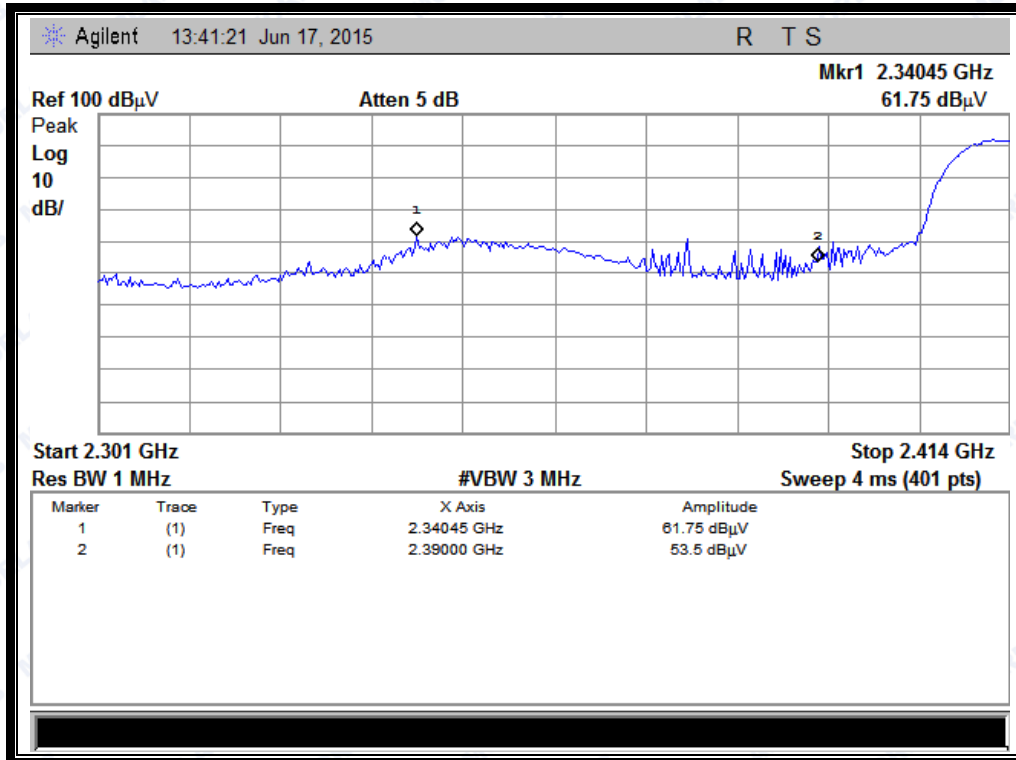


(Plot A1: Channel = 1 PEAK @ 802.11b)

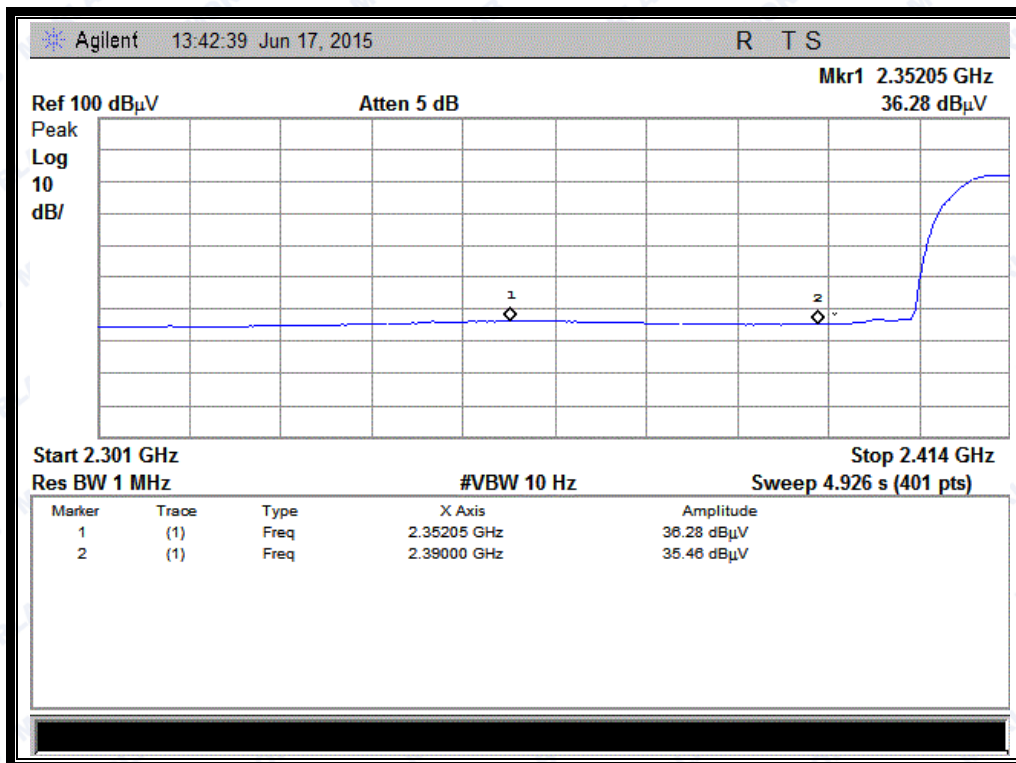

(Plot A2: Channel = 1 AVG @ 802.11b)

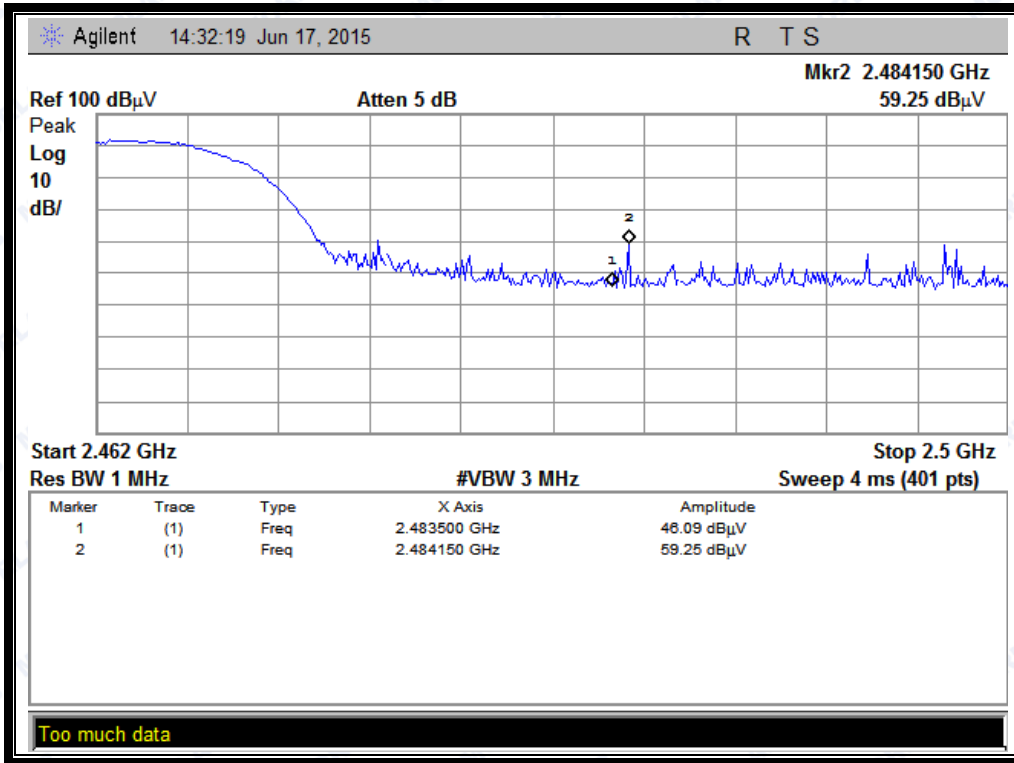

(Plot B1: Channel = 11 PEAK @ 802.11b)

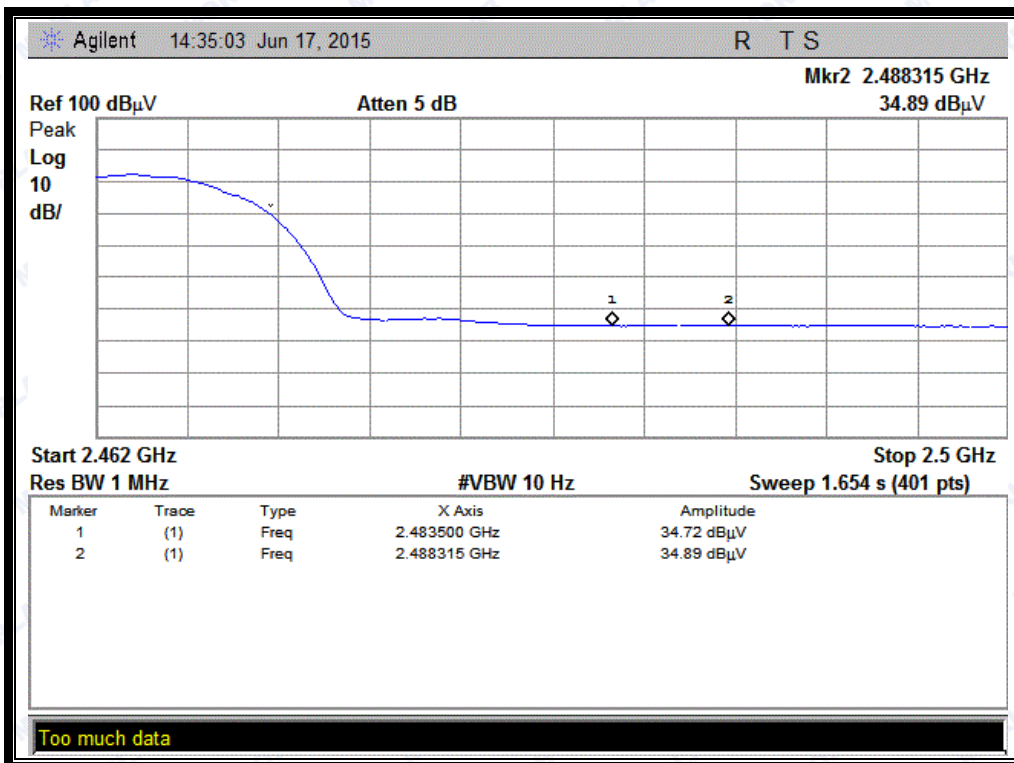

(Plot B2: Channel = 11 AVG @ 802.11b)




2.6.3.2 802.11g Test mode

The lowest and highest channels are tested to verify the band edge emissions.


A. Test Verdict:

| Channel | Frequency (MHz) | Detector | Receiver Reading | A _T (dB) | A _{Factor} (dB@3m) | Max. Emission E (dBμV/m) | Limit (dBμV/m) | Verdict |
|---------|-----------------|----------|-----------------------|---------------------|-----------------------------|--------------------------|----------------|---------|
| | | PK/ AV | U _R (dBuV) | | | | | |
| 1 | 2349.22 | PK | 67.78 | -33.63 | 32.56 | 66.71 | 74 | Pass |
| 1 | 2351.20 | AV | 36.77 | -33.63 | 32.56 | 35.7 | 54 | Pass |
| 11 | 2484.42 | PK | 59.55 | -33.18 | 32.5 | 58.87 | 74 | Pass |
| 11 | 2483.85 | AV | 36.9 | -33.18 | 32.5 | 36.22 | 54 | Pass |


B. Test Plots:

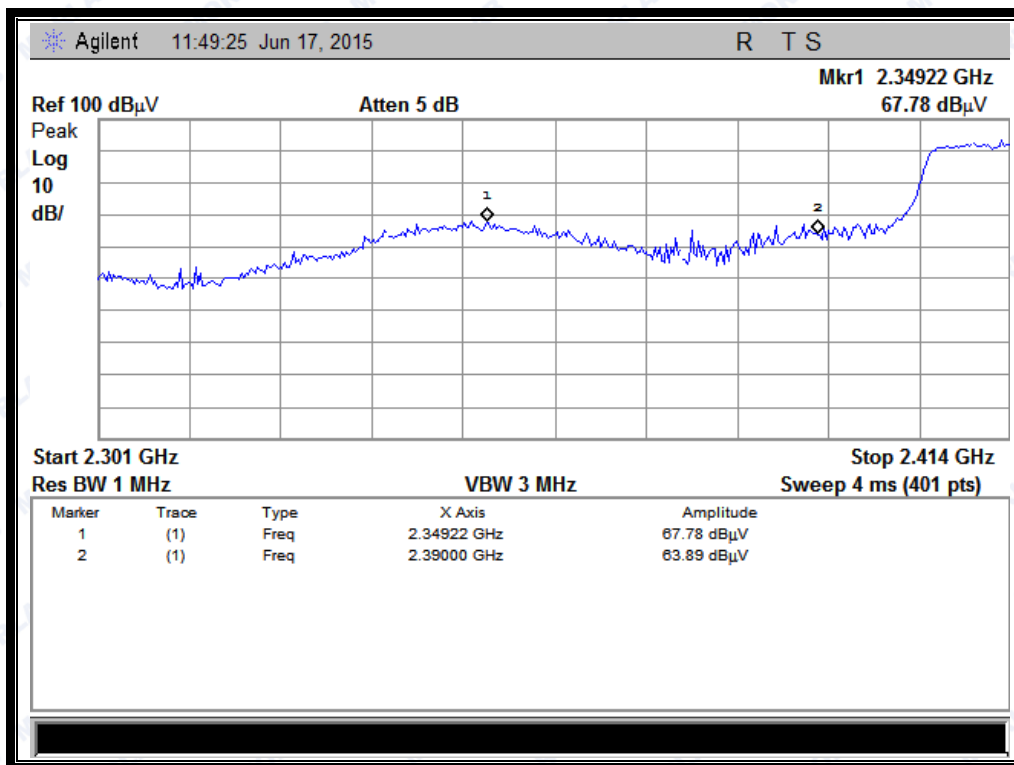


(Plot C1: Channel = 1 PEAK @ 802.11g)

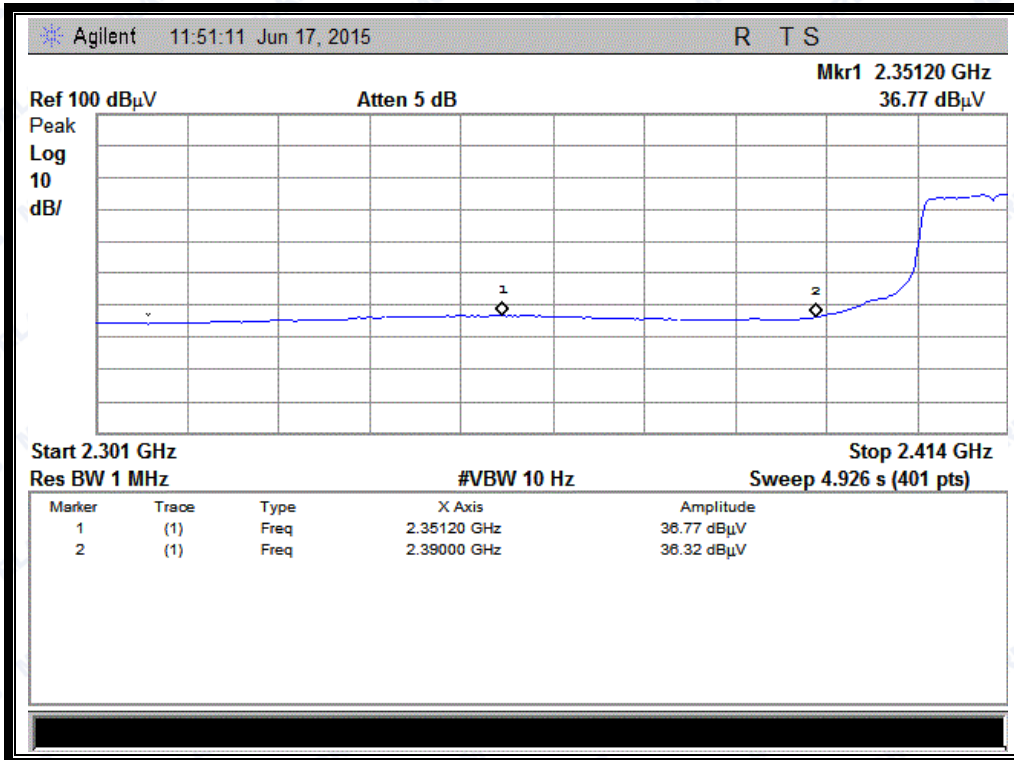

(Plot C2: Channel = 1 AVG @ 802.11g)

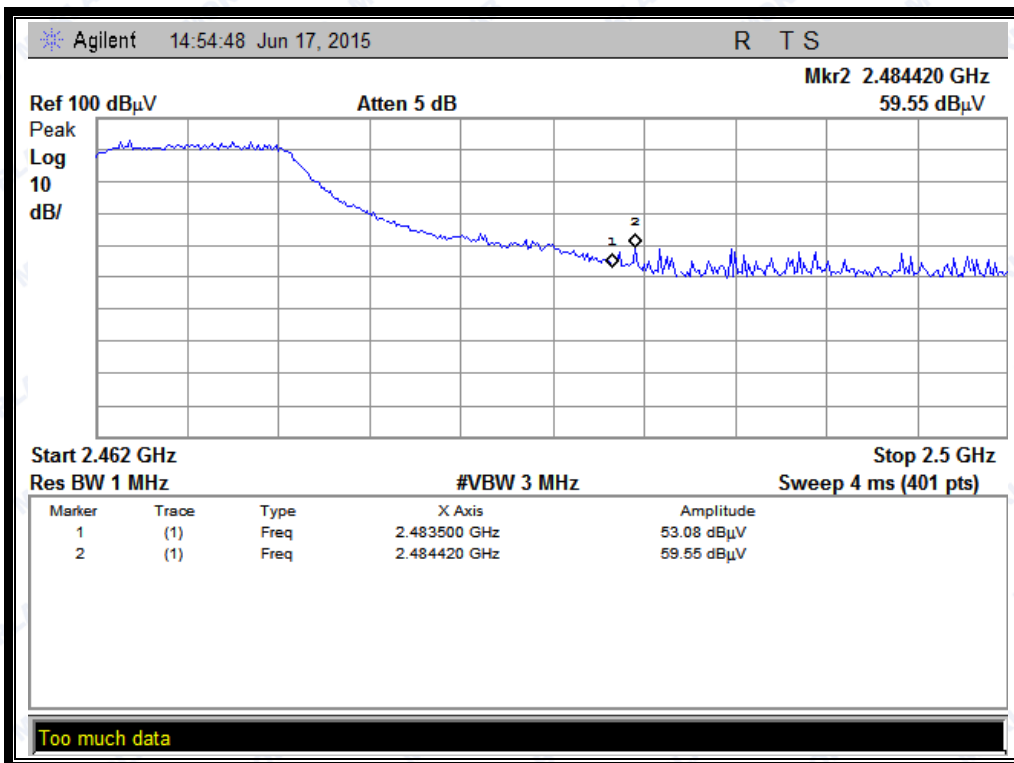

(Plot D1: Channel = 11 PEAK @ 802.11g)

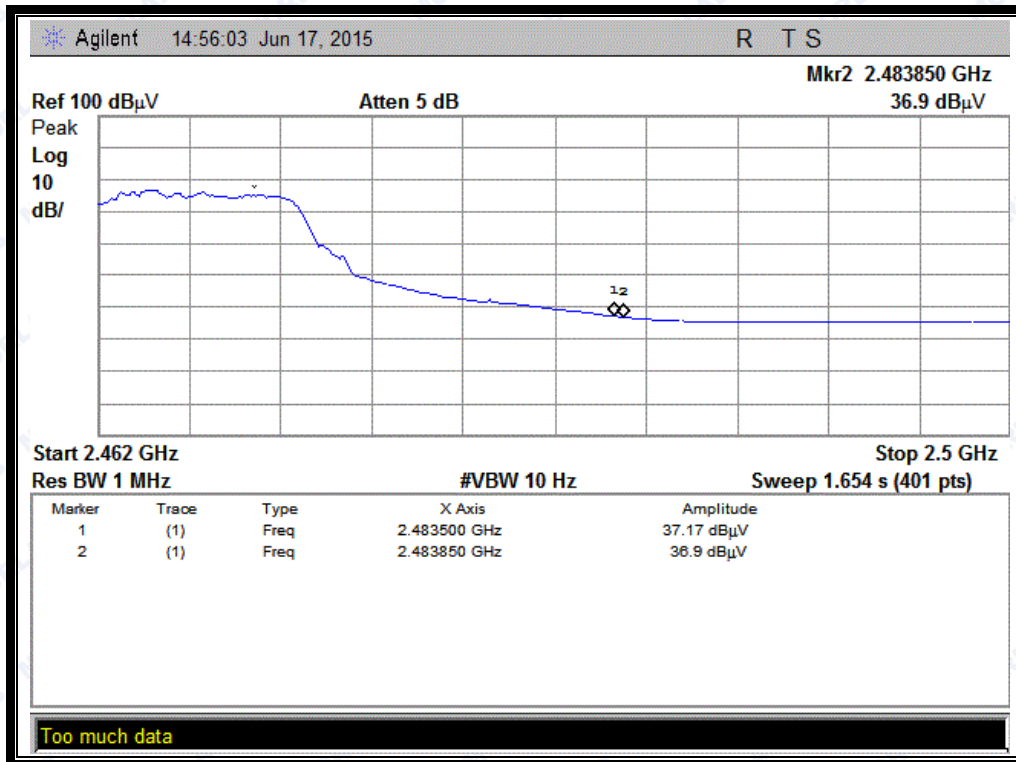

(Plot D2: Channel = 11 AVG @ 802.11g)


2.6.3.3 802.11n-20MHz Test mode

The lowest and highest channels are tested to verify the band edge emissions.


A. Test Verdict:

| Channel | Frequency (MHz) | Detector | Receiver Reading U_R (dBuV) | A_T (dB) | A_{Factor} (dB@3m) | Max. Emission E (dBµV/m) | Limit (dBµV/m) | Verdict |
|---------|-----------------|----------|-------------------------------|------------|----------------------|--------------------------|----------------|---------|
| | | PK/ AV | | | | | | |
| 1 | 2321.50 | PK | 57.97 | -33.63 | 32.56 | 56.9 | 74 | Pass |
| 1 | 2389.11 | AV | 36.41 | -33.63 | 32.56 | 35.34 | 54 | Pass |
| 11 | 2483.86 | PK | 55.00 | -33.18 | 32.5 | 54.32 | 74 | Pass |
| 11 | 2483.86 | AV | 36.71 | -33.18 | 32.5 | 36.03 | 54 | Pass |


B. Test Plots:

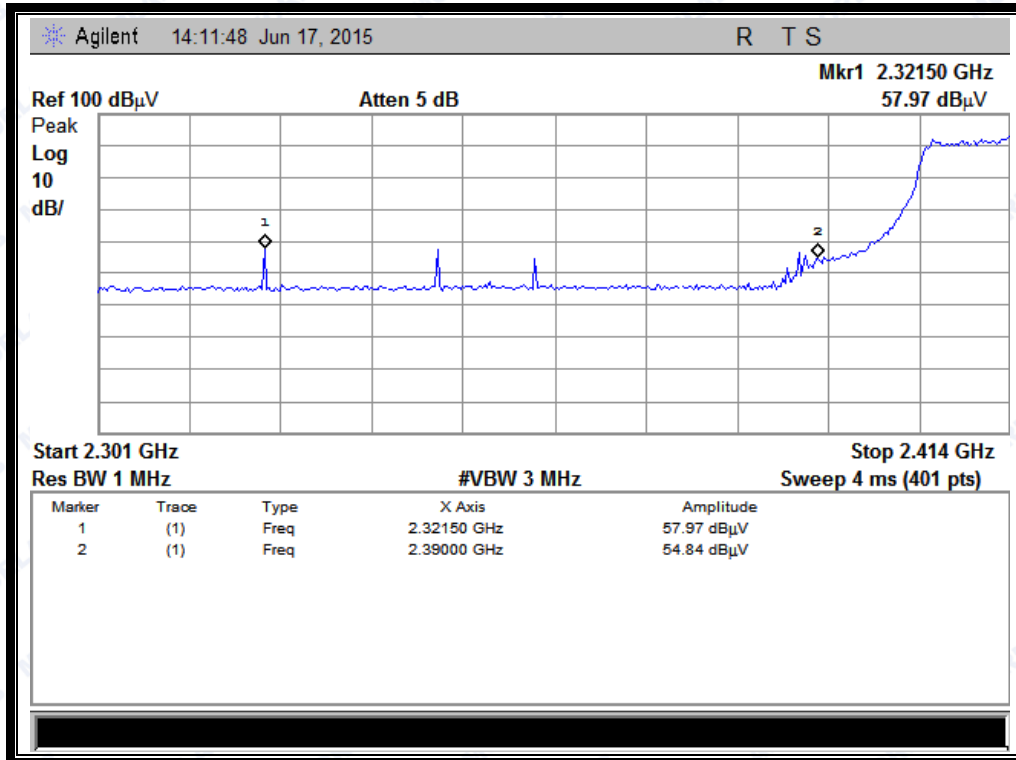


(Plot E1: Channel = 1 PEAK @ 802.11n-20)

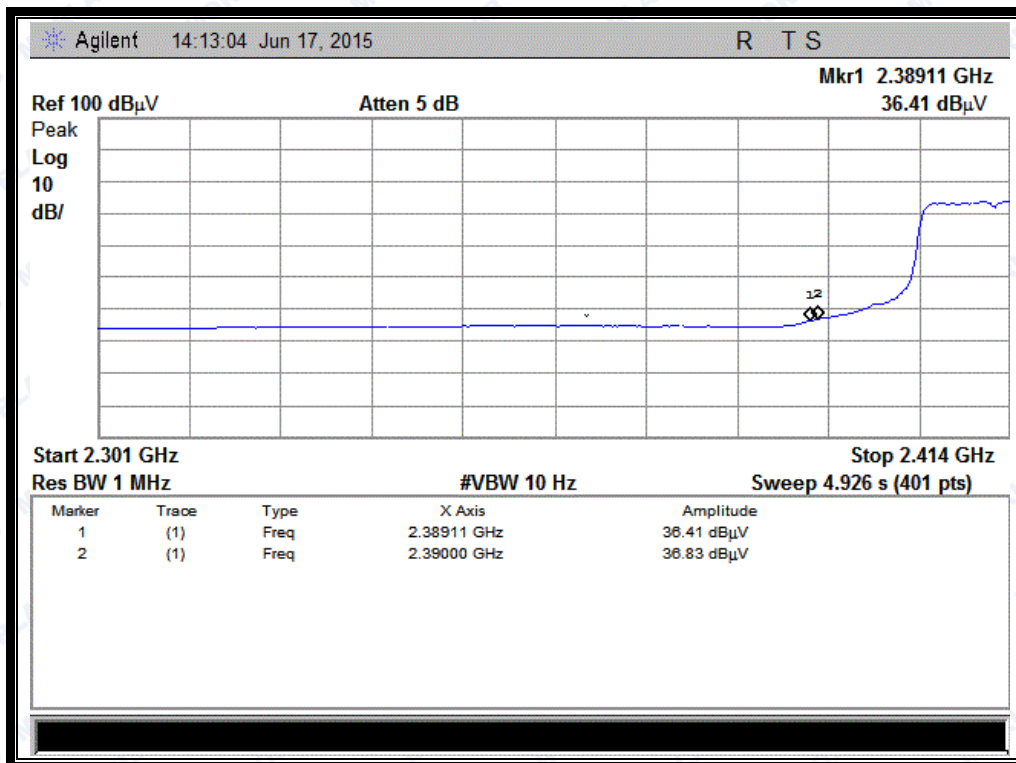

(Plot E2: Channel = 1 AVG @ 802.11n-20)

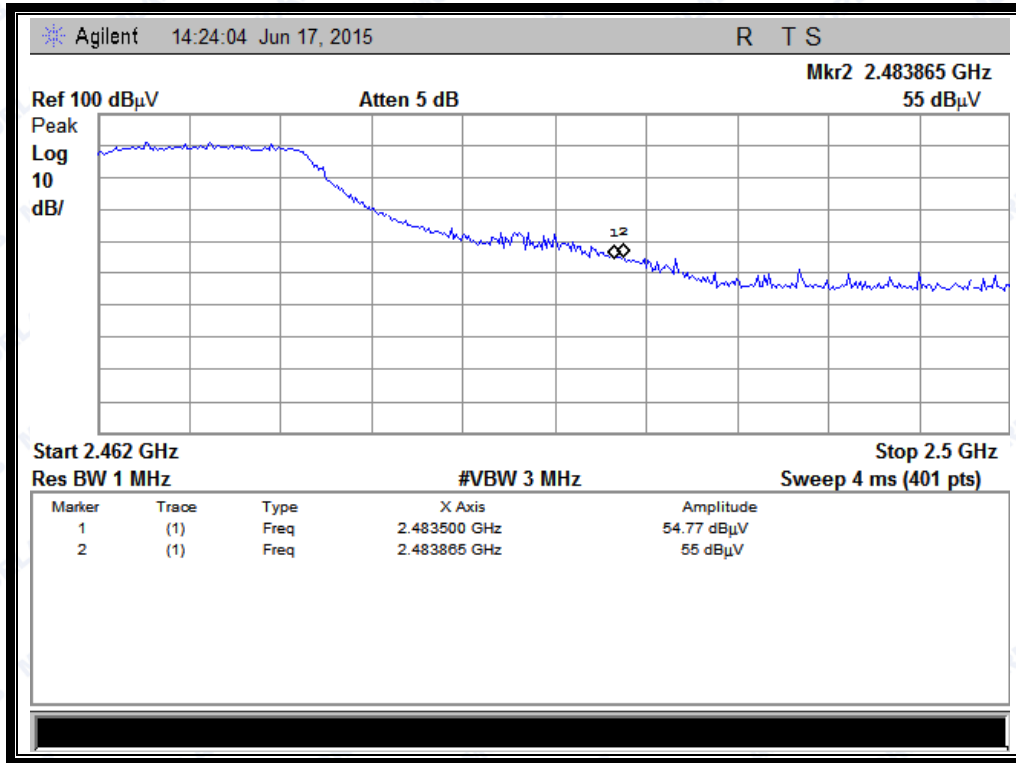

(Plot F1: Channel = 11 PEAK @ 802.11n-20)

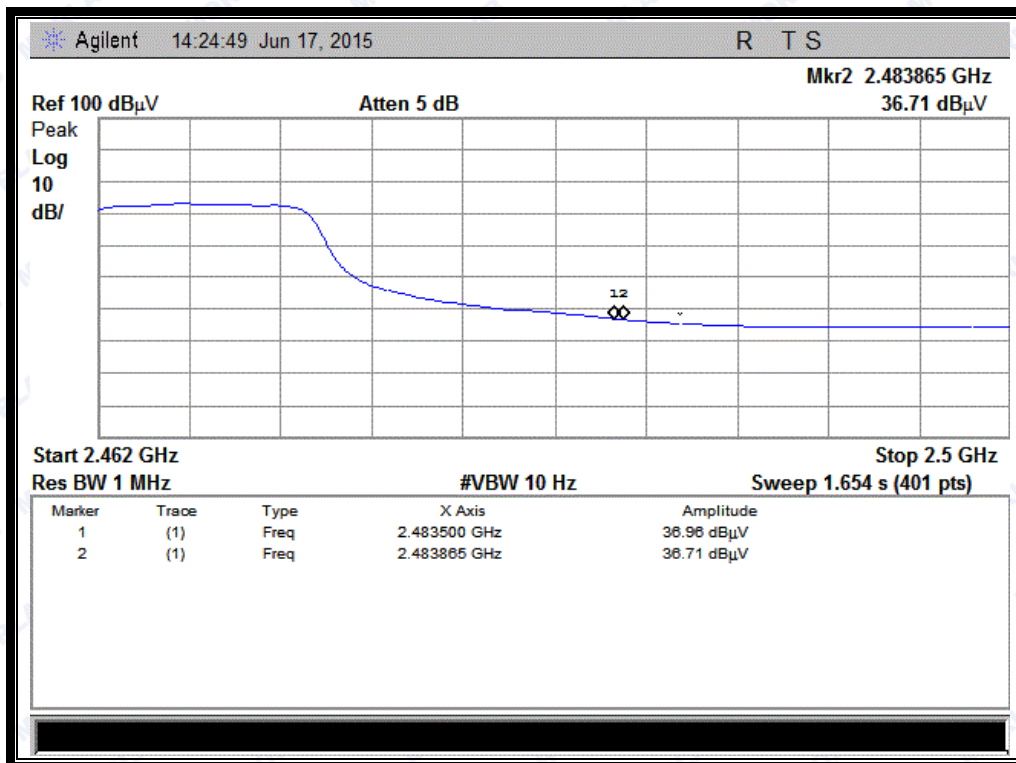

(Plot F2: Channel = 11 AVG @ 802.11n-20)

2.7 Conducted Emission

2.7.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


| Frequency range (MHz) | Conducted Limit (dB μ V) | |
|--------------------------|------------------------------|----------|
| | Quai-peak | Average |
| 0.15 - 0.50 | 66 to 56 | 56 to 46 |
| 0.50 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2 Test Description

A. Test Setup:

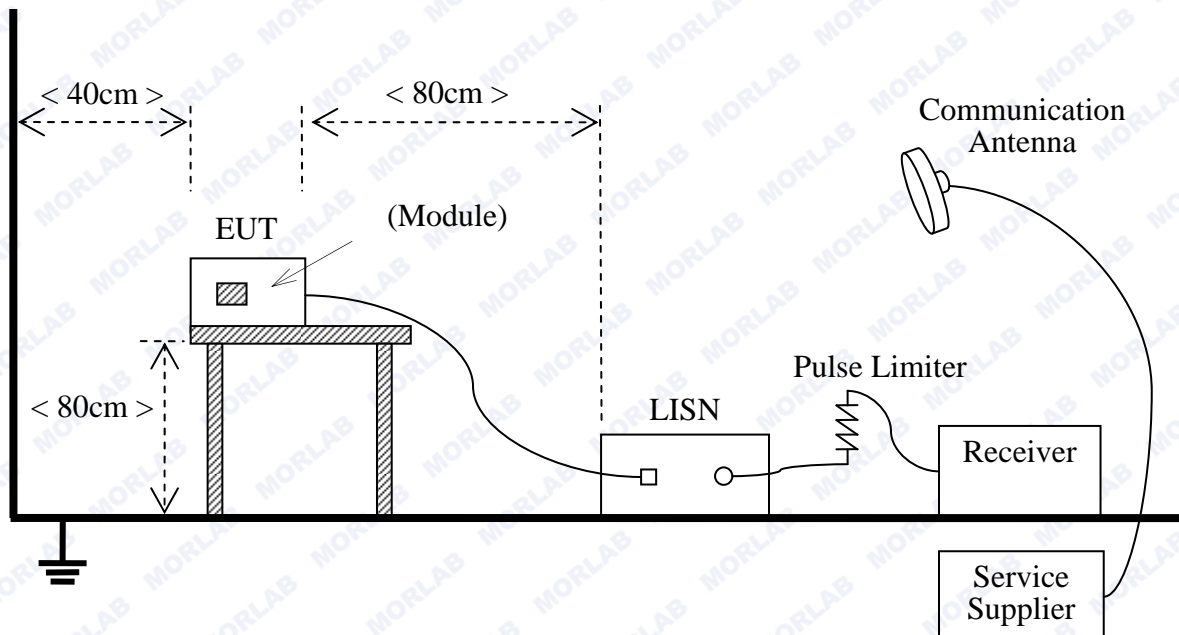

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

B. Equipments List:

Please reference ANNEX A(1.4).

2.7.3 Test Result


The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: All test modes are performed, only the worst case is recorded in this report.


A. Test setup:

The EUT configuration of the emission tests is EUT + Link.

B. Test Plots:

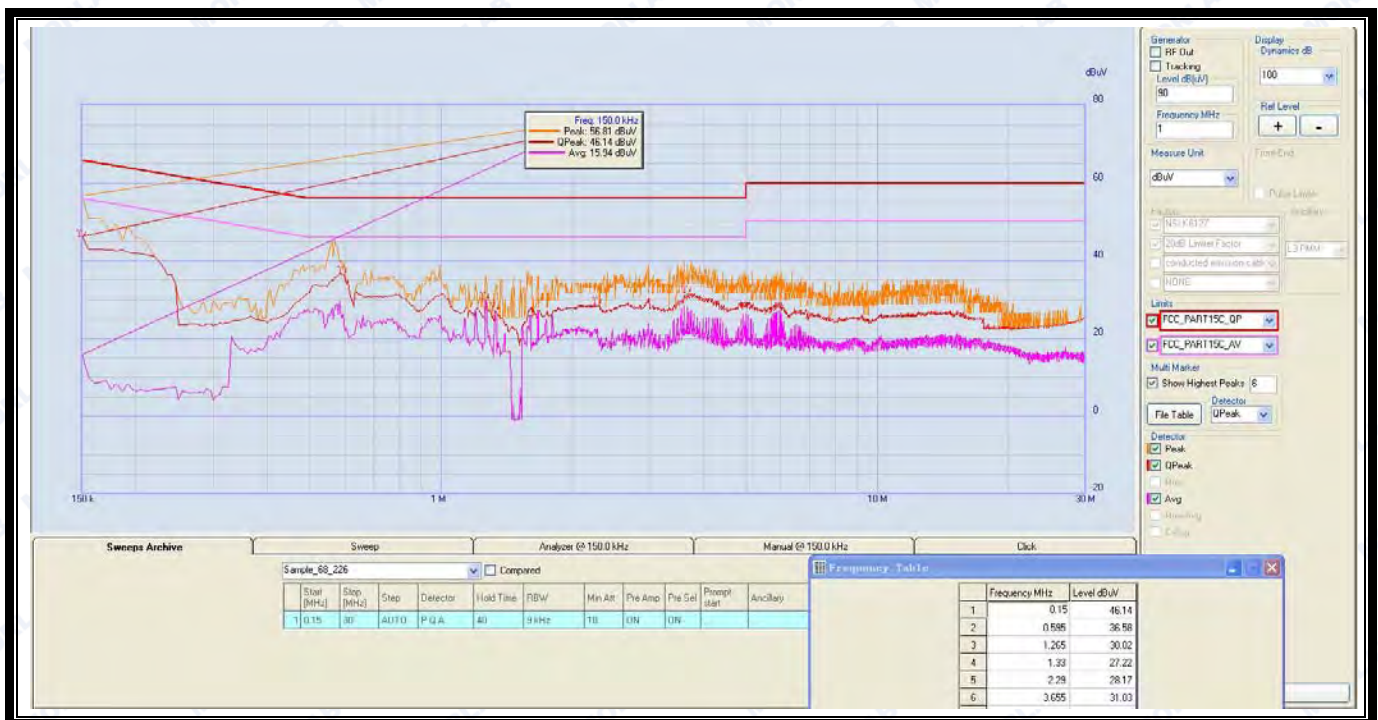

(Plot A: L Phase)

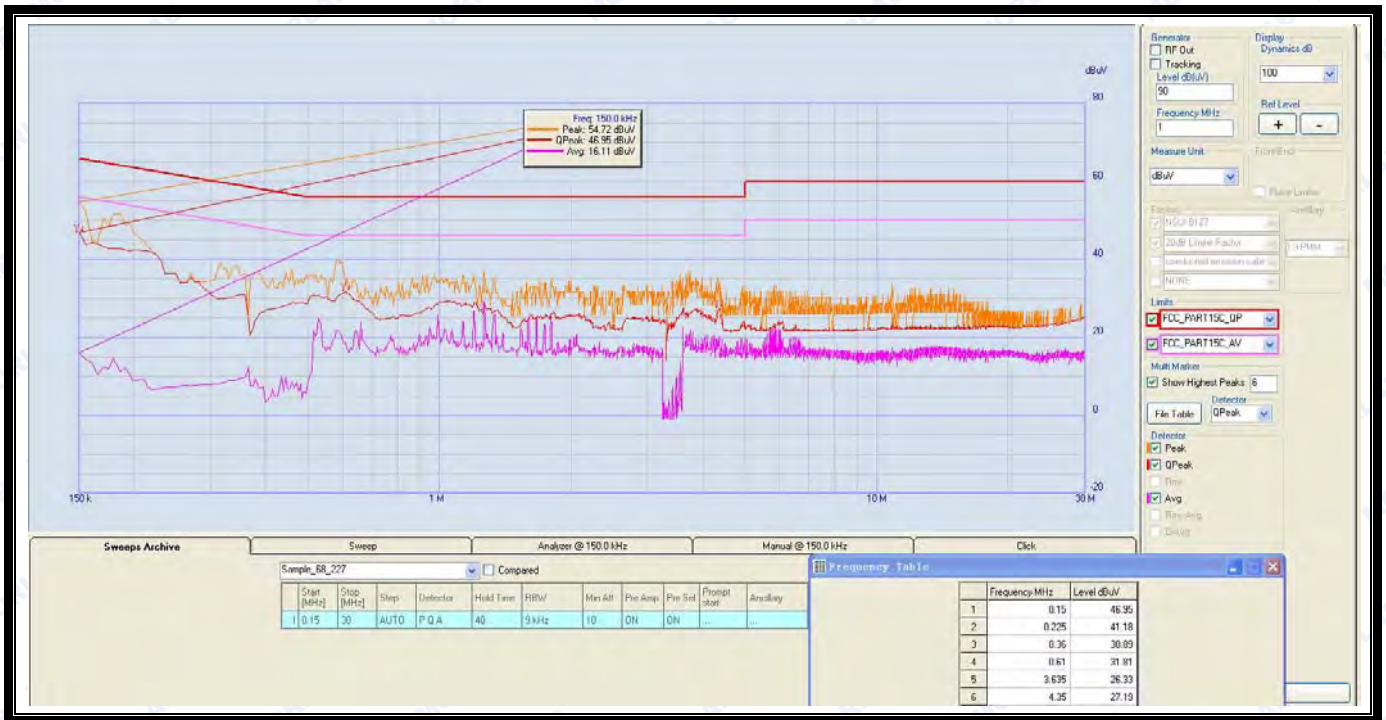

(Plot B: N Phase)



2.8 Radiated Emission

2.8.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength ($\mu\text{V}/\text{m}$) | Measurement Distance (m) |
|-----------------|---|--------------------------|
| 0.009 - 0.490 | 2400/F(kHz) | 300 |
| 0.490 - 1.705 | 24000/F(kHz) | 30 |
| 1.705 - 30.0 | 30 | 30 |
| 30 - 88 | 100 | 3 |
| 88 - 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note:

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.


For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.8.2 Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

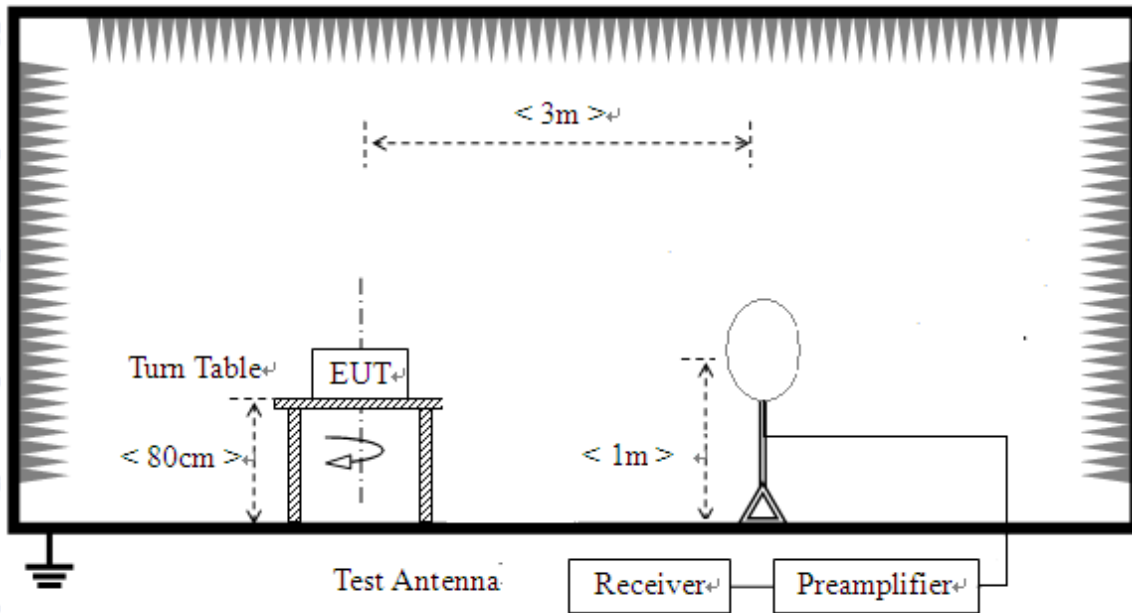

- 2) For radiated emissions from 30MHz to 1GHz

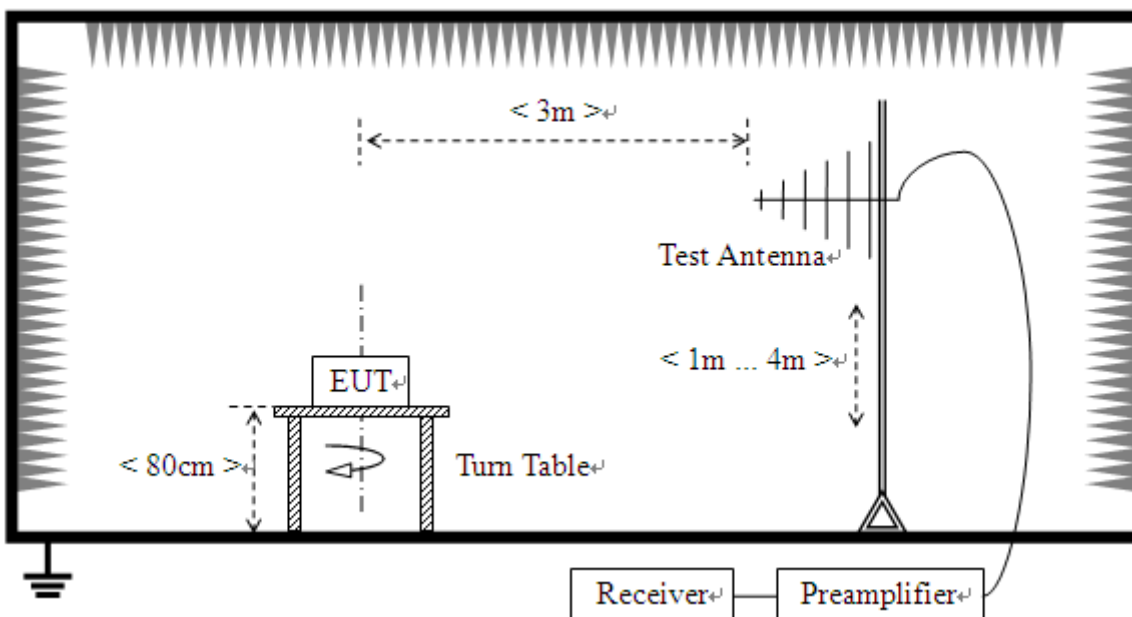

3) For radiated emissions above 1GHz

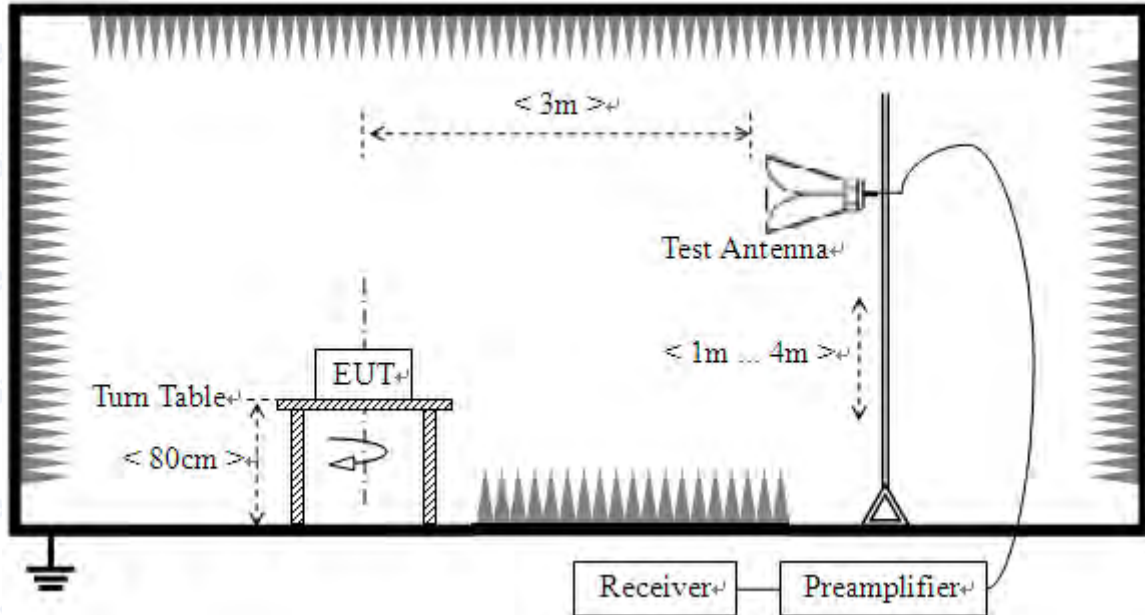

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.4).



2.8.3 Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.




2.8.3.1 802.11b Test mode

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1

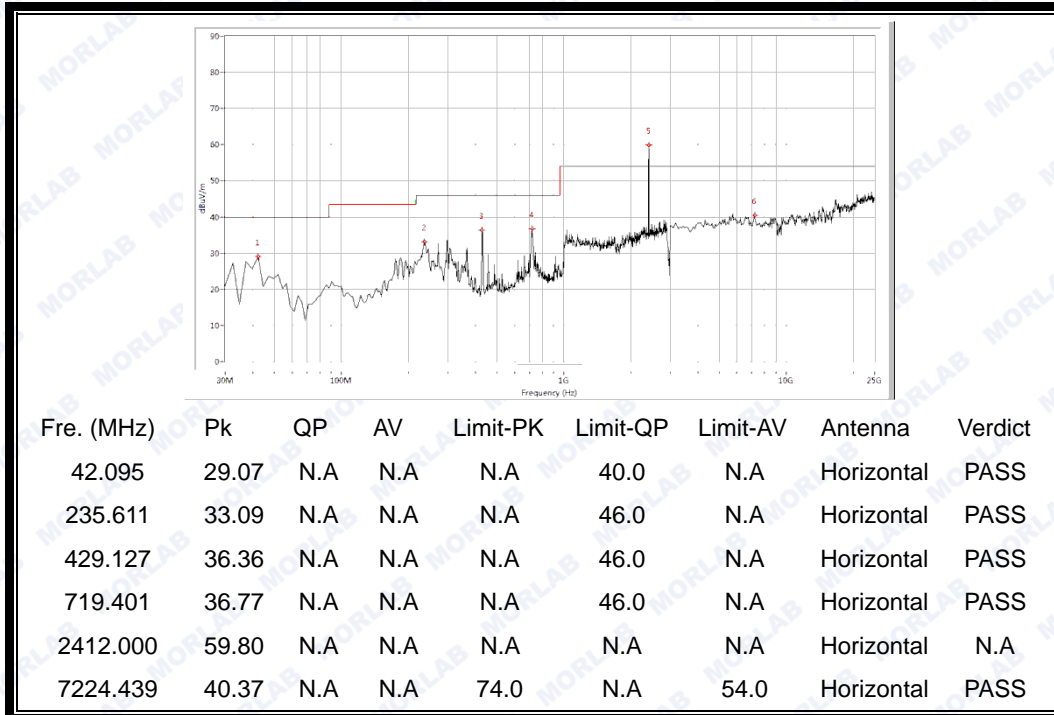


(Antenna Horizontal, 30MHz to 25GHz)

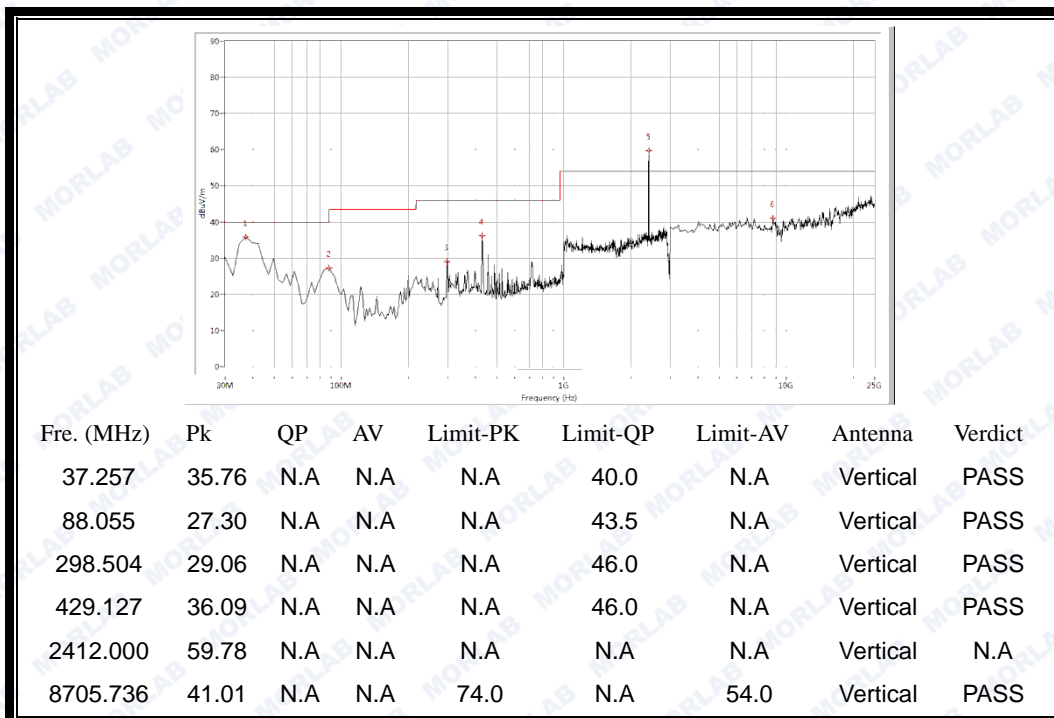


(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 6

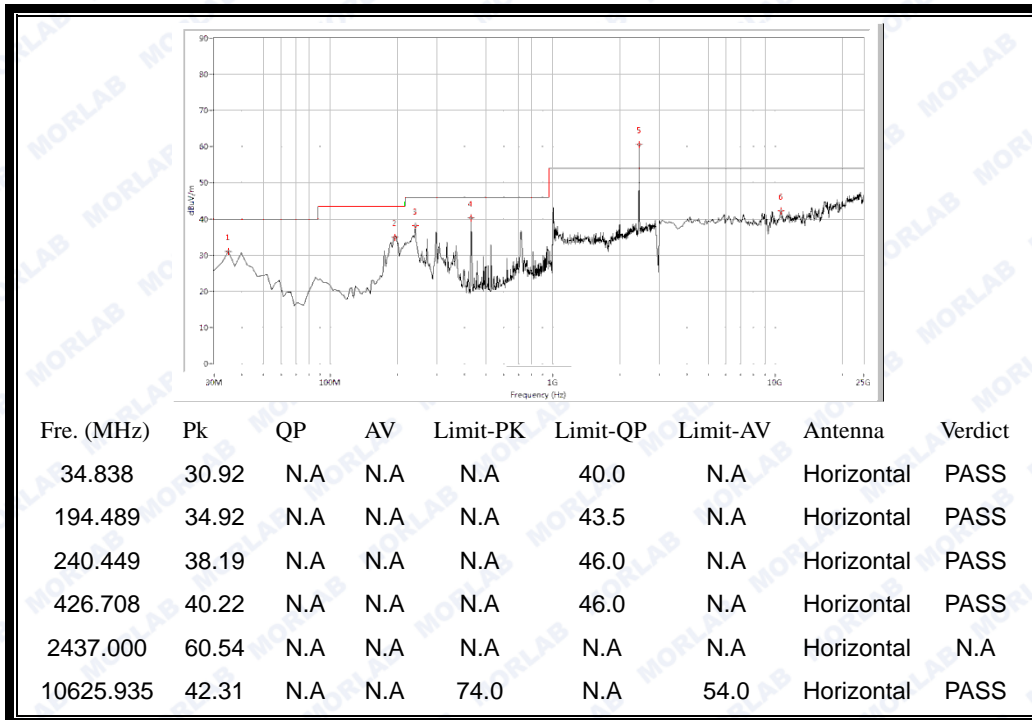


(Antenna Horizontal, 30MHz to 25GHz)

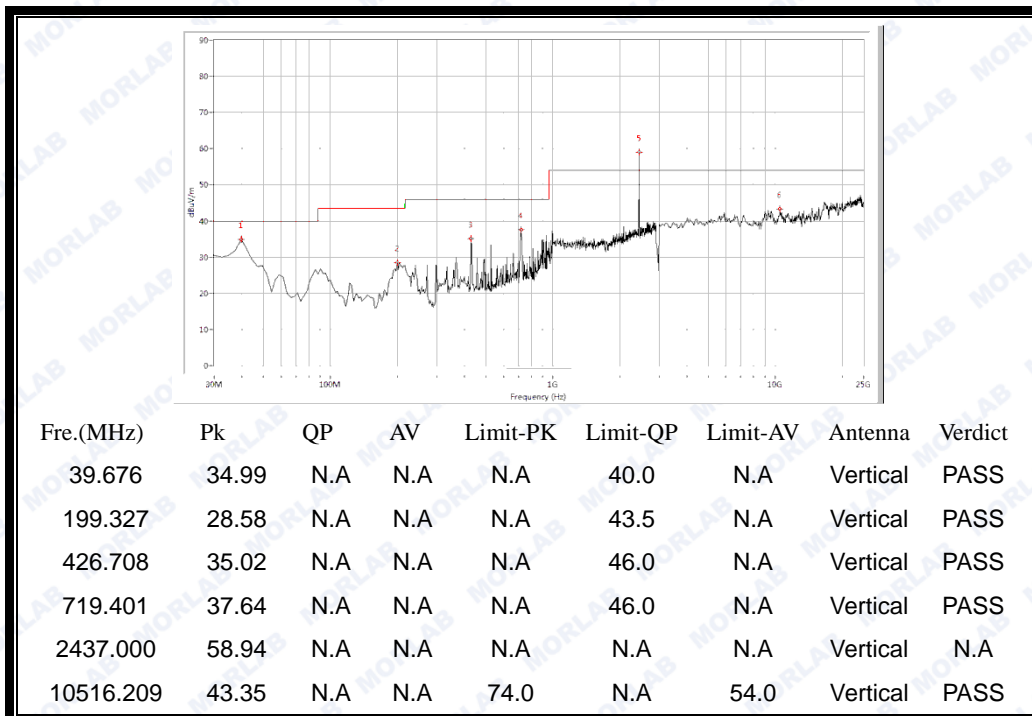


(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 11

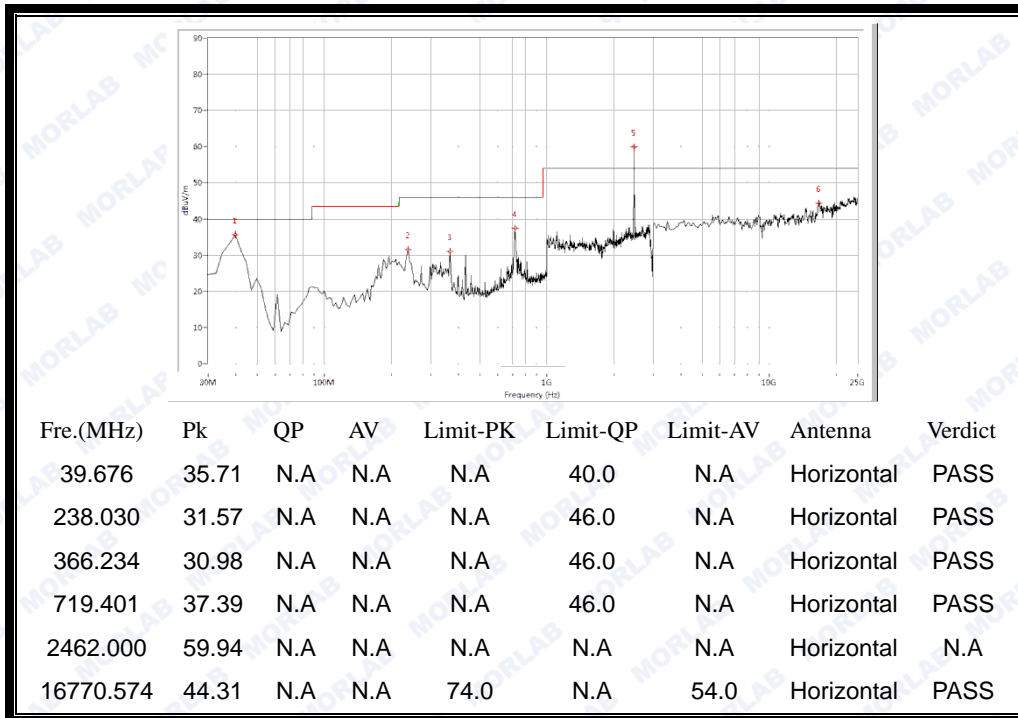

(Antenna Horizontal, 30MHz to 25GHz)

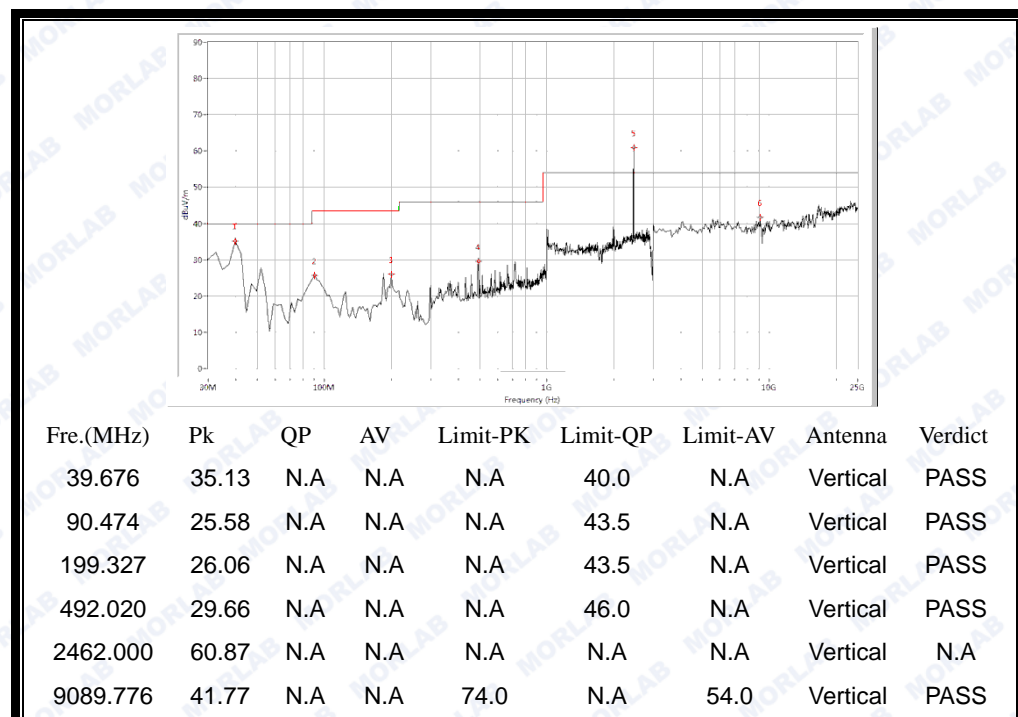


(Antenna Vertical, 30MHz to 25GHz)




2.8.3.2 802.11g Test mode

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1

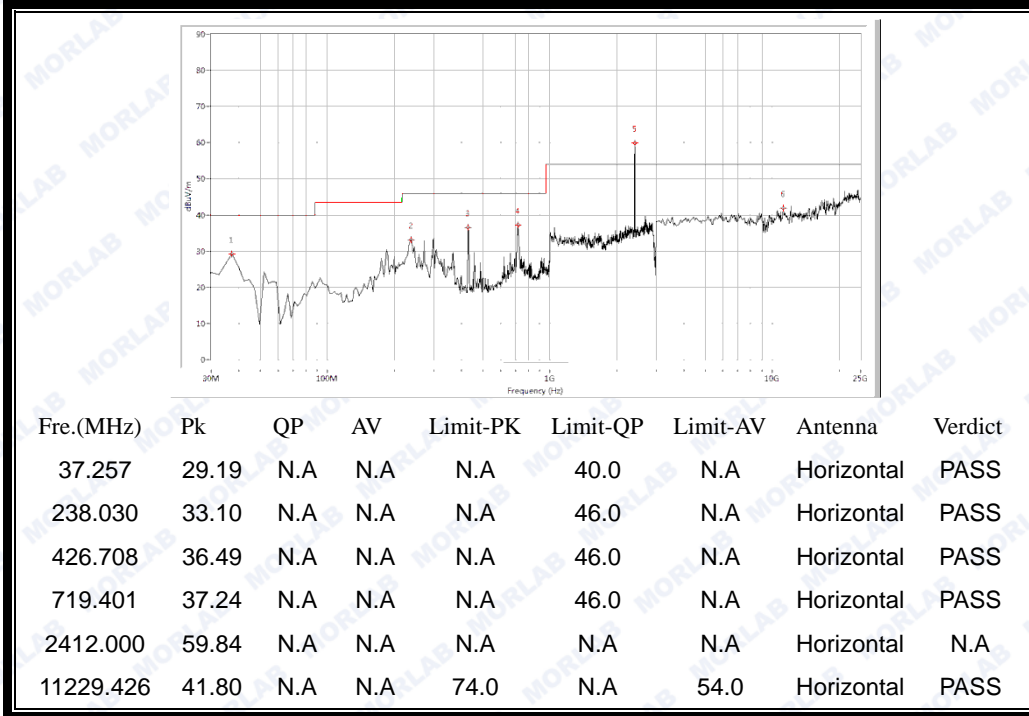


(Antenna Horizontal, 30MHz to 25GHz)

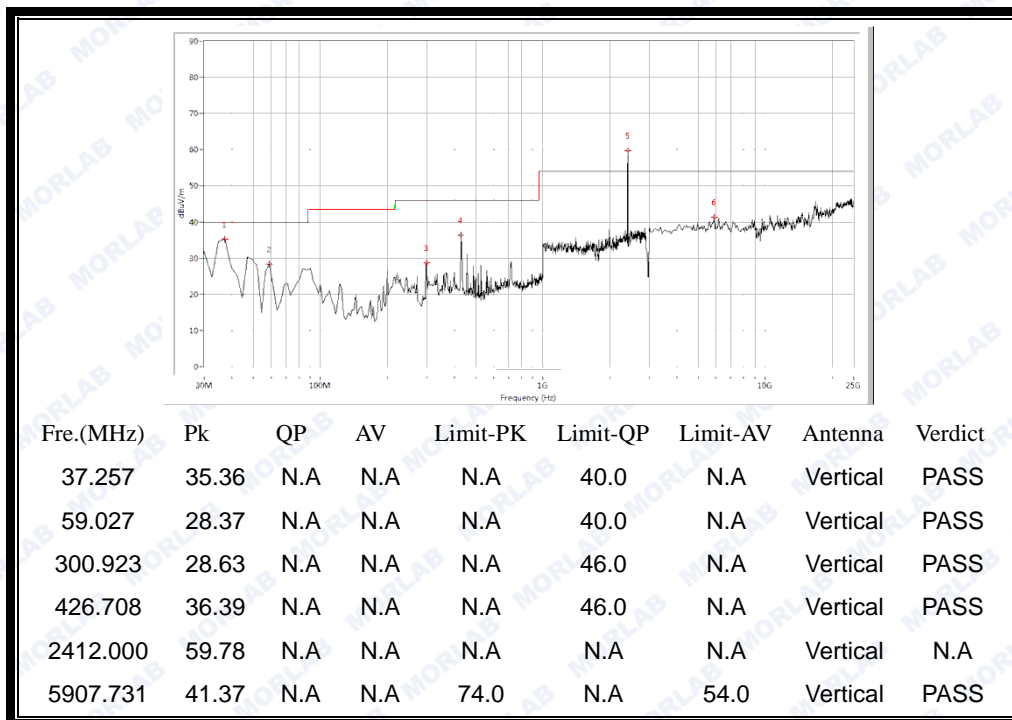


(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 6

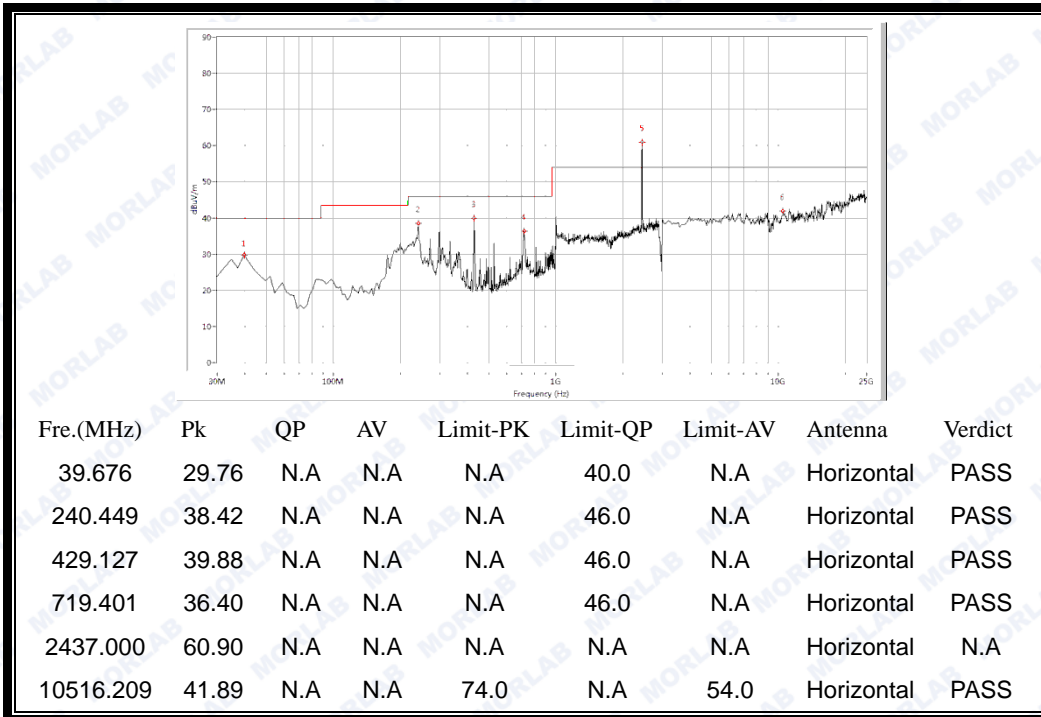


(Antenna Horizontal, 30MHz to 25GHz)

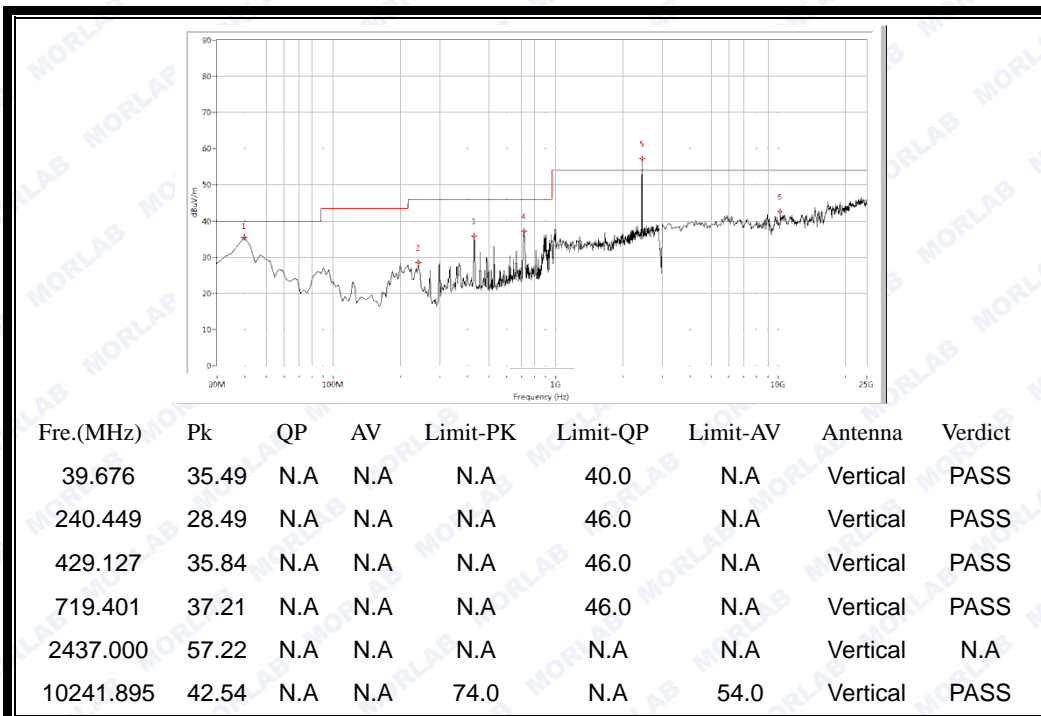


(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 11

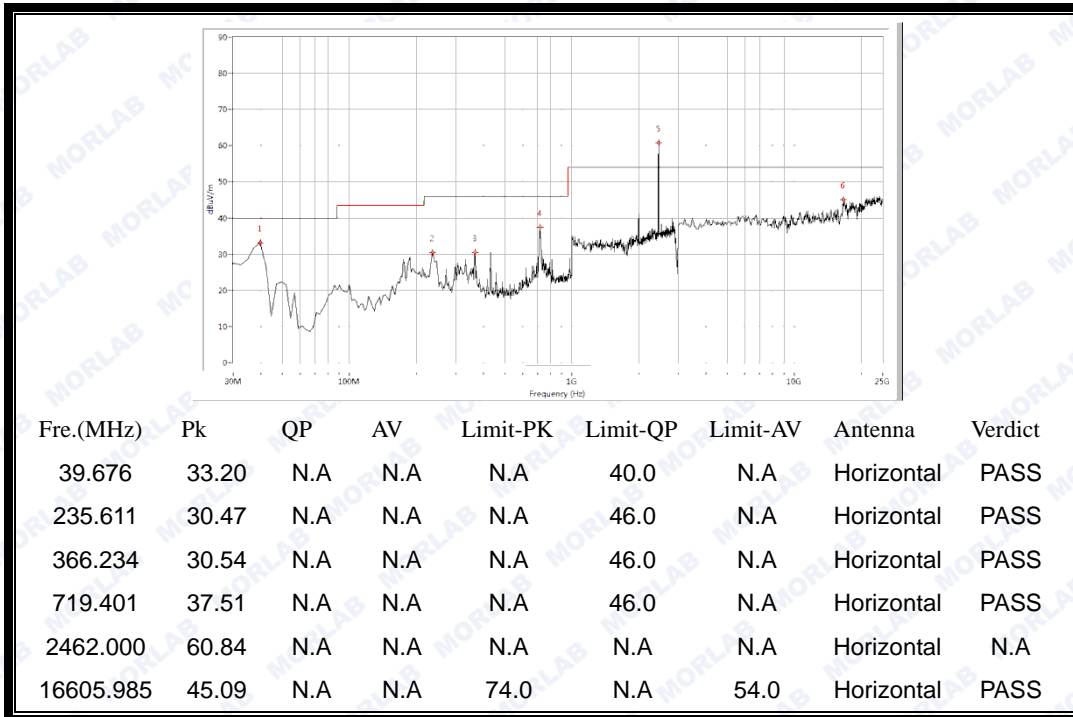

(Antenna Horizontal, 30MHz to 25GHz)

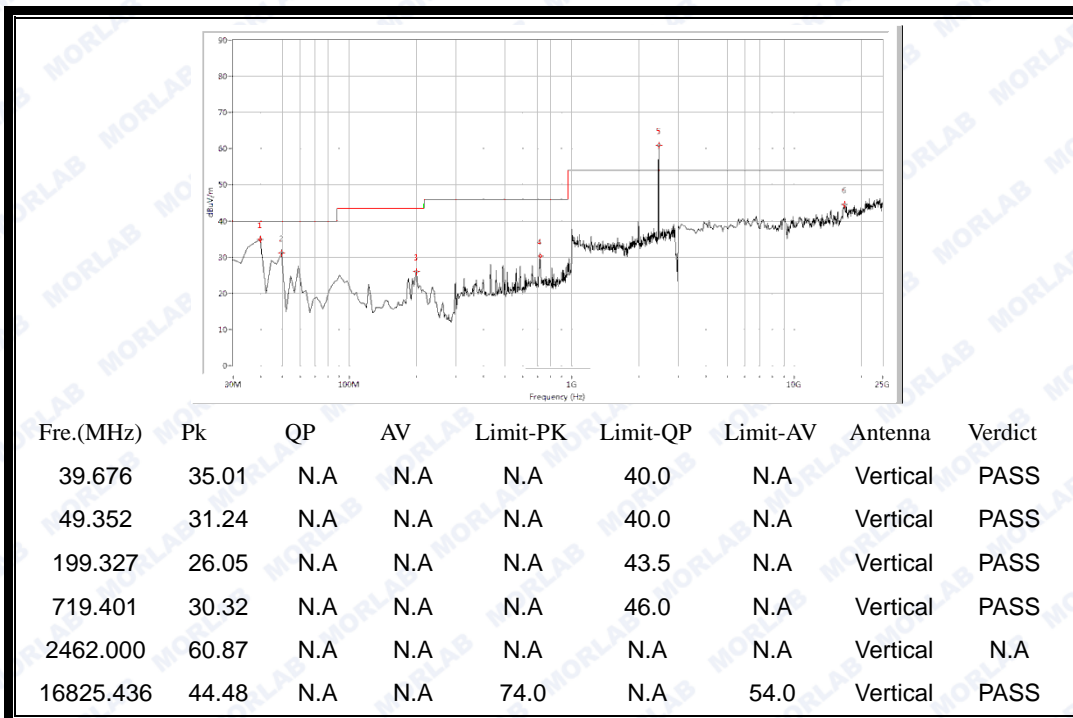


(Antenna Vertical, 30MHz to 25GHz)




2.8.3.3 802.11n-20MHz Test mode

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1

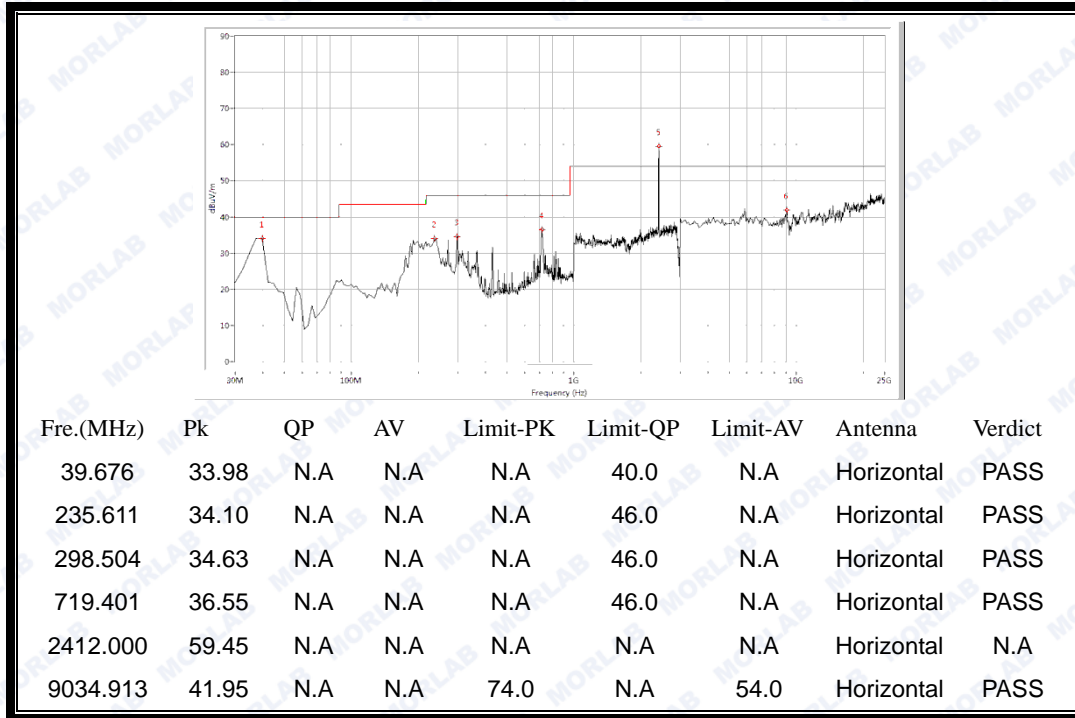


(Antenna Horizontal, 30MHz to 25GHz)

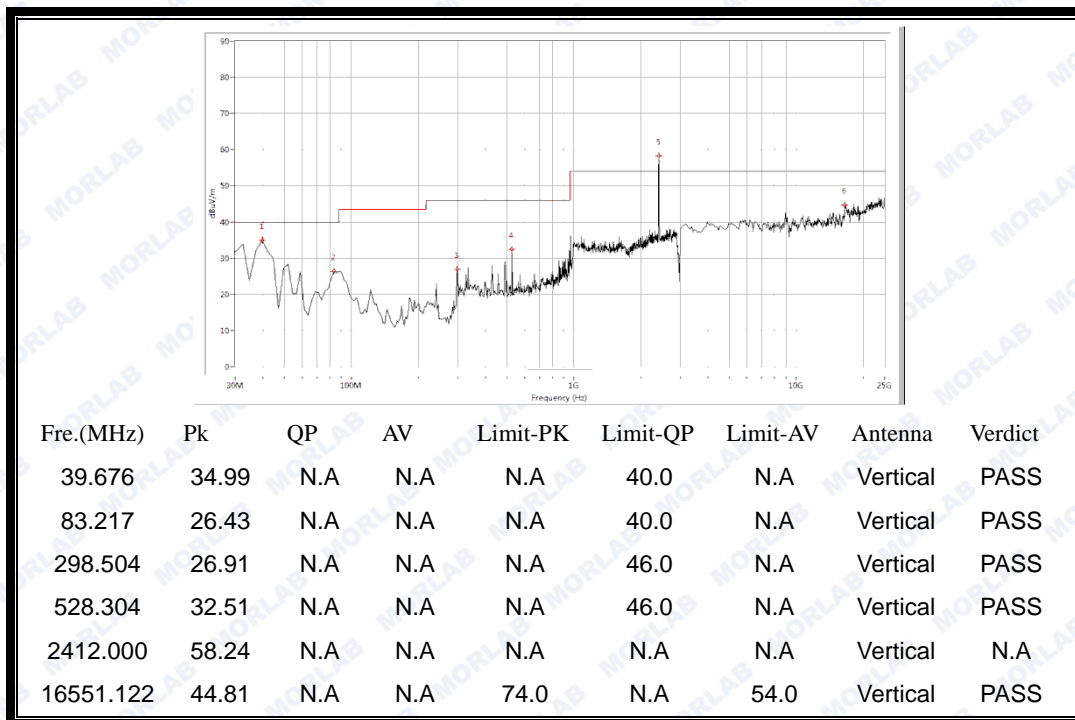


(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 6

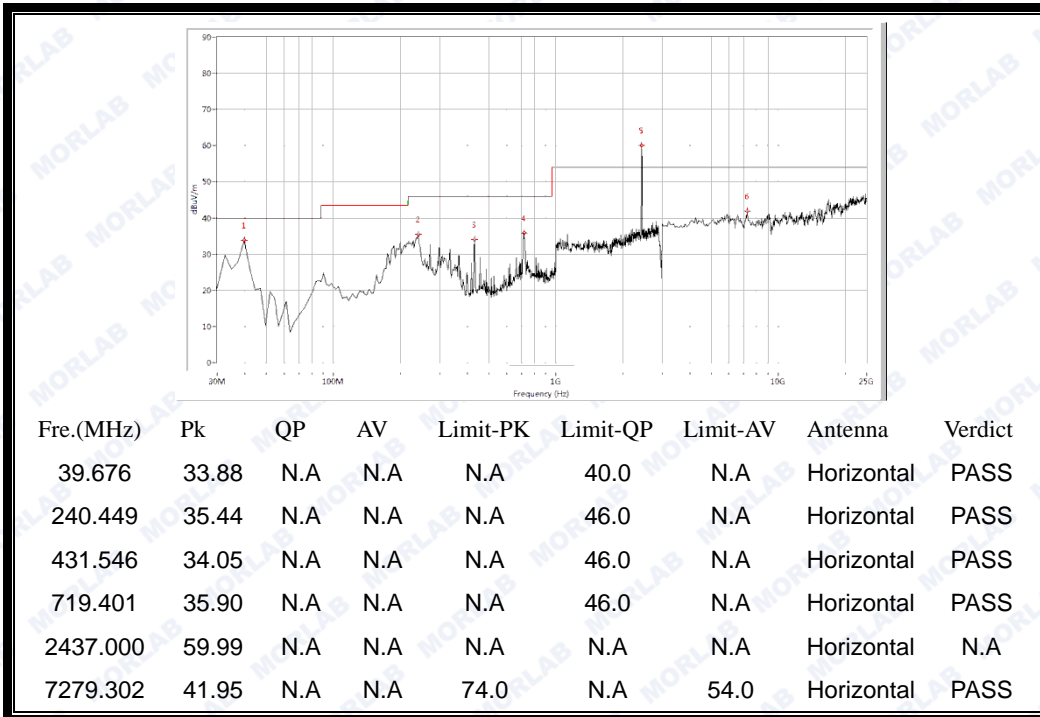


(Antenna Horizontal, 30MHz to 25GHz)

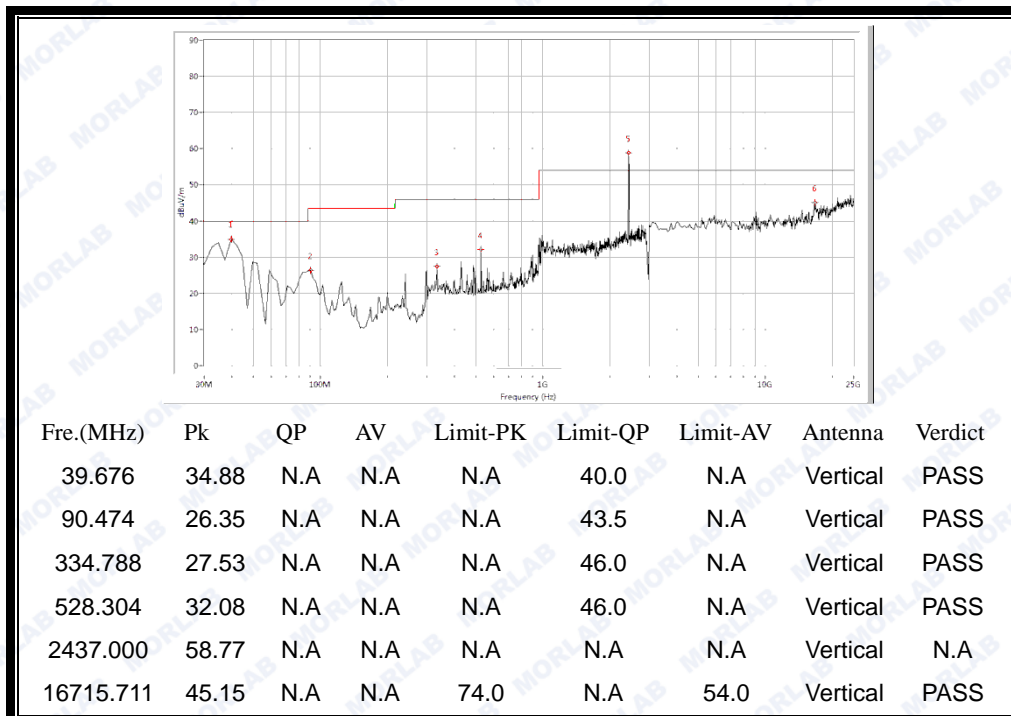


(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 11

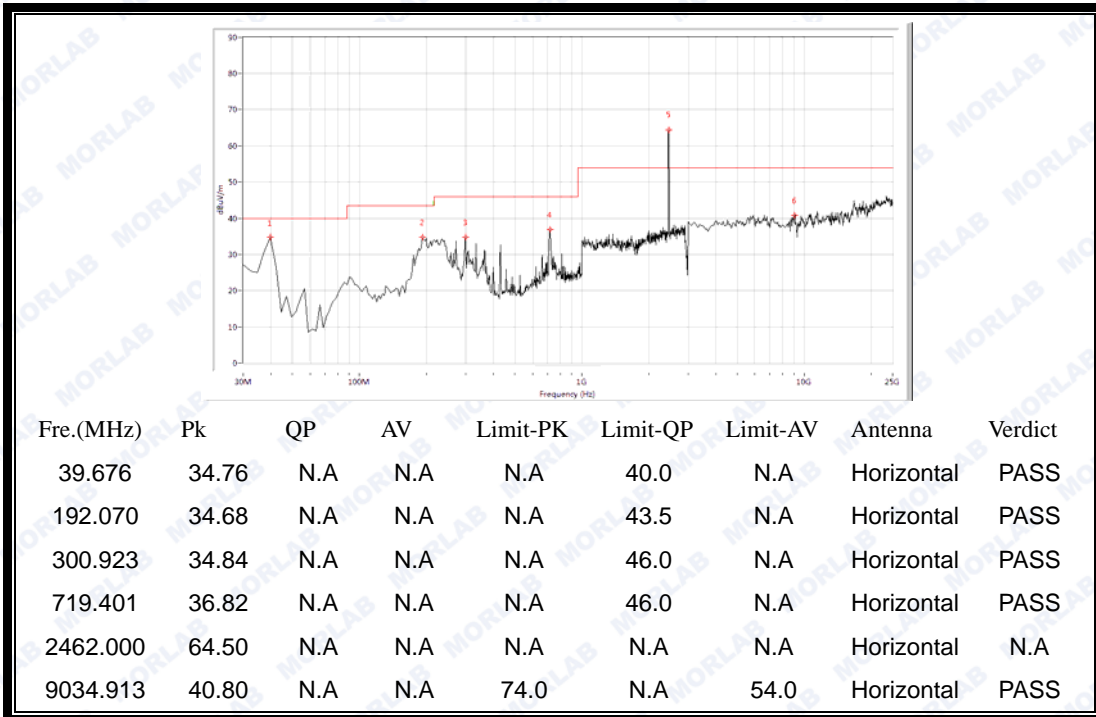

(Antenna Horizontal, 30MHz to 25GHz)

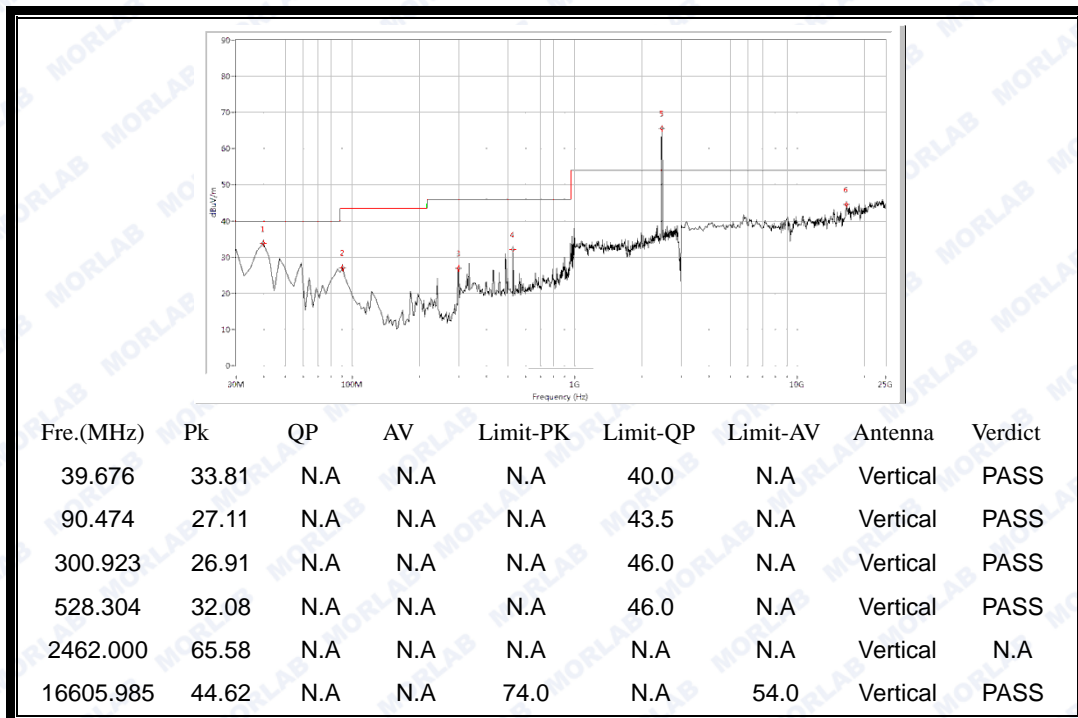

(Antenna Vertical, 30MHz to 25GHz)



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

| | |
|-------------------------------|--|
| Company Name: | Shenzhen Morlab Communications Technology Co., Ltd. |
| Department: | Morlab Laboratory |
| Address: | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |
| Responsible Test Lab Manager: | Mr. Su Feng |
| Telephone: | +86 755 36698555 |
| Facsimile: | +86 755 36698525 |

1.2 Identification of the Responsible Testing Location

| | |
|----------|--|
| Name: | Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory |
| Address: | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |

1.3 Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2009, ANSI C63.4 2009 and CISPR Publication 22; the FCC registration number is 695796.



1.4 Test Equipments Utilized

1.4.1 Conducted Test Equipments

| Conducted Test Equipment | | | | | | |
|--------------------------|---------------------------|------------|---------|--------------|------------|------------|
| No. | Equipment Name | Serial No. | Type | Manufacturer | Cal. Date | Cal. Due |
| 1 | Spectrum Analyzer | MY45101810 | E4407B | Agilent | 2014.02.26 | 2014.02.25 |
| 2 | Power Splitter | NW521 | 1506A | Weinschel | 2014.02.26 | 2014.02.25 |
| 3 | Attenuator 1 | (n.a.) | 10dB | Resnet | 2014.02.26 | 2014.02.25 |
| 4 | Attenuator 2 | (n.a.) | 3dB | Resnet | 2014.02.26 | 2014.02.25 |
| 5 | USB Wideband Power Sensor | MY52280010 | U2021XA | Agilent | 2014.02.26 | 2014.02.25 |
| 6 | EXA Signal Analyzer | MY51440152 | N9010A | Agilent | 2014.02.26 | 2014.02.25 |
| 7 | RF cable | CB01 | RF01 | Morlab | N/A | N/A |
| 8 | Coaxial cable | CB02 | RF02 | Morlab | N/A | N/A |
| 9 | SMA connector | CN01 | RF03 | HUBER-SUHNER | N/A | N/A |

1.4.2 Conducted Emission Test Equipments

| Conducted Emission Test Equipments | | | | | | |
|------------------------------------|----------------------|------------|-------------|--------------|------------|------------|
| No. | Equipment Name | Serial No. | Type | Manufacturer | Cal. Date | Cal. Due |
| 1 | Receiver | US44210471 | E7405A | Agilent | 2014.02.26 | 2014.02.25 |
| 2 | LISN | 812744 | NSLK 8127 | Schwarzbeck | 2014.02.26 | 2014.02.25 |
| 3 | Service Supplier | 100448 | CMU200 | R&S | 2014.02.26 | 2014.02.25 |
| 4 | Pulse Limiter (20dB) | 9391 | VTSD 9561-D | Schwarzbeck | 2014.02.26 | 2014.02.25 |
| 5 | Coaxial cable(BNC) | CB01 | EMC01 | Morlab | N/A | N/A |



1.4.3 Radiated Test Equipments

| Radiated Test Equipments | | | | | | |
|--------------------------|---------------------------|------------|------------|---------------|------------|--------------|
| No. | Equipment Name | Serial No. | Type | Manufacturer | Cal. Date | Cal.Due Date |
| 1 | System Simulator | 100448 | CMU200 | R&S | 2015.02.26 | 2016.02.25 |
| 2 | Receiver | US44210471 | E7405A | Agilent | 2015.02.26 | 2016.02.25 |
| 3 | Test Antenna - Bi-Log | 9163-274 | 9m*6m*6m | Albatross | 2015.02.26 | 2016.02.25 |
| 4 | Test Antenna - Horn | 9120D-963 | VULB 9163 | Schwarzbeck | 2015.02.26 | 2016.02.25 |
| 5 | Test Antenna - Horn | 71688 | BBHA 9120D | Schwarzbeck | 2015.02.26 | 2016.02.25 |
| 6 | Test Antenna - Loop | 1519-022 | HL050S7 | R&S | 2015.02.26 | 2016.02.25 |
| 7 | Reject Filter | (n.a.) | BRM50702 | Micro-Tronics | 2015.02.26 | 2016.02.25 |
| 8 | Coaxial cable (N male) | CB02 | EMC02 | Morlab | N/A | N/A |
| 9 | Coaxial cable (N male) | CB03 | EMC03 | Morlab | N/A | N/A |

1.4.4 Climate Chamber

| Climate Chamber | | | | | | |
|-----------------|-----------------|------------|---------|--------------|------------|--------------|
| No. | Equipment Name | Serial No. | Type | Manufacturer | Cal.Date | Cal.Due Date |
| 1 | Climate Chamber | 2004012 | HL4003T | Yinhe | 2015.02.26 | 2016.02.25 |

1.4.5 Vibration Table

| Vibration Table | | | | | | |
|-----------------|-----------------|------------|-------------------|--------------|------------|--------------|
| No. | Equipment Name | Serial No. | Type | Manufacturer | Cal.Date | Cal.Due Date |
| 1 | Vibration Table | N/A | ACT2000- S015L | CMI-COM | 2015.02.26 | 2016.02.25 |

1.4.6 Anechoic Chamber

| Anechoic Chamber | | | | | | |
|------------------|------------------|------------|----------|--------------|------------|--------------|
| No. | Equipment Name | Serial No. | Type | Manufacturer | Cal.Date | Cal.Due Date |
| 1 | Anechoic Chamber | N/A | 9m*6m*6m | Albatross | 2015.02.26 | 2016.02.25 |

***** END OF REPORT *****