



# **FCC RADIO TEST REPORT-WIFI**

## **FCC ID:2ACVK-15G7000B**

**Product :** Wifi Dongle

**Trade Name :** KANO

**Model Name :** 15G7000B

**Serial Model :** N/A

**Report No. :** NTEK-2015NT1202192F

### **Prepared for**

Kano Computing Limited

69-89 Mile End Road, London E1 4TT, UK

### **Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street  
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website: [www.ntek.org.cn](http://www.ntek.org.cn)

## TEST RESULT CERTIFICATION

**Applicant's name** ..... Kano Computing Limited  
Address..... 69-89 Mile End Road, London E1 4TT, UK  
**Manufacturer's Name** ... Kano Computing Limited  
Address..... 69-89 Mile End Road, London E1 4TT, UK

### Product description

Product name ..... Wifi Dongle  
Model and/or type reference ..... 15G7000B  
Serial Model ..... N/A

**Standards** ..... FCC Part15.247 01 Oct. 2015

Test procedure ..... ANSI C63.10-2013 and KDB 558074: June 5, 2014

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

**Date of Test** .....

Date (s) of performance of tests..... 02 Nov. 2015 ~28 Nov. 2015

Date of Issue ..... 28 Nov. 2015

Test Result..... **Pass**

Testing Engineer :   
(Allen Liu)

Technical Manager :   
(Brown Lu)

Authorized Signatory :   
(Sam Chen)

**Table of Contents**

	<b>Page</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2 . GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
<b>3 . EMC EMISSION TEST</b>	<b>13</b>
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	20
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	21
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	22
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	24
<b>4 . POWER SPECTRAL DENSITY TEST</b>	<b>26</b>
4.1 APPLIED PROCEDURES / LIMIT	26
4.1.1 TEST PROCEDURE	26
4.1.2 DEVIATION FROM STANDARD	26
4.1.3 TEST SETUP	26
4.1.4 EUT OPERATION CONDITIONS	26
4.1.5 TEST RESULTS	27
<b>5 . BANDWIDTH TEST</b>	<b>35</b>
5.1 APPLIED PROCEDURES / LIMIT	35
5.1.1 TEST PROCEDURE	35

**Table of Contents**

	<b>Page</b>
<b>TEST SETUP</b>	<b>35</b>
<b>5.1.2 EUT OPERATION CONDITIONS</b>	<b>35</b>
<b>5.1.3 TEST RESULTS</b>	<b>36</b>
<b>6 . PEAK OUTPUT POWER TEST</b>	<b>44</b>
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	<b>44</b>
<b>6.1.1 TEST PROCEDURE</b>	<b>44</b>
<b>6.1.2 DEVIATION FROM STANDARD</b>	<b>44</b>
<b>6.1.3 TEST SETUP</b>	<b>44</b>
<b>6.1.4 EUT OPERATION CONDITIONS</b>	<b>44</b>
<b>6.1.5 TEST RESULTS</b>	<b>45</b>
<b>7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE</b>	<b>46</b>
<b>7.1 DEVIATION FROM STANDARD</b>	<b>46</b>
<b>7.2 TEST SETUP</b>	<b>46</b>
<b>7.3 EUT OPERATION CONDITIONS</b>	<b>46</b>
<b>7.4 TEST RESULTS</b>	<b>47</b>
<b>8 . ANTENNA REQUIREMENT</b>	<b>52</b>
<b>8.1 STANDARD REQUIREMENT</b>	<b>52</b>
<b>8.2 EUT ANTENNA</b>	<b>52</b>

### 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

**NOTE:**

(1) "N/A" denotes test is not applicable in this Test Report

### 1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Wifi Dongle	
Trade Name	KANO	
Model Name	15G7000B	
Serial Model	N/A	
Model Difference	N/A	
Product Description	Operation Frequency:	802.11b/g/n(20MHz): 2412~2462MHz 802.11n(40MHz):2422~2452MHz
	Modulation Type:	IEEE 802.11b : DSSS (CCK, QPSK, DBPSK) IEEE 802.11g/n (HT20/HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz/40MHz):150/144.44/130/117/115.56/104/86.67/78/52/6.5Mbps
	Number Of Channel	802.11b/g/n20MHz:11CH 802.11n40MHz:7CH
	Antenna Designation:	Please see Note 3.
	Antenna Gain (dBi)	1.0 dbi
	Channel List	Please refer to the Note 2.
Ratings	DC 5.0V	
Adapter	N/A	
Battery	N/A	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n(20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	06	2437	09	2452		
04	2427	07	2442				
05	2432	08	2447				

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	PIFA Antenna	N/A	1.0	Wifi Antenna



## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	keeping tx mode

For Conducted Emission	
Final Test Mode	Description
Mode 5	keeping tx mode

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	keeping tx mode

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) EUT configured to transmit continuously:
- (3) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

Mode	Data Rate
IEEE 802.11b	1 Mbps
IEEE 802.11g	6 Mbps
IEEE 802.11n20	MCS 7
IEEE 802.11n40	MCS 7

Operated Mode for Worst Duty Cycle	
Test Signal Duty Cycle (x)	Average correction factor (dB)
100% - IEEE 802.11b	0
100% - IEEE 802.11g	0
100% - IEEE 802.11n (HT20)	0
100% - IEEE 802.11n (HT40)	0

### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Spurious Emission Test



**2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Wifi Dongle	KANO	15G7000B	N/A	EUT
E-2	PC	lenovo	Y43p	N/A	

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

**2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS**

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2015.07.06	2016.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2015.06.06	2016.06.05	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2015.07.06	2016.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2015.06.06	2016.06.05	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2015.06.06	2016.06.05	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2015.07.06	2016.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2015.07.06	2016.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2015.12.22	2016.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2015.06.06	2016.06.05	1 year
10	Power Meter	R&S	NRVS	100696	2015.07.06	2016.07.05	1 year
11	Power Sensor	R&S	RPR3006P	0395.1619.05	2015.07.06	2016.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2015.06.06	2016.06.05	1 year
2	LISN	R&S	ENV216	101313	2015.08.24	2016.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2015.08.24	2016.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2015.06.06	2016.06.05	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2015.06.06	2016.06.05	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2015.06.06	2016.06.05	1 year

1	Attenuation	MCE	24-10-34	BN9258	2015.07.06	2016.07.05	1 year
---	-------------	-----	----------	--------	------------	------------	--------

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


**3.1.2 TEST PROCEDURE**

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**3.1.3 DEVIATION FROM TEST STANDARD**

No deviation

**3.1.4 TEST SETUP**

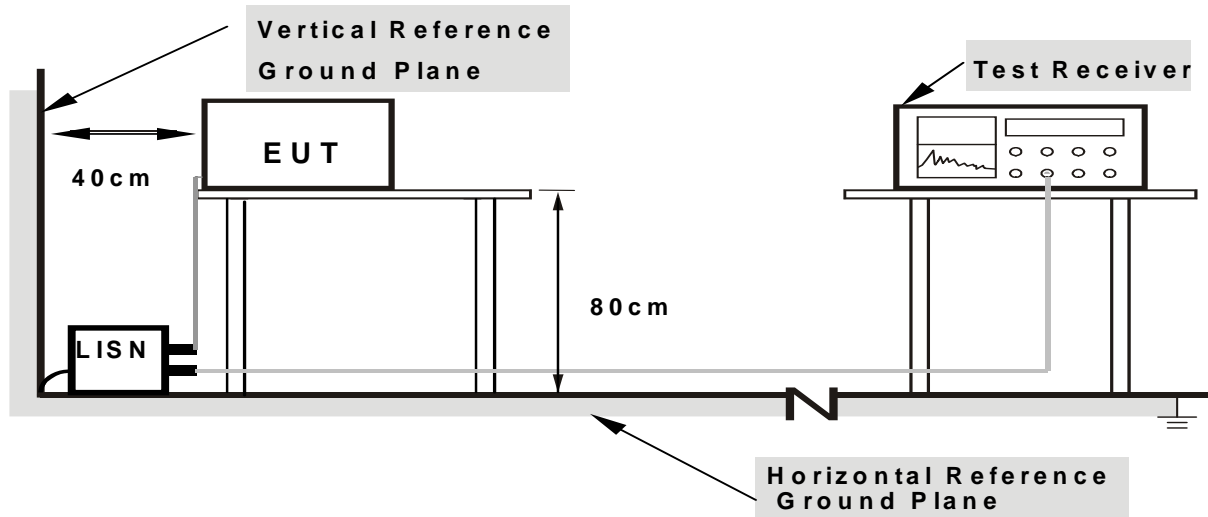

- Note:**
- 1. Support units were connected to second LISN.
  - 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

**3.1.5 EUT OPERATING CONDITIONS**

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


### 3.1.6 TEST RESULTS

EUT :	Wifi Dongle	Model Name :	15G7000B
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form PC AC 120V/60Hz	Test Mode :	Mode 5

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.5540	38.06	9.79	47.85	56.00	-8.15	QP
0.5540	22.53	9.79	32.32	46.00	-13.68	AVG
0.7100	37.15	9.78	46.93	56.00	-9.07	QP
0.7100	26.77	9.78	36.55	46.00	-9.45	AVG
0.7940	36.53	9.80	46.33	56.00	-9.67	QP
0.7940	24.32	9.80	34.12	46.00	-11.88	AVG
1.0060	38.53	9.85	48.38	56.00	-7.62	QP
1.0060	24.20	9.85	34.05	46.00	-11.95	AVG
1.2420	35.42	9.82	45.24	56.00	-10.76	QP
1.2420	23.76	9.82	33.58	46.00	-12.42	AVG
4.5858	33.46	9.75	43.21	56.00	-12.79	QP
4.5858	21.94	9.75	31.69	46.00	-14.31	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

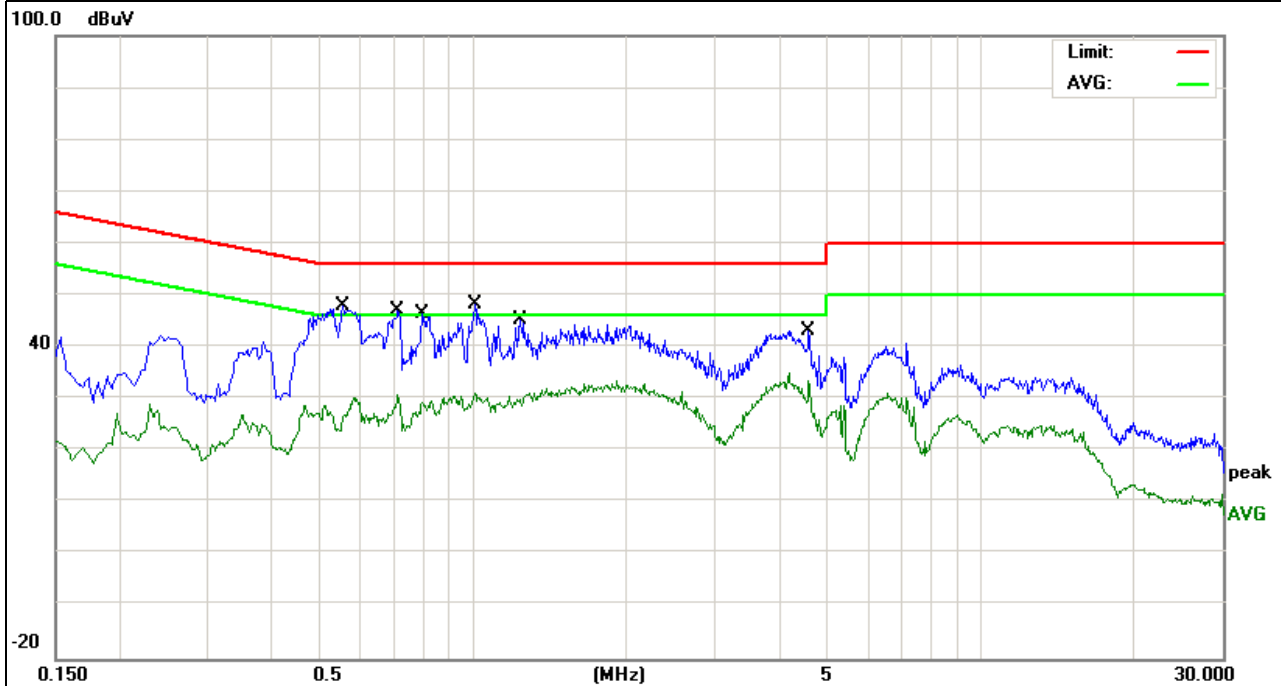


EUT :	Wifi Dongle	Model Name :	15G7000B
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form PC AC 120V/60Hz	Test Mode :	Mode 5

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2340	33.77	10.06	43.83	62.30	-18.47	QP
0.2340	23.59	10.06	33.65	52.30	-18.65	AVG
0.3420	33.84	10.10	43.94	59.15	-15.21	QP
0.3420	22.44	10.10	32.54	49.15	-16.61	AVG
0.5580	41.15	9.82	50.97	56.00	-5.03	QP
0.5580	28.30	9.82	38.12	46.00	-7.88	AVG
0.7100	39.55	9.81	49.36	56.00	-6.64	QP
0.7100	22.78	9.81	32.59	46.00	-13.41	AVG
0.8100	38.03	9.83	47.86	56.00	-8.14	QP
0.8100	24.86	9.83	34.69	46.00	-11.31	AVG
1.0180	38.67	9.87	48.54	56.00	-7.46	QP
1.0180	24.38	9.87	34.25	46.00	-11.75	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

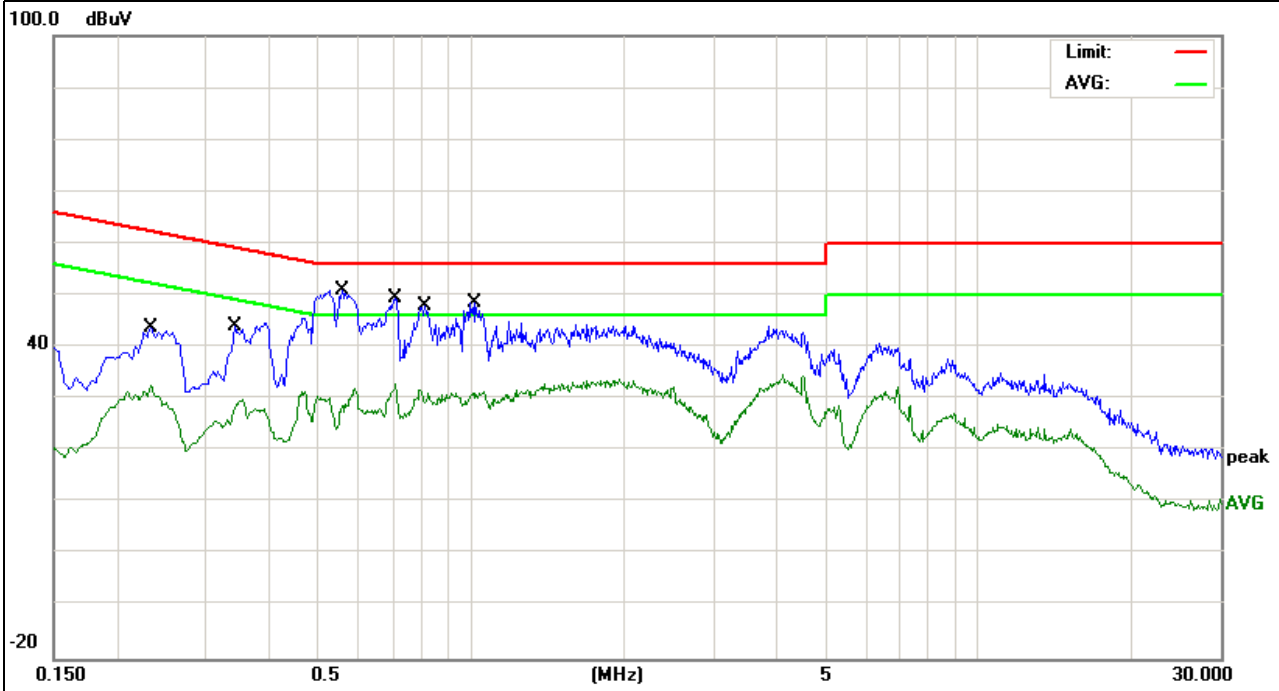



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	dBuV/m@at 3M	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic

The frequency spectrum from 30 MHz to 25 GHz was investigated.

All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector.

### 3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation


### 3.2.4 TEST SETUP

#### (A) Radiated Emission Test-Up Frequency Below 30MHz

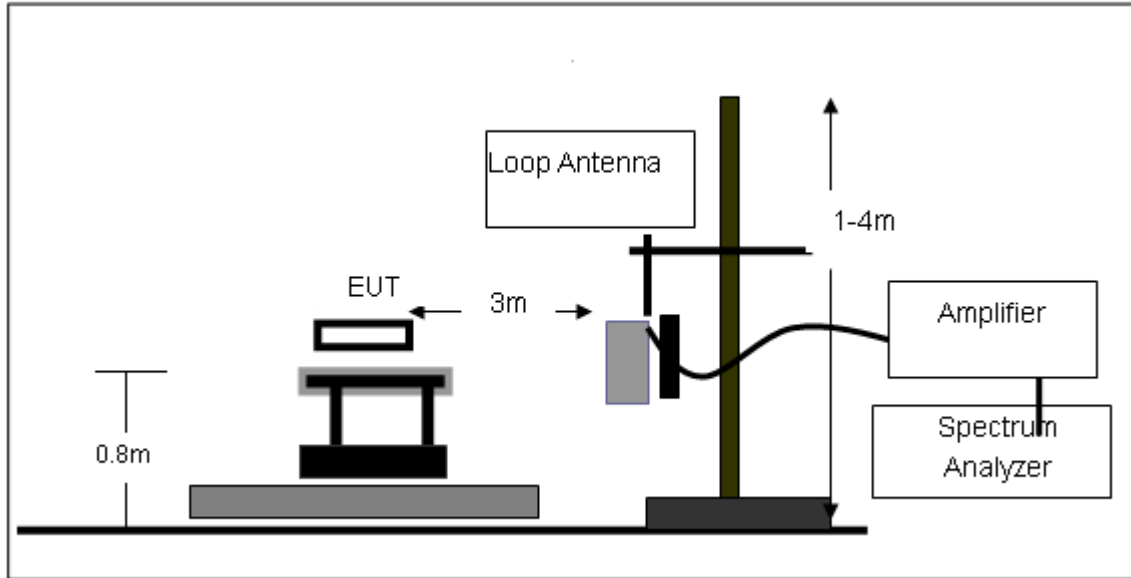

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

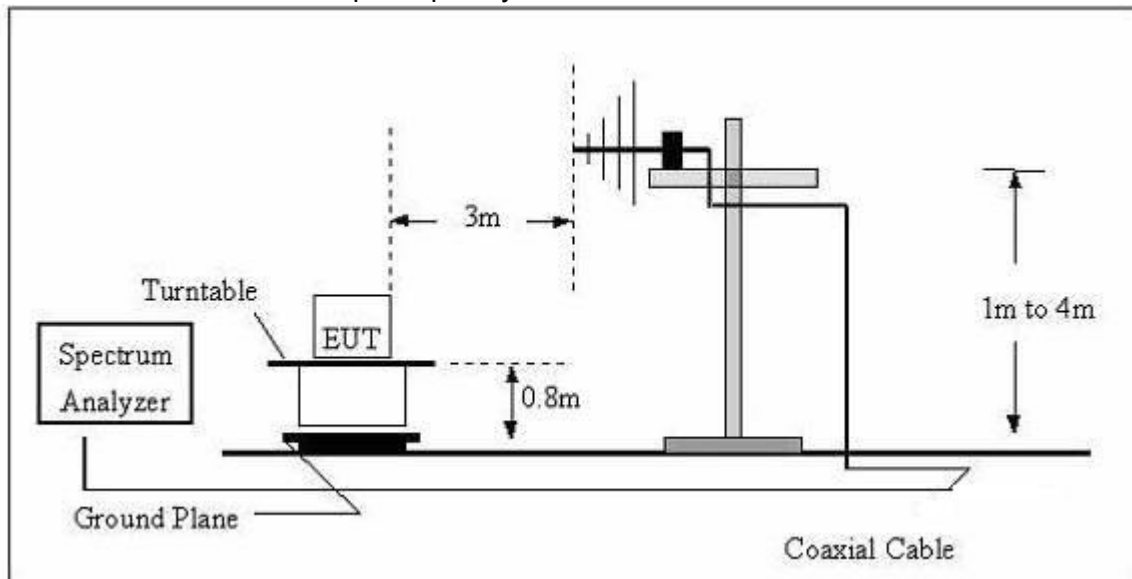

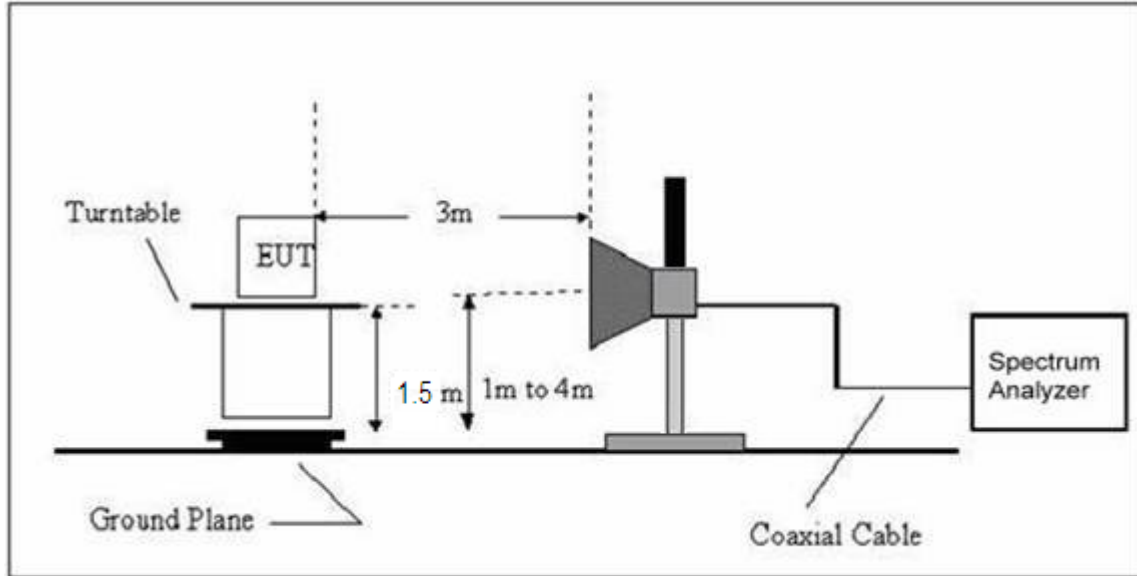**(C) Radiated Emission Test-Up Frequency Above 1GHz****3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

EUT:	Wifi Dongle	Model Name. :	15G7000B
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 5.0V
Test Mode :	TX	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	N/A
--	--	--	--	N/A

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


### 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	Wifi Dongle	Model Name :	15G7000B
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5.0V
Test Mode :	TX -802.11B (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	31.2893	12.31	19.11	31.42	40.00	-8.58	QP
V	98.8324	19.06	10.37	29.43	43.50	-14.07	QP
V	139.3610	19.65	11.01	30.66	43.50	-12.84	QP
V	223.7333	18.76	10.91	29.67	46.00	-16.33	QP
V	429.5228	17.32	14.85	32.17	46.00	-13.83	QP
V	744.8659	14.23	22.04	36.27	46.00	-9.73	QP

**Remark:**


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

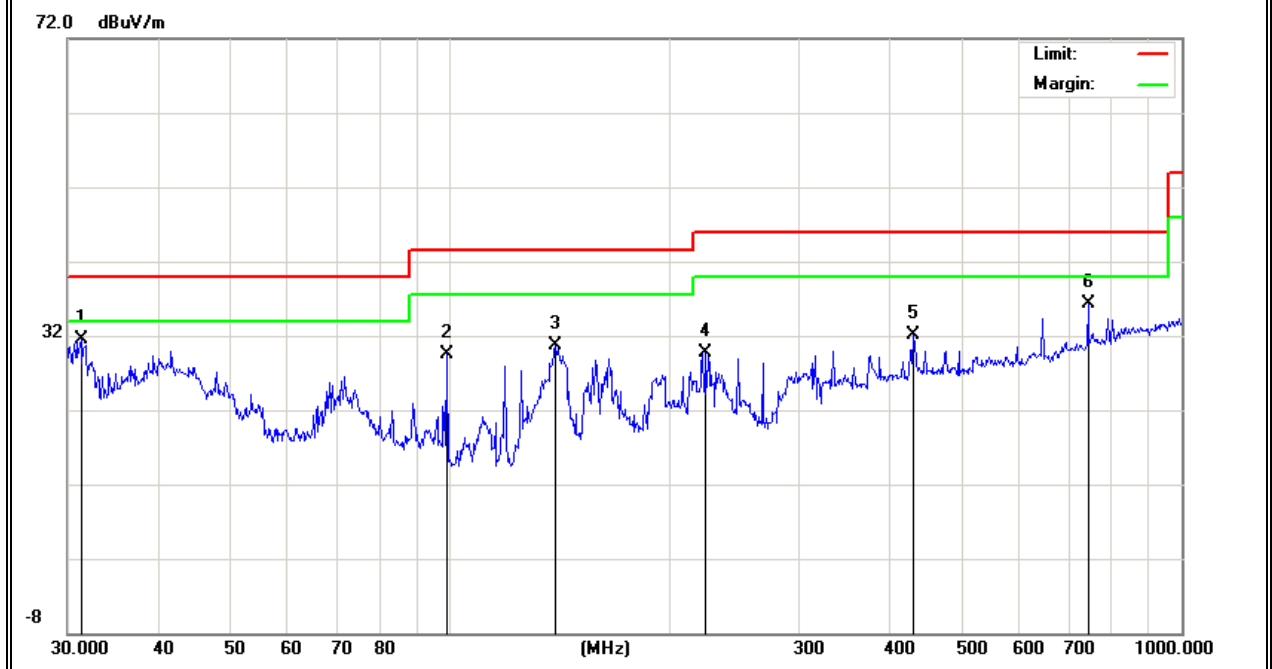

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	98.8324	16.56	10.37	26.93	43.50	-16.57	QP
H	118.6012	21.04	10.42	31.46	43.50	-12.04	QP
H	237.4756	24.24	10.75	34.99	46.00	-11.01	QP
H	312.1792	24.72	13.05	37.77	46.00	-8.23	QP
H	420.5803	22.80	14.68	37.48	46.00	-8.52	QP
H	645.1195	14.57	20.31	34.88	46.00	-11.12	QP

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

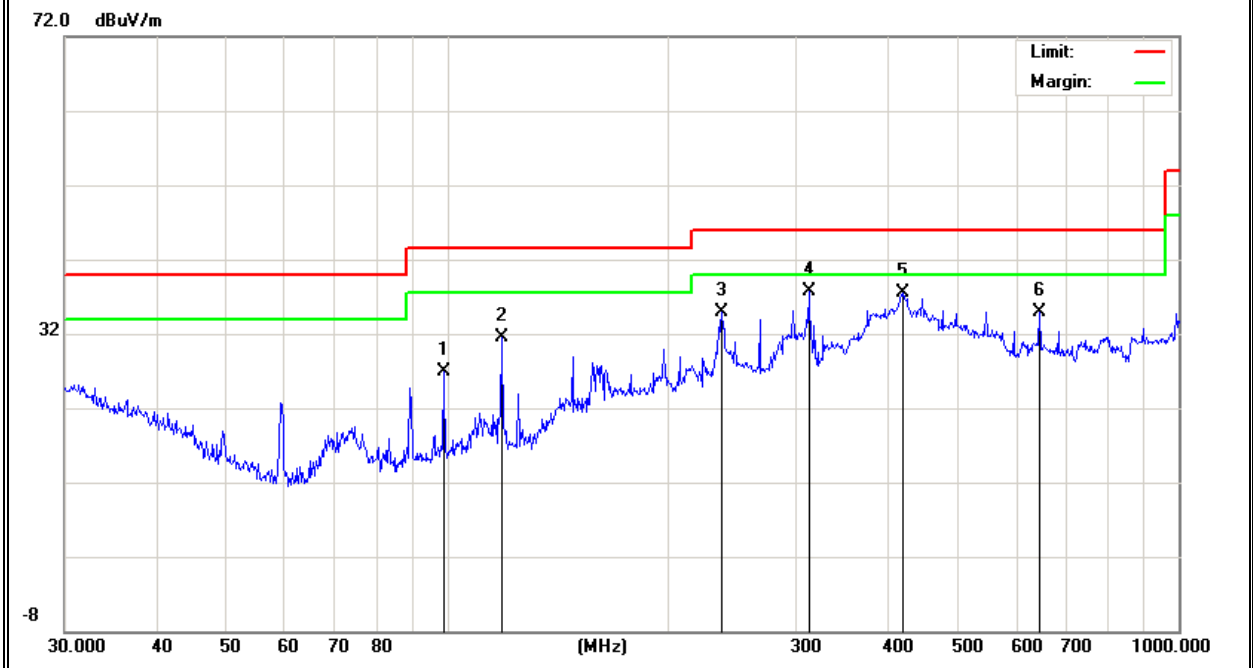

### 3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

EUT :	Wifi Dongle	Model Name :	15G7000B
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5.0V
Test Mode :	TX		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low Channel (2412 MHz)-Above 1G</b>							
Vertical	4824.335	52.33	10.44	62.77	74.00	-11.23	Pk
Vertical	4824.335	35.36	10.44	45.80	54.00	-8.20	Av
Vertical	7236.135	42.05	12.39	54.44	74.00	-19.56	Pk
Vertical	7236.135	30.35	12.39	42.74	54.00	-11.26	Av
Horizontal	4824.333	52.65	10.44	63.09	74.00	-10.91	Pk
Horizontal	4824.333	31.65	10.44	42.09	54.00	-11.91	Av
Horizontal	7236.254	46.37	12.39	58.76	74.00	-15.24	Pk
Horizontal	7236.254	31.34	12.39	43.73	54.00	-10.27	Av
<b>Mid Channel (2437 MHz)-Above 1G</b>							
Vertical	4874.132	52.02	10.40	62.42	74.00	-11.58	Pk
Vertical	4874.132	32.36	10.40	42.76	54.00	-11.24	Av
Vertical	7311.052	44.58	12.75	57.33	74.00	-16.67	Pk
Vertical	7311.052	28.05	12.75	40.80	54.00	-13.20	Av
Horizontal	4874.133	52.45	10.40	62.85	74.00	-11.15	Pk
Horizontal	4874.133	34.02	10.40	44.42	54.00	-9.58	Av
Horizontal	7311.055	48.02	12.75	60.77	74.00	-13.23	Pk
Horizontal	7311.055	29.15	12.75	41.90	54.00	-12.10	Av
<b>High Channel (2462 MHz)- Above 1G</b>							
Vertical	4924.188	51.35	10.39	61.74	74.00	-12.26	Pk
Vertical	4924.188	33.45	10.39	43.84	54.00	-10.16	Av
Vertical	7386.054	42.65	12.68	55.33	74.00	-18.67	Pk
Vertical	7386.054	26.54	12.68	39.22	54.00	-14.78	Av
Horizontal	4924.189	48.36	10.39	58.75	74.00	-15.25	Pk
Horizontal	4924.189	34.02	10.39	44.41	54.00	-9.59	Av
Horizontal	7386.055	46.47	12.68	59.15	74.00	-14.85	Pk
Horizontal	7386.055	30.25	12.68	42.93	54.00	-11.07	Av

Note: "802.11b" mode is the worst mode.



Radiated band edge:

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type	Comment
<b>802.11b</b>							
2390	62.35	-13.06	49.29	74	-24.71	peak	Vertical
2390	29.57	-13.06	16.51	74	-57.49	peak	Horizontal
2483.5	60.25	-12.78	47.47	74	-26.53	peak	Vertical
2483.5	62.41	-12.78	49.63	74	-24.37	peak	Horizontal
<b>802.11g</b>							
2390	60.23	-13.06	47.17	74	-26.83	peak	Vertical
2390	59.87	-13.06	46.81	74	-27.19	peak	Horizontal
2483.5	59.96	-12.78	47.18	74	-26.82	peak	Vertical
2483.5	60.24	-12.78	47.46	74	-26.54	peak	Horizontal
<b>802.11n (20)</b>							
2390	60.54	-13.06	47.48	74	-26.52	peak	Vertical
2390	60.29	-13.06	47.23	74	-26.77	peak	Horizontal
2483.5	60.36	-12.78	47.58	74	-26.42	peak	Vertical
2483.5	60.29	-12.78	47.51	74	-26.49	peak	Horizontal
<b>802.11n (40)</b>							
2390	60.85	-13.06	47.79	74	-26.21	peak	Vertical
2390	60.44	-13.06	47.38	74	-26.62	peak	Horizontal
2483.5	61.92	-12.78	49.14	74	-24.86	peak	Vertical
2483.5	60.31	-12.78	47.53	74	-26.47	peak	Horizontal

#### 4. POWER SPECTRAL DENSITY TEST

##### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

##### 4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. 3 kHz ≤ Set the RBW ≤ 100 kHz.
4. Set the VBW ≥ 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

##### 4.1.2 DEVIATION FROM STANDARD

No deviation.

##### 4.1.3 TEST SETUP




##### 4.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

### 4.1.5 TEST RESULTS

EUT :	Wifi Dongle	Model Name :	15G7000B
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5.0V
Test Mode :	TX b Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412 MHz	-6.75	8	PASS
2437 MHz	-7.72	8	PASS
2462 MHz	-4.96	8	PASS


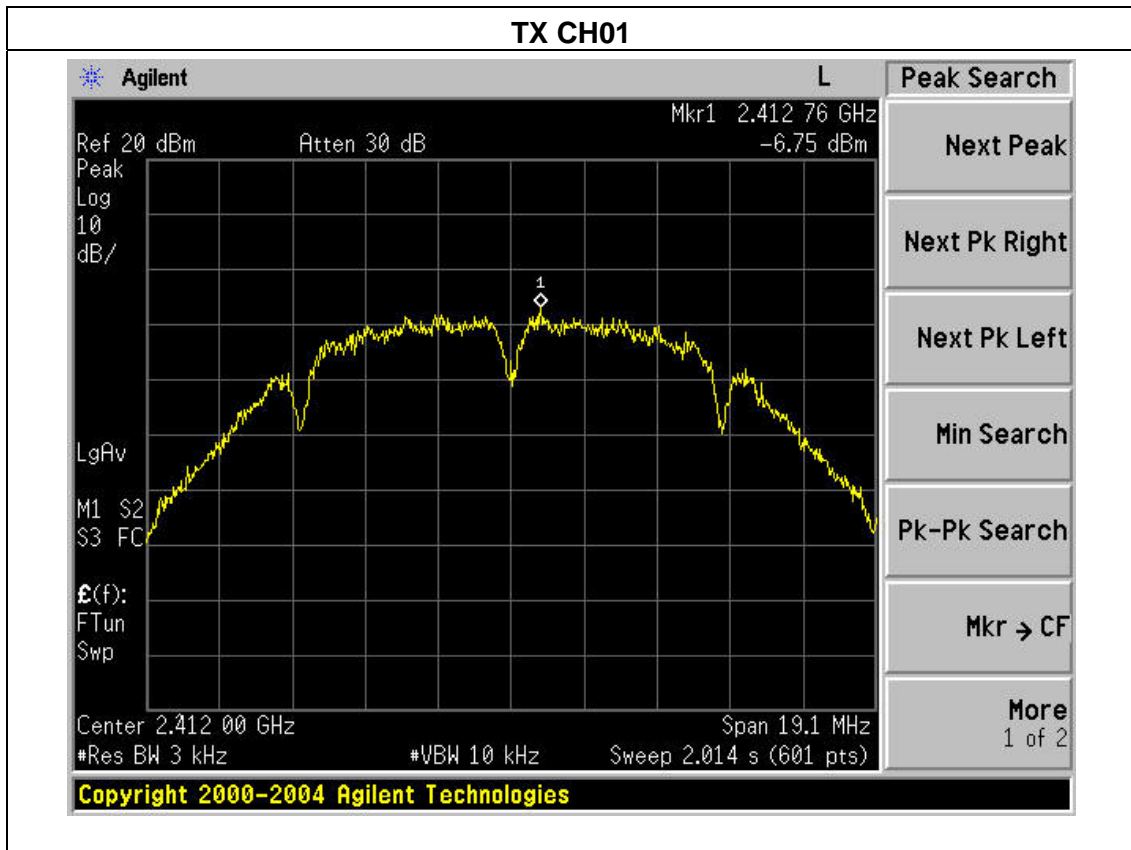


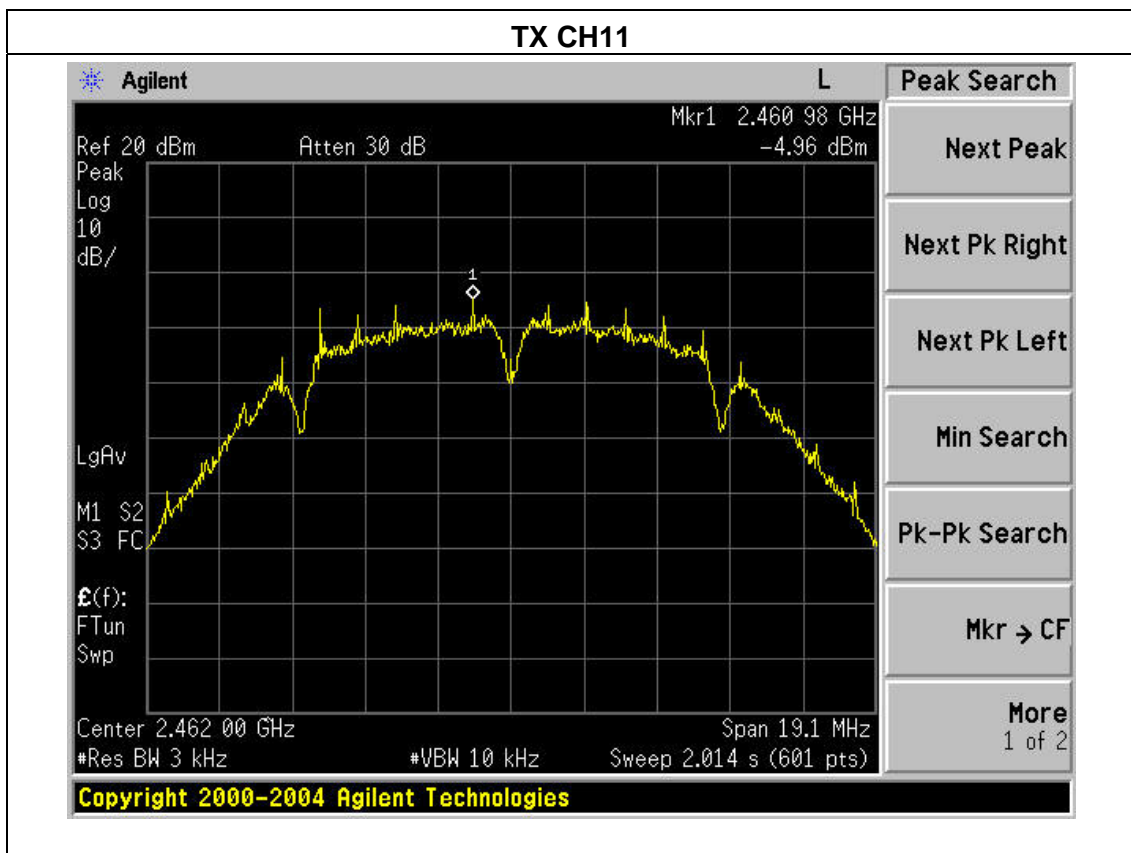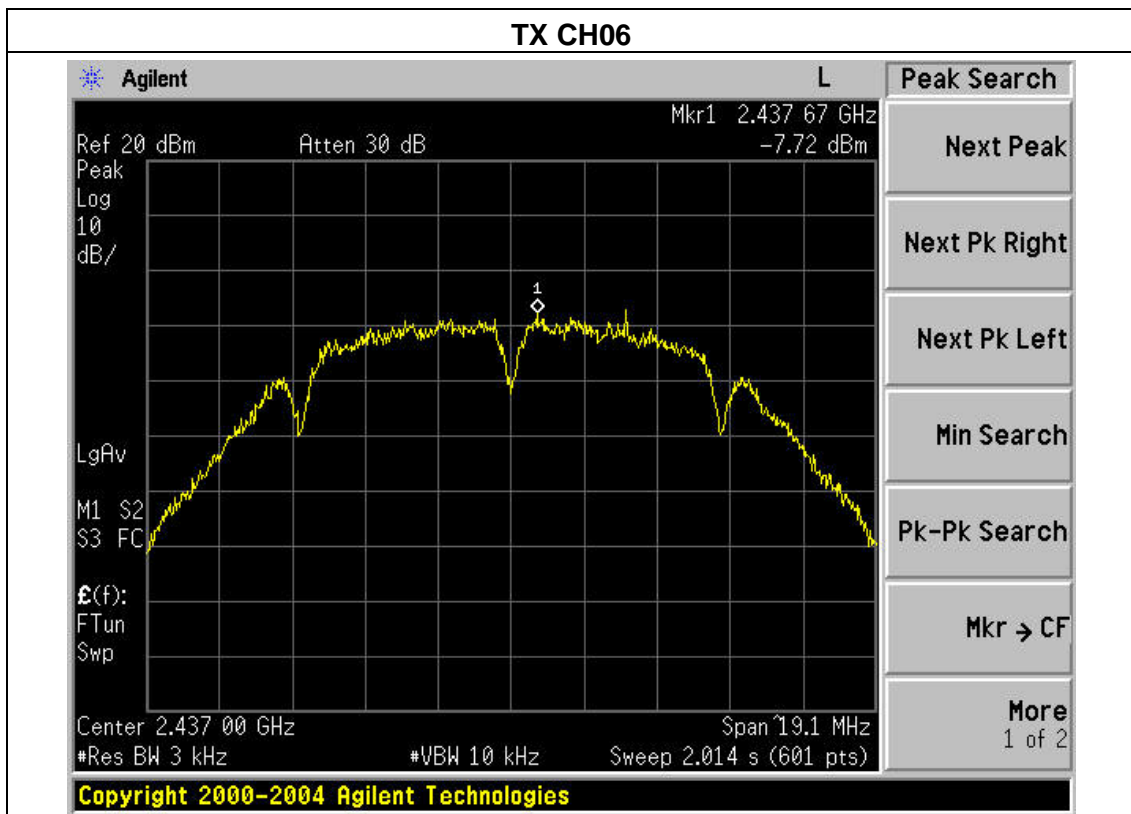

EUT :	Wifi Dongle	Model Name :	15G7000B
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5.0V
Test Mode :	TX g Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412 MHz	-12.73	8	PASS
2437 MHz	-11.28	8	PASS
2462 MHz	-14.65	8	PASS


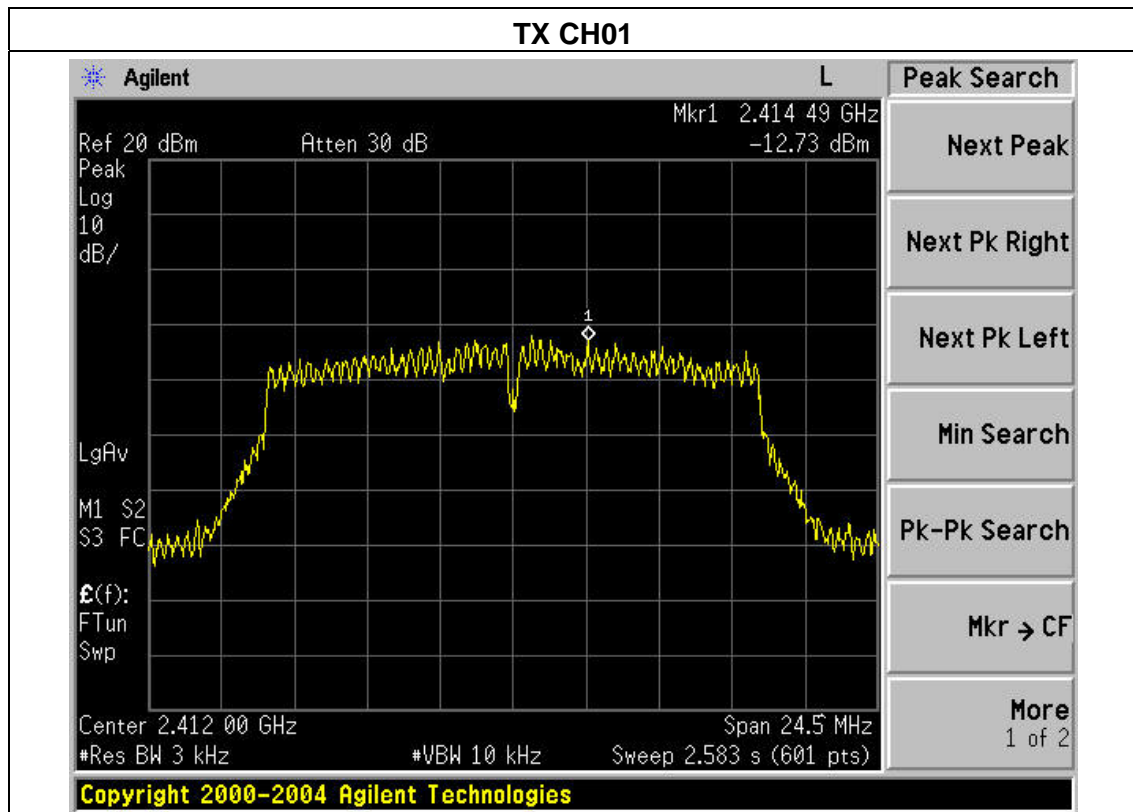


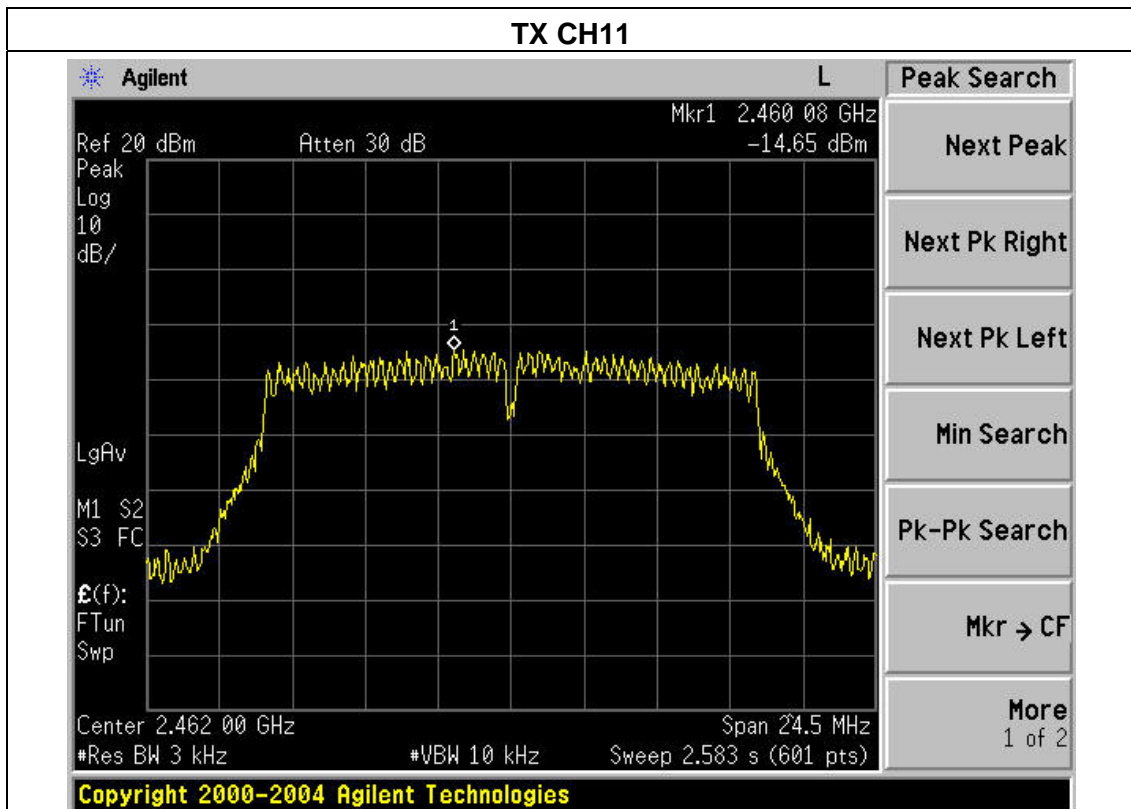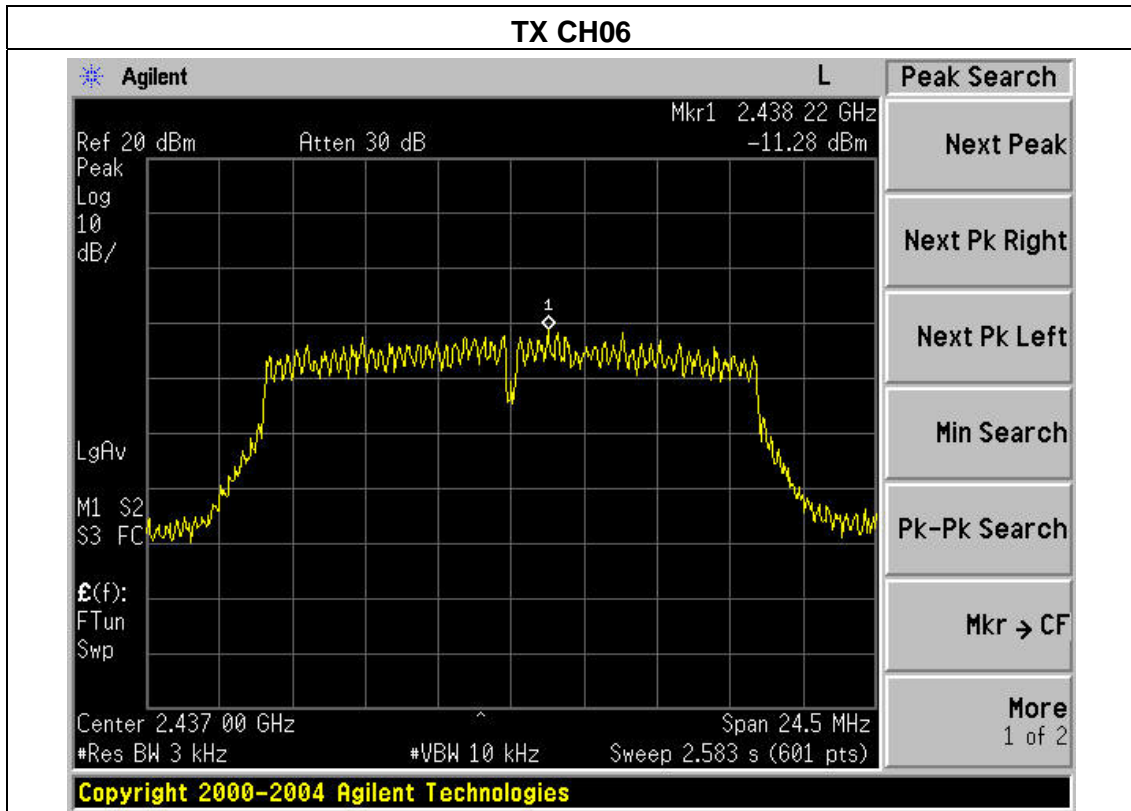

EUT :	Wifi Dongle	Model Name :	15G7000B
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5.0V
Test Mode :	TX n Mode (20MHz)/CH01, CH06, CH11		

Frequency	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412 MHz	-13.13	8	PASS
2437 MHz	-9.44	8	PASS
2462 MHz	-13.50	8	PASS

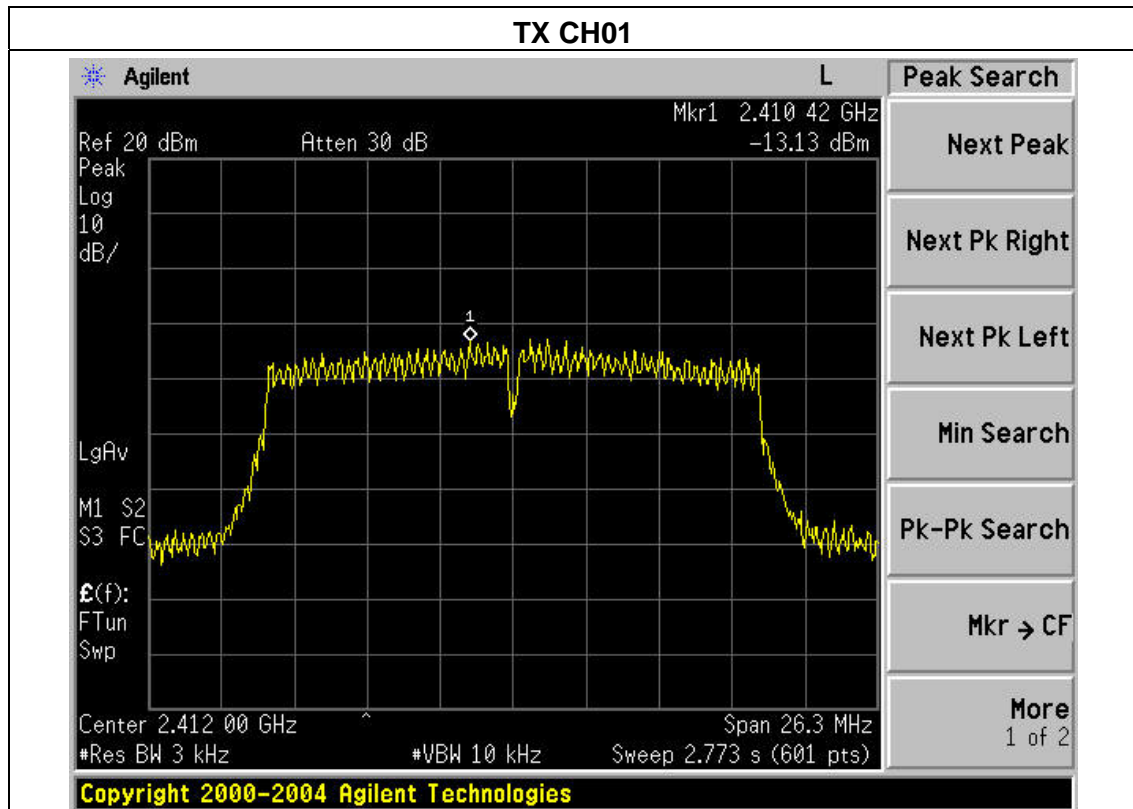


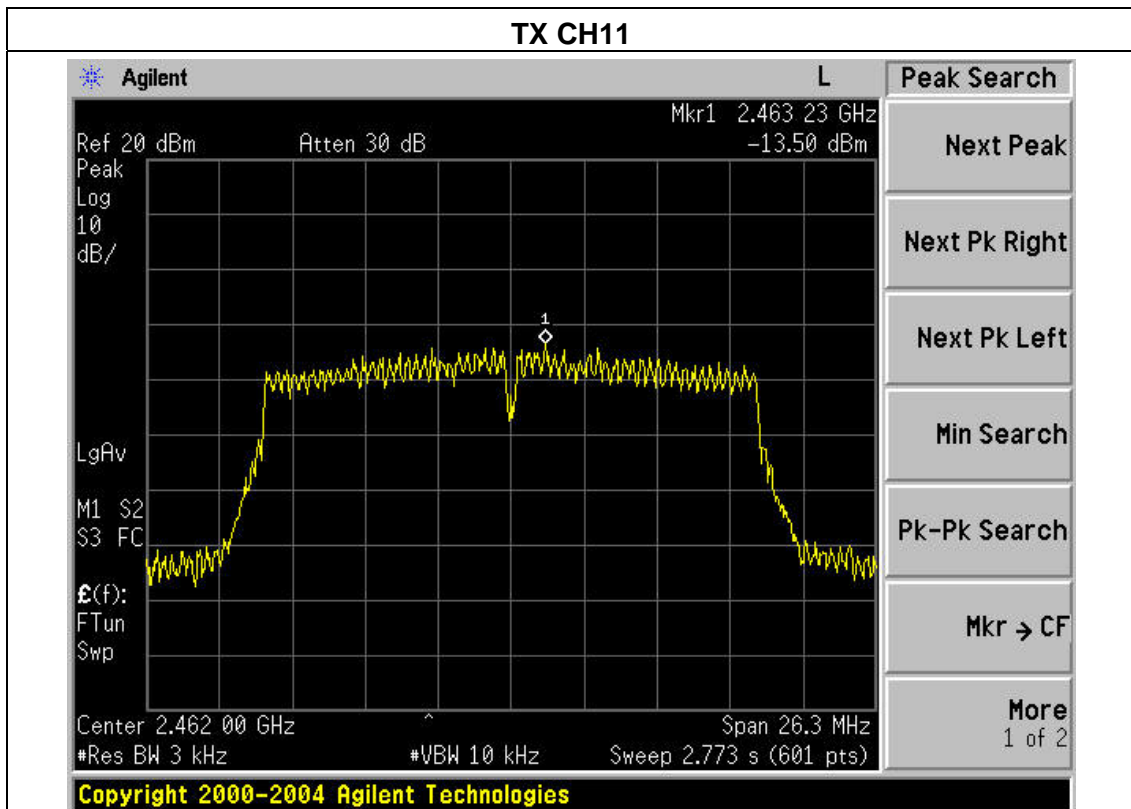
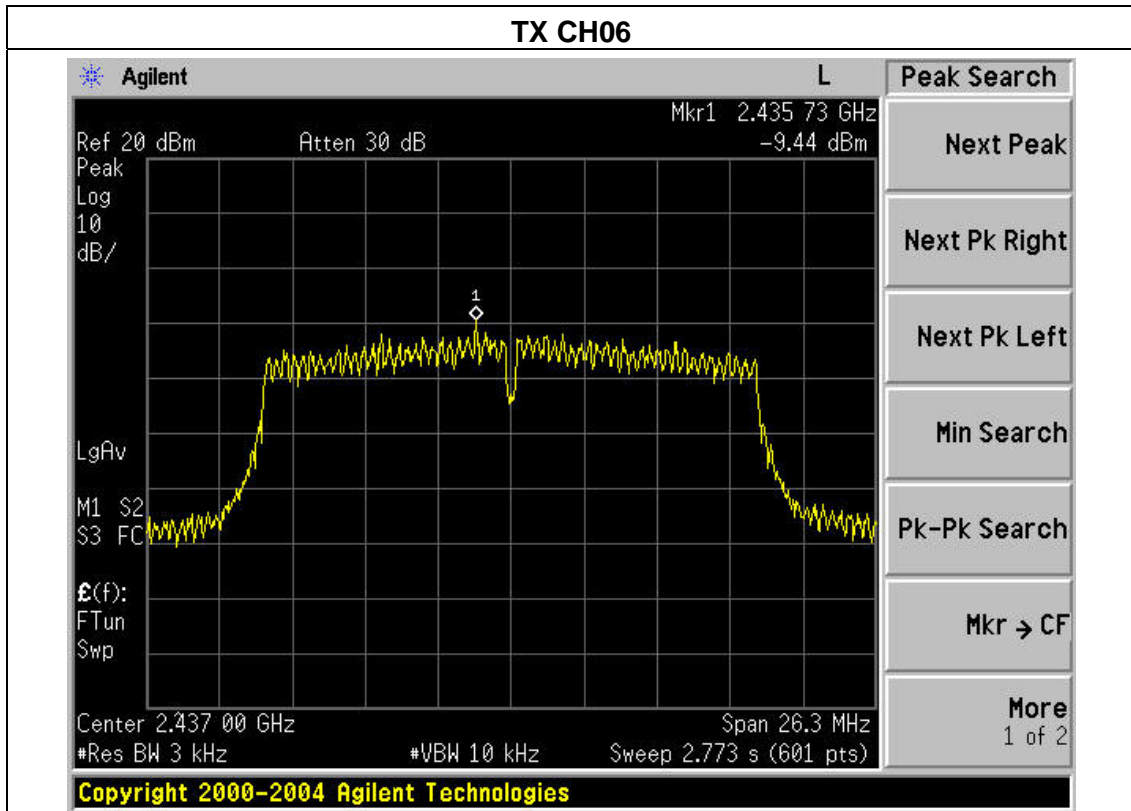




EUT :	Wifi Dongle	Model Name :	15G7000B
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5.0V
Test Mode :	TX n Mode (40MHz)/CH03, CH06, CH09		

Frequency	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2422 MHz	-17.68	8	PASS
2437 MHz	-15.20	8	PASS
2452 MHz	-17.48	8	PASS

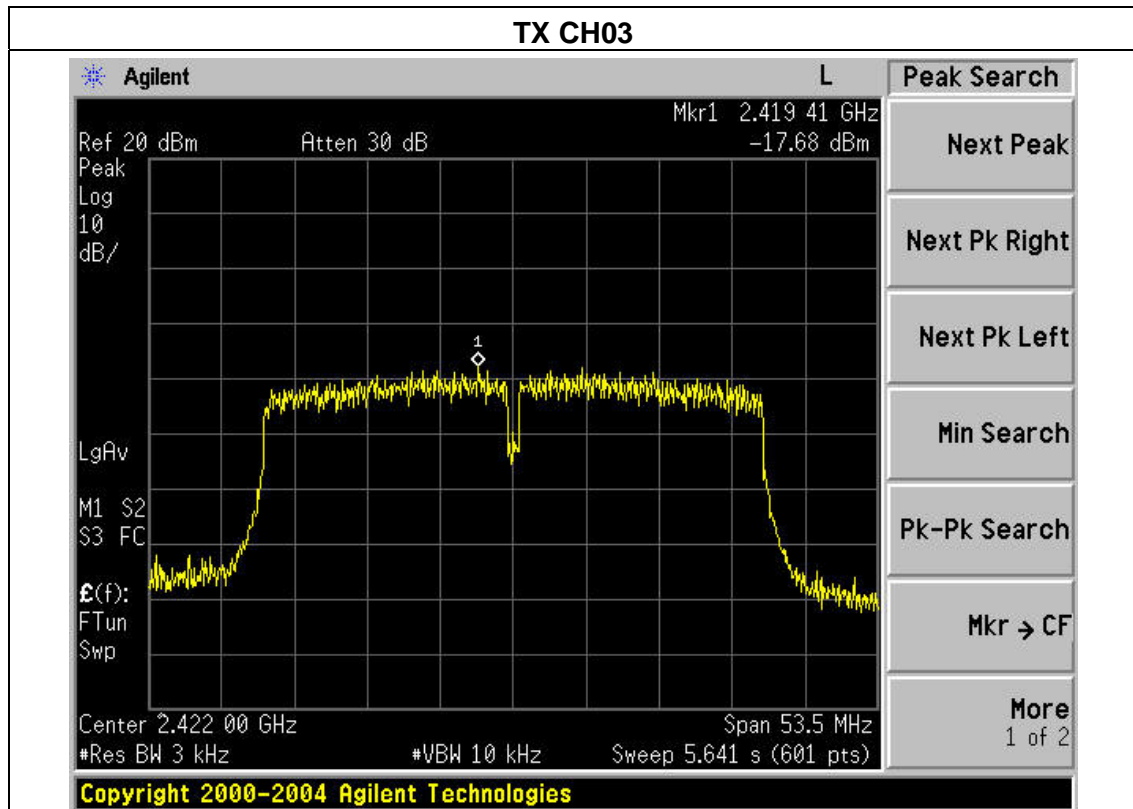

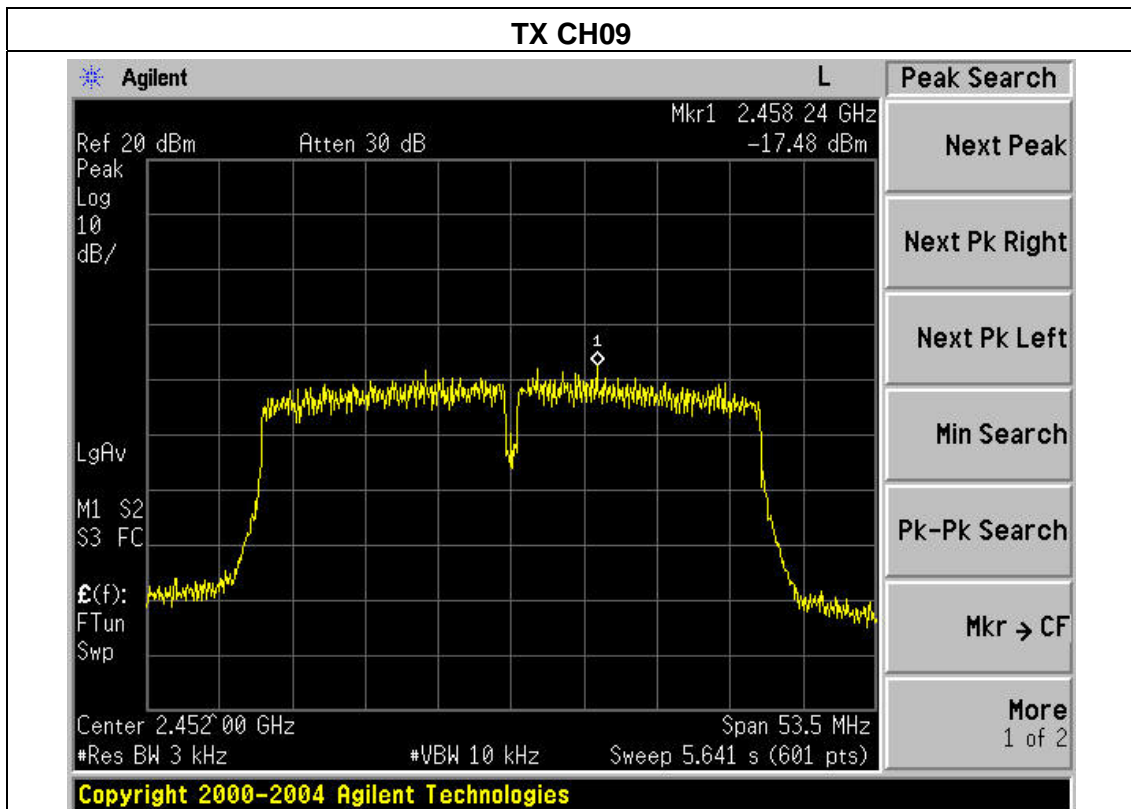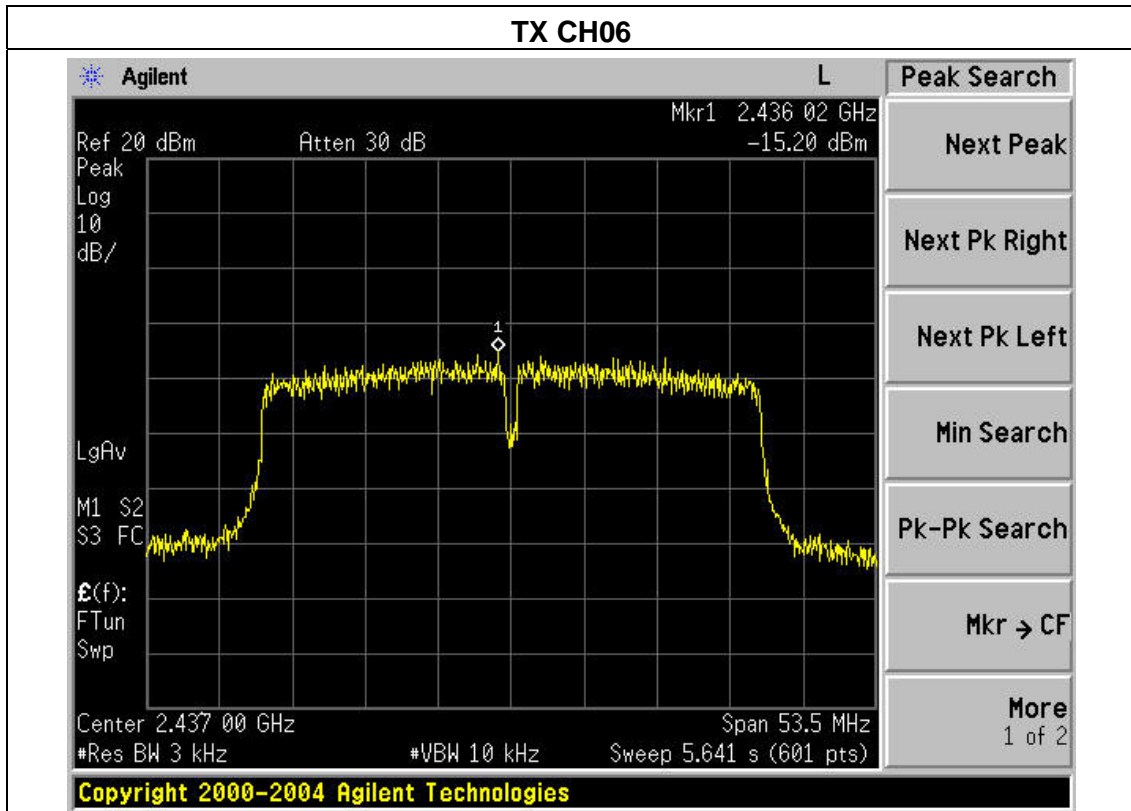

**5. BANDWIDTH TEST**


**5.1 APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

**5.1.1 TEST PROCEDURE**

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**TEST SETUP**

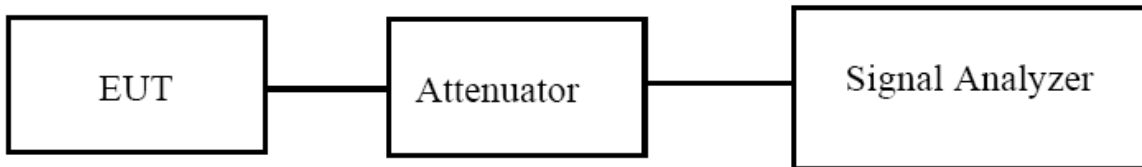


**5.1.2 EUT OPERATION CONDITIONS**



The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 5.1.3 TEST RESULTS

EUT :	Wifi Dongle	Model Name :	15G7000B
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5.0V
Test Mode :	TX b Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.596	500	Pass
Middle	2437	9.605	500	Pass
High	2462	9.586	500	Pass


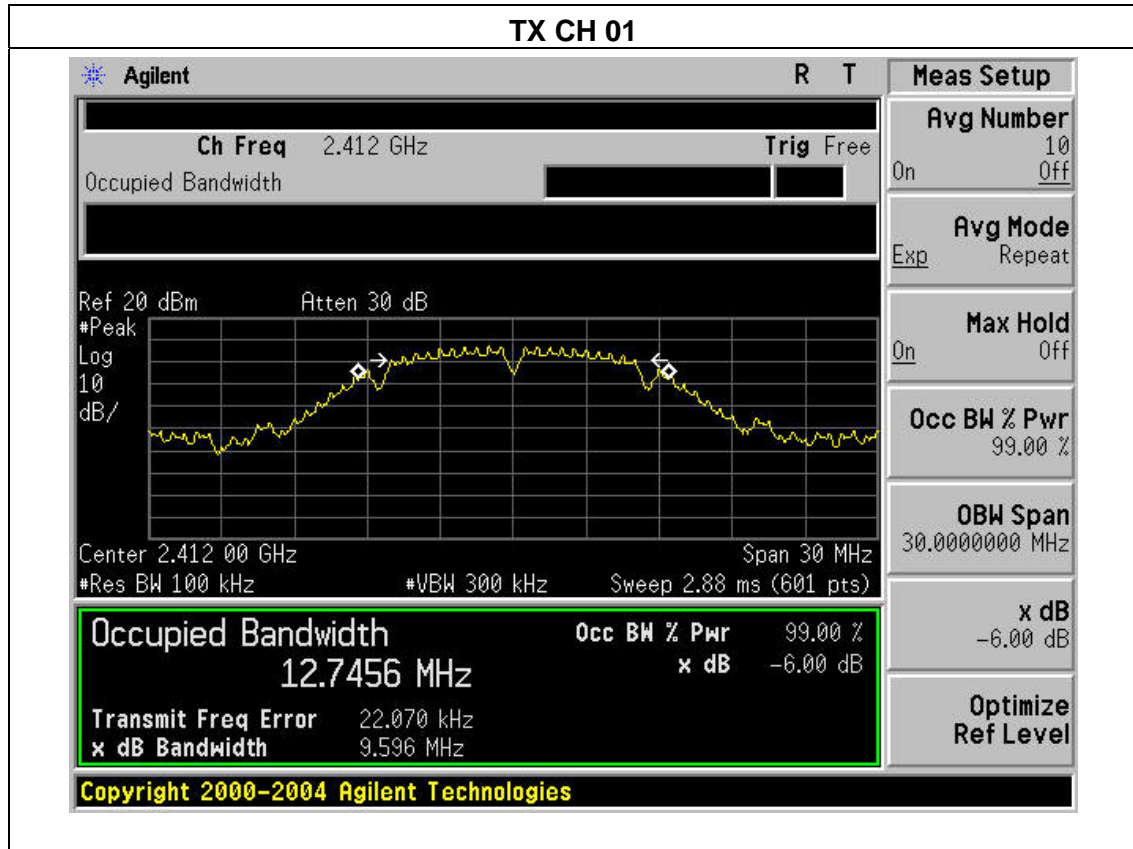


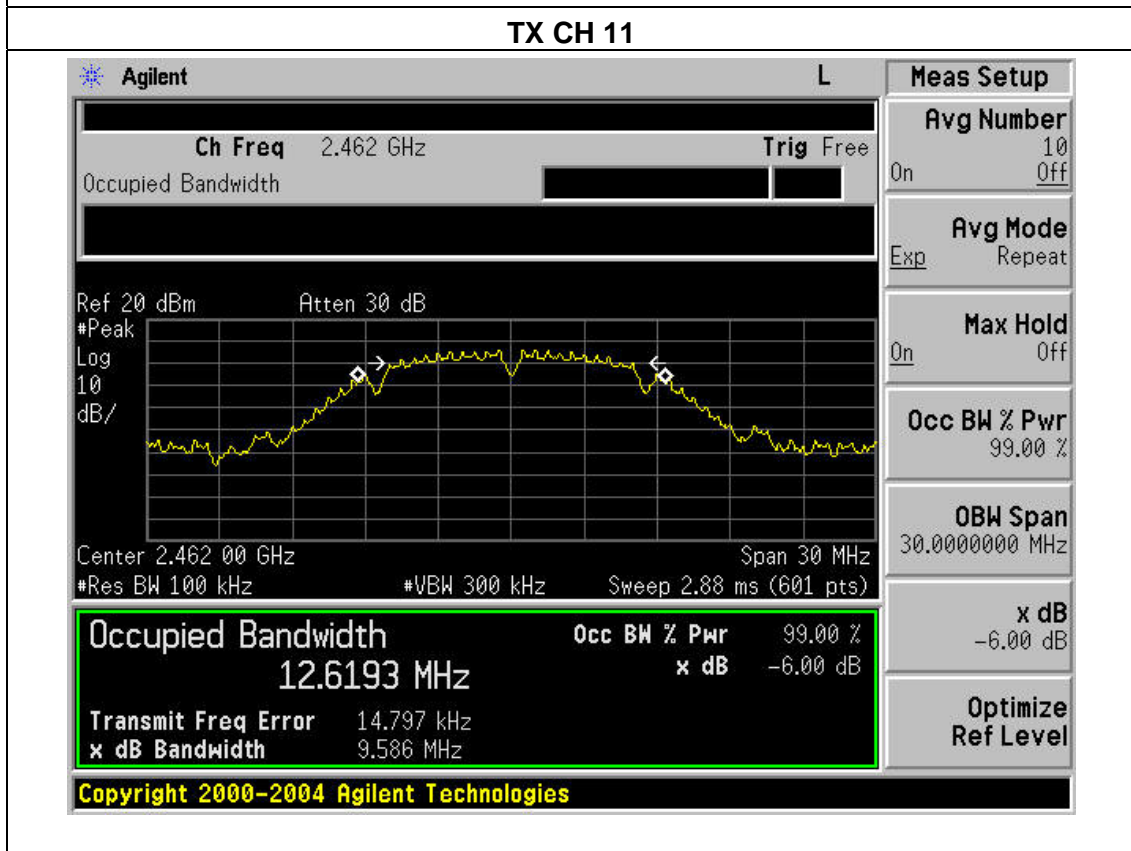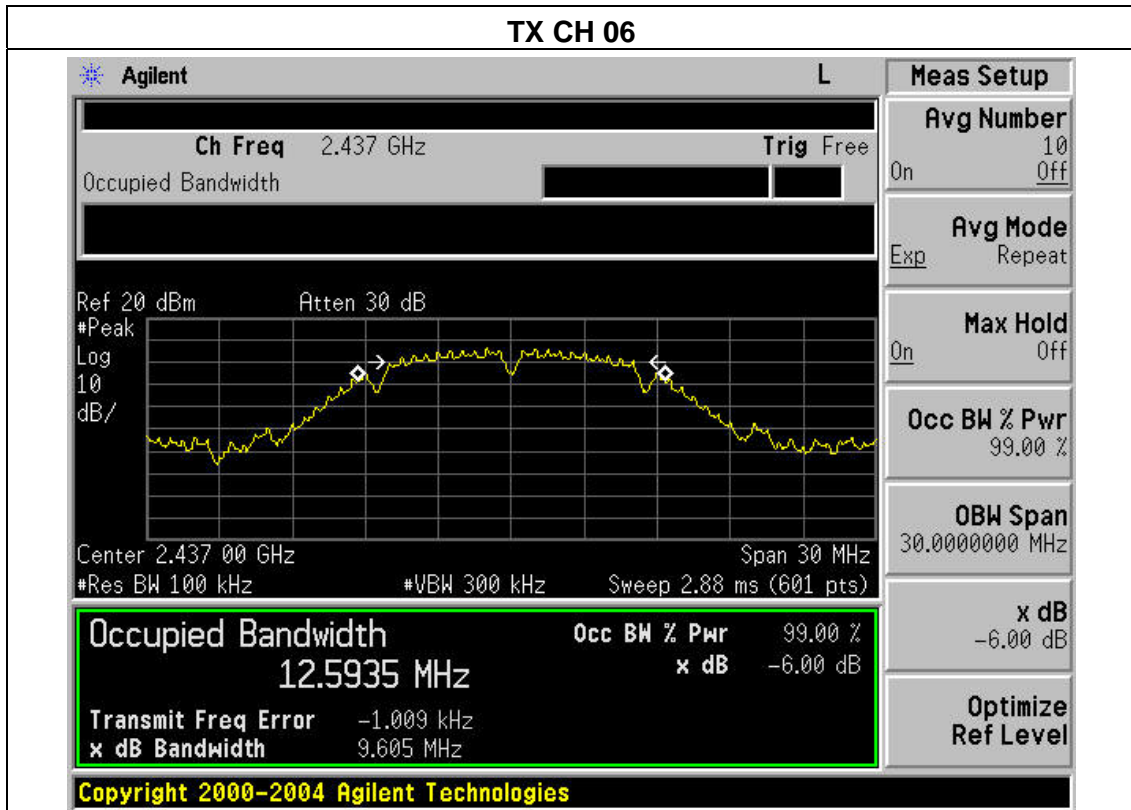

EUT :	Wifi Dongle	Model Name :	15G7000B
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5.0V
Test Mode :	TX g Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	15.168	500	Pass
Middle	2437	15.191	500	Pass
High	2462	15.398	500	Pass

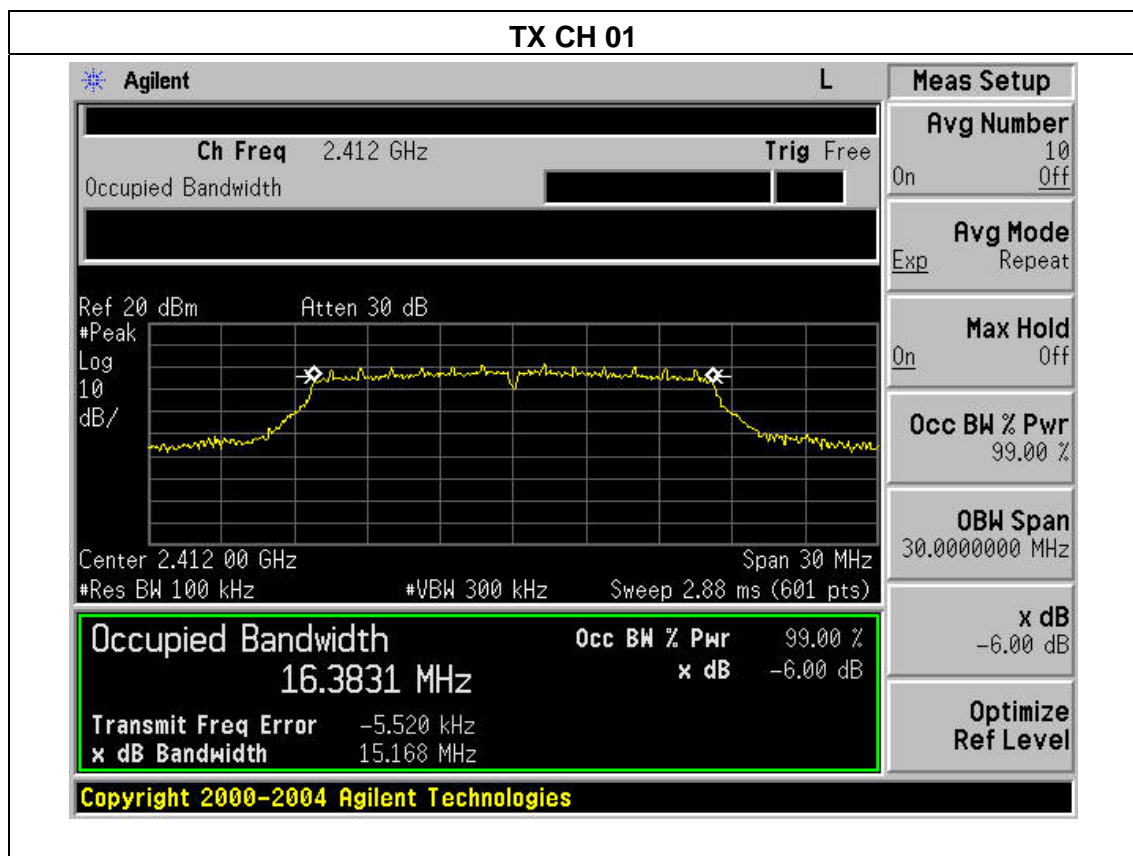

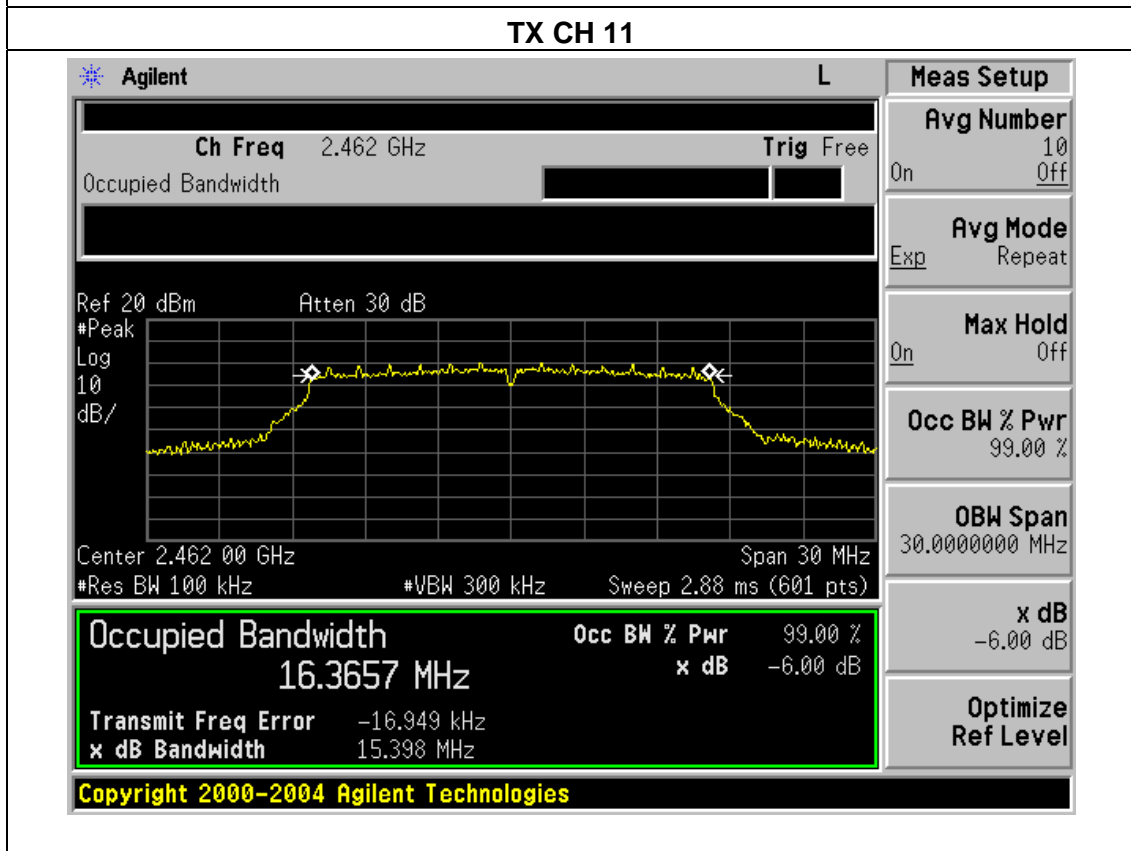
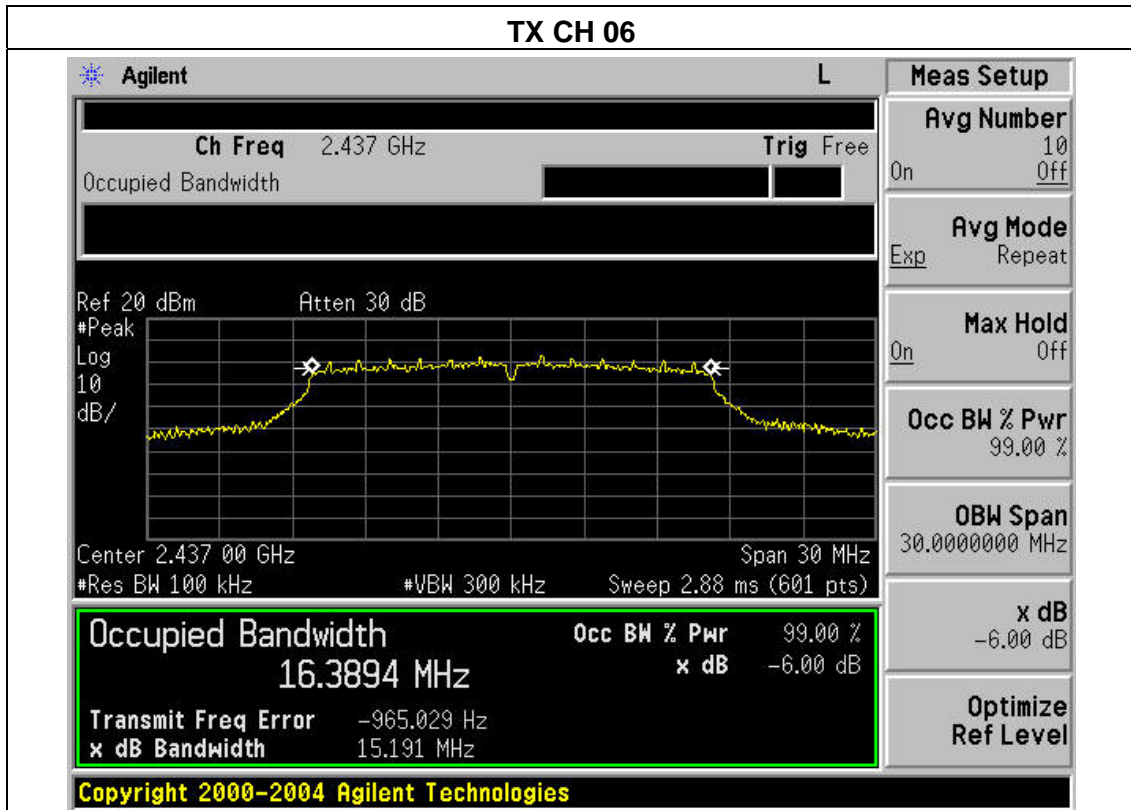


EUT :	Wifi Dongle	Model Name :	15G7000B
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5.0V
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.023	500	Pass
Middle	2437	15.163	500	Pass
High	2462	15.170	500	Pass

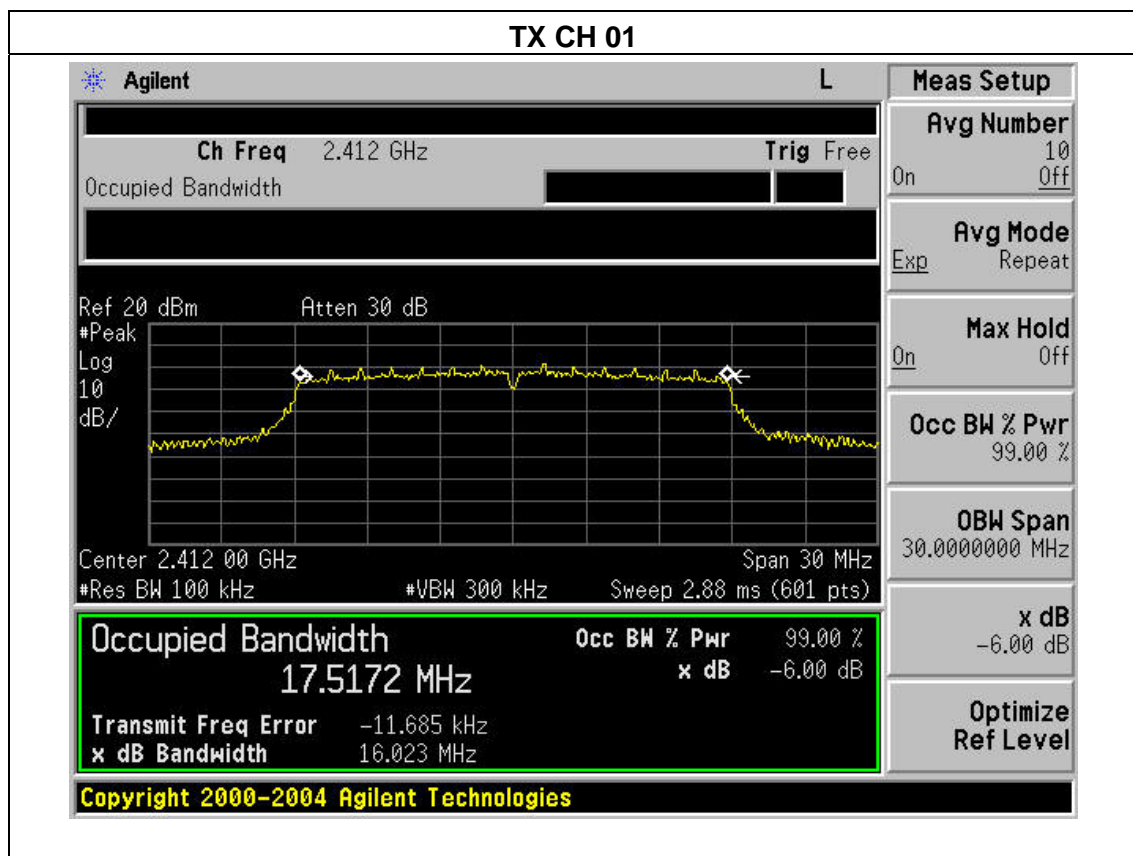






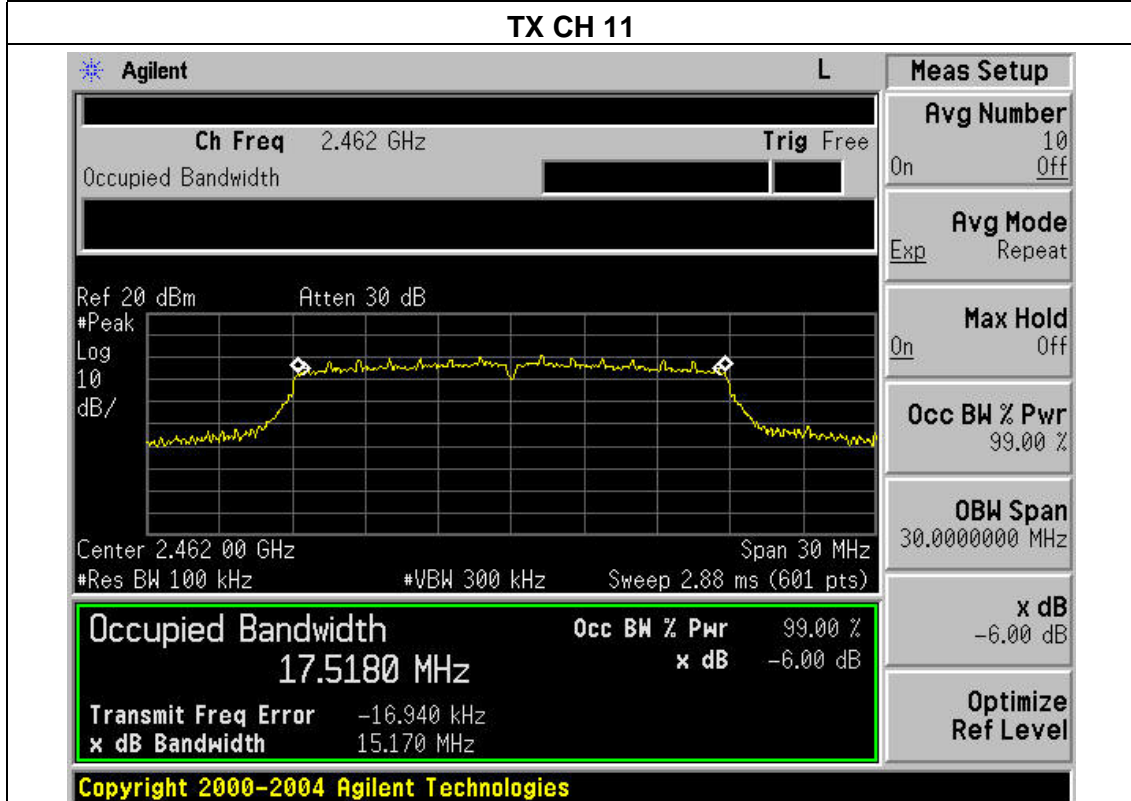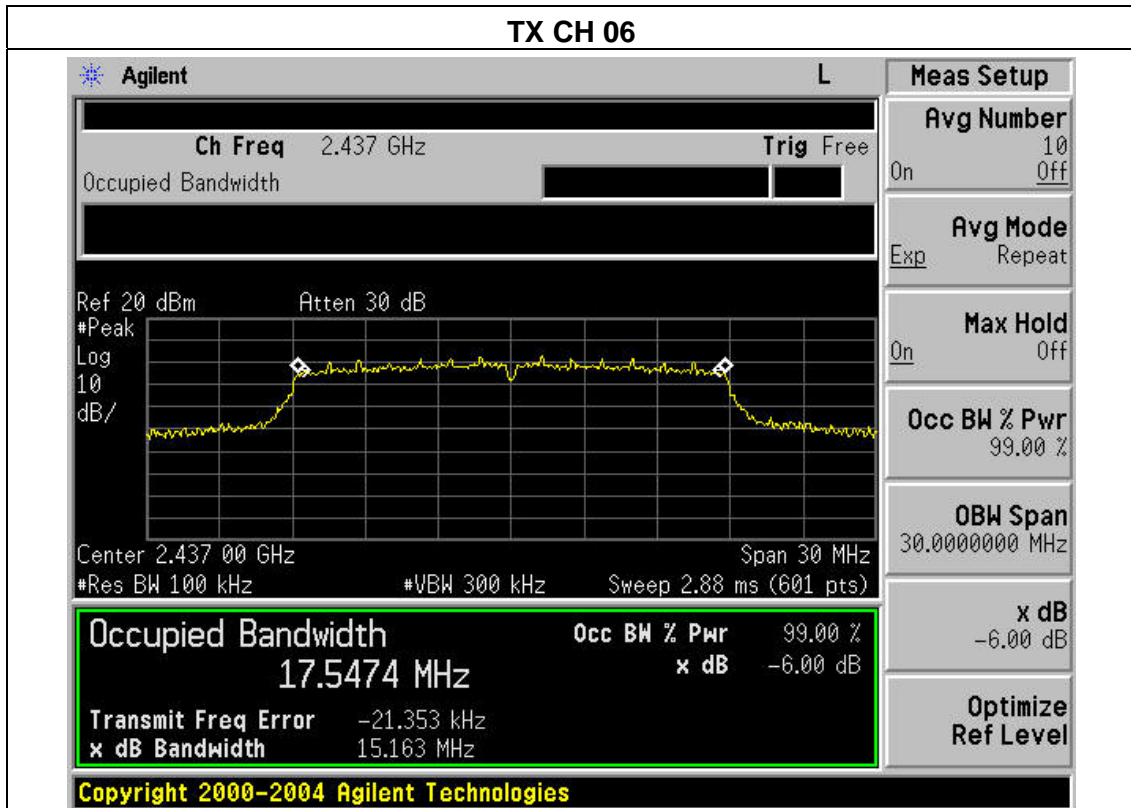

EUT :	Wifi Dongle	Model Name :	15G7000B
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5.0V
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2422	35.283	500	Pass
Middle	2437	35.284	500	Pass
High	2452	35.262	500	Pass

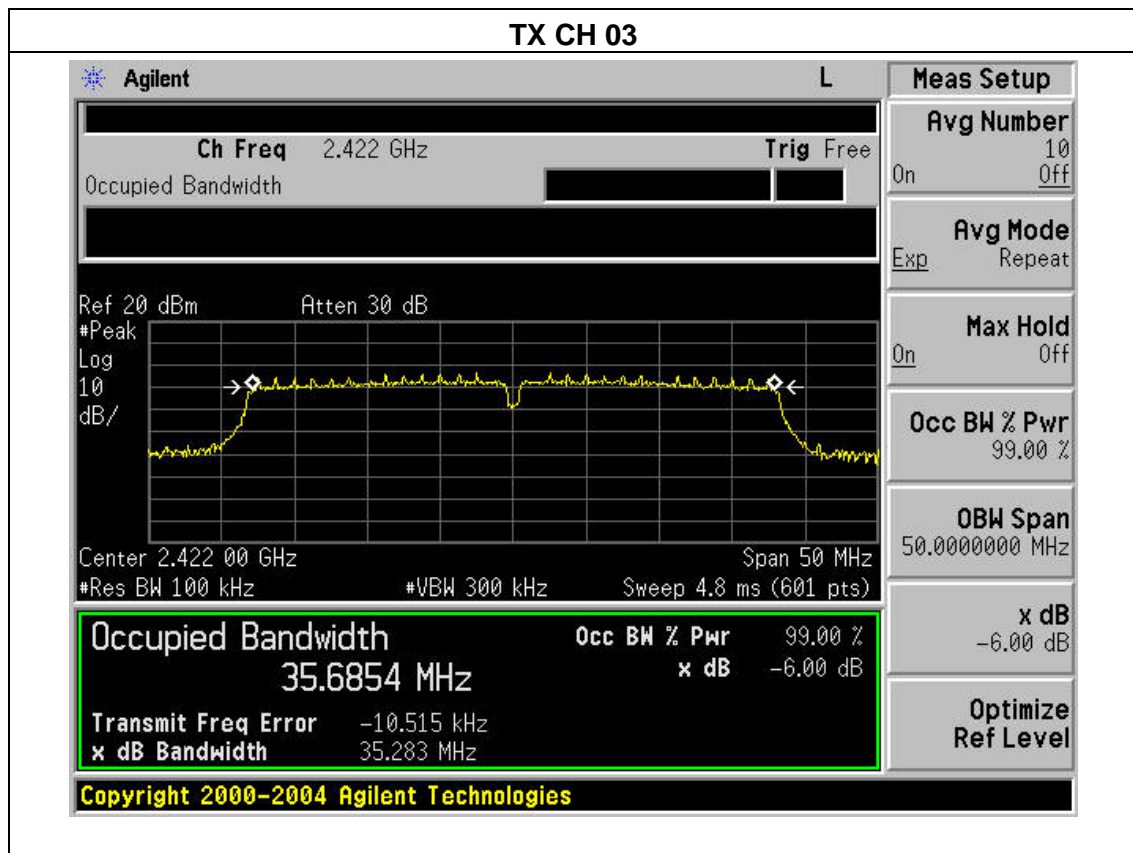

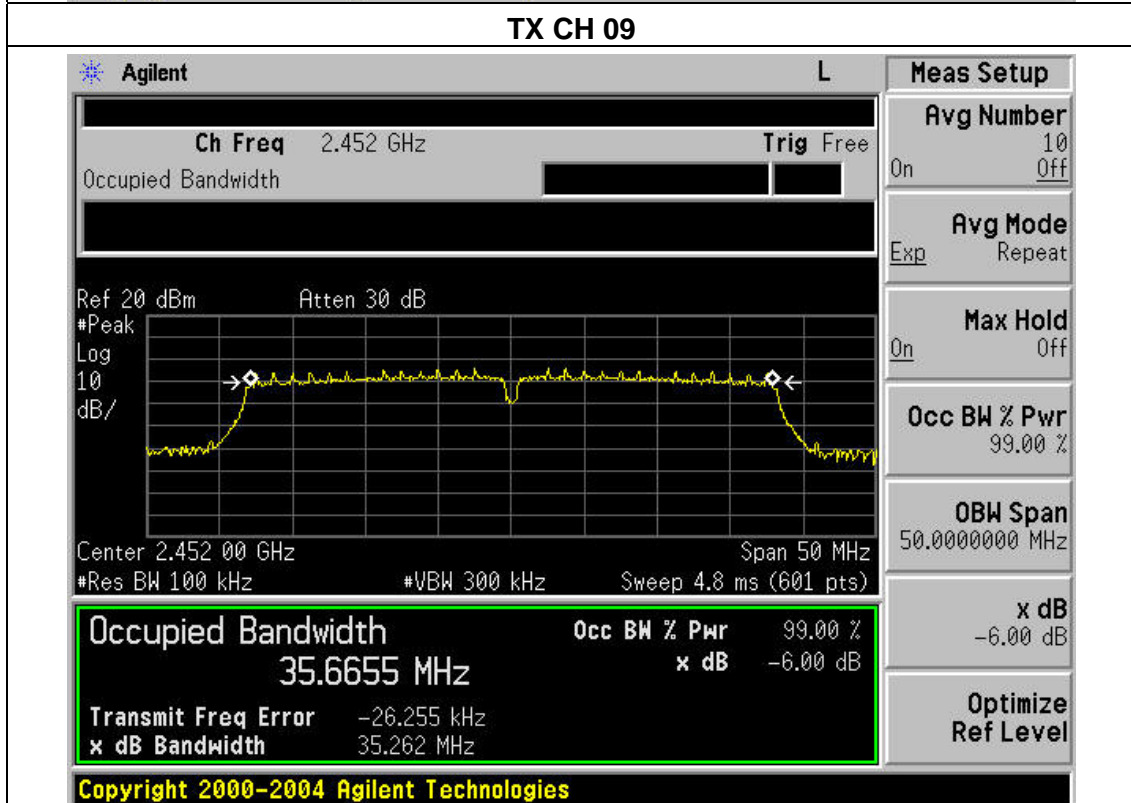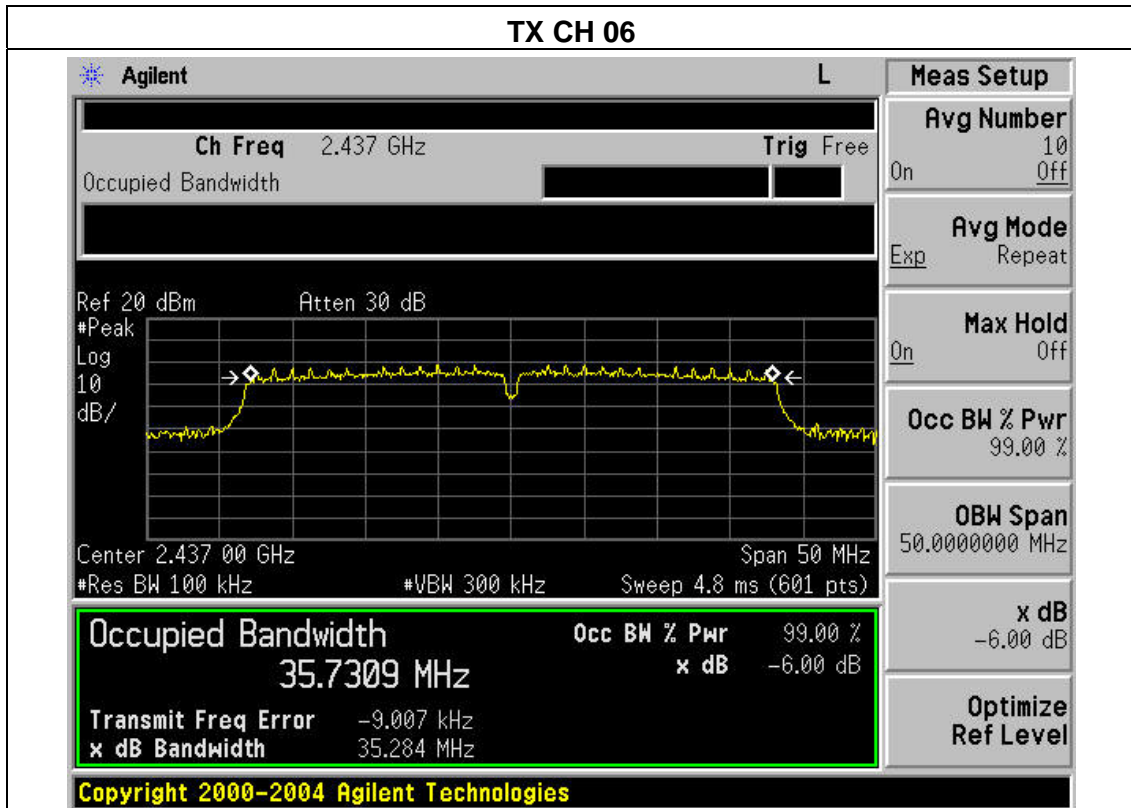

**6. PEAK OUTPUT POWER TEST**

**6.1 APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS


**6.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the Power meter

**6.1.2 DEVIATION FROM STANDARD**

No deviation.

**6.1.3 TEST SETUP**

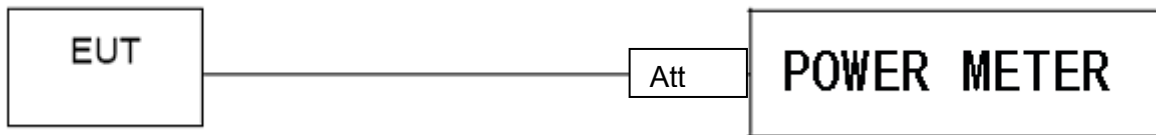

**6.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 6.1.5 TEST RESULTS

EUT :	Wifi Dongle	Model Name :	15G7000B
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5.0V
Test Mode :	TX b/g/n(20M/40M) Mode		

<b>TX 802.11b Mode</b>				
Test Channel	Frequency	Maximum Peak Conducted Output Power (PK)	Maximum Peak Conducted Output Power (AV)	LIMIT
	(MHz)	(dBm)	(dBm)	dBm
CH01	2412	12.32	9.5	30
CH06	2437	12.25	9.43	30
CH11	2462	12.17	9.35	30
<b>TX 802.11g Mode</b>				
CH01	2412	11.25	8.12	30
CH06	2437	11.02	7.89	30
CH11	2462	11.47	8.34	30
<b>TX 802.11n(20) Mode</b>				
CH01	2412	10.35	8.12	30
CH06	2437	10.45	8.22	30
CH11	2462	10.34	8.11	30
<b>TX 802.11n(40) Mode</b>				
CH03	2422	9.44	7.02	30
CH06	2437	9.88	7.46	30
CH09	2452	9.79	7.37	30

## 7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

### APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

### 7.1 DEVIATION FROM STANDARD

No deviation.

### 7.2 TEST SETUP

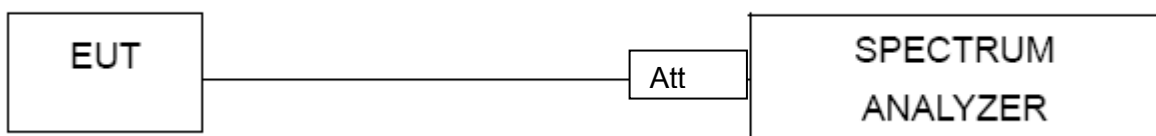

### 7.3 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 7.4 TEST RESULTS


EUT :	Wifi Dongle	Model Name :	15G7000B
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5.0V

Frequency Band MHz	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
802.11b mode			
2400	45.48	30	Pass
2483.5	61.45	30	Pass
802.11g mode			
2400	33.52	30	Pass
2483.5	49.88	30	Pass
802.11n-HT20 mode			
2400	32.49	30	Pass
2483.5	46.22	30	Pass
802.11n-HT40 mode			
2400	34.38	30	Pass
2483.5	41.47	30	Pass

802.11b: Band Edge, Right Side

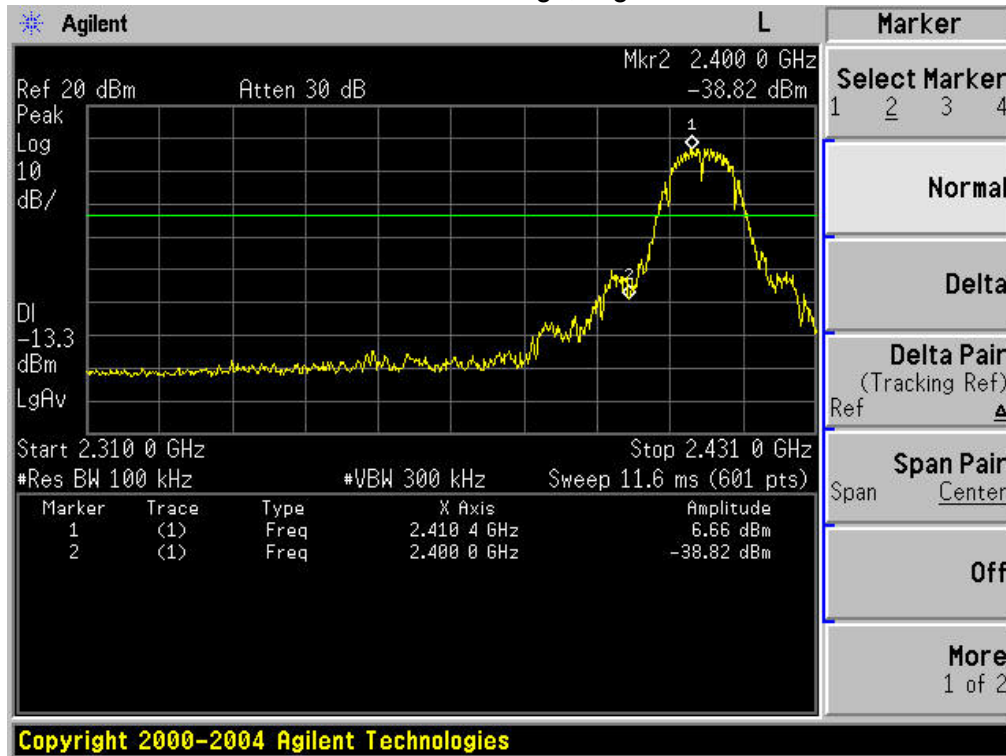


802.11b: Band Edge, Left Side

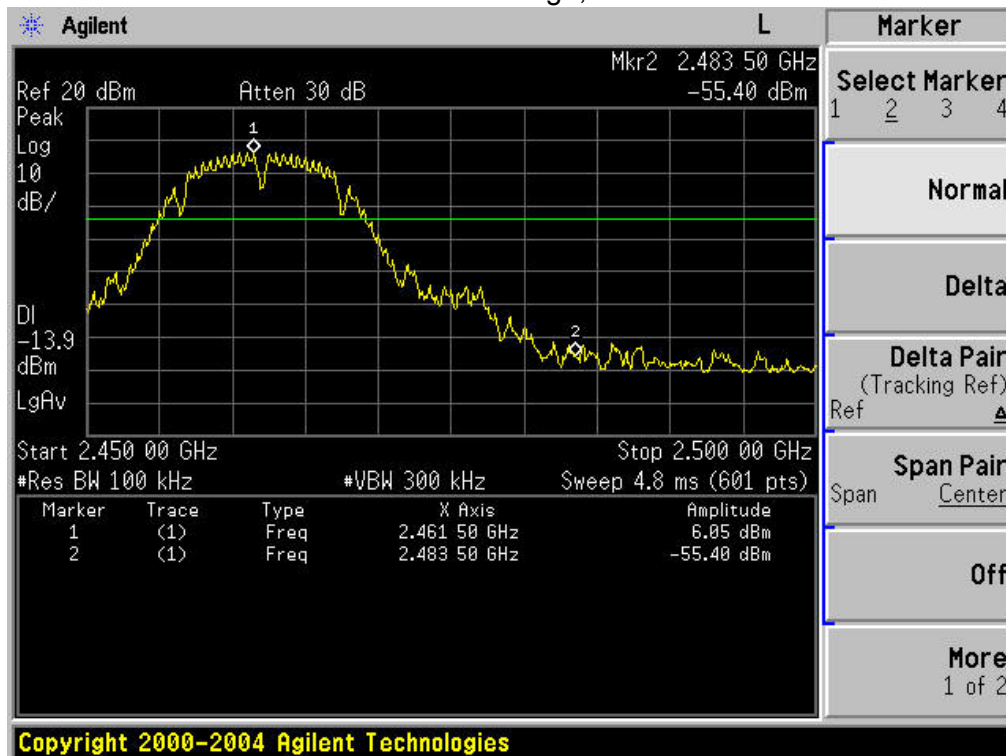





802.11g: Band Edge, Right Side

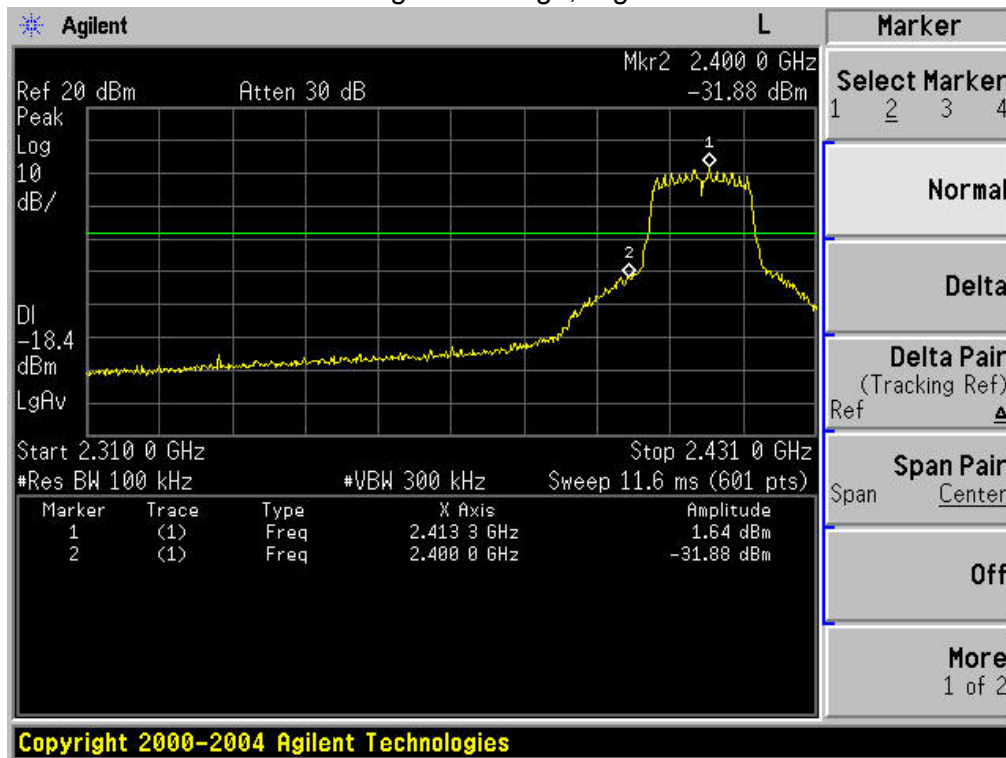


802.11g: Band Edge, Left Side

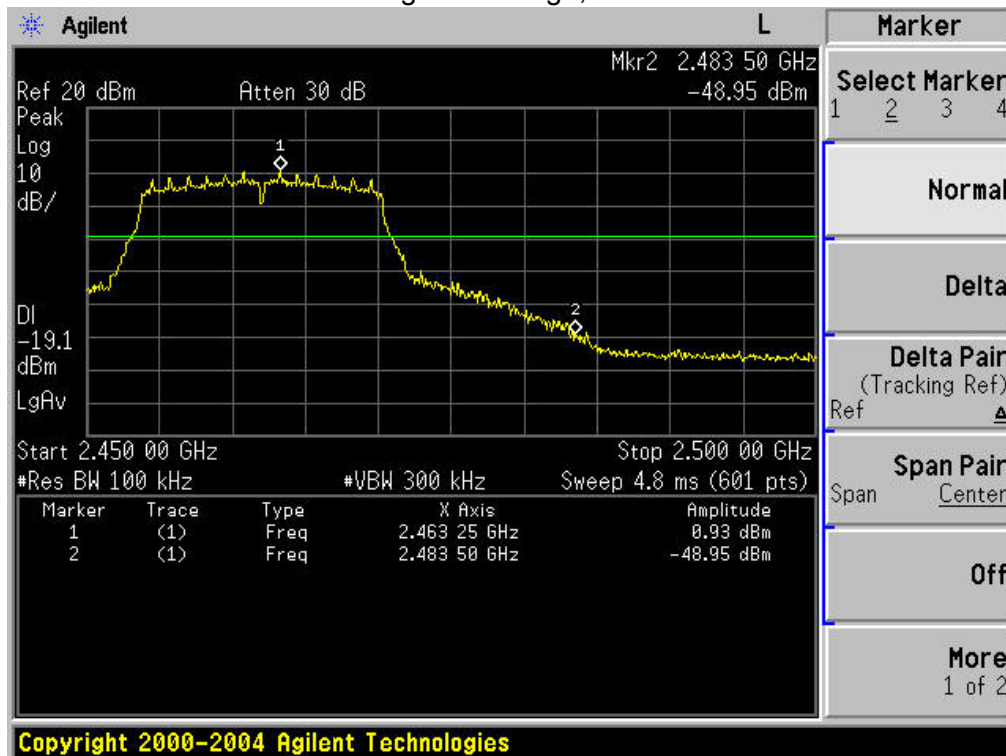


### 802.11n-HT20: Band Edge, Right Side

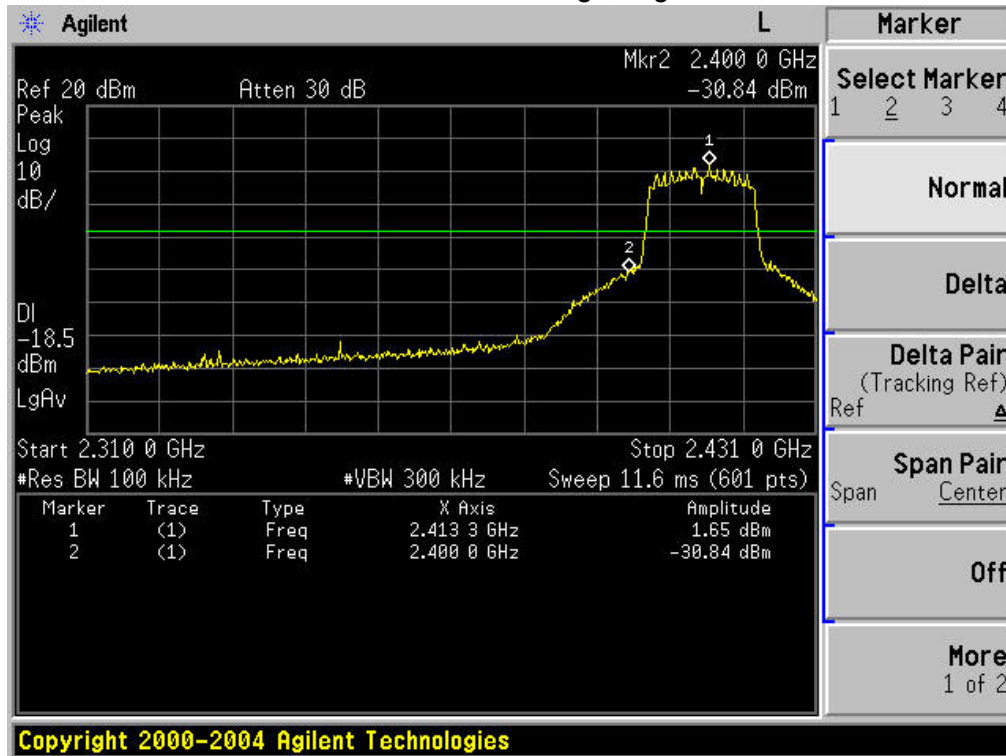


### 802.11n-HT20: Band Edge, Left Side

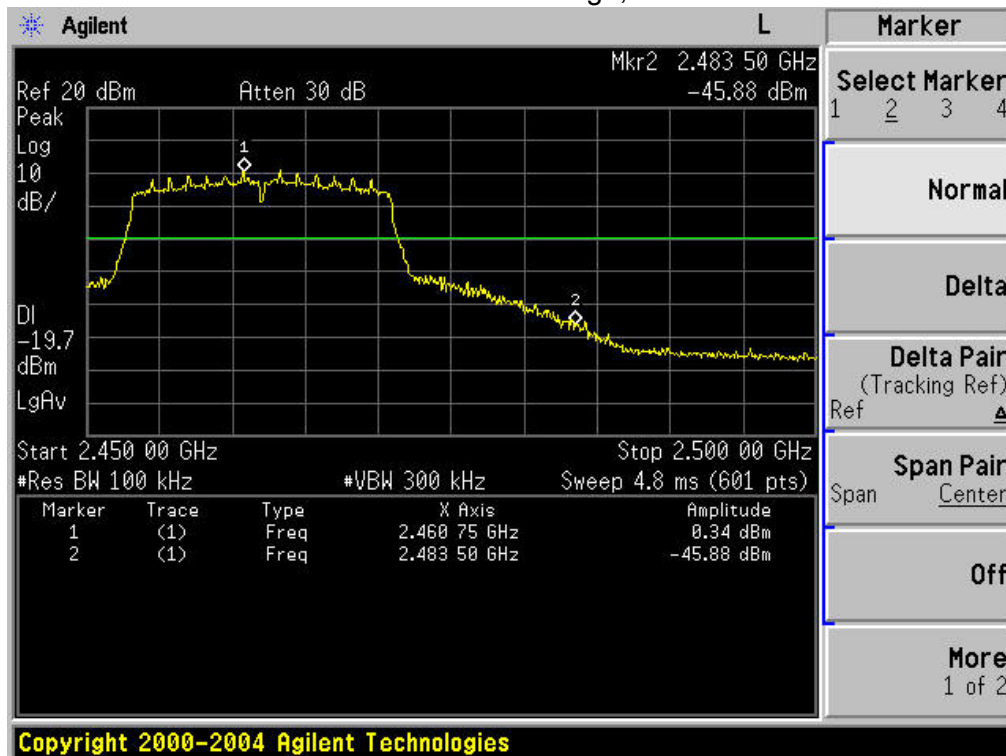

### 802.11n-HT40: Band Edge, Right Side

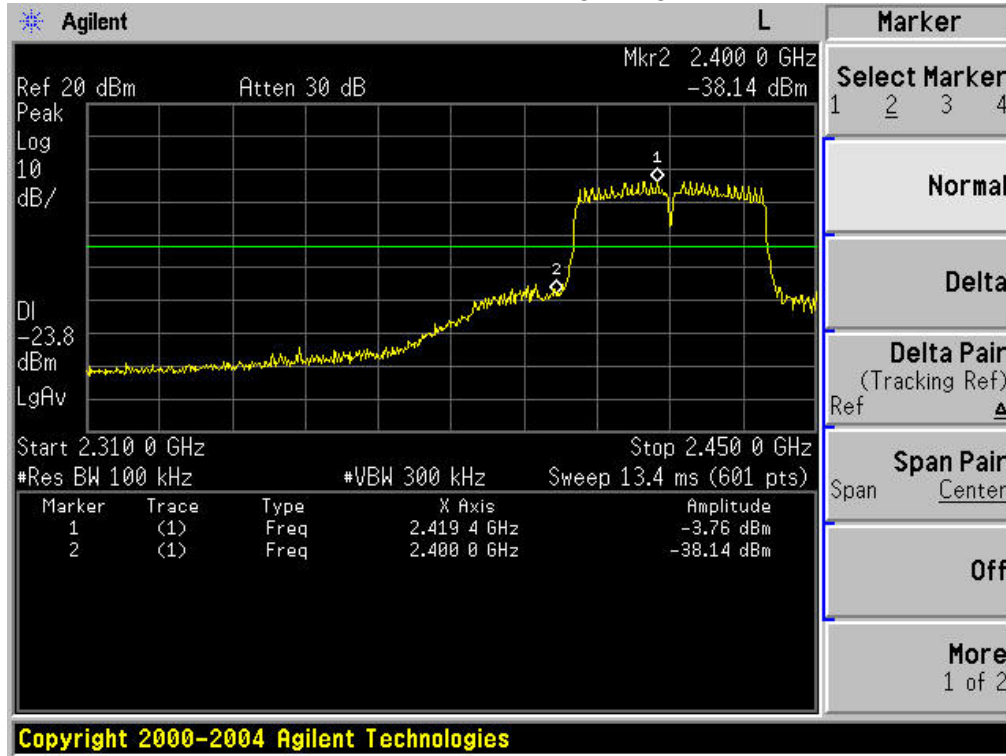

### 802.11n-HT40: Band Edge, Left Side

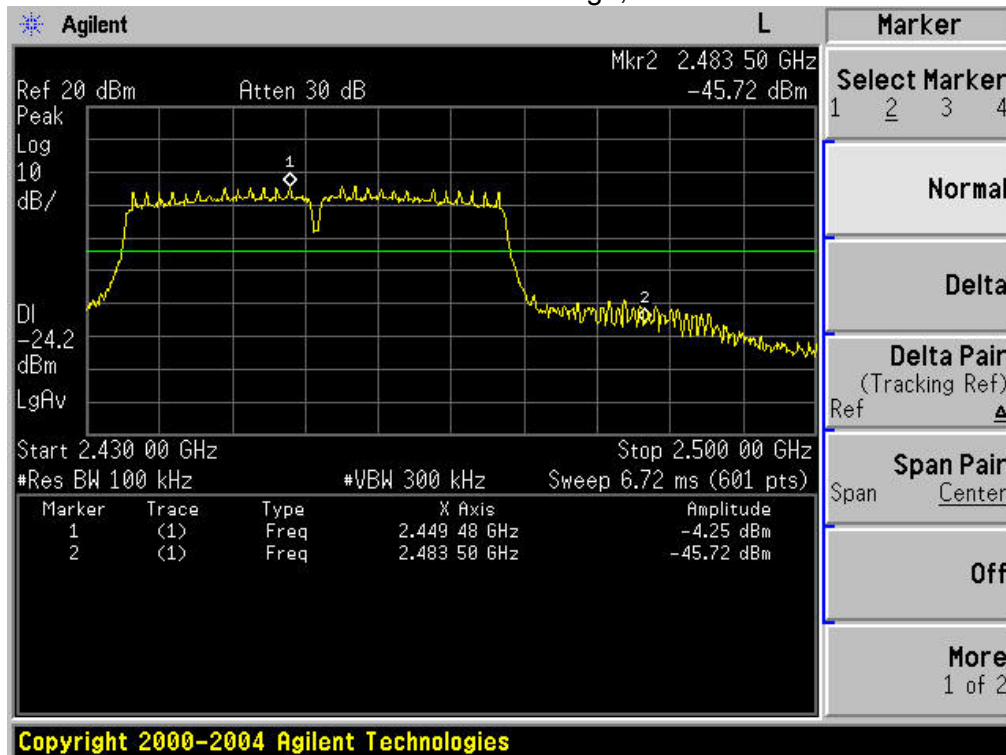

## **8. ANTENNA REQUIREMENT**

### **8.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **8.2 EUT ANTENNA**

The EUT antenna is permanent attached antenna. It comply with the standard requiremen