

FCC Test Report

Report No.: AGC13040230401FE04

FCC ID : 2ACVU-CKW104R

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Medical Keyboard

BRAND NAME : N/A

MODEL NAME : CKW104R

APPLICANT : Active Key GmbH

DATE OF ISSUE : Aug. 18, 2023

STANDARD(S) : FCC Part 15 Subpart C §15.249

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 32


REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 18, 2023	Valid	Initial Release



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCY	6
3. MEASUREMENT UNCERTAINTY	7
4. DESCRIPTION OF TEST MODES	8
5. SYSTEM TEST CONFIGURATION	g
5.1. CONFIGURATION OF EUT SYSTEM	g
5.2 EQUIPMENT USED IN TESTED SYSTEM	g
5.3. SUMMARY OF TEST RESULTS	g
6. TEST FACILITY	10
7. RADIATED EMISSION	11
7.1TEST LIMIT	11
7.2. MEASUREMENT PROCEDURE	12
7.3. TEST SETUP	14
7.4. TEST RESULT	15
8. BAND EDGE EMISSION	24
8.1TEST LIMIT	24
8.2. MEASUREMENT PROCEDURE	24
8.3 TEST SETUP	24
8.4 TEST RESULT	24
9. 20DB BANDWIDTH	29
9.1. MEASUREMENT PROCEDURE	29
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT RESULTS	30
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	32
APPENDIX B: PHOTOGRAPHS OF THE EUT	32





1. VERIFICATION OF CONFORMITY

Applicant	Active Key GmbH
Address	Brunnenaecker 6, Pegnitz 91257, Germany
Manufacturer Active Key GmbH	
Address	Brunnenaecker 6, Pegnitz 91257, Germany
Factory	Zhuhai Heng Yu New Technology
Address	Heng Ke Technology Campus, Jin Hai Avenue Sanzao, Jinwan District, 519040, Zhuhai
Product Designation	Medical Keyboard
Brand Name	N/A
Test Model	CKW104R
Date of receipt of test item	Apr. 07, 2023
Date of test	Apr. 07, 2023 to Aug. 18, 2023
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-2.4G/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Prepared By	Jouk Gai	
	Jack Gui (Project Engineer)	Aug. 18, 2023
Reviewed By	Calvin Liu	
	Calvin Liu (Reviewer)	Aug. 18, 2023
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Aug. 18, 2023



Page 5 of 32

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency 2402MHz to 2475MHz	
Maximum field strength	90.71dBuV/m(average)@3m
Modulation GFSK	
Number of channels	74
Antenna Gain	-12.55dBi
Antenna Designation	PCB Antenna (Met 15.203 Antenna requirement)
Hardware Version	HY-CK104R-2-01-04
Software Version	V1.0
Power Supply	DC 6.0V by battery



Page 6 of 32

2.2. TABLE OF CARRIER FREQUENCY

Frequency Band	Channel Number	Frequency
	0	2402 MHz
	1	2403 MHz
2402~2475MHz	:	:
	72	2474 MHz
	73	2475 MHz



Page 7 of 32

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±2.9 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.9 dB
- Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %



Page 8 of 32

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX_2402MHz_GFSK
2	Middle channel TX_2442MHz_GFSK
3	High channel TX_2475MHz_GFSK

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT adjusts the frequency through the button.
- 4. For battery operated equipment, the equipment tests are performed using a new battery.



Page 9 of 32

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure:

5.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark	
1	Medical Keyboard	CKW104R	2ACVU-CKW104R	EUT	

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249&15.209	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	Not applicable

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



Report No.: AGC13040230401FE04 Page 10 of 32

6. TEST FACILITY

Test Site Attestation of Global Compliance (Shenzhen) Co., Ltd	
Location 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping C Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
Signal Analyzer	Aglient	N9020A	MY52090123	Aug. 04, 2022	Aug. 03, 2023
Signal Analyzer	Aglient	N9020A	MY52090123	Jun. 03, 2023	Jun. 02, 2024
2.4GHz Filter	EM Electronics	N/A	N/A	Mar. 18, 2022	Mar. 19, 2024
Attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn Antenna	SCHWARZBEC	BBHA9170	768	Oct. 31, 2021	Oct. 30, 2023
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Double-Ridged Waveguide Horn	ETS	3117	00034609	Apr. 23, 2023	Apr. 22, 2024
Double-Ridged Waveguide Horn	ETS	3117	00154520	Sep. 06, 2021	Sep. 05, 2023
Preamplifier Assembly	ETS	3117PA	00225134	Sep. 01, 2022	Sep. 02, 2024
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 05, 2023	Jan. 04, 2025
Test software	FARA	EZ-EMC	Ver.RA-03A	N/A	N/A
Test software	Tonscend	JS32-RE	Ver.2.5	N/A	N/A



Page 11 of 32

7. RADIATED EMISSION

7.1TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics
	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency	Distance	Field	Strengths Limit
(MHz)	Meters	μ V/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	
0.490 ~ 1.705	30	24000/F(kHz)	
1.705 ~ 30	30	30	
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(µV)/m	(Peak) 54.0 dB(μV)/m (Average)

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Page 12 of 32

7.2. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use minimum resolution bandwidth of 1 MHz. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Page 13 of 32

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
	1GHz~26.5GHz
Start ~Stop Frequency	RBW 2.4MHz/ VBW 8MHz for Peak,
	RBW 2.4MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




7.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

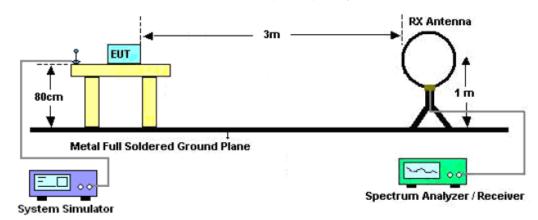

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

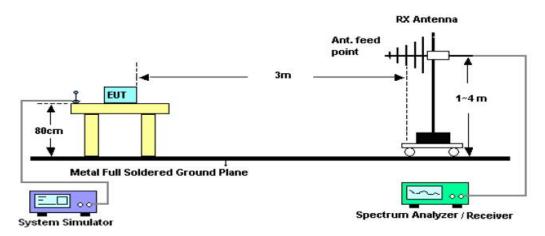

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

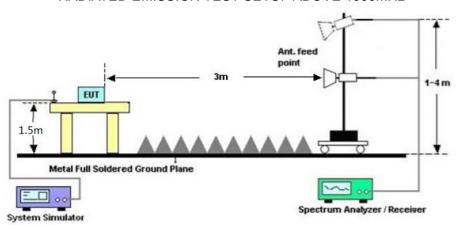

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




7.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

RADIATED EMISSION 30MHz-1GHZ


EUT	Medical Keyboard	Model Name	CKW104R
Temperature	21.9°C	Relative Humidity	53.8%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Polarization	Horizontal

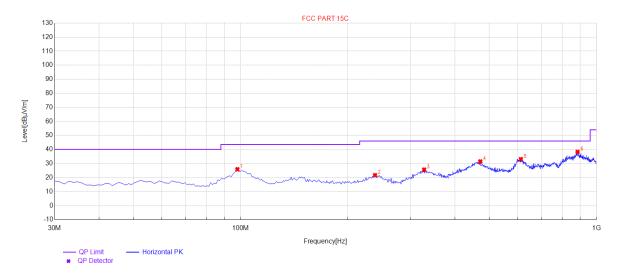

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	97.9	25.90	20.24	43.50	17.60	100	260	Horizontal
2	238.55	21.72	17.30	46.00	24.28	100	270	Horizontal
3	327.79	25.68	21.14	46.00	20.32	100	180	Horizontal
4	471.35	31.48	26.56	46.00	14.52	100	270	Horizontal
5	612.97	33.13	28.24	46.00	12.87	100	300	Horizontal
6	884.57	38.29	32.90	46.00	7.71	100	100	Horizontal



EUT	Medical Keyboard	Model Name	CKW104R
Temperature	21.9°C	Relative Humidity	53.8%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Polarization	Vertical

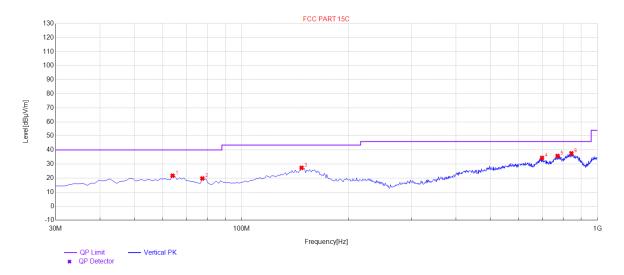

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	63.95	21.69	14.37	40.00	18.31	100	330	Vertical
2	77.53	19.70	12.49	40.00	20.30	100	280	Vertical
3	147.37	27.31	20.62	43.50	16.19	100	110	Vertical
4	698.33	34.36	28.96	46.00	11.64	100	60	Vertical
5	772.05	35.77	30.77	46.00	10.23	100	330	Vertical
6	844.8	37.65	32.39	46.00	8.35	100	80	Vertical


RESULT: PASS

Note:

Factor=Antenna Factor + Cable loss, Margin= Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.

The mode 1 is the worst case, and only the data of the worst case recorded in this test report.





Page 17 of 32


FIELD STRENGTH OF FUNDAMENTAL

EUT	Medical Keyboard	Model Name	CKW104R
Temperature	21.9°C	Relative Humidity	53.8%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Modulation	GFSK	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
2402	44.04	49.05	93.09	114.00	-20.91	peak		
2402	41.66	49.05	90.71	94.00	-3.29	AVG		
2442	43.33	49.12	92.45	114.00	-21.55	peak		
2442	41.39	49.12	90.51	94.00	-3.49	AVG		
2475	42.74	49.25	91.99	114.00	-22.01	peak		
2475	2475 41.18 49.25 90.43 94.00 -3.57 AVG							
Remark:								
Factor = Ante	actor = Antenna Factor + Cable Loss – Pre-amplifier.							

EUT	Medical Keyboard	Model Name	CKW104R
Temperature	21.9°C	Relative Humidity	53.8%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Modulation	GFSK	Polarization	Vertical


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
2402	44.37	49.05	90.39	114.00	-23.61	peak	
2402	29.51	49.05	88.99	94.00	-5.01	AVG	
2442	45.31	49.12	89.97	114.00	-24.03	peak	
2442	30.11	49.12	87.96	94.00	-6.04	AVG	
2475	40.78	49.25	89.49	114.00	-24.51	peak	
2475 30.48 49.25 87.68 94.00 -6.33 AVG							
Remark:							
Factor = Ante	enna Factor + C	able Loss – P	re-amplifier.				





RADIATED EMISSION ABOVE 1GHZ

EUT	Medical Keyboard	Model Name	CKW104R
Temperature	21.9°C	Relative Humidity	53.8%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Polarization	Horizontal

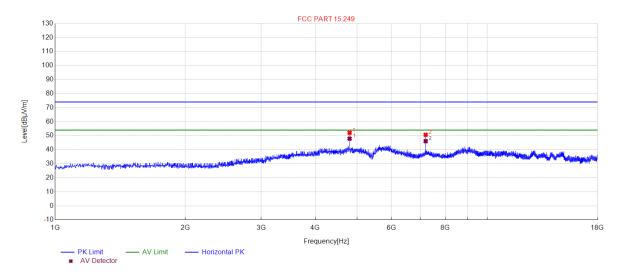


PK D	PK Data List										
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	4803.2803	52.06	3.76	74.00	21.94	150	290	Horizontal			
2	7205.6206	50.64	8.17	74.00	23.36	150	20	Horizontal			

AV F	AV Final Data List										
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	ΑV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	4803.4493	3.76	47.87	54.00	6.13	100	0	Horizontal			
2	7205.6816	8.17	46.09	54.00	7.91	100	0	Horizontal			



EUT	Medical Keyboard	Model Name	CKW104R
Temperature	23.0° C	Relative Humidity	51.8%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Polarization	Vertical

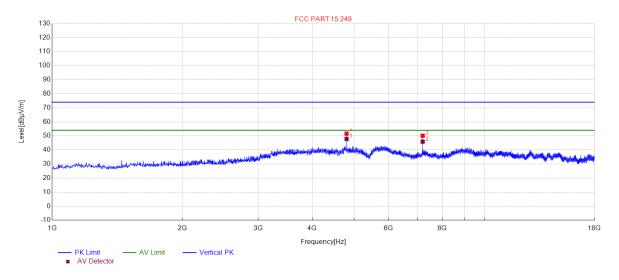


PK D	PK Data List										
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	4803.2803	51.66	3.76	74.00	22.34	150	220	Vertical			
2	7205.6206	50.17	8.17	74.00	23.83	150	180	Vertical			

AV F	AV Final Data List										
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	ΑV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	4803.0463	3.76	47.85	54.00	6.15	100	0	Vertical			
2	7205.9116	8.17	45.90	54.00	8.10	100	0	Vertical			



EUT	Medical Keyboard	Model Name	CKW104R
Temperature	21.9°C	Relative Humidity	53.8%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Polarization	Horizontal

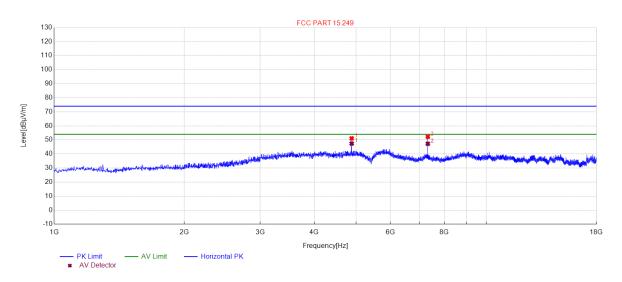


PK [PK Data List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	4883.1883	51.14	3.78	74.00	22.86	150	90	Horizontal				
2	7326.3326	52.23	8.23	74.00	21.77	150	150	Horizontal				

AV F	AV Final Data List										
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	ΑV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	4882.9323	3.78	47.41	54.00	6.59	100	0	Horizontal			
2	7326.4706	8.23	47.27	54.00	6.73	100	0	Horizontal			




EUT	Medical Keyboard	Model Name	CKW104R
Temperature	21.9°C	Relative Humidity	53.8%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Polarization	Vertical

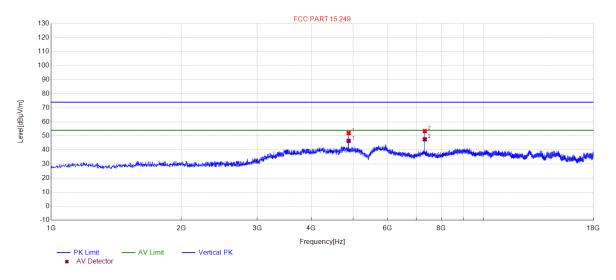


PK D	PK Data List										
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	4883.1883	52.06	3.78	74.00	21.94	150	240	Vertical			
2	7326.3326	53.45	8.23	74.00	20.55	150	170	Vertical			

AV F	AV Final Data List										
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	ΑV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	4882.6913	3.78	46.45	54.00	7.55	100	0	Vertical			
2	7326.5916	8.23	47.61	54.00	6.39	100	0	Vertical			






EUT	Medical Keyboard	Model Name	CKW104R
Temperature	21.9°C	Relative Humidity	53.8%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Polarization	Horizontal

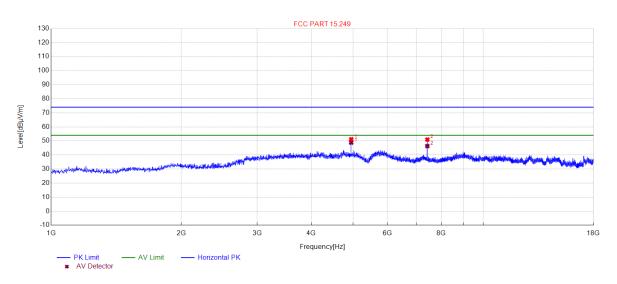


PK [PK Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4949.4949	51.21	3.81	74.00	22.79	150	290	Horizontal
2	7424.9425	50.98	8.27	74.00	23.02	150	160	Horizontal

AV F	AV Final Data List							
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	ΑV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4949.0639	3.81	48.81	54.00	5.19	100	0	Horizontal
2	7425.1725	8.27	46.35	54.00	7.65	100	0	Horizontal





EUT	Medical Keyboard	Model Name	CKW104R
Temperature	21.9°C	Relative Humidity	53.8%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Polarization	Vertical

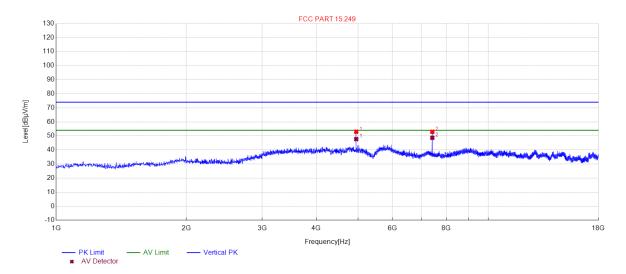

PK D	PK Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4949.4949	52.97	3.81	74.00	21.03	150	220	Vertical
2	7424.9425	52.90	8.27	74.00	21.10	150	160	Vertical

AV F	AV Final Data List							
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	ΑV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4948.9949	3.81	47.73	54.00	6.27	100	0	Vertical
2	7425.2155	8.27	48.67	54.00	5.33	100	0	Vertical

RESULT: PASS

Note: The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



8. BAND EDGE EMISSION

8.1TEST LIMIT


	Limit of the Field Strength (dBμV/m)			
Frequency Band	Peak	Average		
f≤2390MHz	74	54		
f≥2483.5MHz	74	54		

8.2. MEASUREMENT PROCEDURE

- 1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=1MHz, VBW=3MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz; VBW=1/on time(1KHz) / Sweep=AUTO
- 3. Other procedures refer to clause 7.2.

8.3 TEST SETUP


RADIATED EMISSION TEST SETUP

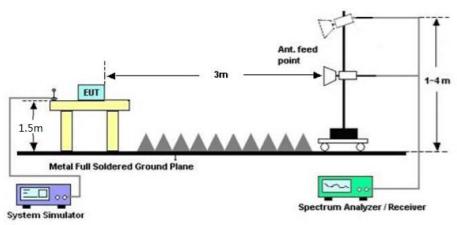

8.4 TEST RESULT

Note:


- 1. Factor=Antenna Factor + Cable loss Amplifier gain. Field Strength=Factor + Reading level
- 2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.






EUT	Medical Keyboard	Model Name	CKW104R
Temperature	21.9°C	Relative Humidity	53.8%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Polarization	Horizontal


Peak Value

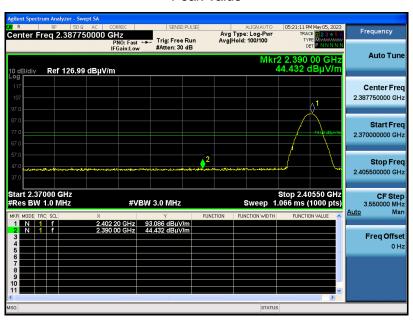

Average Value

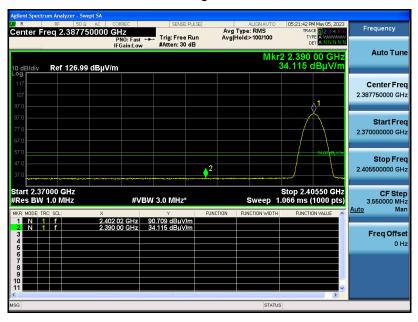


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. $Further\ enquiry\ of\ validity\ or\ verification\ of\ the\ test\ report\ should\ be\ addressed\ to\ AGC\ by\ agc 01@agccert.com.$






EUT	Medical Keyboard	Model Name	CKW104R
Temperature	21.9°C	Relative Humidity	53.8%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Polarization	Vertical


Peak Value

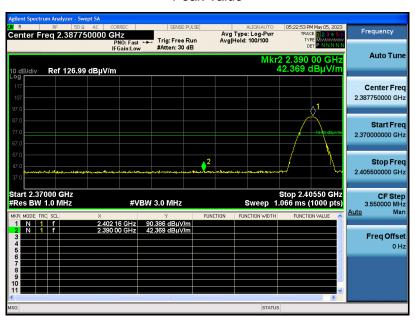

Average Value

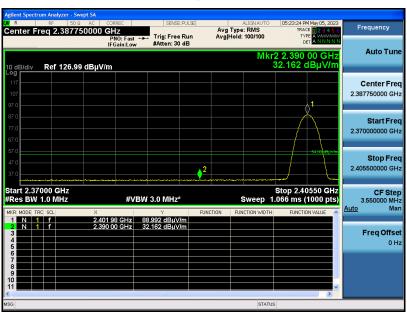


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






EUT	Medical Keyboard	Model Name	CKW104R
Temperature	21.9°C	Relative Humidity	53.8%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Polarization	Horizontal

Peak Value

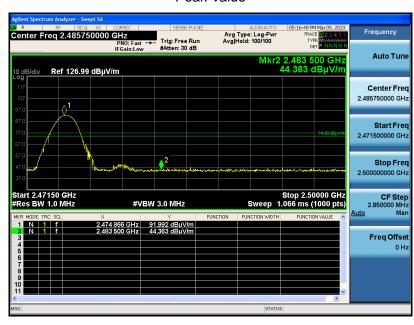

Average Value










EUT	Medical Keyboard	Model Name	CKW104R
Temperature	21.9°C	Relative Humidity	53.8%
Pressure	985kPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Polarization	Vertical

Peak Value

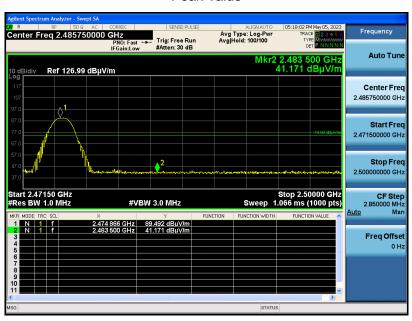

Average Value

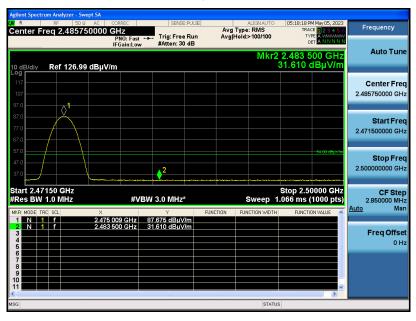







9. 20DB BANDWIDTH

9.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set SPA Centre Frequency = Operation Frequency, RBW= 30 KHz, VBW≥ 1×RBW.
- 3. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

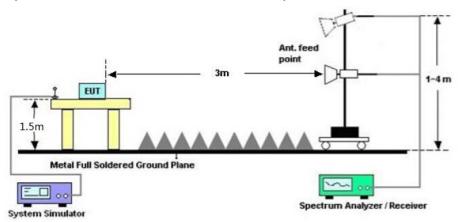





9.3. MEASUREMENT RESULTS

TEST ITEM	20DB BANDWIDTH
TEST MODULATION	GFSK

Test Channel (MHz)	20DB BANDWIDTH (MHz)	99% BANDWIDTH (MHz)	Criteria
2402	1.181	1.0757	PASS
2442	1.179	1.1103	PASS
2475	1.183	1.1088	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL





TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 32 of 32

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC13040230401AP02

APPENDIX B: PHOTOGRAPHS OF THE EUT

Refer to the Report No.: AGC13040230401AP03

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.