

**RF EXPOSURE REPORT FOR CERTIFICATION**  
On Behalf of

mophie LLC

mophie 3 in 1 wireless charging stand

Model Number: WRLS-MULTI-WATCH-STAND

FCC ID: 2ACWB-3IN1STD




Prepared for:	mophie LLC
	6244 Technology Ave.Kalamazoo.MI49009 United States of America.
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R2012063
Date of Test:	Nov. 30~Dec. 14, 2020
Date of Report:	Dec. 15, 2020

## TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. SUMMARY OF TEST .....	4
1.1. Summary of test result.....	4
1.2. Test Mode.....	4
1.3. Test Equipment List .....	4
2. MAXIMUM PERMISSIBLE EXPOSURE .....	5
2.1. Limit .....	5
2.2. Test Setup A .....	5
2.3. Test Setup B .....	6
2.4. Test Procedure.....	6
2.5. Equipment Approval Considerations .....	7
2.6. Test Result for Test setup A: .....	8
2.7. Test Result for Test setup B: .....	9
3. TEST SETUP PHOTO.....	10

## EST Technology Co., Ltd.

<b>Applicant:</b>	mophie LLC		
<b>Address:</b>	6244 Technology Ave.Kalamazoo.MI49009 United States of America.		
<b>Manufacturer:</b>	mophie LLC		
<b>Address:</b>	6244 Technology Ave.Kalamazoo.MI49009 United States of America.		
<b>E.U.T:</b>	mophie 3 in 1 wireless charging stand		
<b>Model Number:</b>	WRLS-MULTI-WATCH-STAND		
<b>Power Supply:</b>	Input: 19V===2.37A Output (Qi): 15W; Output AirPods (Qi): 5W Output (Magnetic Charger): 5W		
<b>Trade Name:</b>	mophie	<b>Serial No.:</b>	-----
<b>Date of Receipt:</b>	Nov. 30, 2020	<b>Date of Test:</b>	Nov. 30~Dec. 14, 2020
<b>Test Specification:</b>	FCC CFR 47 Part 1.1307(b)&1.1310 KDB 680106 D01 RF Exposure Wireless Charging Apps v03		
<b>Test Result:</b>	<p>The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC CFR 47 Part 1.1307(b)&amp;1.1310 requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.</p>		
		<b>Date:</b> Dec. 15, 2020	
<b>Prepared by:</b>	<b>Reviewed by:</b>	<b>Approved by:</b>	
			
Ring Wang / Assistant	Seven Wang / Engineer	Iceman Hu / Manager	
<b>Other Aspects:</b>	None.		
<i>Abbreviations: OK/P=passed    fail/F=failed    n.a/N=not applicable    E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

# 1. SUMMARY OF TEST

## 1.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	Maximum Permissible Exposure	Part 1.1307(b)&1.1310	PASS

## 1.2. Test Mode

Test Item	Test Mode
Maximum Permissible Exposure	Wireless Charging with Empty Load
	Wireless Charging with Half Load
	Wireless Charging with Full Load
Note: The worst Full Load status is recorded in the report	

## 1.3. Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Electric and Magnetic Field Probe-Analyzer	Narda S.T.S./PMM	EHP-200A	EST-E106	Feb.14,20	1 Year
Simulated load(Full)	/	/	EST-306	N/A	N/A
Simulated load(Half)	/	/	EST-307	N/A	N/A
Test Software	Narda	EHP200-TS	Rel 1.92	N/A	N/A

## 2. MAXIMUM PERMISSIBLE EXPOSURE

### 2.1. Limit


Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30


Note:

1. f = frequency in MHz \* = Plane-wave equivalent power density.
2. For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

### 2.2. Test Setup A

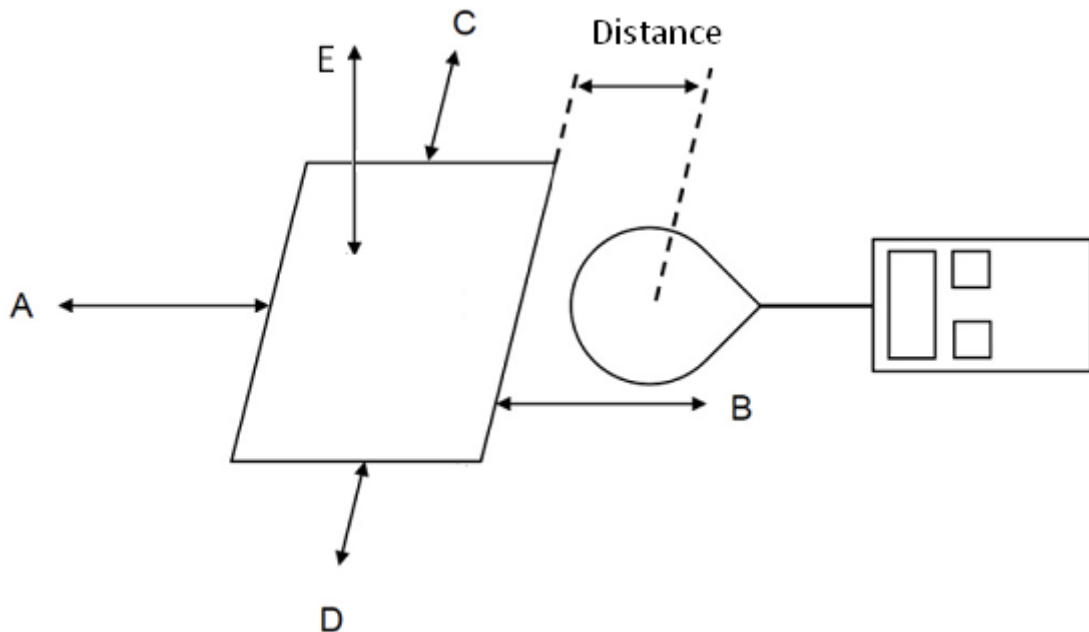

### 2.3. Test Setup B

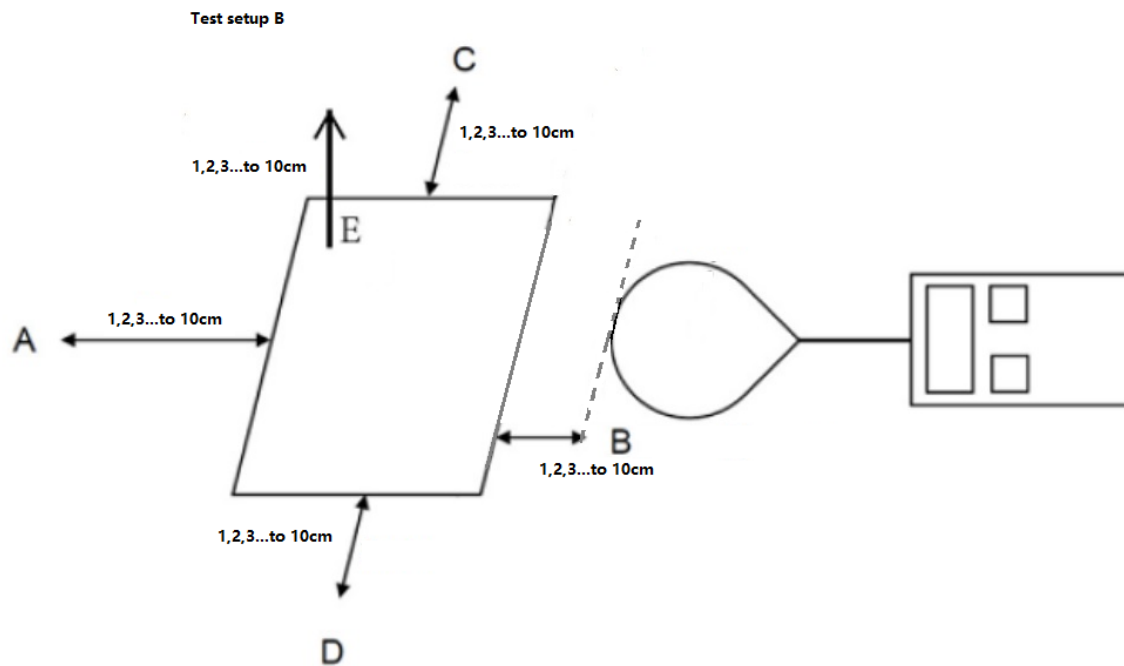

### 2.4. Test Procedure

- a. The test was performed on 360 degree turn table in anechoic chamber.
- b. The probe was placed at 15 cm surrounding the device and 20 cm above the top of the charger and the geometric centre of the probe, for test setup A.
- c. Measure magnetic and electrical field strength at a distance 10cm to 1cm at 1cm iteration, Which is between the edge of the charger and the edge of of probe, for test setup B.
- d. The highest emission level was recorded and compared with limit as soon as measurement of each point; A, B, C, D, E were completed.
- e. The EUT was measured according to the dictates of KDB680106D01v03; And KDB Tracking Number 671578; TCB Workshop, October 2018, 5.2 RF Exposure Procedures.

## 2.5. Equipment Approval Considerations

Inductive wireless power transfer applications with supporting field strength results and meeting all of the following requirements are not required to submit a KDB inquiry for devices approved using SDoC or a PAG for equipment approved using certification to address RF exposure compliance.

<b>1</b>	Power transfer frequency is less than 1 MHz
	YES; the device operated in the frequency range from 110.5-326.5KHz.
<b>2</b>	Output power from each primary coil is less than or equal to 15 watts.
	NO; the maximum output power of the primary coil is 25W.
<b>3</b>	The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
	YES; the transfer system includes only single primary and secondary coils.
<b>4</b>	Client device is placed directly in contact with the transmitter.
	YES; Client device is placed directly in contact with the transmitter.
<b>5</b>	Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
	YES.
<b>6</b>	The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
	YES; The EUT field strength levels are 50% x MPE limits.

2.6. Test Result for Test setup A:

<b>E-field strength</b>			
Frequency range (KHz)	110.5 to 326.5		
Test Mode	Full Load	Half Load	Empty Load
Position A(V/m)	3.115	3.109	3.102
Position B(V/m)	0.913	0.903	0.895
Position C(V/m)	1.017	1.011	1.003
Position D(V/m)	0.876	0.872	0.863
Position E(V/m)	1.652	1.648	1.624
Limits (V/m)	614		
50% Limits(V/m)	307		

<b>H-field strength</b>			
Frequency range (KHz)	110.5 to 326.5		
Test Mode	Full Load	Half Load	Empty Load
Position A(A/m)	0.234	0.225	0.219
Position B(A/m)	0.117	0.112	0.105
Position C(A/m)	0.201	0.119	0.116
Position D(A/m)	0.099	0.093	0.084
Position E(A/m)	0.567	0.558	0.552
Limits (A/m)	1.630		
50% Limits (A/m)	0.815		



## 2.7. Test Result for Test setup B:

**Test Result for Test setup B:**

Empty , Half , Full load all have been tested ,only worse case Max load (Full) is reported.

**E-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, ..... 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (V/m)**


Test distance (cm)	Position A (V/m)	Position B (V/m)	Position C (V/m)	Position D (V/m)	Position E (V/m)	Limits (V/m)
1	18.884	3.507	2.805	4.511	10.531	614
2	15.678	3.032	2.532	4.143	9.654	614
3	12.546	2.744	1.946	3.765	8.424	614
4	9.324	2.146	1.635	2.846	7.442	614
5	7.950	1.470	1.511	2.144	5.262	614
6	7.143	1.403	1.482	1.945	4.767	614
7	6.214	1.387	1.347	1.785	3.543	614
8	5.311	1.223	1.198	1.635	2.356	614
9	4.313	1.043	1.143	1.432	1.843	614
10	3.120	0.918	1.035	0.900	1.663	614

**H-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, ..... 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (A/m)**

Test distance (cm)	Position A (A/m)	Position B (A/m)	Position C (A/m)	Position D (A/m)	Position E (A/m)	Limits (A/m)
1	1.011	0.650	0.839	0.634	1.422	1.63
2	0.903	0.612	0.798	0.611	1.377	1.63
3	0.846	0.573	0.675	0.586	1.257	1.63
4	0.734	0.514	0.599	0.521	1.146	1.63
5	0.686	0.479	0.527	0.476	0.946	1.63
6	0.563	0.387	0.467	0.365	0.894	1.63
7	0.424	0.353	0.387	0.245	0.753	1.63
8	0.312	0.276	0.315	0.196	0.684	1.63
9	0.287	0.174	0.2646	0.142	0.614	1.63
10	0.236	0.117	0.201	0.099	0.567	1.63

### 3. TEST SETUP PHOTO

10cm

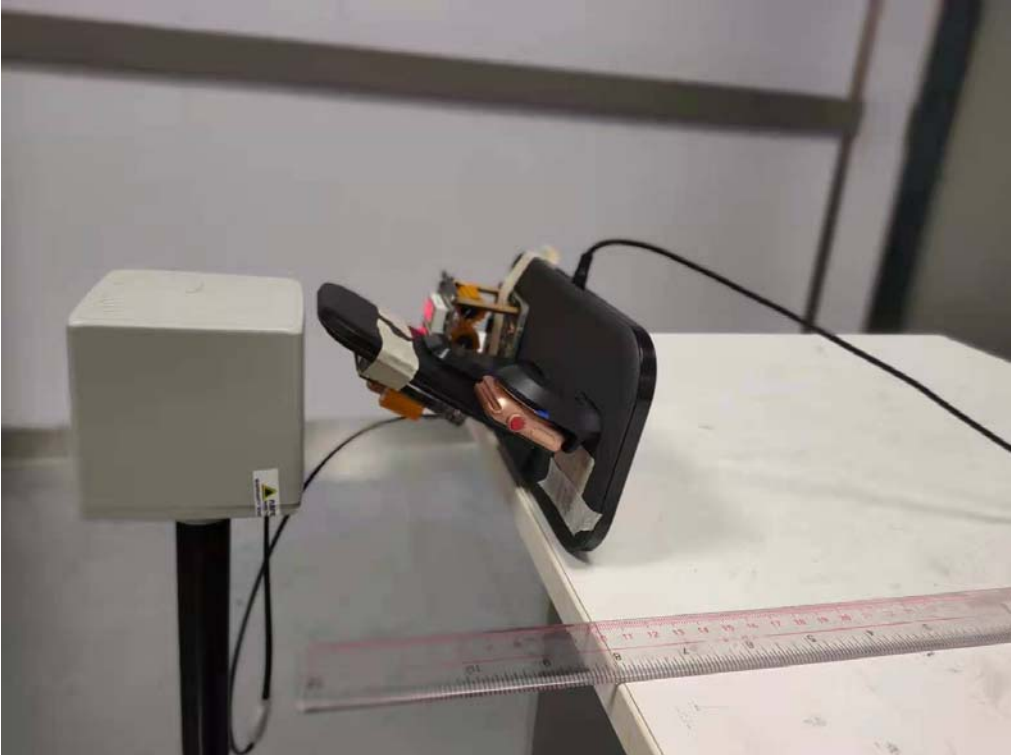

20cm



End of Test Report