



# TEST REPORT

## FCC ID: 2ACWB-MUV201

Product Name: UV sanitizer with wireless charging  
 Trademark: mophie, Halo  
 Model Number: MUV-WC-201  
 Prepared For: mophie LLC.  
 Address: 6244 Technology Ave. Kalamazoo. MI49009, United States of America.  
 Manufacturer: mophie LLC.  
 Address: 6244 Technology Ave. Kalamazoo. MI49009, United States of America.  
 Prepared By: Shenzhen BCTC Testing Co., Ltd.  
 Address: BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China  
 Sample Received Date: May 27, 2020  
 Sample tested Date: May 27, 2020 to Jun. 09, 2020  
 Issue Date: Jun. 09, 2020  
 Report No.: BCTC2005001862-1E  
 Test Standards: FCC Part15.209  
 ANSI C63.10-2013  
 Test Results: PASS

Compiled by:

*Willem Wang*

Willem Wang

Reviewed by:

*Eric Yang*

Eric Yang

Approved by:



Zero Zhou/Manager

*The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.*



## TABLE OF CONTENT

Test Report Declaration	Page
<b>1. VERSION</b> .....	3
<b>2. TEST SUMMARY</b> .....	4
<b>3. MEASUREMENT UNCERTAINTY</b> .....	5
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	6
4.1 Product Information .....	6
4.2 Test Setup Configuration .....	6
4.3 Support Equipment .....	7
4.5 Test Mode .....	7
4.6 Copy of marking plate .....	7
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	8
5.1 Test Facility .....	8
5.2 Test Instrument Used .....	8
<b>6. CONDUCTED EMISSIONS</b> .....	10
6.1 Block Diagram Of Test Setup .....	10
6.2 Limit .....	10
6.3 Test procedure .....	10
6.4 EUT operating Conditions .....	10
6.5 Test Result .....	11
<b>7. RADIATED EMISSIONS</b> .....	13
7.1 Block Diagram Of Test Setup .....	13
7.2 Limit .....	14
7.3 Test procedure .....	14
7.4 Test Result .....	16
<b>8. EUT PHOTOGRAPHS</b> .....	19
<b>9. EUT TEST SETUP PHOTOGRAPHS</b> .....	21

(Note: N/A means not applicable)



## 1. VERSION

Report No.	Issue Date	Description	Approved
BCTC2005001862-1E	Jun. 09, 2020	Original	Valid



## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	Conducted Emission	15.207	PASS
2	Radiated Emission	15.209	PASS
3	Antenna Requirement	15.203	PASS



### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

No.	Item	Uncertainty
1	3m camber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	Conducted Emission (150kHz-30MHz)	U=3.2dB
3	humidity uncertainty	U=5.3%
4	Temperature uncertainty	U=0.59°C



## 4. PRODUCT INFORMATION AND TEST SETUP


### 4.1 Product Information

Model(s):	MUV-WC-201
Model Description:	N/A
Product Description:	Wireless Charging System
Operation Frequency:	105kHz-205kHz
Antenna installation:	Inductive loop coil antenna
Ratings:	Input DC 5V 3A ,9V 2A, 12V 1.5A (QC3.0)
Adapter	Model No.: PY S-000147 Input: AC 100-240V 50/60Hz Max 0.6A Output: DC 5V 3A/ 9V 2A/ 12V1.5A (18W)
Hardware Version:	V0.0.2
Software Version:	V0.5.17 2020-05-18

### 4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission/Radiated Spurious Emission:

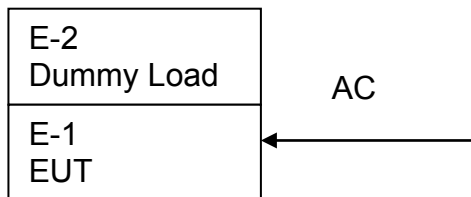

### 4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Data Cable	Remark
E-1	UV sanitizer with wireless charging	mophie, Halo	MUV-WC-201	N/A	N/A	EUT
E-2	Dummy load	N/A	DL01	N/A	N/A	Auxiliary

#### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Modes 1	Working +Wireless 5W
Test Modes 2	Working +Wireless 7.5W
Test Modes 3	Working +Wireless 10W

### 4.6 Copy of marking plate

#### UV sanitizer with wireless charging

Model No:MUV-WC-201

Input:5V $\equiv$ 3A 9V $\equiv$ 2A 12V $\equiv$ 1.5A(QC3.0)

Output:

Wireless charger:10W/7.5W/5W

Ultraviolet disinfection:2W

UVC sterilize light:268-285nm

UVA sterilize light:390-410nm

FCC ID:2ACWB-MUV201

IC:10465A-MUV201

Made in China





## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

### 5.2 Test Instrument Used

Conducted emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	Jun. 13, 2019	Jun.12, 2020
LISN	R&S	ENV216	101375	Jun. 13, 2019	Jun.12, 2020
ISN	HPX	ISN T800	S1509001	Jun. 13, 2019	Jun.12, 2020
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\






Radiated emissions Test (966 chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 19, 2018	Jun. 18, 2021
Receiver	R&S	ESR3	102075	Jun. 13, 2019	Jun. 12, 2020
Receiver	R&S	ESRP	101154	Jun. 13, 2019	Jun. 12, 2020
Amplifier	Schwarzbeck	BBV9718	9718-309	Jun. 25, 2019	Jun. 24, 2020
Amplifier	Schwarzbeck	BBV9744	9744-0037	Jun. 25, 2019	Jun. 24, 2020
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	VULB9163- 942	Jun. 22, 2019	Jun. 21, 2020
Horn Antenna	SCHWARZBEC K	BBHA9120 D	1201	Jun. 22, 2019	Jun. 21, 2020
Horn Antenna (18GHz-40 GHz)	SCHWARZBE CK	BBHA9170	822	Jun. 22, 2019	Jun. 21, 2020
Amplifier (18GHz-40 GHz)	MITEQ	TTA1840-3 5-HG	2034381	Jun. 17, 2019	Jun. 16, 2020
Loop Antenna (9KHz-30M Hz)	SCHWARZBE CK	FMZB1519 B	014	Jul. 13, 2019	Jul. 12, 2020
RF cables1 (9kHz-30MH z)	Huber+Suhnar	9kHz-30M Hz	B1702988- 0008	Jun. 25, 2019	Jun. 24, 2020
RF cables2 (30MHz-1G Hz)	Huber+Suhnar	30MHz-1G Hz	1486150	Jun. 25, 2019	Jun. 24, 2020
RF cables3 (1GHz-40G Hz)	Huber+Suhnar	1GHz-40G Hz	1607106	Jun. 25, 2019	Jun. 24, 2020
Power Metter	Keysight	E4419B	\	Jun. 17, 2019	Jun. 16, 2020
Power Sensor (AV)	Keysight	E9 300A	\	Jun. 17, 2019	Jun. 16, 2020
Signal Analyzer 20kHz-26.5 GHz	KEYSIGHT	N9020A	MY491000 60	Jun. 13, 2019	Jun. 12, 2020
Spectrum Analyzer 9kHz-40G Hz	Agilent	FSP40	100363	Jun. 13, 2019	Jun. 12, 2020
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

## 6. CONDUCTED EMISSIONS

### 6.1 Block Diagram Of Test Setup

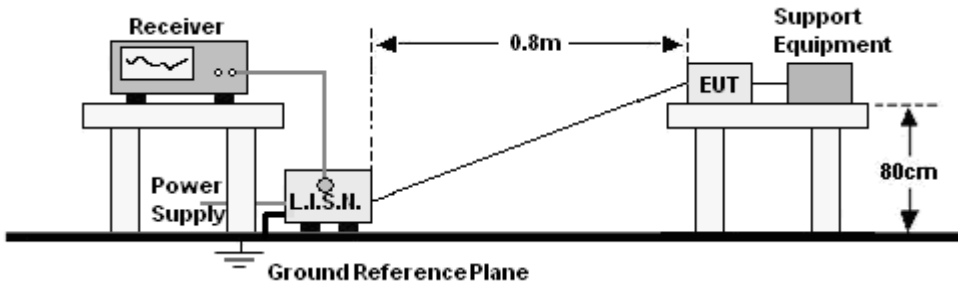

### 6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:  
 1. \*Decreasing linearly with logarithm of frequency.  
 2. The lower limit shall apply at the transition frequencies.

### 6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


### 6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



### 6.5 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 3 (The Worst mode)

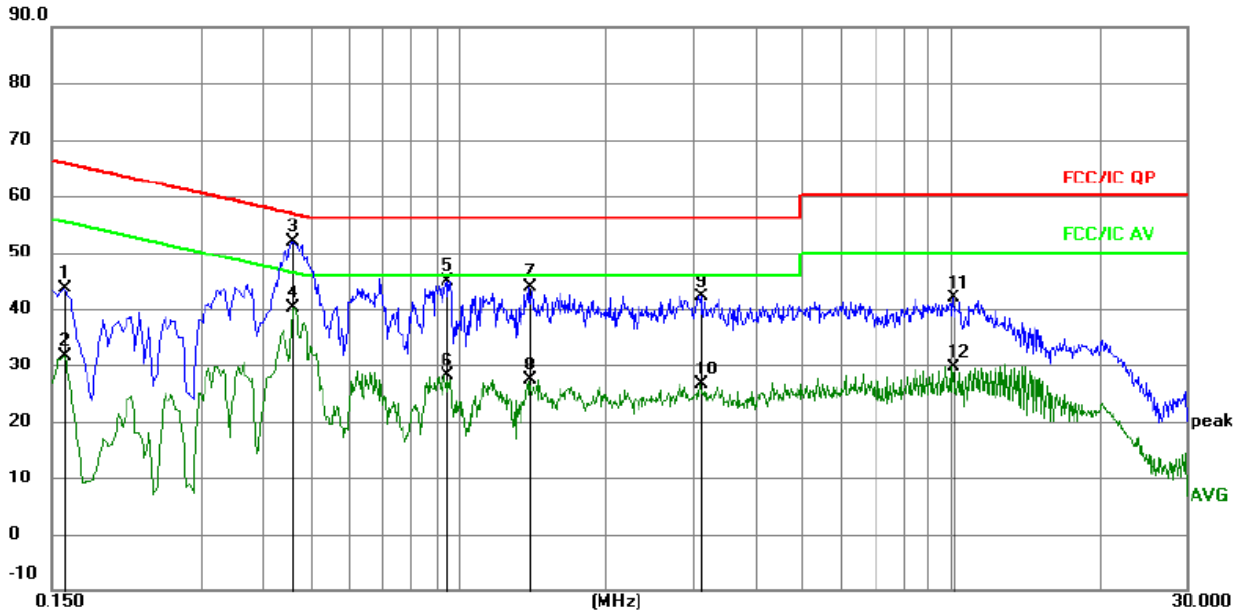


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1590	34.11	9.51	43.62	65.52	-21.90	QP	
2		0.1590	22.16	9.51	31.67	55.52	-23.85	AVG	
3	*	0.4605	42.38	9.55	51.93	56.68	-4.75	QP	
4		0.4605	30.49	9.55	40.04	46.68	-6.64	AVG	
5		0.9510	35.39	9.58	44.97	56.00	-11.03	QP	
6		0.9510	18.47	9.58	28.05	46.00	-17.95	AVG	
7		1.4010	34.26	9.58	43.84	56.00	-12.16	QP	
8		1.4010	17.68	9.58	27.26	46.00	-18.74	AVG	
9		3.1155	32.52	9.67	42.19	56.00	-13.81	QP	
10		3.1155	16.99	9.67	26.66	46.00	-19.34	AVG	
11		10.0950	32.18	9.69	41.87	60.00	-18.13	QP	
12		10.0950	20.00	9.69	29.69	50.00	-20.31	AVG	



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 3 (The Worst mode)

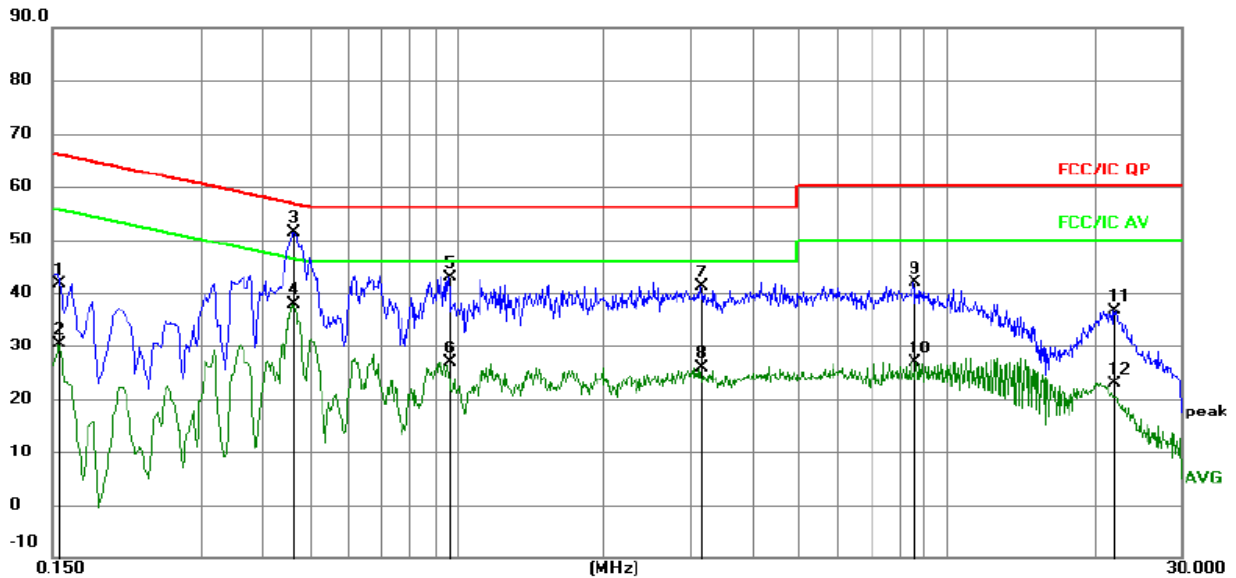

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1545	32.15	9.51	41.66	65.75	-24.09	QP	
2		0.1545	20.83	9.51	30.34	55.75	-25.41	AVG	
3	*	0.4650	41.86	9.56	51.42	56.60	-5.18	QP	
4		0.4650	28.37	9.56	37.93	46.60	-8.67	AVG	
5		0.9645	33.30	9.58	42.88	56.00	-13.12	QP	
6		0.9645	17.31	9.58	26.89	46.00	-19.11	AVG	
7		3.1470	31.34	9.67	41.01	56.00	-14.99	QP	
8		3.1470	16.18	9.67	25.85	46.00	-20.15	AVG	
9		8.5830	32.18	9.70	41.88	60.00	-18.12	QP	
10		8.5830	17.23	9.70	26.93	50.00	-23.07	AVG	
11		22.0425	26.90	9.77	36.67	60.00	-23.33	QP	
12		22.0425	13.18	9.77	22.95	50.00	-27.05	AVG	


## 7. RADIATED EMISSIONS

### 7.1 Block Diagram Of Test Setup

(A) Radiated Emission Test-Up Frequency Below 30MHz

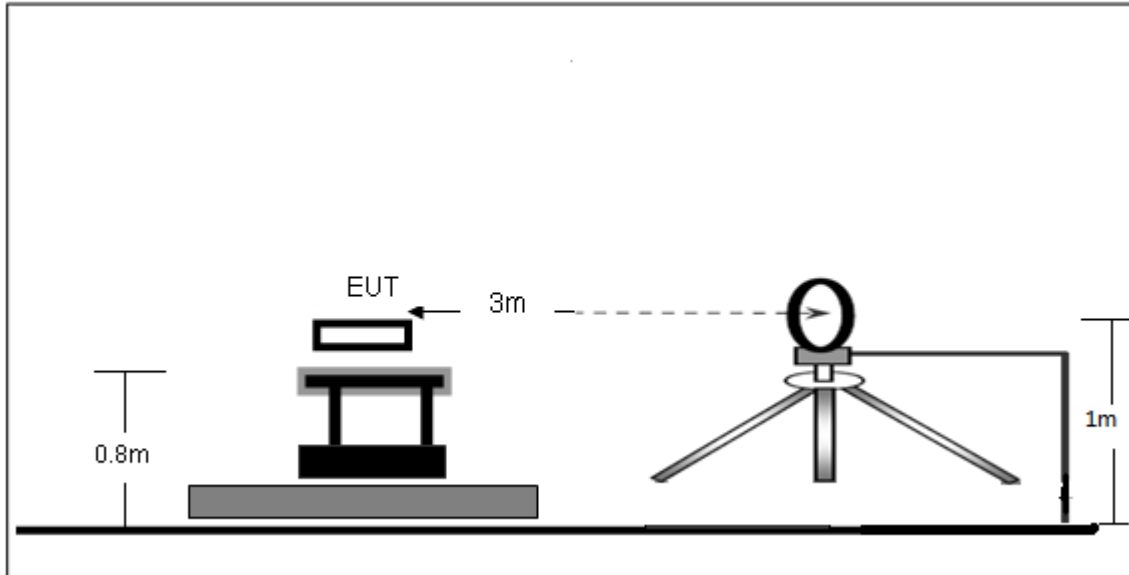

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

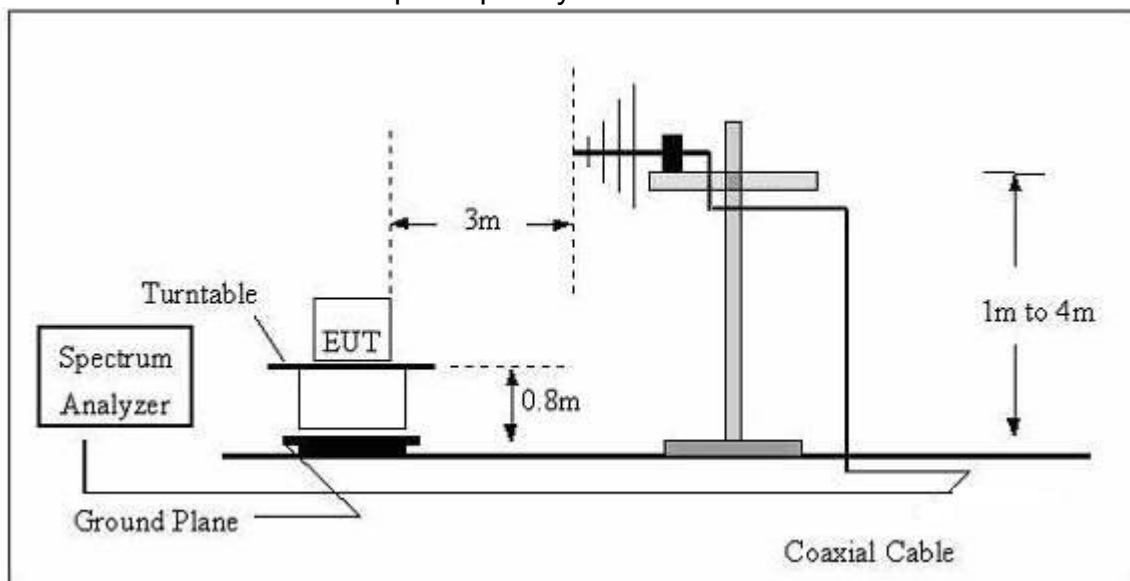



## 7.2 Limit

FCC §15.209; §15.205.

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

## 7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).

h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.



## 7.4 Test Result

### 9kHz-30MHz

Temperature:	26°C	Relative Humidity:	24%
Pressure:	101 kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 2(the worst data)	Polarization :	--

Frequency (kHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
24.7000	45.34	20.15	65.51	139.75	-74.24	PK
24.7000	40.35	20.15	60.50	119.75	-59.21	AV
63.2000	52.37	20.33	72.67	131.45	-58.78	PK
64.2000	46.83	20.33	67.20	111.45	-44.25	AV
136.4000	67.28	20.55	87.80	124.45	-36.65	PK
136.4000	61.22	20.55	81.77	104.91	-23.14	AV
678.1000	34.24	20.64	54.89	70.98	-16.09	QP
976.5000	39.21	21.26	60.53	67.81	-7.28	QP
1233.6500	26.84	22.32	49.19	65.78	-16.59	QP

**Note:**

Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.


Margin = Emission Level- Limit.





Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 2(the worst data)	Polarization :	Horizontal

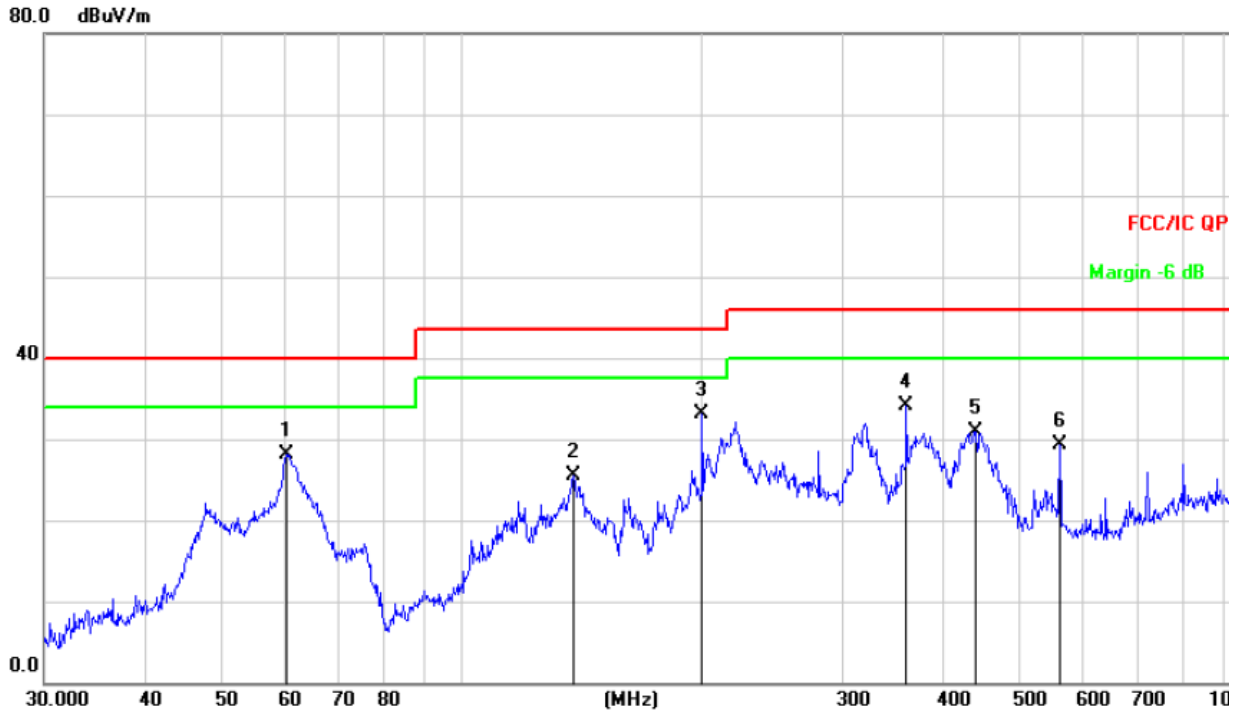


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detec
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		60.2801	44.15	-15.97	28.18	40.00	-11.82	QP
2		137.9028	44.29	-18.72	25.57	43.50	-17.93	QP
3	*	199.9856	49.40	-16.30	33.10	43.50	-10.40	QP
4		360.4476	46.01	-11.99	34.02	46.00	-11.98	QP
5		440.1963	41.14	-10.19	30.95	46.00	-15.05	QP
6		560.6928	36.72	-7.43	29.29	46.00	-16.71	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 2(the worst data)	Polarization :	Vertical

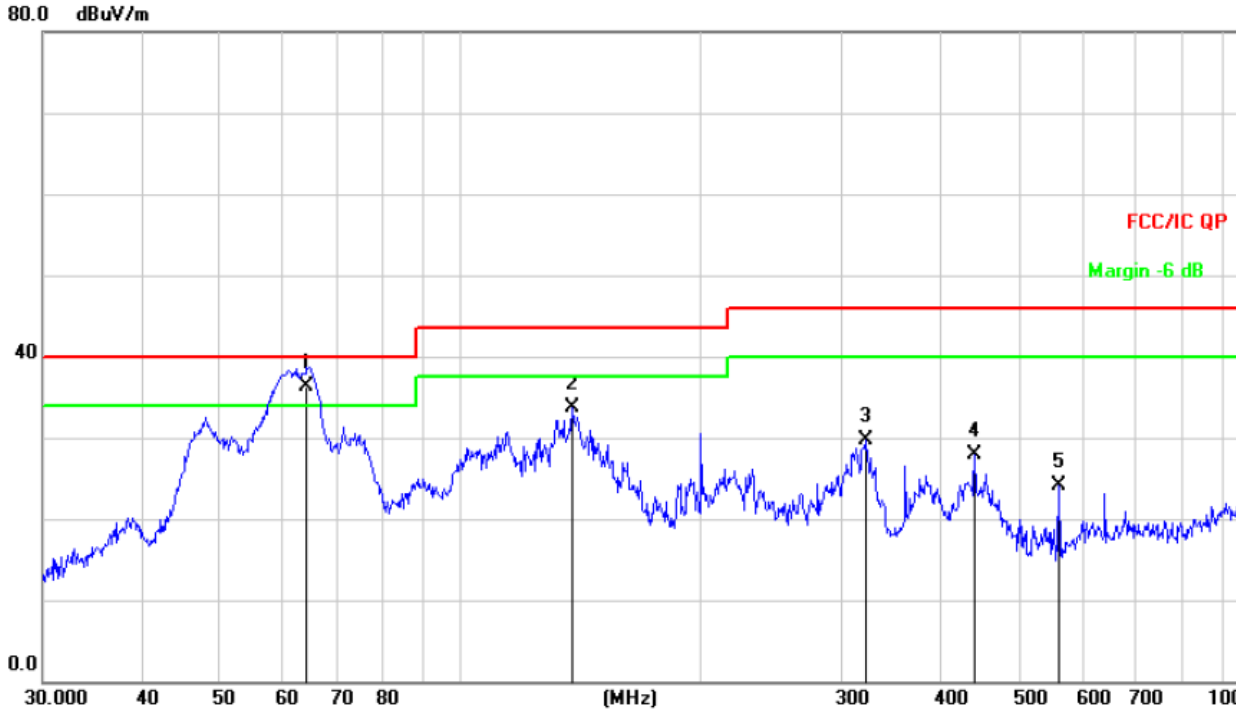

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detect
1	*	64.2074	53.22	-16.87	36.35	40.00	-3.65	QP
2		137.9028	52.47	-18.72	33.75	43.50	-9.75	QP
3		321.0608	42.65	-13.02	29.63	46.00	-16.37	QP
4		440.1963	38.03	-10.19	27.84	46.00	-18.16	QP
5		560.6928	31.63	-7.43	24.20	46.00	-21.80	QP
6		958.7943	23.55	-1.06	22.49	46.00	-23.51	QP

## 8. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2





EUT Photo 3



EUT Photo 4





## 9. EUT TEST SETUP PHOTOGRAPHS


### Conducted emissions







Radiated Measurement Photos

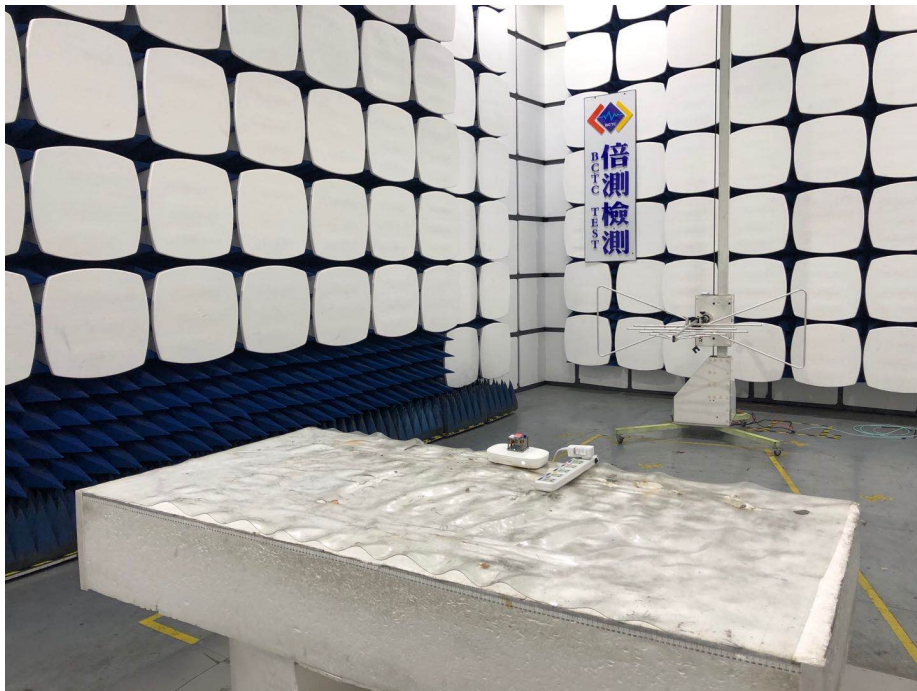

※※※※※ END OF REPORT ※※※※※