




# FCC Part 15B Measurement and Test Report

For

**mophie LLC**

**6224 Technology Ave. Kalamazoo, MI 49009 U.S.A.**

**FCC ID: 2ACWB-SP6**

<b>Test Rule(s):</b>	<u>FCC Part 15 Subpart B</u>
<b>Product Description:</b>	<u>mophie space pack</u>
<b>Tested Model:</b>	<u>SP-IP6-32GB-BLK</u>
<b>Report No.:</b>	<u>STR15058279I-2</u>
<b>Tested Date:</b>	<u>2015-06-03 to 2015-06-11</u>
<b>Issued Date:</b>	<u>2014-06-11</u>
<b>Tested By:</b>	<u>Jason Su / Engineer</u> 
<b>Reviewed By:</b>	<u>Lahm Peng / EMC Manager</u> 
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u> 
<b>Prepared By:</b>	

**Shenzhen SEM.Test Technology Co., Ltd.**  
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)  
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....3**

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

1.2 TEST STANDARDS.....4

1.3 TEST METHODOLOGY .....4

1.4 TEST FACILITY .....4

1.5 EUT SETUP AND OPERATION MODE .....5

**2. SUMMARY OF TEST RESULTS .....6**

**3. CONDUCTED EMISSIONS .....7**

3.1 MEASUREMENT UNCERTAINTY .....7

3.2 TEST EQUIPMENT LIST AND DETAILS .....7

3.3 TEST PROCEDURE.....7

3.4 BASIC TEST SETUP BLOCK DIAGRAM.....7

3.5 ENVIRONMENTAL CONDITIONS .....8

3.6 SUMMARY OF TEST RESULTS/PLOTS .....8

3.7 CONDUCTED EMISSIONS TEST DATA.....8

**4. RADIATED EMISSIONS.....13**

4.1 MEASUREMENT UNCERTAINTY .....13

4.2 TEST EQUIPMENT LIST AND DETAILS .....13

4.3 TEST PROCEDURE.....13

4.4 TEST RECEIVER SETUP .....14

4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....14

4.6 ENVIRONMENTAL CONDITIONS .....14

4.7 SUMMARY OF TEST RESULTS/PLOTS .....15

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: mophie LLC  
 Address of applicant: 6224 Technology Ave. Kalamazoo, MI 49009 U.S.A.

Manufacturer: mophie LLC  
 Address of manufacturer: 6224 Technology Ave. Kalamazoo, MI 49009 U.S.A.

General Description of EUT	
Product Name:	mophie space pack
Trade Name:	mophie
Model No.:	SP-IP6-32GB-BLK
Adding Model(s):	SP-IP6-64GB-BLK ; SP-IP6-128GB-BLK SP-IP6-64GB-GLD ; SP-IP6-128GB-GLD
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model SP-IP6-32GB-BLK, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Rated Voltage:	USB DC 5V ; Battery:DC3.8V
Rated Current:	Input 1.8A ; Output max 1.0A
Rated Power:	/
Lowest Internal Frequency:	12MHz
Highest Internal Frequency:	16MHz
Classification of ITE:	Class B

## 1.2 Test Standards

The following report is prepared on behalf of the mophie LLC in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

### **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

## 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

### Test Mode List:

Test Mode	Description	Remark
TM1	Charging	
TM2	Discharging	
TM3	Downloading	

### EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	0.8	Shielded	Without Ferrite

### Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E23	EB12648265
Adapter	DELL	PSAI10R-050Q	/
iPhone 6	Apple	A1549	/

### Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

---

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable



### 3.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

### 3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:

**-3.94 dB** at **0.4060 MHz** in the **Neutral, AVG** detector, 0.15-30MHz


### 3.7 Conducted Emissions Test Data



**Plot of Conducted Emissions Test Data**


EUT: *mophie space pack*  
 Tested Model: *SP-IP6-32GB-BLK*  
 Operating Condiation: *TMI*  
 Comment: *AC 120V/60Hz; Adapter 5V*

Test Specification: *Neutral*

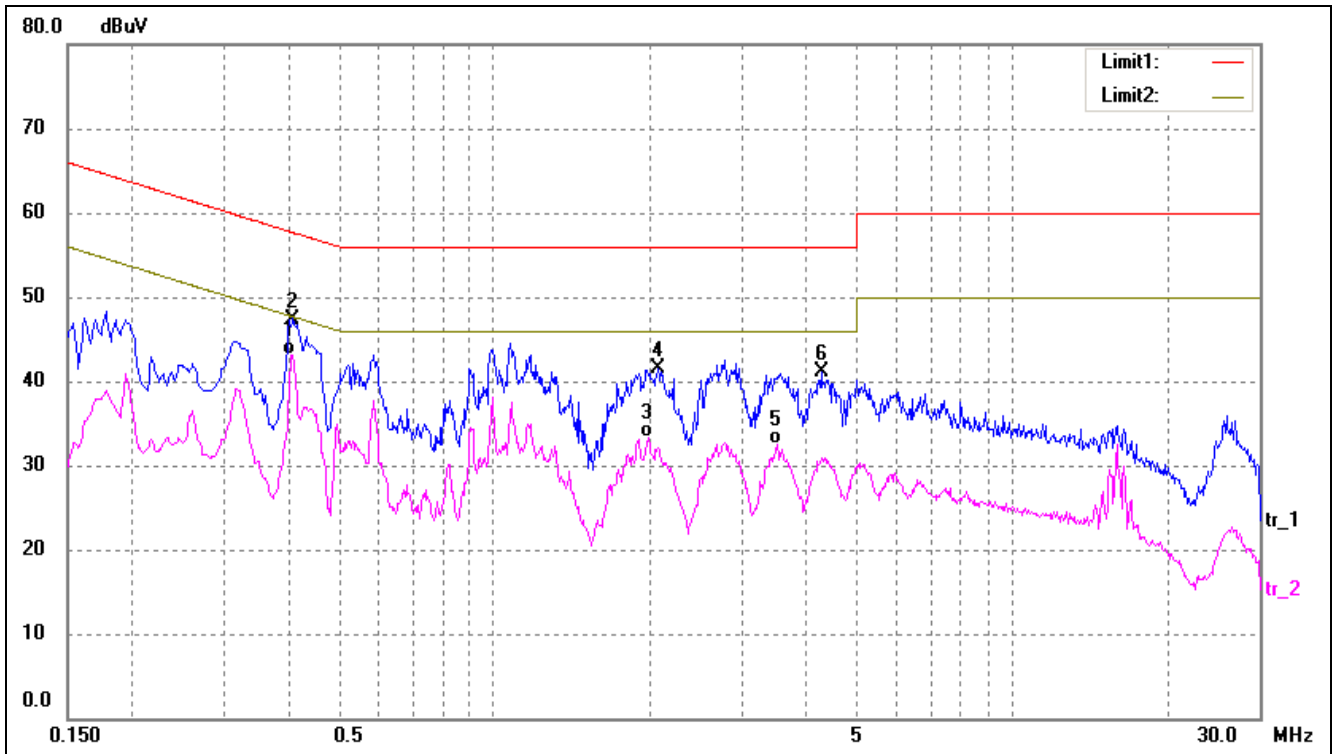

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4060	33.67	9.50	43.17	47.73	-4.56	AVG
2	0.4100	37.90	9.50	47.40	57.65	-10.25	QP
3	1.9820	23.22	10.00	33.22	46.00	-12.78	AVG
4	2.0660	31.58	10.00	41.58	56.00	-14.42	QP
5	3.5140	22.47	10.00	32.47	46.00	-13.53	AVG
6	4.2700	31.04	10.00	41.04	56.00	-14.96	QP

Test Specification: Line

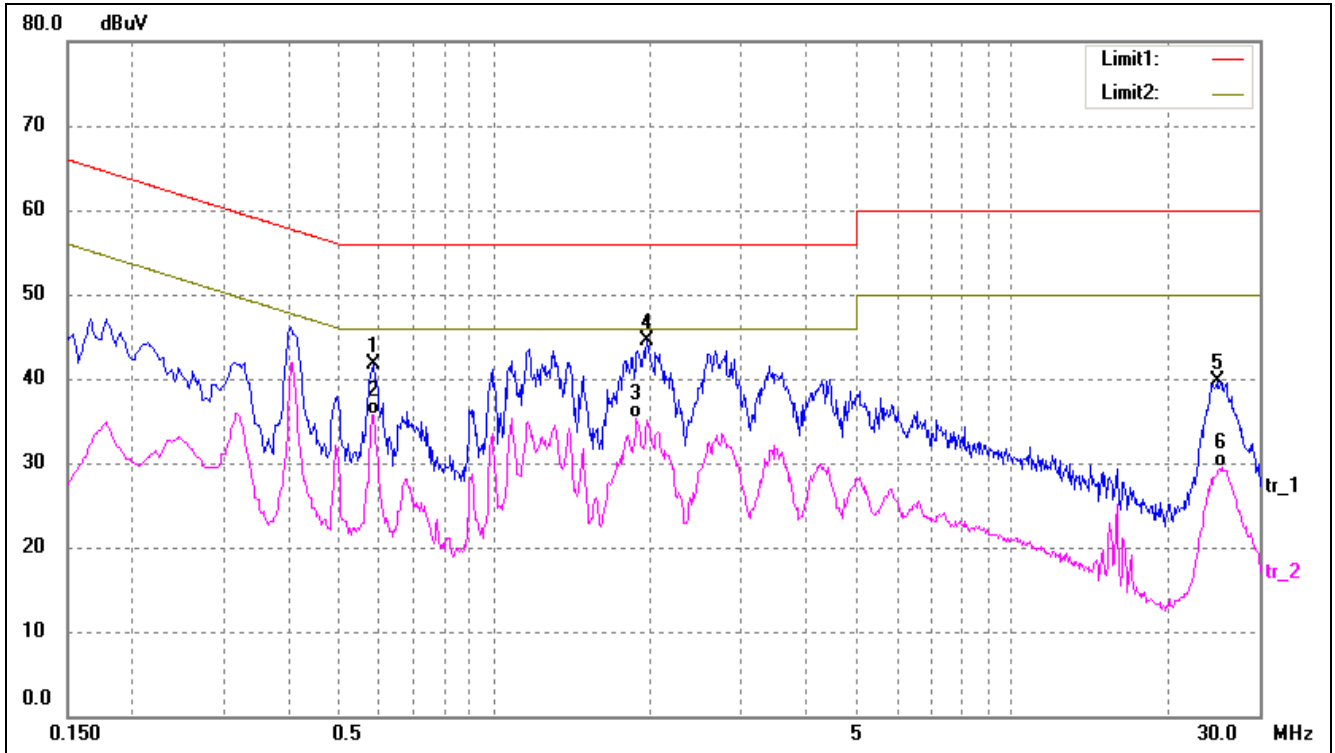


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5860	32.14	9.59	41.73	56.00	-14.27	QP
2	0.5860	26.20	9.59	35.79	46.00	-10.21	AVG
3	1.8860	25.32	10.00	35.32	46.00	-10.68	AVG
4	1.9780	34.51	10.00	44.51	56.00	-11.49	QP
5	24.9140	26.72	12.97	39.69	60.00	-20.31	QP
6	25.3900	16.43	13.00	29.43	50.00	-20.57	AVG

**Plot of Conducted Emissions Test Data**


EUT: *mophie space pack*  
 Tested Model: *SP-IP6-32GB-BLK*  
 Operating Condiation: *TM3*  
 Comment: *USB DC 5V*

Test Specification: *Neutral*

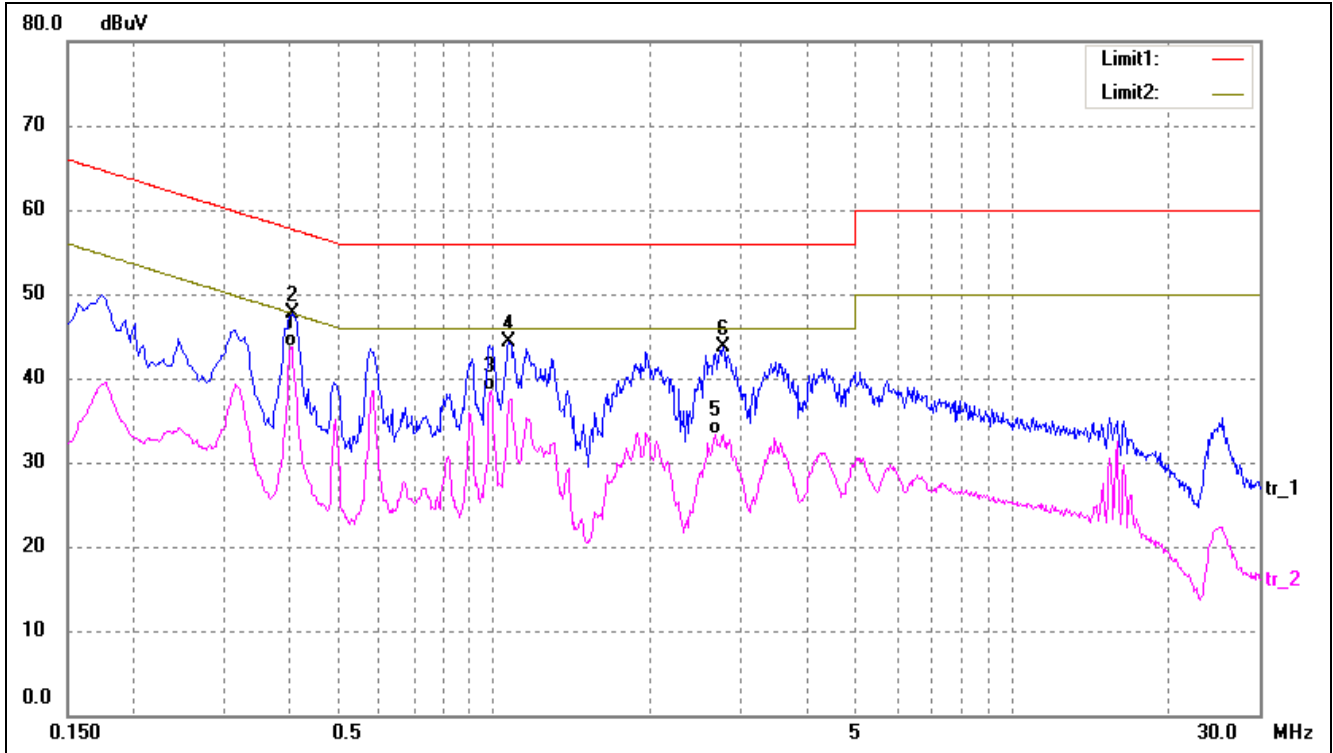

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4060	34.29	9.50	43.79	47.73	-3.94	AVG
2	0.4100	38.25	9.50	47.75	57.65	-9.90	QP
3	0.9860	28.50	9.99	38.49	46.00	-7.51	AVG
4	1.0700	34.26	10.00	44.26	56.00	-11.74	QP
5	2.6740	23.34	10.00	33.34	46.00	-12.66	AVG
6	2.7740	33.70	10.00	43.70	56.00	-12.30	QP

Test Specification: Line

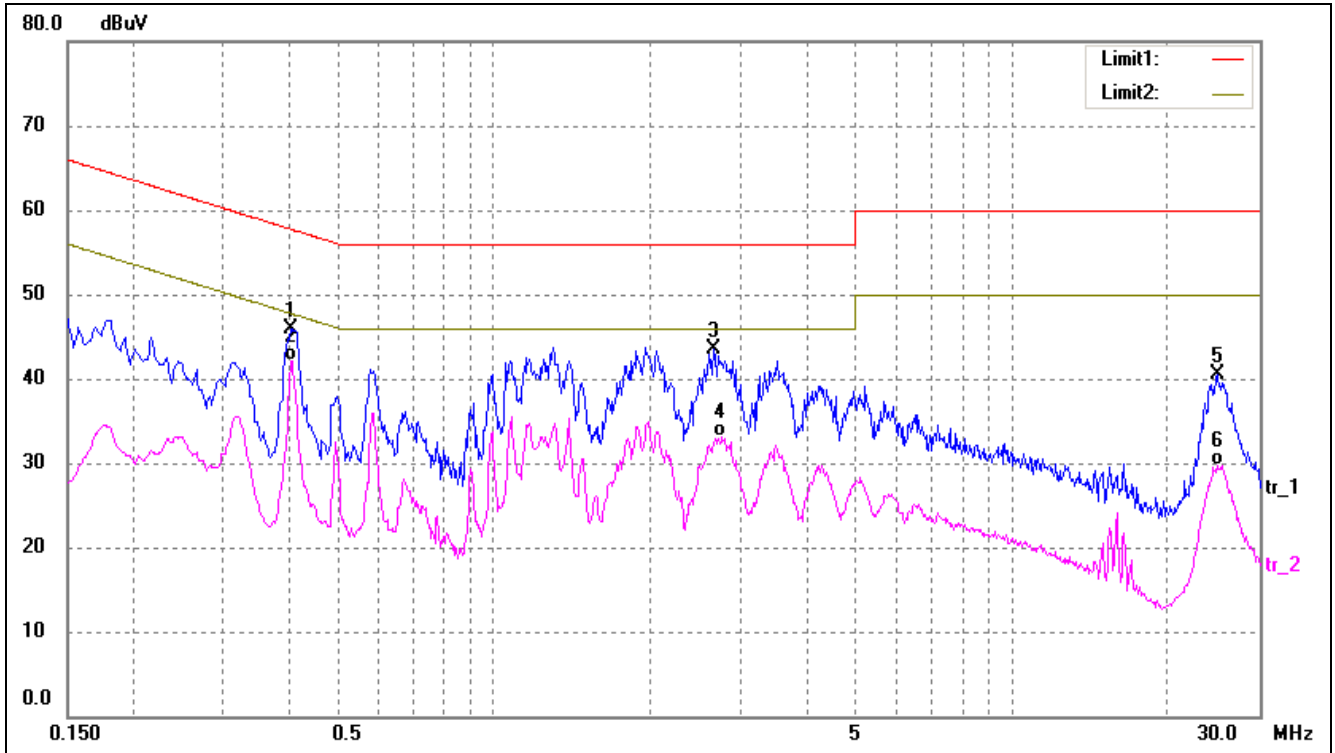

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4060	36.43	9.50	45.93	57.73	-11.80	QP
2	0.4060	32.60	9.50	42.10	47.73	-5.63	AVG
3	2.6580	33.52	10.00	43.52	56.00	-12.48	QP
4	2.7580	23.09	10.00	33.09	46.00	-12.91	AVG
5	24.9100	27.45	12.97	40.42	60.00	-19.58	QP
6	24.9100	16.83	12.97	29.80	50.00	-20.20	AVG

## 4. Radiated Emissions

### 4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is  $\pm 5.10$  dB.

### 4.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2015-05-28	2016-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2015-05-28	2016-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2015-05-28	2016-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2015-05-28	2016-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2015-05-24	2016-05-23
Horn Antenna	ETS	3117	00086197	2015-05-24	2016-05-23
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2015-05-24	2016-05-23


### 4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

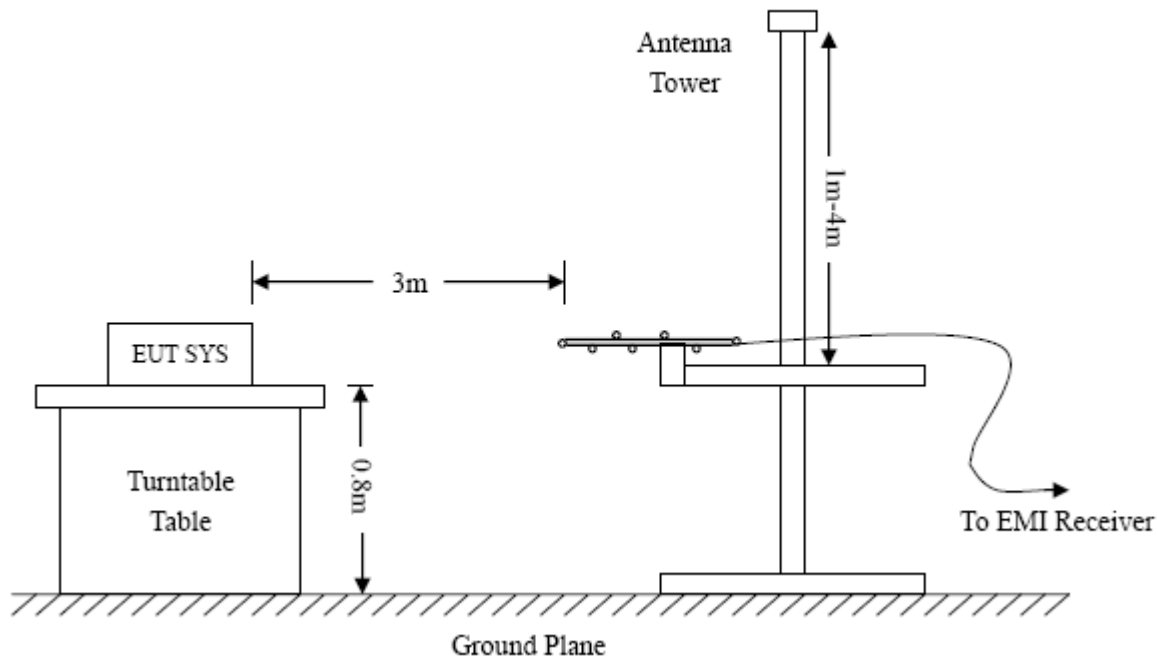

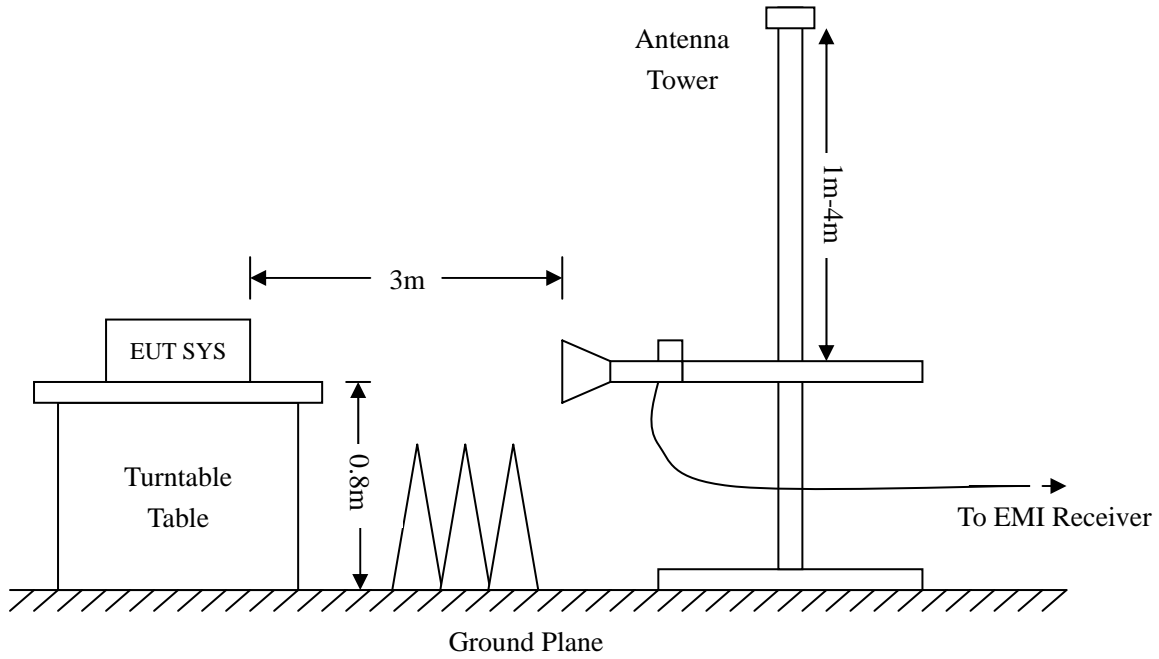

#### 4.4 Test Receiver Setup

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

#### 4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

#### 4.6 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

### 4.7 Summary of Test Results/Plots


According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

**-2.29dB at 63.5356 MHz in the Vertical polarization, 9 kHz to 1 GHz, 3Meters**

#### Plot of Radiated Emissions Test Data


EUT: *mophie space pack*  
 Tested Model: *SP-IP6-32GB-BLK*  
 Operating Condition: *TM1*  
 Comment: *AC 120V/60Hz; Adapter 5V*

Test Specification: *Horizontal*

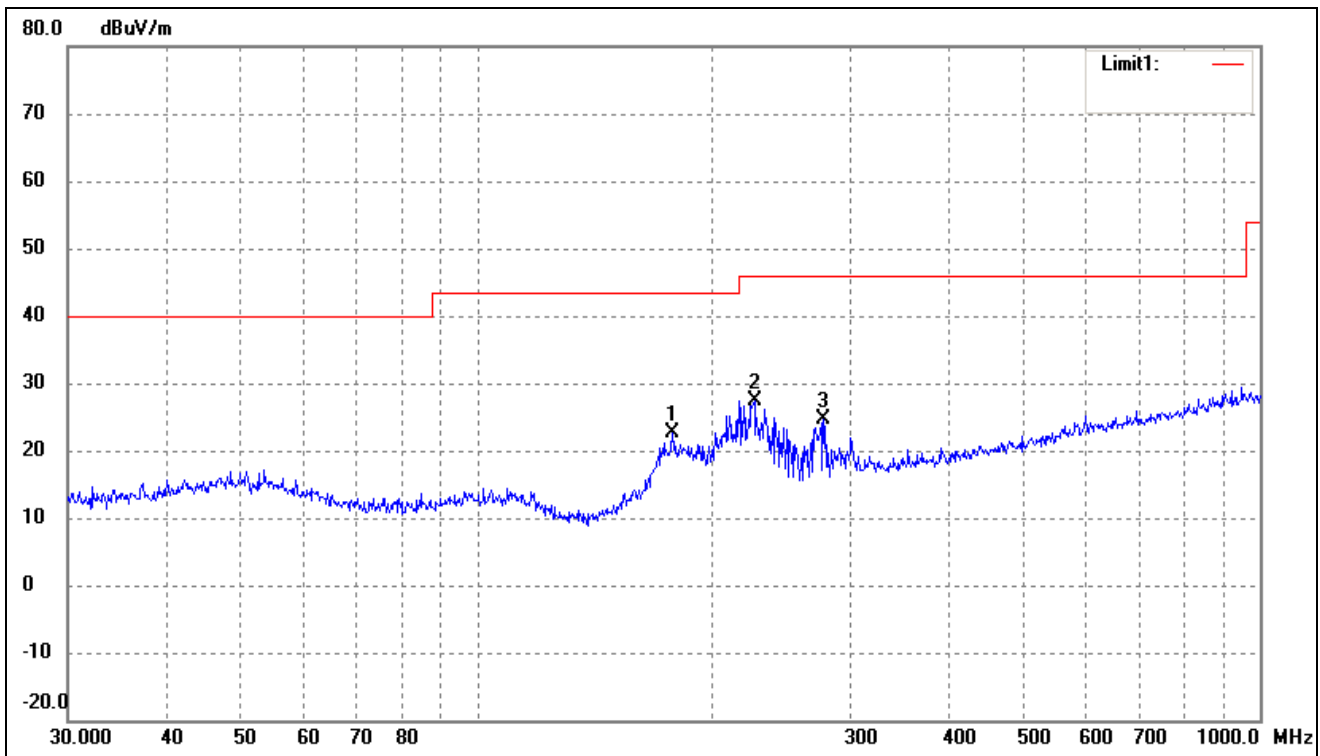

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	177.5092	34.66	-11.91	22.75	43.50	-20.75	89	100	QP
2	226.0994	36.77	-9.37	27.40	46.00	-18.60	165	100	QP
3	277.0935	32.45	-7.94	24.51	46.00	-21.49	32	100	QP

Test Specification: Vertical

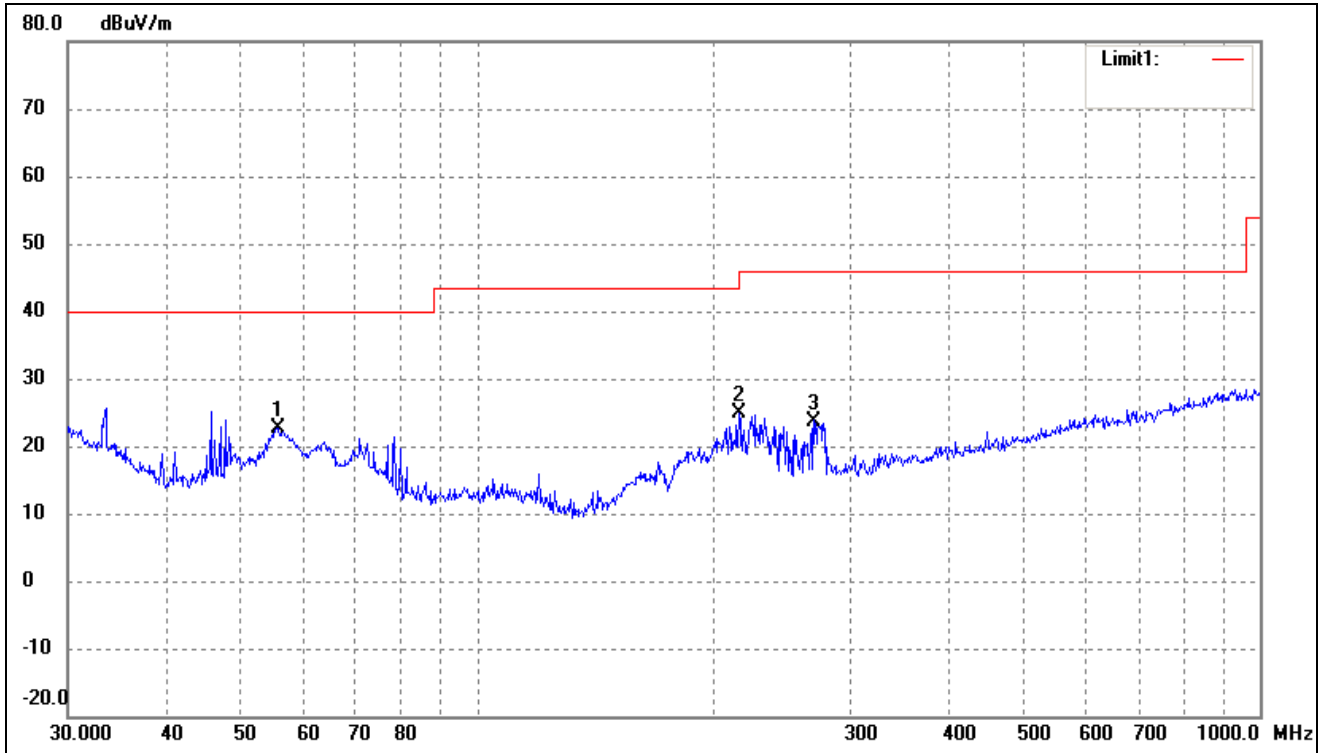

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	55.6094	31.82	-9.15	22.67	40.00	-17.33	53	100	QP
2	216.0240	34.73	-9.91	24.82	46.00	-21.18	183	100	QP
3	269.4284	31.89	-8.14	23.75	46.00	-22.25	98	100	QP



**Plot of Radiated Emissions Test Data**


EUT: *mophie space pack*

Tested Model: *SP-IP6-32GB-BLK*

Operating Condition: *TM2*


Comment: *DC5V*

Test Specification: *Horizontal*

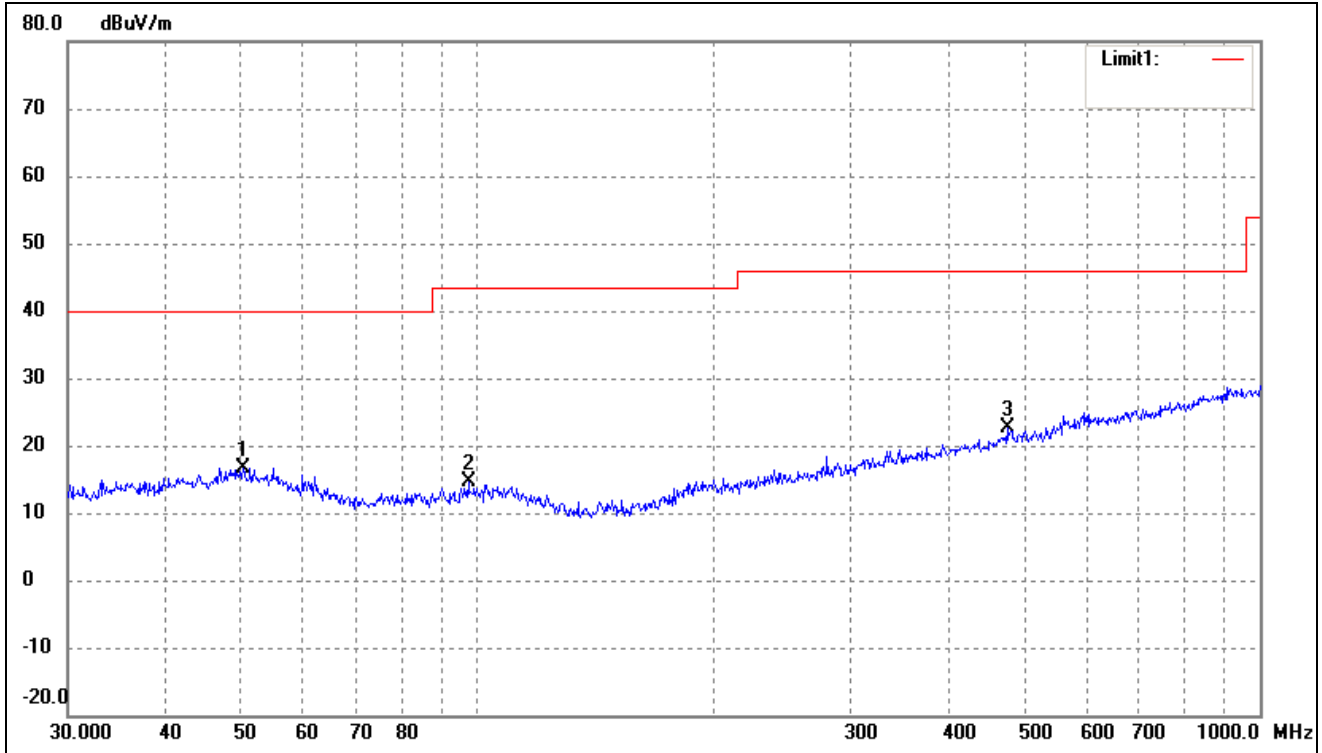

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	50.2324	24.64	-8.02	16.62	40.00	-23.38	231	100	QP
2	97.4560	25.64	-11.10	14.54	43.50	-28.96	65	100	QP
3	475.4991	26.32	-3.60	22.72	46.00	-23.28	189	100	QP

Test Specification: Vertical

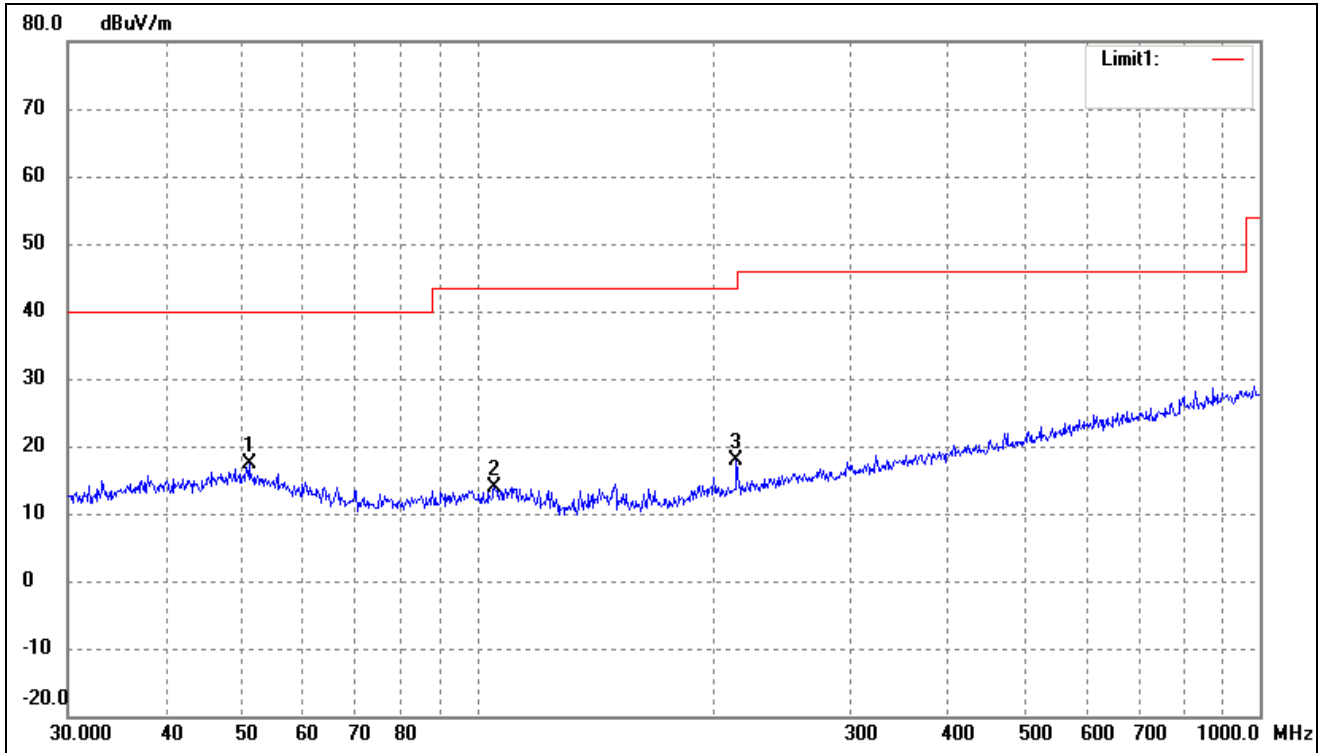


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	51.1209	25.51	-8.20	17.31	40.00	-22.69	79	100	QP
2	105.2718	24.35	-10.48	13.87	43.50	-29.63	214	100	QP
3	214.5143	27.80	-9.99	17.81	43.50	-25.69	156	100	QP

**Plot of Radiated Emissions Test Data**


EUT: *mophie space pack*  
 Tested Model: *SP-IP6-32GB-BLK*  
 Operating Condition: *TM3*  
 Comment: *USB DC5V*

Test Specification: *Horizontal*

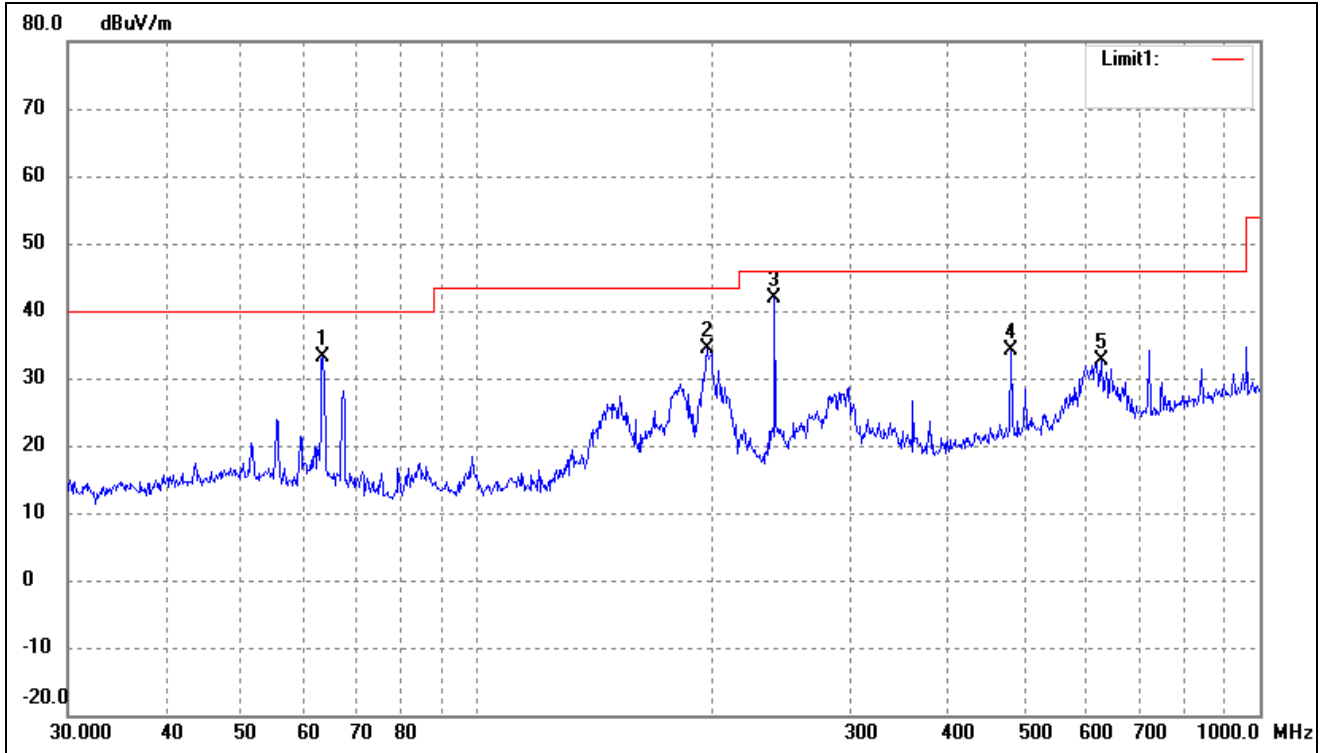

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	63.5356	43.95	-10.82	33.13	40.00	-6.87	136	100	QP
2	196.5098	44.99	-10.66	34.33	43.50	-9.17	144	100	QP
3	239.9874	50.83	-8.85	41.98	46.00	-4.02	214	100	QP
4	480.5276	37.64	-3.47	34.17	46.00	-11.83	301	100	QP
5	627.2738	33.19	-0.57	32.62	46.00	-13.38	123	100	QP

Test Specification: Vertical

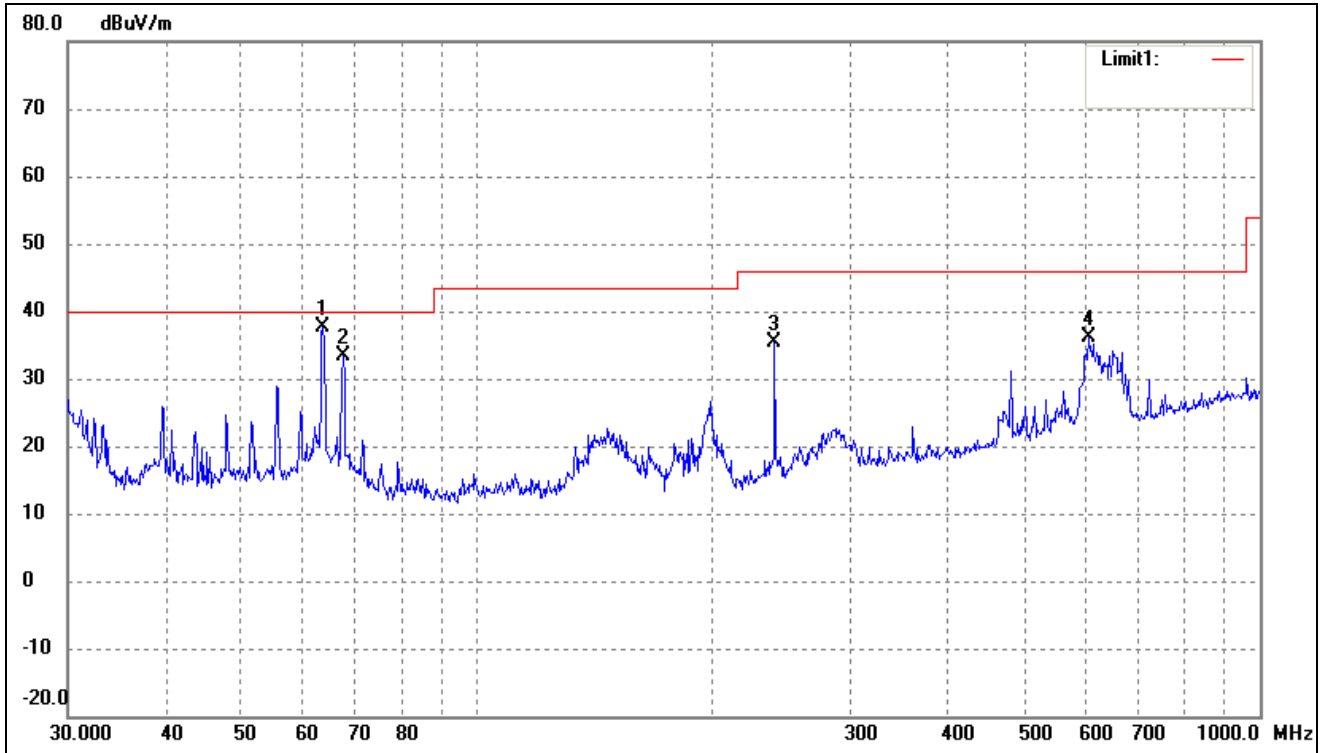

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	63.5356	48.53	-10.82	37.71	40.00	-2.29	211	100	QP
2	67.4382	45.01	-11.65	33.36	40.00	-6.64	310	100	QP
3	239.9874	44.26	-8.85	35.41	46.00	-10.59	126	100	QP
4	603.5392	36.78	-0.72	36.06	46.00	-9.94	341	100	QP

The measurements greater than 20dB below the limit from 9kHz to 30MHz and test data are not provided.

\*\*\*\*\* END OF REPORT \*\*\*\*\*