

# TEST REPORT

**Reference No.** : WTS17S1092898-2E  
**FCC ID** : 2ACWB-USBC3K  
**Applicant** : mophie LLC  
**Address** : 6244 Technology Ave. Kalamazoo, MI 49009 U.S.A.  
**Manufacturer** : The same as above  
**Address** : The same as above  
**Product** : mophie charge force powerstation mini  
**Model(s)** : PWRSTION-WRLS-USBC-3K  
**Standards** : FCC Part 15 subpart C  
**Date of Receipt sample** : 2017-10-19  
**Date of Test** : 2017-10-20 to 2017-11-12  
**Date of Issue** : 2017-11-13  
**Test Result** : **Pass**

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

*Jack Wen*

Jack Wen / Test Engineer

Approved by:



*Philo Zhong*

Philo Zhong / Manager

## 2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS .....	2
3 GENERAL INFORMATION.....	3
3.1 GENERAL DESCRIPTION OF E.U.T.....	3
3.2 DETAILS OF E.U.T.....	3
4 EQUIPMENT USED DURING TEST .....	4
4.1 EQUIPMENTS LIST .....	4
4.2 DESCRIPTION OF AUXILIARY EQUIPMENT .....	4
4.3 TEST EQUIPMENT CALIBRATION .....	4
5 RF EXPOSURE.....	5
5.1 TEST SETUP .....	5
5.2 THE PROCEDURES / LIMIT.....	6
5.3 TEST DATA .....	6
5.4 EUT COUPLING SURFACE AREA .....	7
6 PHOTOGRAPH –RF EXPOSURE TEST SETUP .....	8

### 3 General Information

#### 3.1 General Description of E.U.T

Product:	mophie charge force powerstation mini
Model(s):	PWRSTION-WRLS-USBC-3K
Model Difference:	N/A
Type of Modulation:	ASK
Frequency Range:	0.112~0.205MHz
Antenna installation:	Coil Antenna

#### 3.2 Details of E.U.T

Rating:	Input:5V $\overline{=}$ 3A
	Output 5W
	Battery: 3.8V, 3000mAh, 11.4Wh

## 4 Equipment Used during Test

### 4.1 Equipments List

RF EXPOSURE						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Protection Network	SCHWARZBECK	VDHH9502	9502-103	2017-04-12	2018-04-11
2	EMI Test Receiver	R&S	ESCI	101528	2017-04-12	2018-04-11

### 4.2 Description of Auxiliary Equipment

Equipment	Manufacturer	Model No.	Series No.
Mophie juice pack	Mophie	JP-SGN8	-

### 4.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., LTD. address is No.163, Pingyun Rd. West of Huangpu Ave, Tianhe District, Guangzhou, Guangdong, China.


## 5 RF Exposure

Test Requirement:

Environmental evaluation and exposure limit according to FCC CFR 47 Part 1.1307(b), 1.1310

According KDB680106 D01v02: RF Exposure Wireless Charging Apps v02

### 5.1 Test Setup

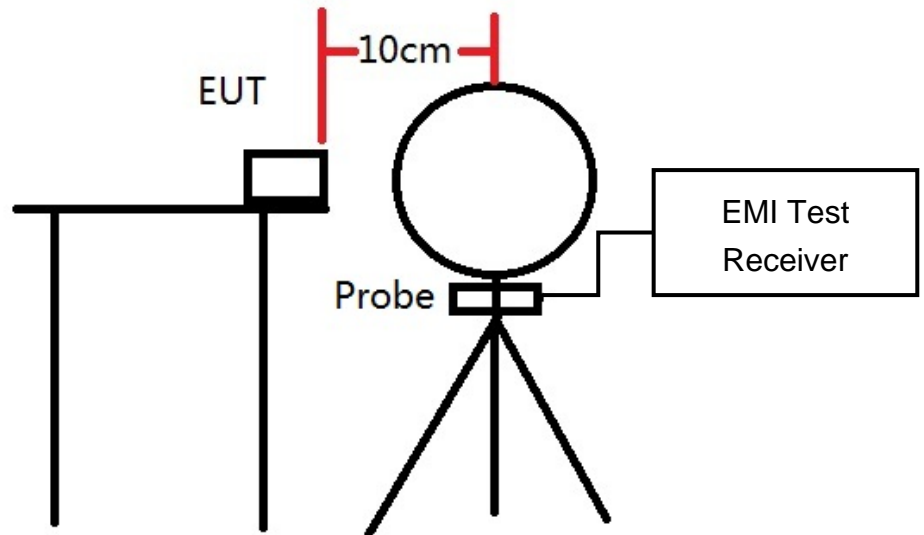

These testing were performed at test configuration as above diagram.

EUT was placed on a table, and the measure probe was placed at a measurement distance of 10cm from the EUT to the center of the probe.

The EUT was put in different directions (Left, Right, Front, Rear, Top and Bottom) to obtain the maximum reading.

## 5.2 The procedures / limit

### (A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

### (B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

## 5.3 Test Data

### E-Field

Test Side	Separation Distance(cm)	E-Field Measured(V/m)	E-Field Limit(V/m)
Left	10	5.44	614
Right	10	5.51	614
Front	10	5.55	614
Rear	10	5.45	614
Top	10	6.30	614
Bottom	10	6.42	614
Margin Limit (%)		1.06%	

## H-Field


Test Side	Separation Distance(cm)	H-Field Measured(A/m)	H-Field Limit(A/m)
Left	10	0.15	1.63
Right	10	0.17	1.63
Front	10	0.13	1.63
Rear	10	0.24	1.63
Top	10	0.37	1.63
Bottom	10	0.30	1.63
Margin Limit (%)		23.31%	

Remark: The device meets the mobile RF exposure limit at a 10cm separation distance as specified in §2.1091 of the FCC Rules. The maximum leakage fields at 10 cm surrounding the device from transmitting coil is demonstrated to be less than 30% of the MPE limit.

Please refer to above E and H field Strength test results.

#### 5.4 EUT coupling surface area

The inductive area is below (Coupling area:  $\varnothing$  35 mm, The located at top of the equipment):

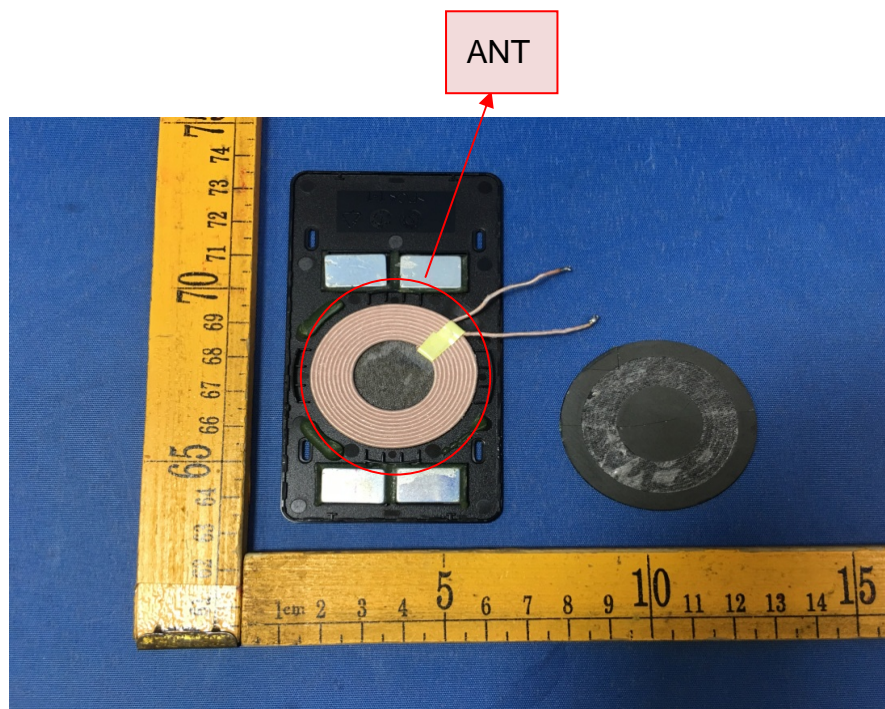

## 6 Photograph –RF Exposure Test Setup

Left Side



Right Side





Front Side



Rear Side



Top Side



Bottom Side



====End of Report====