

FCC PART 15C TEST REPORT FOR CERTIFICATION  
On Behalf of

Shenyang Tongfang Multimedia Technology Co., Limited

LED TV

Model Number: SE60FYP1T

FCC ID: 2ACWISE60FYP1T

Prepared for : Shenyang Tongfang Multimedia Technology Co., Limited  
No. 10 Nanping East Road HunNan New District Shenyang,  
LiaoNing Province China

Prepared By : EST Technology Co., Ltd.  
San Tun Management Zone, Houjie Town, Dongguan,  
Guangdong, China

Tel: 86-769-83081888-808

Report Number: ESTE-R1611048  
Date of Test : September 21~ December 01, 2016  
Date of Report : December 02, 2016

# TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT) .....	5
2. SUMMARY OF TEST .....	6
2.1. Summary of test result.....	6
2.2. Test Facilities .....	7
2.3. Assistant equipment used for test.....	8
2.4. Block Diagram .....	8
2.5. Test mode .....	9
2.6. Channel List for wifi .....	9
2.7. Test Equipment.....	10
3 POWER LINE CONDUCTED EMISSION TEST.....	11
3.1. Limit.....	11
3.3 Test Procedure.....	11
3.4. Test Result.....	11
3.5. Test data .....	12
4 RADIATED EMISSION TEST .....	16
4.1 Limit.....	16
4.2. Block Diagram of Test setup.....	17
4.3. Test Procedure.....	18
4.4. Test Result.....	18
4.5. Test Data .....	19
5 BAND EDGE COMPLIANCE TEST .....	55
5.1 Limit.....	55
5.2 Test Procedure.....	55
5.3 Test Result.....	55
5.4 Test Data .....	56
6 6dB & 20dB Bandwidth Test.....	64
6.1 Limit.....	64
6.2 Test Procedure.....	64
6.3 Test Result.....	64
6.4 6dB Test Data.....	66
6.5 20dB Test Data.....	74
7 OUTPUT POWER TEST .....	82
7.1 Limit.....	82
7.2 Test Procedure.....	82
7.3 Test Procedure.....	82
7.4 Test Result.....	83
7.5 Test Data .....	84
8 POWER SPECTRAL DENSITY TEST .....	92
8.1 Limit.....	92
8.2 Test Procedure.....	92

8.3 Test Result..... 93

8.4 Test Data ..... 94

9 ANTENNA REQUIREMENTS .....102

9.1 Limit ..... 102


9.2 Result..... 102

10 TEST SETUP PHOTO.....103

11 PHOTOS OF EUT ..... 105

### Test Report Verification

<b>Applicant:</b> <b>Address:</b>	Shenyang Tongfang Multimedia Technology Co., Limited No. 10 Nanping East Road HunNan New District Shenyang,LiaoNing Province China		
<b>Manufacturer</b> <b>Address:</b>	Shenyang Tongfang Multimedia Technology Co., Limited No. 10 Nanping East Road HunNan New District Shenyang,LiaoNing Province China		
<b>Factory</b> <b>Address:</b>	Shenyang Tongfang Multimedia Technology Co., Limited No. 10 Nanping East Road HunNan New District Shenyang,LiaoNing Province China		
<b>E.U.T:</b>	LED TV		
<b>Model Number:</b>	SE60FYP1T		
<b>Power Supply:</b>	AC 100~240V;50/60Hz		
<b>Test Voltage:</b>	AC 120V/60Hz; AC 240V/60Hz		
<b>Trade Name:</b>	Seiki	Serial No.:	-----
<b>Date of Receipt:</b>	September 21, 2016	<b>Date of Test:</b>	September 21~ December 01,2016
<b>Test Specification:</b>	FCC Rules and Regulations Part 15 Subpart C:2016 ANSI C63.10:2013		
<b>Test Result:</b>	<p>The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.</p> <p>This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: December 02, 2016</p>		
<b>Prepared by:</b>	<b>Tested by:</b>	<b>Approved by:</b>	
			
Ada / Assistant	Tony.Tang/ Engineer	IcemanHu / Manager	
<b>Other Aspects:</b>	None.		
Abbreviations: OK/P=passed    fail/F=failed    n.a/N=not applicable    E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			



# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

Product Name	:	LED TV
Model Number	:	SE60FYP1T
Modulation	:	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Operation Frequency	:	IEEE 802.11b/g: 2412 ~ 2462 MHz IEEE 802.11n HT20 : 2412 ~ 2462 MHz IEEE 802.11n HT40 : 2422 ~ 2452 MHz
Number of channel	:	IEEE 802.11b: 11 Channels IEEE 802.11g: 11 Channels IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Antenna and Gain	:	PCB Antenna with 2dBi gain (Max)

## 2. SUMMARY OF TEST

### 2.1. Summary of test result

Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10:2013	PASS
Radiated Emission	FCC Part 15: 15.209 ANSI C63.10:2013 KDB 558074	PASS
Band Edge Compliance	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Conducted spurious emissions	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
6dB Bandwidth	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Power Spectral Density	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
Note: 558074 D01 DTS Meas Guidance v03r05		




### 2.3. Assistant equipment used for test

2.3.1. N/A

### 2.4. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 meter high above ground. EUT was set into Wifi test mode by software before test.



(EUT: LED TV)



### 2.5. Test mode

A special test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode and data rate.

Test mode	Lower channel	Center channel	Upper channel
IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20 Transmitting	2412MHz	2442MHz	2462MHz
IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20 Receiving	2412MHz	2442MHz	2462MHz
IEEE 802.11n HT40 Transmitting	2422MHz	2442MHz	2452MHz
IEEE 802.11n HT40 Receiving	2422MHz	2442MHz	2452MHz

### 2.6. Channel List for wifi

IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442		
3	2422	8	2447		
4	2427	9	2452		
5	2432	10	2457		
IEEE 802.11n HT40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	4	2437	7	2452
2	2427	5	2442		
3	2432	6	2447		

## 2.7. Test Equipment

### 2.7.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	June,28,16	1 Year
Artificial Mains Networ	Rohde & Schwarz	ENV216	101260	June,28,16	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	June,28,16	1 Year

### 2.7.2. For radiated emission test(30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	June,28,16	1 Year
Spectrum Analyzer	Agilent	E4411B	MY5014069 7	June,28,16	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	June,28,16	1 Year
Signal Amplifier	Agilent	310N	187037	June,28,16	1 Year

### 2.7.3. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	BBHA9120D1 002	June,28,16	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	9718-212	June,28,16	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	June,28,16	1 Year
RF Cable	Hubersuhner	RG 214/U	513423	June,28,16	1 Year

### 3 POWER LINE CONDUCTED EMISSION TEST

#### 3.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB( $\mu$ V)	Average Level dB( $\mu$ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

#### 3.3 Test Procedure

The EUT was placed on a non-metallic table, 10cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Result


**PASS.** (All emissions not reported below are too low against the prescribed limits.)

### 3.5. Test data

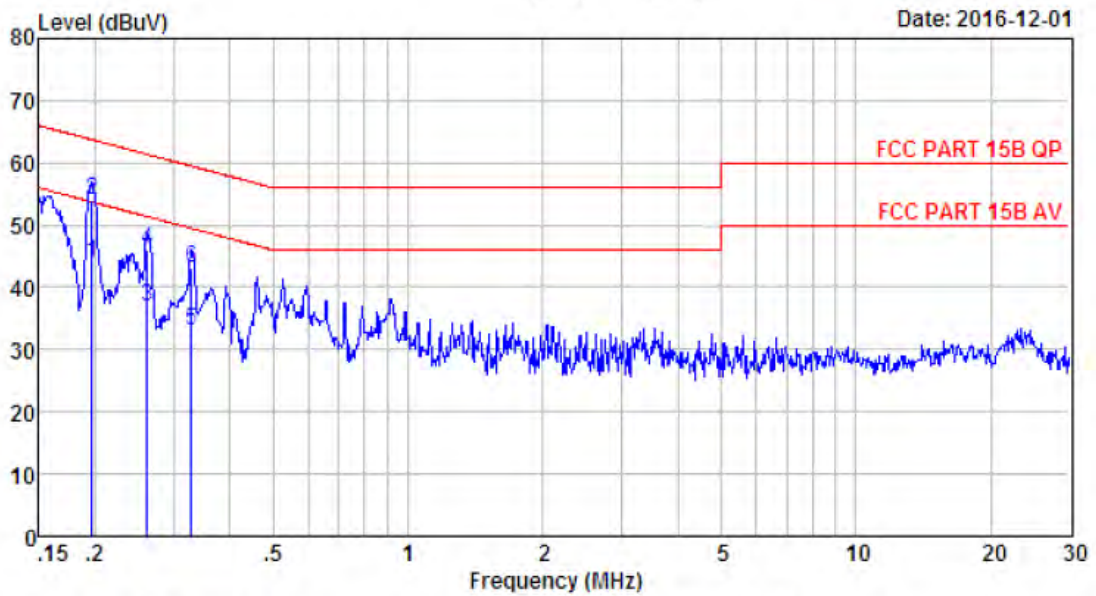


Site no : 844 Shield Room Data no. : 325  
 Env. / Ins. : Temp:24.3'C Humi:58% Press:101.50kPa LINE Phase : LINE  
 Limit : FCC PART 15B QP  
 Engineer : Bible  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.20	9.61	9.80	24.68	44.09	53.76	9.67	Average
2	0.20	9.61	9.80	34.68	54.09	63.76	9.67	QP
3	0.26	9.61	9.82	17.48	36.91	51.38	14.47	Average
4	0.26	9.61	9.82	26.48	45.91	61.38	15.47	QP
5	0.33	9.61	9.83	13.61	33.05	49.49	16.44	Average
6	0.33	9.61	9.83	23.61	43.05	59.49	16.44	QP

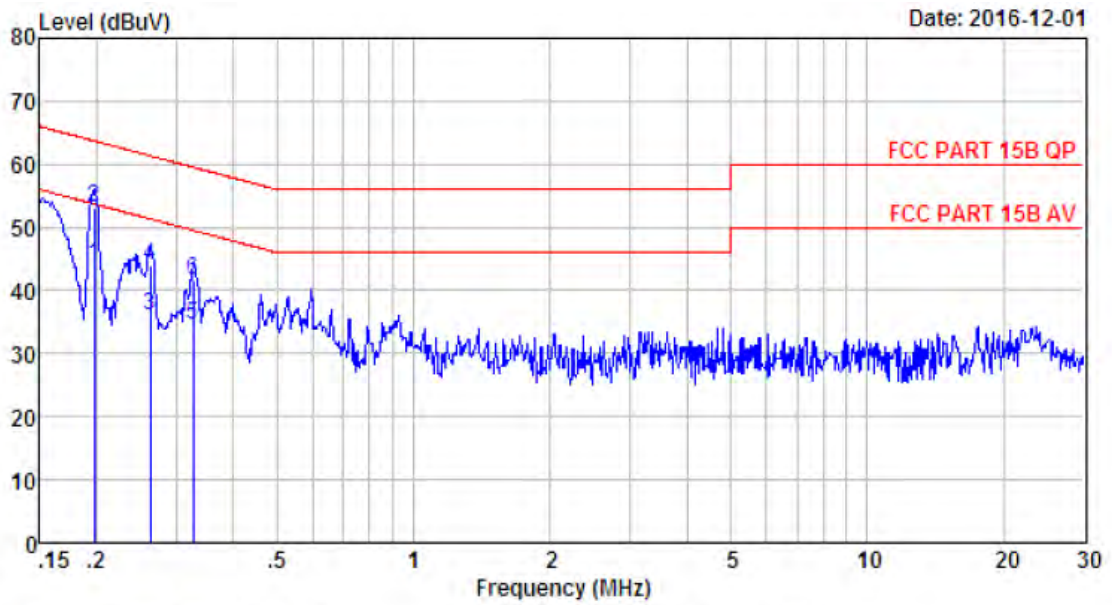


Site no : 844 Shield Room Data no. : 327  
 Env. / Ins. : Temp:24.3'C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL  
 Limit : FCC PART 15B QP  
 Engineer : Bible  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.20	9.60	9.80	24.68	44.08	53.71	9.63	Average
2	0.20	9.60	9.80	33.68	53.08	63.71	10.63	QP
3	0.26	9.60	9.82	16.69	36.11	51.34	15.23	Average
4	0.26	9.60	9.82	24.69	44.11	61.34	17.23	QP
5	0.33	9.59	9.83	15.25	34.67	49.53	14.86	Average
6	0.33	9.59	9.83	22.25	41.67	59.53	17.86	QP

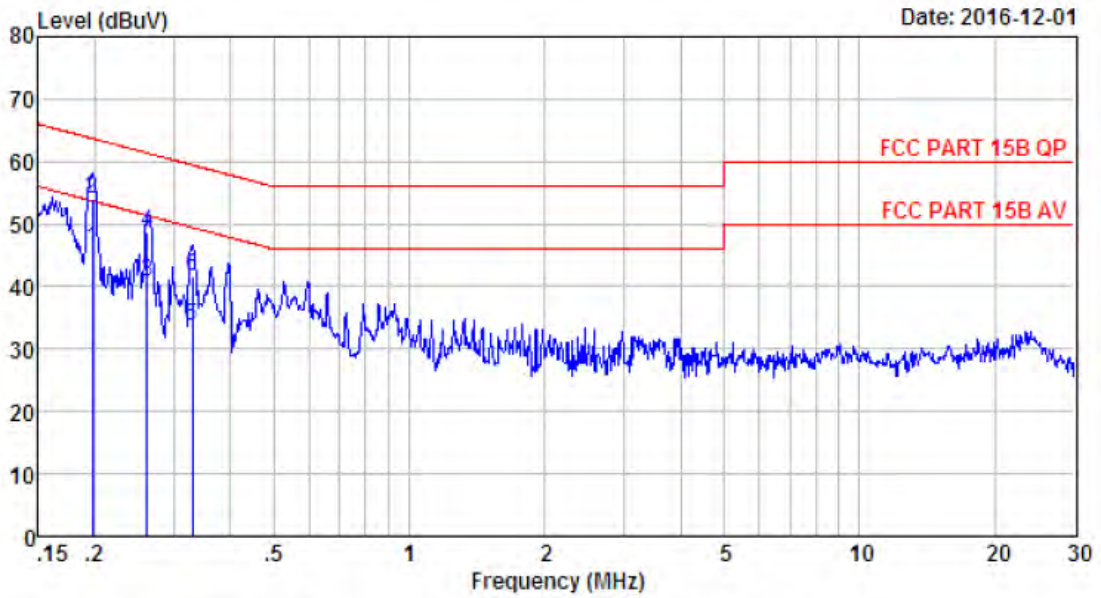

Site no : 844 Shield Room Data no. : 329  
 Env. / Ins. : Temp:24.3'C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL  
 Limit : FCC PART 15B QP  
 Engineer : Bible  
 EUT : LED TV  
 Power : AC 240V/50Hz  
 M/N : SE60FYP1T  
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.20	9.60	9.80	26.73	46.13	53.71	7.58	Average
2	0.20	9.60	9.80	34.73	54.13	63.71	9.58	QP
3	0.26	9.60	9.82	21.27	40.69	51.38	10.69	Average
4	0.26	9.60	9.82	29.27	48.69	61.38	12.69	QP
5	0.33	9.59	9.83	14.13	33.55	49.44	15.89	Average
6	0.33	9.59	9.83	22.13	41.55	59.44	17.89	QP

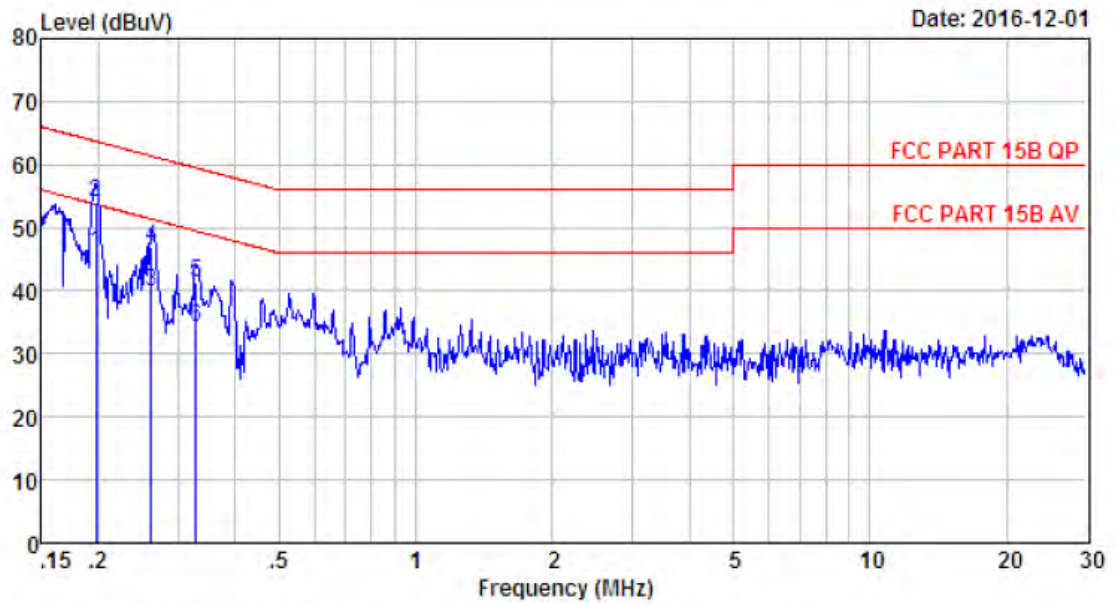

Site no : 844 Shield Room Data no. : 331  
 Env. / Ins. : Temp:24.3'C Humi:58% Press:101.50kPa LINE Phase : LINE  
 Limit : FCC PART 15B QP  
 Engineer : Bible  
 EUI : LED TV  
 Power : AC 240V/50Hz  
 M/N : SE60FYP1T  
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.20	9.61	9.80	26.66	46.07	53.71	7.64	Average
2	0.20	9.61	9.80	34.66	54.07	63.71	9.64	QP
3	0.26	9.61	9.82	20.40	39.83	51.38	11.55	Average
4	0.26	9.61	9.82	27.40	46.83	61.38	14.55	QP
5	0.33	9.61	9.83	21.85	41.29	49.49	8.20	Average
6	0.33	9.61	9.83	14.85	34.29	59.49	25.20	QP

## 4 RADIATED EMISSION TEST

### 4.1 Limit

#### 4.1.1 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

- Remark : (1) Emission level dBμV = 20 log Emission level μV/m  
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.


#### 4.1.2 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )


All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.



### 4.2. Block Diagram of Test setup

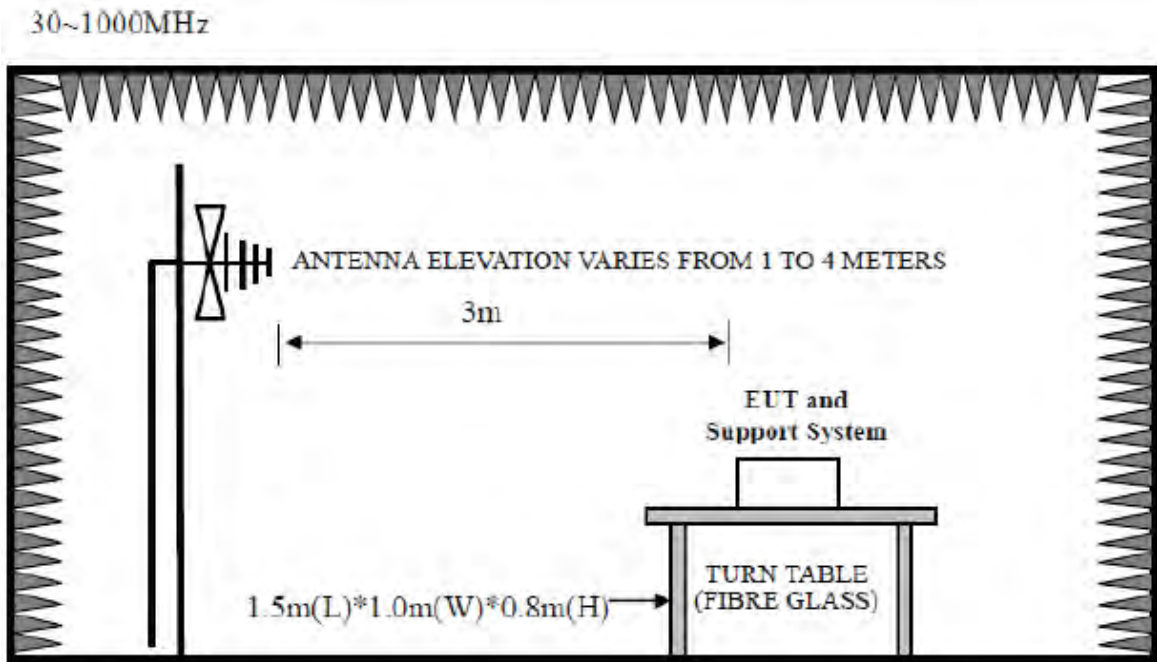

Above 1GHz

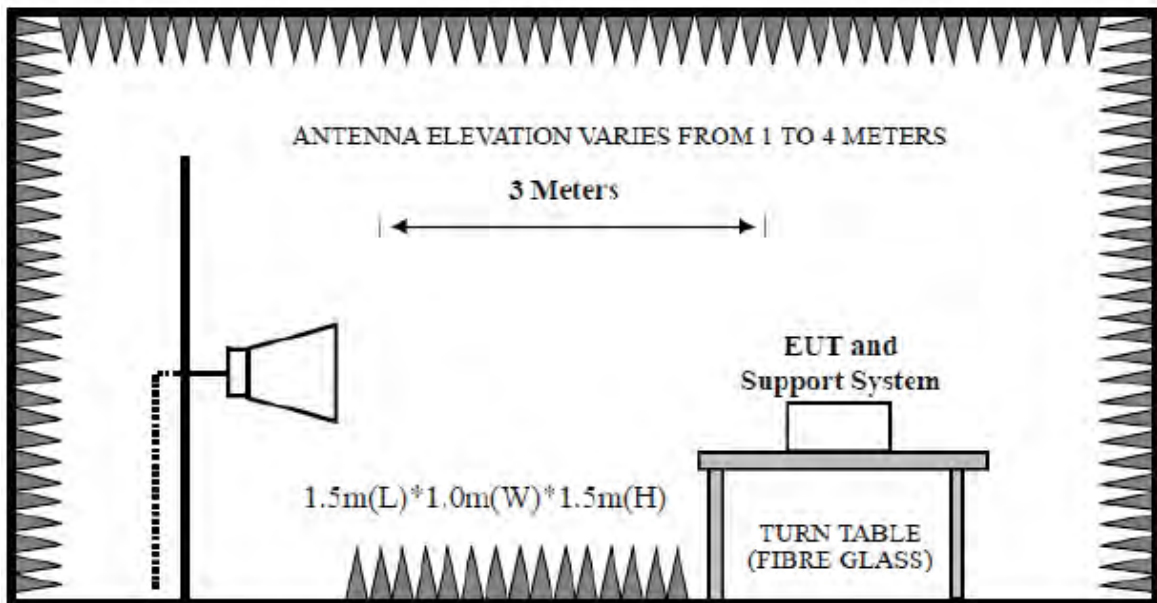

### 4.3. Test Procedure

EUT and its simulators are placed on a turn table, which is 1.5 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

PEAK detector, 1MHz/1MHz for PAEK measurement,

PEAK detector, 1MHz/10Hz for Average measurement

The frequency range from 30MHz to 10<sup>th</sup> harmonic (25GHz) are checked.

### 4.4. Test Result

**PASS.**


All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2412MHz 、 2422MHz、 2437MHz、 2452MHz and 2462 MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


### 4.5. Test Data

30-1000 MHz

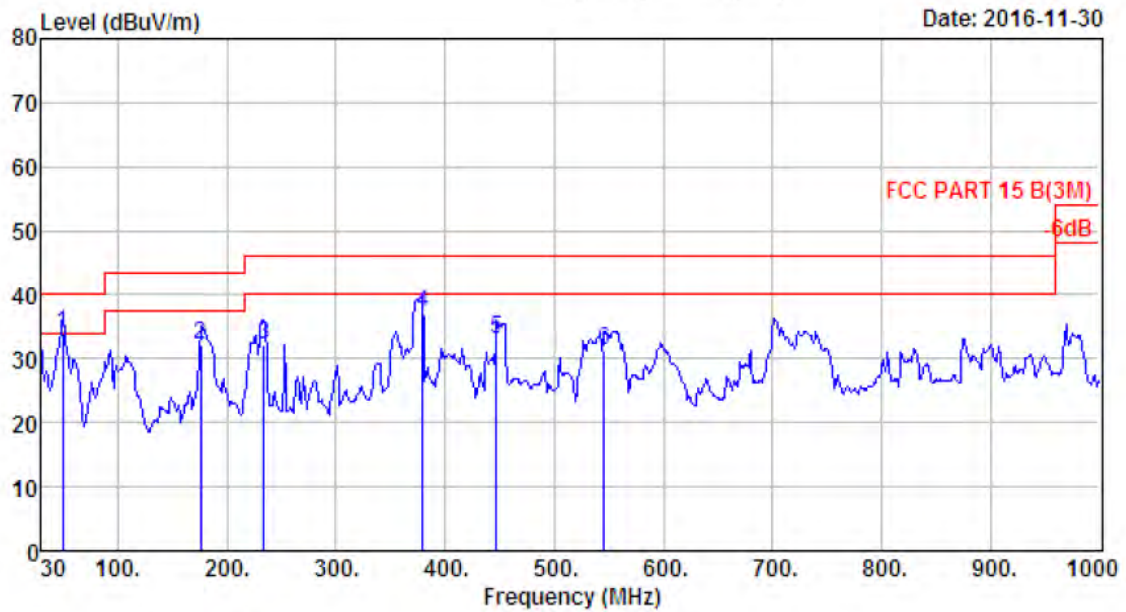


Site no. : 966 1# chamber                      Data no. : 631  
 Dis. / Ant. : 3m 27137                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH1 2412TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	49.40	7.90	0.95	25.13	33.98	40.00	6.02	QP
2	175.50	8.98	1.68	21.39	32.05	43.50	11.45	QP
3	233.70	9.64	2.09	20.32	32.05	46.00	13.95	QP
4	379.20	14.99	2.64	19.46	37.09	46.00	8.91	QP
5	447.10	16.40	2.98	13.56	32.94	46.00	13.06	QP
6	546.04	19.45	3.21	8.70	31.36	46.00	14.64	QP

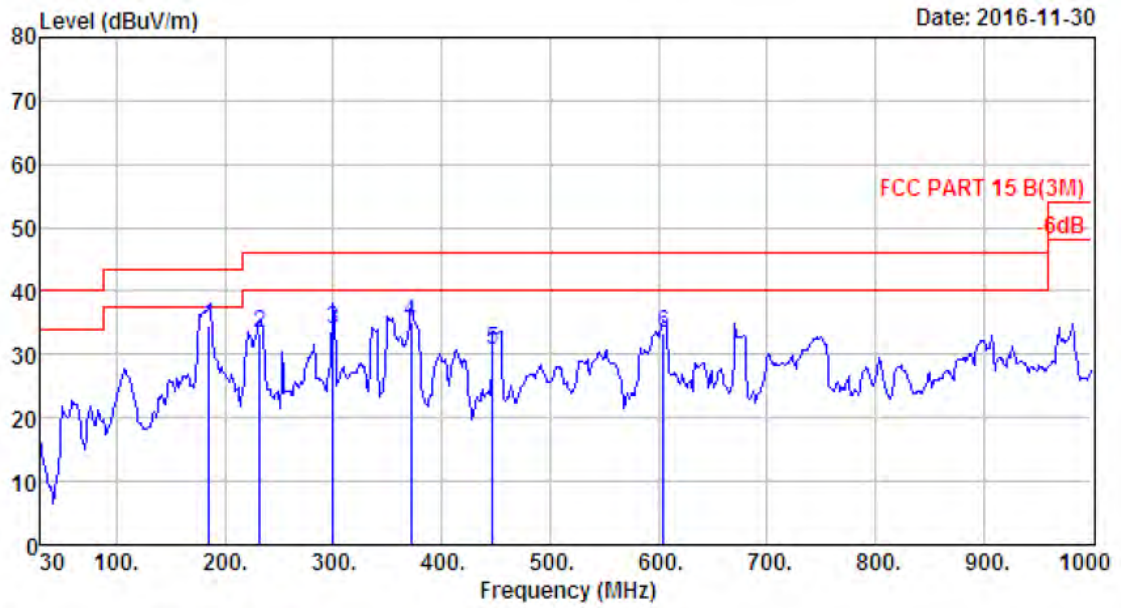


Site no. : 966 1# chamber                      Data no. : 632  
 Dis. / Ant. : 3m 27137                              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH1 2412TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	185.20	8.48	1.75	24.37	34.60	43.50	8.90	QP
2	231.76	9.54	2.07	21.80	33.41	46.00	12.59	QP
3	299.66	13.01	2.38	18.66	34.05	46.00	11.95	QP
4	371.44	14.89	2.67	17.47	35.03	46.00	10.97	QP
5	447.10	16.40	2.98	11.25	30.63	46.00	15.37	QP
6	604.24	19.71	3.41	10.25	33.37	46.00	12.63	QP

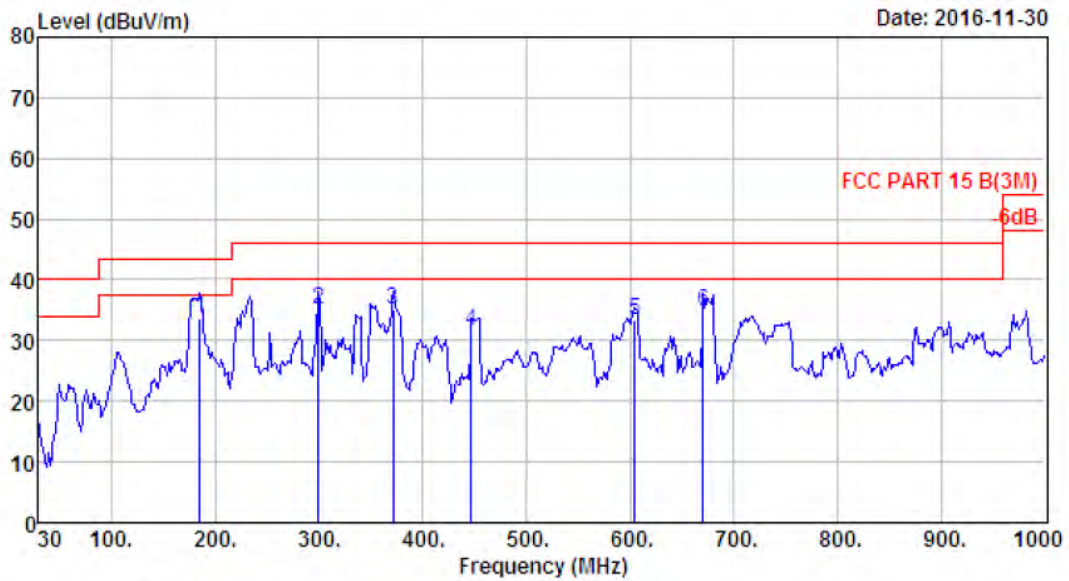


Site no. : 966 1# chamber                      Data no. : 633  
 Dis. / Ant. : 3m 27137                              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH6 2437TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	185.20	8.48	1.75	23.48	33.71	43.50	9.79	QP
2	299.66	13.01	2.38	19.66	35.05	46.00	10.95	QP
3	371.44	14.89	2.67	17.47	35.03	46.00	10.97	QP
4	447.10	16.40	2.98	12.25	31.63	46.00	14.37	QP
5	604.24	19.71	3.41	10.25	33.37	46.00	12.63	QP
6	670.20	20.22	3.66	10.97	34.85	46.00	11.15	QP

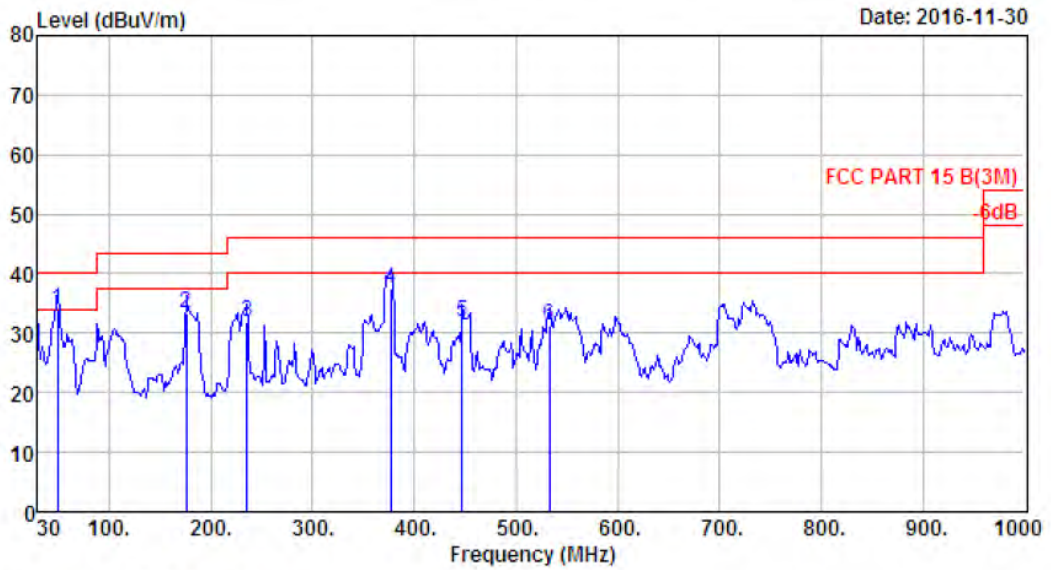


Site no. : 966 1# chamber                      Data no. : 634  
 Dis. / Ant. : 3m 27137                              Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH6 2437TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	49.40	7.90	0.95	25.07	33.92	40.00	6.08	QP
2	175.50	8.98	1.68	22.62	33.28	43.50	10.22	QP
3	235.64	9.80	2.09	19.89	31.78	46.00	14.22	QP
4	377.26	14.96	2.62	19.83	37.41	46.00	8.59	QP
5	447.10	16.40	2.98	12.40	31.78	46.00	14.22	QP
6	532.46	18.57	3.25	9.44	31.26	46.00	14.74	QP

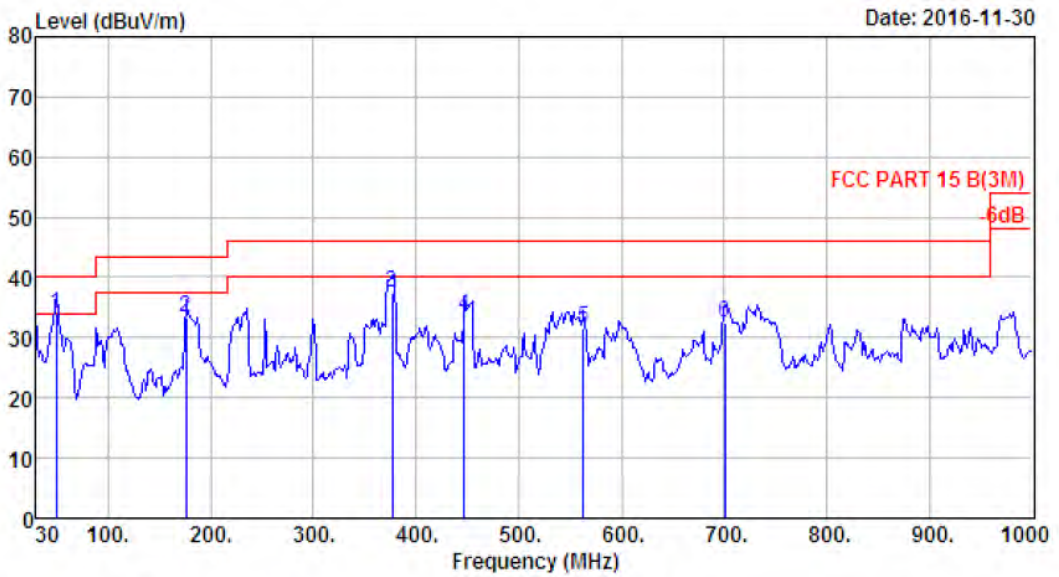

Site no. : 966 1# chamber                      Data no. : 635  
 Dis. / Ant. : 3m 27137                              Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH11 2462TX


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	49.40	7.90	0.95	25.14	33.99	40.00	6.01	QP
2	175.50	8.98	1.68	22.62	33.28	43.50	10.22	QP
3	377.26	14.96	2.62	19.83	37.41	46.00	8.59	QP
4	447.10	16.40	2.98	14.38	33.76	46.00	12.24	QP
5	563.50	19.67	3.28	8.71	31.66	46.00	14.34	QP
6	701.24	20.62	3.74	8.20	32.56	46.00	13.44	QP

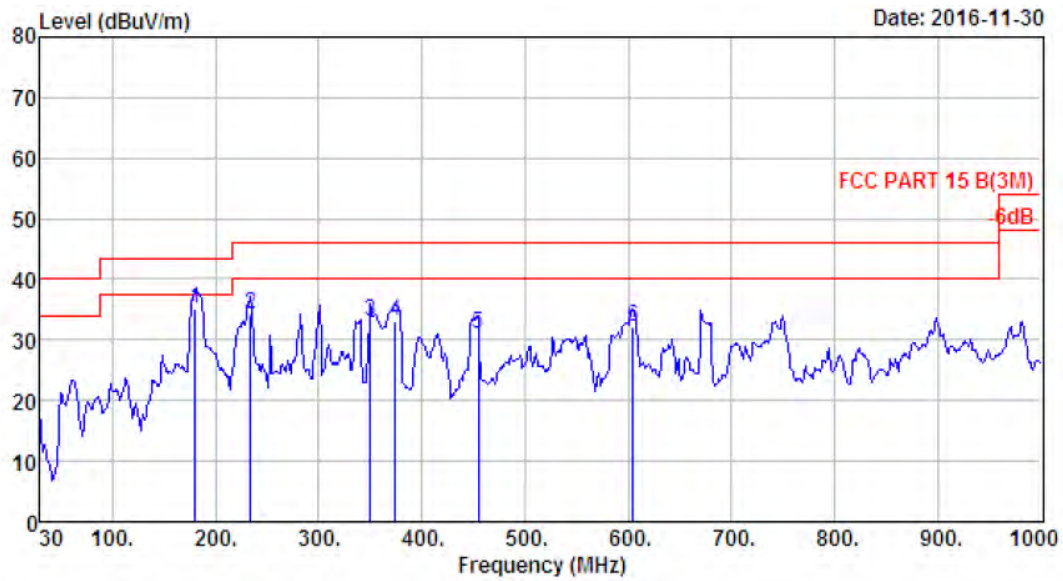

Site no. : 966 1# chamber Data no. : 636  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH11 2462TX


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	180.35	8.95	1.70	24.45	35.10	43.50	8.40	QP
2	233.70	9.64	2.09	22.45	34.18	46.00	11.82	QP
3	350.10	14.47	2.51	16.14	33.12	46.00	12.88	QP
4	374.35	14.93	2.70	15.34	32.97	46.00	13.03	QP
5	454.86	16.65	2.94	11.49	31.08	46.00	14.92	QP
6	604.24	19.71	3.41	9.04	32.16	46.00	13.84	QP



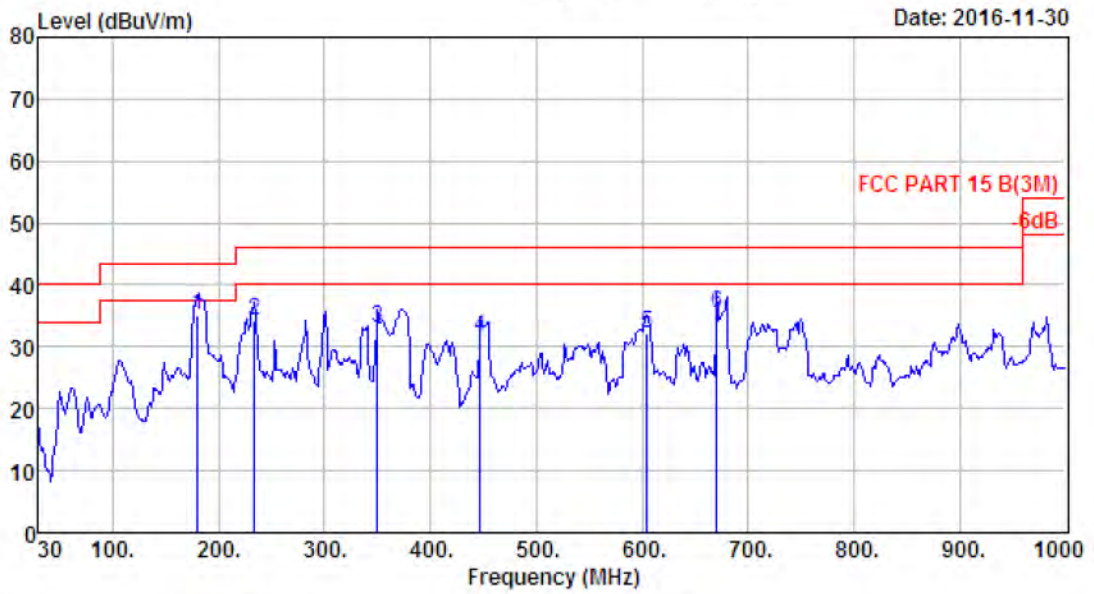


Site no. : 966 1# chamber                      Data no. : 637  
 Dis. / Ant. : 3m 27137                              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH1 2412TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	180.35	8.95	1.70	24.45	35.10	43.50	8.40	QP
2	233.70	9.64	2.09	22.45	34.18	46.00	11.82	QP
3	350.10	14.47	2.51	16.14	33.12	46.00	12.88	QP
4	447.10	16.40	2.98	12.34	31.72	46.00	14.28	QP
5	604.24	19.71	3.41	9.04	32.16	46.00	13.84	QP
6	670.20	20.22	3.66	11.66	35.54	46.00	10.46	QP

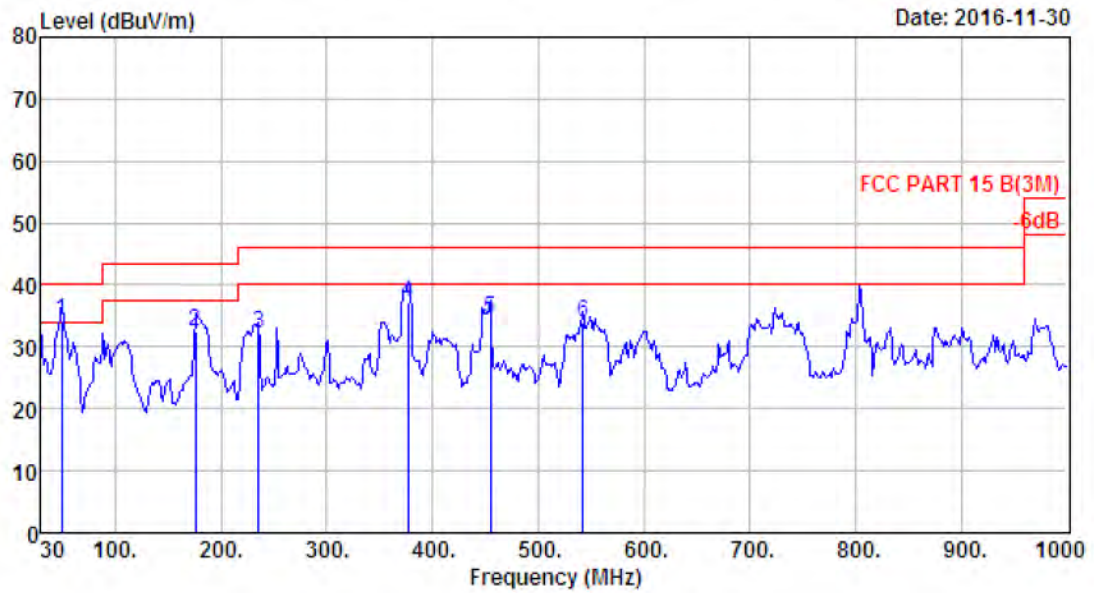


Site no. : site Data no. : 638  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH1 2412TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	49.40	7.90	0.95	25.26	34.11	40.00	5.89	QP
2	175.50	8.98	1.68	21.77	32.43	43.50	11.07	QP
3	235.64	9.80	2.09	20.19	32.08	46.00	13.92	QP
4	377.26	14.96	2.62	19.64	37.22	46.00	8.78	QP
5	454.86	16.65	2.94	14.83	34.42	46.00	11.58	QP
6	542.16	19.46	3.24	11.14	33.84	46.00	12.16	QP

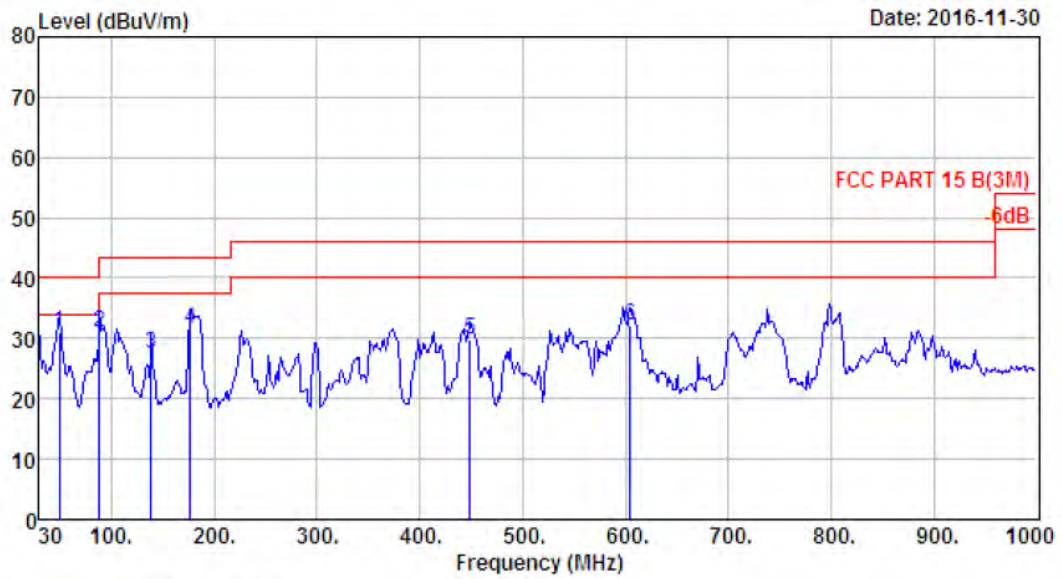


Site no. : 966 1# chamber                      Data no. : 639  
 Dis. / Ant. : 3m 27137                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH6 2437TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	49.40	7.90	0.95	22.02	30.87	40.00	9.13	QP
2	88.20	8.11	1.31	21.68	31.10	43.50	12.40	QP
3	138.64	11.42	1.54	14.60	27.56	43.50	15.94	QP
4	176.47	8.98	1.67	21.04	31.69	43.50	11.81	QP
5	449.04	16.45	2.95	10.36	29.76	46.00	16.24	QP
6	604.24	19.71	3.41	9.00	32.12	46.00	13.88	QP

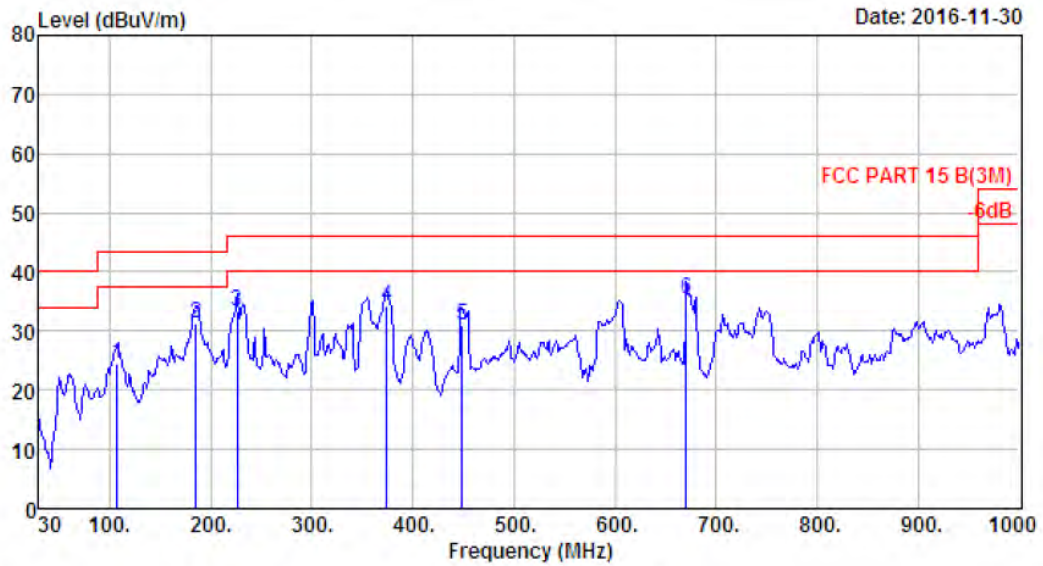


Site no. : 966 1# chamber Data no. : 640  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH6 2437TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	107.60	10.24	1.39	12.82	24.45	43.50	19.05	QP
2	185.20	8.48	1.75	21.16	31.39	43.50	12.11	QP
3	225.94	9.47	1.99	21.93	33.39	46.00	12.61	QP
4	374.35	14.93	2.70	16.56	34.19	46.00	11.81	QP
5	449.04	16.45	2.95	11.63	31.03	46.00	14.97	QP
6	670.20	20.22	3.66	11.64	35.52	46.00	10.48	QP

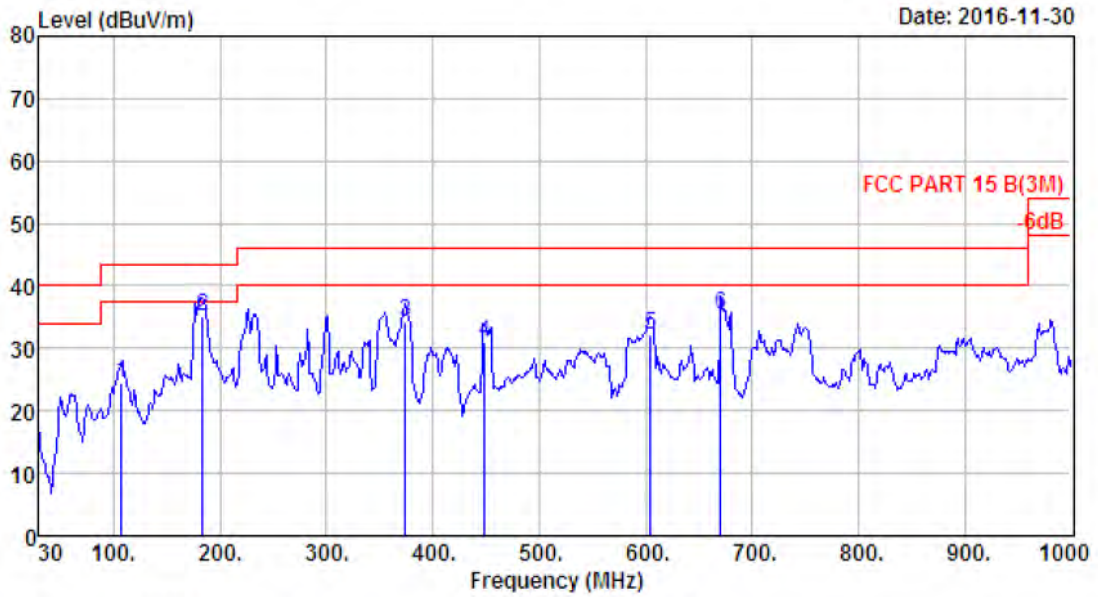


Site no. : 966 1# chamber                      Data no. : 641  
 Dis. / Ant. : 3m 27137                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH11 2462TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	107.60	10.24	1.39	12.82	24.45	43.50	19.05	QP
2	183.26	8.67	1.69	24.76	35.12	43.50	8.38	QP
3	374.35	14.93	2.70	16.56	34.19	46.00	11.81	QP
4	449.04	16.45	2.95	11.63	31.03	46.00	14.97	QP
5	604.24	19.71	3.41	8.91	32.03	46.00	13.97	QP
6	670.20	20.22	3.66	11.64	35.52	46.00	10.48	QP

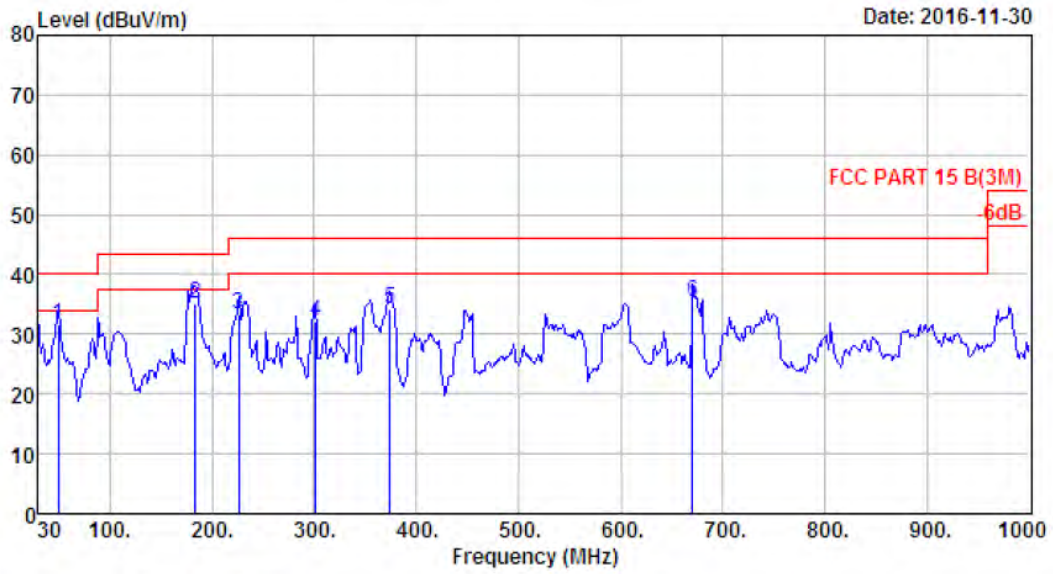


Site no. : 966 1# chamber                      Data no. : 642  
 Dis. / Ant. : 3m 27137                              Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH11 2462TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	49.40	7.90	0.95	22.76	31.61	40.00	8.39	QP
2	183.26	8.67	1.69	24.76	35.12	43.50	8.38	QP
3	225.94	9.47	1.99	21.93	33.39	46.00	12.61	QP
4	301.60	13.04	2.39	16.72	32.15	46.00	13.85	QP
5	374.35	14.93	2.70	16.56	34.19	46.00	11.81	QP
6	670.20	20.22	3.66	11.64	35.52	46.00	10.48	QP

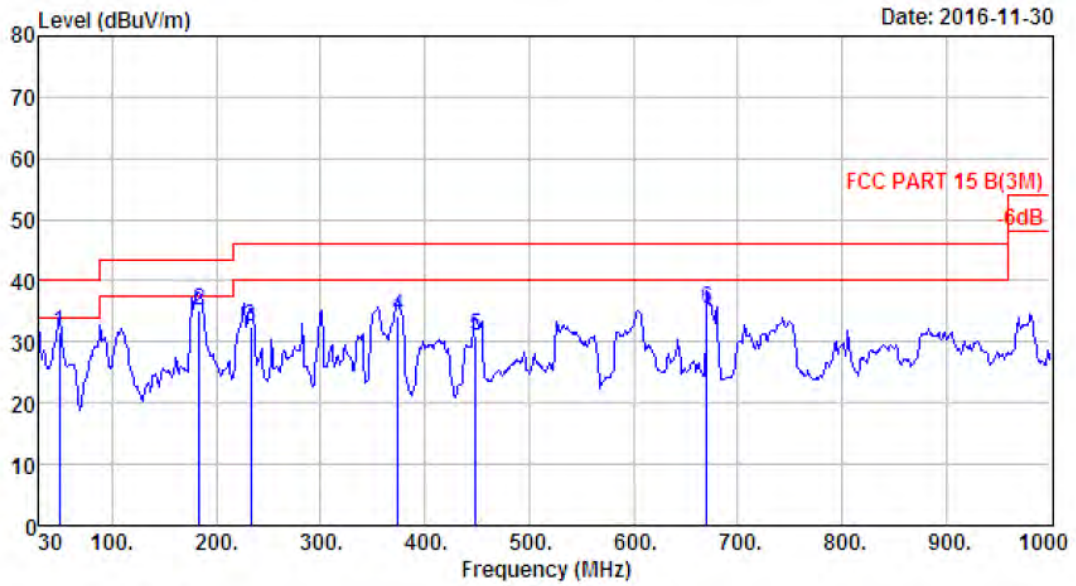

Site no. : site Data no. : 643  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6%;Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUI : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	49.40	7.90	0.95	22.76	31.61	40.00	8.39	QP
2	183.26	8.67	1.69	24.76	35.12	43.50	8.38	QP
3	232.73	9.59	2.08	20.68	32.35	46.00	13.65	QP
4	374.35	14.93	2.70	16.56	34.19	46.00	11.81	QP
5	449.04	16.45	2.95	11.63	31.03	46.00	14.97	QP
6	670.20	20.22	3.66	11.64	35.52	46.00	10.48	QP

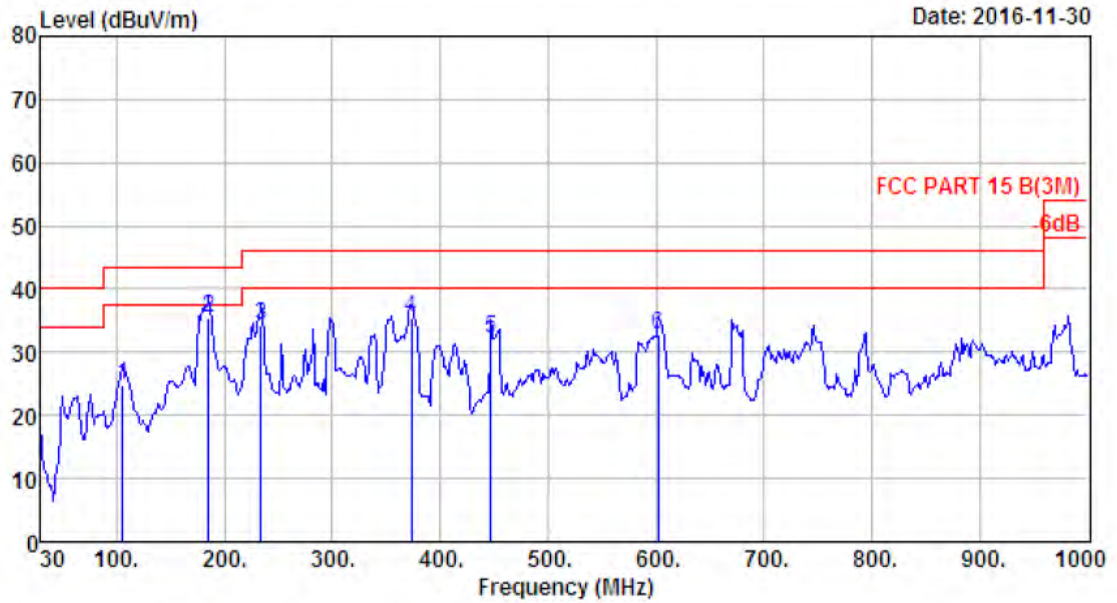

Site no. : 966 1# chamber                      Data no. : 644  
 Dis. / Ant. : 3m 27137                              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	105.66	10.05	1.41	13.36	24.82	43.50	18.68	QP
2	185.20	8.48	1.75	25.30	35.53	43.50	7.97	QP
3	233.70	9.64	2.09	22.66	34.39	46.00	11.61	QP
4	373.38	14.92	2.74	17.75	35.41	46.00	10.59	QP
5	447.10	16.40	2.98	12.73	32.11	46.00	13.89	QP
6	602.30	19.66	3.41	9.74	32.81	46.00	13.19	QP



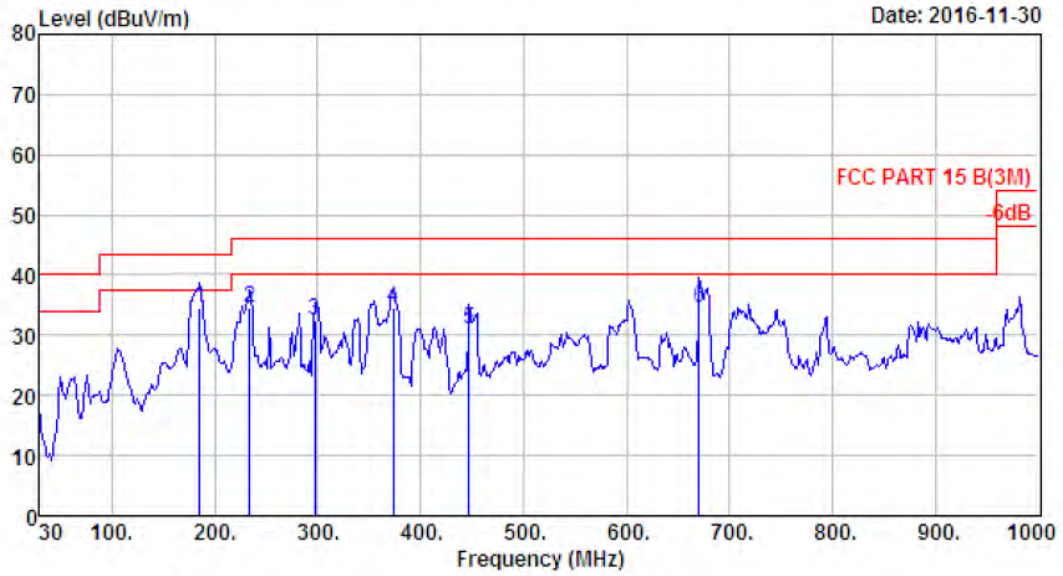


Site no. : 966 1# chamber                      Data no. : 645  
 Dis. / Ant. : 3m 27137                              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUI : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH6 2437TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	185.20	8.48	1.75	24.30	34.53	43.50	8.97	QP
2	233.70	9.64	2.09	22.85	34.58	46.00	11.42	QP
3	296.75	12.99	2.32	17.11	32.42	46.00	13.58	QP
4	373.38	14.92	2.74	16.75	34.41	46.00	11.59	QP
5	447.10	16.40	2.98	11.73	31.11	46.00	14.89	QP
6	670.20	20.22	3.66	10.61	34.49	46.00	11.51	QP

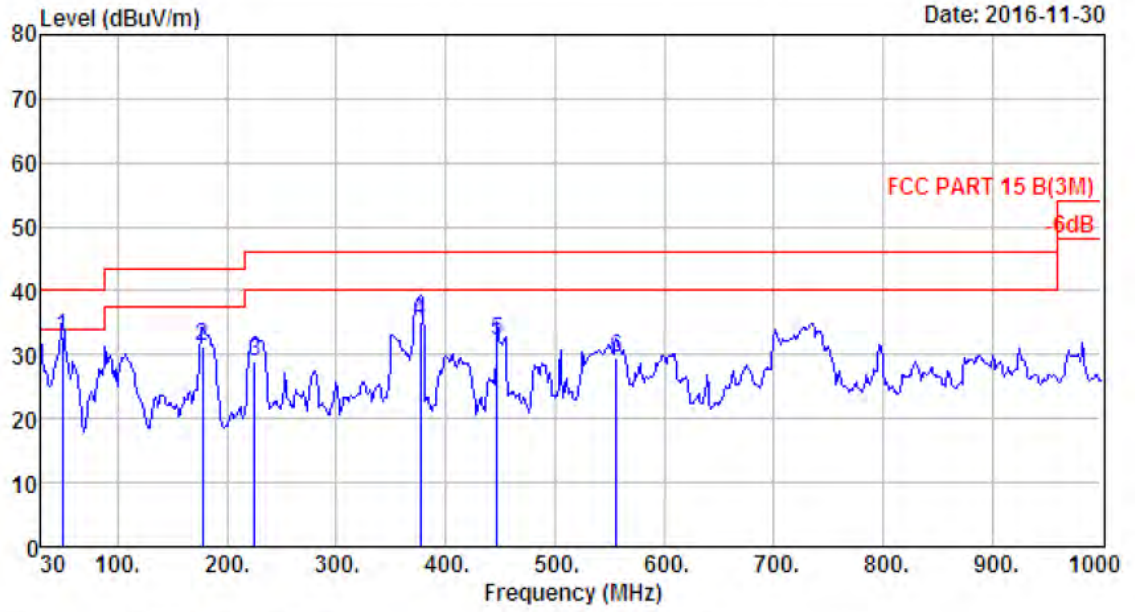


Site no. : 966 1# chamber    Data no. : 646  
 Dis. / Ant. : 3m 27137    Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6°;Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH6 2437TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	49.40	7.90	0.95	23.86	32.71	40.00	7.29	QP
2	177.44	8.97	1.67	20.62	31.26	43.50	12.24	QP
3	224.97	9.48	2.00	17.40	28.88	46.00	17.12	QP
4	377.26	14.96	2.62	17.55	35.13	46.00	10.87	QP
5	447.10	16.40	2.98	12.84	32.22	46.00	13.78	QP
6	555.74	19.61	3.25	6.62	29.48	46.00	16.52	QP

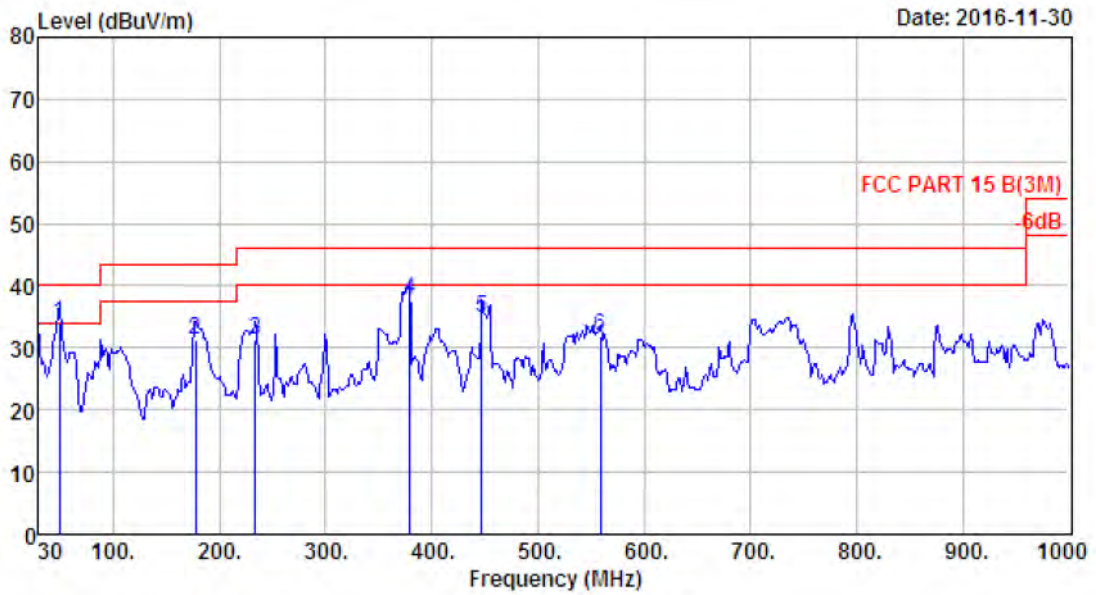


Site no. : 966 1# chamber                      Data no. : 647  
 Dis. / Ant. : 3m 27137                              Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH11 2462TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	49.40	7.90	0.95	25.01	33.86	40.00	6.14	QP
2	177.44	8.97	1.67	20.62	31.26	43.50	12.24	QP
3	233.70	9.64	2.09	19.64	31.37	46.00	14.63	QP
4	379.20	14.99	2.64	20.14	37.77	46.00	8.23	QP
5	447.10	16.40	2.98	15.55	34.93	46.00	11.07	QP
6	558.65	19.68	3.25	8.82	31.75	46.00	14.25	QP

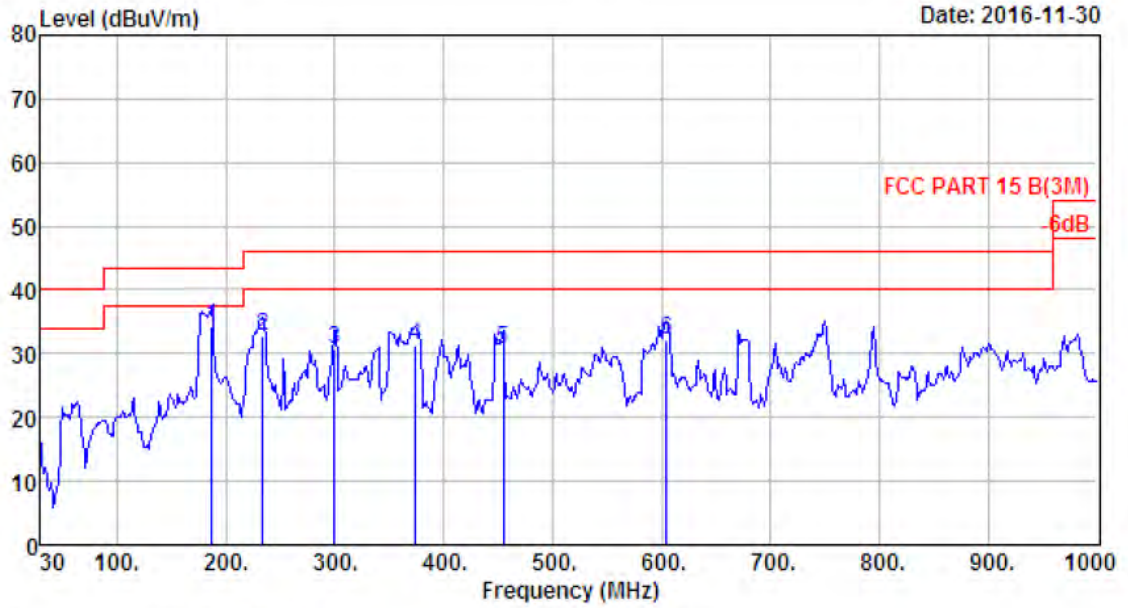


Site no. : 966 1# chamber Data no. : 648  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUI : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH11 2462TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	187.14	8.26	1.84	24.28	34.38	43.50	9.12	QP
2	233.70	9.64	2.09	20.99	32.72	46.00	13.28	QP
3	299.66	13.01	2.38	15.39	30.78	46.00	15.22	QP
4	374.35	14.93	2.70	13.56	31.19	46.00	14.81	QP
5	454.86	16.65	2.94	11.14	30.73	46.00	15.27	QP
6	604.24	19.71	3.41	9.14	32.26	46.00	13.74	QP

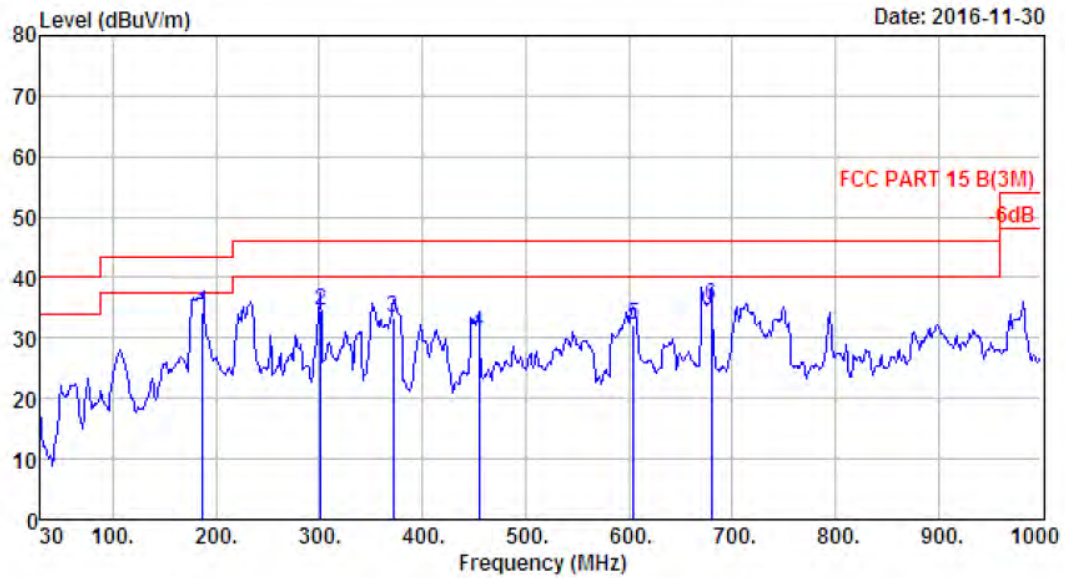


Site no. : 966 1# chamber Data no. : 649  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH3 2422TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	187.14	8.26	1.84	24.28	34.38	43.50	9.12	QP
2	301.60	13.04	2.39	19.14	34.57	46.00	11.43	QP
3	371.44	14.89	2.67	15.77	33.33	46.00	12.67	QP
4	454.86	16.65	2.94	11.44	31.03	46.00	14.97	QP
5	604.24	19.71	3.41	9.14	32.26	46.00	13.74	QP
6	679.90	20.29	3.66	11.46	35.41	46.00	10.59	QP

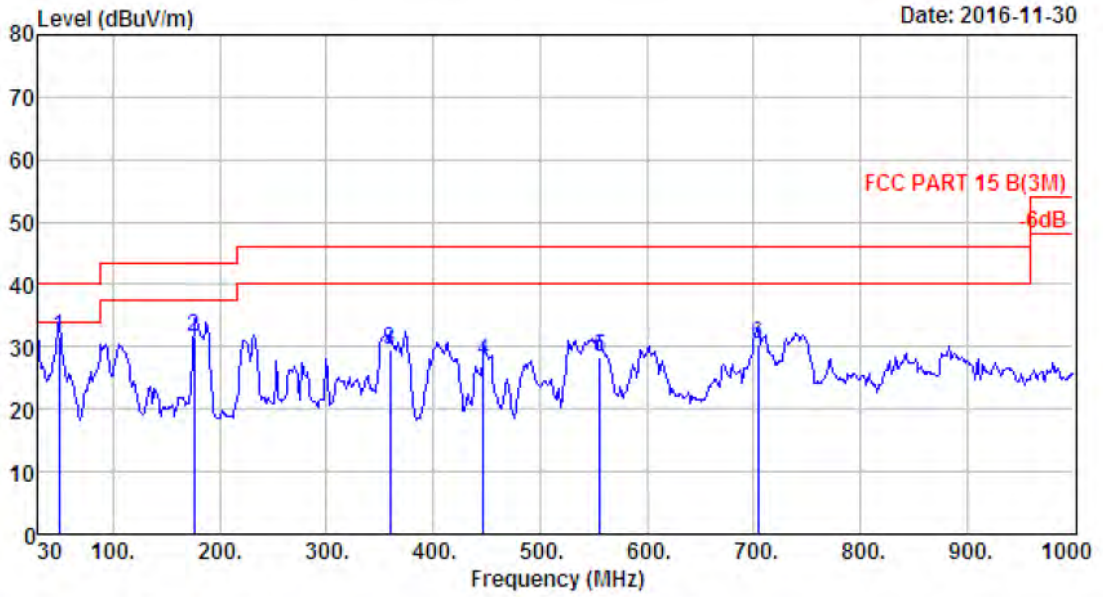


Site no. : 966 1# chamber Data no. : 650  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH3 2422TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	49.40	7.90	0.95	22.60	31.45	40.00	8.55	QP
2	175.50	8.98	1.68	20.95	31.61	43.50	11.89	QP
3	359.80	14.45	2.59	12.36	29.40	46.00	16.60	QP
4	447.10	16.40	2.98	8.27	27.65	46.00	18.35	QP
5	555.74	19.61	3.25	5.63	28.49	46.00	17.51	QP
6	704.15	20.75	3.74	5.84	30.33	46.00	15.67	QP

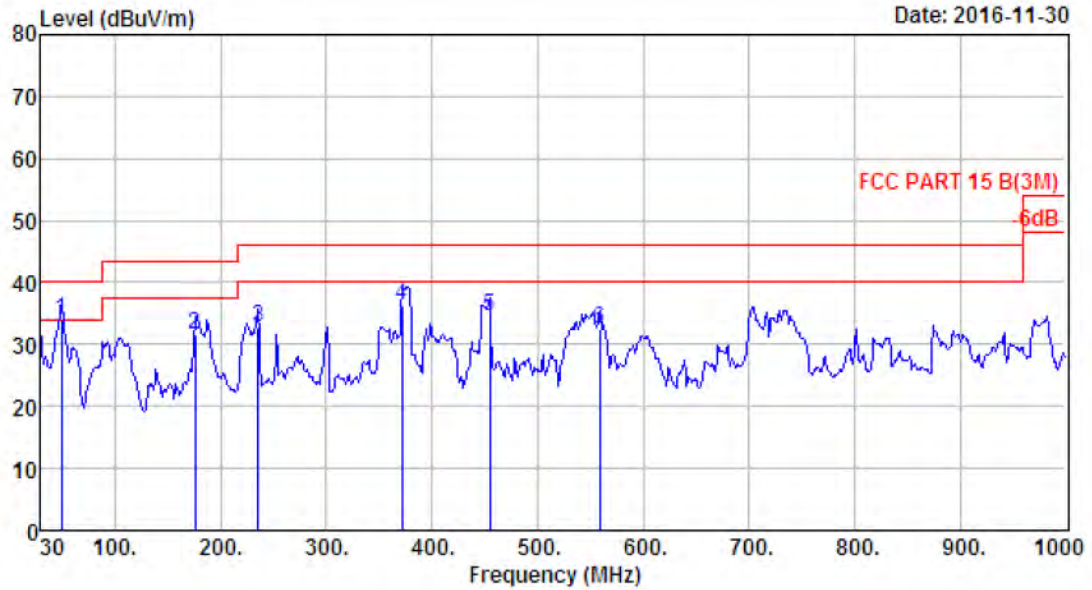

Site no. : 966 1# chamber                      Data no. : 651  
 Dis. / Ant. : 3m 27137                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH6 2437TX


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	49.40	7.90	0.95	25.12	33.97	40.00	6.03	QP
2	175.50	8.98	1.68	20.95	31.61	43.50	11.89	QP
3	235.64	9.80	2.09	20.91	32.80	46.00	13.20	QP
4	371.44	14.89	2.67	18.77	36.33	46.00	9.67	QP
5	454.86	16.65	2.94	14.80	34.39	46.00	11.61	QP
6	558.65	19.68	3.25	9.52	32.45	46.00	13.55	QP

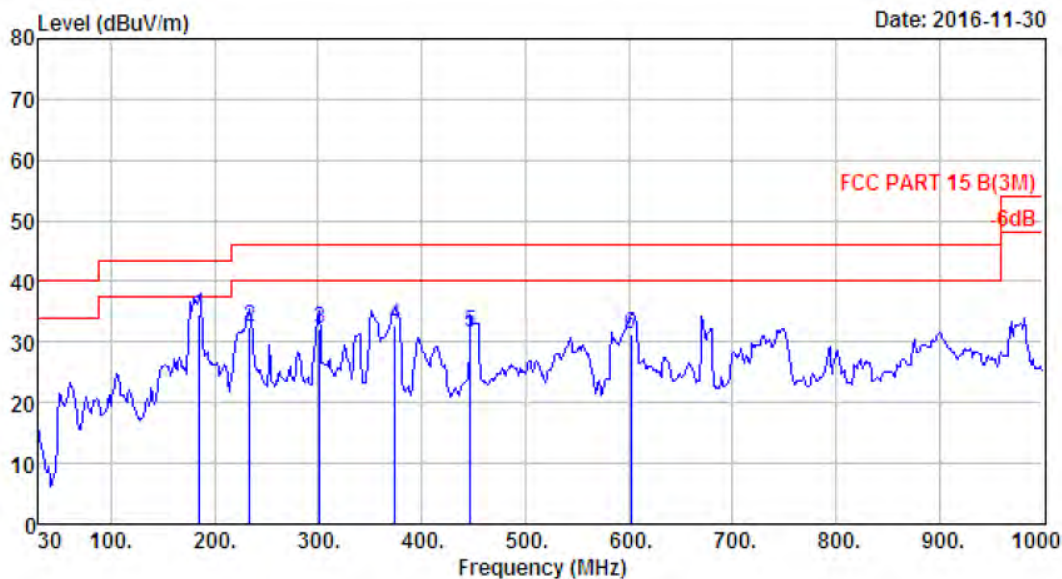

Site no. : 966 1# chamber Data no. : 652  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH6 2437TX


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	185.20	8.48	1.75	24.18	34.41	43.50	9.09	QP
2	233.70	9.64	2.09	20.73	32.46	46.00	13.54	QP
3	301.60	13.04	2.39	16.75	32.18	46.00	13.82	QP
4	374.35	14.93	2.70	15.07	32.70	46.00	13.30	QP
5	447.10	16.40	2.98	12.11	31.49	46.00	14.51	QP
6	602.30	19.66	3.41	8.35	31.42	46.00	14.58	QP



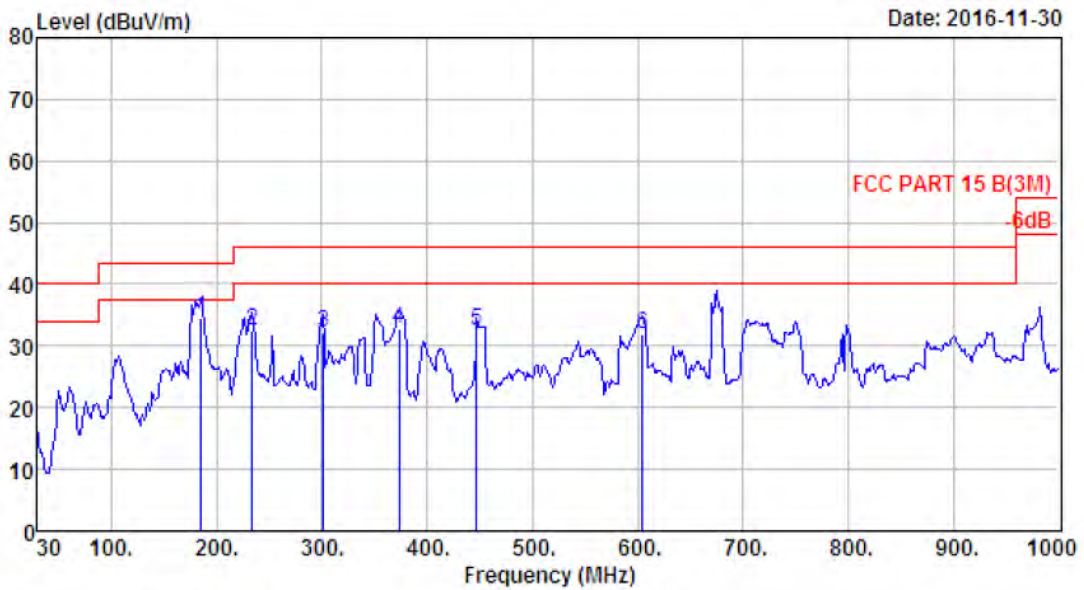

Site no. : 966 1# chamber                      Data no. : 653  
 Dis. / Ant. : 3m 27137                              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6°;Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH9 2452TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	185.20	8.48	1.75	24.18	34.41	43.50	9.09	QP
2	233.70	9.64	2.09	20.73	32.46	46.00	13.54	QP
3	301.60	13.04	2.39	16.75	32.18	46.00	13.82	QP
4	373.38	14.92	2.74	15.08	32.74	46.00	13.26	QP
5	447.10	16.40	2.98	13.11	32.49	46.00	13.51	QP
6	604.24	19.71	3.41	8.70	31.82	46.00	14.18	QP

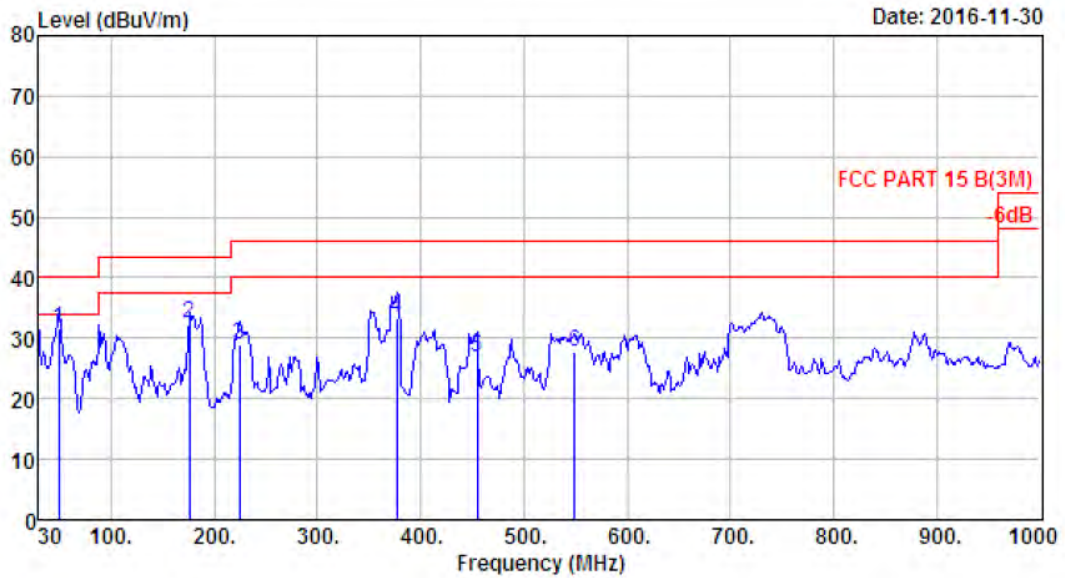

Date: 2016-11-30

Site no. : 966 1# chamber                      Data no. : 654  
 Dis. / Ant. : 3m 27137                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH9 2452TX

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	49.40	7.90	0.95	22.81	31.66	40.00	8.34	QP
2	175.50	8.98	1.68	21.72	32.38	43.50	11.12	QP
3	224.00	9.42	2.01	17.47	28.90	46.00	17.10	QP
4	377.26	14.96	2.62	15.76	33.34	46.00	12.66	QP
5	454.86	16.65	2.94	7.37	26.96	46.00	19.04	QP
6	548.95	19.45	3.26	5.11	27.82	46.00	18.18	QP

Above 1G

Site no. : 966 1# chamber Data no. : 505  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUI : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH1 2412TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	89.79	89.39	74.00	-15.39	Peak
2	4824.00	31.28	11.84	35.66	29.34	36.80	74.00	37.20	Peak
3	7236.00	36.53	11.55	33.99	27.14	41.23	74.00	32.77	Peak
4	8684.00	37.32	11.45	33.66	26.78	41.89	74.00	32.11	Peak
5	11166.00	39.41	11.17	33.31	24.89	42.16	74.00	31.84	Peak
6	14090.00	41.54	10.91	33.13	27.07	46.39	74.00	27.61	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 506  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUI : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH1 2412TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	87.17	86.77	74.00	-12.77	Peak
2	4824.00	31.28	11.84	35.66	38.76	46.22	74.00	27.78	Peak
3	7236.00	36.53	11.55	33.99	28.95	43.04	74.00	30.96	Peak
4	8684.00	37.32	11.45	33.66	28.47	43.58	74.00	30.42	Peak
5	11234.00	39.37	11.12	33.25	26.25	43.49	74.00	30.51	Peak
6	13665.00	40.55	11.30	32.75	25.02	44.12	74.00	29.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 507  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH6 2437TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1816.00	25.02	5.50	35.28	45.52	40.76	74.00	33.24	Peak
2	2437.00	27.60	6.67	34.85	85.83	85.25	74.00	-11.25	Peak
3	2785.00	27.89	8.04	36.69	47.52	46.76	74.00	27.24	Peak
4	4874.00	31.37	12.07	35.76	36.56	44.24	74.00	29.76	Peak
5	7311.00	36.55	11.57	34.12	29.66	43.66	74.00	30.34	Peak
6	8735.00	37.40	11.45	33.76	29.53	44.62	74.00	29.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 508  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH6 2437TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1850.00	25.15	5.63	35.27	45.56	41.07	74.00	32.93	Peak
2	2437.00	27.60	6.67	34.85	85.57	84.99	74.00	-10.99	Peak
3	2955.00	28.12	8.82	37.21	45.16	44.89	74.00	29.11	Peak
4	4874.00	31.37	12.07	35.76	33.16	40.84	74.00	33.16	Peak
5	7311.00	36.55	11.57	34.12	28.69	42.69	74.00	31.31	Peak
6	8684.00	37.32	11.45	33.66	28.44	43.55	74.00	30.45	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 509  
 Dis. / Ant. : 3m ANI 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH11 2462TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1816.00	25.02	5.50	35.28	45.79	41.03	74.00	32.97	Peak
2	2462.00	27.58	6.69	34.98	87.62	86.91	74.00	-12.91	Peak
3	2955.00	28.12	8.82	37.21	45.46	45.19	74.00	28.81	Peak
4	4924.00	31.45	12.29	35.91	37.98	45.81	74.00	28.19	Peak
5	7386.00	36.57	11.59	34.23	27.88	41.81	74.00	32.19	Peak
6	9160.00	37.69	11.54	34.07	25.46	40.62	74.00	33.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 510  
 Dis. / Ant. : 3m ANI 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH11 2462TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1850.00	25.15	5.63	35.27	48.39	43.90	74.00	30.10	Peak
2	2462.00	27.58	6.69	34.98	88.97	88.26	74.00	-14.26	Peak
3	2785.00	27.89	8.04	36.69	48.75	47.99	74.00	26.01	Peak
4	4924.00	31.45	12.29	35.91	35.23	43.06	74.00	30.94	Peak
5	7386.00	36.57	11.59	34.23	30.36	44.29	74.00	29.71	Peak
6	8735.00	37.40	11.45	33.76	28.54	43.63	74.00	30.37	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 511  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH1 2412TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1850.00	25.15	5.63	35.27	46.51	42.02	74.00	31.98	Peak
2	2412.00	27.60	6.64	34.64	83.13	82.73	74.00	-8.73	Peak
3	2955.00	28.12	8.82	37.21	45.76	45.49	74.00	28.51	Peak
4	4824.00	31.28	11.84	35.66	35.06	42.52	74.00	31.48	Peak
5	7236.00	36.53	11.55	33.99	28.27	42.36	74.00	31.64	Peak
6	8736.00	37.40	11.45	33.76	29.28	44.37	74.00	29.63	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 512  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH1 2412TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1850.00	25.15	5.63	35.27	41.16	36.67	74.00	37.33	Peak
2	2412.00	27.60	6.64	34.64	82.92	82.52	74.00	-8.52	Peak
3	2836.00	27.93	8.28	37.01	48.38	47.58	74.00	26.42	Peak
4	4824.00	31.28	11.84	35.66	38.56	46.02	74.00	27.98	Peak
5	7236.00	36.53	11.55	33.99	26.86	40.95	74.00	33.05	Peak
6	14124.00	41.57	10.91	33.22	25.04	44.30	74.00	29.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 513  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH6 2437TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1816.00	25.02	5.50	35.28	44.44	39.68	74.00	34.32	Peak
2	2437.00	27.60	6.67	34.85	86.29	85.71	74.00	-11.71	Peak
3	2955.00	28.12	8.82	37.21	46.99	46.72	74.00	27.28	Peak
4	4874.00	31.37	12.07	35.76	38.03	45.71	74.00	28.29	Peak
5	7311.00	36.55	11.57	34.12	27.69	41.69	74.00	32.31	Peak
6	8735.00	37.40	11.45	33.76	27.71	42.80	74.00	31.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 514  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH6 2437TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1425.00	25.09	4.20	35.06	45.15	39.38	74.00	34.62	Peak
2	1816.00	25.02	5.50	35.28	46.25	41.49	74.00	32.51	Peak
3	2437.00	27.60	6.67	34.85	86.50	85.92	74.00	-11.92	Peak
4	2802.00	27.89	8.12	36.80	47.68	46.89	74.00	27.11	Peak
5	4874.00	31.37	12.07	35.76	38.43	46.11	74.00	27.89	Peak
6	7311.00	36.55	11.57	34.12	29.82	43.82	74.00	30.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber                      Data no. : 515  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH11 2462TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1374.00	25.09	4.11	34.98	44.50	38.72	74.00	35.28	Peak
2	1952.00	25.61	6.00	35.13	49.24	45.72	74.00	28.28	Peak
3	2462.00	27.58	6.69	34.98	85.65	84.94	74.00	-10.94	Peak
4	2955.00	28.12	8.82	37.21	42.21	41.94	74.00	32.06	Peak
5	4924.00	31.45	12.29	35.91	38.36	46.19	74.00	27.81	Peak
6	7386.00	36.57	11.59	34.23	29.58	43.51	74.00	30.49	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber                      Data no. : 516  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH11 2462TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1816.00	25.02	5.50	35.28	41.06	36.30	74.00	37.70	Peak
2	2462.00	27.58	6.69	34.98	84.98	84.27	74.00	-10.27	Peak
3	2955.00	28.12	8.82	37.21	45.07	44.80	74.00	29.20	Peak
4	4924.00	31.45	12.29	35.91	33.57	41.40	74.00	32.60	Peak
5	7386.00	36.57	11.59	34.23	30.30	44.23	74.00	29.77	Peak
6	8684.00	37.32	11.45	33.66	30.76	45.87	74.00	28.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



Site no. : 966 1# chamber Data no. : 517  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1374.00	25.09	4.11	34.98	45.16	39.38	74.00	34.62	Peak
2	2412.00	27.60	6.64	34.64	87.90	87.50	74.00	-13.50	Peak
3	2955.00	28.12	8.82	37.21	41.58	41.31	74.00	32.69	Peak
4	4824.00	31.28	11.84	35.66	37.12	44.58	74.00	29.42	Peak
5	7236.00	36.53	11.55	33.99	28.14	42.23	74.00	31.77	Peak
6	8735.00	37.40	11.45	33.76	27.90	42.99	74.00	31.01	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 518  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1816.00	25.02	5.50	35.28	43.94	39.18	74.00	34.82	Peak
2	2412.00	27.60	6.64	34.64	85.16	84.76	74.00	-10.76	Peak
3	2955.00	28.12	8.82	37.21	44.86	44.59	74.00	29.41	Peak
4	4824.00	31.28	11.84	35.66	40.21	47.67	74.00	26.33	Peak
5	7236.00	36.53	11.55	33.99	27.68	41.77	74.00	32.23	Peak
6	8684.00	37.32	11.45	33.66	27.17	42.28	74.00	31.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 519  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH6 2437TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1816.00	25.02	5.50	35.28	47.30	42.54	74.00	31.46	Peak
2	2437.00	27.60	6.67	34.85	85.13	84.55	74.00	-10.55	Peak
3	2836.00	27.93	8.28	37.01	43.92	43.12	74.00	30.88	Peak
4	4874.00	31.37	12.07	35.76	39.44	47.12	74.00	26.88	Peak
5	7311.00	36.55	11.57	34.12	29.22	43.22	74.00	30.78	Peak
6	13665.00	40.55	11.30	32.75	28.44	47.54	74.00	26.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 520  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH6 2437TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1816.00	25.02	5.50	35.28	47.18	42.42	74.00	31.58	Peak
2	2437.00	27.60	6.67	34.85	85.66	85.08	74.00	-11.08	Peak
3	2955.00	28.12	8.82	37.21	47.46	47.19	74.00	26.81	Peak
4	4874.00	31.37	12.07	35.76	40.40	48.08	74.00	25.92	Peak
5	5930.00	32.63	12.10	35.68	36.86	45.91	74.00	28.09	Peak
6	7311.00	36.55	11.57	34.12	27.30	41.30	74.00	32.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 521  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH11 2462TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1595.00	24.86	4.69	35.12	50.33	44.76	74.00	29.24	Peak
2	2462.00	27.58	6.69	34.98	88.76	88.05	74.00	-14.05	Peak
3	2734.00	27.88	7.81	36.43	46.98	46.24	74.00	27.76	Peak
4	4570.00	30.74	10.72	35.61	39.86	45.71	74.00	28.29	Peak
5	4924.00	31.45	12.29	35.91	38.07	45.90	74.00	28.10	Peak
6	7386.00	36.57	11.59	34.23	30.01	43.94	74.00	30.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 522  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH11 2462TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1884.00	25.28	5.75	35.23	51.48	47.28	74.00	26.72	Peak
2	2462.00	27.58	6.69	34.98	87.05	86.34	74.00	-12.34	Peak
3	2955.00	28.12	8.82	37.21	45.84	45.57	74.00	28.43	Peak
4	4655.00	30.94	11.09	35.57	39.72	46.18	74.00	27.82	Peak
5	4924.00	31.45	12.29	35.91	37.52	45.35	74.00	28.65	Peak
6	7386.00	36.57	11.59	34.23	26.85	40.78	74.00	33.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 523  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH3 2422TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1595.00	24.86	4.69	35.12	54.26	48.69	74.00	25.31	Peak
2	2422.00	27.60	6.66	34.74	87.55	87.07	74.00	-13.07	Peak
3	4844.00	31.31	11.92	35.68	37.52	45.07	74.00	28.93	Peak
4	7266.00	36.54	11.56	34.05	25.01	39.06	74.00	34.94	Peak
5	8565.00	37.10	11.45	33.92	23.85	38.48	74.00	35.52	Peak
6	13240.00	39.46	11.46	32.88	25.71	43.75	74.00	30.25	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 524  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH3 2422TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1884.00	25.28	5.75	35.23	52.19	47.99	74.00	26.01	Peak
2	2422.00	27.60	6.66	34.74	88.88	88.40	74.00	-14.40	Peak
3	2955.00	28.12	8.82	37.21	45.90	45.63	74.00	28.37	Peak
4	4655.00	30.94	11.09	35.57	40.84	47.30	74.00	26.70	Peak
5	4844.00	31.31	11.92	35.68	36.42	43.97	74.00	30.03	Peak
6	7266.00	36.54	11.56	34.05	28.71	42.76	74.00	31.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 525  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH6 2437TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1595.00	24.86	4.69	35.12	56.05	50.48	74.00	23.52	Peak
2	2437.00	27.60	6.67	34.85	89.08	88.50	74.00	-14.50	Peak
3	2836.00	27.93	8.28	37.01	46.40	45.60	74.00	28.40	Peak
4	4536.00	30.67	10.57	35.63	43.17	48.78	74.00	25.22	Peak
5	4874.00	31.37	12.07	35.76	39.49	47.17	74.00	26.83	Peak
6	7311.00	36.55	11.57	34.12	30.30	44.30	74.00	29.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 526  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH6 2437TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1884.00	25.28	5.75	35.23	52.98	48.78	74.00	25.22	Peak
2	2437.00	27.60	6.67	34.85	88.25	87.67	74.00	-13.67	Peak
3	2955.00	28.12	8.82	37.21	45.98	45.71	74.00	28.29	Peak
4	4655.00	30.94	11.09	35.57	40.70	47.16	74.00	26.84	Peak
5	4874.00	31.37	12.07	35.76	37.45	45.13	74.00	28.87	Peak
6	7311.00	36.55	11.57	34.12	29.45	43.45	74.00	30.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 527  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH9 2452TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1884.00	25.28	5.75	35.23	53.07	48.87	74.00	25.13	Peak
2	2452.00	27.59	6.67	34.85	89.11	88.52	74.00	-14.52	Peak
3	2955.00	28.12	8.82	37.21	50.39	50.12	74.00	23.88	Peak
4	4706.00	31.09	11.32	35.57	40.36	47.20	74.00	26.80	Peak
5	4904.00	31.42	12.22	35.87	37.59	45.36	74.00	28.64	Peak
6	7356.00	36.56	11.58	34.19	28.09	42.04	74.00	31.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 528  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH9 2452TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1595.00	24.86	4.69	35.12	54.72	49.15	74.00	24.85	Peak
2	2452.00	27.59	6.67	34.85	90.26	89.67	74.00	-15.67	Peak
3	4570.00	30.74	10.72	35.61	40.91	46.76	74.00	27.24	Peak
4	4904.00	31.42	12.22	35.87	36.41	44.18	74.00	29.82	Peak
5	5930.00	32.63	12.10	35.68	36.43	45.48	74.00	28.52	Peak
6	7356.00	36.56	11.58	34.19	29.32	43.27	74.00	30.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 5 BAND EDGE COMPLIANCE TEST

### 5.1 Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits

### 5.2 Test Procedure

1. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) Peak : RBW = 1MHz, VBW = 1MHz, Detector=PEAK detector, Sweep time = auto
  - (b) AV : RBW = 1MHz, VBW = 10Hz, Detector=PEAK detector, Sweep time = auto

### 5.3 Test Result

Pass (The testing data was attached in the next pages.)

- Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
- 2、 The frequency 2412MHz. 2422MHz . 2452MHz and 2462 MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

### 5.4 Test Data

Site no. : 966 1# chamber                      Data no. : 541  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH1 2412TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2357.20	27.67	6.58	34.57	35.06	34.74	74.00	39.26	Peak
2	2390.00	27.64	6.62	34.62	37.12	36.76	74.00	37.24	Peak
3	2400.00	27.61	6.62	34.64	48.92	48.51	54.00	5.49	Average
4	2400.00	27.61	6.62	34.64	55.92	55.51	74.00	18.49	Peak
5	2410.50	27.60	6.64	34.64	88.90	88.50	74.00	-14.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber                      Data no. : 542  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH1 2412TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2381.64	27.64	6.60	34.62	36.54	36.16	74.00	37.84	Peak
2	2390.00	27.64	6.62	34.62	39.70	39.34	74.00	34.66	Peak
3	2400.00	27.61	6.62	34.64	49.93	49.52	54.00	4.48	Average
4	2400.00	27.61	6.62	34.64	57.93	57.52	74.00	16.48	Peak
5	2410.50	27.60	6.64	34.64	90.48	90.08	74.00	-16.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



Site no. : 966 1# chamber Data no. : 543  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH11 2462TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.50	27.58	6.69	34.98	89.15	88.44	74.00	-14.44	Peak
2	2483.50	27.58	6.71	35.11	36.56	35.74	74.00	38.26	Peak
3	2484.00	27.58	6.71	35.11	42.65	41.83	74.00	32.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 544  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11b CH11 2462TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.10	27.58	6.69	34.98	88.46	87.75	74.00	-13.75	Peak
2	2483.50	27.58	6.71	35.11	40.13	39.31	74.00	34.69	Peak
3	2484.00	27.58	6.71	35.11	46.33	45.51	74.00	28.49	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 545  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH1 2412TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2367.86	27.67	6.58	34.59	41.42	41.08	74.00	32.92	Peak
2	2390.00	27.64	6.62	34.62	45.70	45.34	74.00	28.66	Peak
3	2400.00	27.61	6.62	34.64	49.14	48.73	54.00	5.27	Average
4	2400.00	27.61	6.62	34.64	58.14	57.73	74.00	16.27	Peak
5	2416.35	27.60	6.64	34.64	84.16	83.76	74.00	-9.76	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 546  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH1 2412TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2379.56	27.64	6.60	34.59	35.21	34.86	74.00	39.14	Peak
2	2390.00	27.64	6.62	34.62	42.03	41.67	74.00	32.33	Peak
3	2400.00	27.61	6.62	34.64	46.41	46.00	54.00	8.00	Average
4	2400.00	27.61	6.62	34.64	53.41	53.00	74.00	21.00	Peak
5	2411.80	27.60	6.64	34.64	81.45	81.05	74.00	-7.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 547  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH11 2462TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2469.75	27.58	6.69	34.98	85.34	84.63	74.00	-10.63	Peak
2	2483.50	27.58	6.71	35.11	47.26	46.44	74.00	27.56	Peak
3	2485.40	27.58	6.71	35.11	46.97	46.15	74.00	27.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 548  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11g CH11 2462TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2466.40	27.58	6.69	34.98	89.78	89.07	74.00	-15.07	Peak
2	2483.50	27.58	6.71	35.11	46.08	45.26	74.00	28.74	Peak
3	2484.50	27.58	6.71	35.11	45.53	44.71	74.00	29.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 549  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2373.45	27.67	6.60	34.59	38.13	37.81	74.00	36.19	Peak
2	2390.00	27.64	6.62	34.62	43.51	43.15	74.00	30.85	Peak
3	2400.00	27.61	6.62	34.64	46.79	46.38	54.00	7.62	Average
4	2400.00	27.61	6.62	34.64	55.79	55.38	74.00	18.62	Peak
5	2416.35	27.60	6.64	34.64	86.56	86.16	74.00	-12.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 550  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2384.24	27.64	6.60	34.62	40.00	39.62	74.00	34.38	Peak
2	2390.00	27.64	6.62	34.62	42.31	41.95	74.00	32.05	Peak
3	2400.00	27.61	6.62	34.64	46.59	46.18	74.00	27.82	Peak
4	2416.35	27.60	6.64	34.64	82.04	81.64	74.00	-7.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 551  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH11 2462TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2456.40	27.59	6.69	34.98	89.53	88.83	74.00	-14.83	Peak
2	2483.50	27.58	6.71	35.11	44.35	43.53	74.00	30.47	Peak
3	2493.00	27.58	6.73	35.24	49.91	48.98	74.00	25.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 552  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT20 CH11 2462TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2455.60	27.59	6.69	34.98	94.17	93.47	74.00	-19.47	Peak
2	2483.50	27.58	6.71	35.11	49.42	48.60	74.00	25.40	Peak
3	2485.40	27.58	6.71	35.11	50.75	49.93	74.00	24.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 553  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH3 2422TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2383.85	27.64	6.60	34.62	47.72	47.34	74.00	26.66	Peak
2	2390.00	27.64	6.62	34.62	48.56	48.20	74.00	25.80	Peak
3	2400.00	27.61	6.62	34.64	49.33	48.92	54.00	5.08	Average
4	2400.00	27.61	6.62	34.64	57.33	56.92	74.00	17.08	Peak
5	2416.35	27.60	6.64	34.64	89.46	89.06	74.00	-15.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 554  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH3 2422TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2386.97	27.64	6.62	34.62	49.42	49.06	74.00	24.94	Peak
2	2390.00	27.64	6.62	34.62	47.35	46.99	74.00	27.01	Peak
3	2400.00	27.61	6.62	34.64	48.55	48.14	54.00	5.86	Average
4	2400.00	27.61	6.62	34.64	55.55	55.14	74.00	18.86	Peak
5	2426.36	27.60	6.66	34.74	90.05	89.57	74.00	-15.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 555  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH9 2452TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2456.40	27.59	6.69	34.98	91.32	90.62	74.00	-16.62	Peak
2	2483.50	27.58	6.71	35.11	47.93	47.11	54.00	6.89	Average
3	2483.50	27.58	6.71	35.11	50.93	50.11	74.00	23.89	Peak
4	2484.90	27.58	6.71	35.11	48.92	48.10	54.00	5.90	Average
5	2484.90	27.58	6.71	35.11	53.92	53.10	74.00	20.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 966 1# chamber Data no. : 556  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : SE60FYP1T  
 Test Mode : IEEE 802.11n HT40 CH9 2452TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2466.40	27.58	6.69	34.98	91.04	90.33	74.00	-16.33	Peak
2	2483.50	27.58	6.71	35.11	48.95	48.13	74.00	25.87	Peak
3	2486.00	27.58	6.71	35.11	52.53	51.71	74.00	22.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 6 6dB & 20dB Bandwidth Test

### 6.1 Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

### 6.2 Test Procedure

- 1, Connected the EUT's antenna port to spectrum analyzer device.
- 2, Follow the test procedure as described in KDB 558074
  - (1). Set resolution bandwidth (RBW) = 100 kHz.
  - (2). Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
  - (3). Detector = Peak.
  - (4). Trace mode = max hold.
  - (5). Sweep = auto couple.
  - (6). Allow the trace to stabilize.
  - (7). Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.3 Test Result


EUT: LED TV			
M/N: SE60FYP1T			
Test date: 2016-11-30		Tested by: Tony.Tang	Test site: RF Site
Test Mode	CH	6dB bandwidth ( MHz )	Limit (KHz)
IEEE 802.11 b	CH1	10.152	>500
	CH6	10.139	>500
	CH11	10.132	>500
IEEE 802.11 g	CH1	16.608	>500
	CH6	16.584	>500
	CH11	16.542	>500
IEEE 802.11 n HT 20	CH1	16.608	>500
	CH6	16.573	>500
	CH11	16.577	>500
IEEE 802.11 n HT 40	CH3	36.607	>500
	CH6	36.627	>500
	CH9	36.589	>500
Conclusion : PASS			




EUT: LED TV			
M/N: SE60FYP1T			
Test date: 2016-11-30		Tested by: Tony.Tang	Test site: RF Site
Test Mode	CH	20dB bandwidth ( MHz )	Limit (KHz)
IEEE 802.11 b	CH1	17.386	/
	CH6	17.668	/
	CH11	17.433	/
IEEE 802.11 g	CH1	18.961	/
	CH6	19.097	/
	CH11	19.423	/
IEEE 802.11 n HT 20	CH1	19.241	/
	CH6	19.154	/
	CH11	19.052	/
IEEE 802.11 n HT 40	CH3	42.323	/
	CH6	42.221	/
	CH9	42.707	/
Conclusion : PASS			

### 6.4 6dB Test Data

Test Mode: IEEE 802.11b 2412MHz

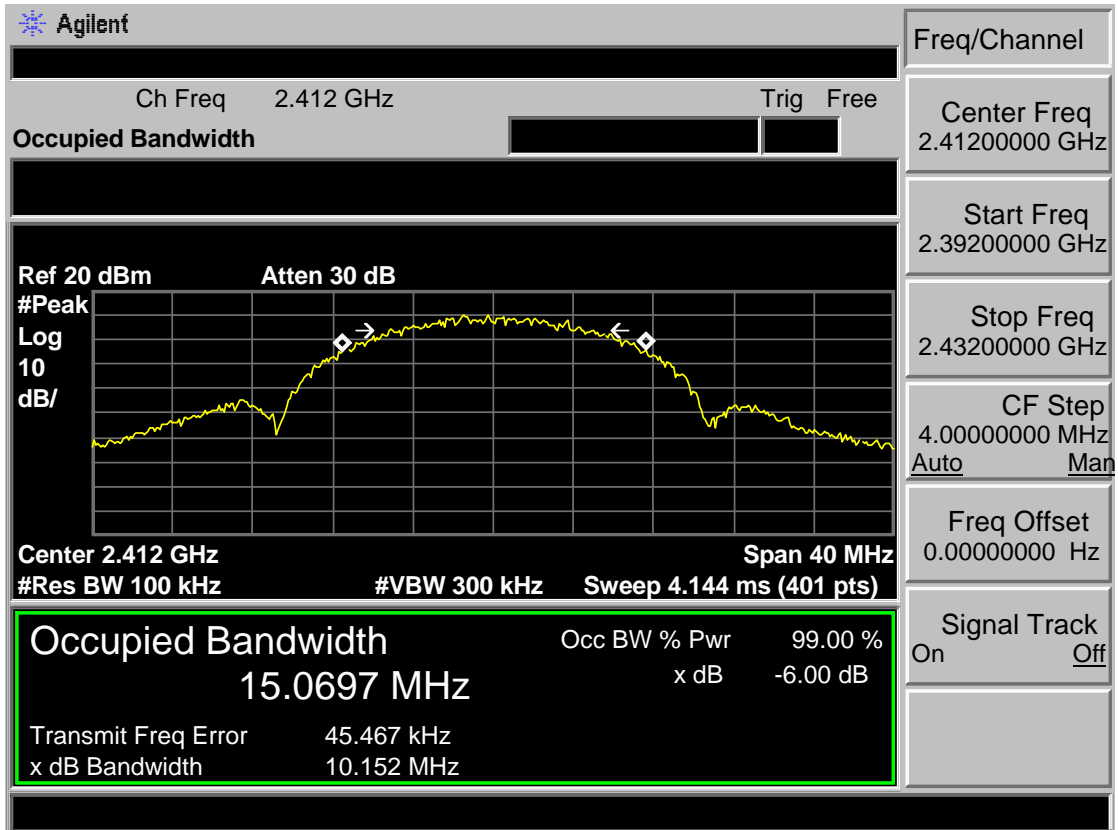

Test Mode: IEEE 802.11b 2437MHz

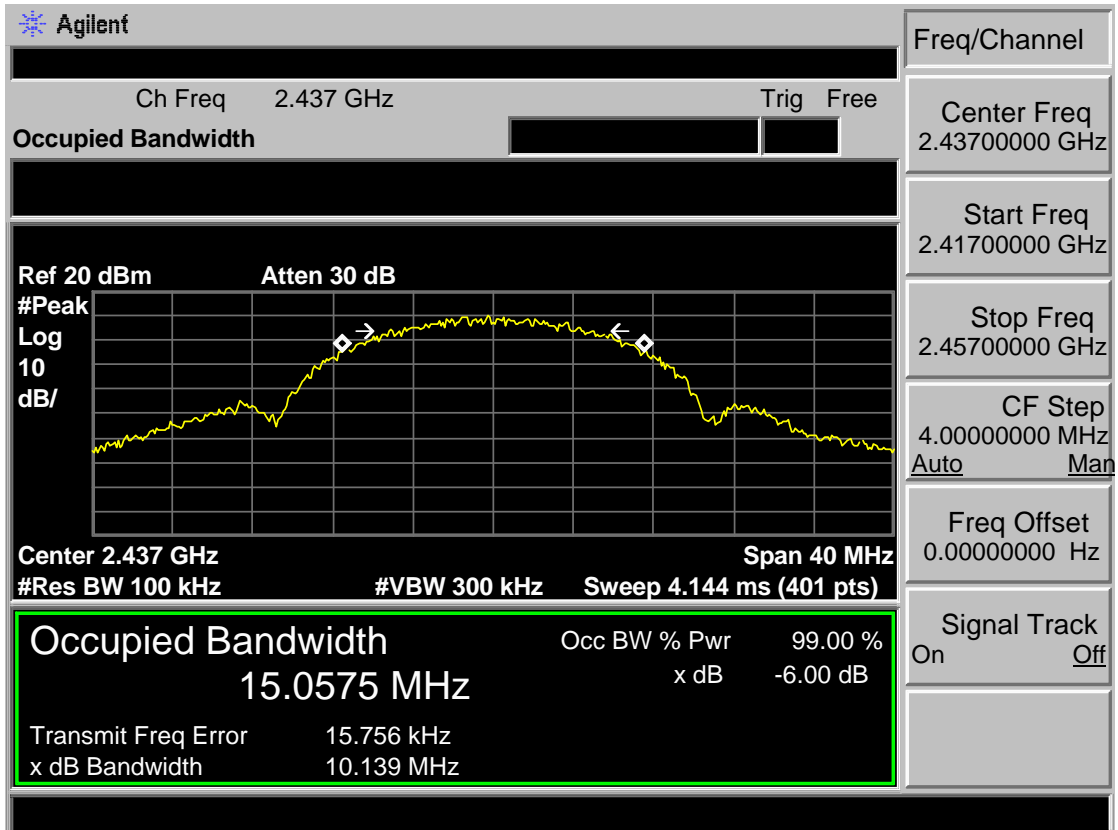

Test Mode: IEEE 802.11b 2462MHz

**Agilent**

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

#Peak Log 10 dB/

Center 2.462 GHz Span 40 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %

**15.0608 MHz** x dB -6.00 dB

Transmit Freq Error 18.295 kHz

x dB Bandwidth 10.132 MHz

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44200000 GHz

Stop Freq 2.48200000 GHz

CF Step 4.00000000 MHz  
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Test Mode: IEEE 802.11g 2412MHz

**Agilent**

Ch Freq 2.412 GHz Trig Free

**Occupied Bandwidth**

Ref 20 dBm Atten 30 dB

#Peak Log 10 dB/

Center 2.412 GHz Span 40 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %

16.5180 MHz x dB -6.00 dB

Transmit Freq Error -40.988 kHz

x dB Bandwidth 16.608 MHz

Freq/Channel

Center Freq 2.41200000 GHz

Start Freq 2.39200000 GHz

Stop Freq 2.43200000 GHz

CF Step 4.00000000 MHz  
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Test Mode: IEEE 802.11g 2437MHz

**Agilent**

Ch Freq 2.437 GHz Trig Free

**Occupied Bandwidth**

Ref 20 dBm Atten 30 dB

#Peak Log 10 dB/

Center 2.437 GHz Span 40 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %

16.4845 MHz x dB -6.00 dB

Transmit Freq Error -26.143 kHz

x dB Bandwidth 16.584 MHz

Freq/Channel

Center Freq 2.43700000 GHz

Start Freq 2.41700000 GHz

Stop Freq 2.45700000 GHz

CF Step 4.00000000 MHz  
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Test Mode: IEEE 802.11g 2462MHz

Agilent

Freq/Channel

Ch Freq 2.462 GHz
Trig Free

Occupied Bandwidth

Center Freq  
2.46200000 GHz

Start Freq  
2.44200000 GHz

Stop Freq  
2.48200000 GHz

CF Step  
4.00000000 MHz  
Auto    Man

Freq Offset  
0.00000000 Hz

Signal Track  
On    Off

Ref 20 dBm    Atten 30 dB

Center 2.462 GHz    Span 40 MHz  
#Res BW 100 kHz    #VBW 300 kHz    Sweep 4.144 ms (401 pts)

**Occupied Bandwidth**    Occ BW % Pwr    99.00 %

16.4648 MHz

x dB    -6.00 dB

Transmit Freq Error    -29.117 kHz

x dB Bandwidth    16.542 MHz

Test Mode: IEEE 802.11n HT20 2412MHz

Agilent

Freq/Channel  
 Center Freq 2.41200000 GHz  
 Start Freq 2.39200000 GHz  
 Stop Freq 2.43200000 GHz  
 CF Step 4.00000000 MHz  
 Auto Man  
 Freq Offset 0.00000000 Hz  
 Signal Track On Off

Ch Freq 2.412 GHz Trig Free

**Occupied Bandwidth**

Ref 20 dBm Atten 30 dB

Center 2.412 GHz Span 40 MHz  
 #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %  
 16.5131 MHz x dB -6.00 dB

Transmit Freq Error -45.113 kHz  
 x dB Bandwidth 16.608 MHz

Test Mode: IEEE 802.11n HT20 2437MHz

Agilent

Freq/Channel  
 Center Freq 2.43700000 GHz  
 Start Freq 2.41700000 GHz  
 Stop Freq 2.45700000 GHz  
 CF Step 4.00000000 MHz  
 Auto Man  
 Freq Offset 0.00000000 Hz  
 Signal Track On Off

Ch Freq 2.437 GHz Trig Free

**Occupied Bandwidth**

Ref 20 dBm Atten 30 dB

Center 2.437 GHz Span 40 MHz  
 #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %  
 16.4807 MHz x dB -6.00 dB

Transmit Freq Error -27.697 kHz  
 x dB Bandwidth 16.573 MHz

Test Mode: IEEE 802.11n HT20 2462MHz

Agilent

Freq/Channel

Ch Freq 2.462 GHz

Trig Free

Center Freq 2.46200000 GHz

Start Freq 2.44200000 GHz

Stop Freq 2.48200000 GHz

CF Step 4.00000000 MHz  
Auto Man

Freq Offset 0.00000000 Hz

Signal Track  
On Off

Ref 20 dBm

Atten 30 dB

Center 2.462 GHz

Span 40 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 4.144 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.4749 MHz	x dB	-6.00 dB
Transmit Freq Error	-31.004 kHz	
x dB Bandwidth	16.577 MHz	

Test Mode: IEEE 802.11n HT40 2422MHz

Agilent


Freq/Channel

Ch Freq 2.422 GHz  
**Occupied Bandwidth**

Trig Free

Ref 20 dBm  
 #Peak  
 Log  
 10  
 dB/

Atten 30 dB

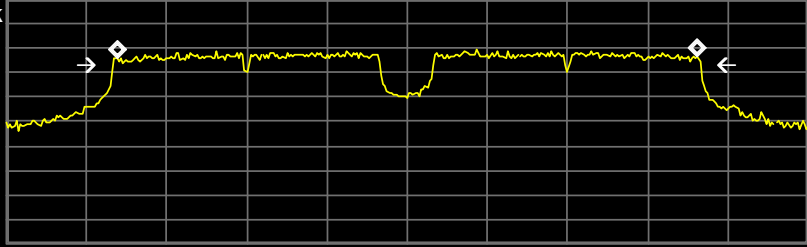

Center Freq  
2.42200000 GHz  
  
 Start Freq  
2.39700000 GHz  
  
 Stop Freq  
2.44700000 GHz  
  
 CF Step  
5.00000000 MHz  
Auto Man  
  
 Freq Offset  
0.00000000 Hz  
  
 Signal Track  
On Off

Center 2.422 GHz  
 #Res BW 100 kHz  
 #VBW 300 kHz  
 Sweep 5.18 ms (401 pts)

Span 50 MHz

Occupied Bandwidth	Occ BW % Pwr	99.00 %
36.2421 MHz	x dB	-6.00 dB
Transmit Freq Error		-20.900 kHz
x dB Bandwidth		36.607 MHz

Test Mode: IEEE 802.11n HT40 2437MHz

Agilent


Freq/Channel

Ch Freq 2.437 GHz  
**Occupied Bandwidth**

Trig Free

Ref 20 dBm  
 #Peak  
 Log  
 10  
 dB/

Atten 30 dB

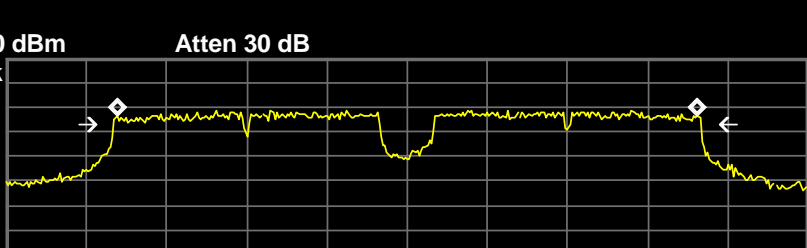

Center Freq  
2.43700000 GHz  
  
 Start Freq  
2.41200000 GHz  
  
 Stop Freq  
2.46200000 GHz  
  
 CF Step  
5.00000000 MHz  
Auto Man  
  
 Freq Offset  
0.00000000 Hz  
  
 Signal Track  
On Off

Center 2.437 GHz  
 #Res BW 100 kHz  
 #VBW 300 kHz  
 Sweep 5.18 ms (401 pts)

Span 50 MHz

Occupied Bandwidth	Occ BW % Pwr	99.00 %
36.2571 MHz	x dB	-6.00 dB
Transmit Freq Error		7.450 kHz
x dB Bandwidth		36.627 MHz



Test Mode: IEEE 802.11n HT40 2452MHz

**Agilent**

Ch Freq 2.452 GHz Trig Free

**Occupied Bandwidth**

Ref 20 dBm Atten 30 dB

#Peak Log 10 dB/

Center 2.452 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %

36.2023 MHz x dB -6.00 dB

Transmit Freq Error -23.604 kHz

x dB Bandwidth 36.589 MHz

Freq/Channel

Center Freq 2.45200000 GHz

Start Freq 2.42700000 GHz

Stop Freq 2.47700000 GHz

CF Step 5.00000000 MHz


Auto Man

Freq Offset 0.00000000 Hz


Signal Track On Off

### 6.5 20dB Test Data

Test Mode: IEEE 802.11b 2412MHz

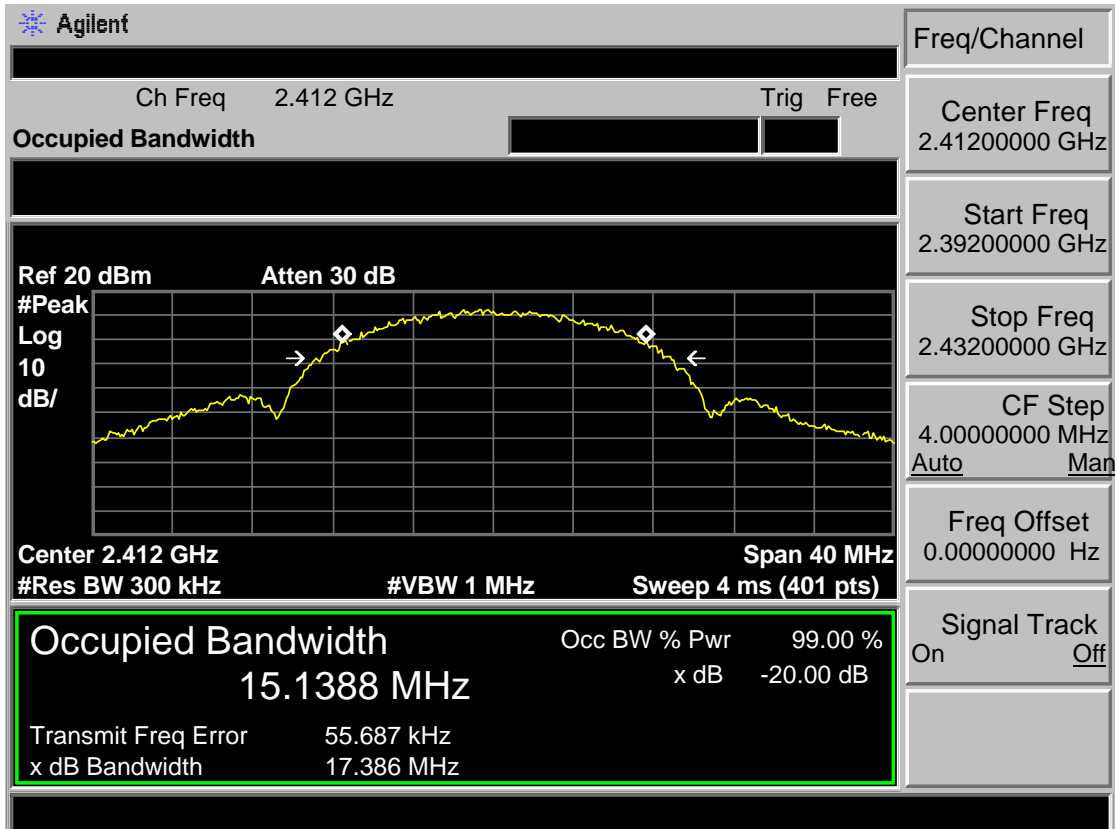

Test Mode: IEEE 802.11b 2437MHz

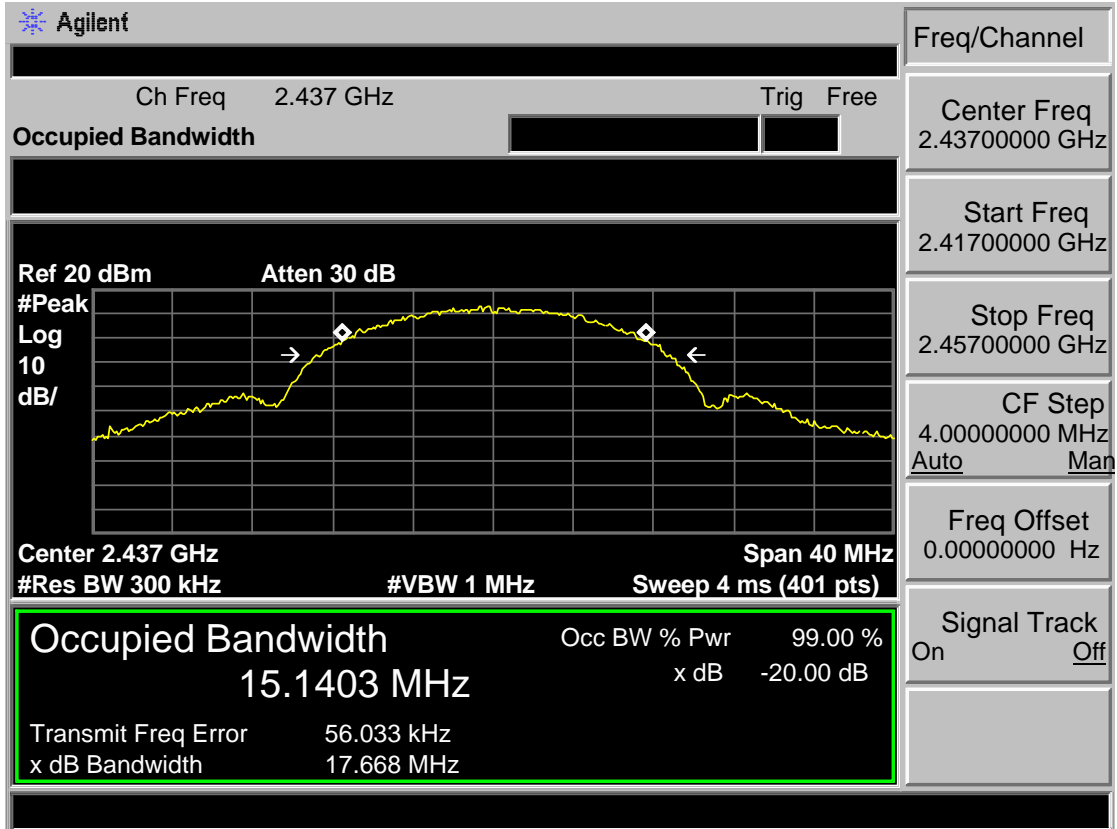

Test Mode: IEEE 802.11b 2462MHz

**Agilent**

Ch Freq 2.462 GHz Trig Free

**Occupied Bandwidth**

Ref 20 dBm Atten 30 dB

#Peak  
Log  
10  
dB/

Center 2.462 GHz Span 40 MHz

#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %

15.0437 MHz x dB -20.00 dB

Transmit Freq Error 19.338 kHz

x dB Bandwidth 17.433 MHz

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44200000 GHz

Stop Freq 2.48200000 GHz

CF Step 4.00000000 MHz  
Auto Man

Freq Offset 0.00000000 Hz

Signal Track  
On Off

Test Mode: IEEE 802.11g 2412MHz

**Agilent**

Ch Freq 2.412 GHz Trig Free

**Occupied Bandwidth**

Ref 20 dBm Atten 30 dB

Center 2.412 GHz Span 40 MHz

#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %
<b>16.8833 MHz</b>		x dB	-20.00 dB
Transmit Freq Error	-37.652 kHz		
x dB Bandwidth	18.961 MHz		

Freq/Channel

Center Freq  
2.41200000 GHz

Start Freq  
2.39200000 GHz

Stop Freq  
2.43200000 GHz

CF Step  
4.00000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Test Mode: IEEE 802.11g 2437MHz

**Agilent**

Ch Freq 2.437 GHz Trig Free

**Occupied Bandwidth**

Ref 20 dBm Atten 30 dB

Center 2.437 GHz Span 40 MHz

#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %
<b>16.8485 MHz</b>		x dB	-20.00 dB
Transmit Freq Error	-26.996 kHz		
x dB Bandwidth	19.097 MHz		

Freq/Channel

Center Freq  
2.43700000 GHz

Start Freq  
2.41700000 GHz

Stop Freq  
2.45700000 GHz

CF Step  
4.00000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Test Mode: IEEE 802.11g 2462MHz

**Agilent**

Ch Freq 2.462 GHz Trig Free

**Occupied Bandwidth**

Ref 20 dBm Atten 30 dB

#Peak  
Log  
10  
dB/

Center 2.462 GHz Span 40 MHz  
#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %  
16.8666 MHz x dB -20.00 dB

Transmit Freq Error -72.201 kHz  
x dB Bandwidth 19.423 MHz

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44200000 GHz


Stop Freq 2.48200000 GHz

CF Step 4.00000000 MHz  
Auto Man


Freq Offset 0.00000000 Hz

Signal Track On Off

Test Mode: IEEE 802.11n HT20 2412MHz

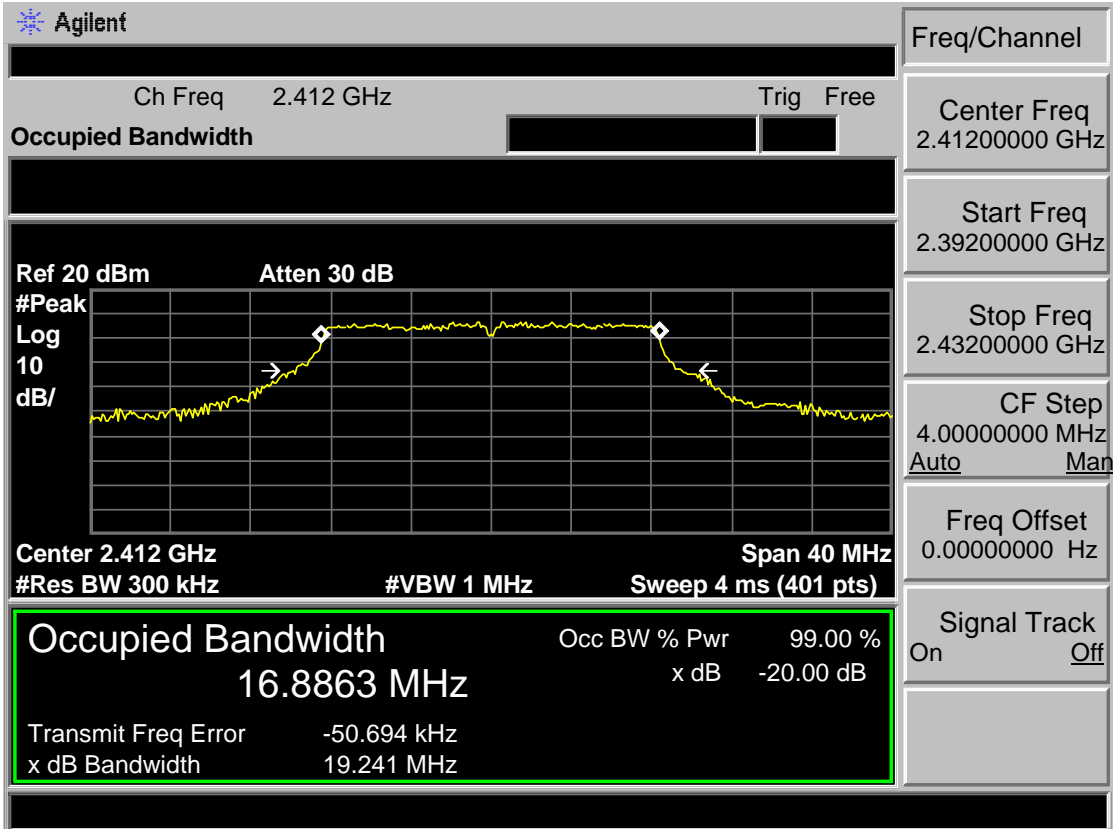

Test Mode: IEEE 802.11n HT20 2437MHz

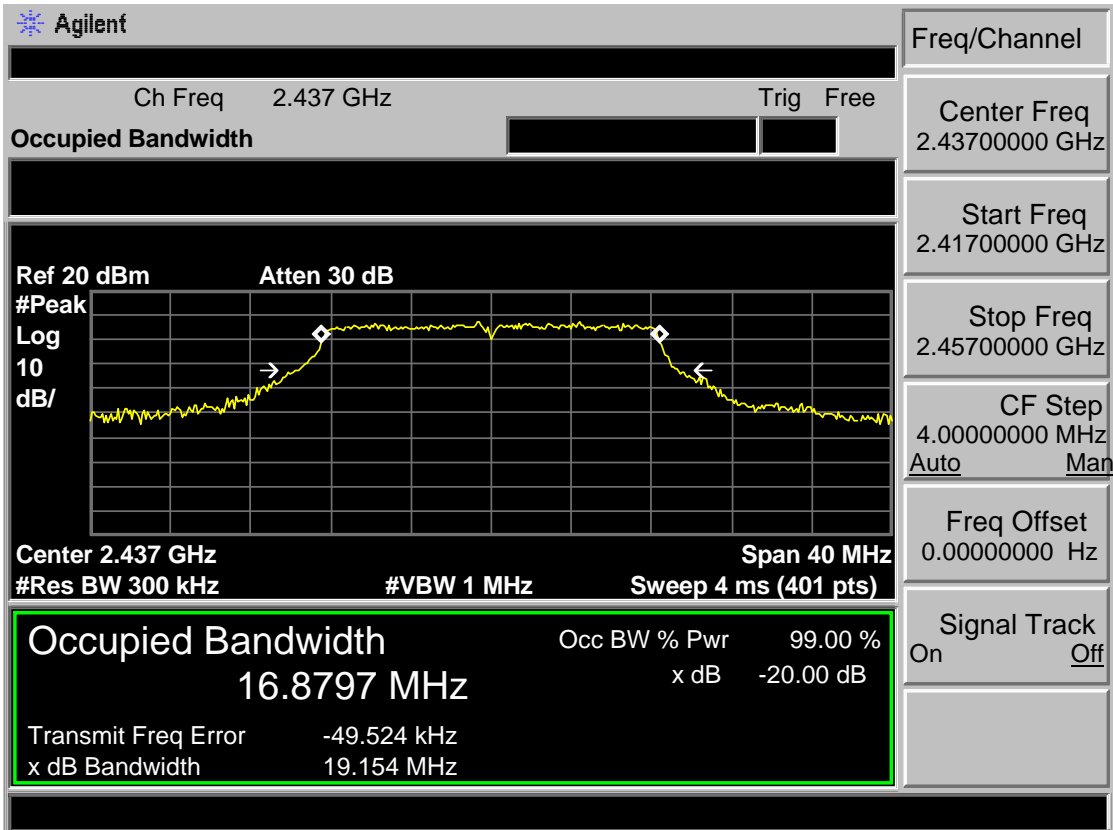

Test Mode: IEEE 802.11n HT20 2462MHz

**Agilent**

Ch Freq 2.462 GHz Trig Free

**Occupied Bandwidth**

Center 2.462 GHz Span 40 MHz

#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44200000 GHz

Stop Freq 2.48200000 GHz

CF Step 4.00000000 MHz  
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

**Occupied Bandwidth** Occ BW % Pwr 99.00 %


**16.8560 MHz**

x dB -20.00 dB


Transmit Freq Error -70.189 kHz

x dB Bandwidth 19.052 MHz

Test Mode: IEEE 802.11n HT40 2422MHz

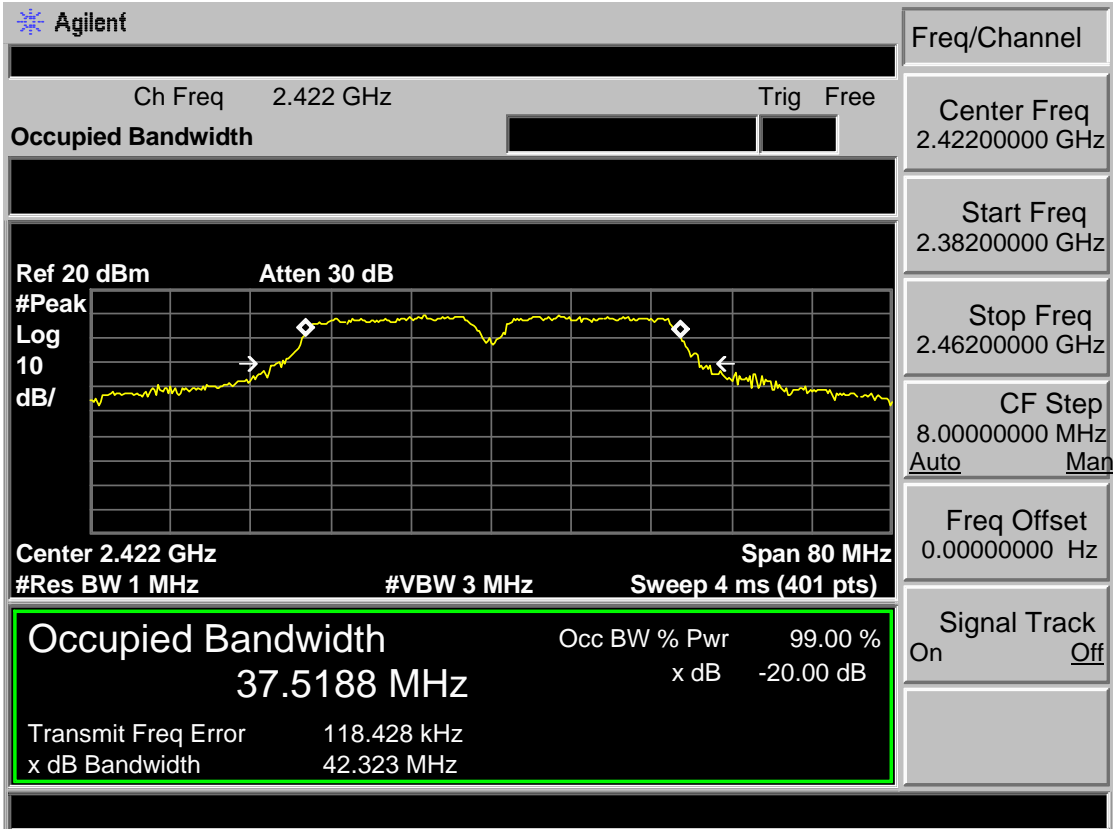

Test Mode: IEEE 802.11n HT40 2437MHz

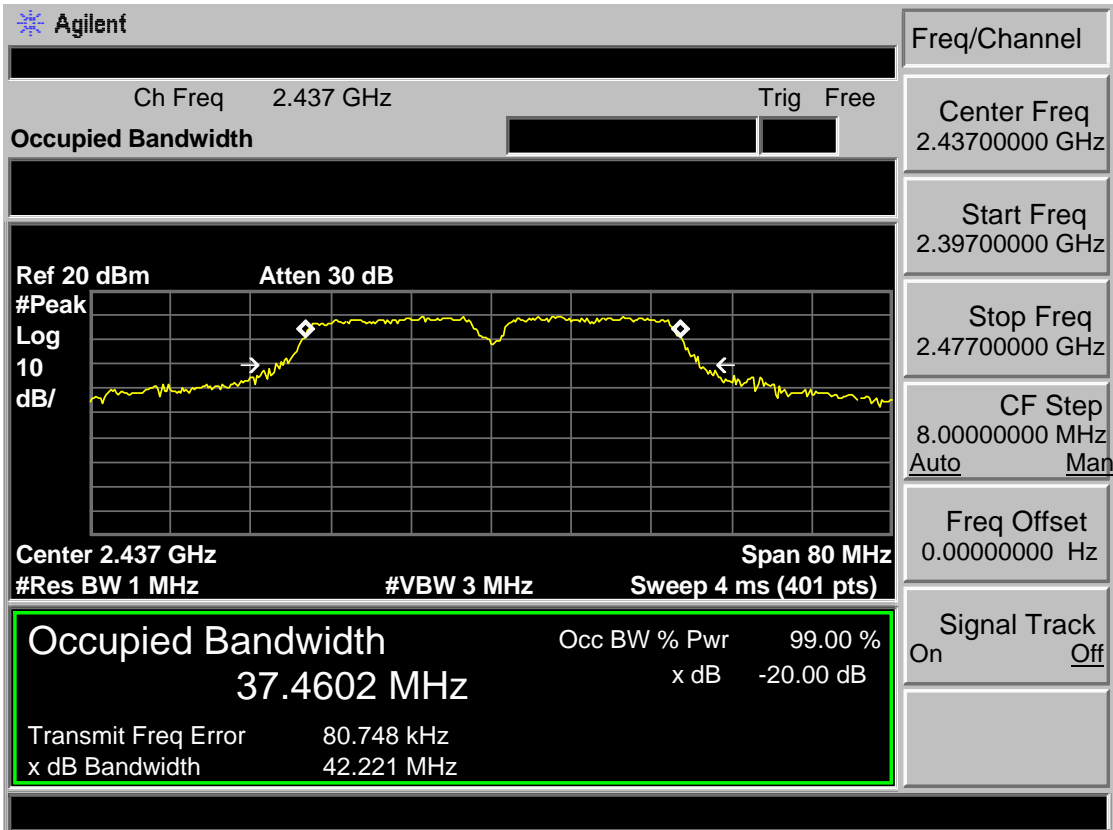



Test Mode: IEEE 802.11n HT40 2452MHz

Agilent

Freq/Channel

Ch Freq 2.452 GHz  
**Occupied Bandwidth**

Trig Free

Ref 20 dBm      Atten 30 dB

#Peak  
Log  
10  
dB/

Center Freq  
2.45200000 GHz

Center 2.452 GHz      Span 80 MHz

#Res BW 1 MHz      #VBW 3 MHz      Sweep 4 ms (401 pts)

Start Freq  
2.41200000 GHz

**Occupied Bandwidth**      Occ BW % Pwr      99.00 %

37.3413 MHz

x dB      -20.00 dB

Transmit Freq Error      27.256 kHz

x dB Bandwidth      42.707 MHz

Stop Freq  
2.49200000 GHz

CF Step  
8.00000000 MHz  
Auto      Man

Freq Offset  
0.00000000 Hz

Signal Track  
On      Off

## 7 OUTPUT POWER TEST

### 7.1 Limit

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm)

### 7.2 Test Procedure

#### 7.3 Test Procedure

- 1, Connected the EUT's antenna port to spectrum analyzer device.
- 2, Follow the test procedure as described in KDB 558074
  - (1)Set span to at least 1.5 times the OBW.
  - (2)Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
  - (3)Set VBW  $\geq 3 \times$  RBW.
  - (4)Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
  - (4)Sweep time = auto.
  - (5)Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
  - (6)If transmit duty cycle  $< 98 \%$ , use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98 \%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
  - (7)Trace average at least 100 traces in power averaging (i.e., RMS) mode.
  - (8)Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.


Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

7.4 Test Result


EUT: LED TV			
M/N: SE60FYP1T			
Test date: 2016-11-30		Tested by: Tony.Tang	Test site: RF Site
Pass			
Test Mode	CH	Conducted Power (dBm)	Limit (dBm)
IEEE 802.11 b	CH1	18.49	30
	CH6	18.98	30
	CH11	19.18	30
IEEE 802.11 g	CH1	14.78	30
	CH6	14.82	30
	CH11	15.57	30
IEEE 802.11 n HT 20	CH1	14.77	30
	CH6	15.03	30
	CH11	15.55	30
IEEE 802.11 n HT 40	CH3	13.03	30
	CH6	13.44	30
	CH9	14.08	30
Conclusion : PASS			

### 7.5 Test Data


Test Mode: IEEE 802.11 b 2412MHz

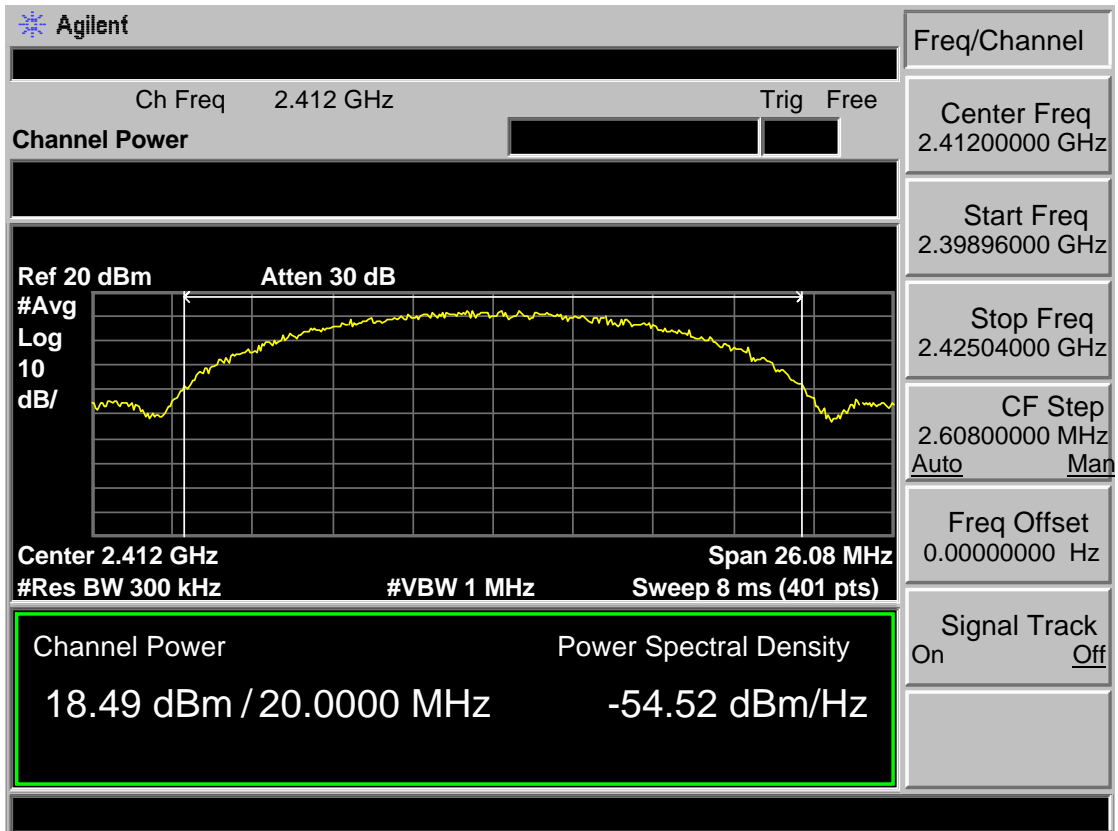


Test Mode: IEEE 802.11 b 2437MHz

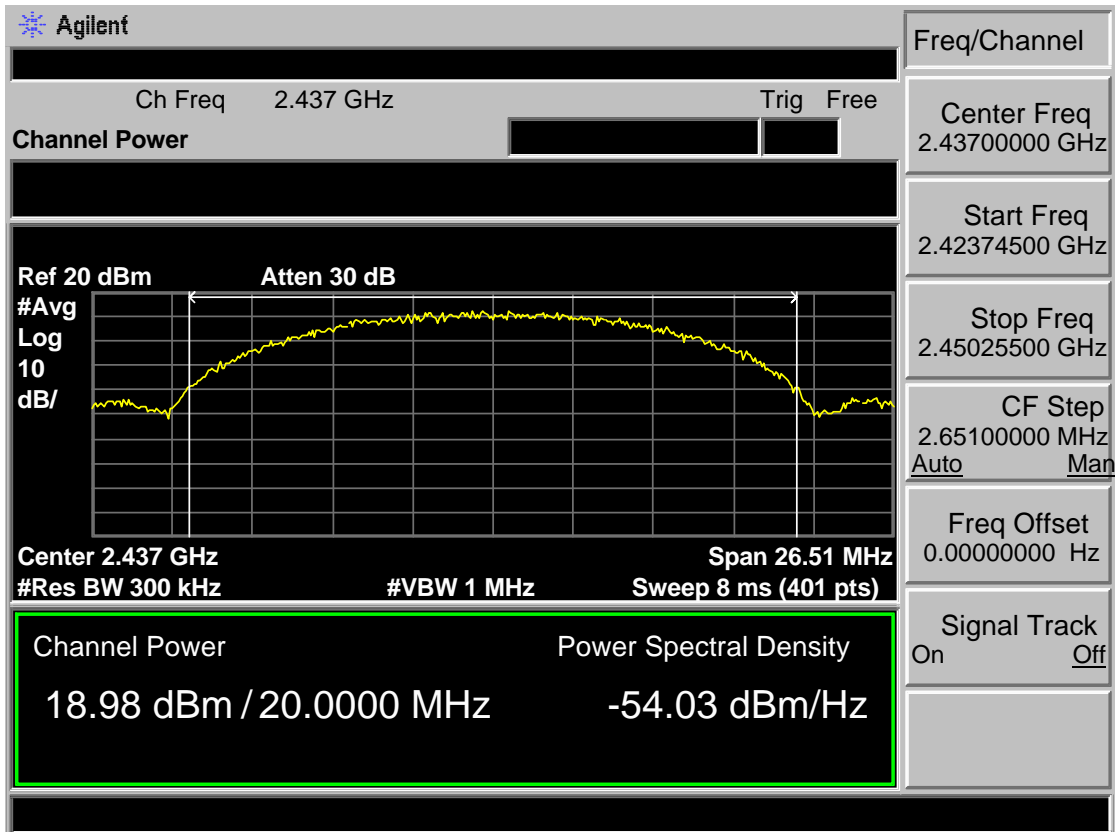


Test Mode: IEEE 802.11 b 2462MHz

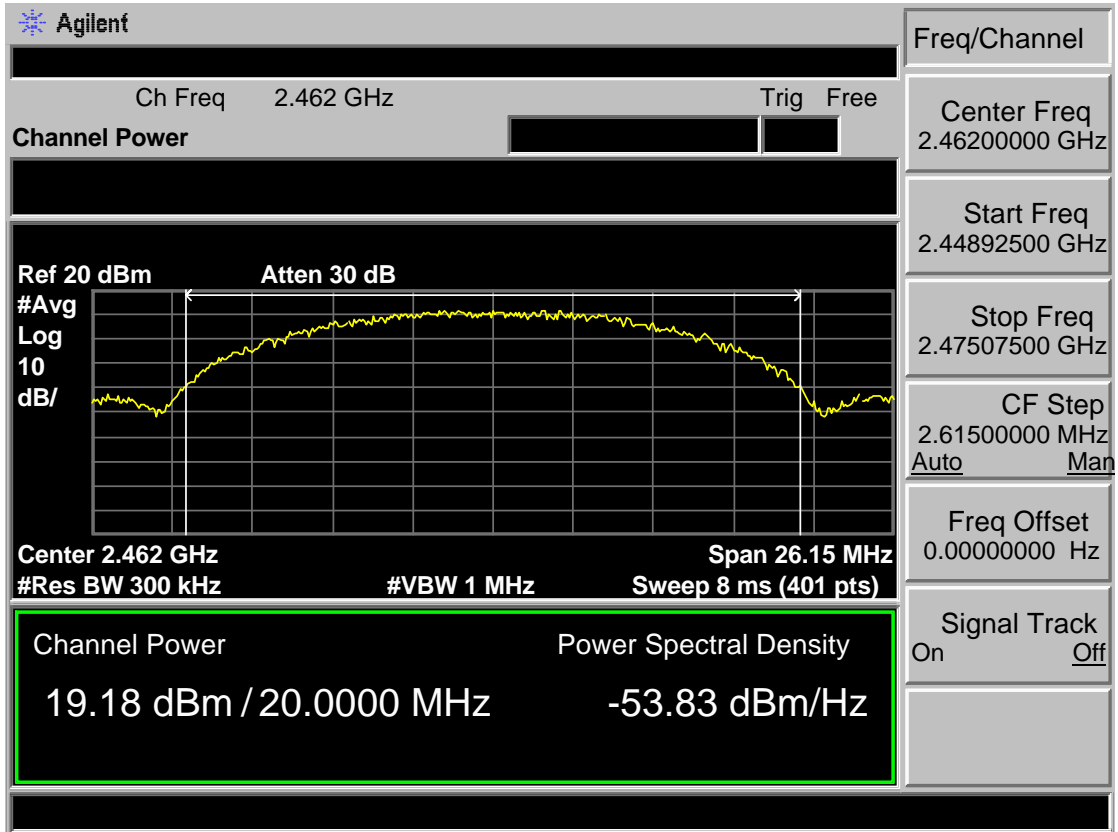


Test Mode: IEEE 802.11 g 2412MHz

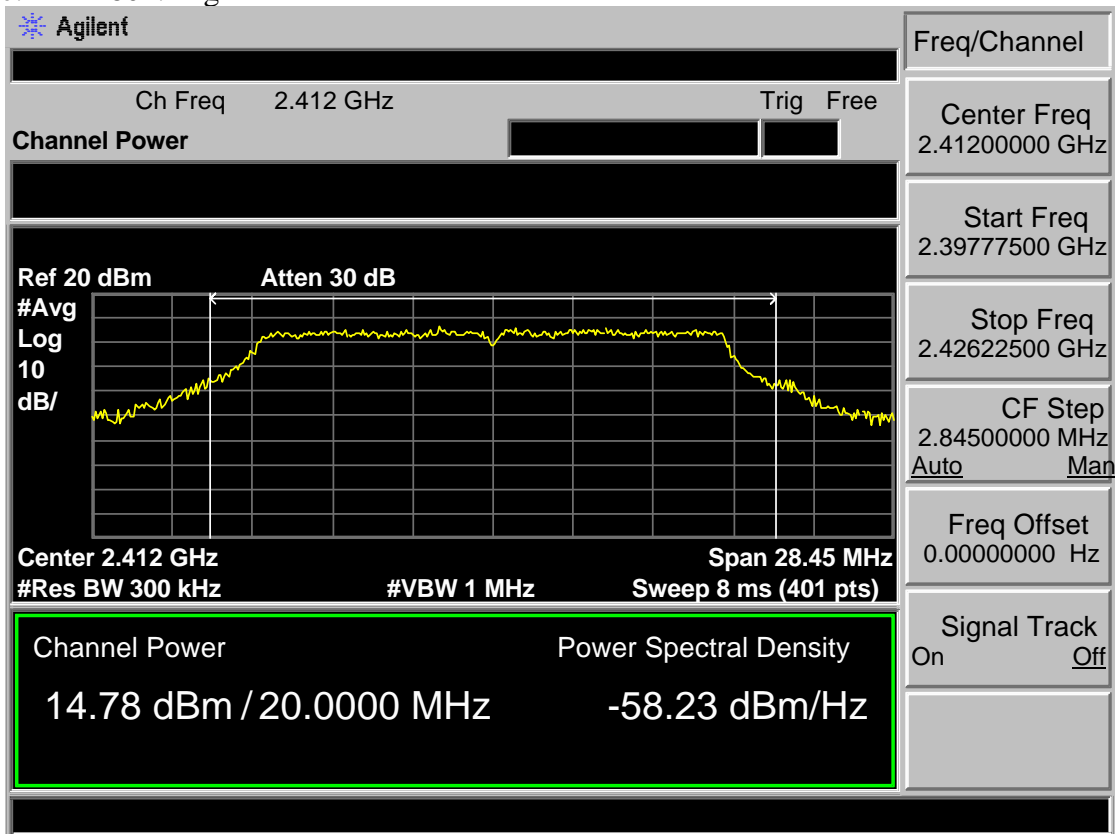


Test Mode: IEEE 802.11 g 2437MHz

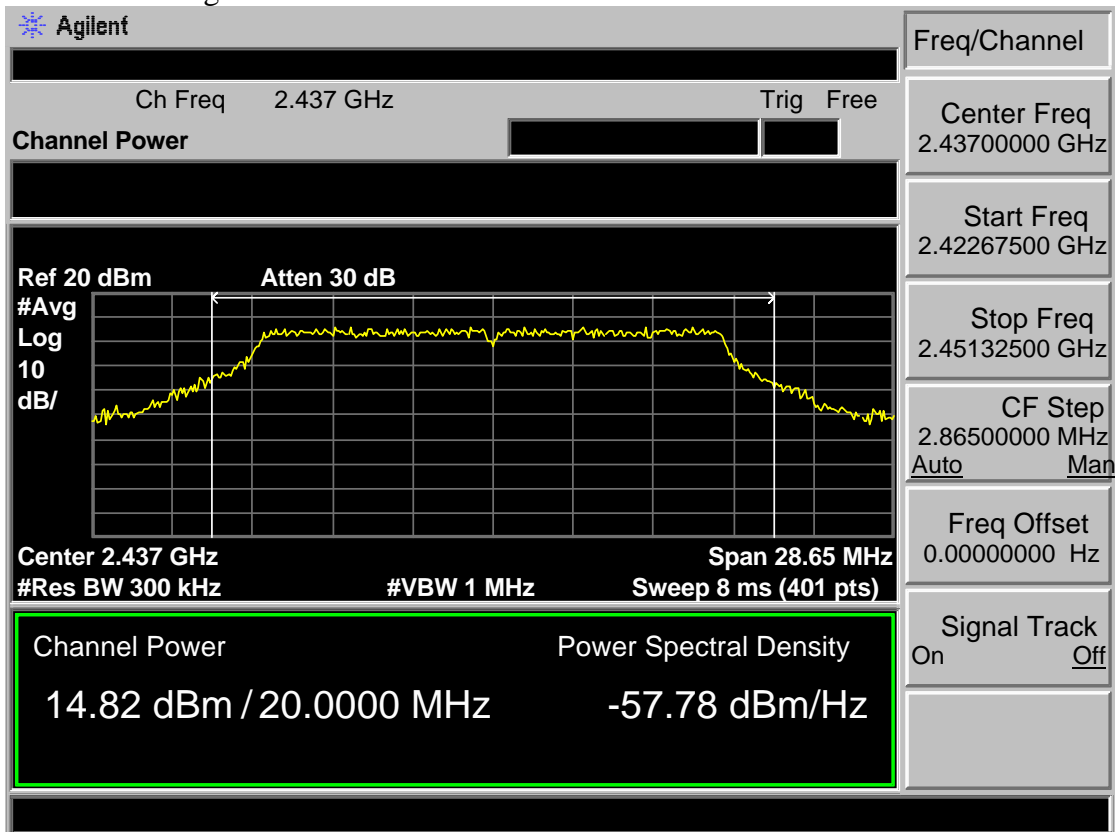


Test Mode: IEEE 802.11 g 2462MHz

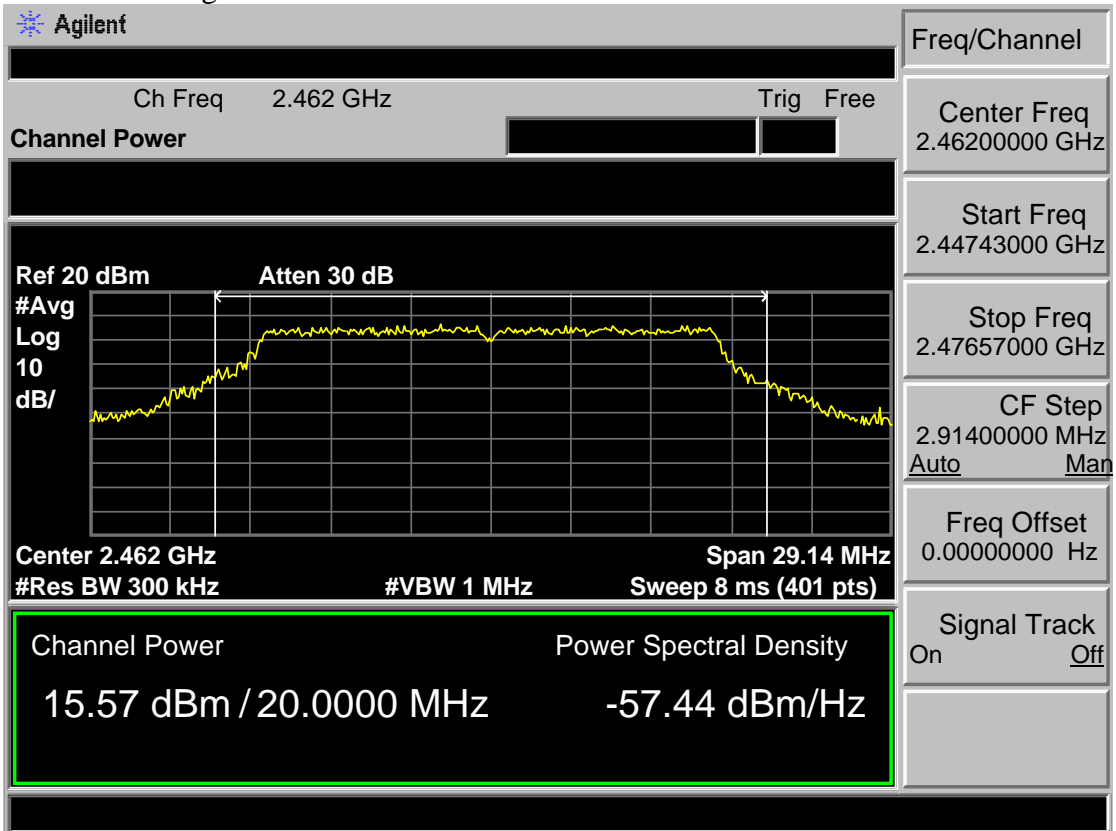

Test Mode: IEEE 802.11n HT20 2412MHz

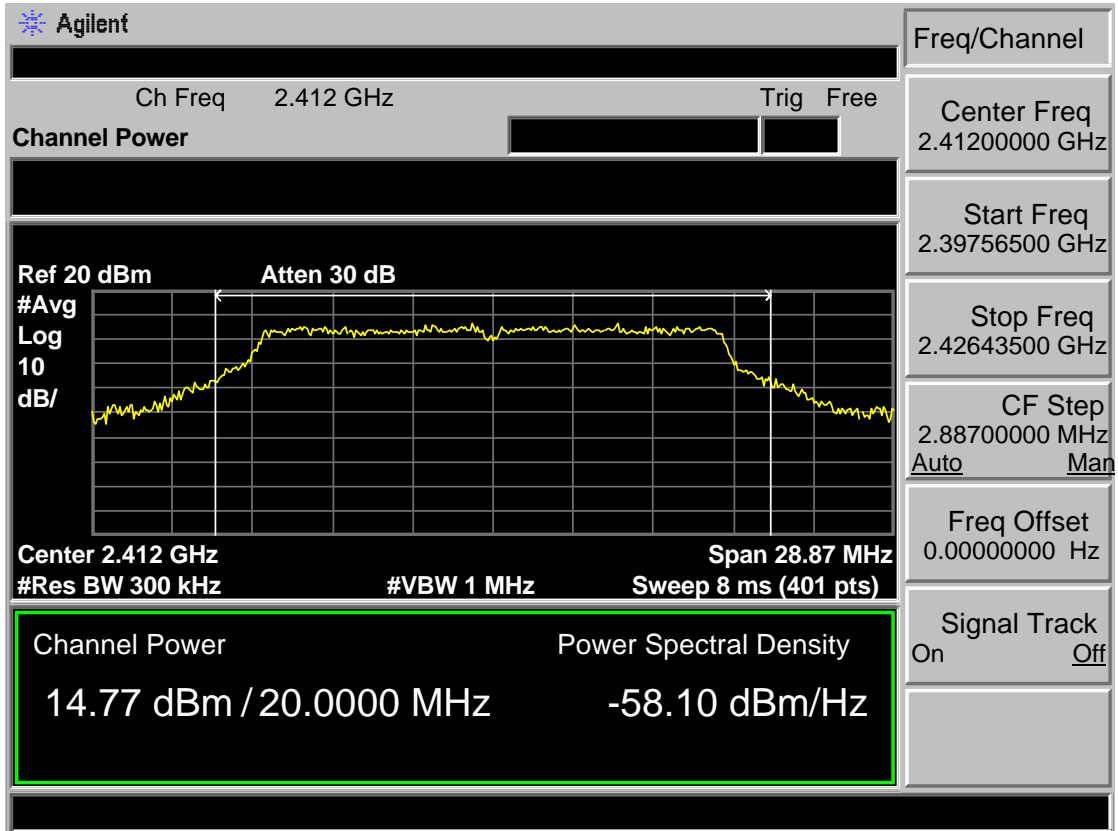


Test Mode: IEEE 802.11 n HT20 2437MHz

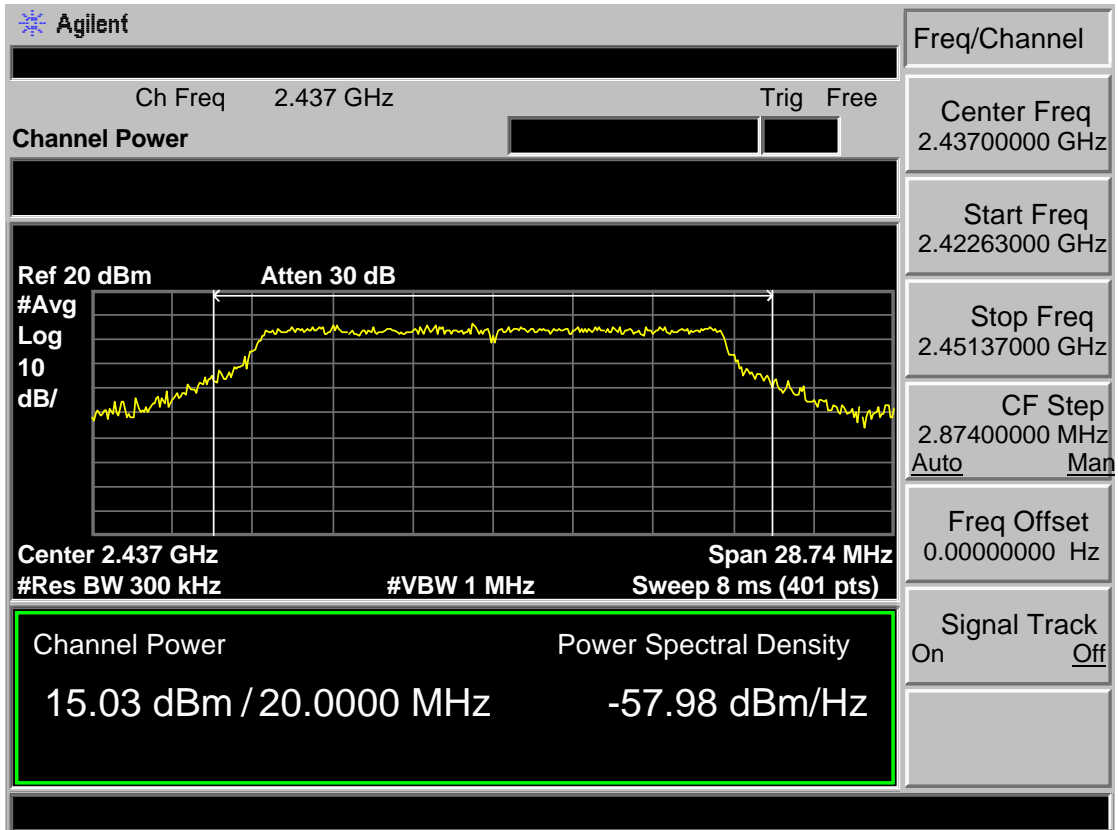





Test Mode: IEEE 802.11 n HT20 2462MHz

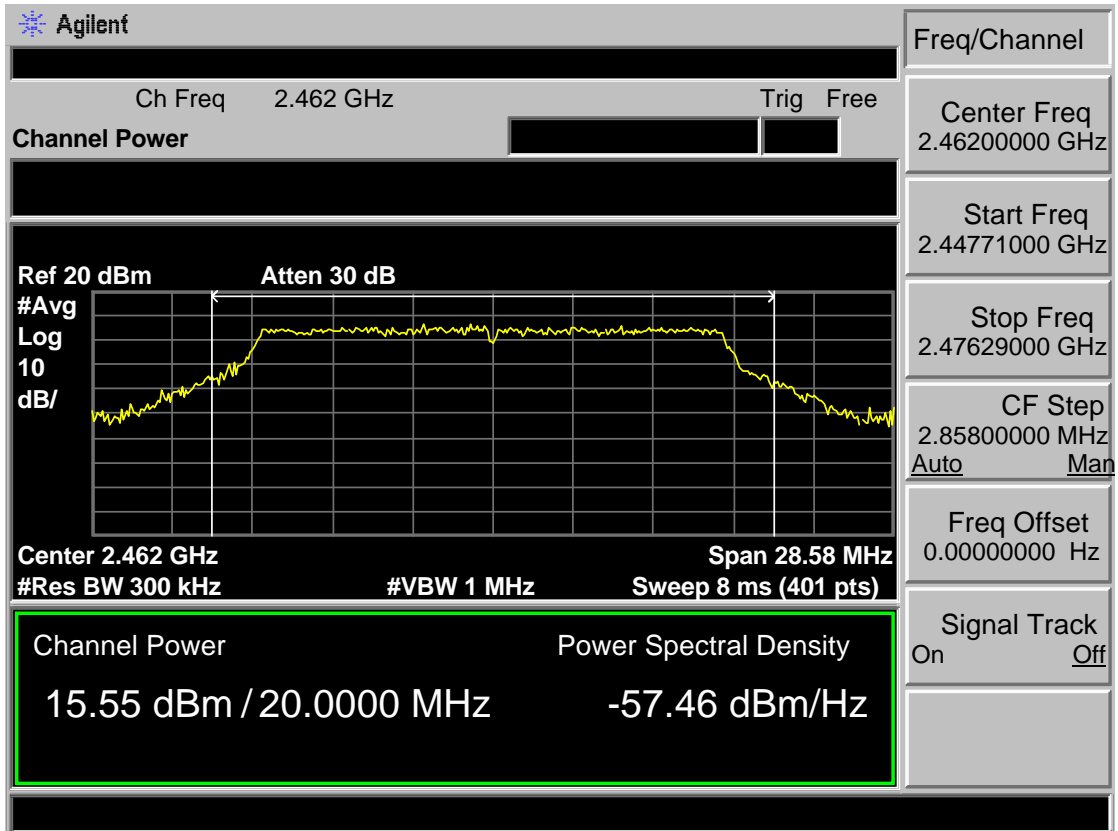


Test Mode: IEEE 802.11 n HT40 2422MHz

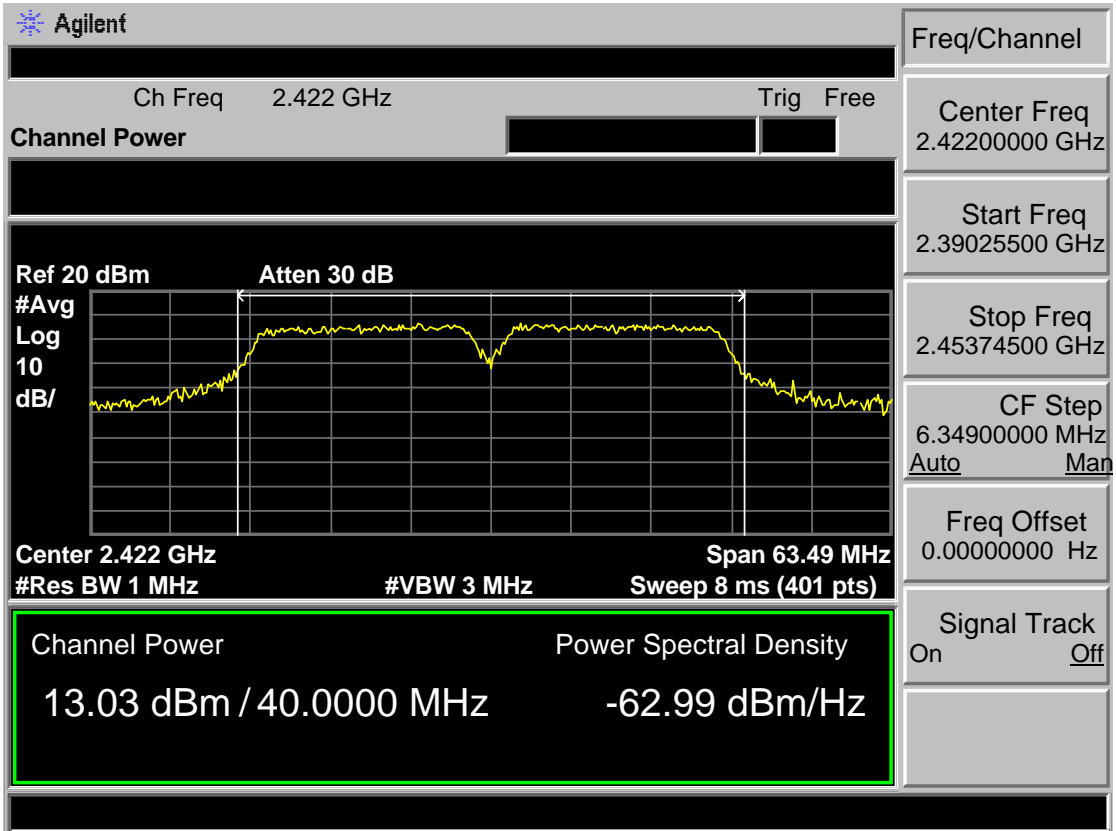

Test Mode: IEEE 802.11 n HT40 2437MHz

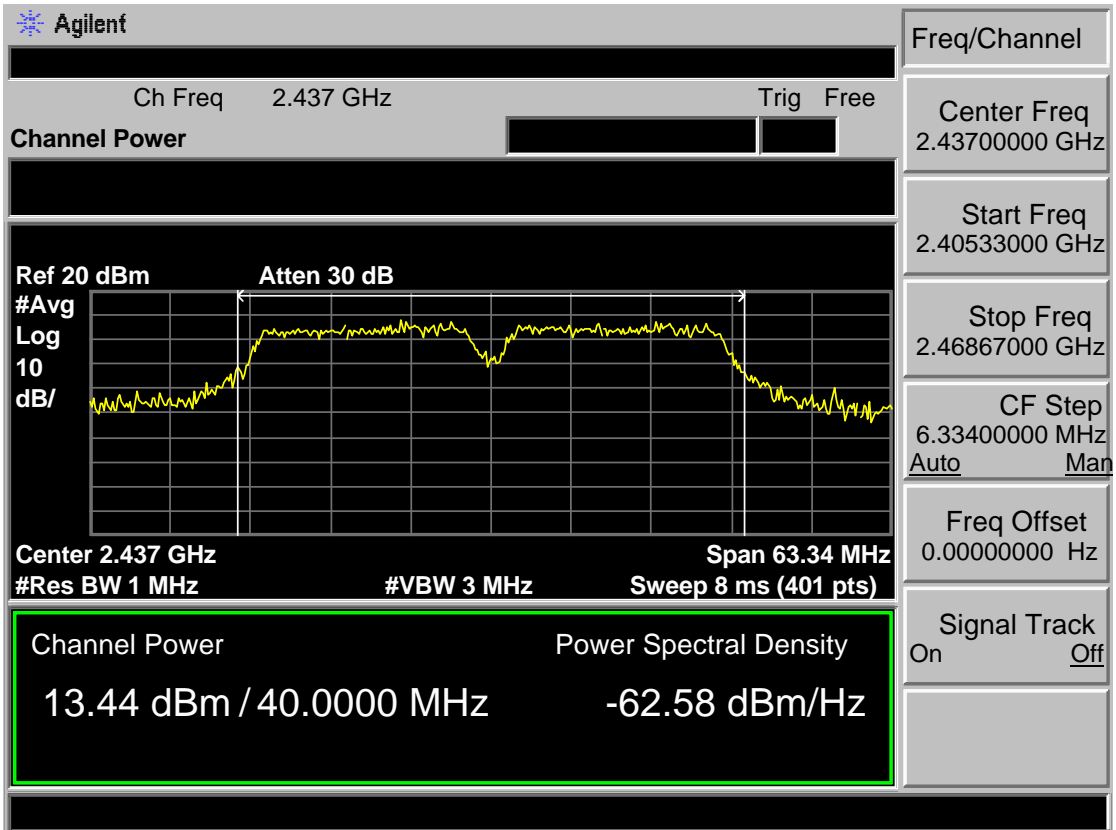

Test Mode: IEEE 802.11 n HT40 2452MHz

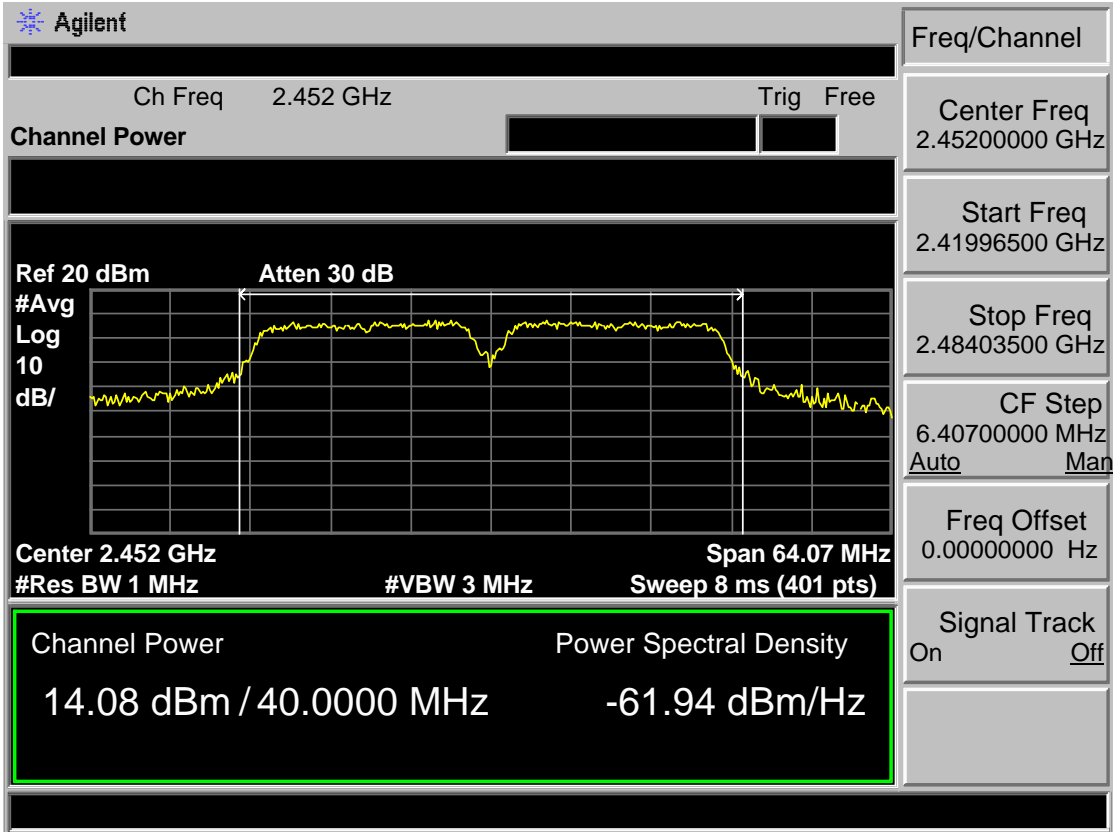

## 8 POWER SPECTRAL DENSITY TEST

### 8.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 8.2 Test Procedure


- 1, Connected the EUT's antenna port to spectrum analyzer device.
  
- 2, Follow the test procedure as described in KDB 558074
  - (1). Set analyzer center frequency to DTS channel center frequency.
  - (2). Set the span to 1.5 times the DTS bandwidth.
  - (3). Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
  - (4). Set the VBW  $\geq 3 \text{ RBW}$ .
  - (5). Detector = peak.
  - (6). Sweep time = auto couple.
  - (7). Trace mode = max hold.
  - (8). Allow trace to fully stabilize.
  - (9). Use the peak marker function to determine the maximum amplitude level.
  - (10). If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

## 8.3 Test Result


EUT: LED TV			
M/N: SE60FYP1T			
Test date: 2016-11-30		Tested by: Tony Tang	Test site: RF site
Pass			
Test Mode	CH	Power density (dBm/3kHz)	Limit (dBm/3kHz)
IEEE 802.11 b	CH1	-4.39	8
	CH6	-3.63	8
	CH11	-3.88	8
IEEE 802.11 g	CH1	-11.64	8
	CH6	-11.09	8
	CH11	-11.04	8
IEEE 802.11 n HT 20	CH1	-11.44	8
	CH6	-11.29	8
	CH11	-11.15	8
IEEE 802.11 n HT 40	CH3	-14.89	8
	CH6	-14.53	8
	CH9	-14.37	8
Conclusion: PASS			

### 8.4 Test Data


Test Mode: IEEE 802.11b 2412MHz

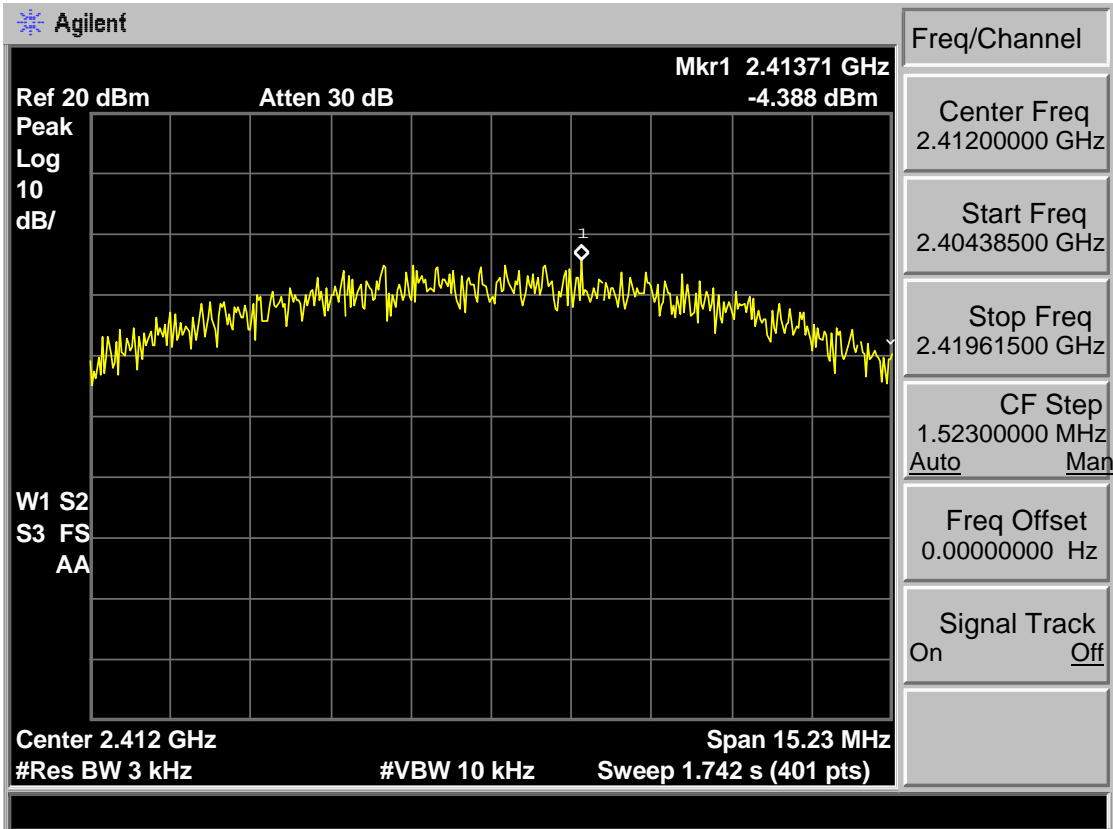


Test Mode: IEEE 802.11b 2437MHz

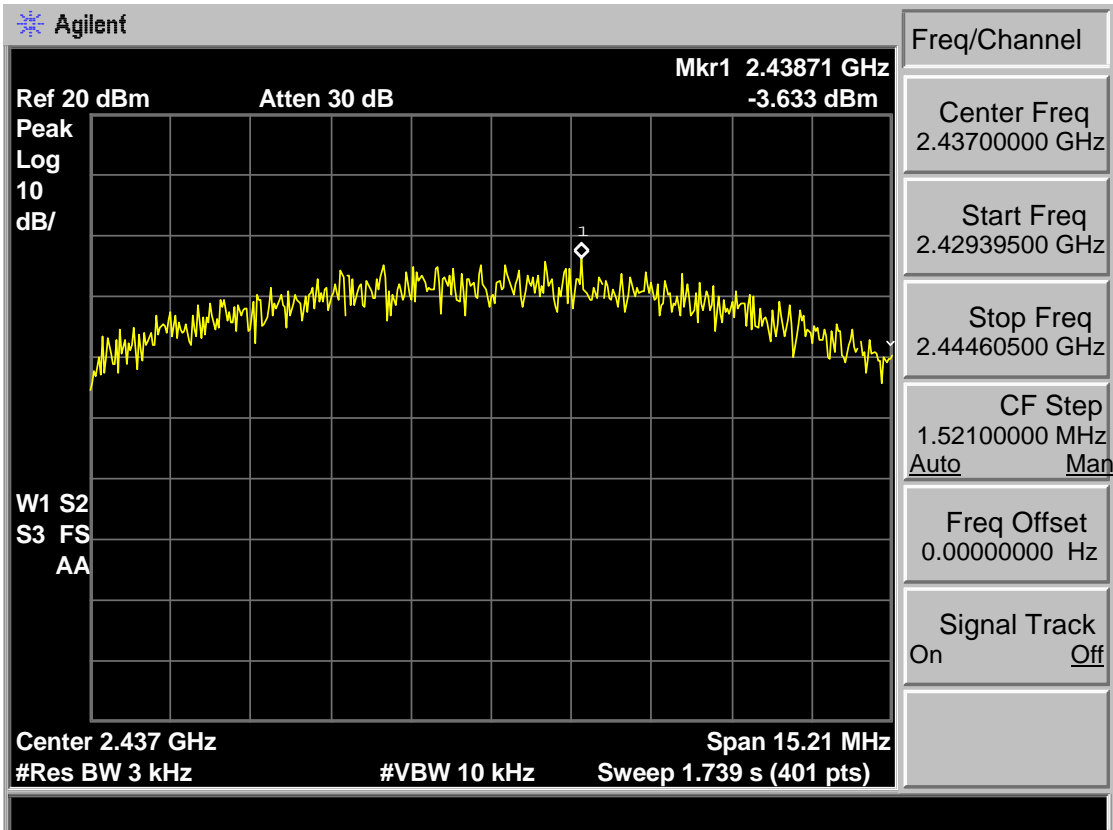


Test Mode: IEEE 802.11b 2462MHz

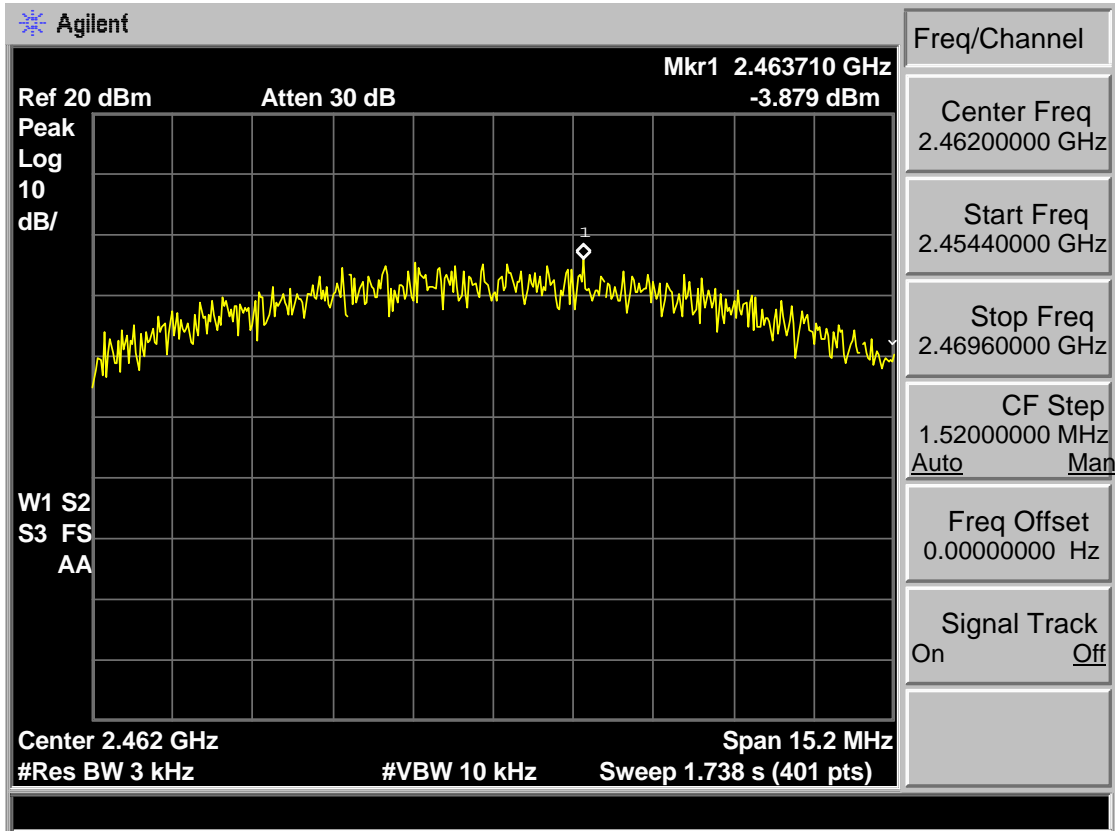

Test Mode: IEEE 802.11g 2412MHz

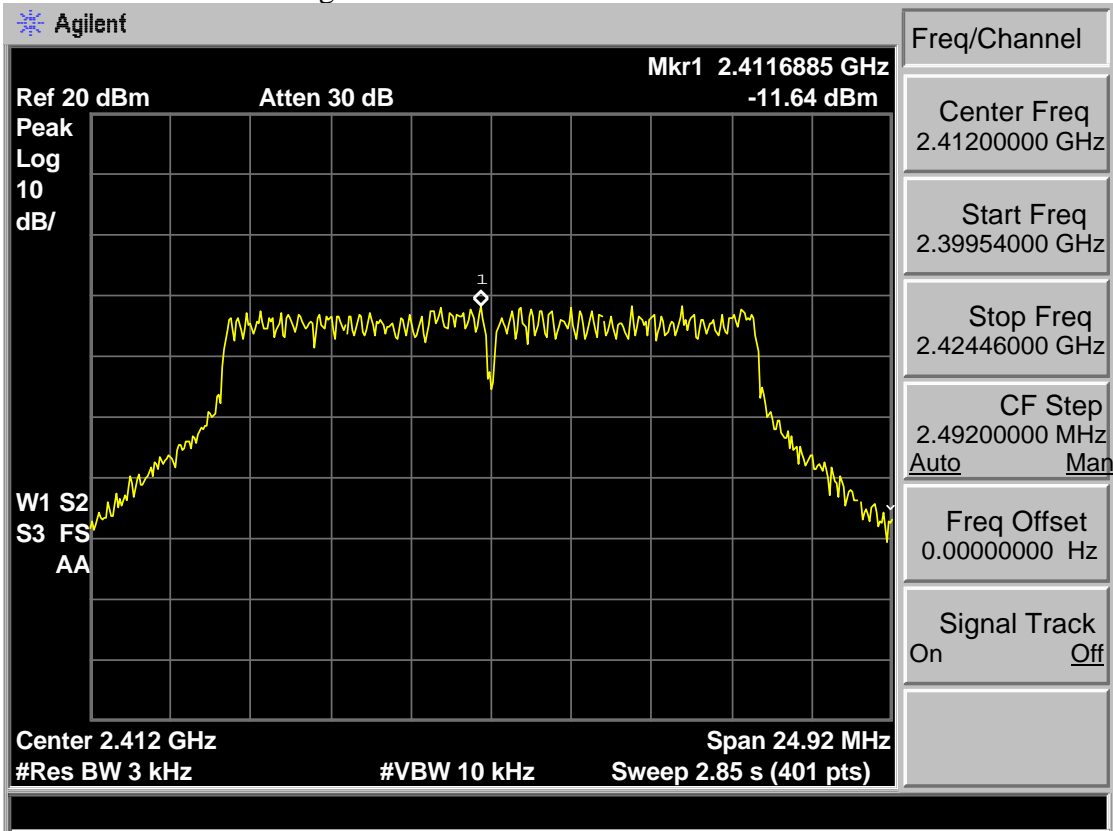


Test Mode: IEEE 802.11g 2437MHz

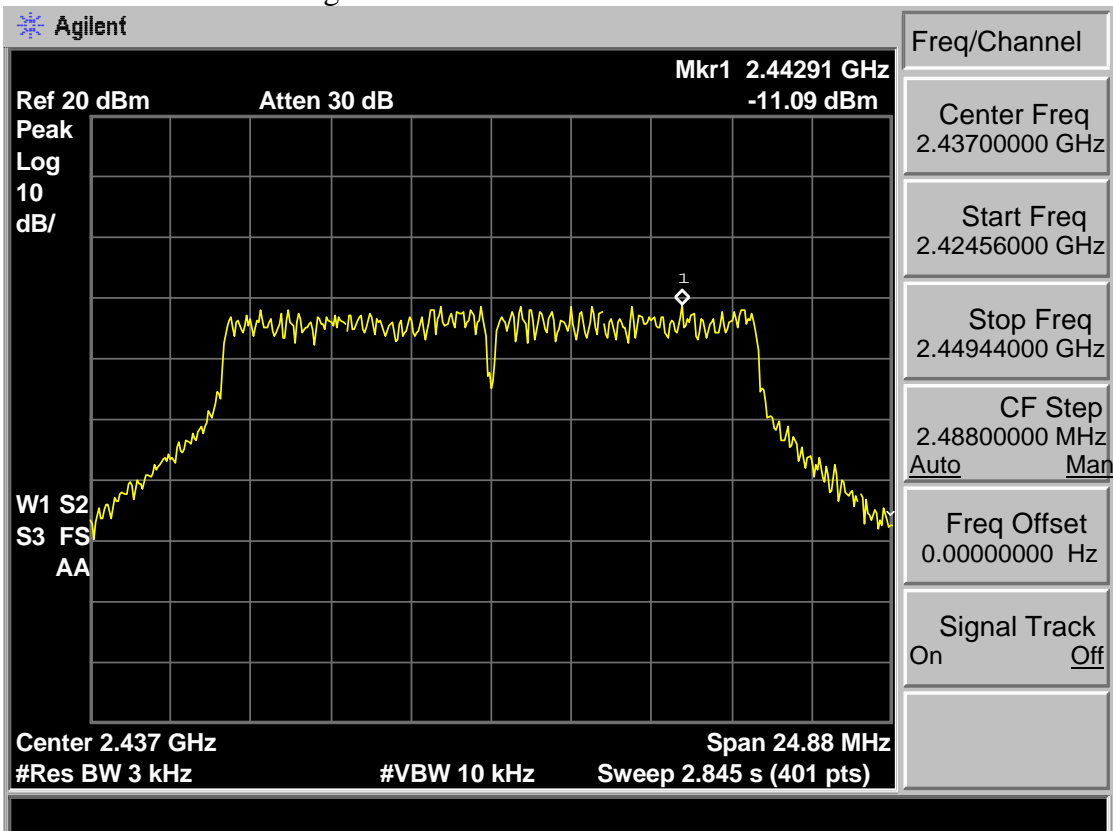





Test Mode: IEEE 802.11g 2462MHz

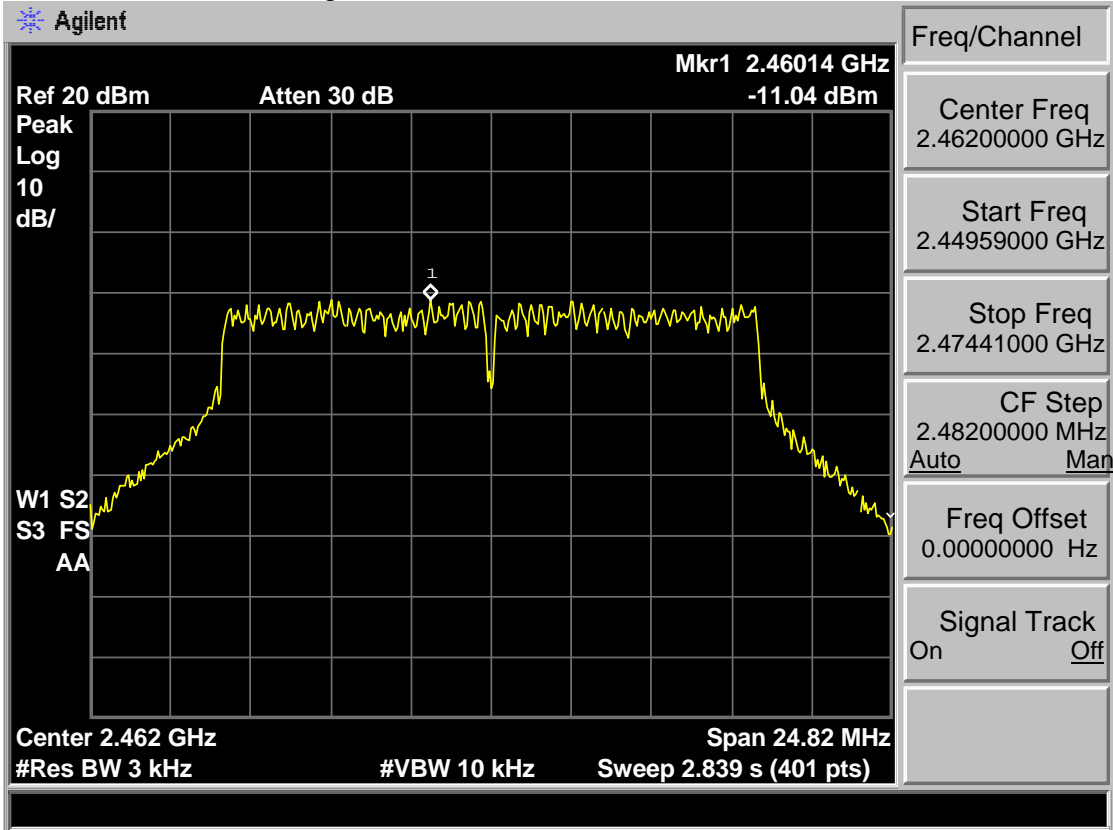


Test Mode: IEEE 802.11n HT20 2412MHz

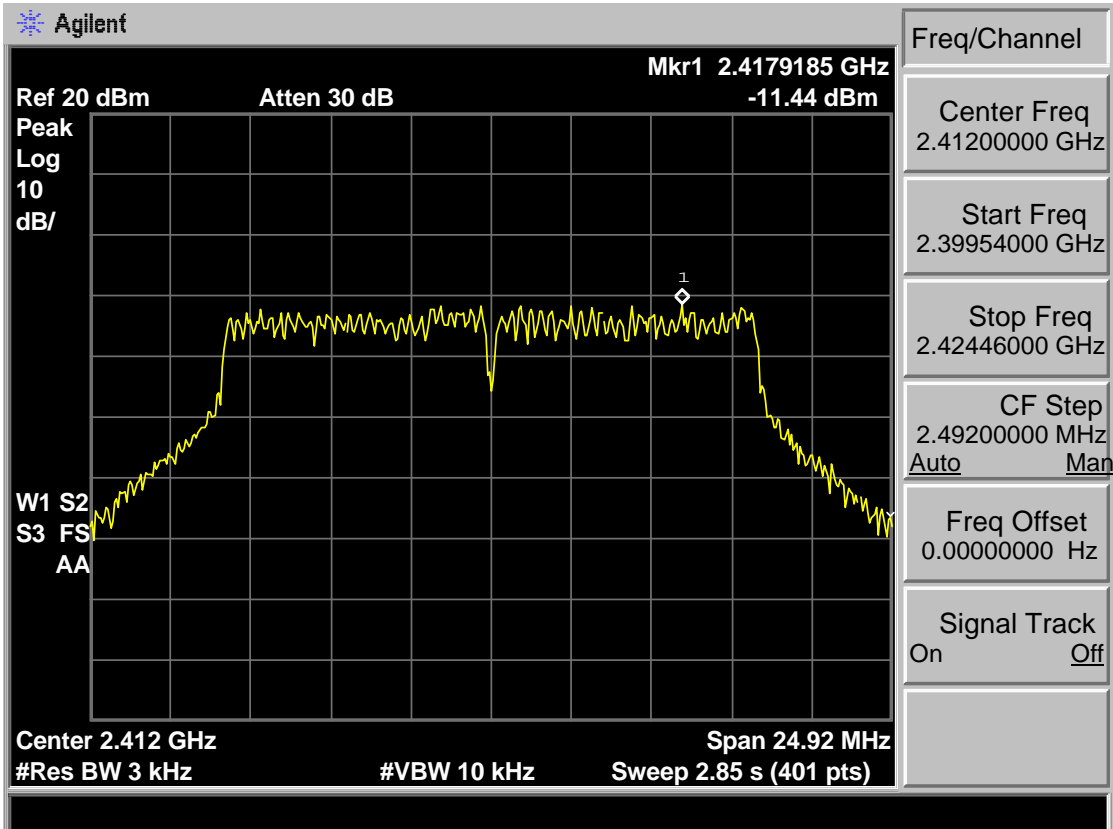


Test Mode: IEEE 802.11n HT20 2437MHz

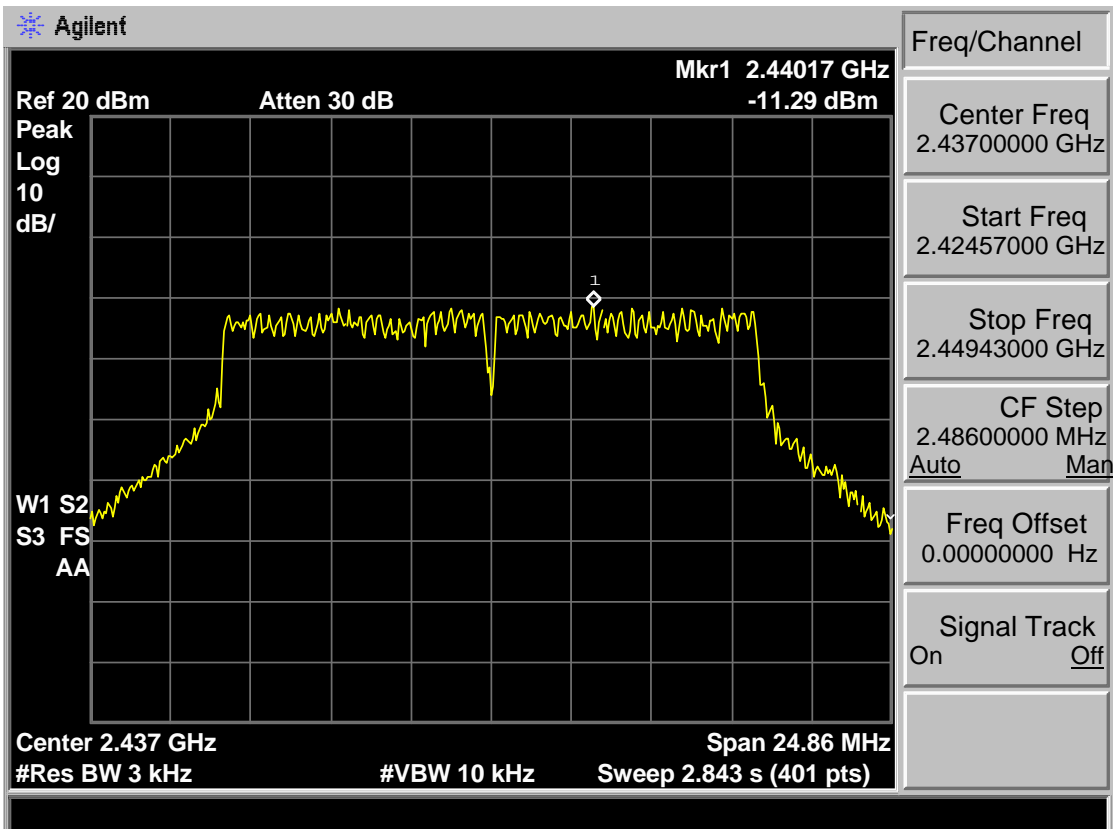


Test Mode: IEEE 802.11n HT20 2462MHz

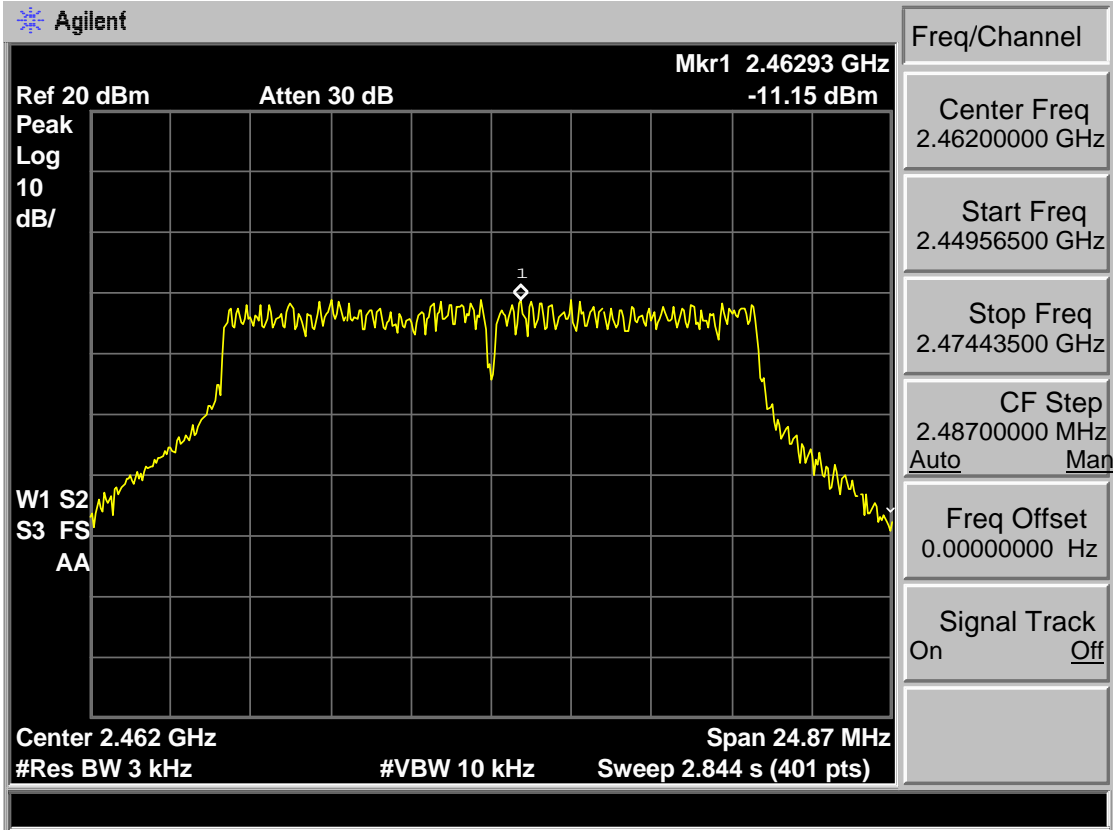


Test Mode: IEEE 802.11n HT40 2422MHz

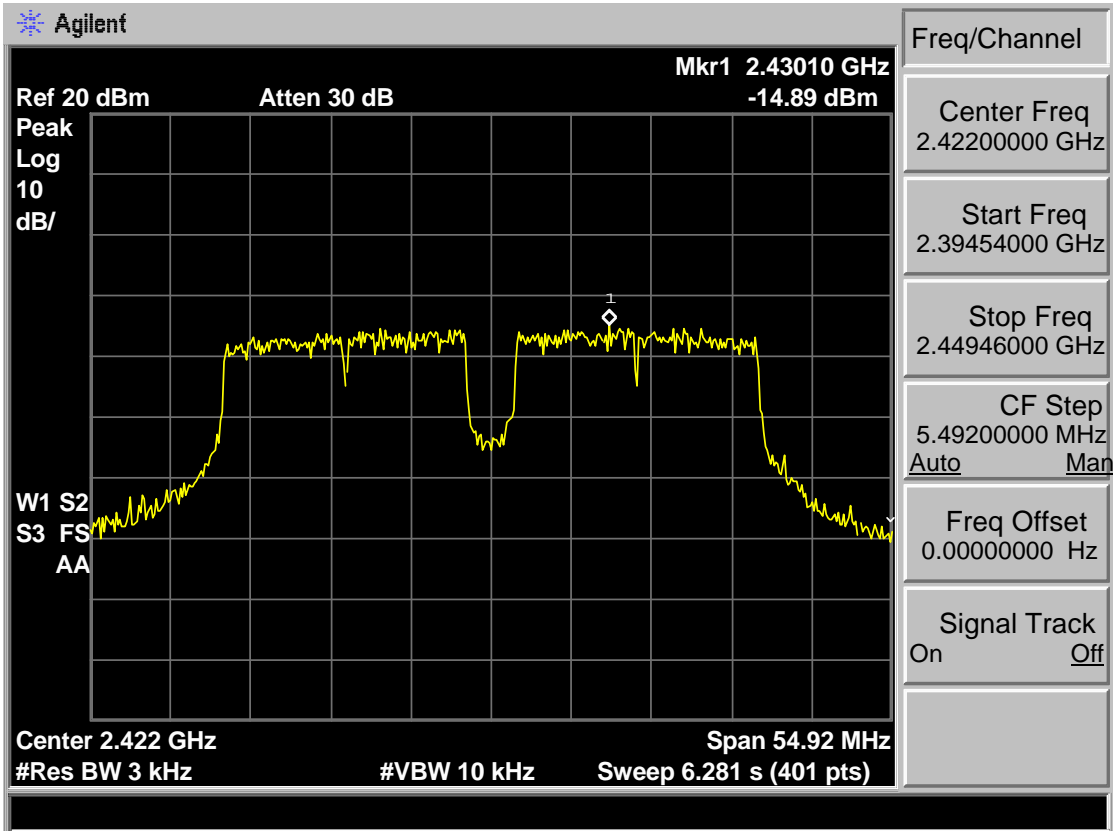

Test Mode: IEEE 802.11n HT40 2437MHz

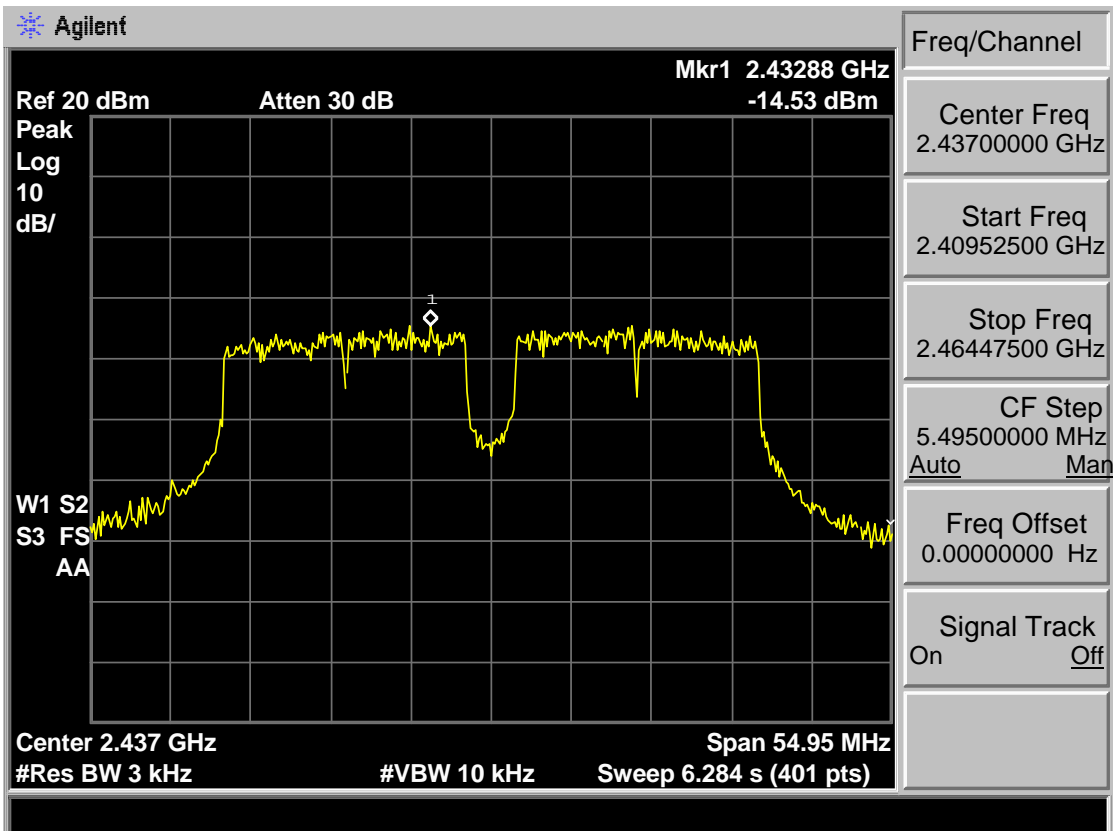

Test Mode: IEEE 802.11n HT40 2452MHz

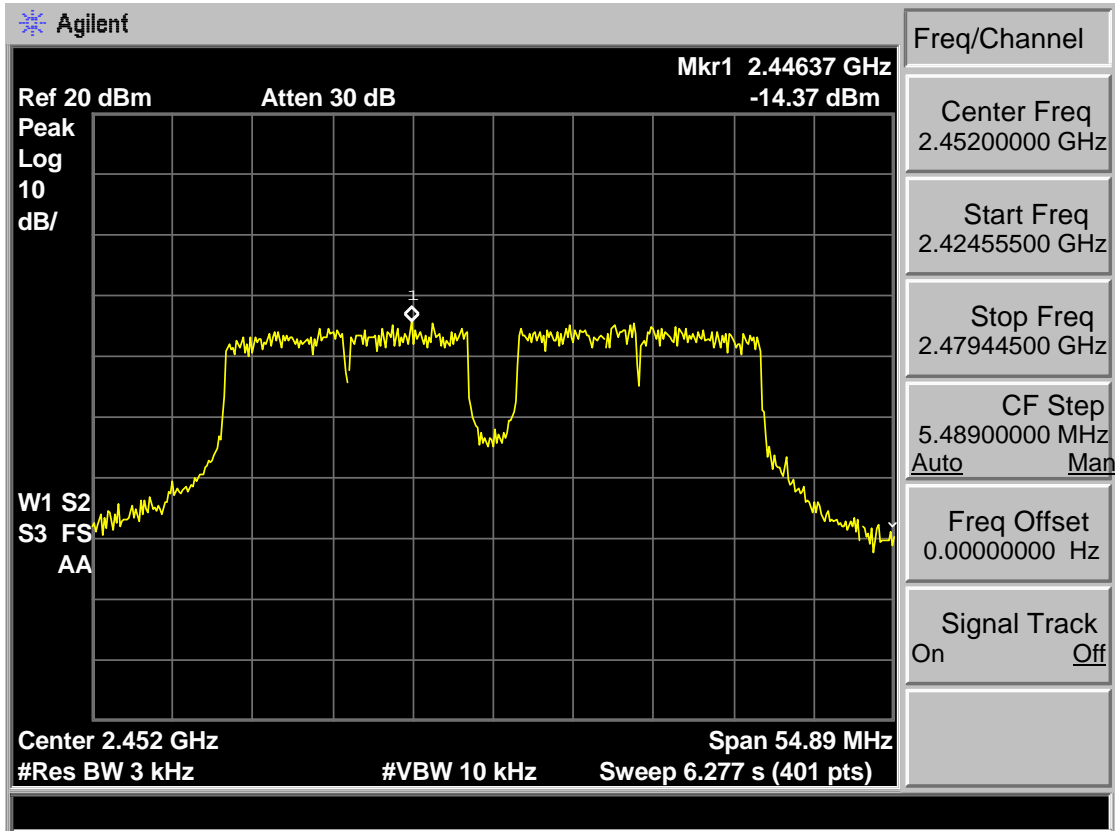

## 9 ANTENNA REQUIREMENTS

### 9.1 Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 9.2 Result

The antennas used for this product are Integral antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 2 dBi.

# 10 TEST SETUP PHOTO

Conducted Test



Radiated Test (30-1000 MHz)



Radiated Test (1000-25000 MHz)





# 11 PHOTOS OF EUT

**External Photos**  
M/N: SE60FYP1T



**External Photos**  
M/N: SE60FYP1T




**External Photos**  
M/N: SE60FYP1T




**External Photos**  
M/N: SE60FYP1T




**Internal Photos**  
M/N: SE60FYP1T

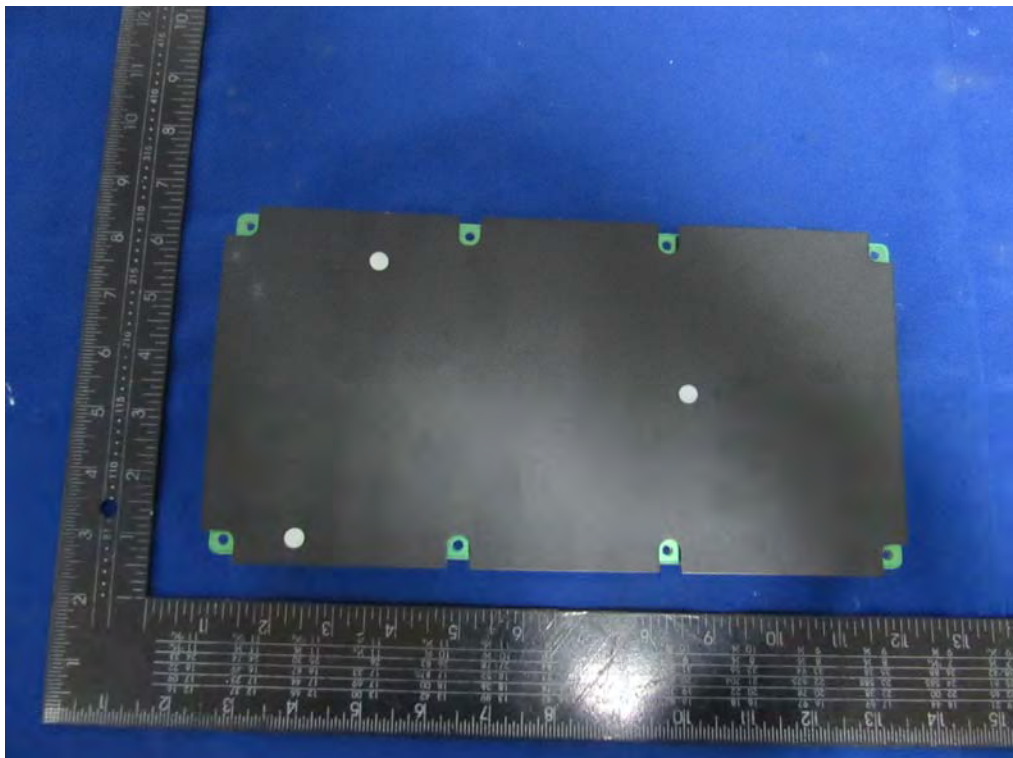



**Internal Photos**  
M/N: SE60FYP1T

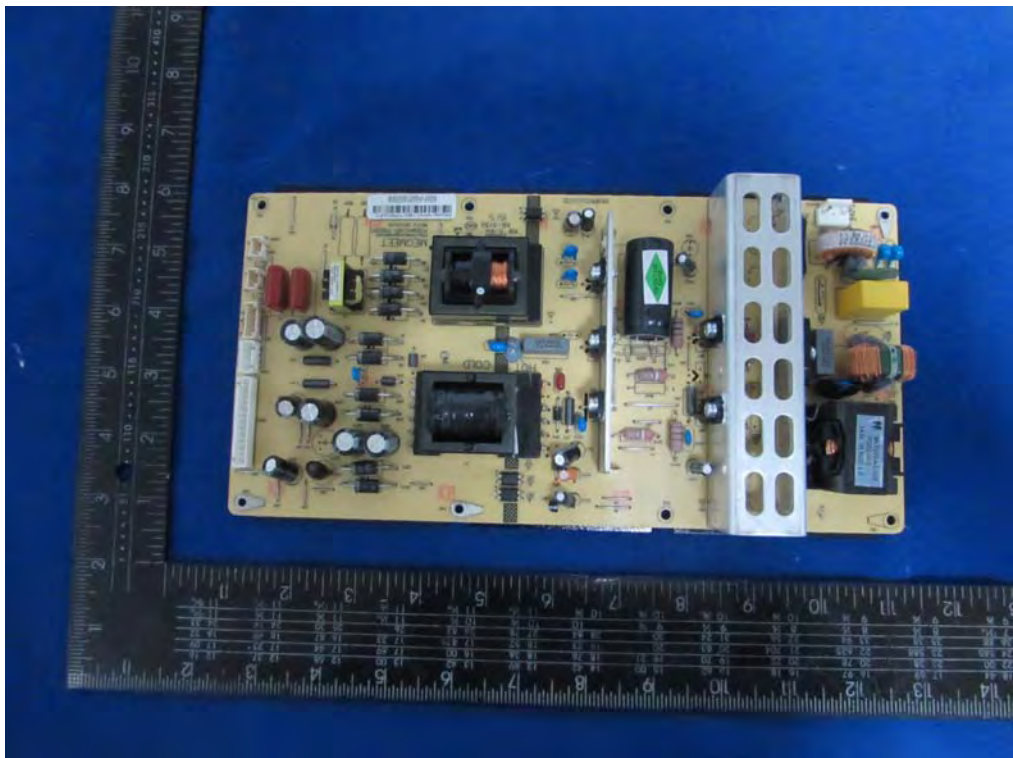

**Internal Photos**  
M/N: SE60FYP1T

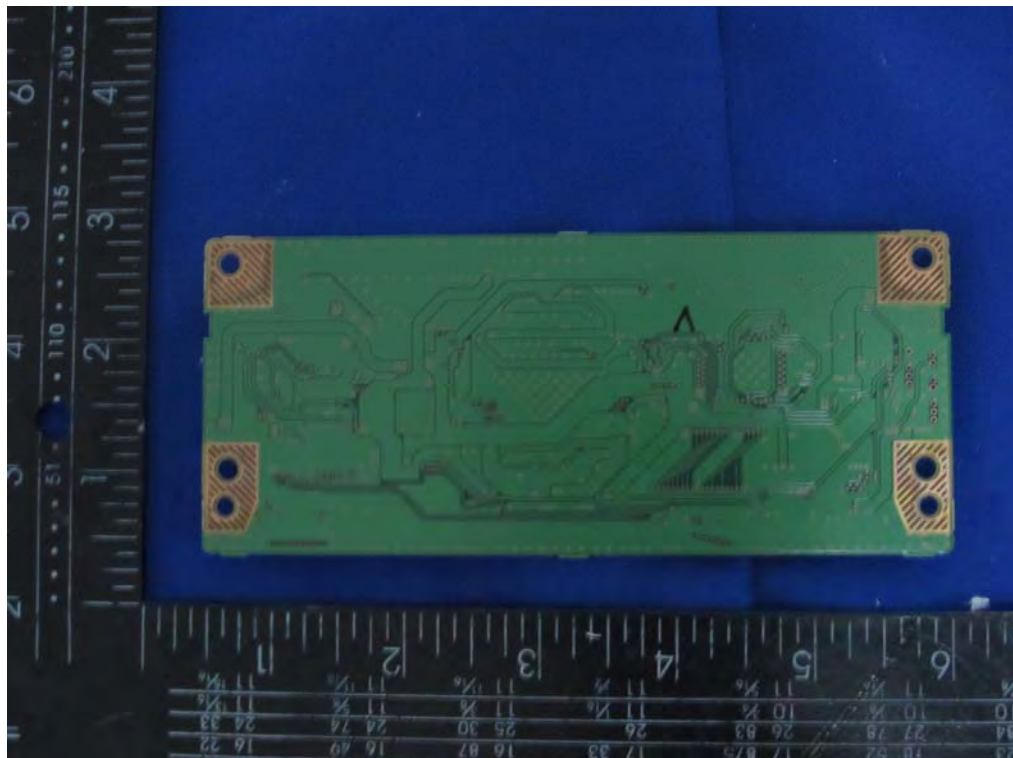


**Internal Photos**  
M/N: SE60FYP1T

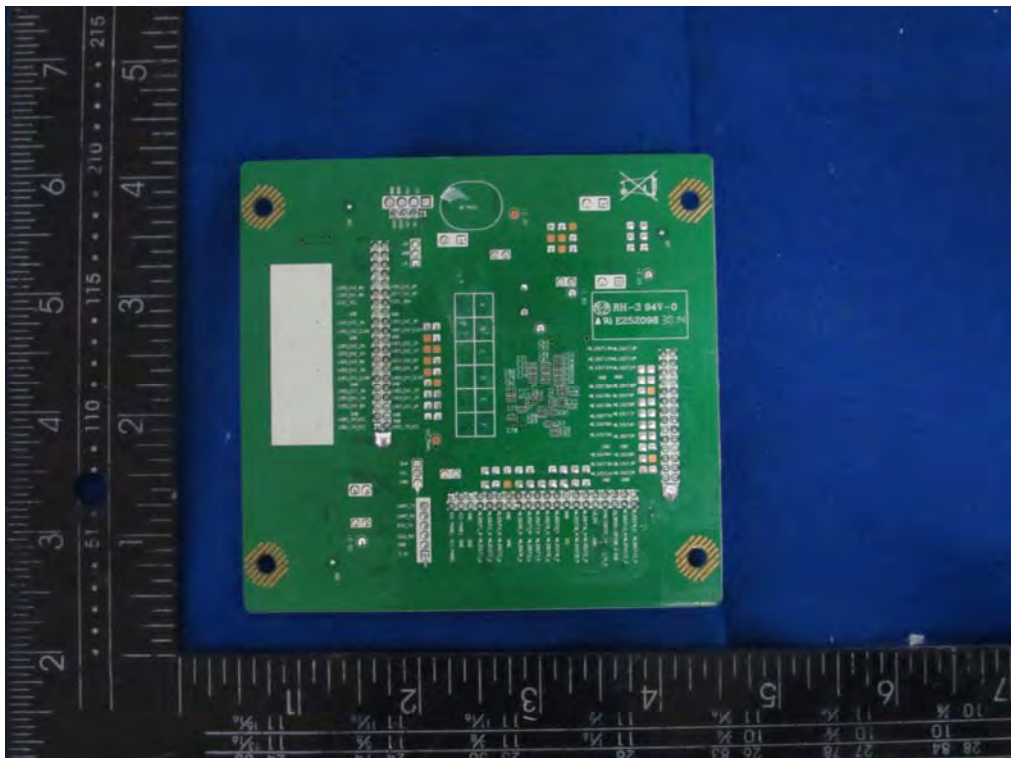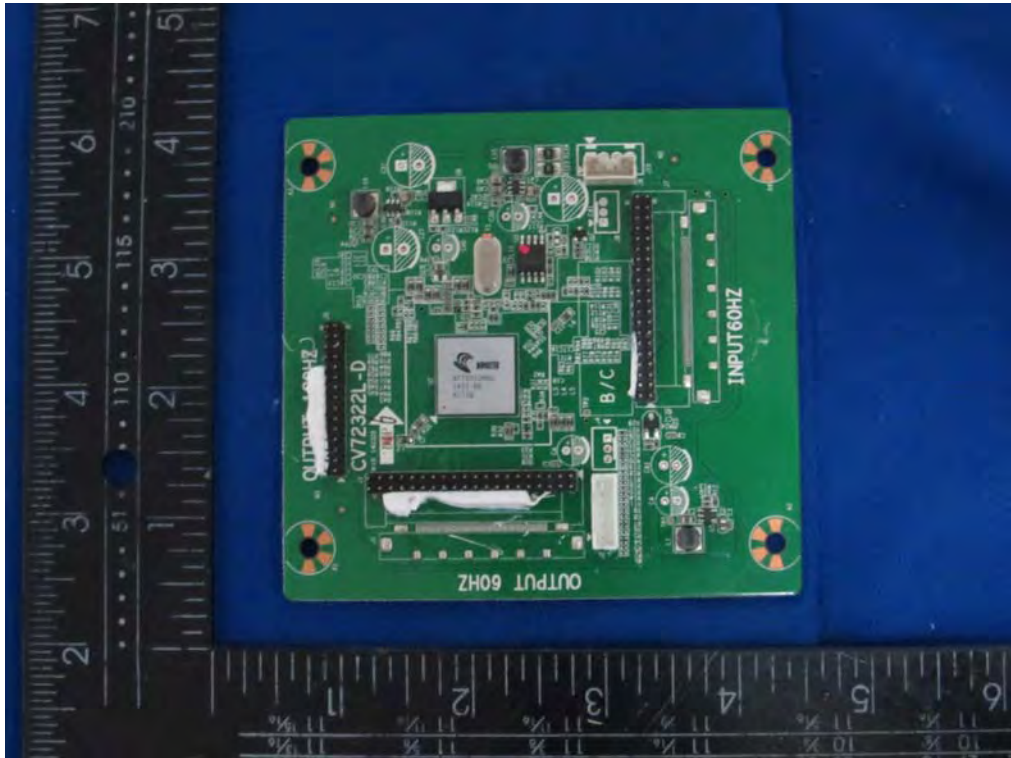




**Internal Photos**  
M/N: SE60FYP1T

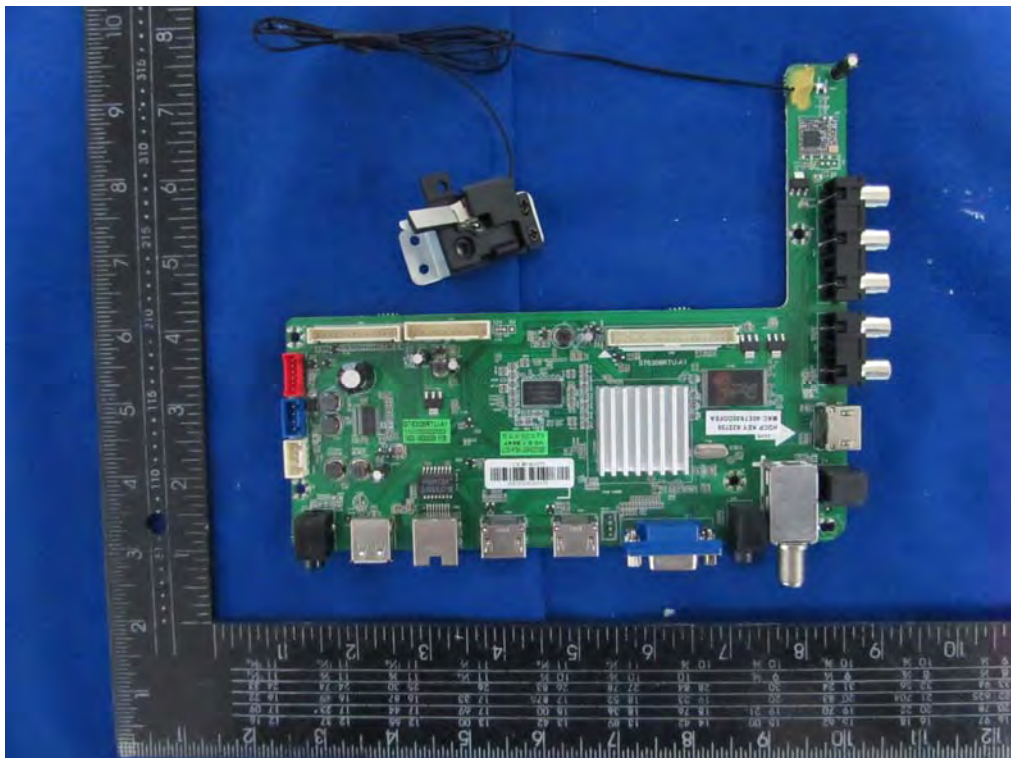

**Internal Photos**  
M/N: SE60FYP1T

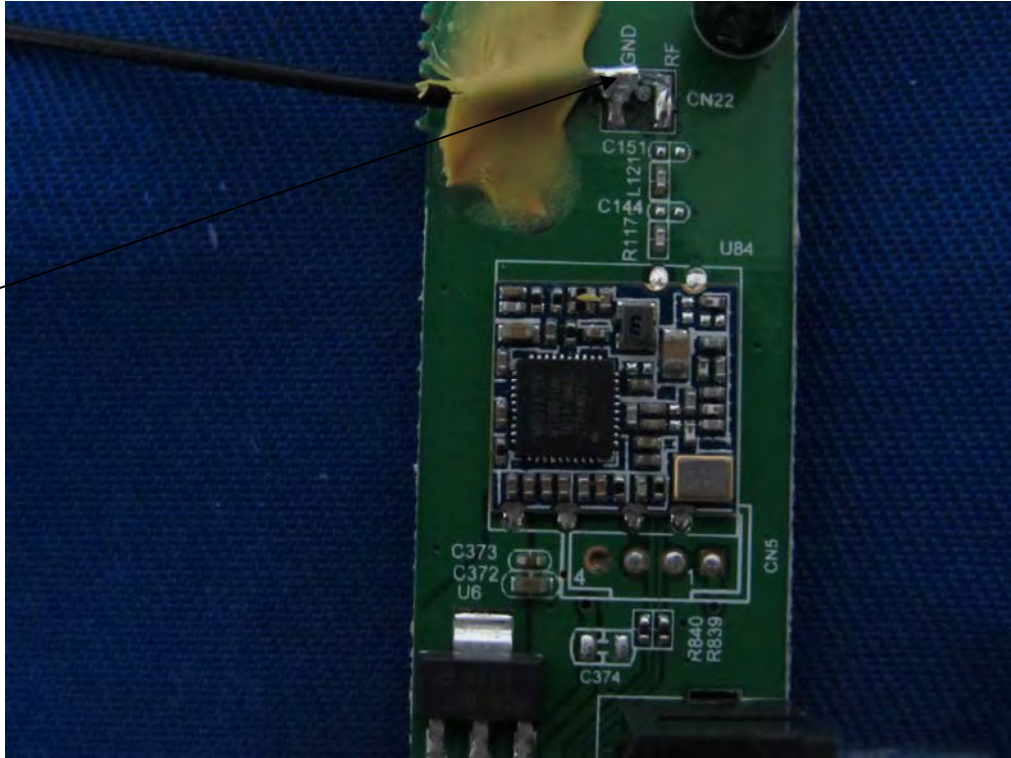

Wifi  
Antenna