

FCC PART 15C TEST REPORT FOR CERTIFICATION  
On Behalf of

Shenyang Tongfang Multimedia Co., Limited

LED TV

Model Number: WE85NC4210

FCC ID: 2ACWIWE85NC421

Prepared for : Shenyang Tongfang Multimedia Co., Limited  
No. 10 Nanping East Road HunNan New District Shenyang,  
LiaoNing Province P.R. China

Prepared By : EST Technology Co., Ltd.  
Santun(guantai Road), Houjie Town, DongGuan City,  
GuangDong, China.

Tel: 86-769-83081888-808



Report Number: ESTE-R1506037  
Date of Test : June 01~June 13, 2015  
Date of Report : June 15, 2015

# TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
2. SUMMARY OF TEST.....	6
2.1. Summary of test result.....	6
2.2. Test Facilities.....	7
2.3. Assistant equipment used for test.....	8
2.4. Block Diagram.....	8
2.5. Test mode.....	9
2.6. Channel List for wifi.....	9
2.7. Test Equipment.....	10
3. POWER LINE CONDUCTED EMISSION TEST.....	11
3.1. Limit.....	11
3.3. Test Procedure.....	11
3.4. Test Result.....	11
3.5. Test data.....	12
4. RADIATED EMISSION TEST.....	16
4.1. Limit.....	16
4.2. Block Diagram of Test setup.....	17
4.3. Test Procedure.....	18
4.4. Test Result.....	18
4.5. Test Data.....	19
5. BAND EDGE COMPLIANCE TEST.....	163
5.1. Limit.....	163
5.2. Test Procedure.....	163
5.3. Test Result.....	163
5.4. Test Data.....	164
6. 6dB & 20dB Bandwidth Test.....	196
6.1. Limit.....	196
6.2. Test Procedure.....	196
6.3. Test Result.....	196
6.4. 6dB Test Data.....	198
6.5. 20dB Test Data.....	214
7. OUTPUT POWER TEST.....	230
7.1. Limit.....	230
7.2. Test Procedure.....	230
7.3. Test Procedure.....	230
7.4. Test Result.....	231
7.5. Test Data.....	233
8. POWER SPECTRAL DENSITY TEST.....	249
8.1. Limit.....	249
8.2. Test Procedure.....	249

8.3	Test Result.....	250
8.4	Test Data .....	252
9	ANTENNA REQUIREMENTS .....	268
9.1	Limit .....	268
9.2	Result.....	268
10	TEST SETUP PHOTO.....	269
11	PHOTOS OF EUT .....	271

### Test Report Verification

<b>Applicant: Address:</b>	Shenyang Tongfang Multimedia Co., Limited No. 10 Nanping East Road HunNan New District Shenyang,LiaoNing Province P.R. China		
<b>Manufacturer Address:</b>	Shenyang Tongfang Multimedia Co., Limited No. 10 Nanping East Road HunNan New District Shenyang,LiaoNing Province P.R. China		
<b>Factory Address:</b>	Shenyang Tongfang Multimedia Co., Limited No. 10 Nanping East Road HunNan New District Shenyang,LiaoNing Province P.R. China		
<b>E.U.T:</b>	LED TV		
<b>Model Number:</b>	WE85NC4210		
<b>Power Supply:</b>	AC 100~240V;50/60Hz		
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Trade Name:</b>	Westinghouse	Serial No.:	-----
<b>Date of Receipt:</b>	June 01, 2015	Date of Test:	June 01~June 13,2015
<b>Test Specification:</b>	FCC Rules and Regulations Part 15 Subpart C:2014 ANSI C63.10:2013		
<b>Test Result:</b>	<p>The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.</p> <p>This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: June 15, 2015</p>		
Prepared by:	Tested by:	Approved by:	
			
Ada / Assistant	Tony.Tang/ Engineer	IcemanHu / Manager	
<b>Other Aspects:</b>	None.		
Abbreviations: OK/P=passed    fail/F=failed    n.a/N=not applicable    E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			



# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

Product Name	:	LED TV
Model Number	:	WE85NC4210
Modulation	:	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Operation Frequency	:	IEEE 802.11b/g: 2412 ~ 2472 MHz IEEE 802.11n HT20 : 2412 ~ 2472 MHz IEEE 802.11n HT40 : 2422 ~ 2462 MHz
Number of channel	:	IEEE 802.11b: 13 Channels IEEE 802.11g: 13 Channels IEEE 802.11n HT20: 13 Channels IEEE 802.11n HT40: 9 Channels
Antenna a and Gain	:	PCB Antenna with 2dBi gain (Max)
Antenna b and Gain	:	PCB Antenna with 2dBi gain (Max)

## 2. SUMMARY OF TEST

### 2.1. Summary of test result

Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10:2013	PASS
Radiated Emission	FCC Part 15: 15.209 ANSI C63.10:2013 KDB 558074	PASS
Band Edge Compliance	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Conducted spurious emissions	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
6dB Bandwidth	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Power Spectral Density	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
Note: 558074 D01 DTS Meas Guidance v03r02		

## 2.2. Test Facilities


EMC Lab	:	Certificated by CNAL, CHINA Registration No.: L5288 Date of registration: November 13, 2014
		Certificated by FCC, USA Registration No.: 989591 Date of registration: November 20, 2013
		Certificated by Industry Canada Registration No.: 9405A-1 Date of registration: January 03, 2013
		Certificated by VCCI, Japan Registration No.: R-3663 & C-4103 Date of registration: July 25, 2011
		Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: January 07, 2011
		Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011
		Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L1-18 Date of registration: April 28, 2011
		Certificated by Siemic, Inc. Registration No.: SLCN021 Date of registration: November 8, 2011
		Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	San Tun Management Zone, Houjie Town, Dongguan, Guangdong, China

### 2.3. Assistant equipment used for test

2.3.1. N/A

### 2.4. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 meter high above ground. EUT was set into Wifi test mode by software before test.



(EUT: LED TV)



### 2.5. Test mode

A special test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode and data rate.

Test mode	Lower channel	Center channel	Upper channel
IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20 Transmitting	2412MHz	2442MHz	2472MHz
IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20 Receiving	2412MHz	2442MHz	2472MHz
IEEE 802.11n HT40 Transmitting	2422MHz	2442MHz	2462MHz
IEEE 802.11n HT40 Receiving	2422MHz	2442MHz	2462MHz

### 2.6. Channel List for wifi

IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442	12	2467
3	2422	8	2447	13	2472
4	2427	9	2452		
5	2432	10	2457		
IEEE 802.11n HT40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	4	2437	7	2452
2	2427	5	2442	8	2457
3	2432	6	2447	9	2462

## 2.7. Test Equipment

### 2.7.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	June,28,14	1 Year
Artificial Mains Networ	Rohde & Schwarz	ENV216	101260	June,28,14	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	June,28,14	1 Year

### 2.7.2. For radiated emission test(30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	June,28,14	1 Year
Spectrum Analyzer	Agilent	E4411B	MY5014069 7	June,28,14	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	June,28,14	1 Year
Signal Amplifier	Agilent	310N	187037	June,28,14	1 Year

### 2.7.3. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	BBHA9120D1 002	June,28,14	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	9718-212	June,28,14	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	June,28,14	1 Year
RF Cable	Hubersuhner	RG 214/U	513423	June,28,14	1 Year

### 3 POWER LINE CONDUCTED EMISSION TEST

#### 3.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB( $\mu$ V)	Average Level dB( $\mu$ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

#### 3.3 Test Procedure

The EUT was placed on a non-metallic table, 10cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Result


**PASS.** (All emissions not reported below are too low against the prescribed limits.)

### 3.5. Test data

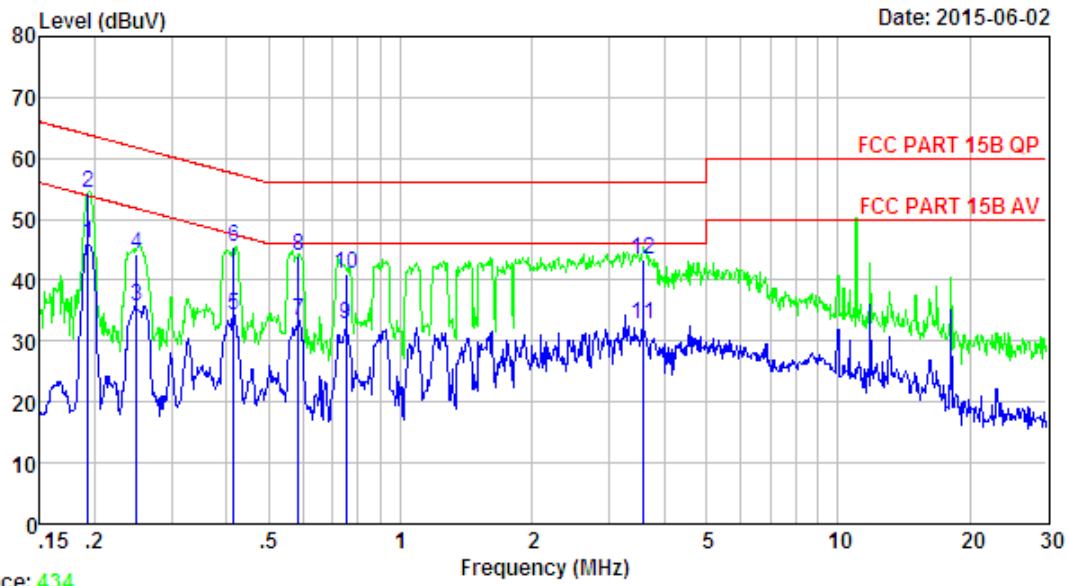


Site no : 844 Shield Room  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa LINE  
 Limit : FCC PART 15B QP  
 Engineer : Tony  
 EUT : LED TV  
 M/N : AC 120V/60Hz  
 Power : WE85NC4210  
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuv)	Limits (dBuv)	Margin (dB)	Remark
1	0.19	9.61	9.80	26.53	45.94	53.89	7.95	Average
2	0.19	9.61	9.80	34.79	54.20	63.89	9.69	QP
3	0.25	9.61	9.82	16.37	35.80	51.78	15.98	Average
4	0.25	9.61	9.82	24.87	44.30	61.78	17.48	QP
5	0.41	9.61	9.81	14.94	34.36	47.55	13.19	Average
6	0.41	9.61	9.81	26.18	45.60	57.55	11.95	QP
7	0.59	9.60	9.82	14.06	33.48	46.00	12.52	Average
8	0.59	9.60	9.82	24.56	43.98	56.00	12.02	QP
9	0.75	9.60	9.81	13.40	32.81	46.00	13.19	Average
10	0.75	9.60	9.81	21.59	41.00	56.00	15.00	QP
11	3.58	9.64	9.84	13.25	32.73	46.00	13.27	Average
12	3.58	9.64	9.84	23.82	43.30	56.00	12.70	QP

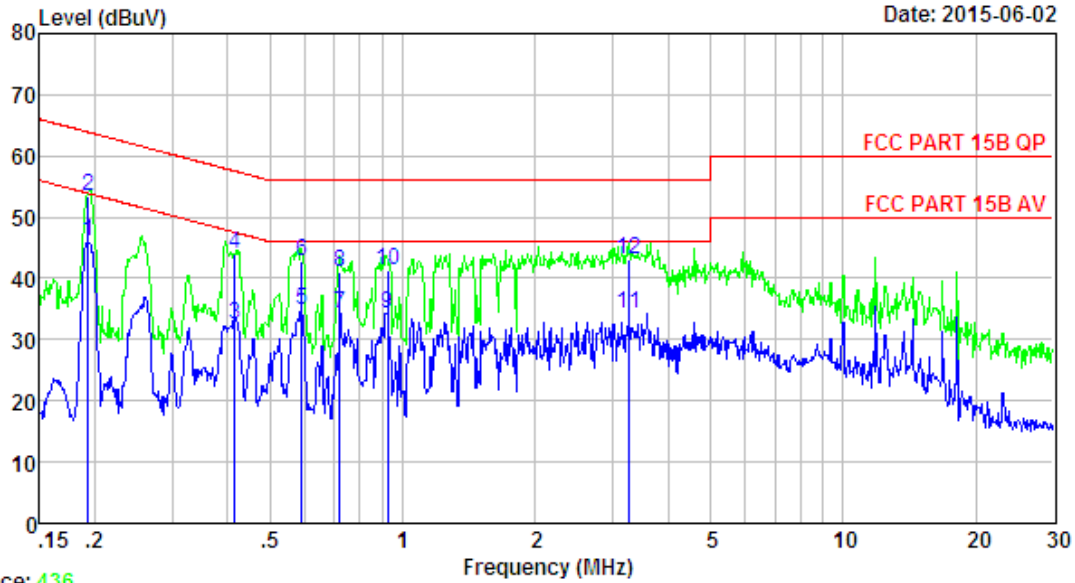

Trace: 436  
 Site no : 844 Shield Room  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa NEUTRAL  
 Limit : FCC PART 15B QP  
 Engineer : Tony  
 EUT : LED TV  
 M/N : AC 120V/60Hz  
 Power : WE85NC4210  
 Test Mode : TX Mode


	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.19	9.58	9.80	26.59	45.97	53.89	7.92	Average
2	0.19	9.58	9.80	33.92	53.30	63.89	10.59	QP
3	0.41	9.59	9.81	13.13	32.53	47.55	15.02	Average
4	0.41	9.59	9.81	24.60	44.00	57.55	13.55	QP
5	0.59	9.61	9.82	15.42	34.85	46.00	11.15	Average
6	0.59	9.61	9.82	23.37	42.80	56.00	13.20	QP
7	0.72	9.63	9.81	14.80	34.24	46.00	11.76	Average
8	0.72	9.63	9.81	21.56	41.00	56.00	15.00	QP
9	0.92	9.61	9.82	14.78	34.21	46.00	11.79	Average
10	0.92	9.61	9.82	21.77	41.20	56.00	14.80	QP
11	3.28	9.64	9.84	14.78	34.26	46.00	11.74	Average
12	3.28	9.64	9.84	23.62	43.10	56.00	12.90	QP

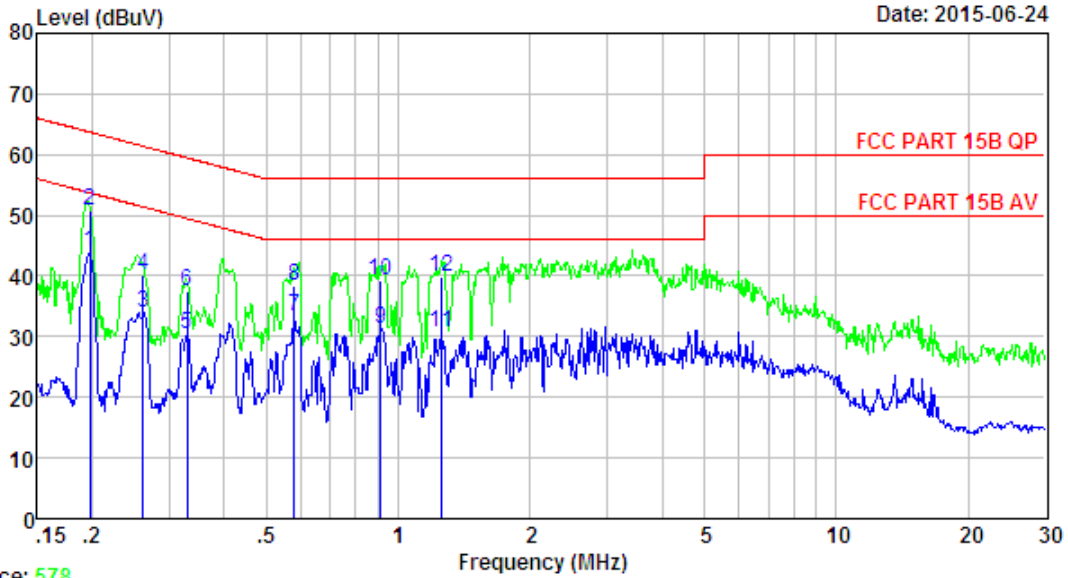

Trace: 578

Site no : 844 Shield Room Data no. : 579  
 Env. / Ins. : Temp:24.3'C Humi:58% Press:101.50kPa LINE Phase : LINE  
 Limit : FCC PART 15B QP  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 240V/60Hz  
 M/N : WE85NC4210  
 Test Mode : TX Mode

	Freq. (MHz)	Lien Factor (db)	Cable Loss (db)	Reading dBuV	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.198	9.61	9.80	24.45	43.86	53.71	9.85	Average
2	0.198	9.61	9.80	31.45	50.86	63.71	12.85	QP
3	0.262	9.61	9.82	14.65	34.08	51.38	17.30	Average
4	0.262	9.61	9.82	20.65	40.08	61.38	21.30	QP
5	0.330	9.61	9.83	11.07	30.51	49.44	18.93	Average
6	0.330	9.61	9.83	18.07	37.51	59.44	21.93	QP
7	0.579	9.60	9.82	13.98	33.40	46.00	12.60	Average
8	0.579	9.60	9.82	18.98	38.40	56.00	17.60	QP
9	0.914	9.63	9.82	11.73	31.18	46.00	14.82	Average
10	0.914	9.63	9.82	19.73	39.18	56.00	16.82	QP
11	1.249	9.63	9.82	11.30	30.75	46.00	15.25	Average
12	1.249	9.63	9.82	20.30	39.75	56.00	16.25	QP

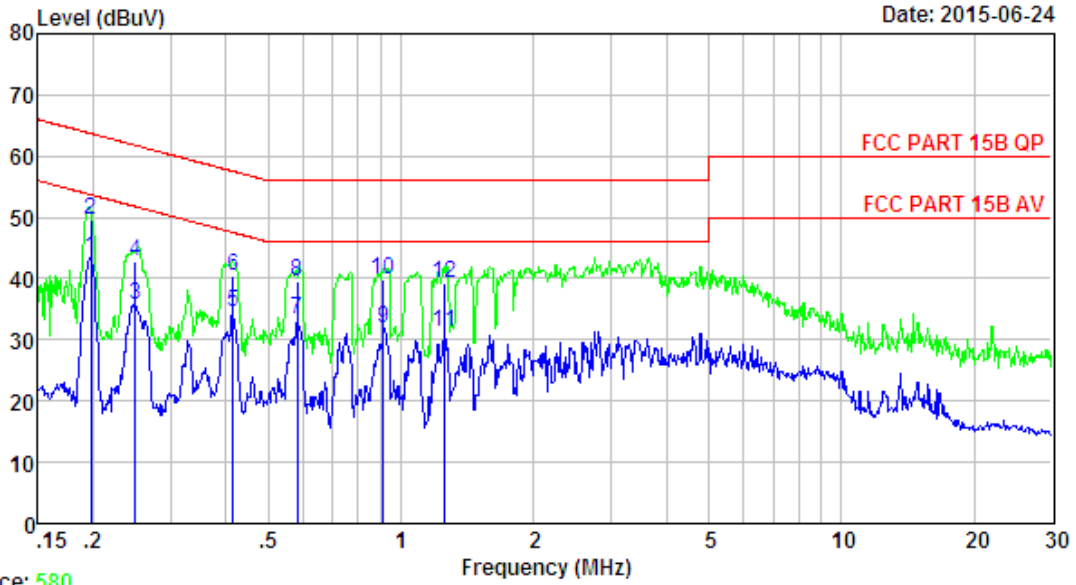

Trace: 580  
 Site no : 844 Shield Room Data no. : 581  
 Env. / Ins. : Temp:24.3'C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL  
 Limit : FCC PART 15B QP  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 240V/60Hz  
 M/N : WE85NC4210  
 Test Mode : TX Mode

	Freq. (MHz)	Lisn Factor (db)	Cable Loss (db)	Reading dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.198	9.60	9.80	24.10	43.50	53.71	10.21	Average
2	0.198	9.60	9.80	30.10	49.50	63.71	14.21	QP
3	0.249	9.60	9.82	16.34	35.76	51.78	16.02	Average
4	0.249	9.60	9.82	23.34	42.76	61.78	19.02	QP
5	0.415	9.59	9.81	15.11	34.51	47.55	13.04	Average
6	0.415	9.59	9.81	21.11	40.51	57.55	17.04	QP
7	0.582	9.61	9.82	14.07	33.50	46.00	12.50	Average
8	0.582	9.61	9.82	20.07	39.50	56.00	16.50	QP
9	0.914	9.61	9.82	12.31	31.74	46.00	14.26	Average
10	0.914	9.61	9.82	20.31	39.74	56.00	16.26	QP
11	1.249	9.61	9.82	11.92	31.35	46.00	14.65	Average
12	1.249	9.61	9.82	19.92	39.35	56.00	16.65	QP

## 4 RADIATED EMISSION TEST

### 4.1 Limit

#### 4.1.1 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

- Remark : (1) Emission level dBμV = 20 log Emission level μV/m  
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

#### 4.1.2 15.205 Restricted bands of operation


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.




### 4.2. Block Diagram of Test setup

30~1000MHz

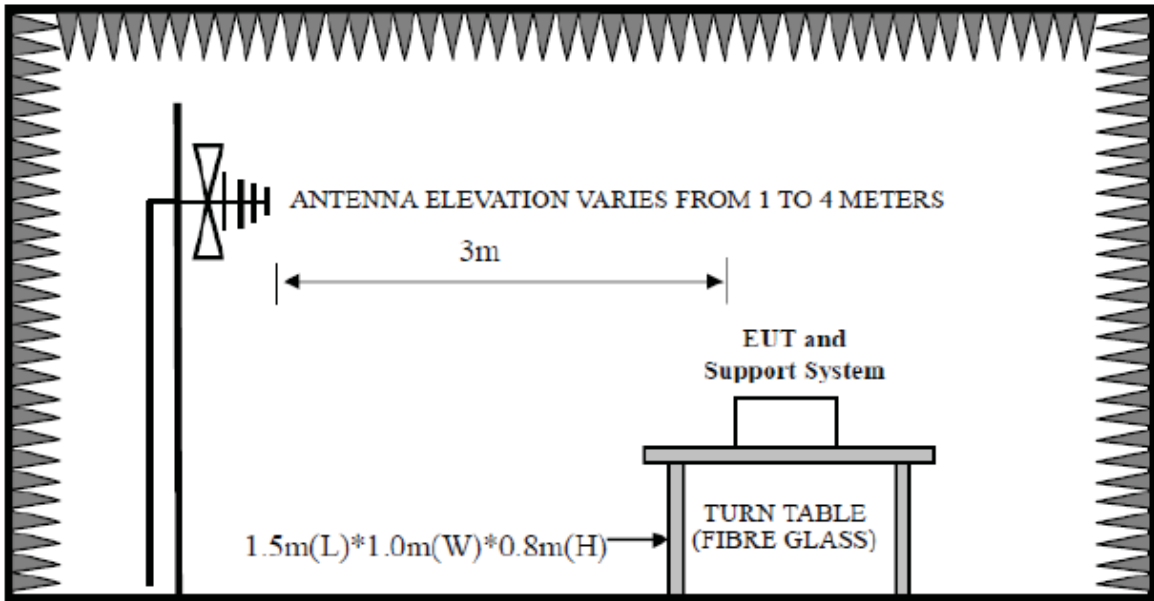

Above 1GHz

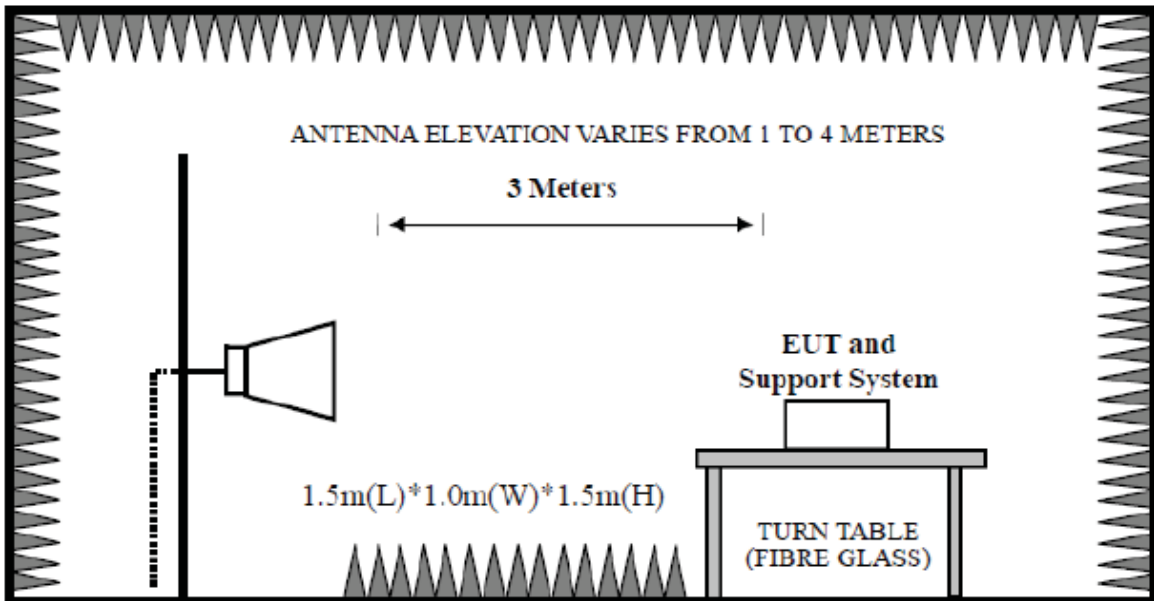

### 4.3. Test Procedure

EUT and its simulators are placed on a turn table, which is 1.5 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

PEAK detector, 1MHz/1MHz for PAEK measurement,

PEAK detector, 1MHz/10Hz for Average measurement

The frequency range from 30MHz to 10<sup>th</sup> harmonic (25GHz) are checked.

### 4.4. Test Result

**PASS.**


All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2412MHz 、 2422MHz、 2442MHz、 2462MHz and 2472 MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

### 4.5. Test Data


30-1000 MHz

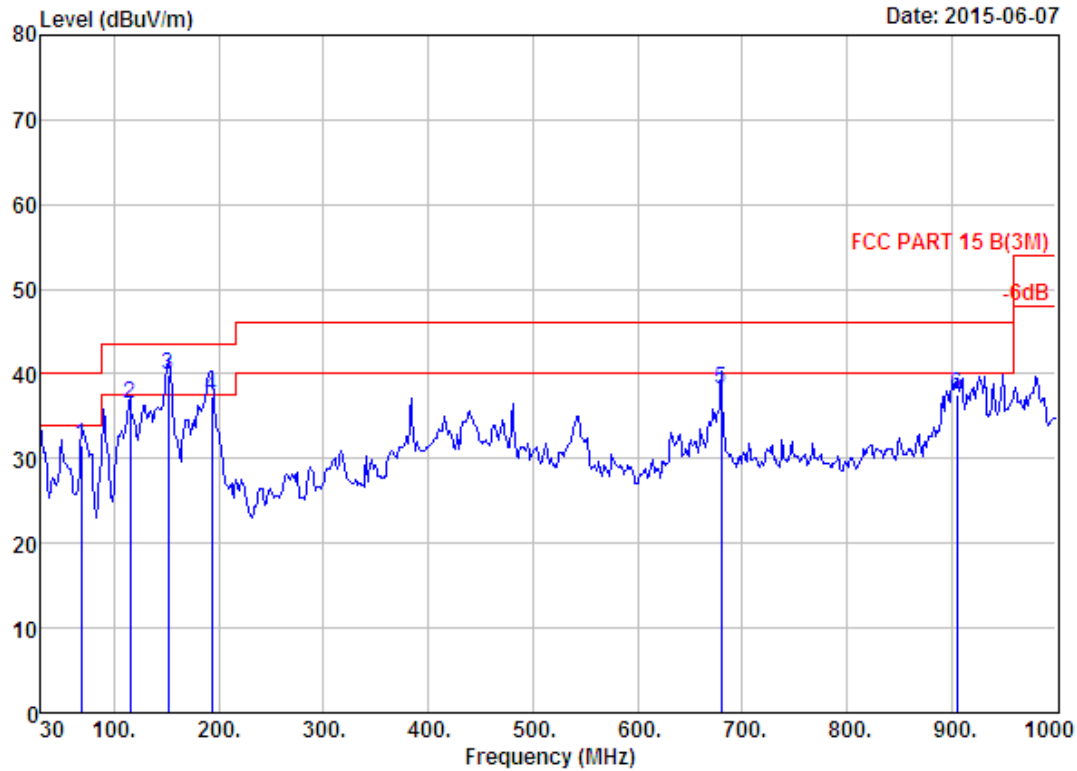

```


Site no.      : 966 1# chamber           Data no.   : 309
Dis. / Ant.   : 3m 27137                Ant. pol.  : VERTICAL
Limit        : FCC PART 15 B(3M)
Env. / Ins.   : Temp:23.6';Humi:56%;Press:101.52kPa
Engineer     : Tony
EUT          : LED TV
Power        : AC 120V/60Hz
M/N          : WE85NC4210
Test Mode    : IEEE 802.11b CH1 2412TX
                Antenna a
    
```

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	68.80	5.51	1.10	25.00	31.61	40.00	8.39	QP
2	115.36	10.93	1.46	24.04	36.43	43.50	7.07	QP
3	151.25	10.82	1.61	27.41	39.84	43.50	3.66	QP
4	192.96	7.85	1.77	27.71	37.33	43.50	6.17	QP
5	679.90	20.29	3.66	14.30	38.25	46.00	7.75	QP
6	904.94	23.40	4.10	9.96	37.46	46.00	8.54	QP

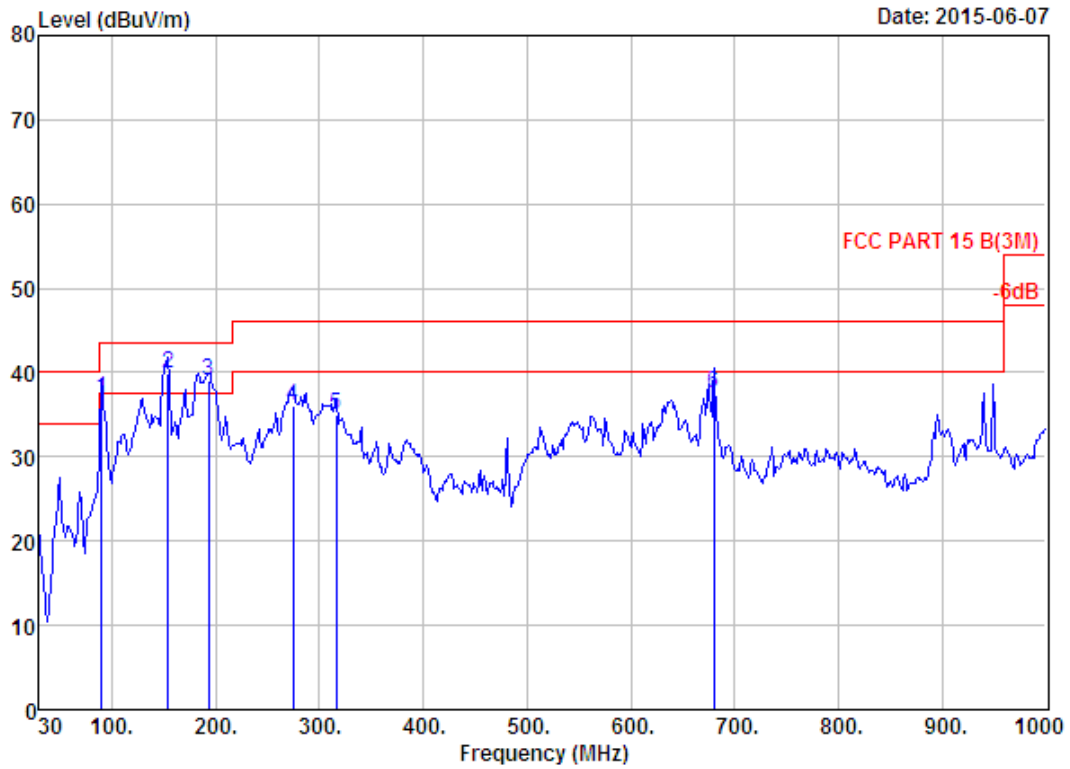


Site no. : 966 1# chamber                      Data no. : 310  
 Dis. / Ant. : 3m 27137                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH1 2412TX  
                     Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	90.14	8.38	1.33	27.26	36.97	43.50	6.53	QP
2	154.16	10.71	1.66	27.49	39.86	43.50	3.64	QP
3	192.96	7.85	1.77	29.34	38.96	43.50	4.54	QP
4	274.44	12.39	2.22	21.55	36.16	46.00	9.84	QP
5	316.15	13.42	2.41	19.09	34.92	46.00	11.08	QP
6	679.90	20.29	3.66	13.59	37.54	46.00	8.46	QP

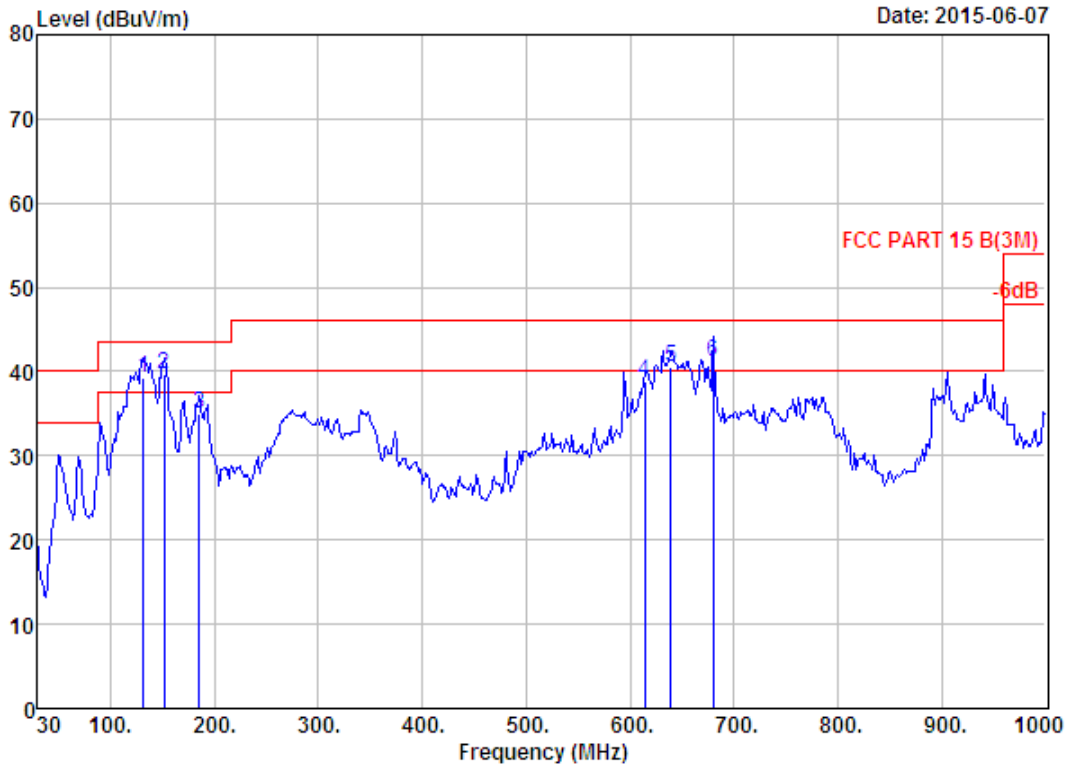


Site no. : 966 1# chamber                      Data no. : 311  
 Dis. / Ant. : 3m 27137                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH7 2442TX  
                     Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	131.85	11.34	1.50	26.47	39.31	43.50	4.19	QP
2	151.25	10.82	1.61	27.18	39.61	43.50	3.89	QP
3	185.20	8.48	1.75	24.83	35.06	43.50	8.44	QP
4	613.94	19.94	3.39	15.57	38.90	46.00	7.10	QP
5	639.16	20.03	3.56	16.95	40.54	46.00	5.46	QP
6	679.90	20.29	3.66	17.24	41.19	46.00	4.81	QP

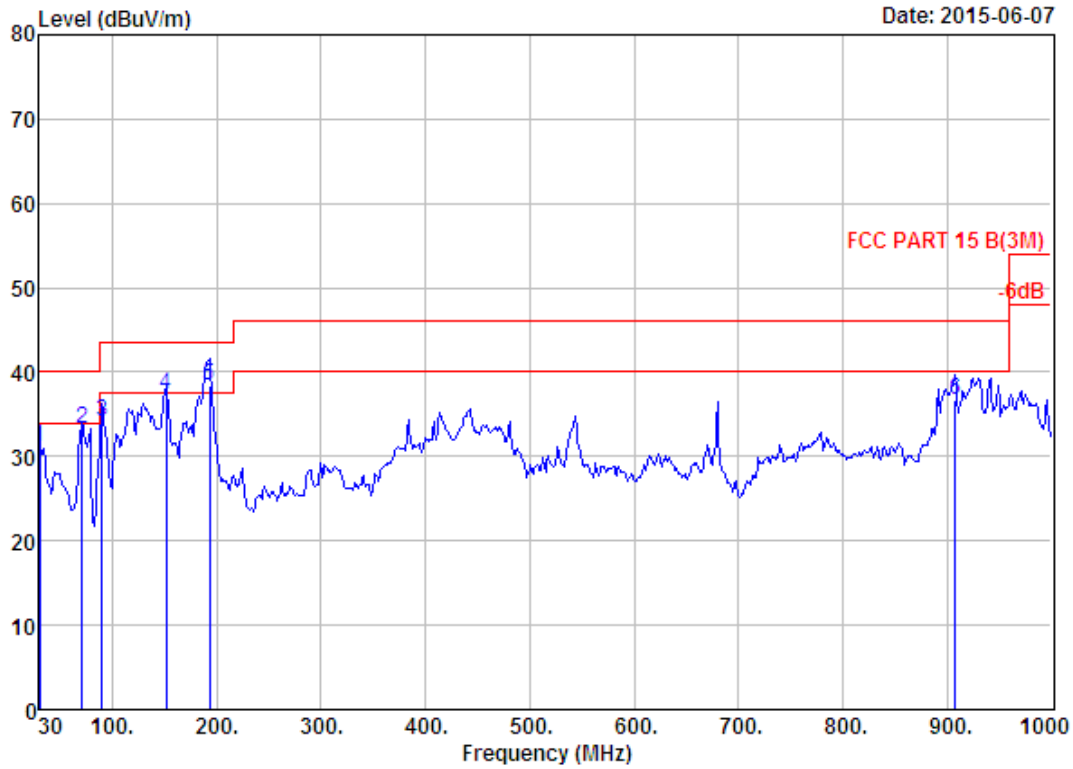

Site no. : 966 1# chamber                      Data no. : 312  
 Dis. / Ant. : 3m 27137                              Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH7 2442TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	12.07	31.23	40.00	8.77	QP
2	70.74	5.82	1.04	26.32	33.18	40.00	6.82	QP
3	90.14	8.38	1.33	24.52	34.23	43.50	9.27	QP
4	151.25	10.82	1.61	24.97	37.40	43.50	6.10	QP
5	192.96	7.85	1.77	28.88	38.50	43.50	5.00	QP
6	907.85	23.48	4.08	9.19	36.75	46.00	9.25	QP

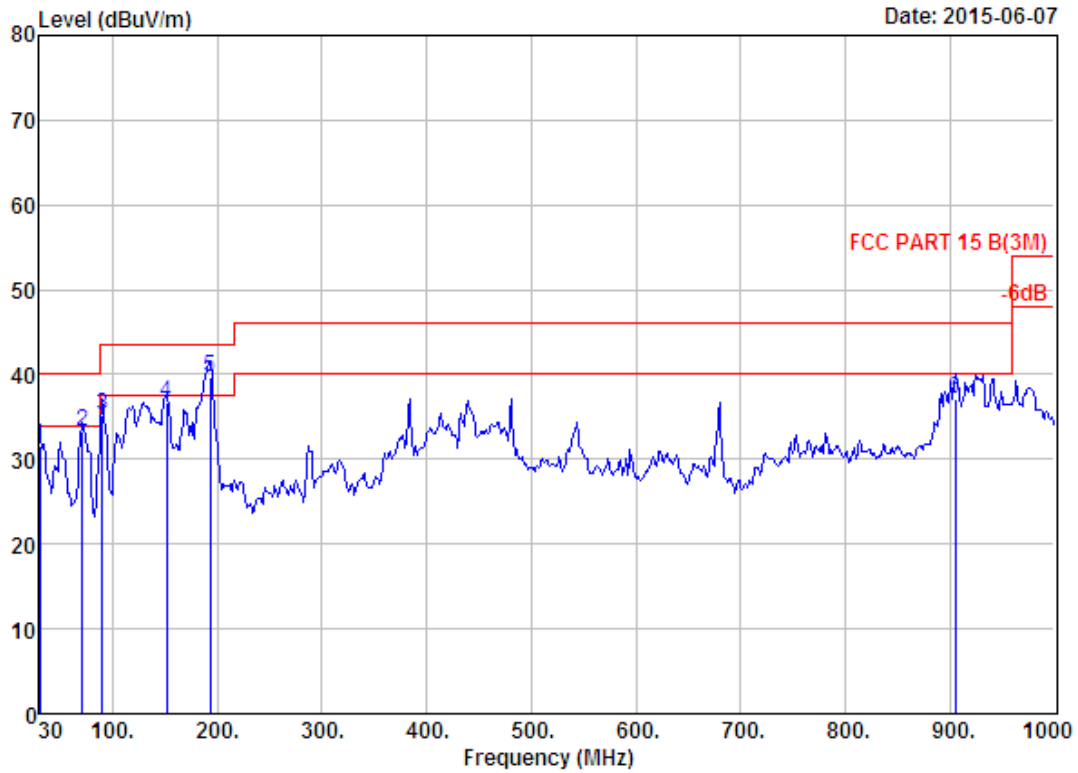


Site no. : 966 1# chamber Data no. : 313  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH13 2472TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	12.44	31.60	40.00	8.40	QP
2	70.74	5.82	1.04	26.48	33.34	40.00	6.66	QP
3	90.14	8.38	1.33	25.43	35.14	43.50	8.36	QP
4	151.25	10.82	1.61	24.35	36.78	43.50	6.72	QP
5	192.96	7.85	1.77	30.00	39.62	43.50	3.88	QP
6	904.94	23.40	4.10	9.53	37.03	46.00	8.97	QP






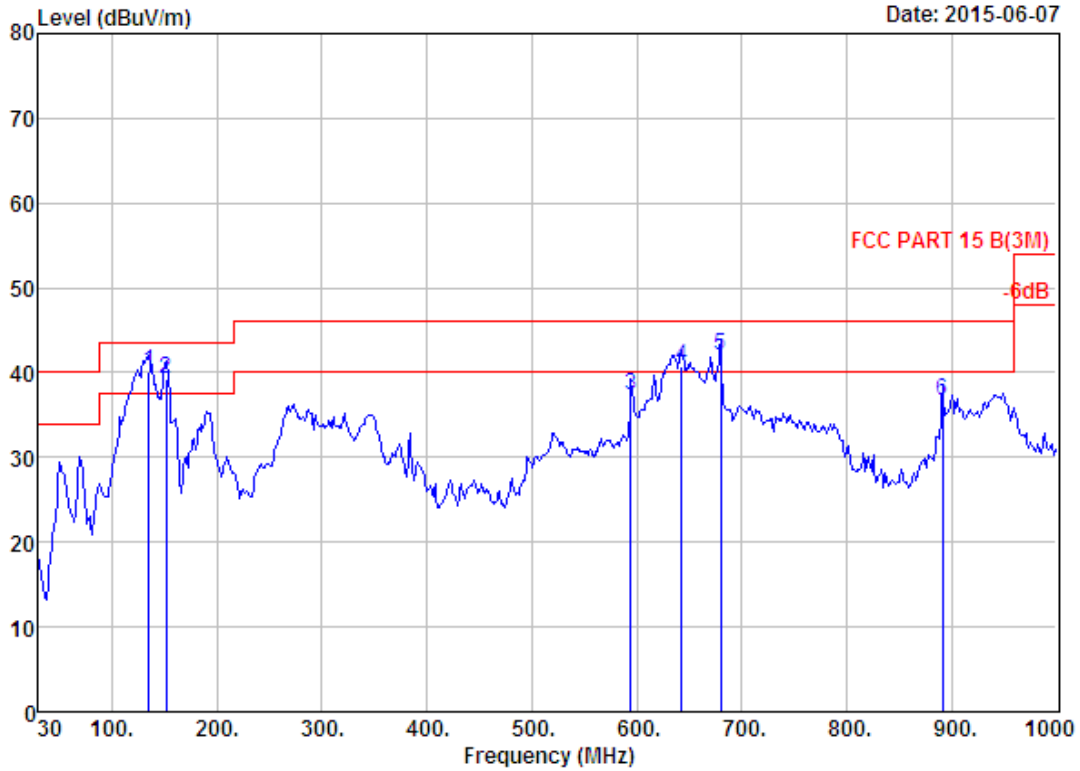


Site no. : 966 1# chamber Data no. : 315  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	134.76	11.37	1.57	27.08	40.02	43.50	3.48	QP
2	151.25	10.82	1.61	26.88	39.31	43.50	4.19	QP
3	594.54	19.51	3.33	14.40	37.24	46.00	8.76	QP
4	643.04	20.04	3.50	17.20	40.74	46.00	5.26	QP
5	679.90	20.29	3.66	18.10	42.05	46.00	3.95	QP
6	891.36	22.89	3.91	9.86	36.66	46.00	9.34	QP

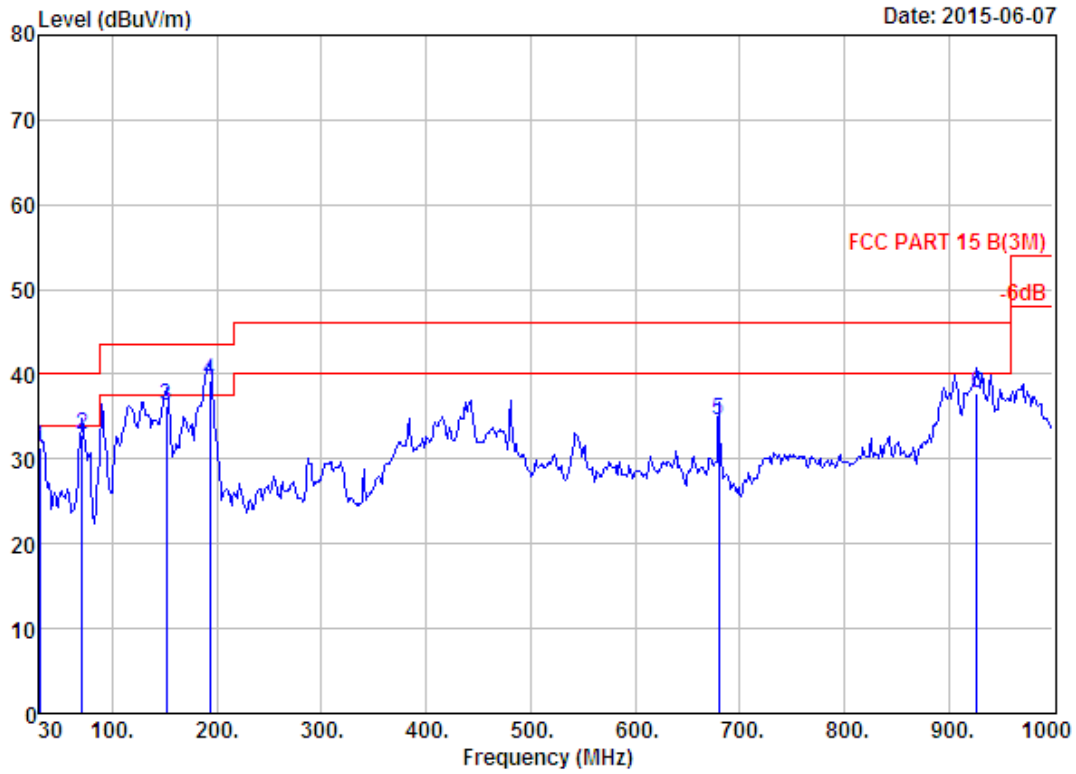


Site no. : 966 1# chamber                      Data no. : 316  
 Dis. / Ant. : 3m 27137                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	12.16	31.32	40.00	8.68	QP
2	70.74	5.82	1.04	25.90	32.76	40.00	7.24	QP
3	151.25	10.82	1.61	23.89	36.32	43.50	7.18	QP
4	192.96	7.85	1.77	29.73	39.35	43.50	4.15	QP
5	679.90	20.29	3.66	10.64	34.59	46.00	11.41	QP
6	927.25	24.27	4.50	8.93	37.70	46.00	8.30	QP

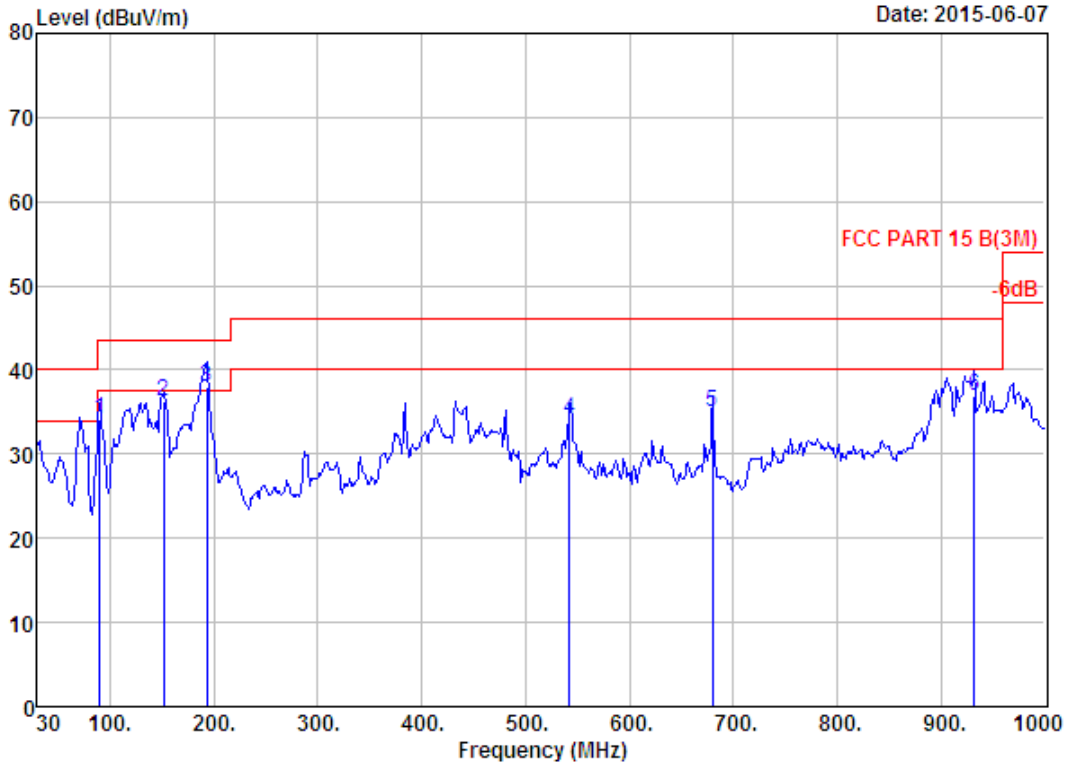


Site no. : 966 1# chamber Data no. : 317  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH7 2442TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	90.14	8.38	1.33	24.37	34.08	43.50	9.42	QP
2	151.25	10.82	1.61	23.85	36.28	43.50	7.22	QP
3	192.96	7.85	1.77	28.42	38.04	43.50	5.46	QP
4	542.16	19.46	3.24	11.40	34.10	46.00	11.90	QP
5	679.90	20.29	3.66	11.00	34.95	46.00	11.05	QP
6	932.10	24.47	4.56	7.81	36.84	46.00	9.16	QP

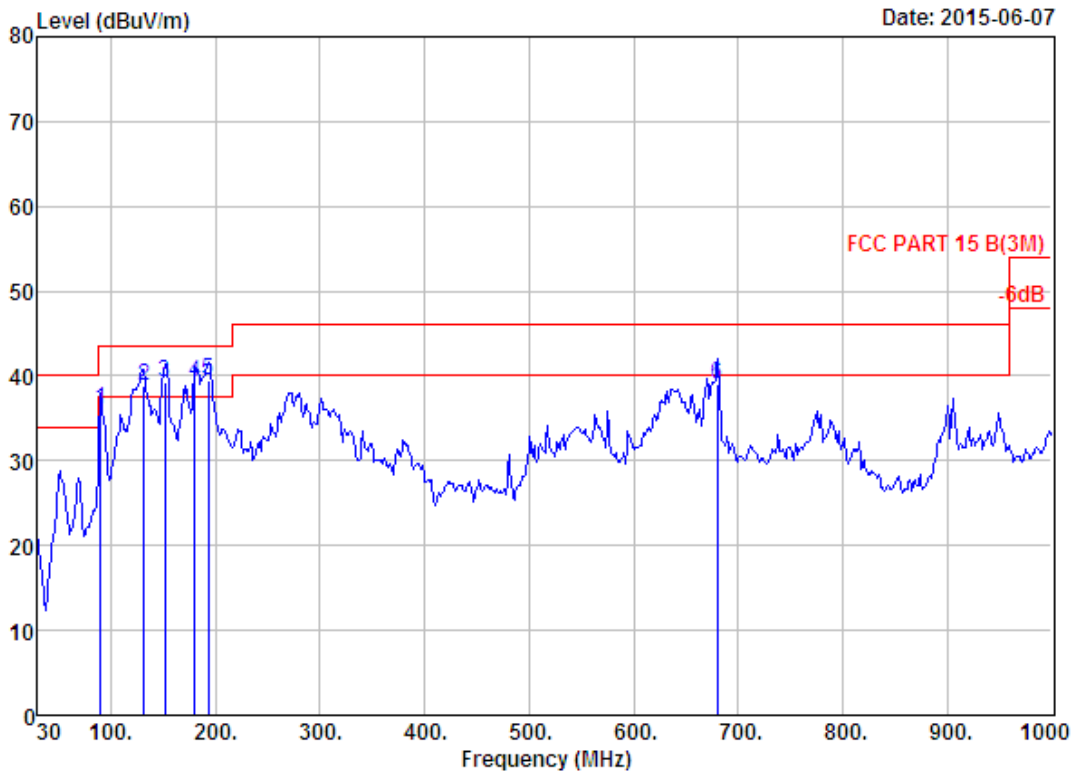


Site no. : 966 1# chamber Data no. : 318  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH7 2442TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	90.14	8.38	1.33	26.32	36.03	43.50	7.47	QP
2	131.85	11.34	1.50	26.00	38.84	43.50	4.66	QP
3	151.25	10.82	1.61	26.92	39.35	43.50	4.15	QP
4	180.35	8.95	1.70	28.54	39.19	43.50	4.31	QP
5	192.96	7.85	1.77	29.90	39.52	43.50	3.98	QP
6	679.90	20.29	3.66	15.15	39.10	46.00	6.90	QP

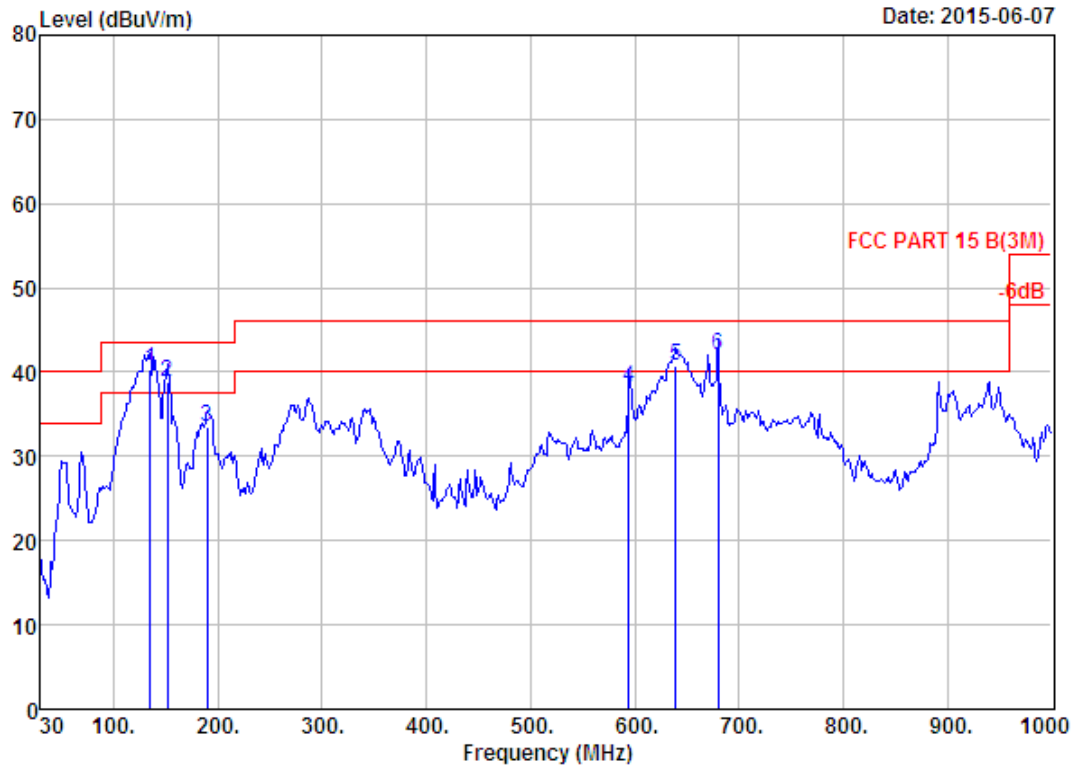


Site no. : 966 1# chamber Data no. : 319  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH13 2472TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	134.76	11.37	1.57	27.39	40.33	43.50	3.17	QP
2	151.25	10.82	1.61	26.44	38.87	43.50	4.63	QP
3	190.05	7.94	1.76	23.76	33.46	43.50	10.04	QP
4	594.54	19.51	3.33	15.43	38.27	46.00	7.73	QP
5	639.16	20.03	3.56	17.24	40.83	46.00	5.17	QP
6	679.90	20.29	3.66	18.08	42.03	46.00	3.97	QP

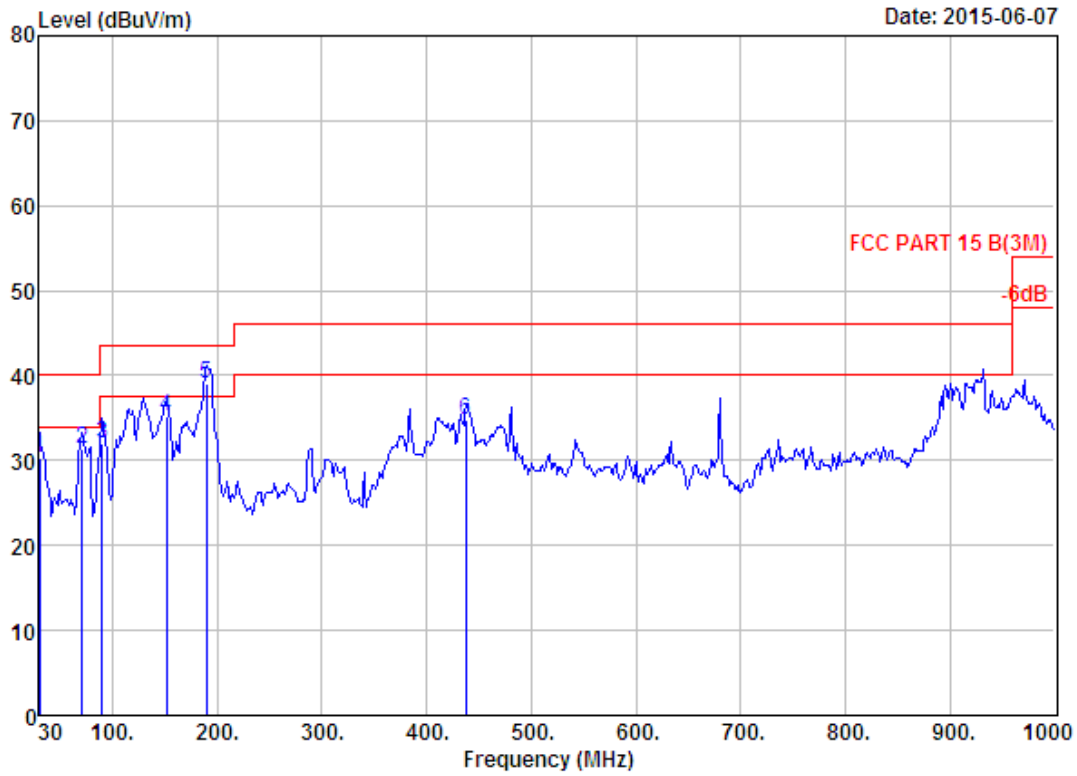


Site no. : 966 1# chamber Data no. : 320  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH13 2472TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	11.05	30.21	40.00	9.79	QP
2	70.74	5.82	1.04	24.52	31.38	40.00	8.62	QP
3	90.14	8.38	1.33	22.29	32.00	43.50	11.50	QP
4	151.25	10.82	1.61	22.82	35.25	43.50	8.25	QP
5	190.05	7.94	1.76	29.42	39.12	43.50	4.38	QP
6	437.40	16.20	2.85	15.71	34.76	46.00	11.24	QP

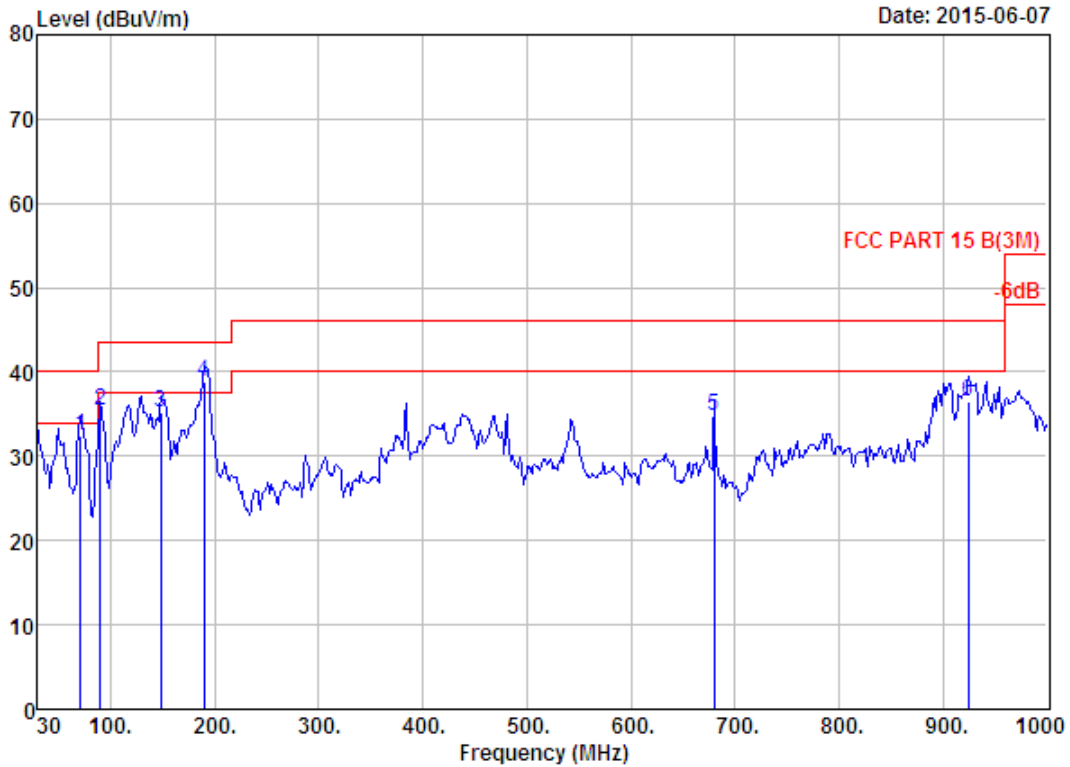

Site no. : 966 1# chamber                      Data no. : 321  
 Dis. / Ant. : 3m 27137                              Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	70.74	5.82	1.04	25.66	32.52	40.00	7.48	QP
2	90.14	8.38	1.33	25.68	35.39	43.50	8.11	QP
3	148.34	11.00	1.69	22.46	35.15	43.50	8.35	QP
4	190.05	7.94	1.76	29.11	38.81	43.50	4.69	QP
5	679.90	20.29	3.66	10.77	34.72	46.00	11.28	QP
6	924.34	24.13	4.50	7.81	36.44	46.00	9.56	QP

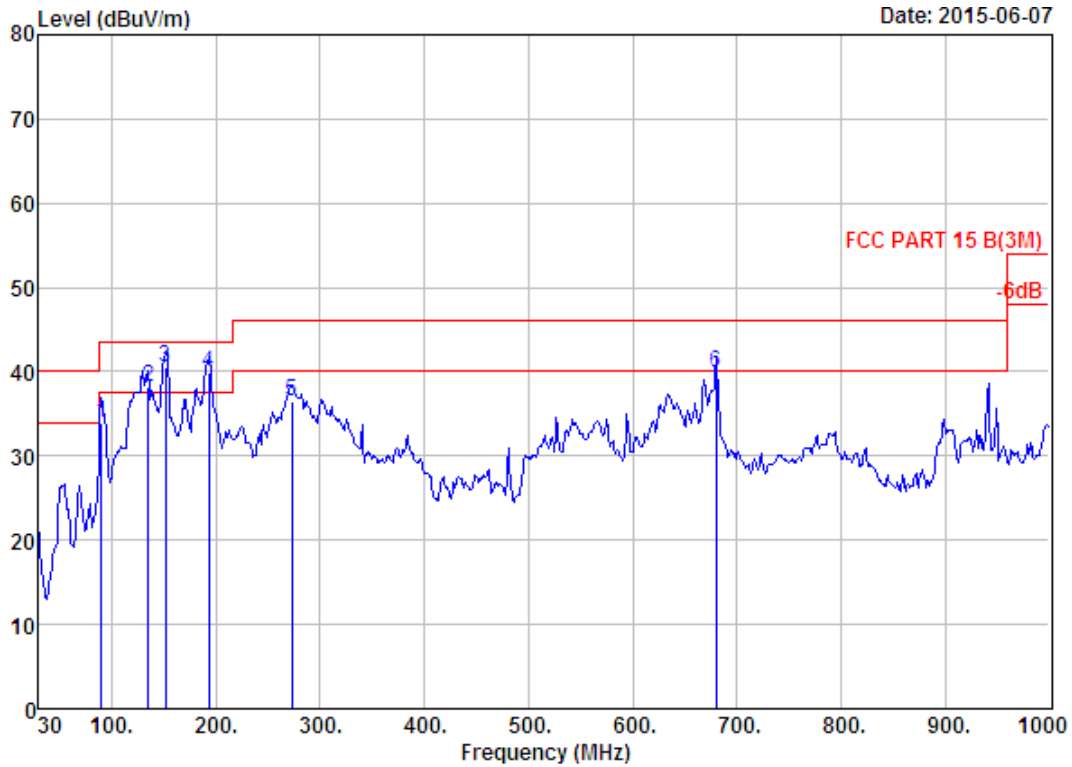


Site no. : 966 1# chamber                      Data no. : 322  
 Dis. / Ant. : 3m 27137                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	90.14	8.38	1.33	24.30	34.01	43.50	9.49	QP
2	134.76	11.37	1.57	25.21	38.15	43.50	5.35	QP
3	151.25	10.82	1.61	28.01	40.44	43.50	3.06	QP
4	192.96	7.85	1.77	30.19	39.81	43.50	3.69	QP
5	272.50	12.46	2.26	21.67	36.39	46.00	9.61	QP
6	679.90	20.29	3.66	15.86	39.81	46.00	6.19	QP






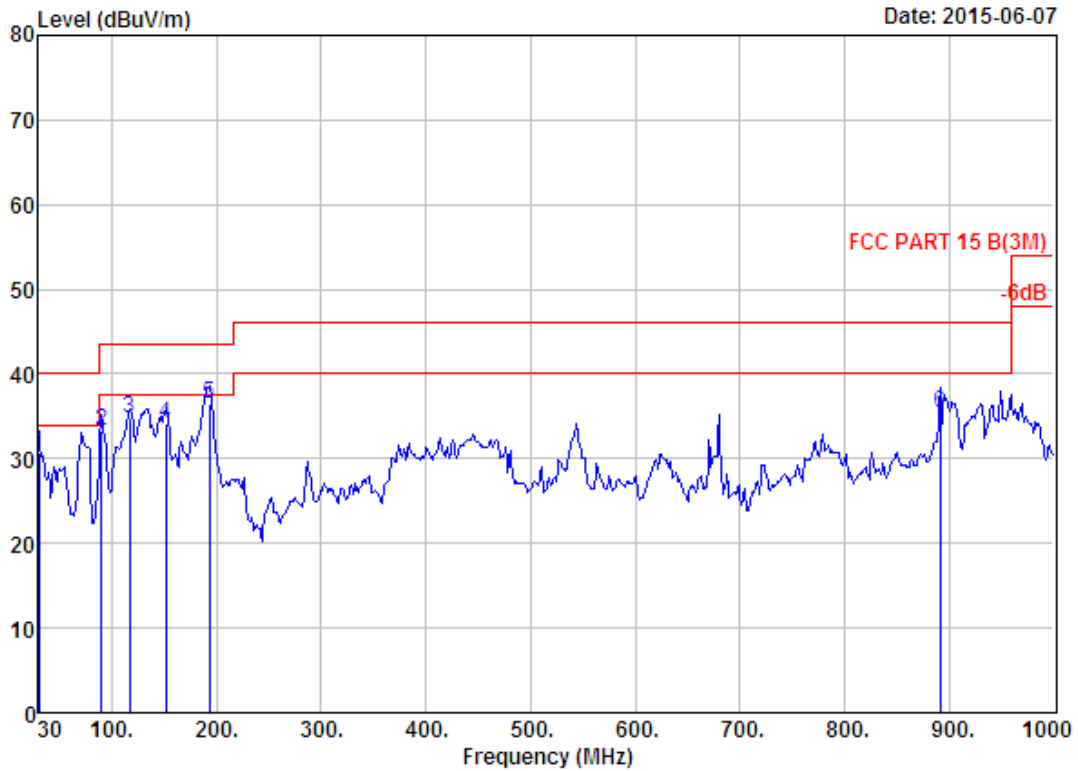

Site no. : 966 1# chamber                      Data no. : 324  
 Dis. / Ant. : 3m 27137                              Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH7 2442TX  
                   Antenna a


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	11.48	30.64	40.00	9.36	QP
2	90.14	8.38	1.33	23.59	33.30	43.50	10.20	QP
3	117.30	11.02	1.47	22.34	34.83	43.50	8.67	QP
4	151.25	10.82	1.61	21.73	34.16	43.50	9.34	QP
5	192.96	7.85	1.77	26.97	36.59	43.50	6.91	QP
6	891.36	22.89	3.91	8.57	35.37	46.00	10.63	QP

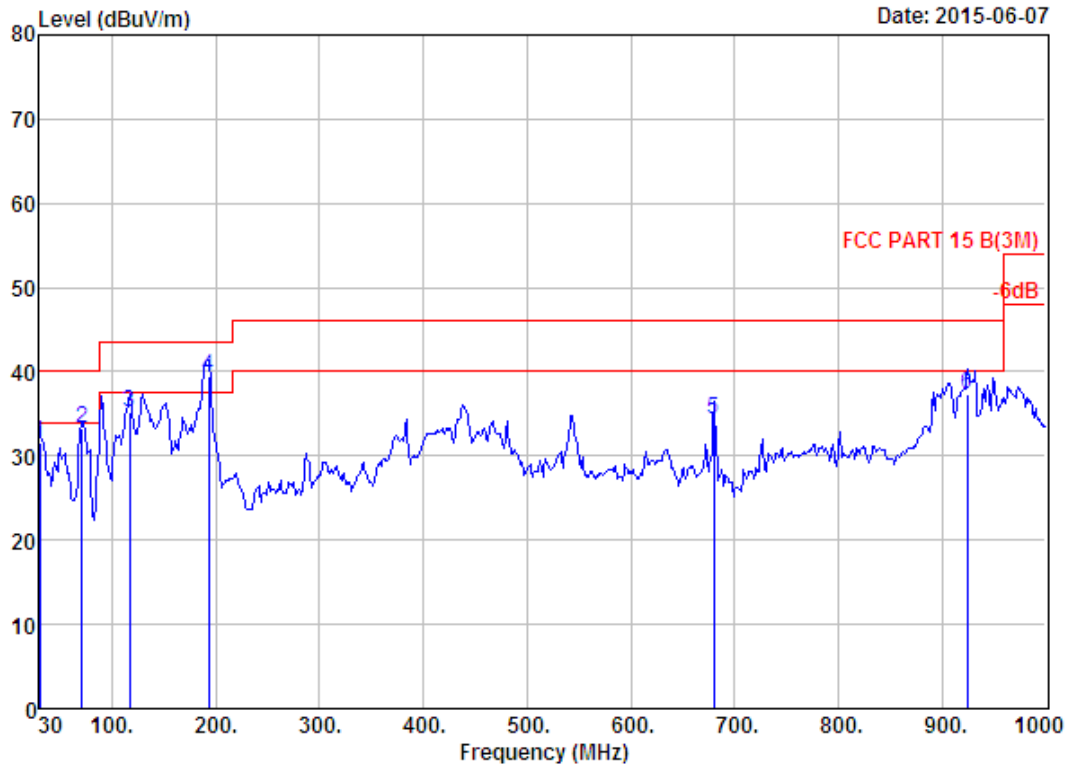

Site no. : 966 1# chamber                      Data no. : 325  
 Dis. / Ant. : 3m 27137                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
                   Antenna a


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	12.41	31.57	40.00	8.43	QP
2	70.74	5.82	1.04	26.37	33.23	40.00	6.77	QP
3	117.30	11.02	1.47	22.82	35.31	43.50	8.19	QP
4	192.96	7.85	1.77	29.85	39.47	43.50	4.03	QP
5	679.90	20.29	3.66	10.46	34.41	46.00	11.59	QP
6	924.34	24.13	4.50	8.65	37.28	46.00	8.72	QP



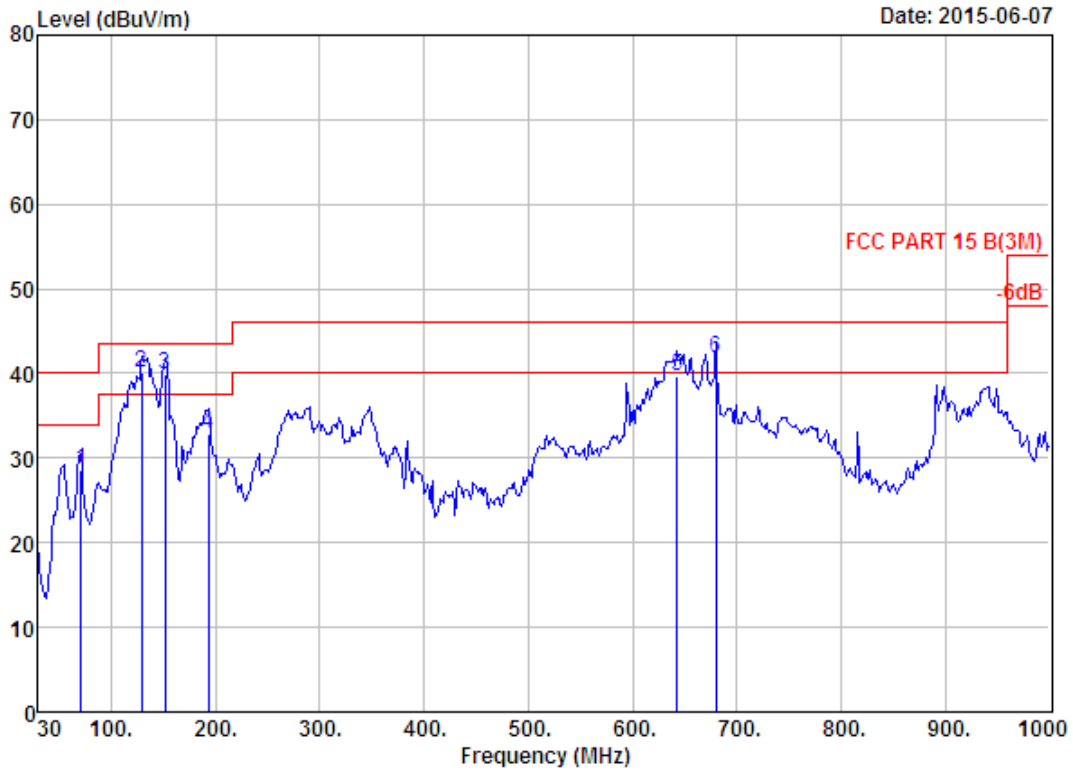


Site no. : 966 1# chamber                      Data no. : 326  
 Dis. / Ant. : 3m 27137                              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	70.74	5.82	1.04	21.71	28.57	40.00	11.43	QP
2	128.94	11.33	1.47	27.26	40.06	43.50	3.44	QP
3	151.25	10.82	1.61	27.42	39.85	43.50	3.65	QP
4	192.96	7.85	1.77	23.27	32.89	43.50	10.61	QP
5	643.04	20.04	3.50	16.20	39.74	46.00	6.26	QP
6	679.90	20.29	3.66	17.83	41.78	46.00	4.22	QP

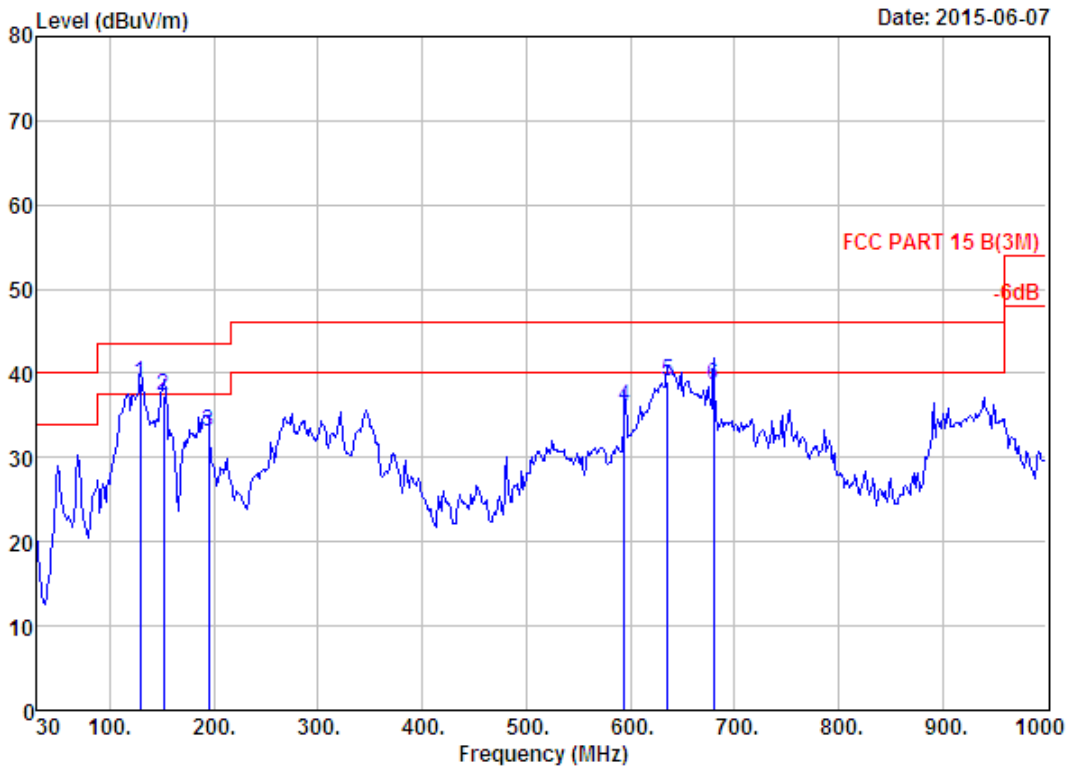


Site no. : 966 1# chamber Data no. : 327  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH1 2422TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	128.94	11.33	1.47	25.98	38.78	43.50	4.72	QP
2	151.25	10.82	1.61	24.82	37.25	43.50	6.25	QP
3	194.90	7.72	1.78	23.49	32.99	43.50	10.51	QP
4	594.54	19.51	3.33	13.11	35.95	46.00	10.05	QP
5	636.25	20.07	3.50	15.45	39.02	46.00	6.98	QP
6	679.90	20.29	3.66	14.76	38.71	46.00	7.29	QP

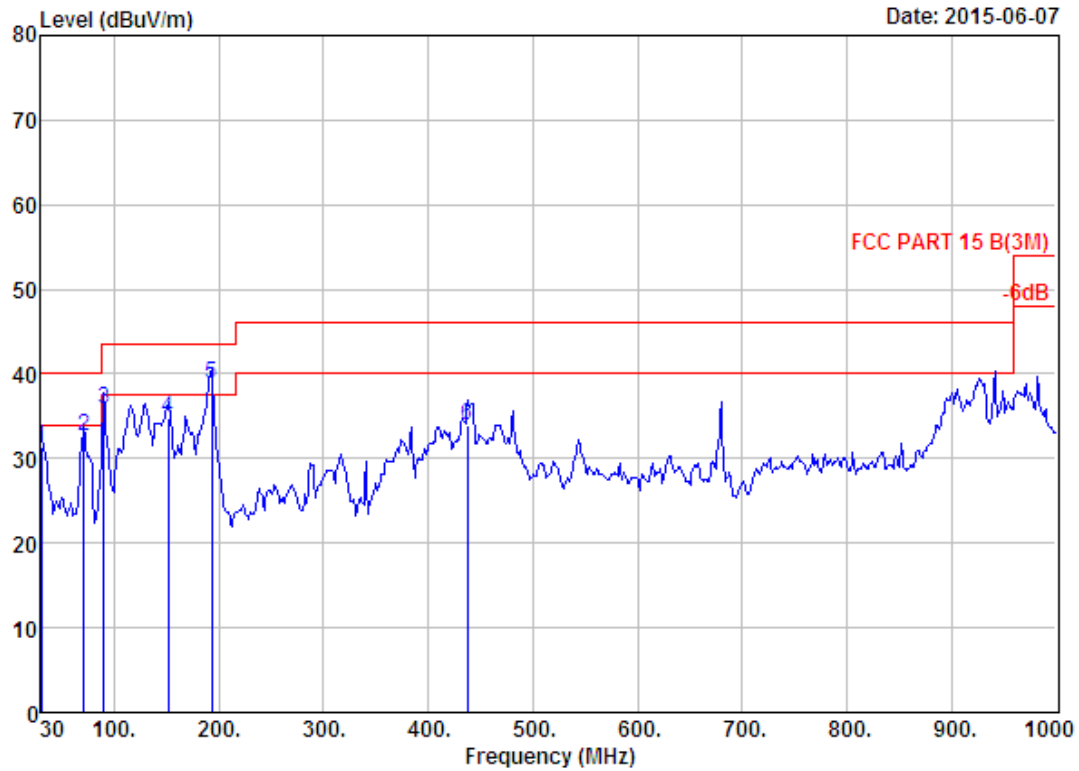


Site no. : 966 1# chamber Data no. : 328  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH1 2422TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	12.10	31.26	40.00	8.74	QP
2	70.74	5.82	1.04	25.76	32.62	40.00	7.38	QP
3	90.14	8.38	1.33	26.13	35.84	43.50	7.66	QP
4	151.25	10.82	1.61	22.33	34.76	43.50	8.74	QP
5	192.96	7.85	1.77	29.19	38.81	43.50	4.69	QP
6	437.40	16.20	2.85	14.80	33.85	46.00	12.15	QP

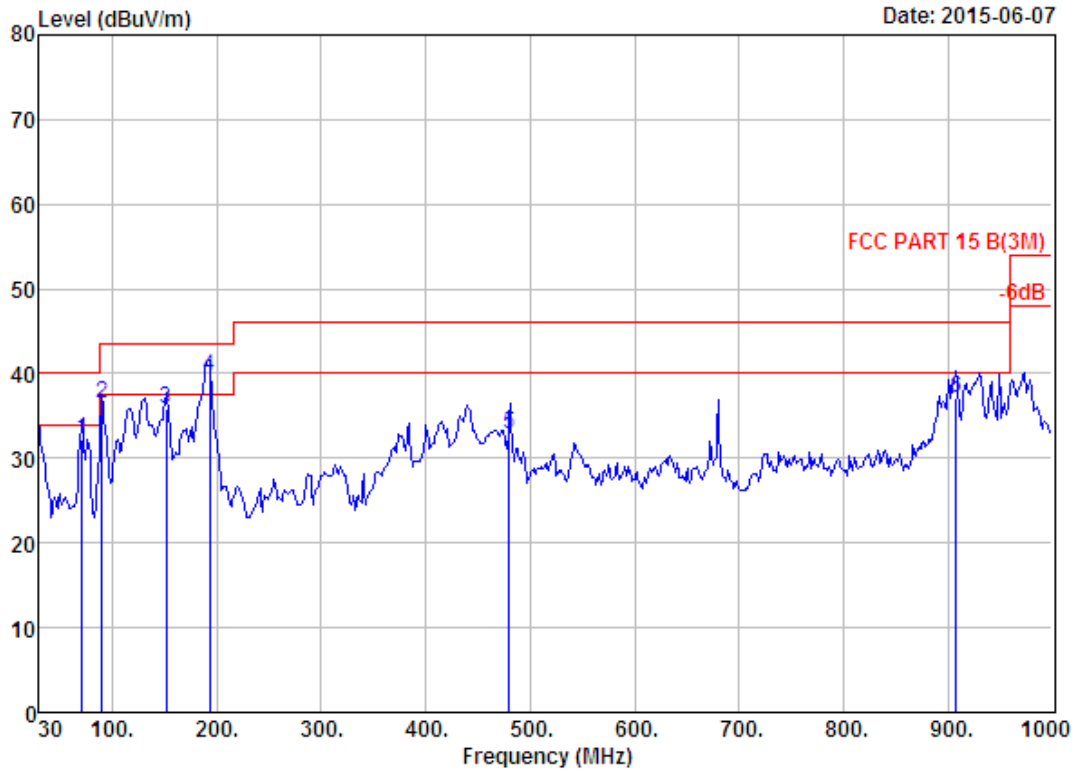

Site no. : 966 1# chamber Data no. : 329  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH5 2442TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	70.74	5.82	1.04	25.39	32.25	40.00	7.75	QP
2	90.14	8.38	1.33	26.80	36.51	43.50	6.99	QP
3	151.25	10.82	1.61	23.34	35.77	43.50	7.73	QP
4	192.96	7.85	1.77	29.99	39.61	43.50	3.89	QP
5	480.08	17.45	3.10	12.24	32.79	46.00	13.21	QP
6	907.85	23.48	4.08	9.66	37.22	46.00	8.78	QP

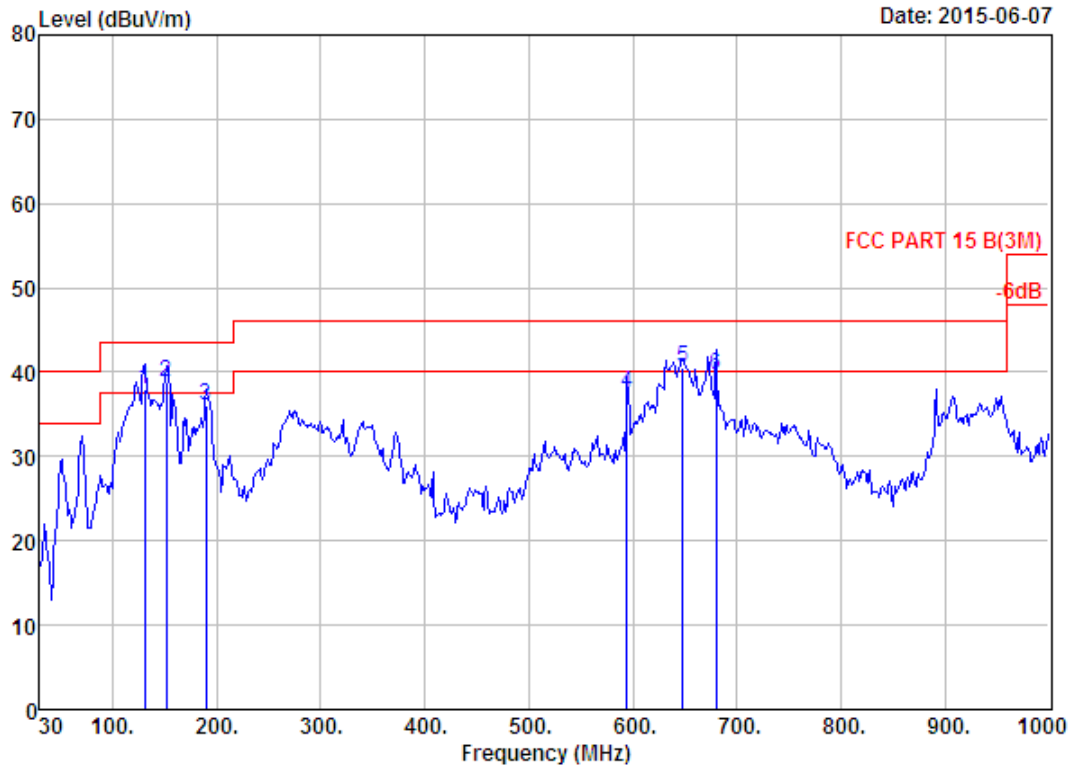


Date: 2015-06-07

Site no. : 966 1# chamber                      Data no. : 330  
 Dis. / Ant. : 3m 27137                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH5 2442TX  
                   Antenna a


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	130.88	11.33	1.47	25.10	37.90	43.50	5.60	QP
2	151.25	10.82	1.61	26.40	38.83	43.50	4.67	QP
3	190.05	7.94	1.76	26.33	36.03	43.50	7.47	QP
4	594.54	19.51	3.33	14.72	37.56	46.00	8.44	QP
5	647.89	20.08	3.59	16.87	40.54	46.00	5.46	QP
6	679.90	20.29	3.66	15.72	39.67	46.00	6.33	QP



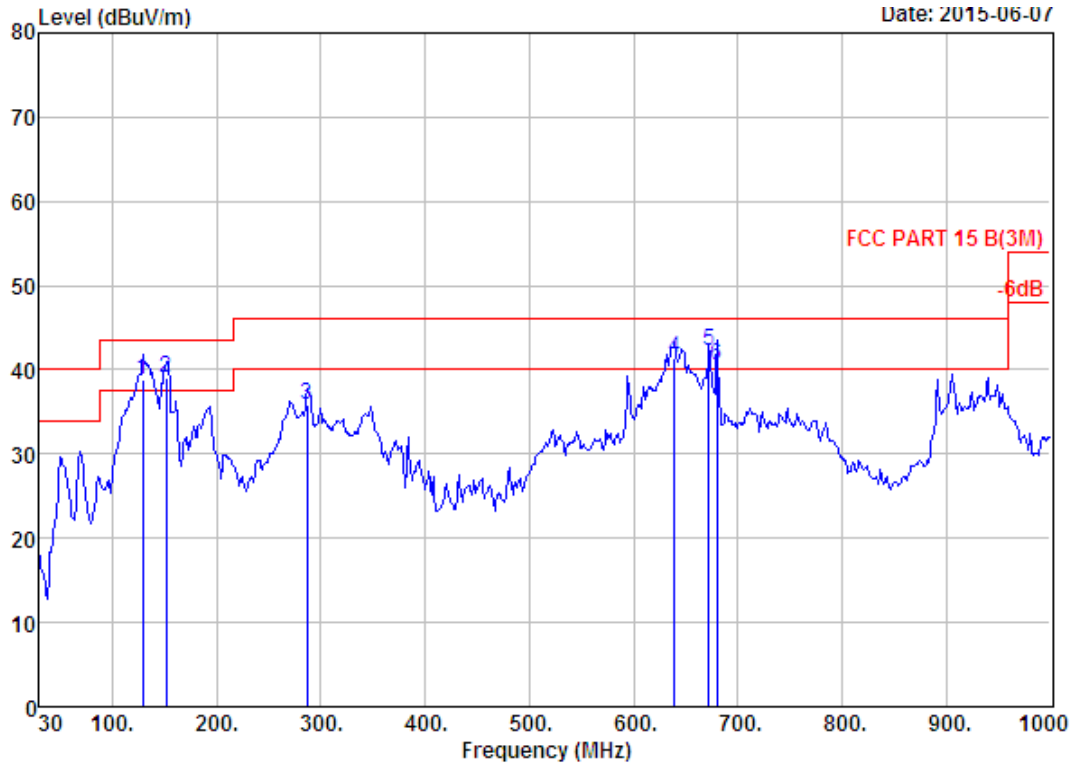

Site no. : 966 1# chamber                      Data no. : 331  
 Dis. / Ant. : 3m 27137                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH9 2462TX  
 Antenna a


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	128.94	11.33	1.47	25.98	38.78	43.50	4.72	QP
2	151.25	10.82	1.61	26.53	38.96	43.50	4.54	QP
3	287.05	12.59	2.32	20.95	35.86	46.00	10.14	QP
4	639.16	20.03	3.56	17.77	41.36	46.00	4.64	QP
5	672.14	20.23	3.62	18.33	42.18	46.00	3.82	QP
6	679.90	20.29	3.66	16.62	40.57	46.00	5.43	QP

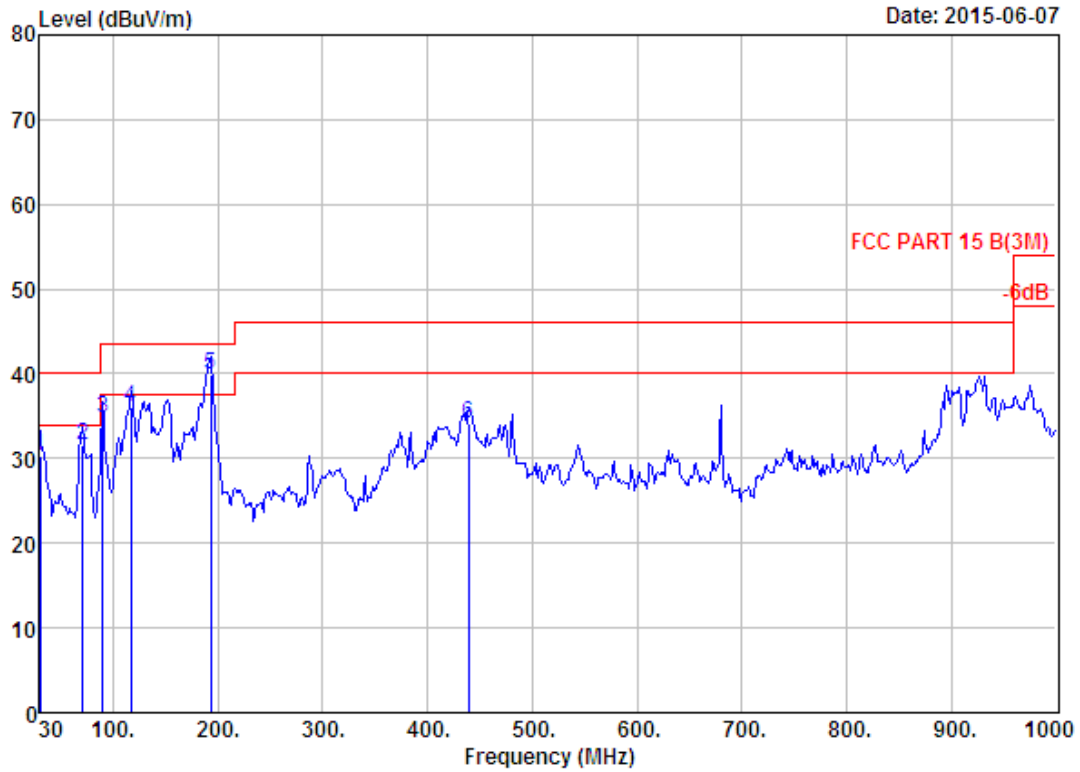

Date: 2015-06-07


Site no. : 966 1# chamber                      Data no. : 332  
 Dis. / Ant. : 3m 27137                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH9 2462TX  
                     Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	11.09	30.25	40.00	9.75	QP
2	70.74	5.82	1.04	24.78	31.64	40.00	8.36	QP
3	90.14	8.38	1.33	25.02	34.73	43.50	8.77	QP
4	117.30	11.02	1.47	23.46	35.95	43.50	7.55	QP
5	192.96	7.85	1.77	30.35	39.97	43.50	3.53	QP
6	439.34	16.23	2.89	14.99	34.11	46.00	11.89	QP

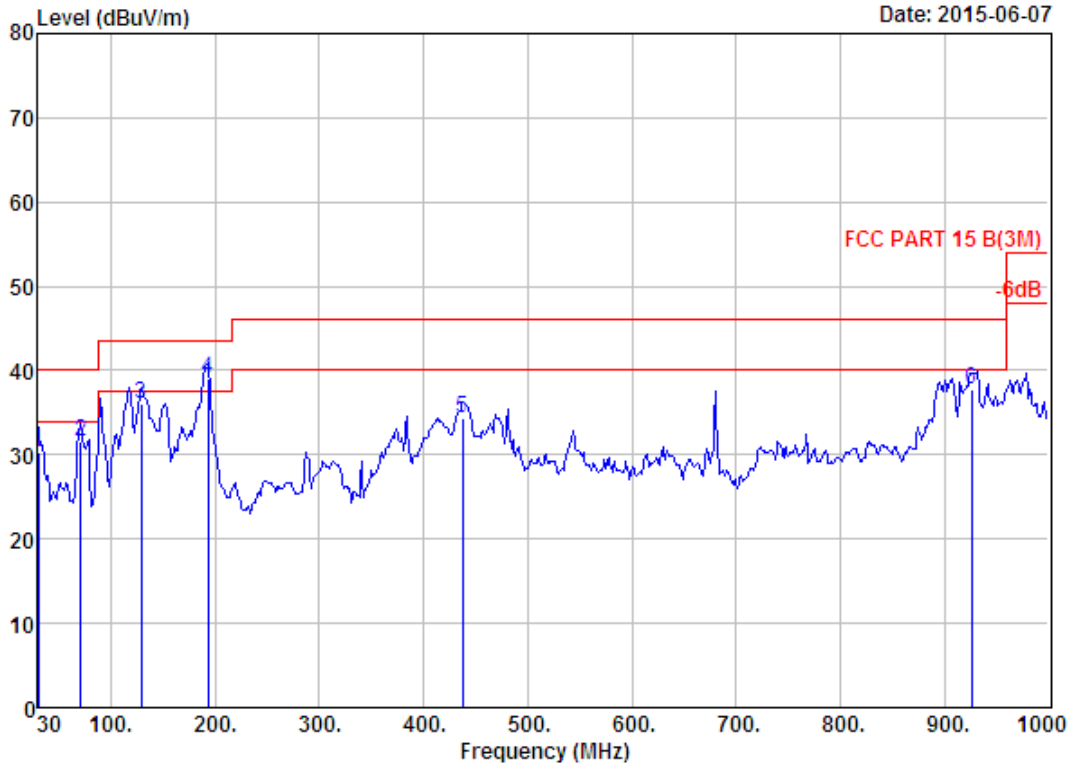


Site no. : 966 1# chamber Data no. : 333  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH1 2412TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	11.19	30.35	40.00	9.65	QP
2	70.74	5.82	1.04	24.78	31.64	40.00	8.36	QP
3	128.94	11.33	1.47	23.26	36.06	43.50	7.44	QP
4	192.96	7.85	1.77	29.35	38.97	43.50	4.53	QP
5	437.40	16.20	2.85	15.26	34.31	46.00	11.69	QP
6	926.28	24.23	4.51	9.01	37.75	46.00	8.25	QP

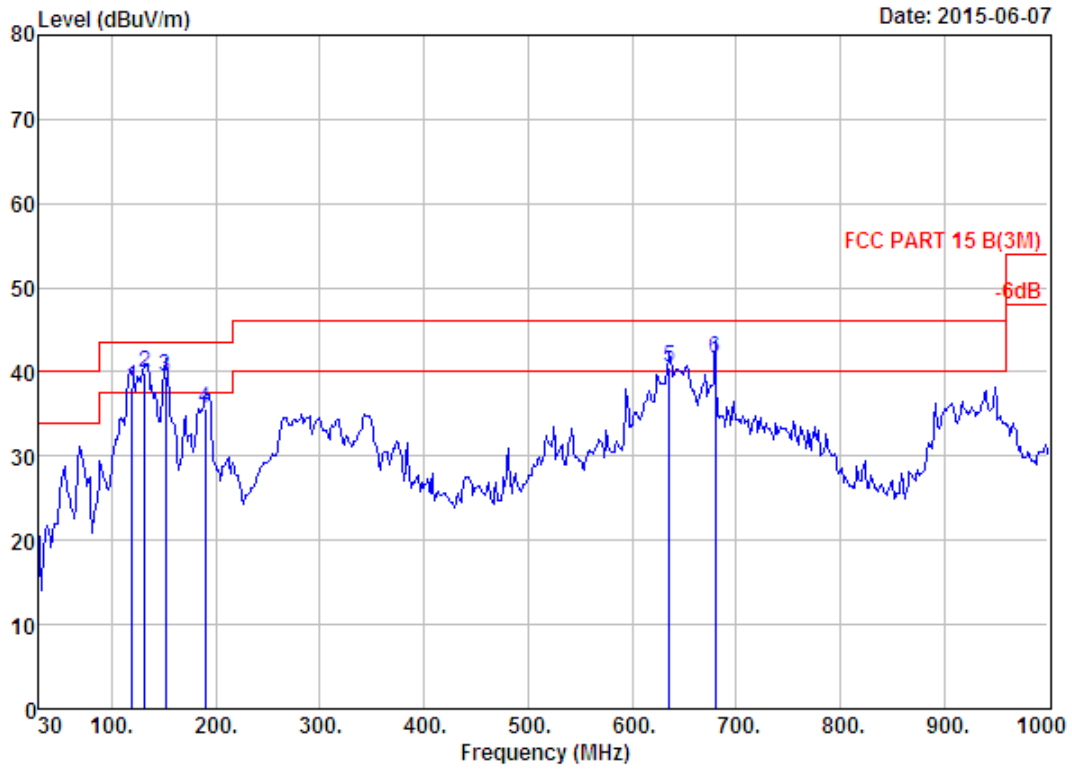


Site no. : 966 1# chamber                      Data no. : 334  
 Dis. / Ant. : 3m 27137                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6°;Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH1 2412TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	119.24	11.11	1.42	25.61	38.14	43.50	5.36	QP
2	131.85	11.34	1.50	27.09	39.93	43.50	3.57	QP
3	151.25	10.82	1.61	27.11	39.54	43.50	3.96	QP
4	190.05	7.94	1.76	25.90	35.60	43.50	7.90	QP
5	636.25	20.07	3.50	16.86	40.43	46.00	5.57	QP
6	679.90	20.29	3.66	17.72	41.67	46.00	4.33	QP

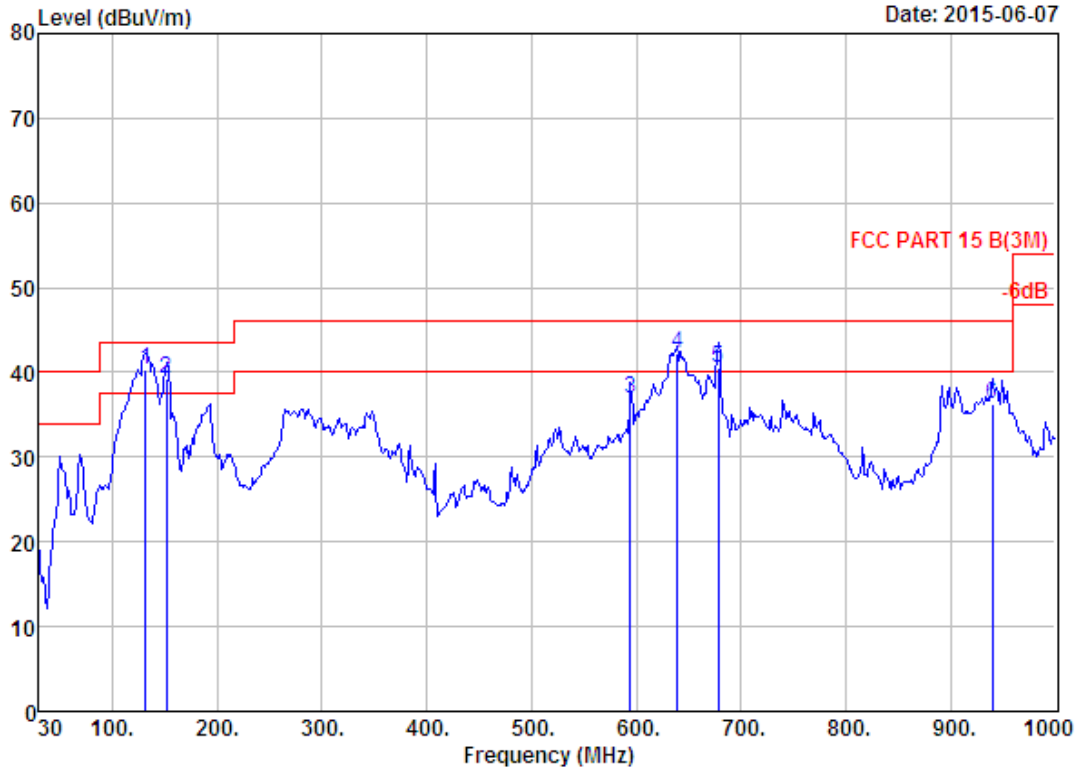


Site no. : 966 1# chamber Data no. : 335  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH7 2442TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	131.85	11.34	1.50	27.49	40.33	43.50	3.17	QP
2	151.25	10.82	1.61	26.84	39.27	43.50	4.23	QP
3	594.54	19.51	3.33	14.04	36.88	46.00	9.12	QP
4	639.16	20.03	3.56	18.60	42.19	46.00	3.81	QP
5	677.96	20.28	3.65	16.65	40.58	46.00	5.42	QP
6	939.86	24.71	4.55	6.91	36.17	46.00	9.83	QP

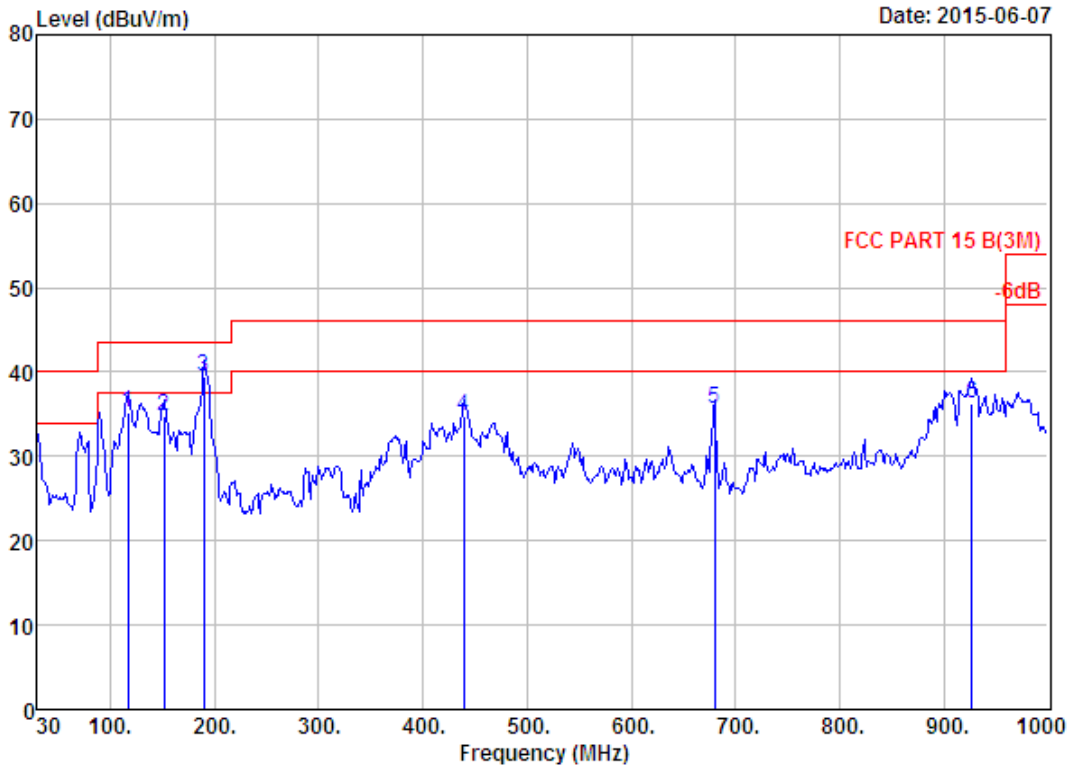


Site no. : 966 1# chamber                      Data no. : 336  
 Dis. / Ant. : 3m 27137                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH7 2442TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	117.30	11.02	1.47	22.67	35.16	43.50	8.34	QP
2	151.25	10.82	1.61	22.35	34.78	43.50	8.72	QP
3	190.05	7.94	1.76	29.68	39.38	43.50	4.12	QP
4	439.34	16.23	2.89	15.55	34.67	46.00	11.33	QP
5	679.90	20.29	3.66	11.76	35.71	46.00	10.29	QP
6	927.25	24.27	4.50	7.51	36.28	46.00	9.72	QP

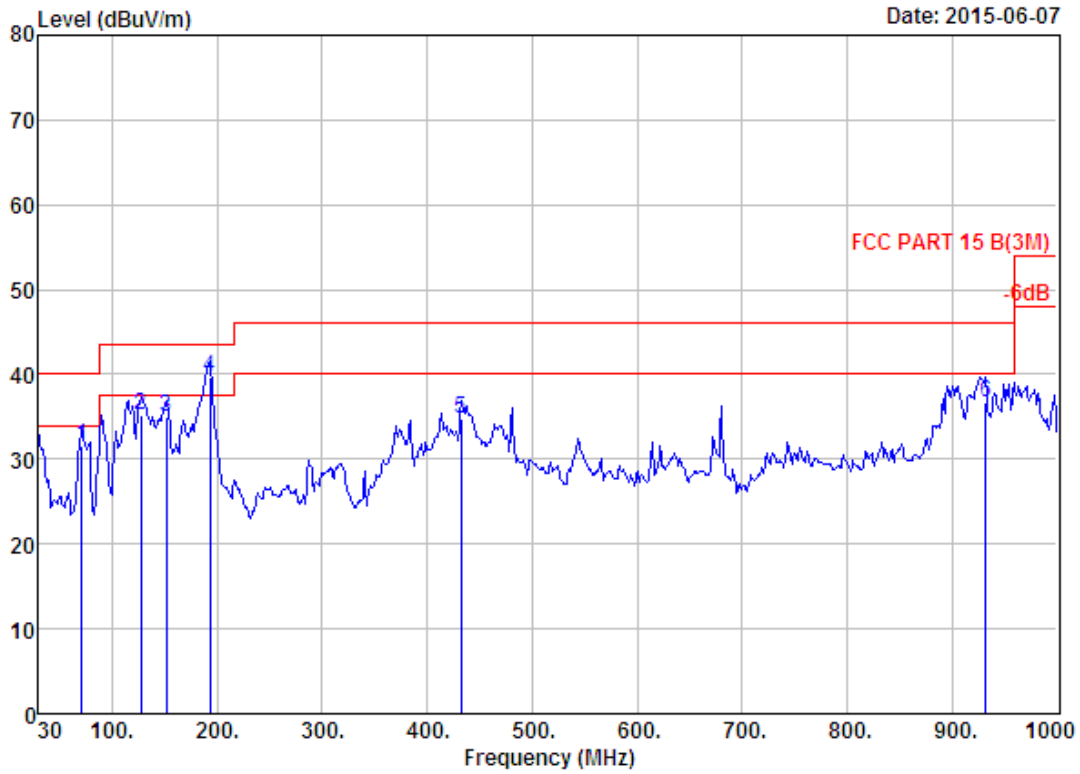

Site no. : 966 1# chamber                      Data no. : 337  
 Dis. / Ant. : 3m 27137                              Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH13 2472TX  
                     Antenna b


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	70.74	5.82	1.04	24.82	31.68	40.00	8.32	QP
2	127.00	11.34	1.50	22.46	35.30	43.50	8.20	QP
3	151.25	10.82	1.61	22.47	34.90	43.50	8.60	QP
4	192.96	7.85	1.77	30.06	39.68	43.50	3.82	QP
5	432.55	16.11	2.78	15.98	34.87	46.00	11.13	QP
6	932.10	24.47	4.56	7.74	36.77	46.00	9.23	QP

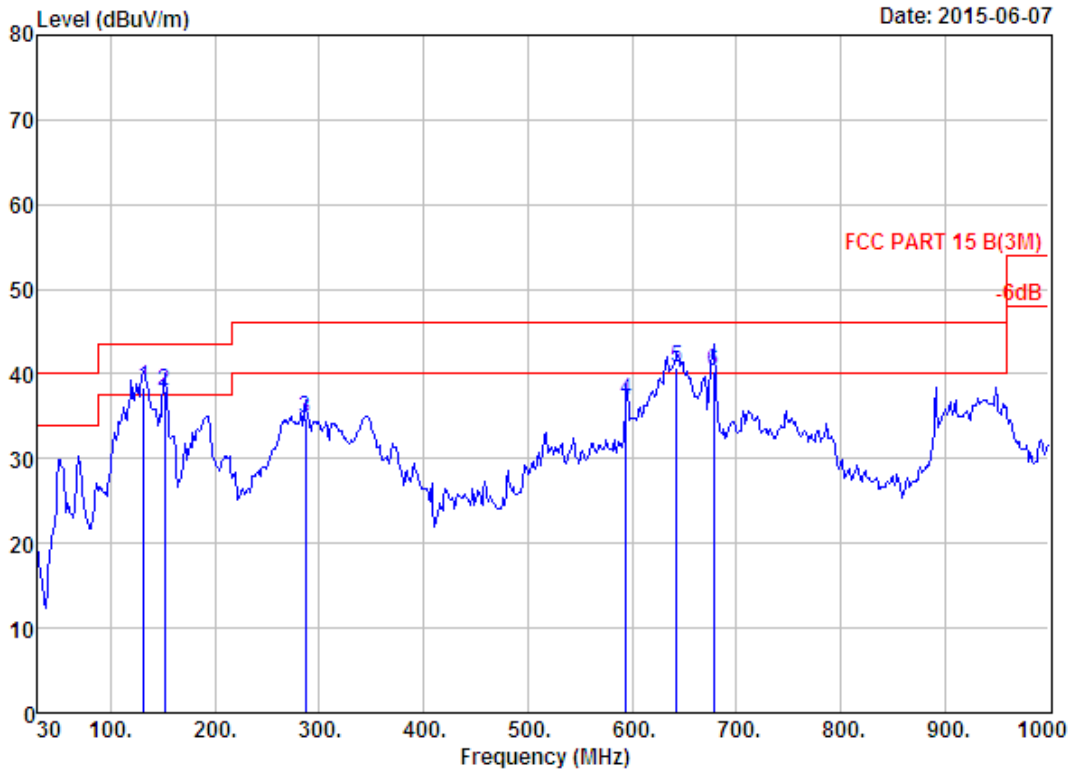

Site no. : 966 1# chamber                      Data no. : 338  
 Dis. / Ant. : 3m 27137                              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH13 2472TX  
                   Antenna b


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	131.85	11.34	1.50	25.52	38.36	43.50	5.14	QP
2	151.25	10.82	1.61	25.65	38.08	43.50	5.42	QP
3	287.05	12.59	2.32	19.94	34.85	46.00	11.15	QP
4	594.54	19.51	3.33	14.06	36.90	46.00	9.10	QP
5	643.04	20.04	3.50	17.22	40.76	46.00	5.24	QP
6	677.96	20.28	3.65	16.49	40.42	46.00	5.58	QP



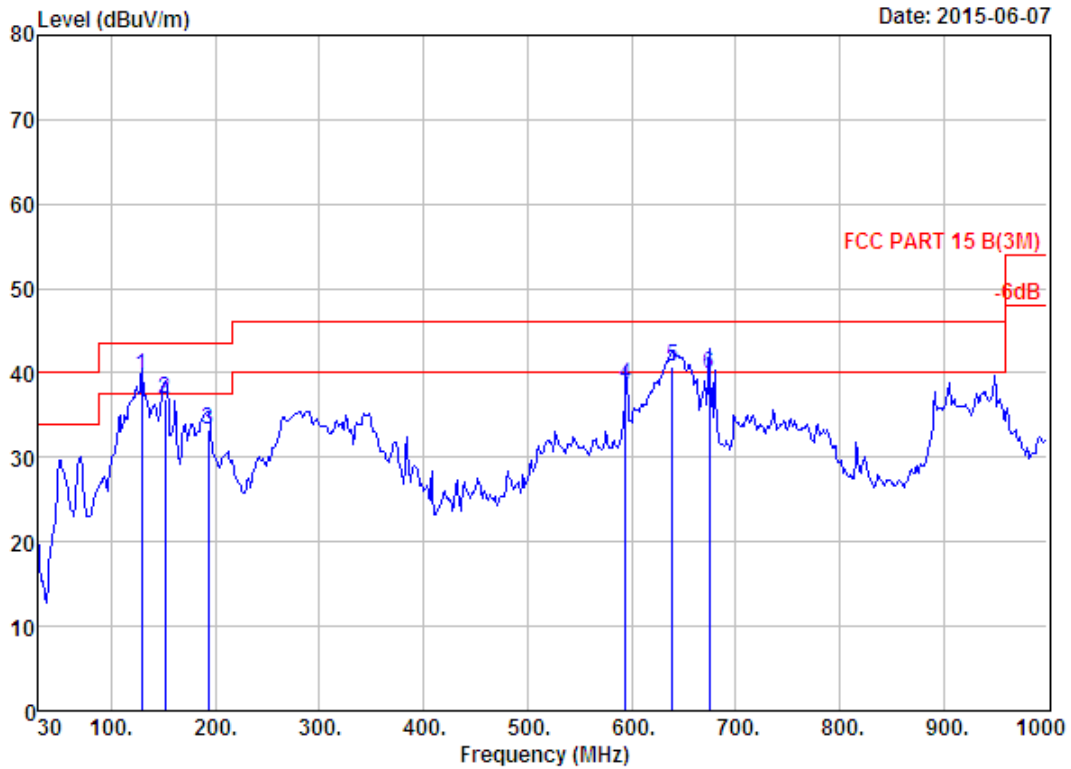


Site no. : 966 1# chamber Data no. : 339  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	128.94	11.33	1.47	26.80	39.60	43.50	3.90	QP
2	151.25	10.82	1.61	24.56	36.99	43.50	6.51	QP
3	192.96	7.85	1.77	23.71	33.33	43.50	10.17	QP
4	594.54	19.51	3.33	15.80	38.64	46.00	7.36	QP
5	639.16	20.03	3.56	17.13	40.72	46.00	5.28	QP
6	675.05	20.26	3.64	16.03	39.93	46.00	6.07	QP

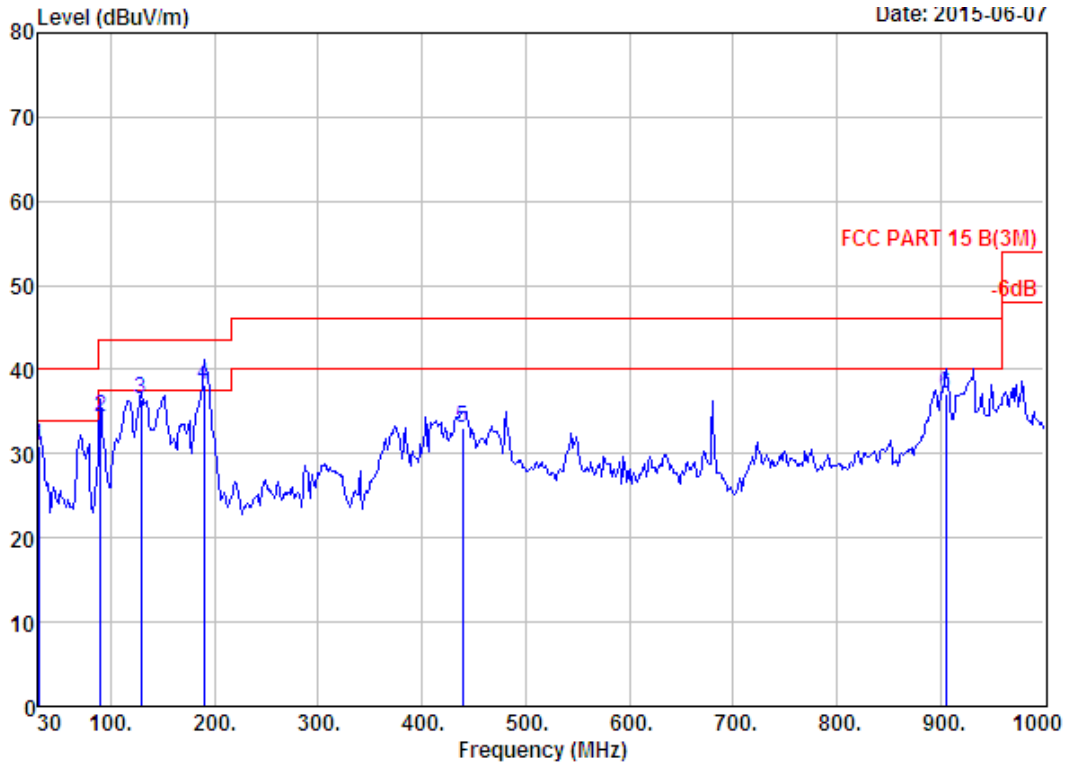


Site no. : 966 1# chamber                      Data no. : 340  
 Dis. / Ant. : 3m 27137                              Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	11.77	30.93	40.00	9.07	QP
2	90.14	8.38	1.33	24.68	34.39	43.50	9.11	QP
3	128.94	11.33	1.47	23.64	36.44	43.50	7.06	QP
4	190.05	7.94	1.76	28.46	38.16	43.50	5.34	QP
5	439.34	16.23	2.89	13.93	33.05	46.00	12.95	QP
6	904.94	23.40	4.10	9.69	37.19	46.00	8.81	QP

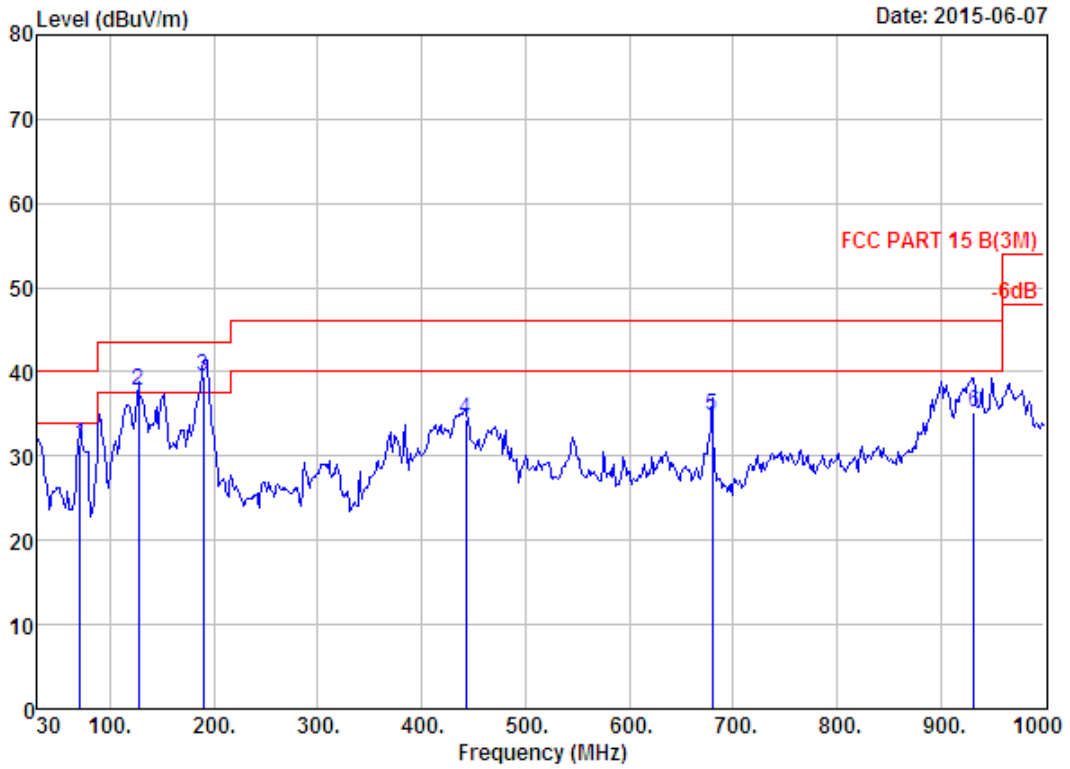


Site no. : 966 1# chamber Data no. : 341  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH7 2442TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	70.74	5.82	1.04	24.50	31.36	40.00	8.64	QP
2	127.00	11.34	1.50	24.89	37.73	43.50	5.77	QP
3	190.05	7.94	1.76	29.78	39.48	43.50	4.02	QP
4	442.25	16.29	2.88	15.26	34.43	46.00	11.57	QP
5	679.90	20.29	3.66	10.90	34.85	46.00	11.15	QP
6	932.10	24.47	4.56	6.25	35.28	46.00	10.72	QP

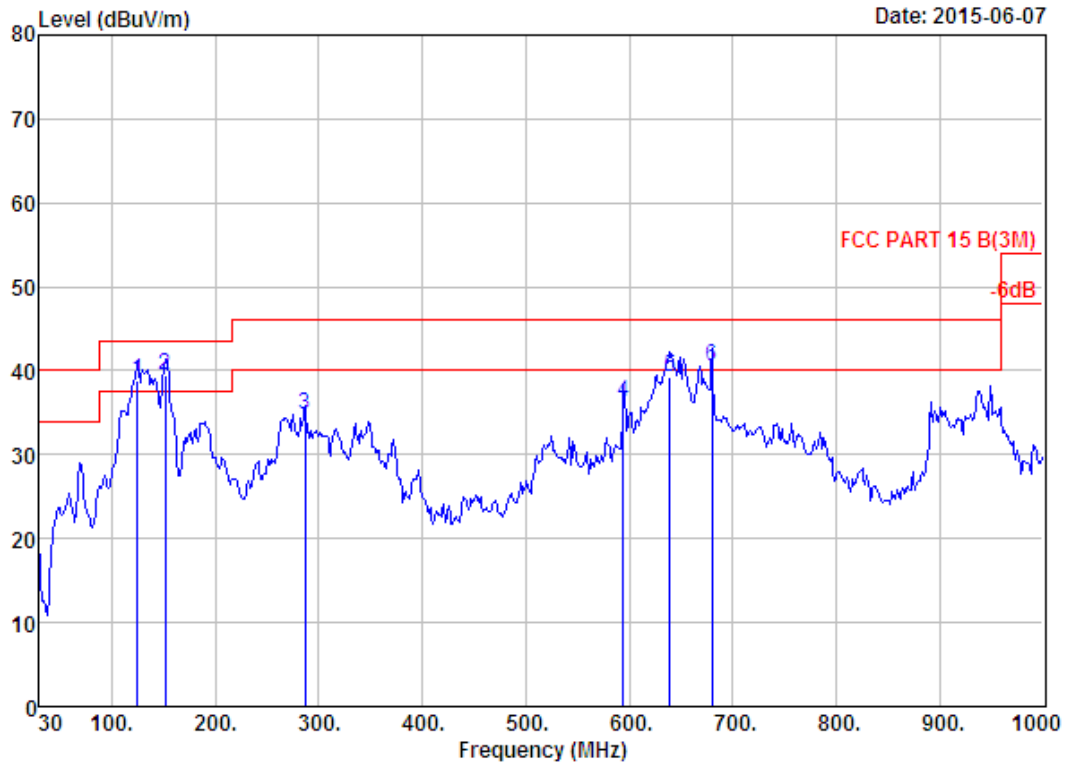


Site no. : 966 1# chamber Data no. : 342  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH7 2442TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	125.06	11.35	1.52	26.02	38.89	43.50	4.61	QP
2	151.25	10.82	1.61	27.05	39.48	43.50	4.02	QP
3	287.05	12.59	2.32	19.93	34.84	46.00	11.16	QP
4	594.54	19.51	3.33	13.51	36.35	46.00	9.65	QP
5	639.16	20.03	3.56	15.64	39.23	46.00	6.77	QP
6	679.90	20.29	3.66	16.64	40.59	46.00	5.41	QP

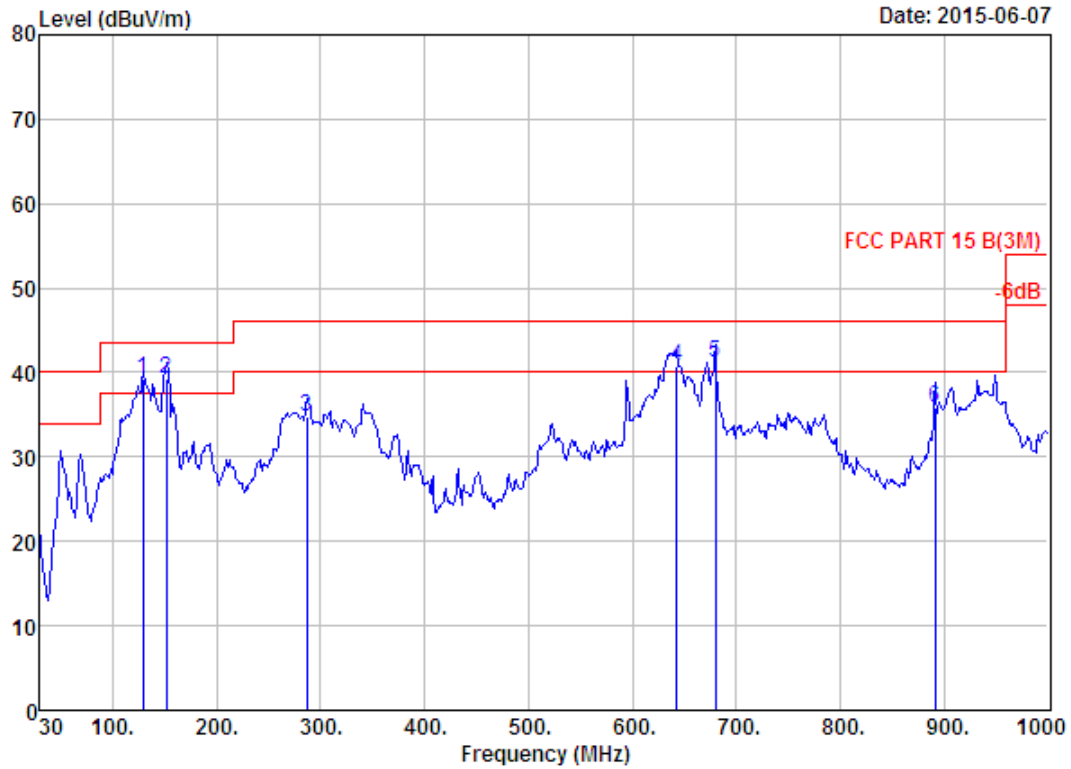


Site no. : 966 1# chamber Data no. : 343  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH13 2472TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	128.94	11.33	1.47	26.39	39.19	43.50	4.31	QP
2	151.25	10.82	1.61	26.74	39.17	43.50	4.33	QP
3	287.05	12.59	2.32	19.96	34.87	46.00	11.13	QP
4	643.04	20.04	3.50	17.11	40.65	46.00	5.35	QP
5	679.90	20.29	3.66	17.30	41.25	46.00	4.75	QP
6	891.36	22.89	3.91	8.94	35.74	46.00	10.26	QP

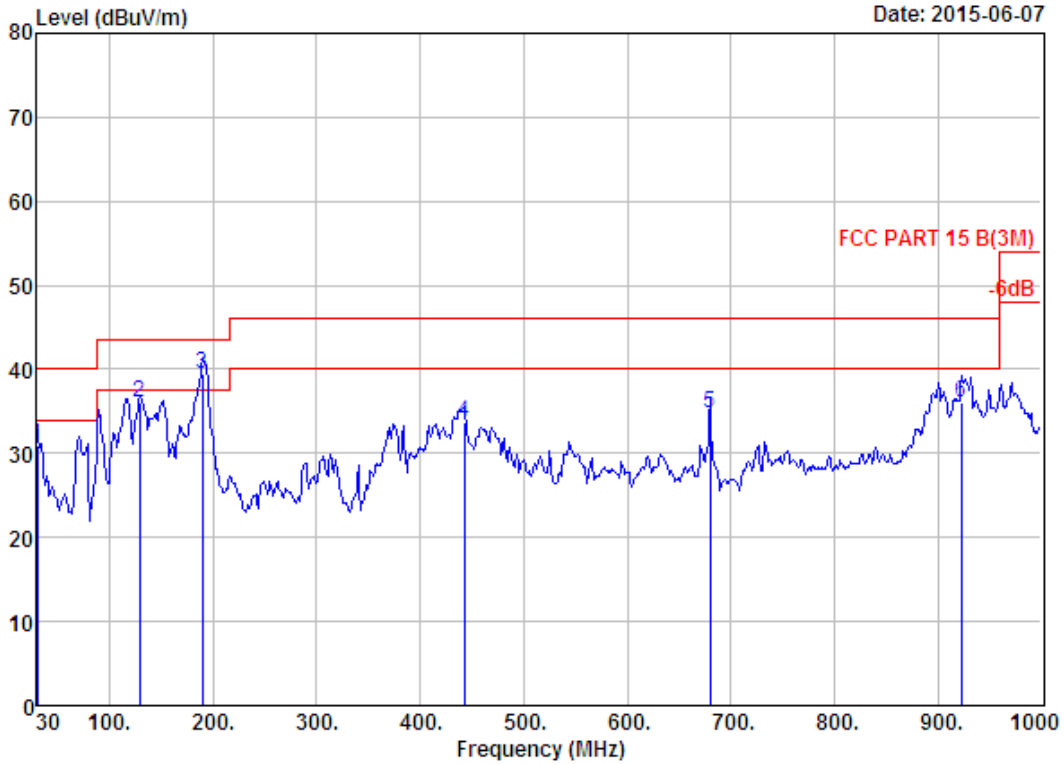


Site no. : 966 1# chamber                      Data no. : 344  
 Dis. / Ant. : 3m 27137                              Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH13 2472TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	11.76	30.92	40.00	9.08	QP
2	128.94	11.33	1.47	23.16	35.96	43.50	7.54	QP
3	190.05	7.94	1.76	29.72	39.42	43.50	4.08	QP
4	442.25	16.29	2.88	14.51	33.68	46.00	12.32	QP
5	679.90	20.29	3.66	10.81	34.76	46.00	11.24	QP
6	922.40	24.04	4.44	7.68	36.16	46.00	9.84	QP

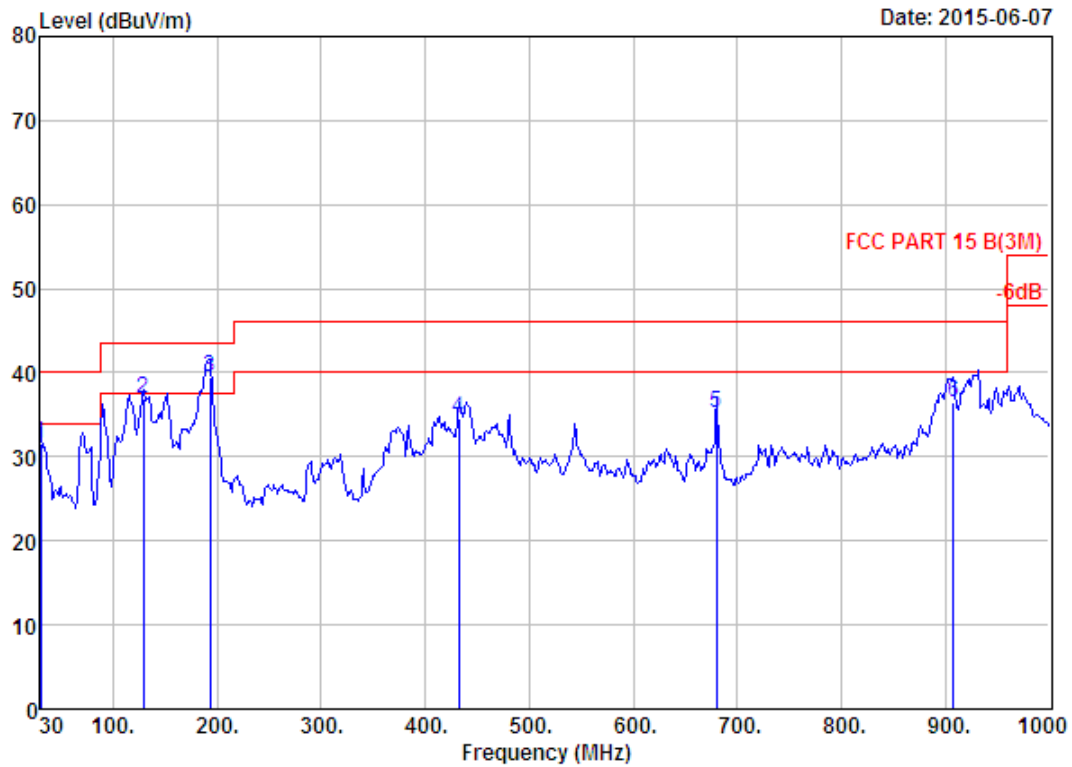

Site no. : 966 1# chamber Data no. : 345  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX  
 Antenna b


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	12.36	31.52	40.00	8.48	QP
2	128.94	11.33	1.47	24.11	36.91	43.50	6.59	QP
3	192.96	7.85	1.77	29.91	39.53	43.50	3.97	QP
4	432.55	16.11	2.78	15.63	34.52	46.00	11.48	QP
5	679.90	20.29	3.66	11.19	35.14	46.00	10.86	QP
6	907.85	23.48	4.08	8.94	36.50	46.00	9.50	QP

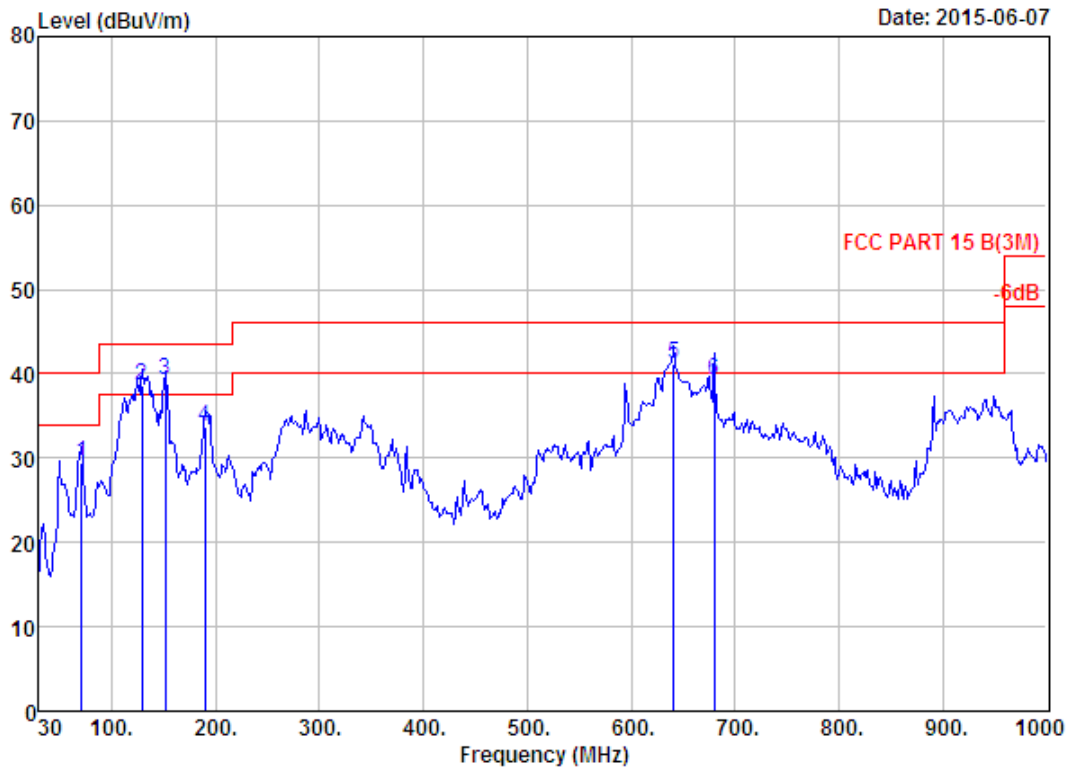

Site no. : 966 1# chamber Data no. : 346  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX  
 Antenna b


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	70.74	5.82	1.04	22.52	29.38	40.00	10.62	QP
2	128.94	11.33	1.47	25.77	38.57	43.50	4.93	QP
3	151.25	10.82	1.61	26.79	39.22	43.50	4.28	QP
4	190.05	7.94	1.76	23.91	33.61	43.50	9.89	QP
5	641.10	20.02	3.56	17.62	41.20	46.00	4.80	QP
6	679.90	20.29	3.66	15.41	39.36	46.00	6.64	QP



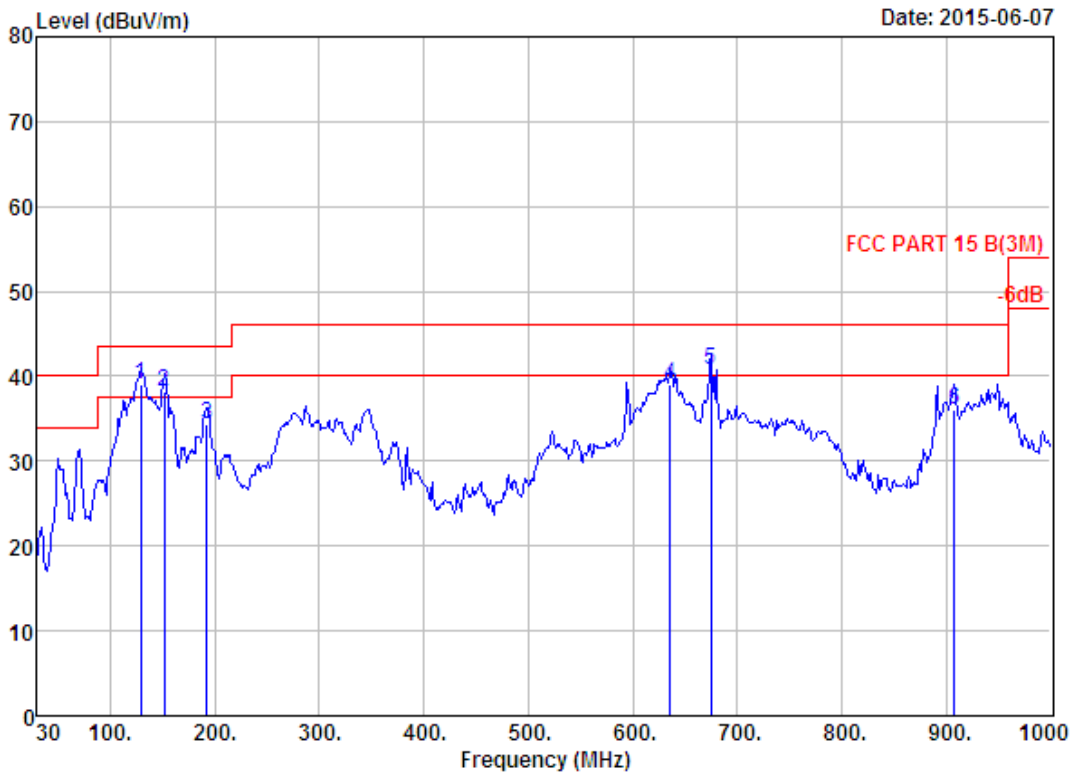


Site no. : 966 1# chamber                      Data no. : 347  
 Dis. / Ant. : 3m 27137                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH7 2442TX  
                     Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	128.94	11.33	1.47	26.21	39.01	43.50	4.49	QP
2	151.25	10.82	1.61	25.79	38.22	43.50	5.28	QP
3	191.99	7.85	1.78	24.72	34.35	43.50	9.15	QP
4	636.25	20.07	3.50	15.42	38.99	46.00	7.01	QP
5	675.05	20.26	3.64	16.83	40.73	46.00	5.27	QP
6	907.85	23.48	4.08	8.46	36.02	46.00	9.98	QP

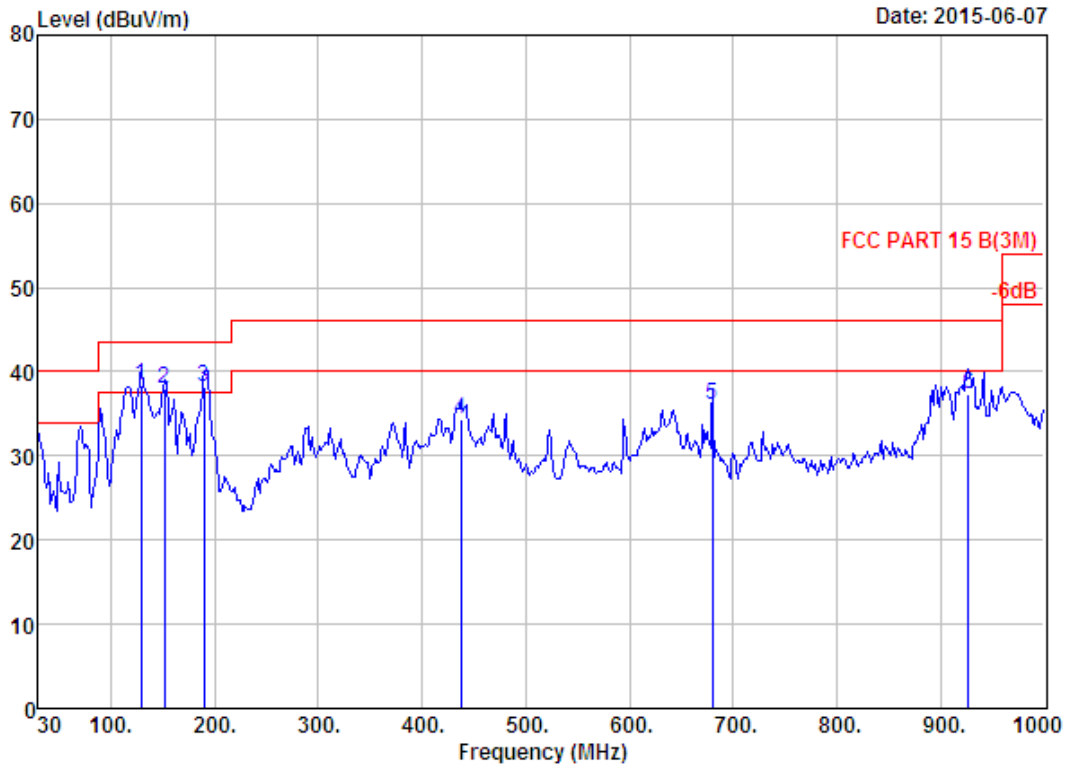


Site no. : 966 1# chamber                      Data no. : 348  
 Dis. / Ant. : 3m 27137                              Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUI : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH7 2442TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	128.94	11.33	1.47	25.58	38.38	43.50	5.12	QP
2	151.25	10.82	1.61	25.64	38.07	43.50	5.43	QP
3	190.05	7.94	1.76	28.48	38.18	43.50	5.32	QP
4	437.40	16.20	2.85	15.40	34.45	46.00	11.55	QP
5	679.90	20.29	3.66	12.10	36.05	46.00	9.95	QP
6	927.25	24.27	4.50	8.59	37.36	46.00	8.64	QP

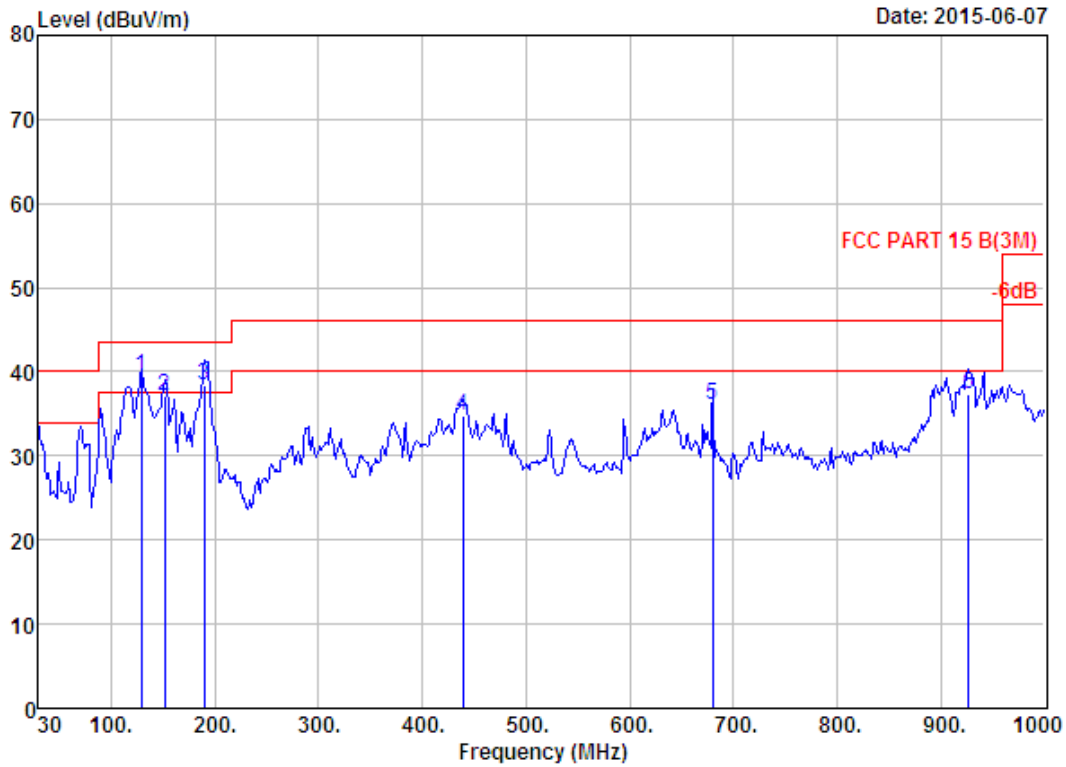


Site no. : 966 1# chamber Data no. : 349  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	128.94	11.33	1.47	26.58	39.38	43.50	4.12	QP
2	151.25	10.82	1.61	24.64	37.07	43.50	6.43	QP
3	190.05	7.94	1.76	28.68	38.38	43.50	5.12	QP
4	439.34	16.23	2.89	15.63	34.75	46.00	11.25	QP
5	679.90	20.29	3.66	12.10	36.05	46.00	9.95	QP
6	927.25	24.27	4.50	8.59	37.36	46.00	8.64	QP

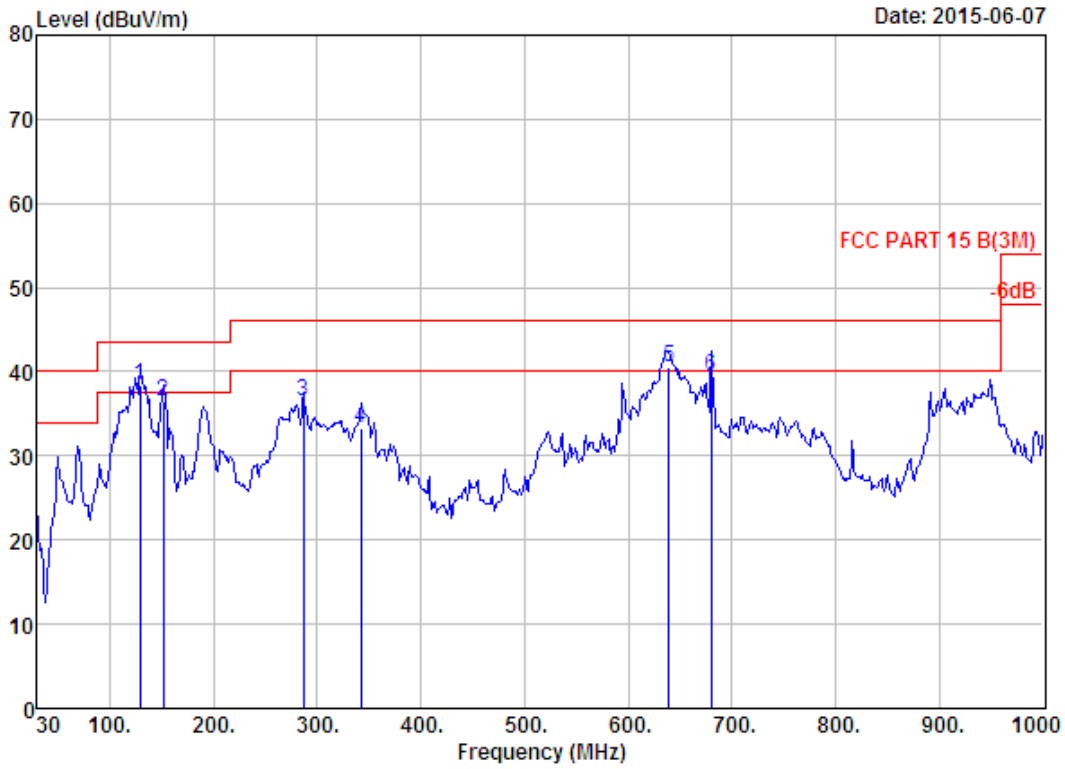


Site no. : 966 1# chamber                      Data no. : 350  
 Dis. / Ant. : 3m 27137                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
                     Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	128.94	11.33	1.47	25.57	38.37	43.50	5.13	QP
2	151.25	10.82	1.61	24.04	36.47	43.50	7.03	QP
3	287.05	12.59	2.32	21.61	36.52	46.00	9.48	QP
4	342.34	14.22	2.54	16.51	33.27	46.00	12.73	QP
5	639.16	20.03	3.56	16.85	40.44	46.00	5.56	QP
6	679.90	20.29	3.66	15.57	39.52	46.00	6.48	QP

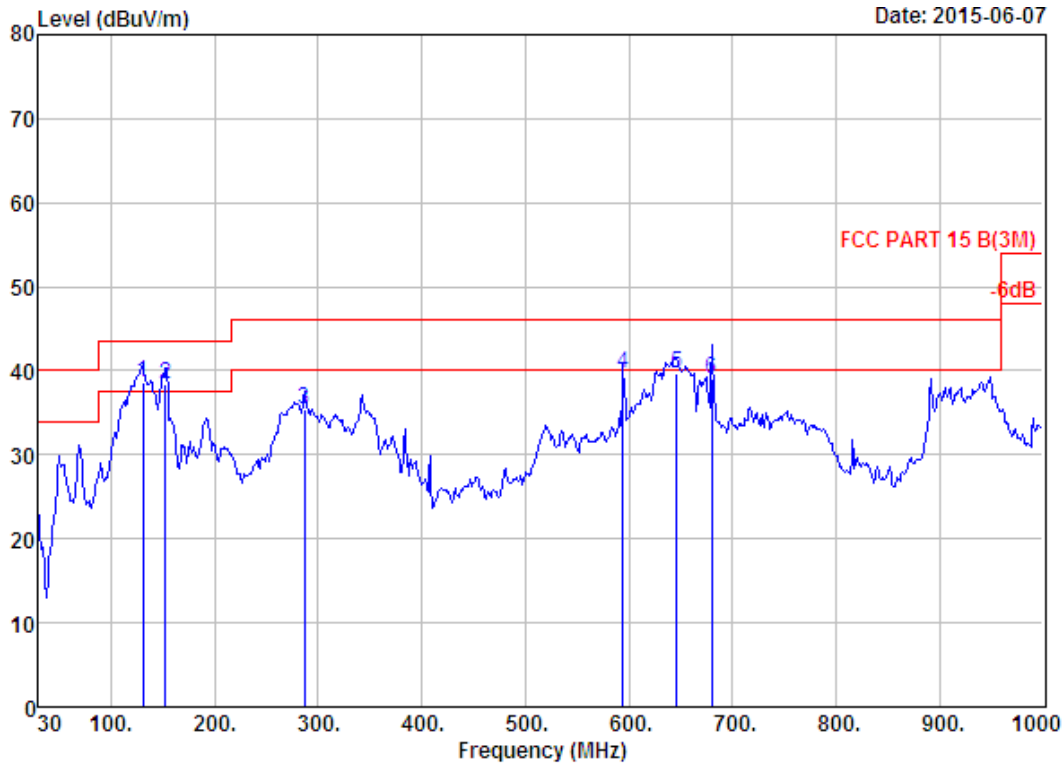


Site no. : 966 1# chamber Data no. : 351  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH1 2422TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	130.88	11.33	1.47	25.88	38.68	43.50	4.82	QP
2	152.22	10.78	1.62	25.99	38.39	43.50	5.11	QP
3	287.05	12.59	2.32	20.61	35.52	46.00	10.48	QP
4	594.54	19.51	3.33	16.87	39.71	46.00	6.29	QP
5	645.95	20.06	3.56	16.06	39.68	46.00	6.32	QP
6	679.90	20.29	3.66	15.18	39.13	46.00	6.87	QP

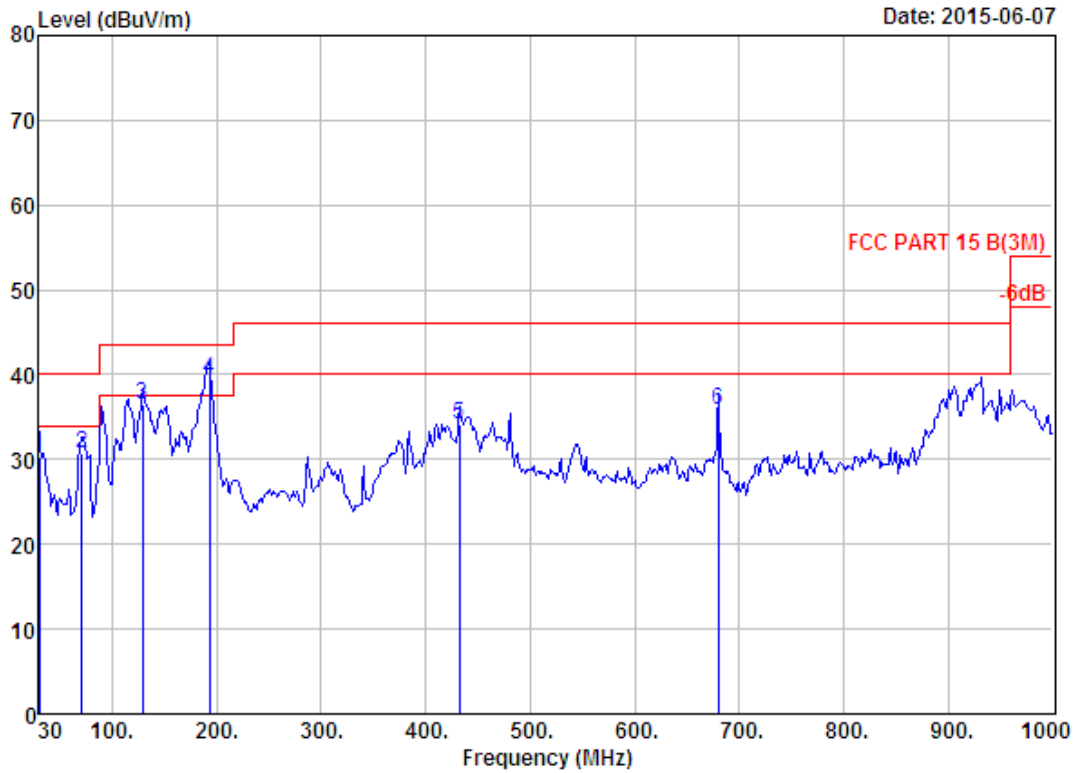


Site no. : 966 1# chamber Data no. : 352  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH1 2422TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	11.15	30.31	40.00	9.69	QP
2	70.74	5.82	1.04	23.80	30.66	40.00	9.34	QP
3	128.94	11.33	1.47	23.65	36.45	43.50	7.05	QP
4	192.96	7.85	1.77	29.91	39.53	43.50	3.97	QP
5	432.55	16.11	2.78	15.32	34.21	46.00	11.79	QP
6	679.90	20.29	3.66	11.87	35.82	46.00	10.18	QP

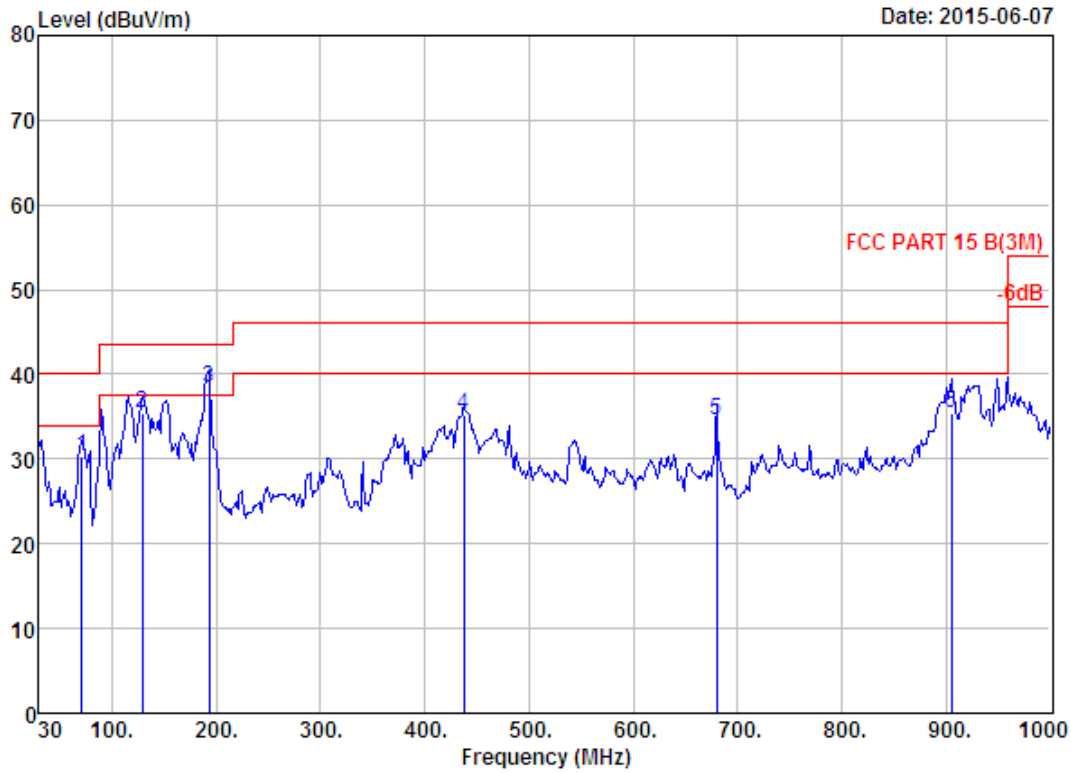

Site no. : 966 1# chamber                      Data no. : 353  
 Dis. / Ant. : 3m 27137                              Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH5 2442TX  
                   Antenna b


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	70.74	5.82	1.04	23.39	30.25	40.00	9.75	QP
2	128.94	11.33	1.47	22.62	35.42	43.50	8.08	QP
3	192.96	7.85	1.77	28.84	38.46	43.50	5.04	QP
4	437.40	16.20	2.85	16.20	35.25	46.00	10.75	QP
5	679.90	20.29	3.66	10.61	34.56	46.00	11.44	QP
6	904.94	23.40	4.10	7.95	35.45	46.00	10.55	QP

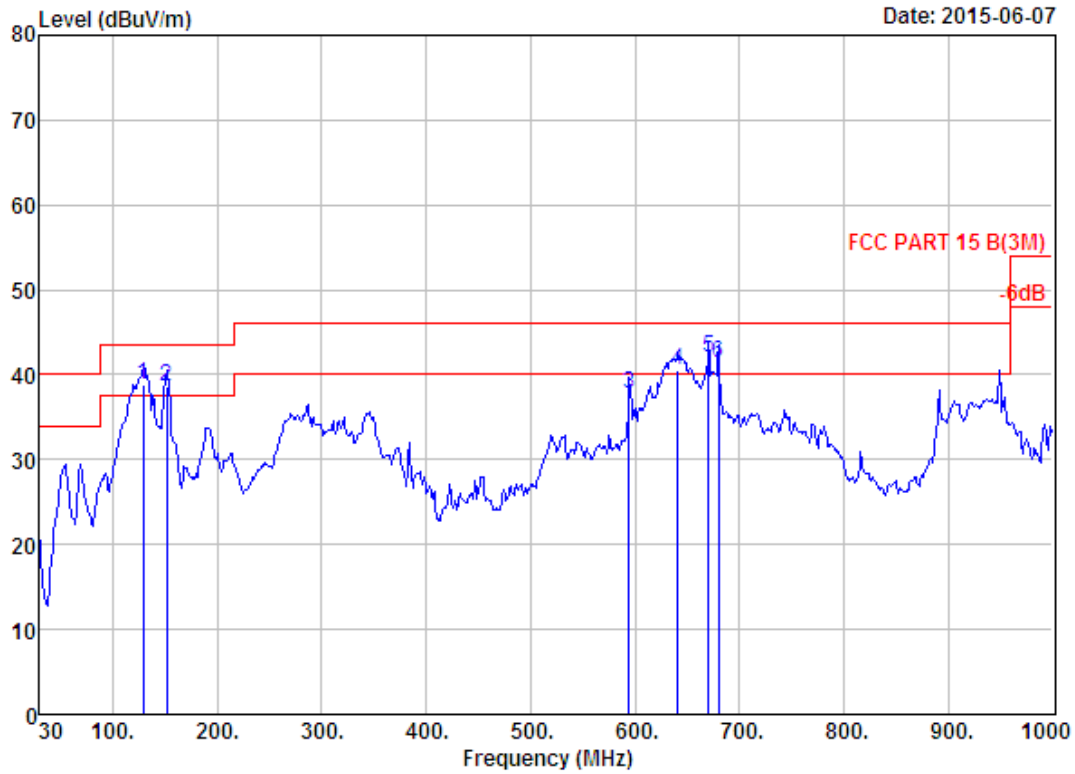

Site no. : 966 1# chamber Data no. : 354  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH5 2442TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	128.94	11.33	1.47	25.99	38.79	43.50	4.71	QP
2	151.25	10.82	1.61	26.14	38.57	43.50	4.93	QP
3	594.54	19.51	3.33	14.91	37.75	46.00	8.25	QP
4	641.10	20.02	3.56	17.06	40.64	46.00	5.36	QP
5	670.20	20.22	3.66	18.14	42.02	46.00	3.98	QP
6	679.90	20.29	3.66	17.50	41.45	46.00	4.55	QP



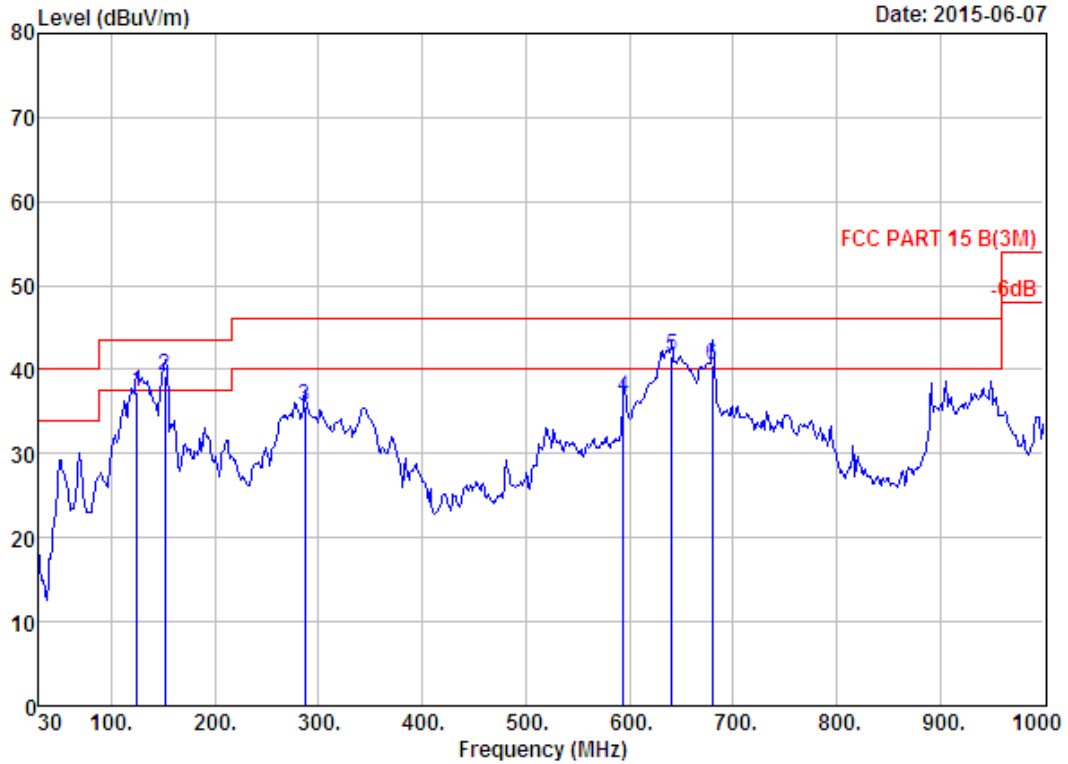


Site no. : 966 1# chamber                      Data no. : 355  
 Dis. / Ant. : 3m 27137                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH9 2462TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	125.06	11.35	1.52	24.55	37.42	43.50	6.08	QP
2	151.25	10.82	1.61	26.77	39.20	43.50	4.30	QP
3	287.05	12.59	2.32	20.61	35.52	46.00	10.48	QP
4	594.54	19.51	3.33	13.92	36.76	46.00	9.24	QP
5	641.10	20.02	3.56	18.04	41.62	46.00	4.38	QP
6	679.90	20.29	3.66	16.66	40.61	46.00	5.39	QP




1000-18000 MHz

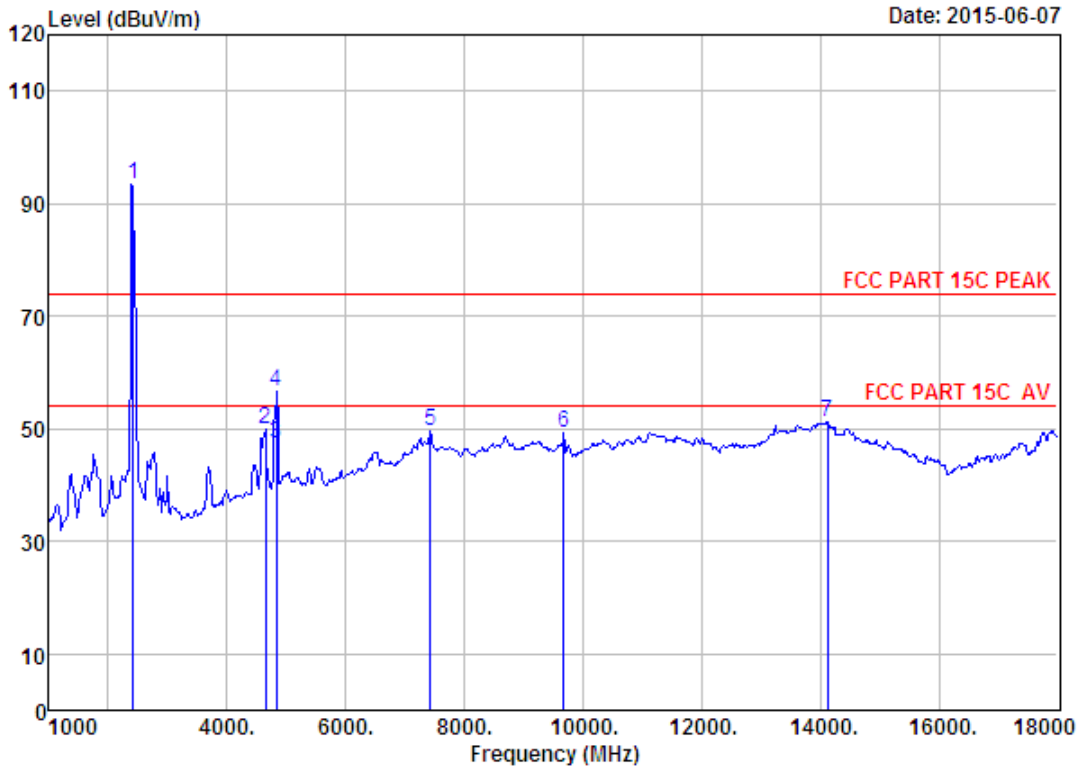

Site no. : 1# 966 chamber Data no. : 181  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH1 2412TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	93.69	93.29	74.00	-19.29	Peak
2	4655.00	30.94	11.09	35.57	43.31	49.77	74.00	24.23	Peak
3	4824.00	31.28	11.84	35.66	40.01	47.47	54.00	6.53	Average
4	4824.00	31.28	11.84	35.66	49.11	56.57	74.00	17.43	Peak
5	7426.00	36.56	11.60	34.22	35.56	49.50	74.00	24.50	Peak
6	9670.00	38.01	11.67	35.09	34.63	49.22	74.00	24.78	Peak
7	14124.00	41.57	10.91	33.22	31.81	51.07	74.00	22.93	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

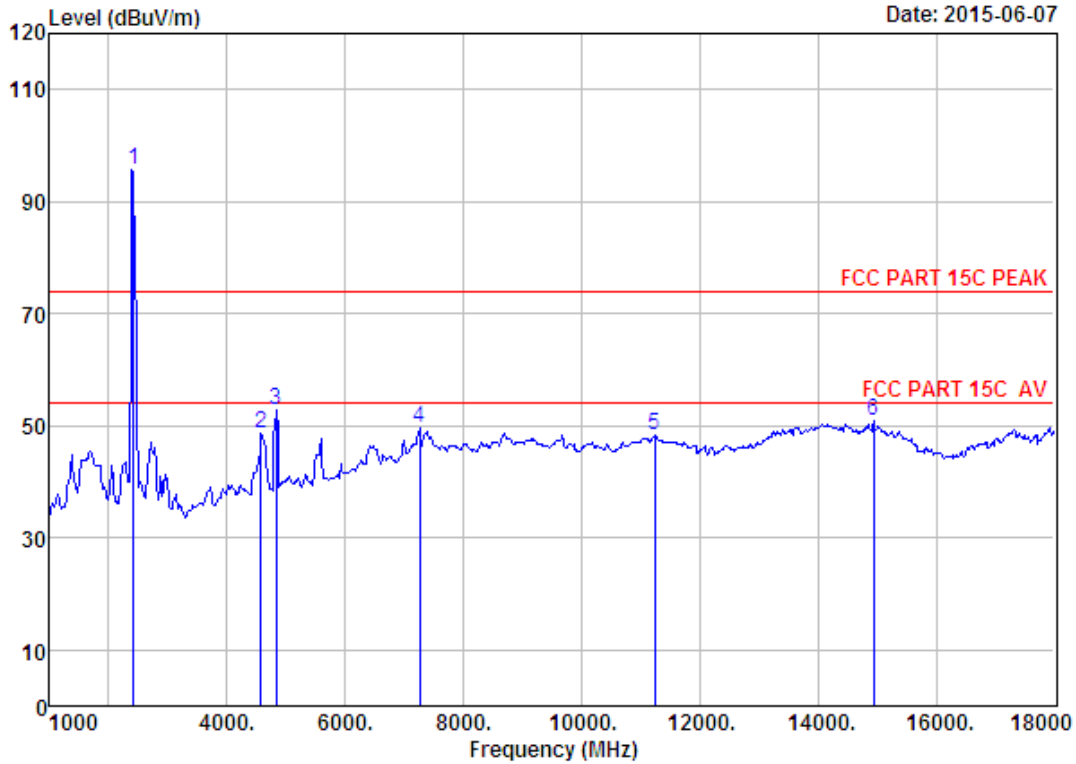


Site no. : 1# 966 chamber                      Data no. : 182  
 Dis. / Ant. : 3m ANI 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH1 2412TX  
                     Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	95.95	95.55	74.00	-21.55	Peak
2	4570.00	30.74	10.72	35.61	42.77	48.62	74.00	25.38	Peak
3	4824.00	31.28	11.84	35.66	45.40	52.86	74.00	21.14	Peak
4	7256.00	36.53	11.55	34.02	35.55	49.61	74.00	24.39	Peak
5	11234.00	39.37	11.12	33.25	31.13	48.37	74.00	25.63	Peak
6	14940.00	40.42	10.87	33.59	33.03	50.73	74.00	23.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




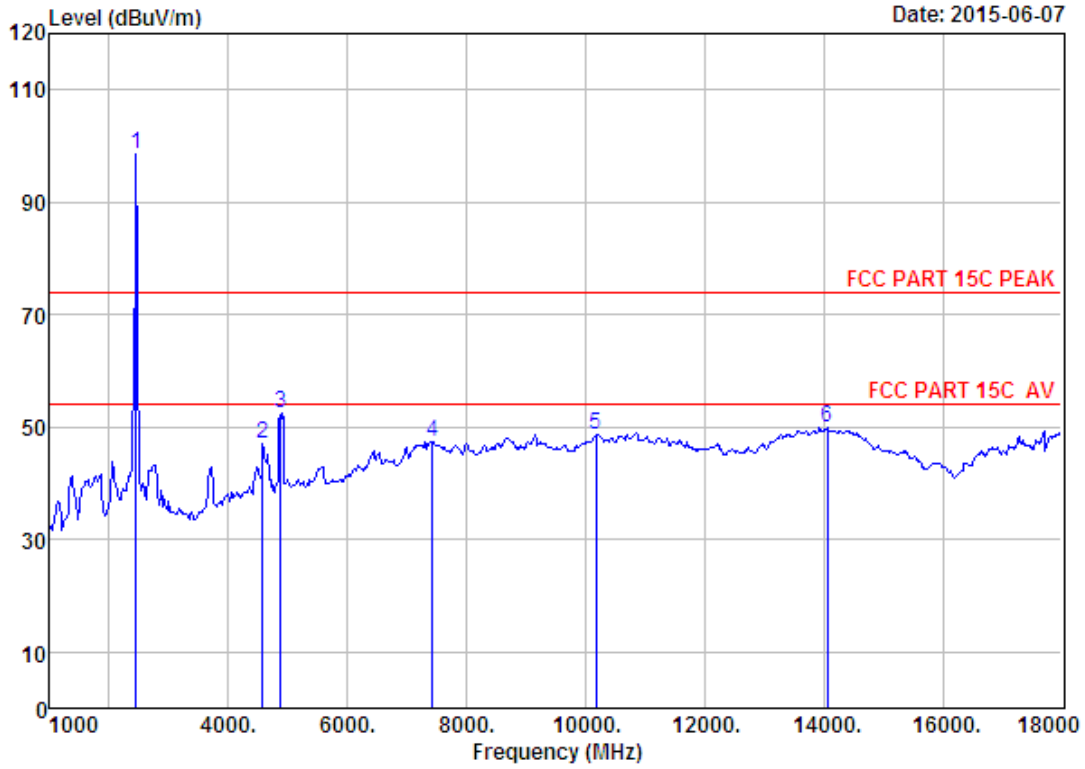

Site no. : 1# 966 chamber Data no. : 185  
 Dis. / Ant. : 3m ANI 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH7 2442TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2442.00	27.60	6.67	34.85	99.05	98.47	74.00	-24.47	Peak
2	4570.00	30.74	10.72	35.61	41.21	47.06	74.00	26.94	Peak
3	4884.00	31.37	12.07	35.82	44.71	52.33	74.00	21.67	Peak
4	7426.00	36.56	11.60	34.22	33.49	47.43	74.00	26.57	Peak
5	10180.00	38.42	11.49	34.53	33.24	48.62	74.00	25.38	Peak
6	14056.00	41.51	10.90	33.06	30.56	49.91	74.00	24.09	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

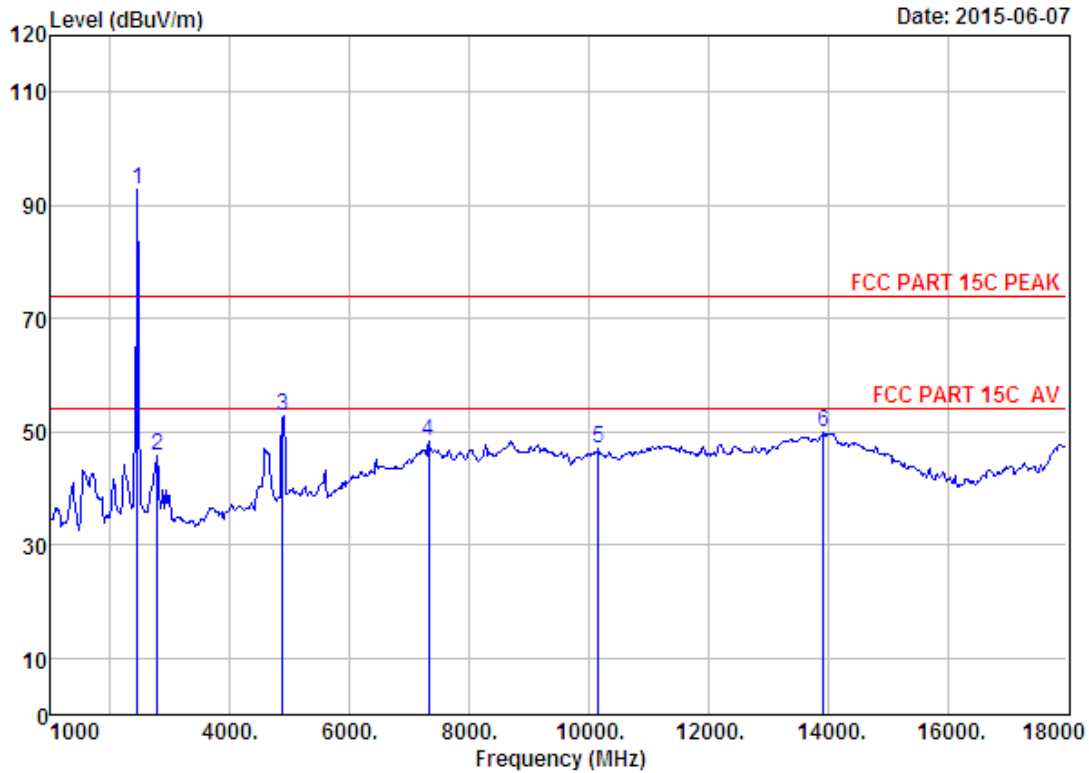

Site no. : 1# 966 chamber Data no. : 186  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH7 2442TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2442.00	27.60	6.67	34.85	93.33	92.75	74.00	-18.75	Peak
2	2785.00	27.89	8.04	36.69	46.44	45.68	74.00	28.32	Peak
3	4884.00	31.37	12.07	35.82	45.30	52.92	74.00	21.08	Peak
4	7324.00	36.55	11.57	34.14	34.23	48.21	74.00	25.79	Peak
5	10163.00	38.39	11.50	34.56	31.61	46.94	74.00	27.06	Peak
6	13920.00	41.26	11.00	33.00	30.57	49.83	74.00	24.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

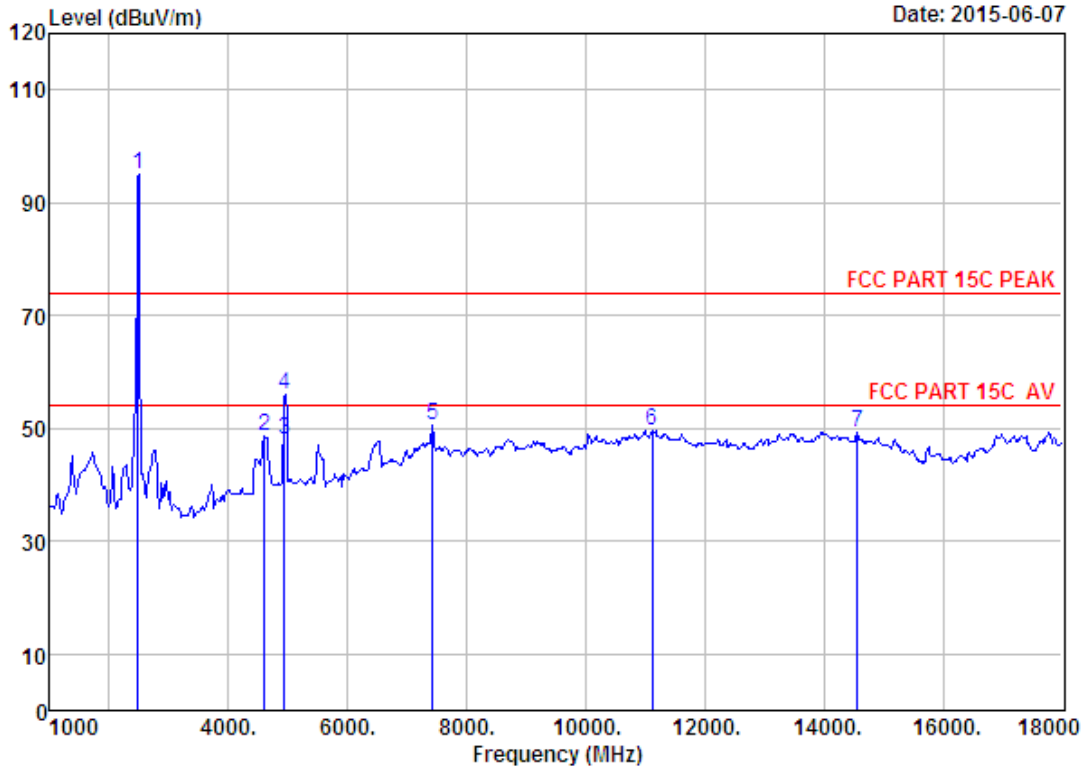

Site no. : 1# 966 chamber Data no. : 187  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH13 2472TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2472.00	27.58	6.71	35.11	96.00	95.18	74.00	-21.18	Peak
2	4604.00	30.80	10.87	35.59	42.47	48.55	74.00	25.45	Peak
3	4944.00	31.47	12.37	35.96	40.01	47.89	54.00	6.11	Average
4	4944.00	31.47	12.37	35.96	48.10	55.98	74.00	18.02	Peak
5	7426.00	36.56	11.60	34.22	36.48	50.42	74.00	23.58	Peak
6	11115.00	39.44	11.20	33.55	32.62	49.71	74.00	24.29	Peak
7	14566.00	41.71	10.92	33.66	30.39	49.36	74.00	24.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

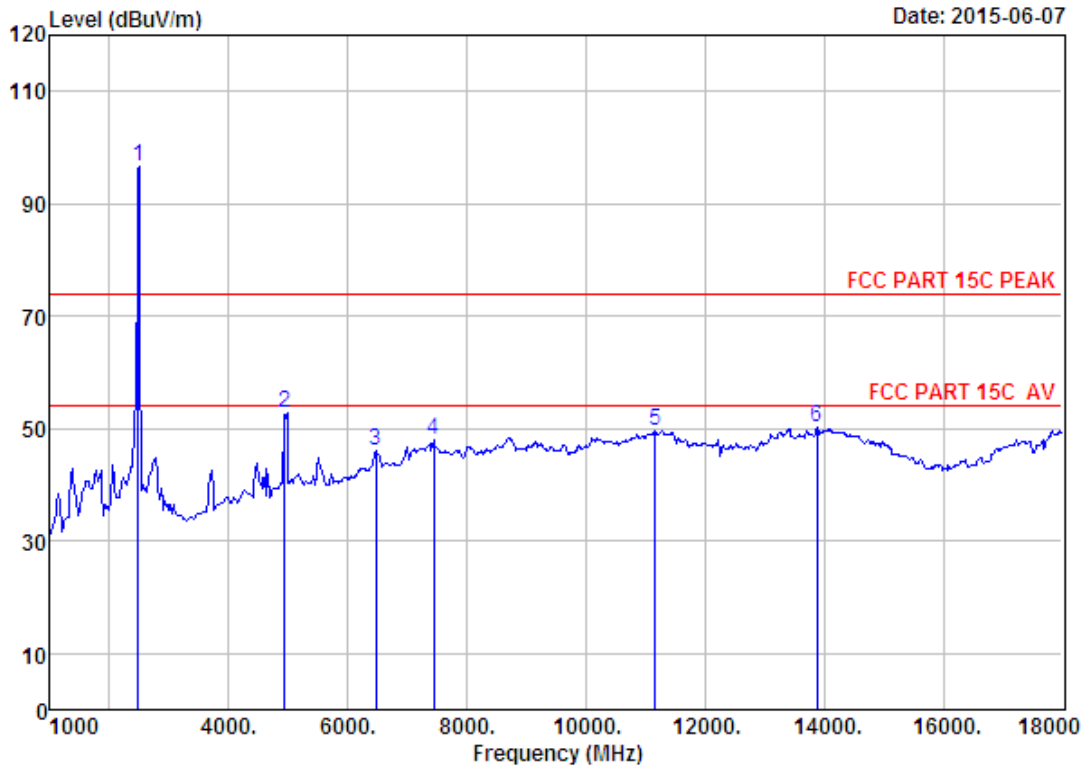


Site no. : 1# 966 chamber Data no. : 188  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH13 2472TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2472.00	27.58	6.71	35.11	97.35	96.53	74.00	-22.53	Peak
2	4944.00	31.47	12.37	35.96	44.83	52.71	74.00	21.29	Peak
3	6474.00	34.16	12.22	35.18	34.77	45.97	74.00	28.03	Peak
4	7443.00	36.54	11.61	34.22	33.91	47.84	74.00	26.16	Peak
5	11166.00	39.41	11.17	33.31	32.36	49.63	74.00	24.37	Peak
6	13886.00	41.16	11.04	33.03	30.93	50.10	74.00	23.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




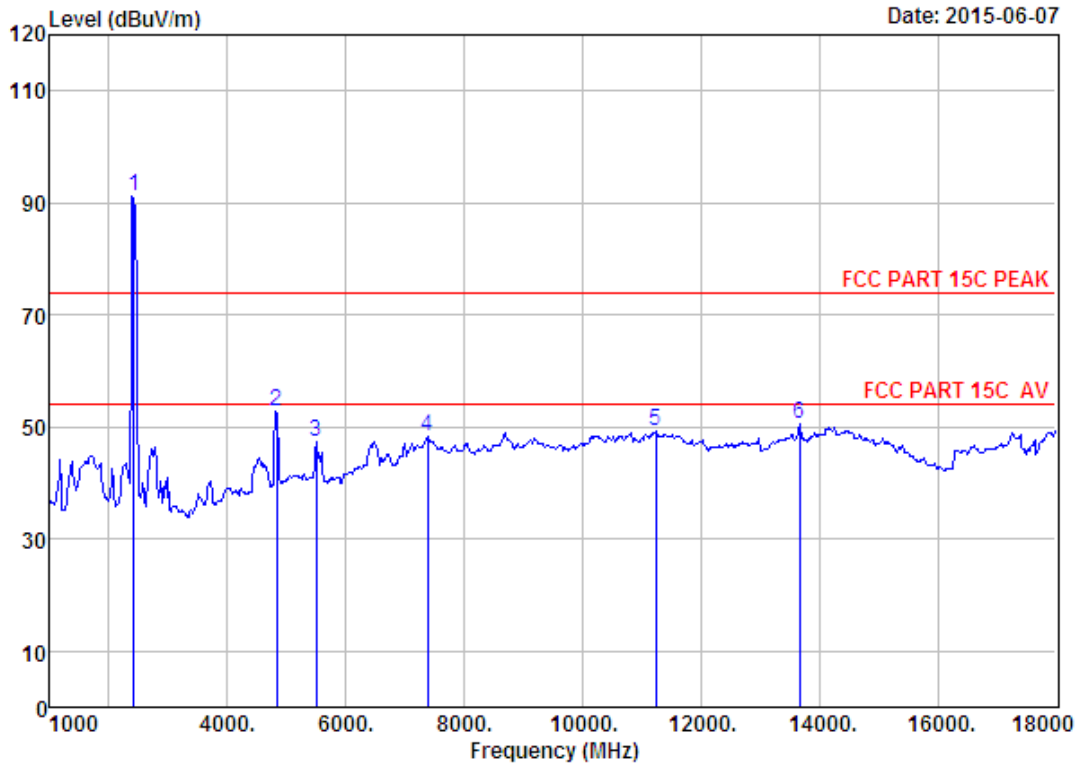

Site no. : 1# 966 chamber                      Data no. : 191  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	91.61	91.21	74.00	-17.21	Peak
2	4824.00	31.28	11.84	35.66	45.28	52.74	74.00	21.26	Peak
3	5505.00	31.90	11.99	36.05	39.68	47.52	74.00	26.48	Peak
4	7375.00	36.57	11.59	34.21	34.30	48.25	74.00	25.75	Peak
5	11234.00	39.37	11.12	33.25	31.92	49.16	74.00	24.84	Peak
6	13665.00	40.55	11.30	32.75	31.39	50.49	74.00	23.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

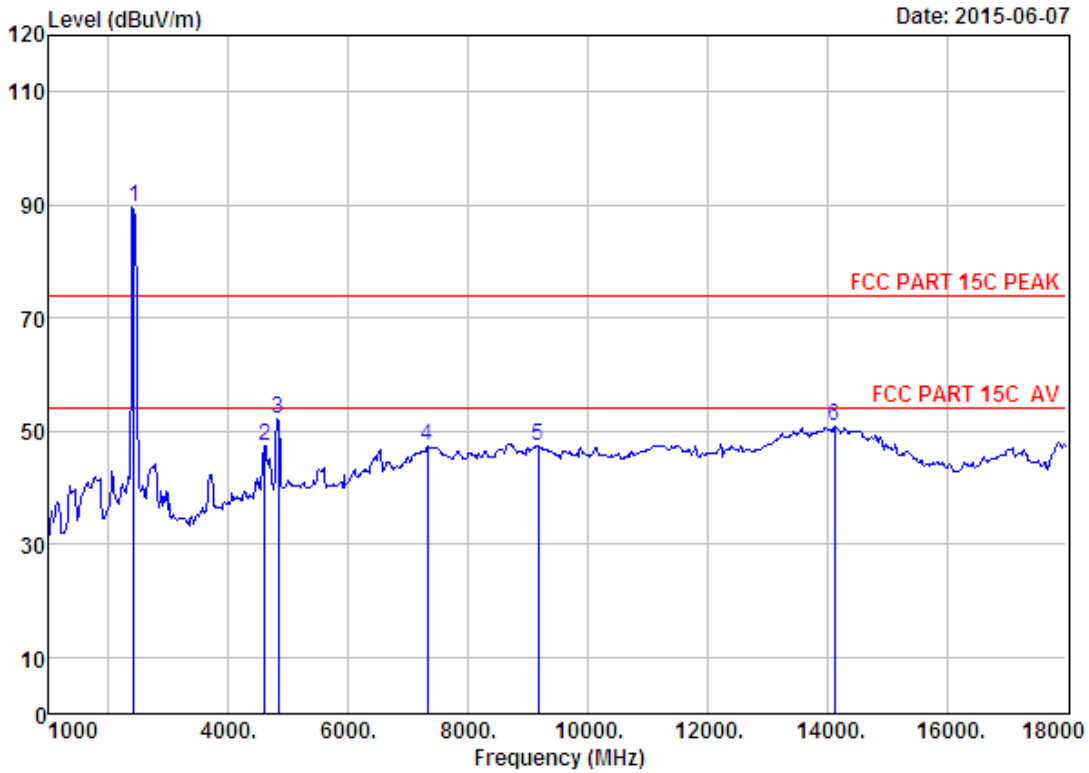

Site no. : 1# 966 chamber Data no. : 192  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	90.09	89.69	74.00	-15.69	Peak
2	4604.00	30.80	10.87	35.59	41.35	47.43	74.00	26.57	Peak
3	4824.00	31.28	11.84	35.66	44.74	52.20	74.00	21.80	Peak
4	7324.00	36.55	11.57	34.14	33.26	47.24	74.00	26.76	Peak
5	9177.00	37.72	11.55	34.12	32.12	47.27	74.00	26.73	Peak
6	14124.00	41.57	10.91	33.22	31.56	50.82	74.00	23.18	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

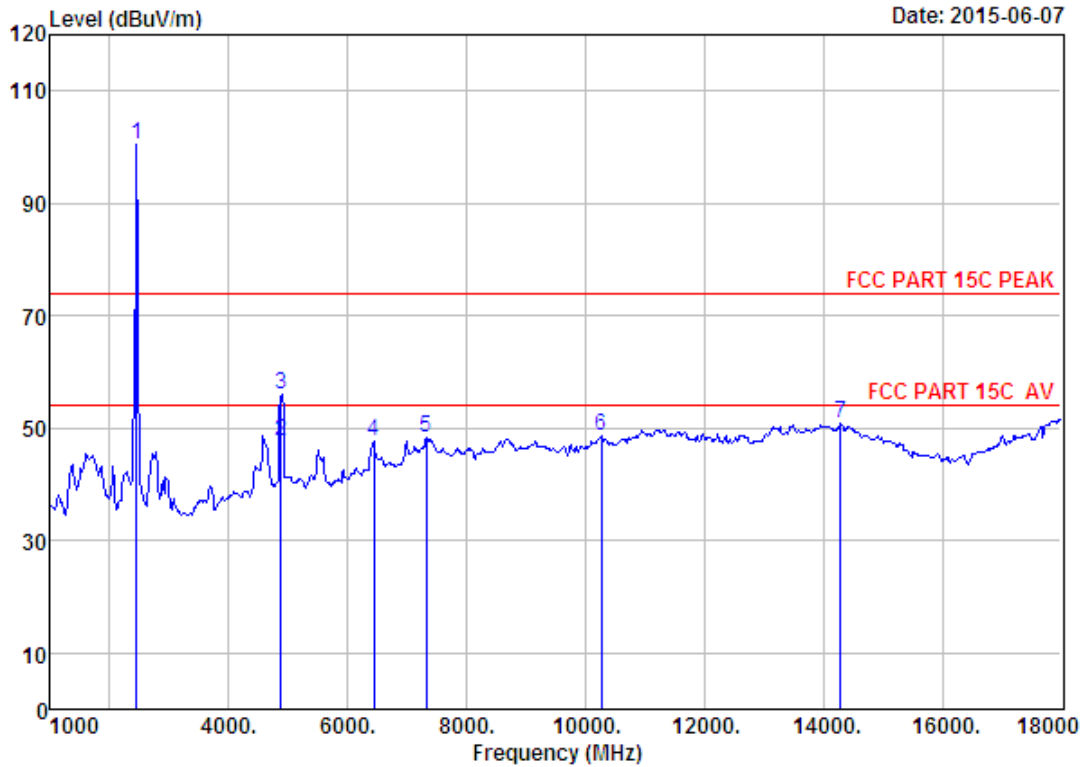

Site no. : 1# 966 chamber Data no. : 195  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6°;Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH7 2442TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2442.00	27.60	6.67	34.85	101.08	100.50	74.00	-26.50	Peak
2	4884.00	31.37	12.07	35.82	40.04	47.66	54.00	6.34	Average
3	4884.00	31.37	12.07	35.82	48.38	56.00	74.00	18.00	Peak
4	6440.00	34.08	12.22	35.29	36.62	47.63	74.00	26.37	Peak
5	7324.00	36.55	11.57	34.14	34.48	48.46	74.00	25.54	Peak
6	10265.00	38.56	11.44	34.49	33.02	48.53	74.00	25.47	Peak
7	14294.00	41.71	10.92	33.42	31.82	51.03	74.00	22.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

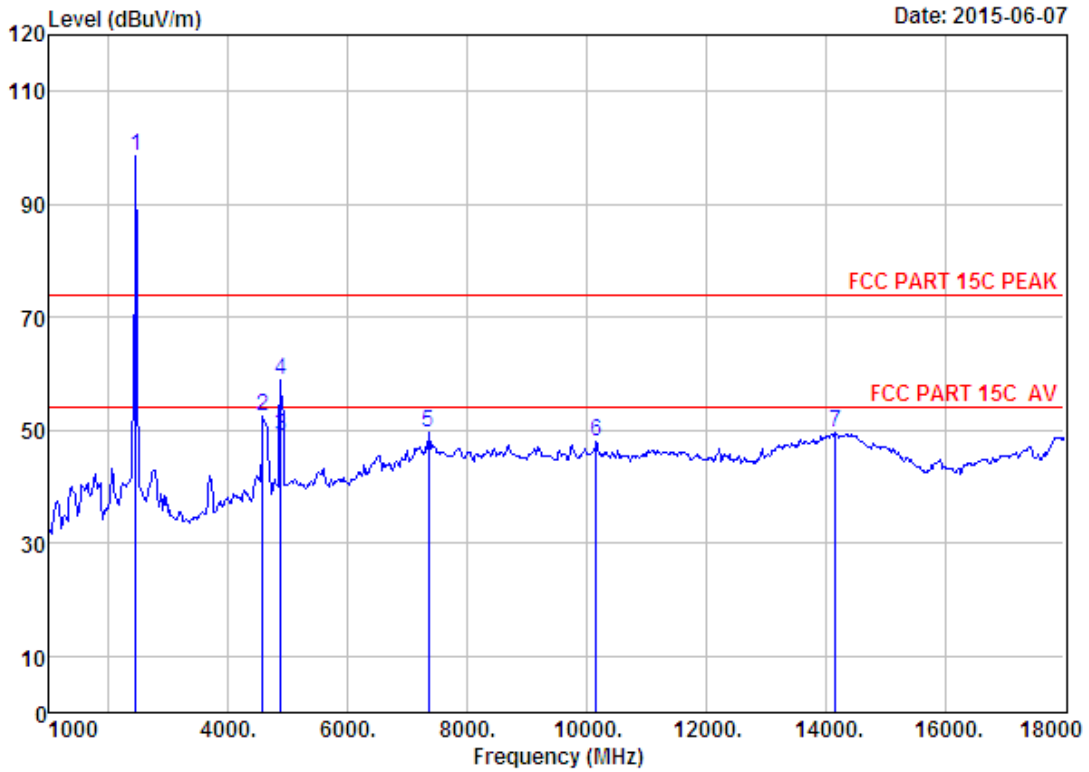

Site no. : 1# 966 chamber Data no. : 196  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH7 2442TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2442.00	27.60	6.67	34.85	99.29	98.71	74.00	-24.71	Peak
2	4570.00	30.74	10.72	35.61	46.61	52.46	74.00	21.54	Peak
3	4884.00	31.37	12.07	35.82	41.23	48.85	54.00	5.15	Average
4	4884.00	31.37	12.07	35.82	51.19	58.81	74.00	15.19	Peak
5	7358.00	36.56	11.58	34.19	35.73	49.68	74.00	24.32	Peak
6	10163.00	38.39	11.50	34.56	32.64	47.97	74.00	26.03	Peak
7	14175.00	41.61	10.91	33.35	30.33	49.50	74.00	24.50	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

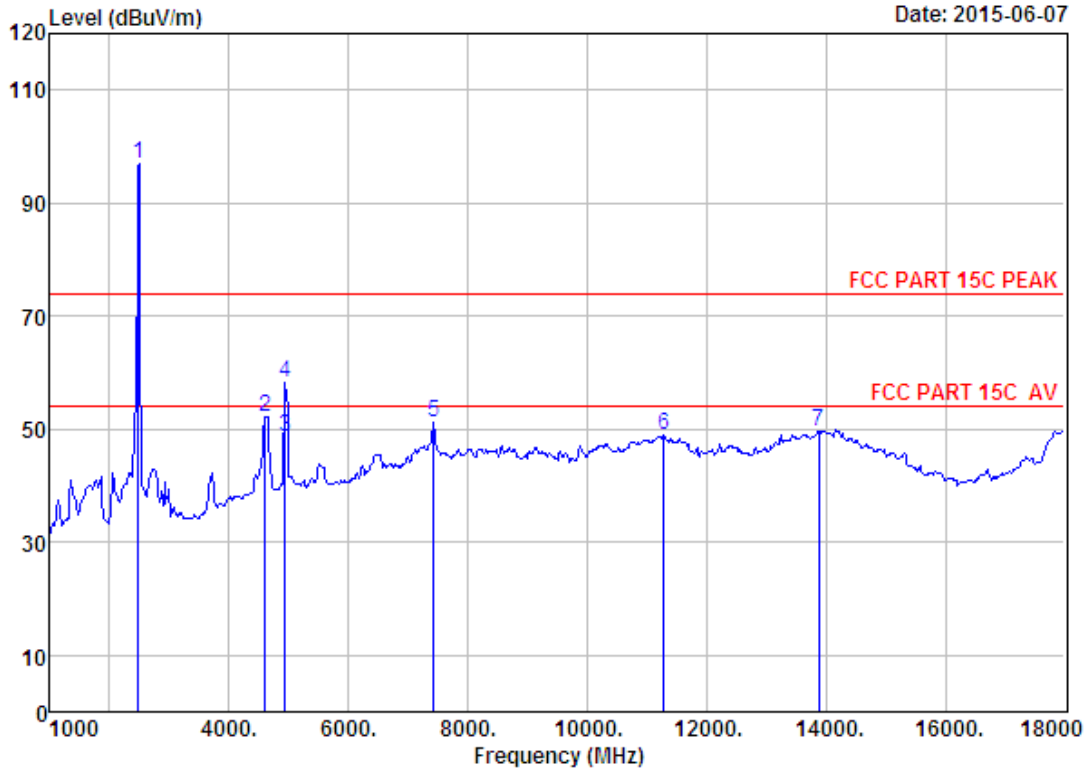

Site no. : 1# 966 chamber Data no. : 197  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH13 2472TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2472.00	27.58	6.71	35.11	97.70	96.88	74.00	-22.88	Peak
2	4604.00	30.80	10.87	35.59	46.08	52.16	74.00	21.84	Peak
3	4944.00	31.47	12.37	35.96	40.78	48.66	54.00	5.34	Average
4	4944.00	31.47	12.37	35.96	50.24	58.12	74.00	15.88	Peak
5	7426.00	36.56	11.60	34.22	37.40	51.34	74.00	22.66	Peak
6	11285.00	39.33	11.08	33.32	31.74	48.83	74.00	25.17	Peak
7	13886.00	41.16	11.04	33.03	30.52	49.69	74.00	24.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

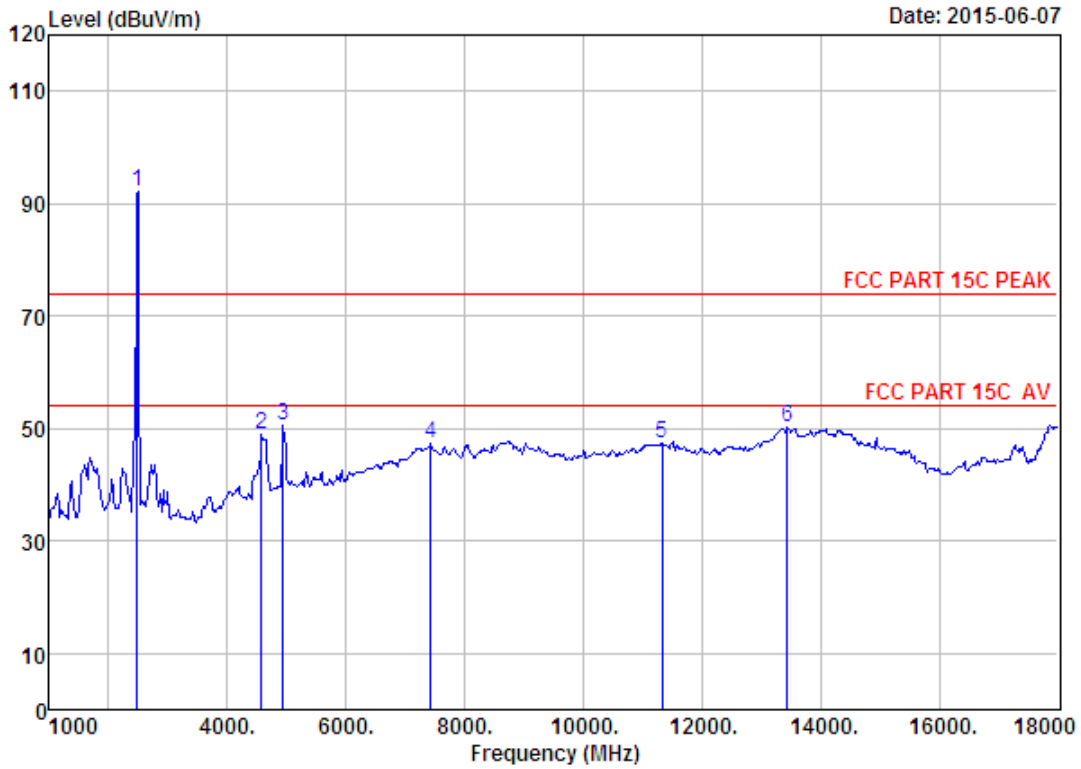


Date: 2015-06-07

Site no. : 1# 966 chamber Data no. : 198  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH13 2472TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2472.00	27.58	6.71	35.11	93.02	92.20	74.00	-18.20	Peak
2	4570.00	30.74	10.72	35.61	42.96	48.81	74.00	25.19	Peak
3	4944.00	31.47	12.37	35.96	42.72	50.60	74.00	23.40	Peak
4	7426.00	36.56	11.60	34.22	33.36	47.30	74.00	26.70	Peak
5	11336.00	39.30	11.04	33.44	30.51	47.41	74.00	26.59	Peak
6	13444.00	39.95	11.49	32.74	31.39	50.09	74.00	23.91	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

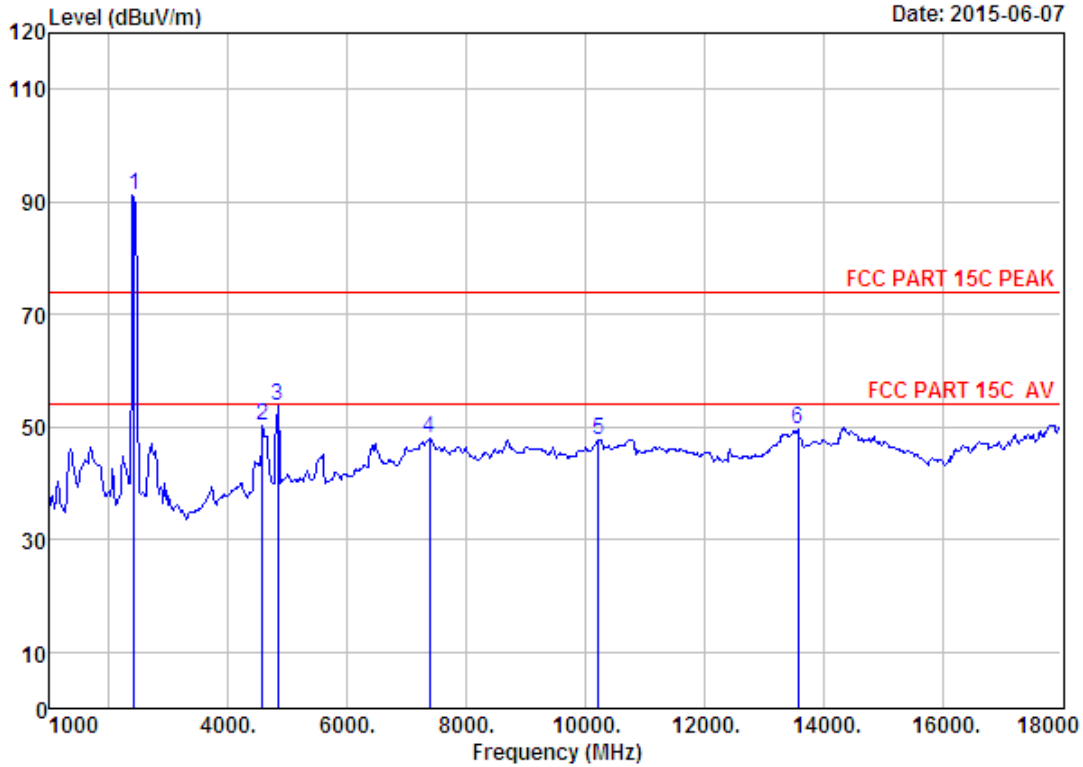

Site no. : 1# 966 chamber                      Data no. : 201  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX  
                     Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	91.62	91.22	74.00	-17.22	Peak
2	4570.00	30.74	10.72	35.61	44.26	50.11	74.00	23.89	Peak
3	4824.00	31.28	11.84	35.66	46.25	53.71	74.00	20.29	Peak
4	7375.00	36.57	11.59	34.21	33.90	47.85	74.00	26.15	Peak
5	10214.00	38.48	11.47	34.50	32.37	47.82	74.00	26.18	Peak
6	13580.00	40.31	11.40	32.64	30.41	49.48	74.00	24.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

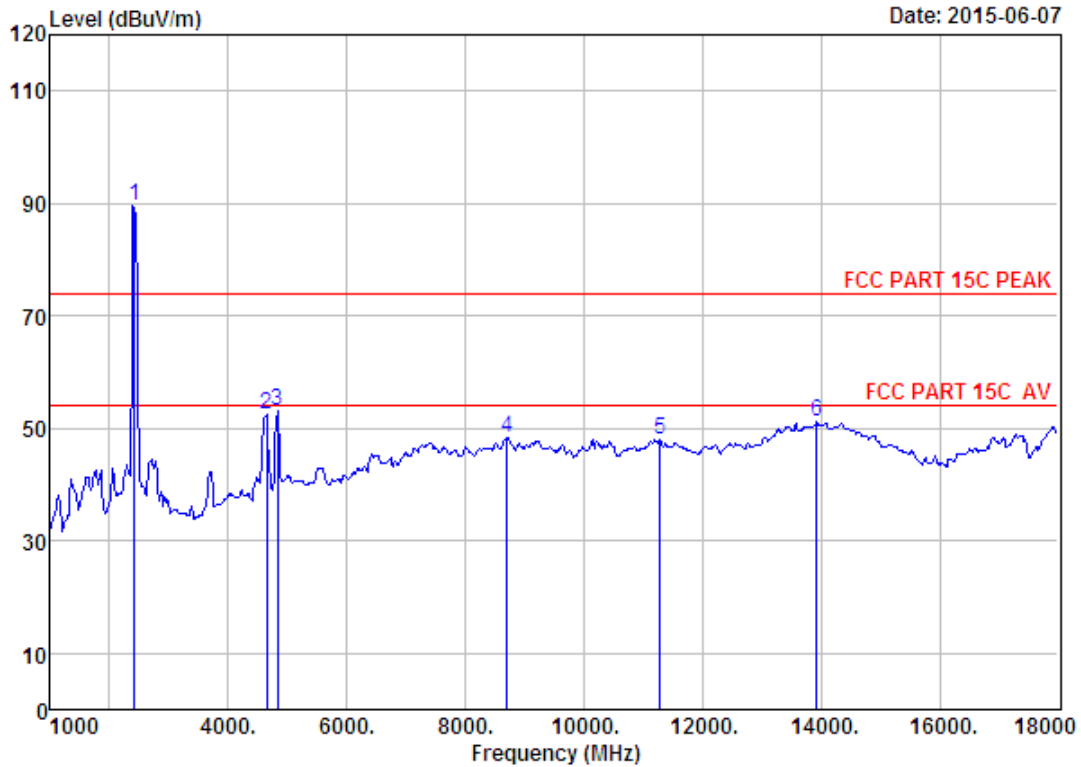

Date: 2015-06-07


Site no. : 1# 966 chamber                      Data no. : 202  
 Dis. / Ant. : 3m ANI 1-18G                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	90.11	89.71	74.00	-15.71	Peak
2	4655.00	30.94	11.09	35.57	45.99	52.45	74.00	21.55	Peak
3	4824.00	31.28	11.84	35.66	45.68	53.14	74.00	20.86	Peak
4	8701.00	37.35	11.45	33.65	33.04	48.19	74.00	25.81	Peak
5	11285.00	39.33	11.08	33.32	31.02	48.11	74.00	25.89	Peak
6	13920.00	41.26	11.00	33.00	31.88	51.14	74.00	22.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.





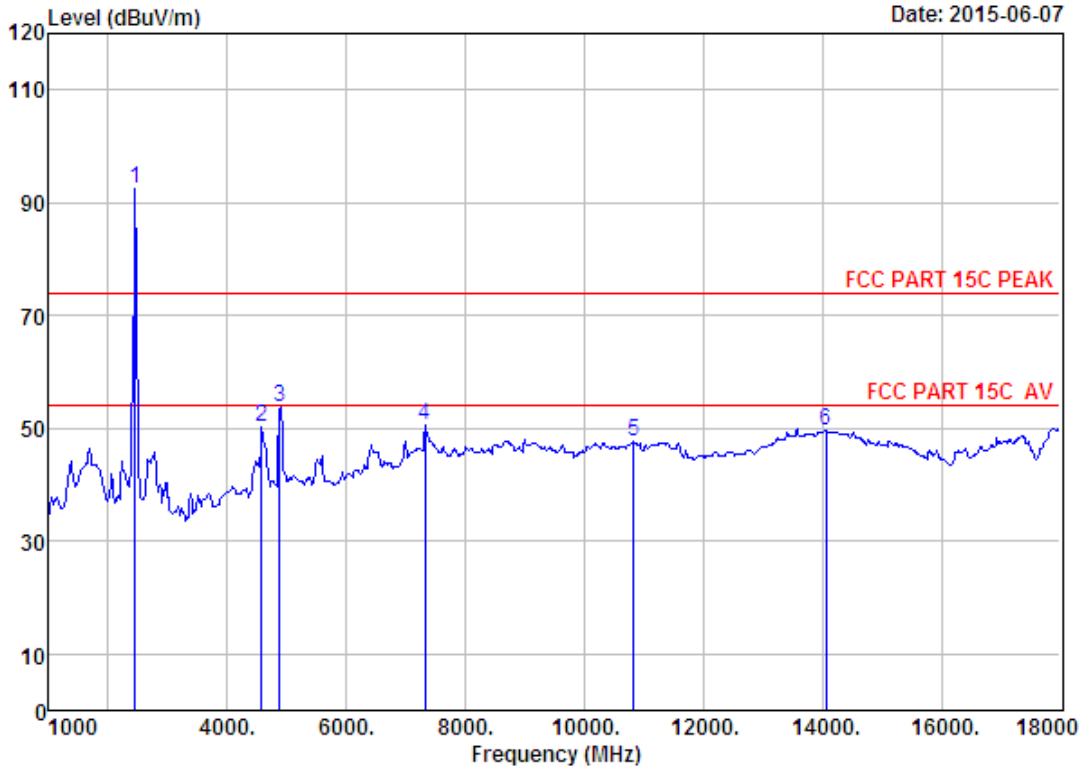


Site no. : 1# 966 chamber Data no. : 205  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Inv. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 IUT : LED TV  
 Power : AC 120V/60Hz  
 I/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH7 2442TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2442.00	27.60	6.67	34.85	93.18	92.60	74.00	-18.60	Peak
2	4570.00	30.74	10.72	35.61	44.35	50.20	74.00	23.80	Peak
3	4884.00	31.37	12.07	35.82	46.05	53.67	74.00	20.33	Peak
4	7324.00	36.55	11.57	34.14	36.73	50.71	74.00	23.29	Peak
5	10826.00	39.33	11.30	34.00	30.94	47.57	74.00	26.43	Peak
6	14056.00	41.51	10.90	33.06	30.32	49.67	74.00	24.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




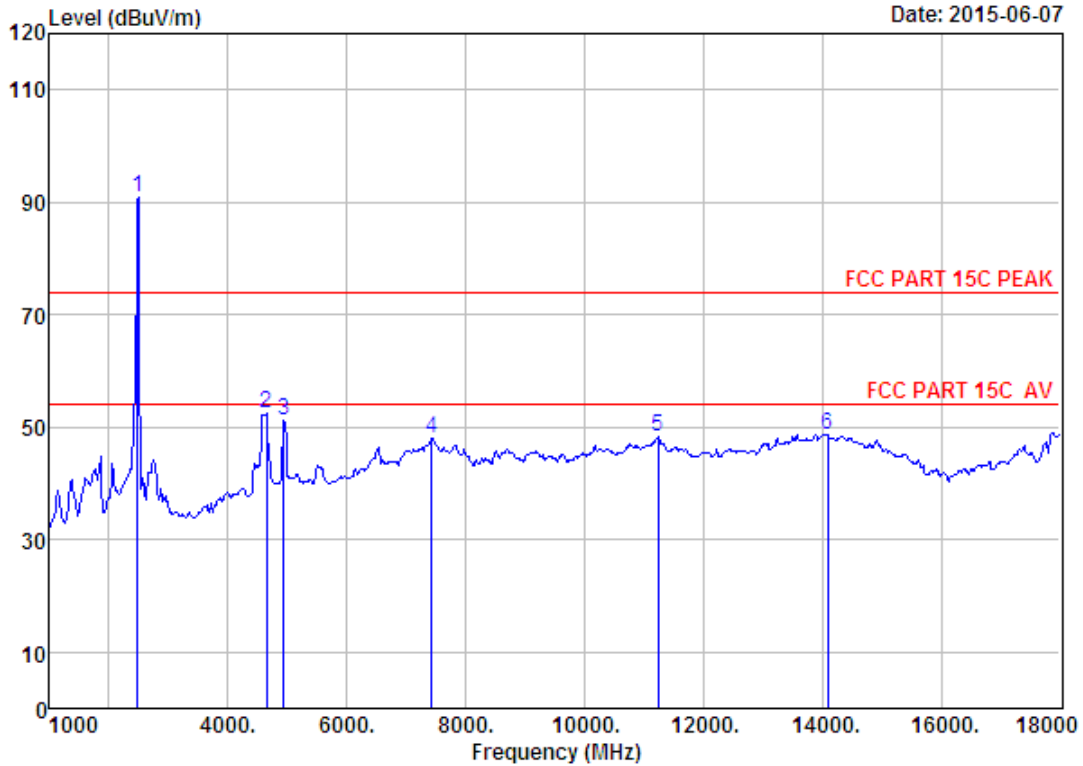

Site no. : 1# 966 chamber Data no. : 207  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2472.00	27.58	6.71	35.11	91.75	90.93	74.00	-16.93	Peak
2	4655.00	30.94	11.09	35.57	45.95	52.41	74.00	21.59	Peak
3	4944.00	31.47	12.37	35.96	43.32	51.20	74.00	22.80	Peak
4	7426.00	36.56	11.60	34.22	34.11	48.05	74.00	25.95	Peak
5	11234.00	39.37	11.12	33.25	31.21	48.45	74.00	25.55	Peak
6	14090.00	41.54	10.91	33.13	29.41	48.73	74.00	25.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

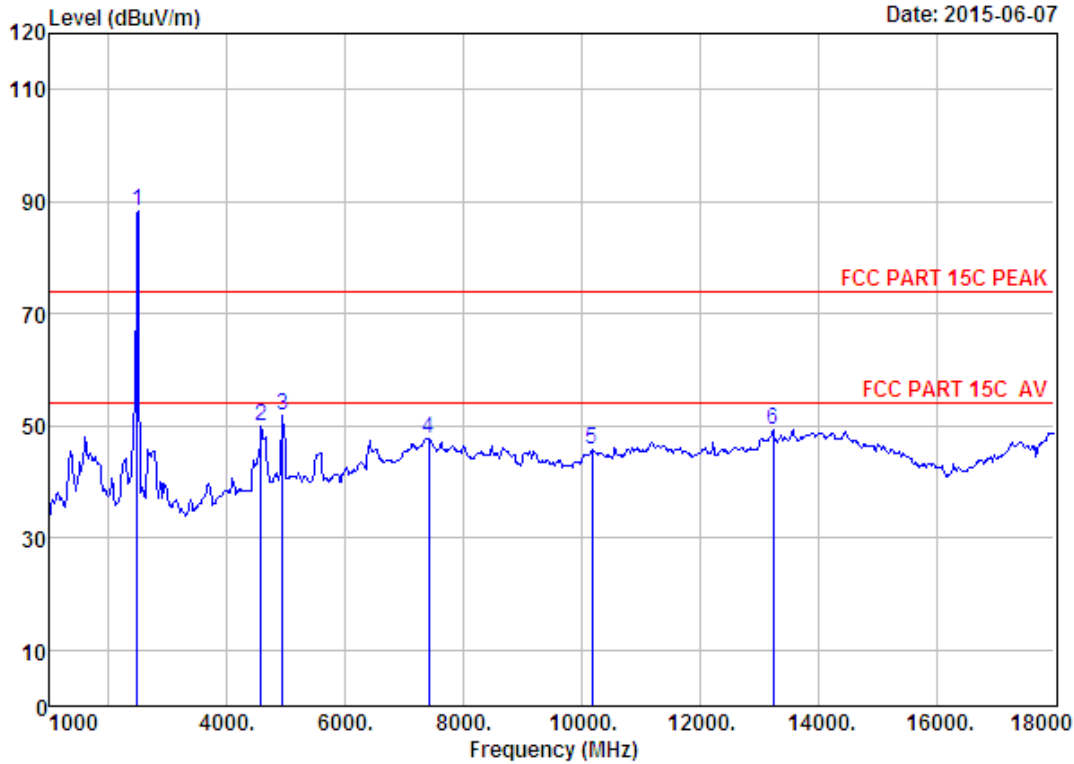


Site no. : 1# 966 chamber Data no. : 208  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2472.00	27.58	6.71	35.11	89.21	88.39	74.00	-14.39	Peak
2	4570.00	30.74	10.72	35.61	44.20	50.05	74.00	23.95	Peak
3	4944.00	31.47	12.37	35.96	44.02	51.90	74.00	22.10	Peak
4	7409.00	36.58	11.60	34.23	33.84	47.79	74.00	26.21	Peak
5	10180.00	38.42	11.49	34.53	30.45	45.83	74.00	28.17	Peak
6	13240.00	39.46	11.46	32.88	31.17	49.21	74.00	24.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




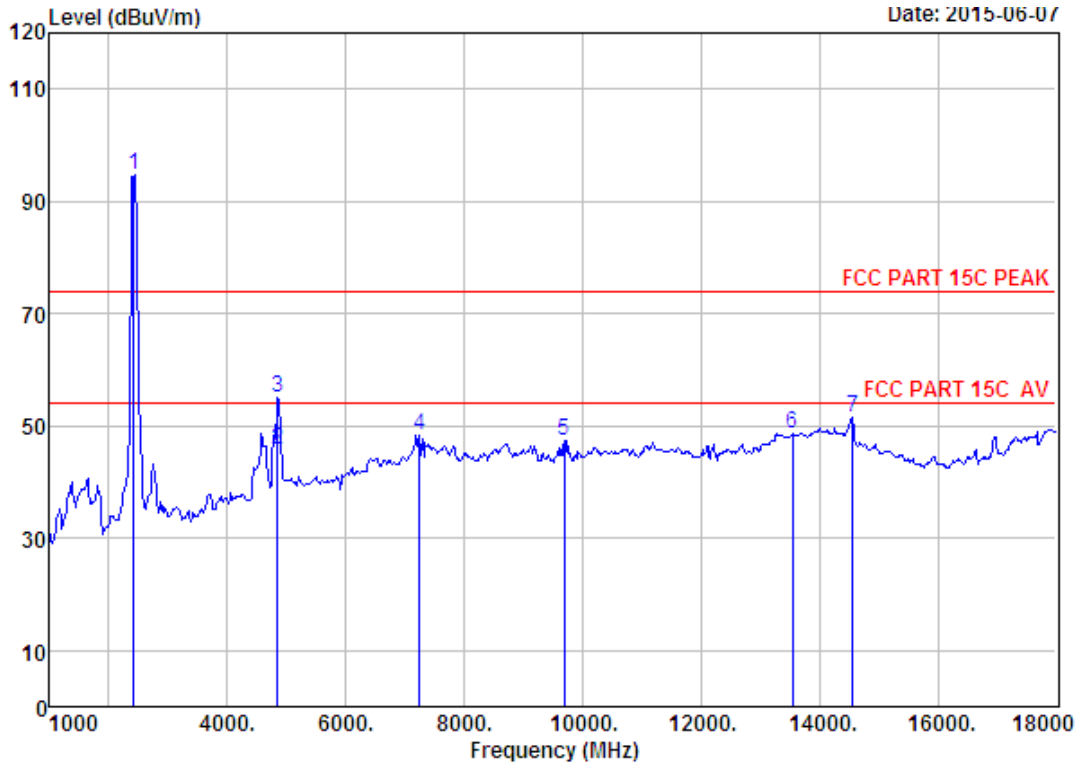

Site no. : 1# 966 chamber Data no. : 213  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH1 2422TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.60	6.66	34.74	95.09	94.61	74.00	-20.61	Peak
2	4844.00	31.31	11.92	35.68	38.20	45.75	54.00	8.25	Average
3	4844.00	31.31	11.92	35.68	47.38	54.93	74.00	19.07	Peak
4	7239.00	36.53	11.55	33.99	34.29	48.38	74.00	25.62	Peak
5	9687.00	38.03	11.66	35.10	32.84	47.43	74.00	26.57	Peak
6	13546.00	40.21	11.44	32.61	29.59	48.63	74.00	25.37	Peak
7	14566.00	41.71	10.92	33.66	32.58	51.55	74.00	22.45	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

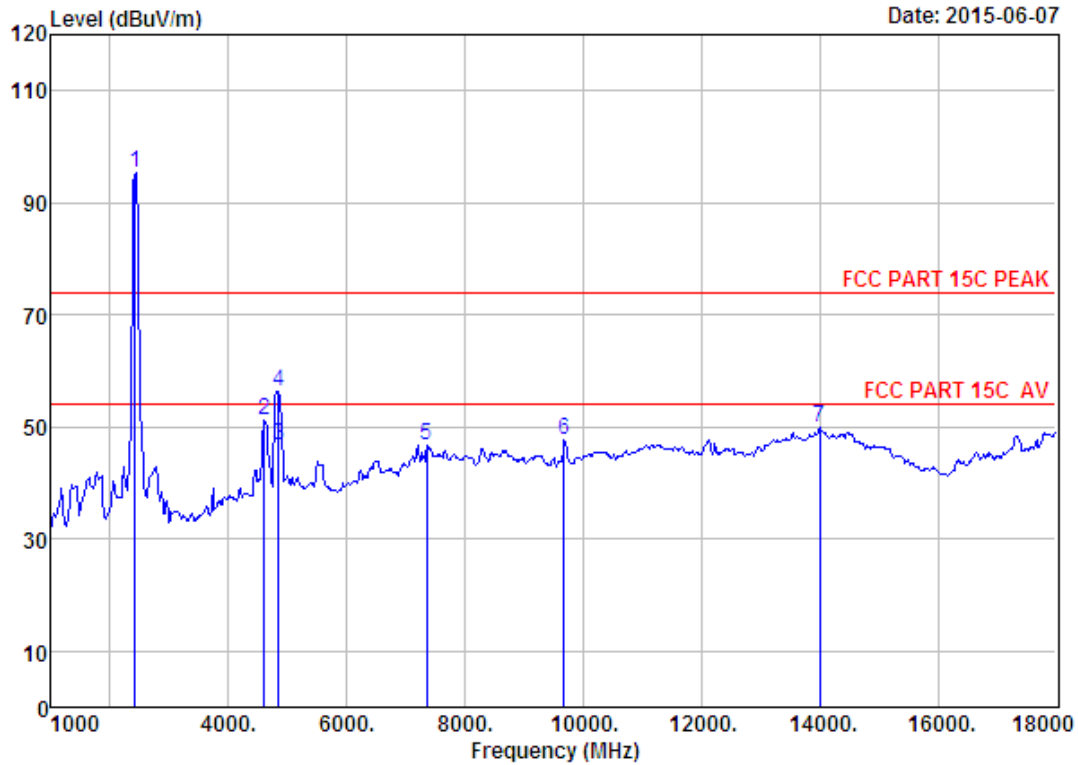


Site no. : 1# 966 chamber                      Data no. : 214  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH1 2422TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.60	6.66	34.74	95.95	95.47	74.00	-21.47	Peak
2	4604.00	30.80	10.87	35.59	45.23	51.31	74.00	22.69	Peak
3	4844.00	31.31	11.92	35.68	39.02	46.57	54.00	7.43	Average
4	4844.00	31.31	11.92	35.68	48.88	56.43	74.00	17.57	Peak
5	7358.00	36.56	11.58	34.19	32.91	46.86	74.00	27.14	Peak
6	9670.00	38.01	11.67	35.09	33.02	47.61	74.00	26.39	Peak
7	14005.00	41.46	10.90	33.01	30.43	49.78	74.00	24.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



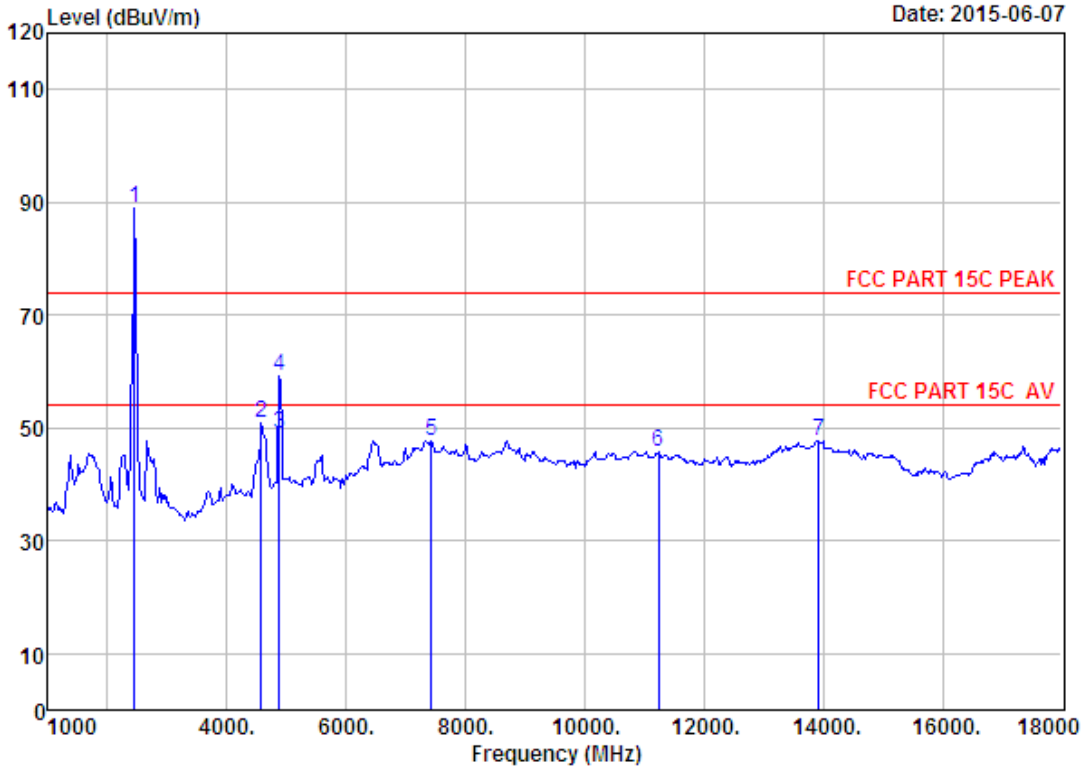


Site no. : 1# 966 chamber Data no. : 216  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH5 2442TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2442.00	27.60	6.67	34.85	89.60	89.02	74.00	-15.02	Peak
2	4570.00	30.74	10.72	35.61	45.15	51.00	74.00	23.00	Peak
3	4884.00	31.37	12.07	35.82	41.21	48.83	54.00	5.17	Average
4	4884.00	31.37	12.07	35.82	51.66	59.28	74.00	14.72	Peak
5	7426.00	36.56	11.60	34.22	33.90	47.84	74.00	26.16	Peak
6	11234.00	39.37	11.12	33.25	28.42	45.66	74.00	28.34	Peak
7	13920.00	41.26	11.00	33.00	28.47	47.73	74.00	26.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




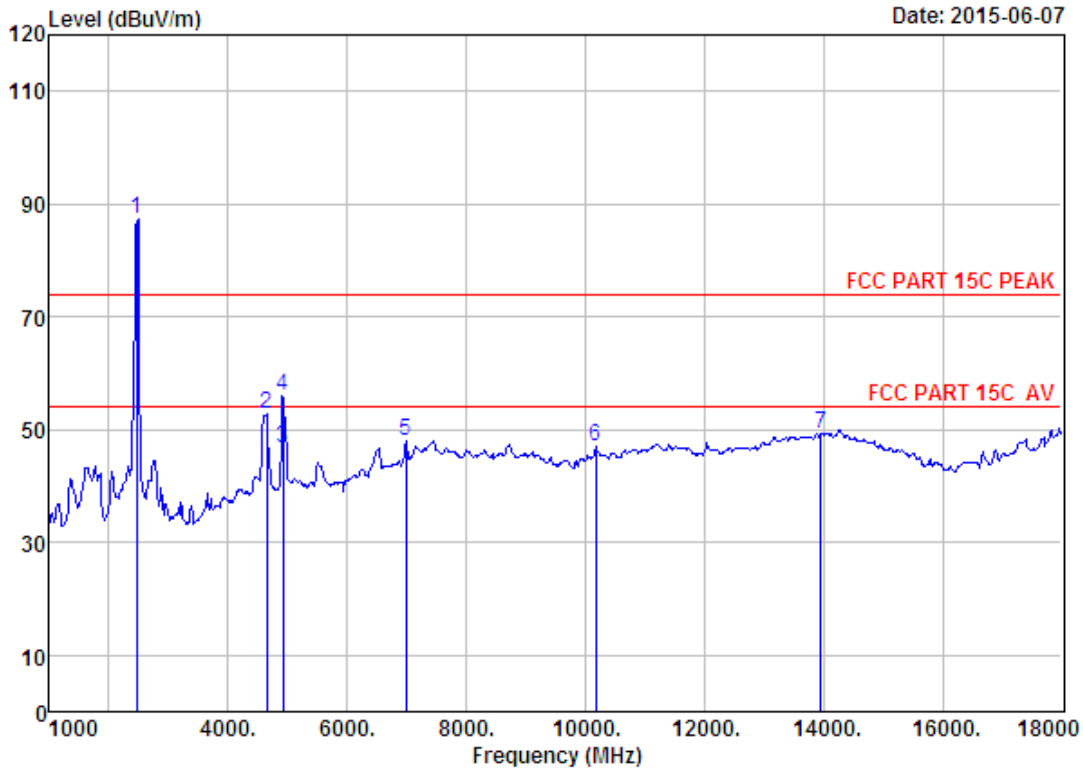

Site no. : 1# 966 chamber Data no. : 219  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH9 2462TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.58	6.69	34.98	88.00	87.29	74.00	-13.29	Peak
2	4655.00	30.94	11.09	35.57	46.32	52.78	74.00	21.22	Peak
3	4924.00	31.45	12.29	35.91	39.00	46.83	54.00	7.17	Average
4	4924.00	31.45	12.29	35.91	48.07	55.90	74.00	18.10	Peak
5	6984.00	35.46	11.51	34.21	35.20	47.96	74.00	26.04	Peak
6	10180.00	38.42	11.49	34.53	31.54	46.92	74.00	27.08	Peak
7	13954.00	41.35	10.96	32.99	29.93	49.25	74.00	24.75	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

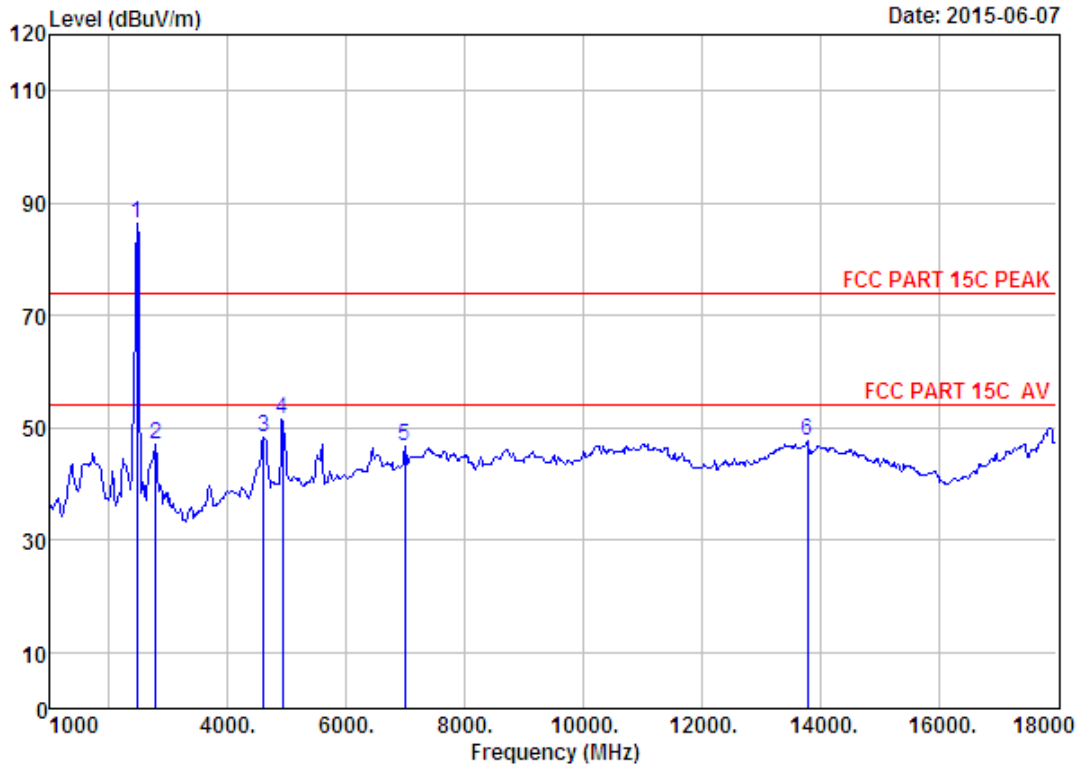

Site no. : 1# 966 chamber                      Data no. : 220  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH9 2462TX  
                     Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.58	6.69	34.98	86.97	86.26	74.00	-12.26	Peak
2	2785.00	27.89	8.04	36.69	47.81	47.05	74.00	26.95	Peak
3	4604.00	30.80	10.87	35.59	42.26	48.34	74.00	25.66	Peak
4	4924.00	31.45	12.29	35.91	43.64	51.47	74.00	22.53	Peak
5	6984.00	35.46	11.51	34.21	33.99	46.75	74.00	27.25	Peak
6	13784.00	40.88	11.16	33.05	28.59	47.58	74.00	26.42	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

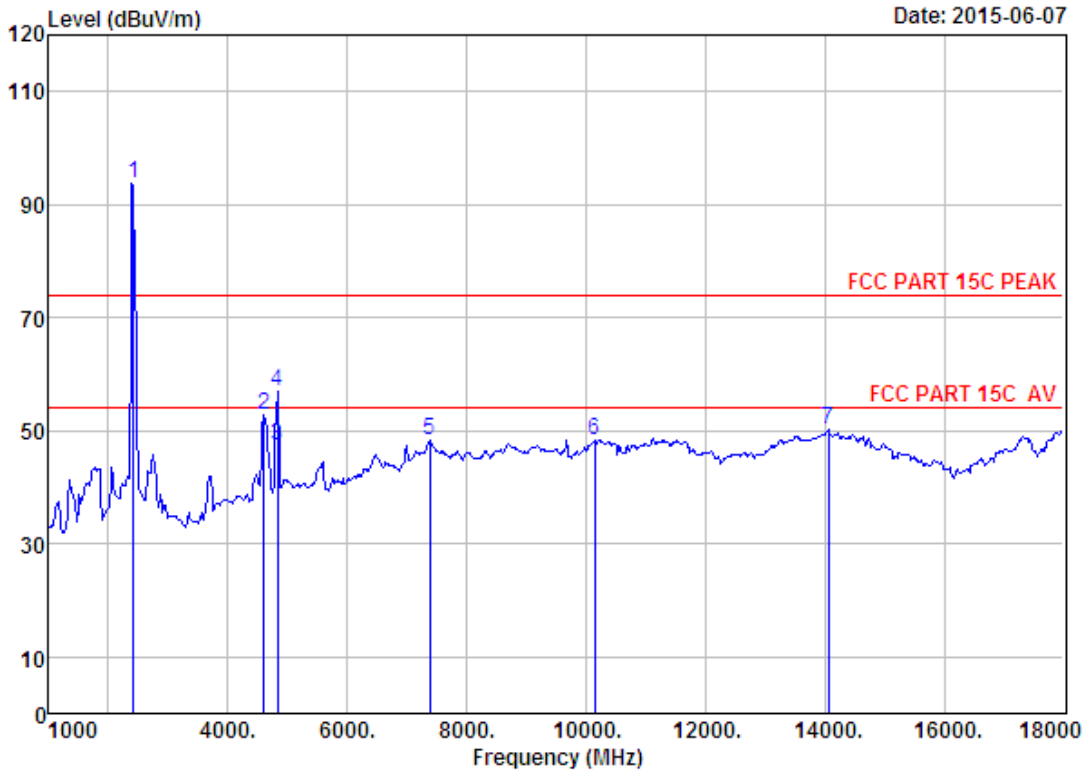


Site no. : 1# 966 chamber Data no. : 223  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH1 2412TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	94.27	93.87	74.00	-19.87	Peak
2	4604.00	30.80	10.87	35.59	46.86	52.94	74.00	21.06	Peak
3	4824.00	31.28	11.84	35.66	40.03	47.49	54.00	6.51	Average
4	4824.00	31.28	11.84	35.66	49.34	56.80	74.00	17.20	Peak
5	7375.00	36.57	11.59	34.21	34.38	48.33	74.00	25.67	Peak
6	10146.00	38.36	11.51	34.58	33.00	48.29	74.00	25.71	Peak
7	14056.00	41.51	10.90	33.06	30.98	50.33	74.00	23.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




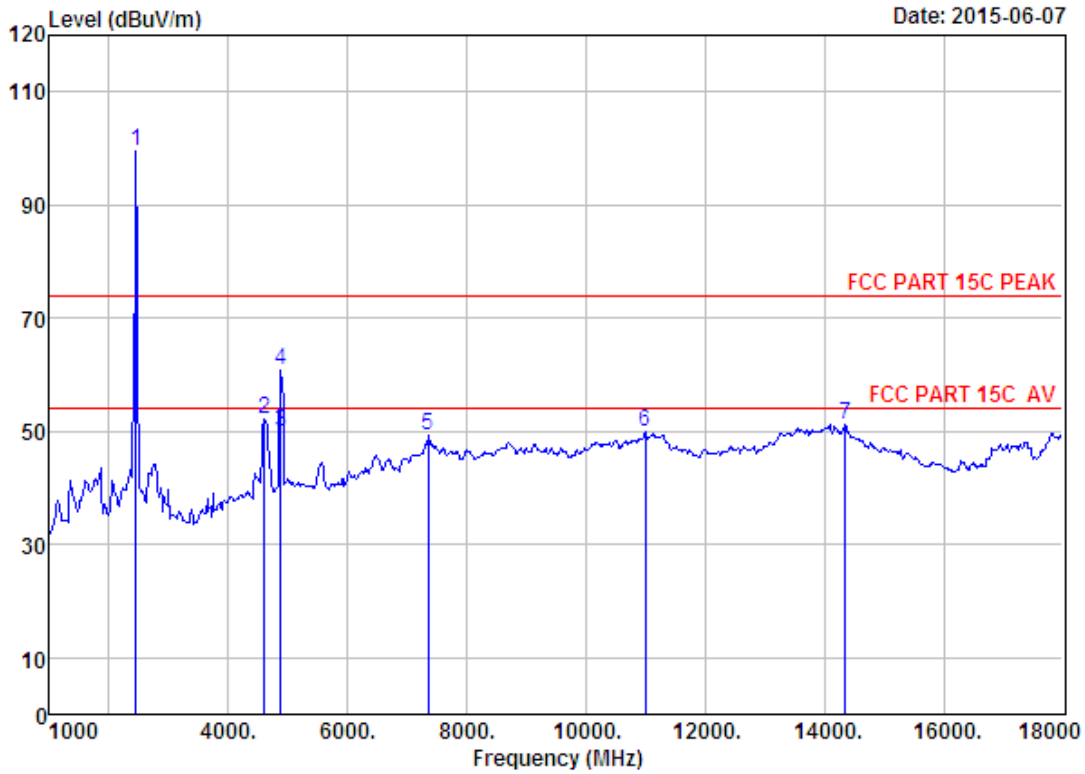

Site no. : 1# 966 chamber Data no. : 225  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH7 2442TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2442.00	27.60	6.67	34.85	100.18	99.60	74.00	-25.60	Peak
2	4604.00	30.80	10.87	35.59	46.21	52.29	74.00	21.71	Peak
3	4884.00	31.37	12.07	35.82	42.25	49.87	54.00	4.13	Average
4	4884.00	31.37	12.07	35.82	53.07	60.69	74.00	13.31	Peak
5	7358.00	36.56	11.58	34.19	35.37	49.32	74.00	24.68	Peak
6	10996.00	39.52	11.29	34.11	33.30	50.00	74.00	24.00	Peak
7	14345.00	41.76	10.92	33.39	32.01	51.30	74.00	22.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

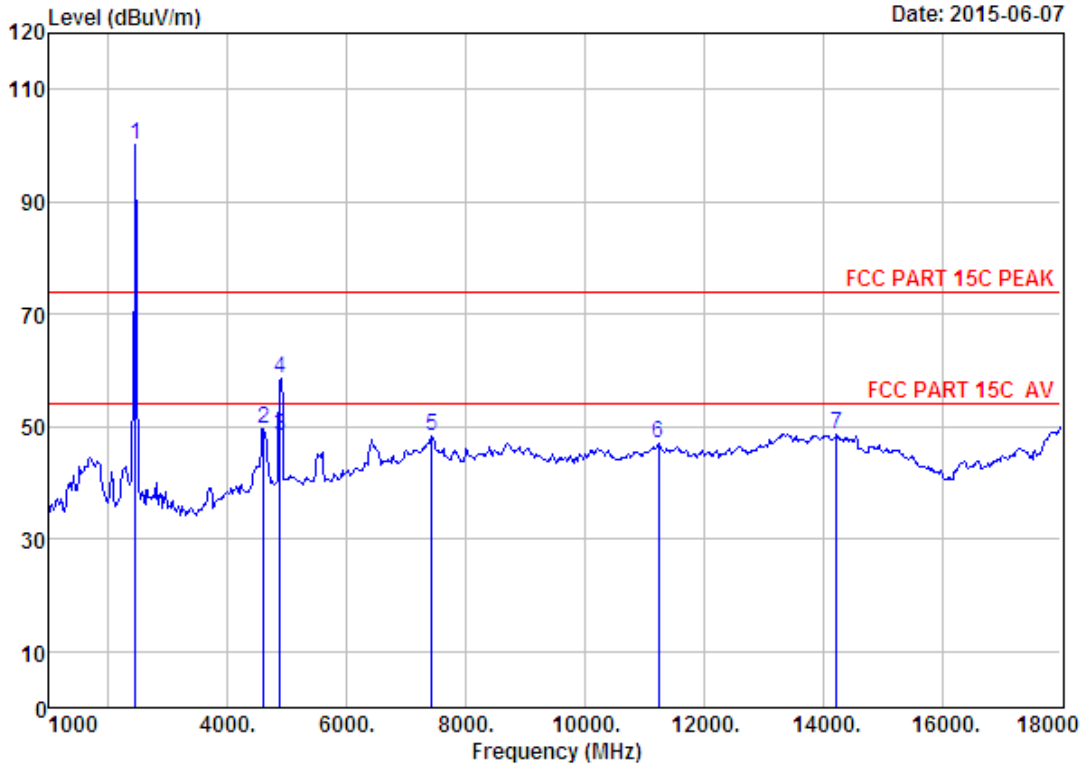


Date: 2015-06-07

Site no. : 1# 966 chamber Data no. : 226  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH7 2442TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2442.00	27.60	6.67	34.85	100.65	100.07	74.00	-26.07	Peak
2	4604.00	30.80	10.87	35.59	43.57	49.65	74.00	24.35	Peak
3	4884.00	31.37	12.07	35.82	40.75	48.37	54.00	5.63	Average
4	4884.00	31.37	12.07	35.82	50.88	58.50	74.00	15.50	Peak
5	7426.00	36.56	11.60	34.22	34.43	48.37	74.00	25.63	Peak
6	11234.00	39.37	11.12	33.25	29.68	46.92	74.00	27.08	Peak
7	14226.00	41.66	10.91	33.41	29.50	48.66	74.00	25.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




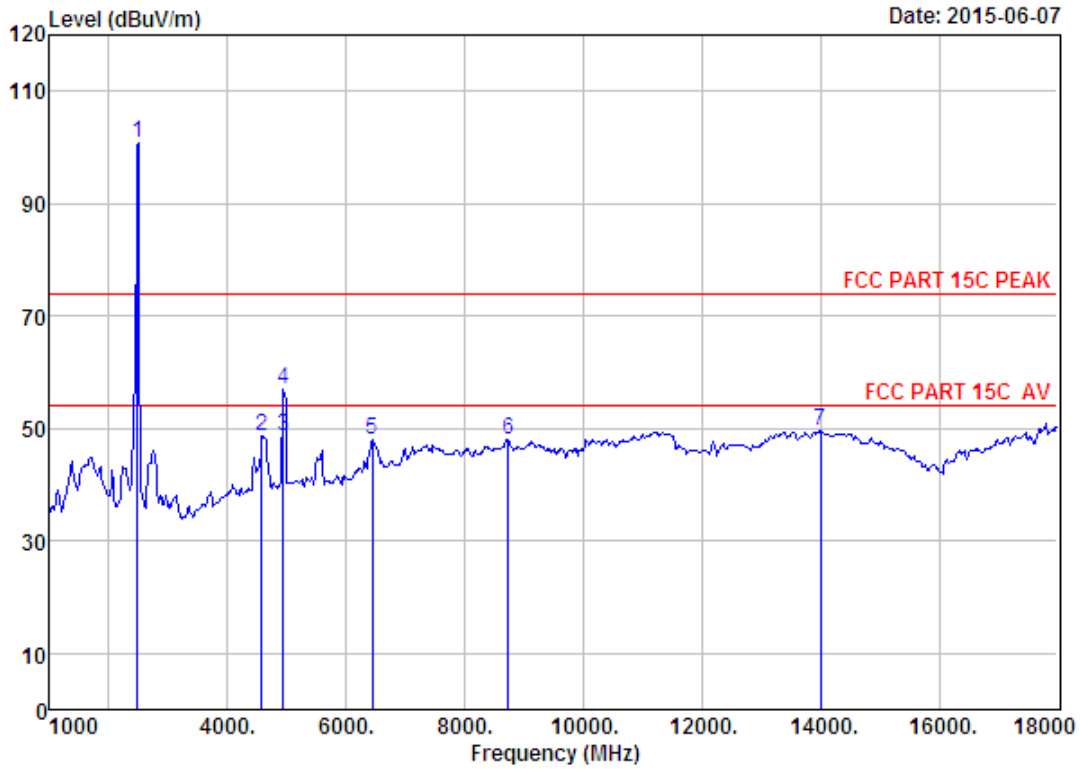

Site no. : 1# 966 chamber                      Data no. : 229  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH13 2472TX  
                     Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2472.00	27.58	6.71	35.11	101.66	100.84	74.00	-26.84	Peak
2	4570.00	30.74	10.72	35.61	42.81	48.66	74.00	25.34	Peak
3	4944.00	31.47	12.37	35.96	40.78	48.66	54.00	5.34	Average
4	4944.00	31.47	12.37	35.96	49.04	56.92	74.00	17.08	Peak
5	6440.00	34.08	12.22	35.29	36.89	47.90	74.00	26.10	Peak
6	8735.00	37.40	11.45	33.76	32.91	48.00	74.00	26.00	Peak
7	14005.00	41.46	10.90	33.01	30.31	49.66	74.00	24.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

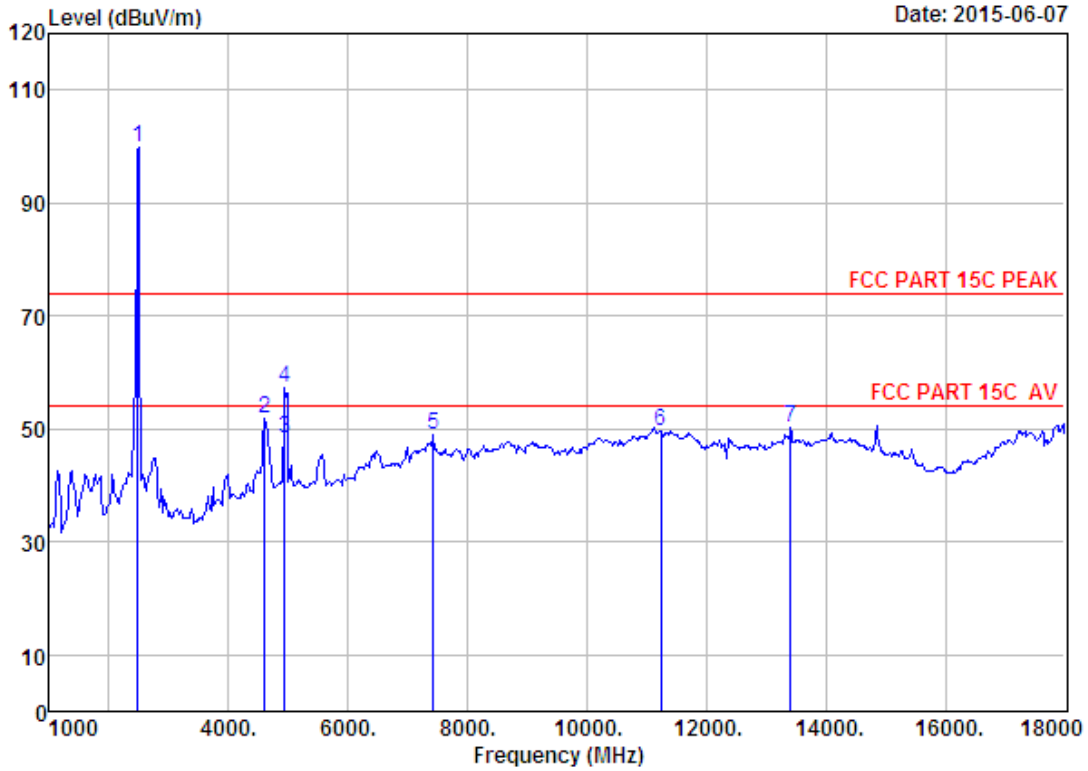


Site no. : 1# 966 chamber Data no. : 230  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH13 2472TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2472.00	27.58	6.71	35.11	100.67	99.85	74.00	-25.85	Peak
2	4604.00	30.80	10.87	35.59	45.76	51.84	74.00	22.16	Peak
3	4944.00	31.47	12.37	35.96	40.33	48.21	54.00	5.79	Average
4	4944.00	31.47	12.37	35.96	49.30	57.18	74.00	16.82	Peak
5	7426.00	36.56	11.60	34.22	35.00	48.94	74.00	25.06	Peak
6	11234.00	39.37	11.12	33.25	32.51	49.75	74.00	24.25	Peak
7	13410.00	39.87	11.49	32.86	31.68	50.18	74.00	23.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



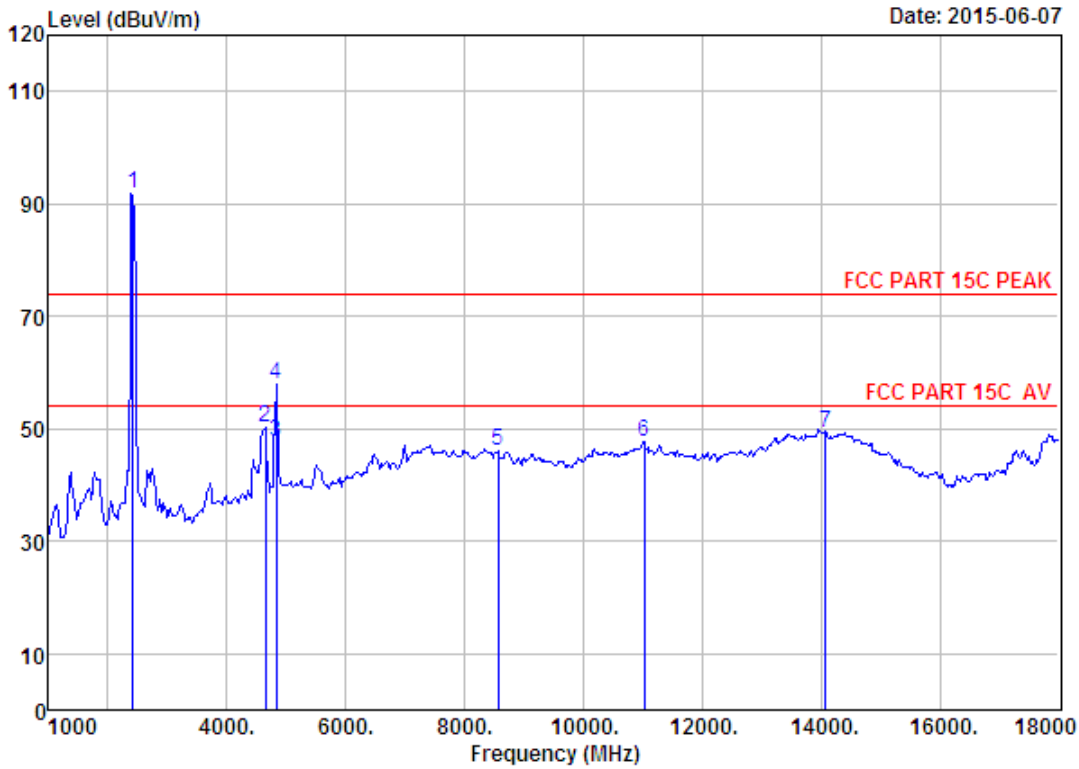


Site no. : 1# 966 chamber Data no. : 233  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	92.23	91.83	74.00	-17.83	Peak
2	4655.00	30.94	11.09	35.57	43.71	50.17	74.00	23.83	Peak
3	4824.00	31.28	11.84	35.66	40.11	47.57	54.00	6.43	Average
4	4824.00	31.28	11.84	35.66	50.39	57.85	74.00	16.15	Peak
5	8565.00	37.10	11.45	33.92	31.43	46.06	74.00	27.94	Peak
6	11030.00	39.50	11.27	33.98	30.98	47.77	74.00	26.23	Peak
7	14073.00	41.52	10.90	33.09	30.02	49.35	74.00	24.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



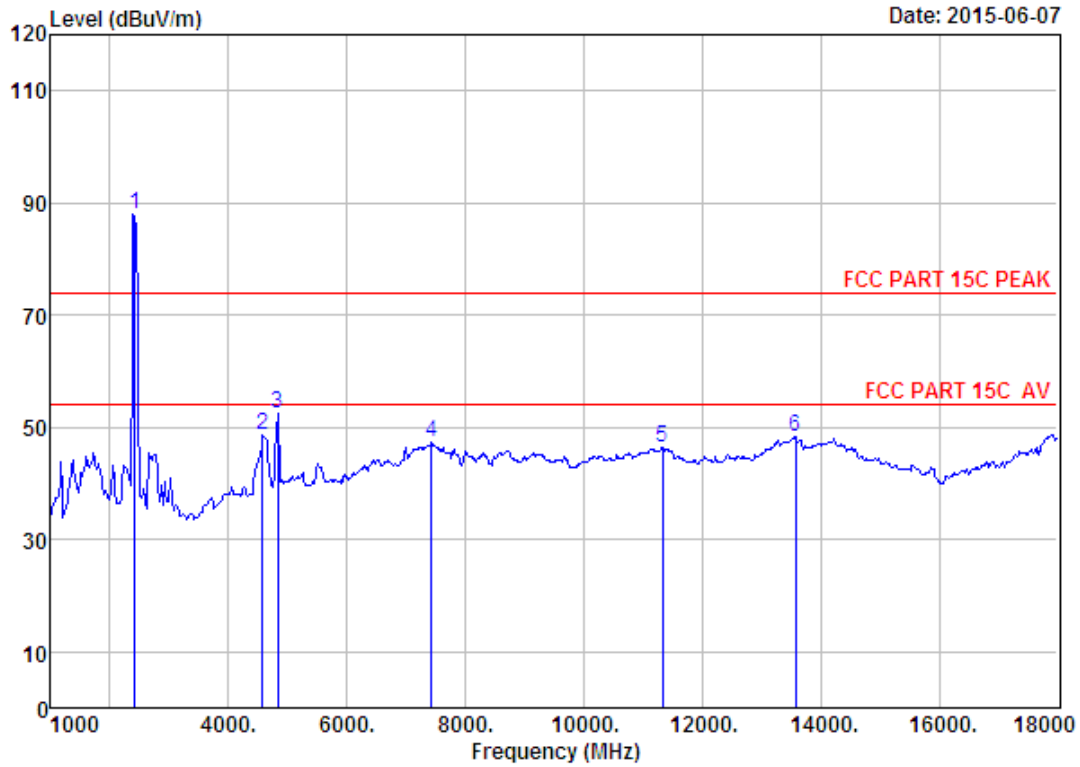

Date: 2015-06-07


Site no. : 1# 966 chamber                      Data no. : 234  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
                     Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	88.34	87.94	74.00	-13.94	Peak
2	4570.00	30.74	10.72	35.61	42.76	48.61	74.00	25.39	Peak
3	4824.00	31.28	11.84	35.66	45.00	52.46	74.00	21.54	Peak
4	7426.00	36.56	11.60	34.22	33.35	47.29	74.00	26.71	Peak
5	11336.00	39.30	11.04	33.44	29.61	46.51	74.00	27.49	Peak
6	13580.00	40.31	11.40	32.64	29.21	48.28	74.00	25.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.





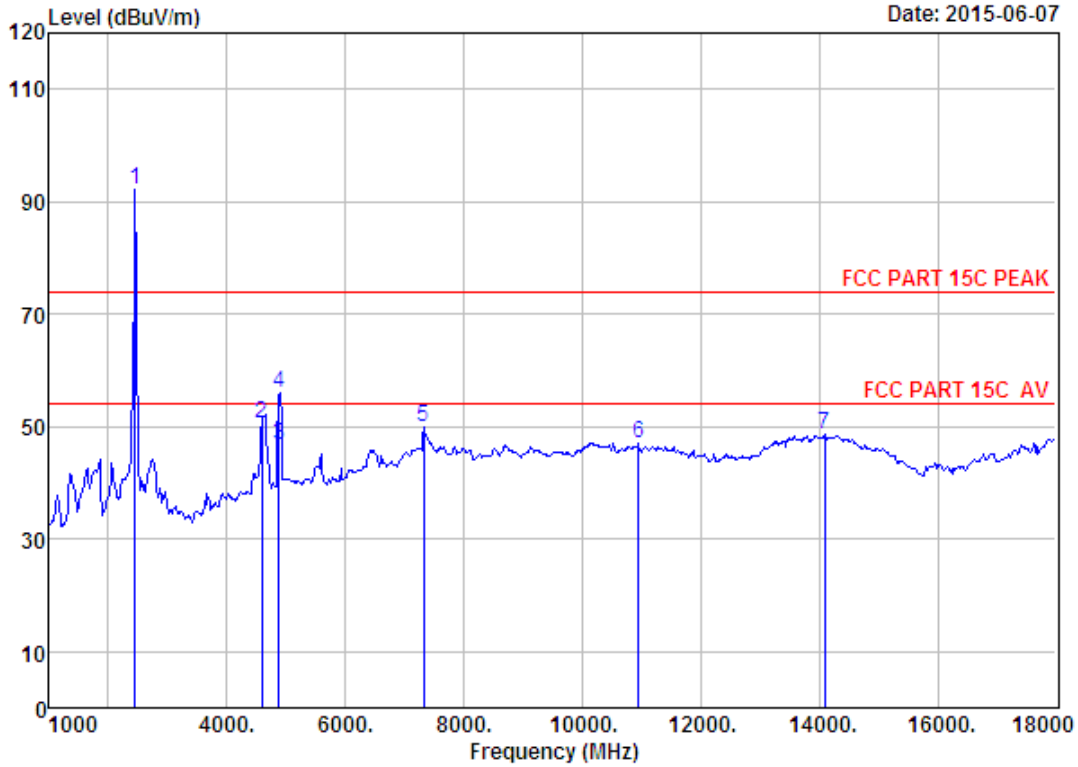


Site no. : 1# 966 chamber Data no. : 236  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH7 2442TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2442.00	27.60	6.67	34.85	92.84	92.26	74.00	-18.26	Peak
2	4587.00	30.77	10.79	35.60	44.71	50.67	74.00	23.33	Peak
3	4884.00	31.37	12.07	35.82	39.25	46.87	54.00	7.13	Average
4	4884.00	31.37	12.07	35.82	48.25	55.87	74.00	18.13	Peak
5	7324.00	36.55	11.57	34.14	36.08	50.06	74.00	23.94	Peak
6	10945.00	39.46	11.29	34.13	30.34	46.96	74.00	27.04	Peak
7	14090.00	41.54	10.91	33.13	29.25	48.57	74.00	25.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



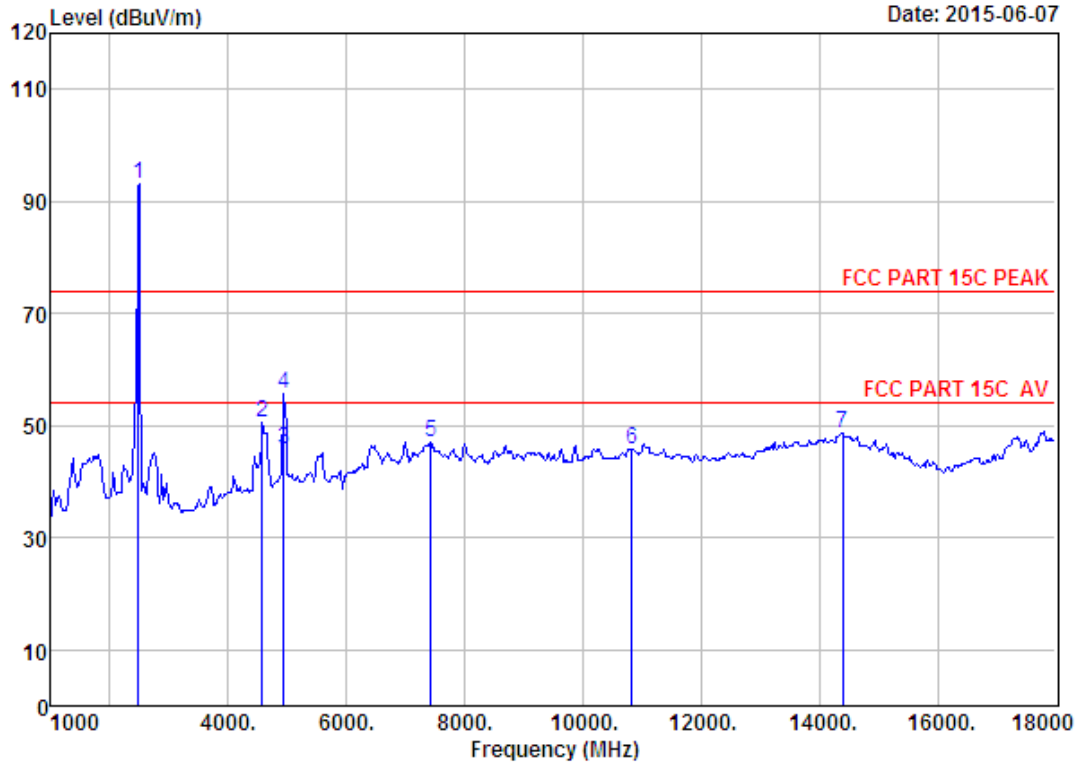


Site no. : 1# 966 chamber                      Data no. : 239  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH13 2472TX  
                     Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2472.00	27.58	6.71	35.11	93.80	92.98	74.00	-18.98	Peak
2	4570.00	30.74	10.72	35.61	44.80	50.65	74.00	23.35	Peak
3	4944.00	31.47	12.37	35.96	38.01	45.89	54.00	8.11	Average
4	4944.00	31.47	12.37	35.96	47.84	55.72	74.00	18.28	Peak
5	7426.00	36.56	11.60	34.22	33.22	47.16	74.00	26.84	Peak
6	10826.00	39.33	11.30	34.00	29.27	45.90	74.00	28.10	Peak
7	14396.00	41.79	10.92	33.39	29.39	48.71	74.00	25.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




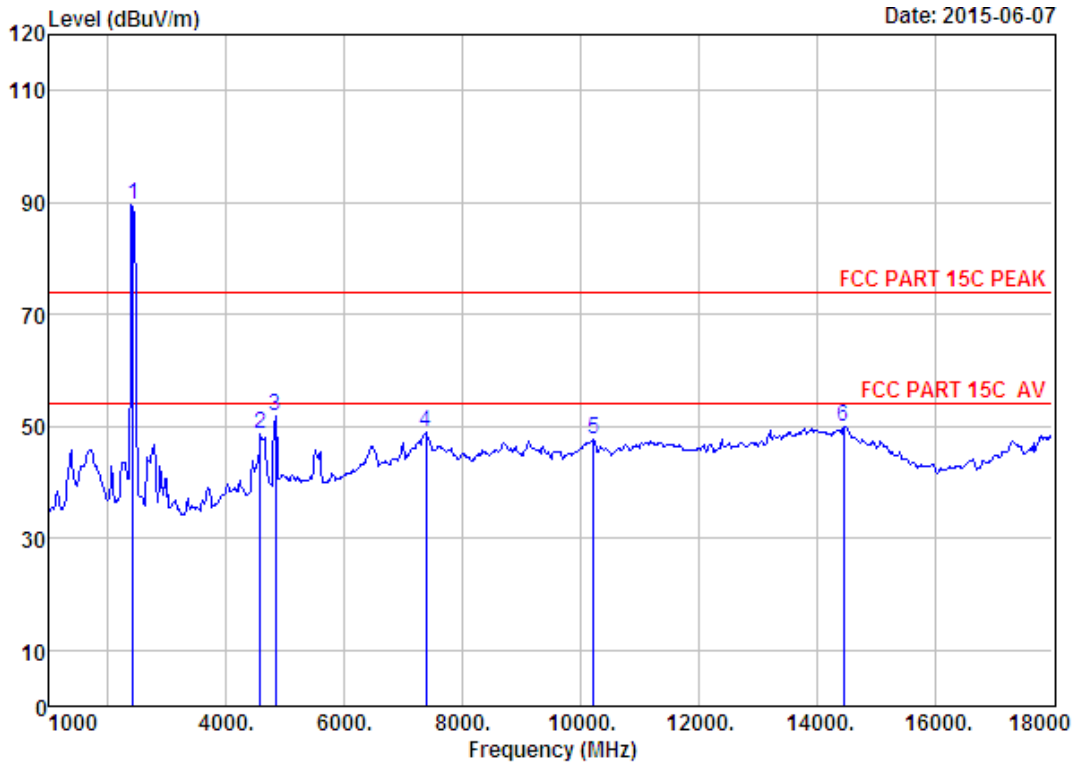

Site no. : 1# 966 chamber Data no. : 243  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	90.01	89.61	74.00	-15.61	Peak
2	4570.00	30.74	10.72	35.61	42.77	48.62	74.00	25.38	Peak
3	4824.00	31.28	11.84	35.66	44.25	51.71	74.00	22.29	Peak
4	7375.00	36.57	11.59	34.21	34.96	48.91	74.00	25.09	Peak
5	10214.00	38.48	11.47	34.50	32.15	47.60	74.00	26.40	Peak
6	14464.00	41.85	10.93	33.45	30.51	49.84	74.00	24.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

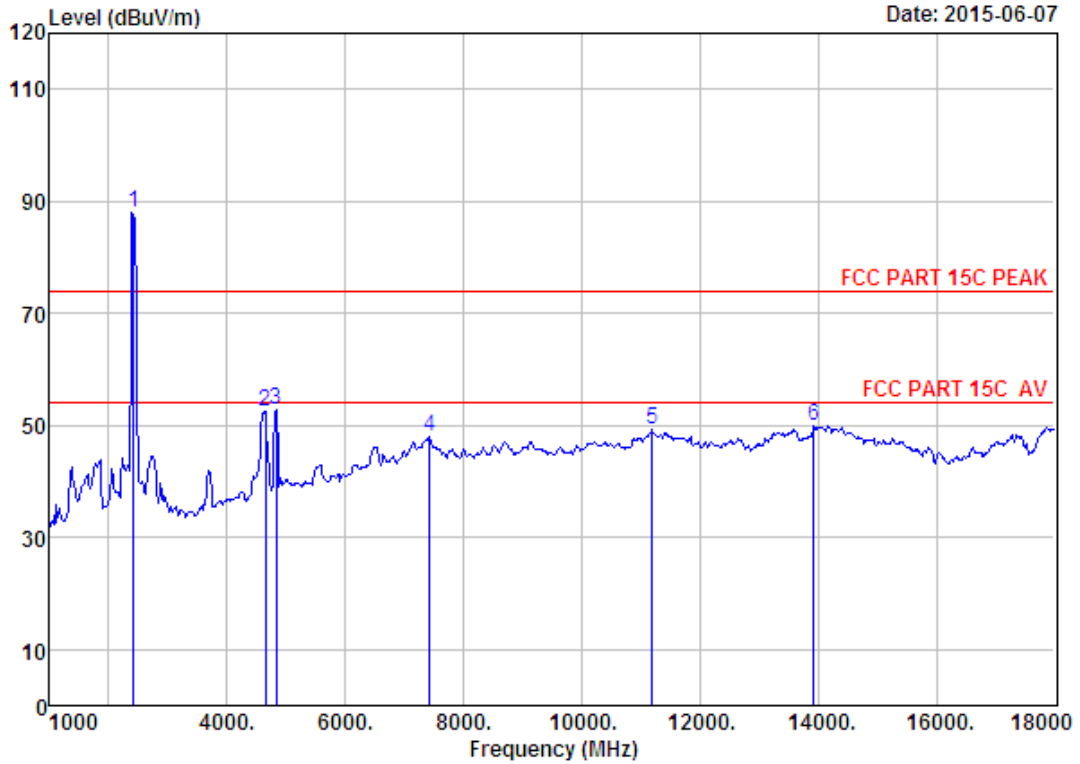


Site no. : 1# 966 chamber Data no. : 244  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	88.35	87.95	74.00	-13.95	Peak
2	4655.00	30.94	11.09	35.57	46.04	52.50	74.00	21.50	Peak
3	4824.00	31.28	11.84	35.66	45.22	52.68	74.00	21.32	Peak
4	7426.00	36.56	11.60	34.22	34.11	48.05	74.00	25.95	Peak
5	11200.00	39.39	11.14	33.24	31.84	49.13	74.00	24.87	Peak
6	13920.00	41.26	11.00	33.00	30.59	49.85	74.00	24.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




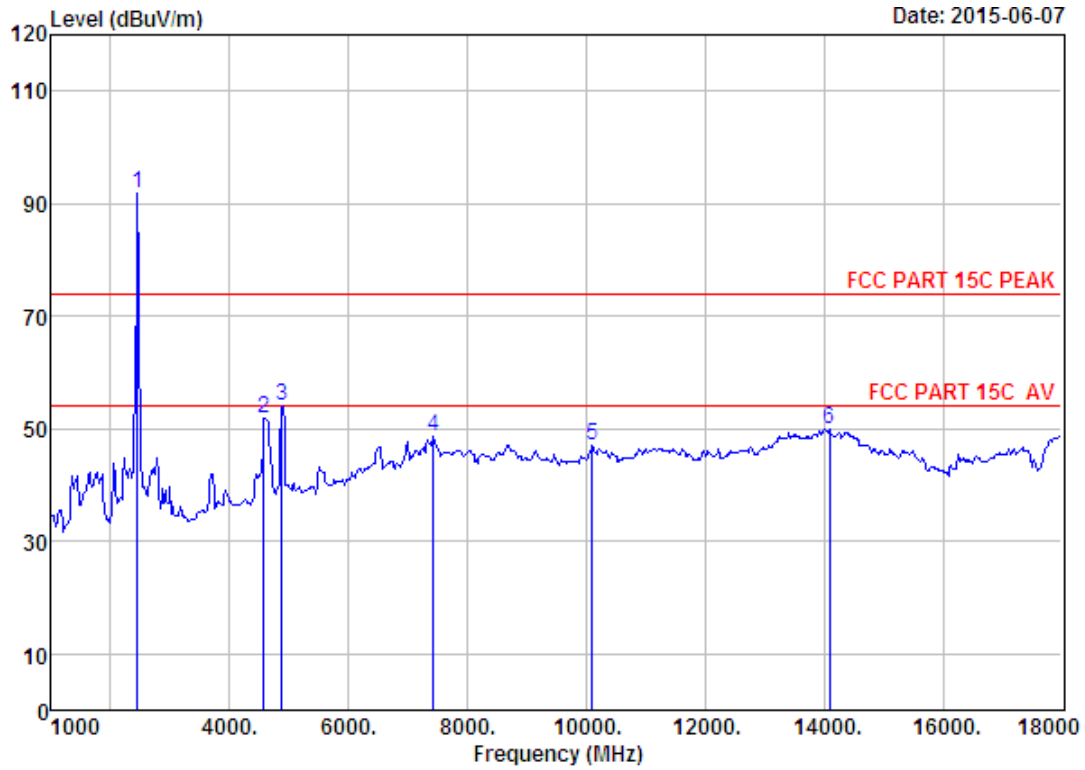

Site no. : 1# 966 chamber                      Data no. : 245  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH7 2442TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2442.00	27.60	6.67	34.85	92.27	91.69	74.00	-17.69	Peak
2	4570.00	30.74	10.72	35.61	46.05	51.90	74.00	22.10	Peak
3	4884.00	31.37	12.07	35.82	46.37	53.99	74.00	20.01	Peak
4	7426.00	36.56	11.60	34.22	34.73	48.67	74.00	25.33	Peak
5	10095.00	38.27	11.53	34.69	31.96	47.07	74.00	26.93	Peak
6	14090.00	41.54	10.91	33.13	30.53	49.85	74.00	24.15	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

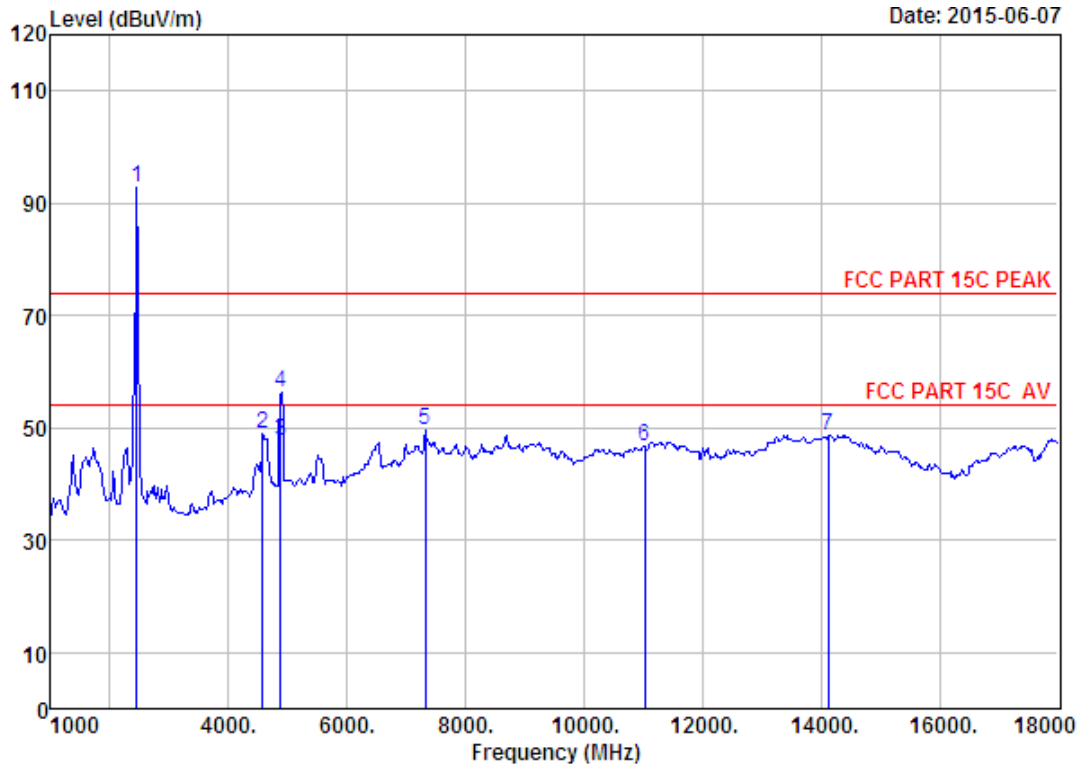

Site no. : 1# 966 chamber                      Data no. : 246  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH7 2442TX  
                     Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2442.00	27.60	6.67	34.85	93.48	92.90	74.00	-18.90	Peak
2	4570.00	30.74	10.72	35.61	43.19	49.04	74.00	24.96	Peak
3	4884.00	31.37	12.07	35.82	40.01	47.63	54.00	6.37	Average
4	4884.00	31.37	12.07	35.82	48.84	56.46	74.00	17.54	Peak
5	7324.00	36.55	11.57	34.14	35.51	49.49	74.00	24.51	Peak
6	11030.00	39.50	11.27	33.98	29.88	46.67	74.00	27.33	Peak
7	14124.00	41.57	10.91	33.22	29.40	48.66	74.00	25.34	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

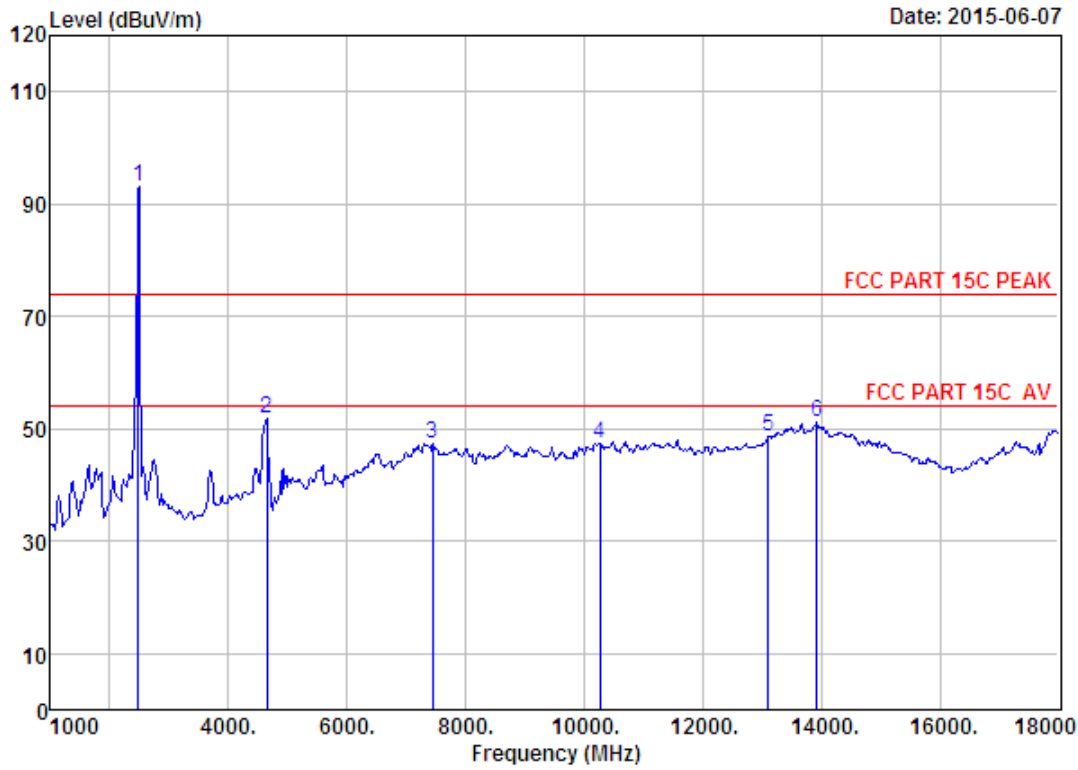

Site no. : 1# 966 chamber                      Data no. : 249  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
                     Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2472.00	27.58	6.71	35.11	93.87	93.05	74.00	-19.05	Peak
2	4655.00	30.94	11.09	35.57	45.41	51.87	74.00	22.13	Peak
3	7443.00	36.54	11.61	34.22	33.55	47.48	74.00	26.52	Peak
4	10265.00	38.56	11.44	34.49	32.00	47.51	74.00	26.49	Peak
5	13104.00	39.13	11.44	32.77	30.94	48.74	74.00	25.26	Peak
6	13920.00	41.26	11.00	33.00	32.00	51.26	74.00	22.74	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

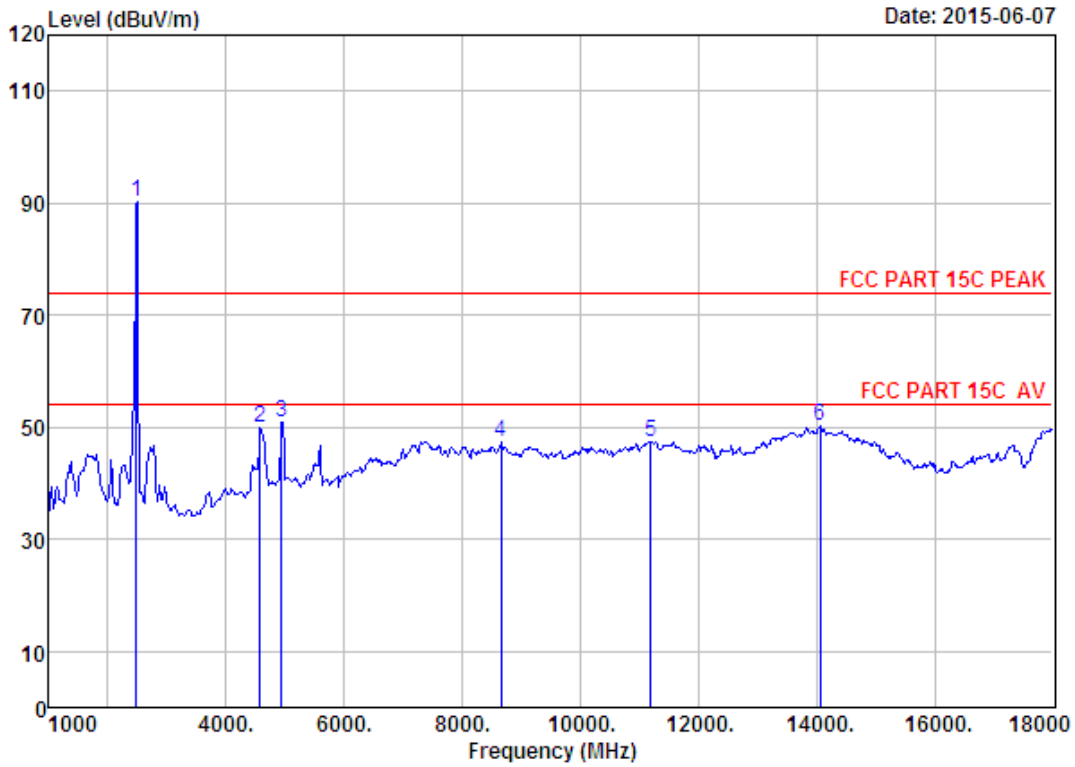

Site no. : 1# 966 chamber                      Data no. : 250  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
                     Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2472.00	27.58	6.71	35.11	91.09	90.27	74.00	-16.27	Peak
2	4570.00	30.74	10.72	35.61	44.10	49.95	74.00	24.05	Peak
3	4944.00	31.47	12.37	35.96	42.88	50.76	74.00	23.24	Peak
4	8650.00	37.27	11.45	33.68	32.30	47.34	74.00	26.66	Peak
5	11200.00	39.39	11.14	33.24	30.09	47.38	74.00	26.62	Peak
6	14056.00	41.51	10.90	33.06	30.97	50.32	74.00	23.68	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

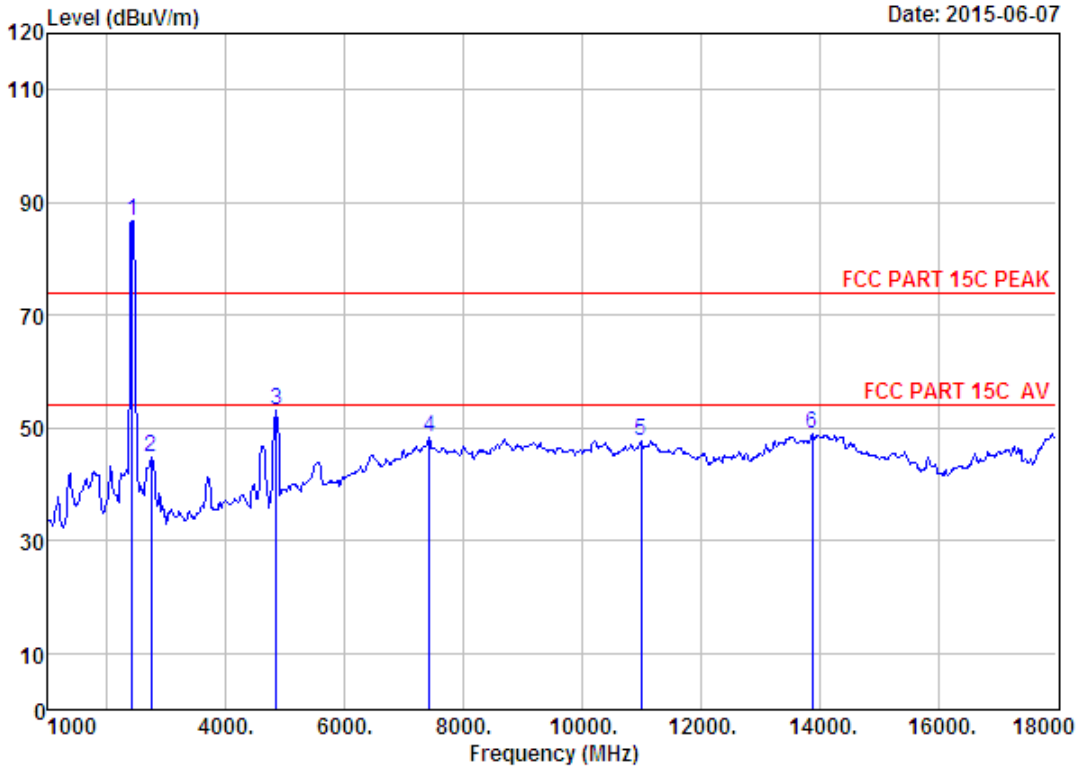

Site no. : 1# 966 chamber Data no. : 253  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUI : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH1 2422TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.60	6.66	34.74	87.27	86.79	74.00	-12.79	Peak
2	2734.00	27.88	7.81	36.43	45.67	44.93	74.00	29.07	Peak
3	4844.00	31.31	11.92	35.68	45.48	53.03	74.00	20.97	Peak
4	7426.00	36.56	11.60	34.22	34.46	48.40	74.00	25.60	Peak
5	10996.00	39.52	11.29	34.11	31.11	47.81	74.00	26.19	Peak
6	13886.00	41.16	11.04	33.03	29.64	48.81	74.00	25.19	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

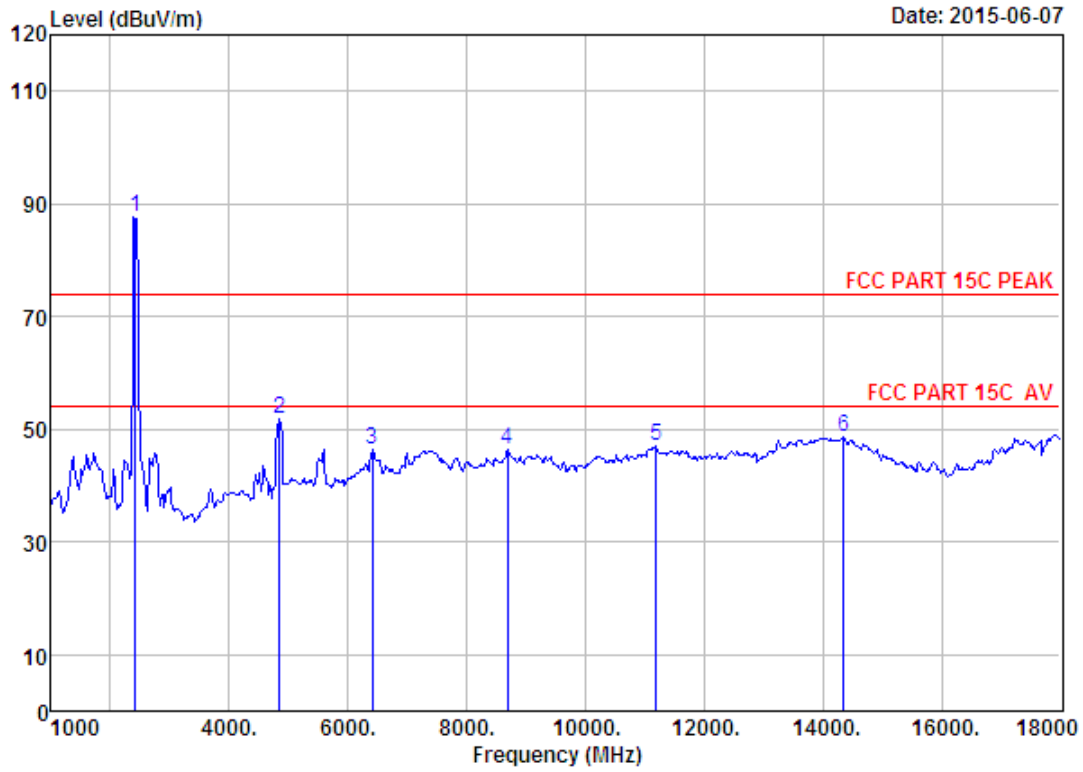

Site no. : 1# 966 chamber Data no. : 254  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH1 2422TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2422.00	27.60	6.66	34.74	88.02	87.54	74.00	-13.54	Peak
2	4844.00	31.31	11.92	35.68	44.42	51.97	74.00	22.03	Peak
3	6406.00	33.99	12.21	35.35	35.67	46.52	74.00	27.48	Peak
4	8684.00	37.32	11.45	33.66	31.13	46.24	74.00	27.76	Peak
5	11200.00	39.39	11.14	33.24	29.63	46.92	74.00	27.08	Peak
6	14345.00	41.76	10.92	33.39	29.25	48.54	74.00	25.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

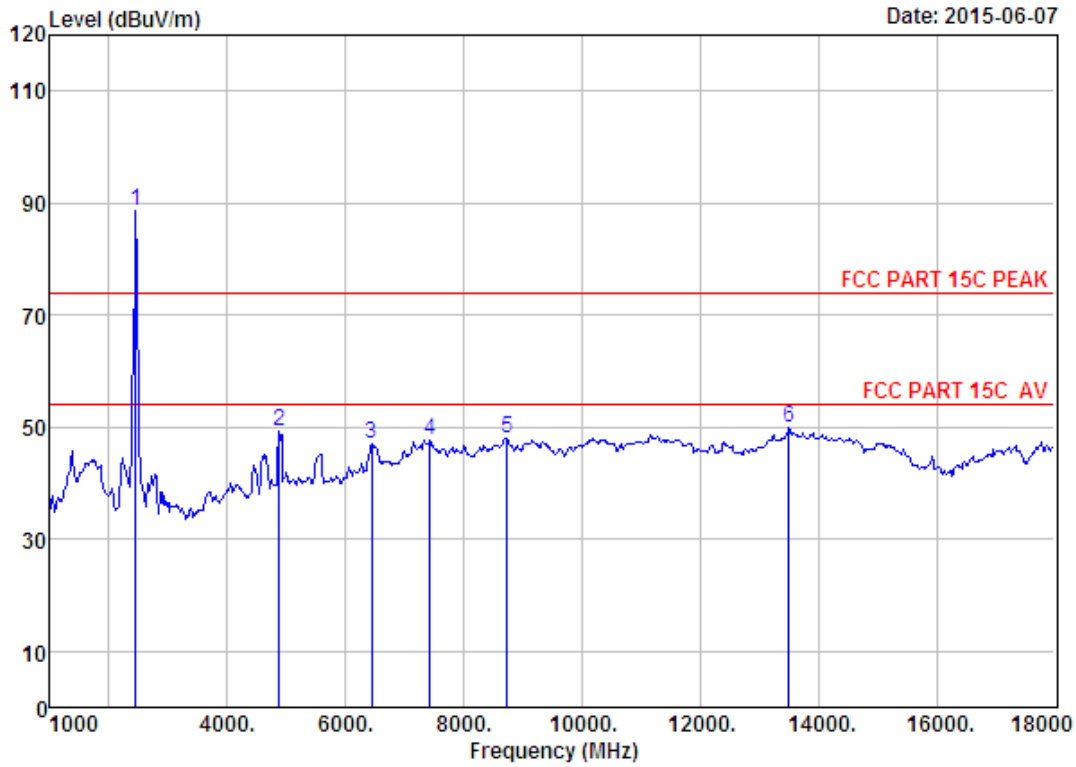


Site no. : 1# 966 chamber                      Data no. : 255  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH5 2442TX  
                     Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2442.00	27.60	6.67	34.85	89.22	88.64	74.00	-14.64	Peak
2	4884.00	31.37	12.07	35.82	41.77	49.39	74.00	24.61	Peak
3	6440.00	34.08	12.22	35.29	36.18	47.19	74.00	26.81	Peak
4	7426.00	36.56	11.60	34.22	33.75	47.69	74.00	26.31	Peak
5	8735.00	37.40	11.45	33.76	33.02	48.11	74.00	25.89	Peak
6	13495.00	40.07	11.50	32.65	30.91	49.83	74.00	24.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



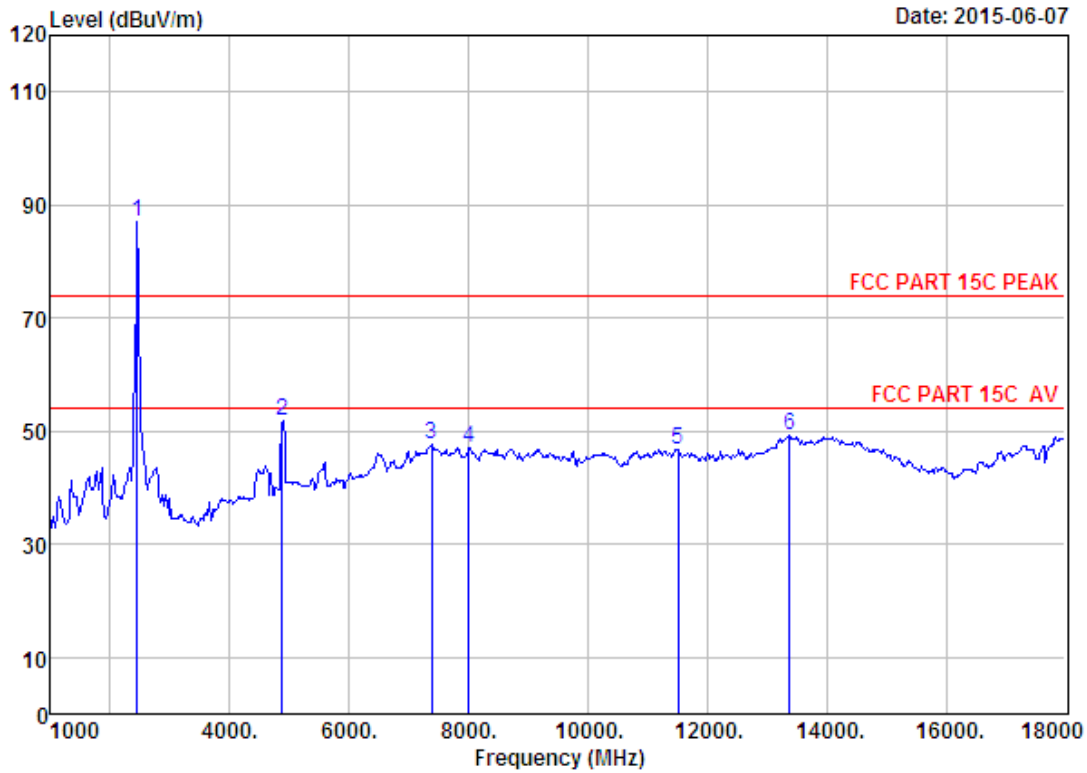


Site no. : 1# 966 chamber                      Data no. : 256  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH5 2442TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2442.00	27.60	6.67	34.85	87.74	87.16	74.00	-13.16	Peak
2	4884.00	31.37	12.07	35.82	44.07	51.69	74.00	22.31	Peak
3	7375.00	36.57	11.59	34.21	33.58	47.53	74.00	26.47	Peak
4	8004.00	37.01	11.40	34.96	33.73	47.18	74.00	26.82	Peak
5	11506.00	39.20	10.92	33.46	30.02	46.68	74.00	27.32	Peak
6	13376.00	39.78	11.48	32.91	30.82	49.17	74.00	24.83	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



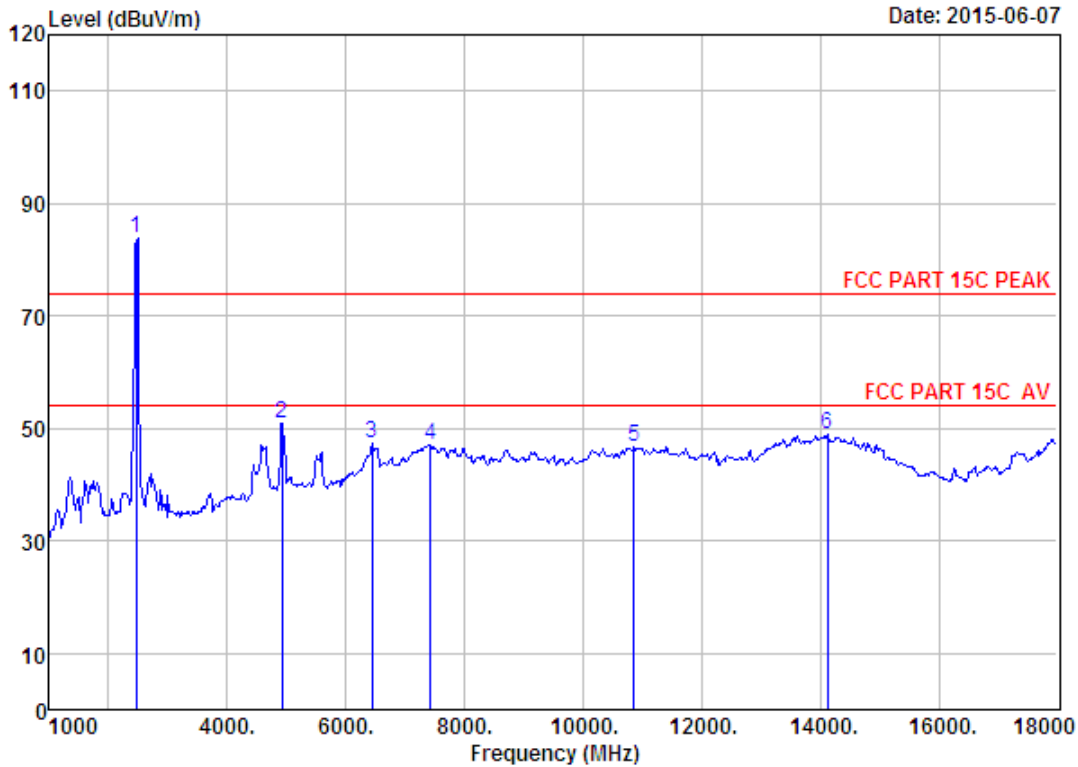


Date: 2015-06-07

Site no. : 1# 966 chamber                      Data no. : 259  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH9 2462TX  
                     Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.58	6.69	34.98	84.41	83.70	74.00	-9.70	Peak
2	4924.00	31.45	12.29	35.91	43.19	51.02	74.00	22.98	Peak
3	6440.00	34.08	12.22	35.29	36.28	47.29	74.00	26.71	Peak
4	7426.00	36.56	11.60	34.22	33.02	46.96	74.00	27.04	Peak
5	10860.00	39.37	11.30	34.03	30.10	46.74	74.00	27.26	Peak
6	14124.00	41.57	10.91	33.22	29.56	48.82	74.00	25.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



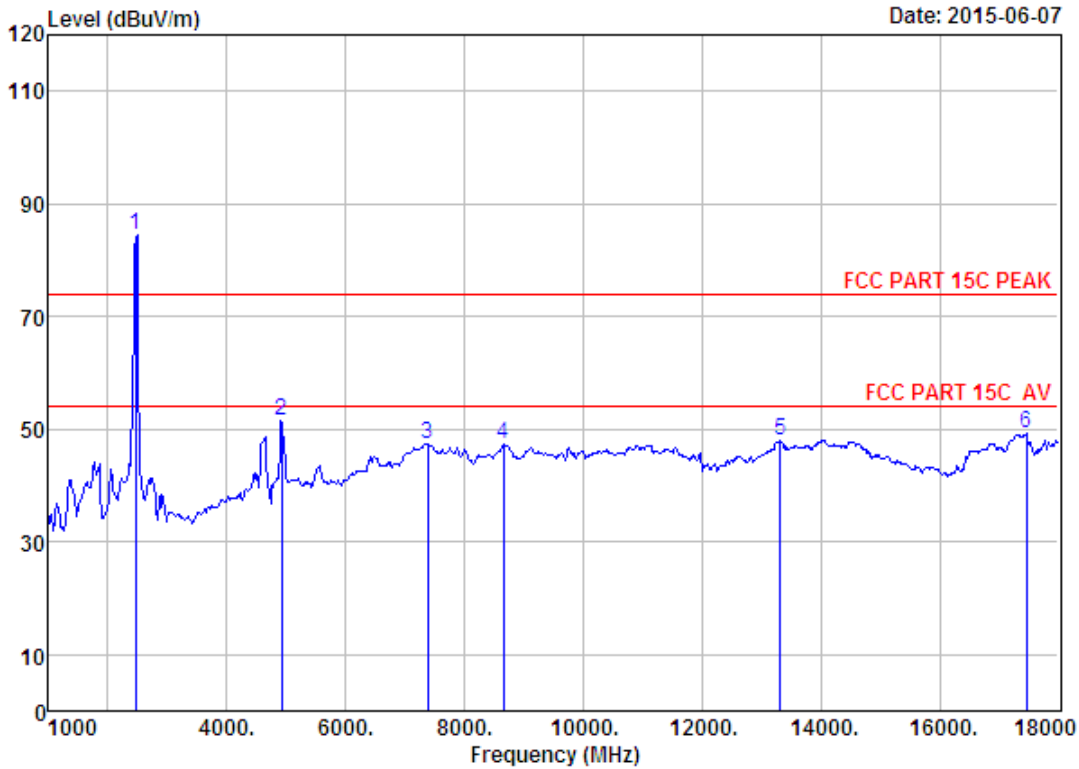


Site no. : 1# 966 chamber Data no. : 260  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH9 2462TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2462.00	27.58	6.69	34.98	85.30	84.59	74.00	-10.59	Peak
2	4924.00	31.45	12.29	35.91	43.60	51.43	74.00	22.57	Peak
3	7375.00	36.57	11.59	34.21	33.39	47.34	74.00	26.66	Peak
4	8650.00	37.27	11.45	33.68	32.21	47.25	74.00	26.75	Peak
5	13325.00	39.66	11.48	32.94	29.82	48.02	74.00	25.98	Peak
6	17456.00	41.43	10.82	31.40	28.30	49.15	74.00	24.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

18000-25000 MHz

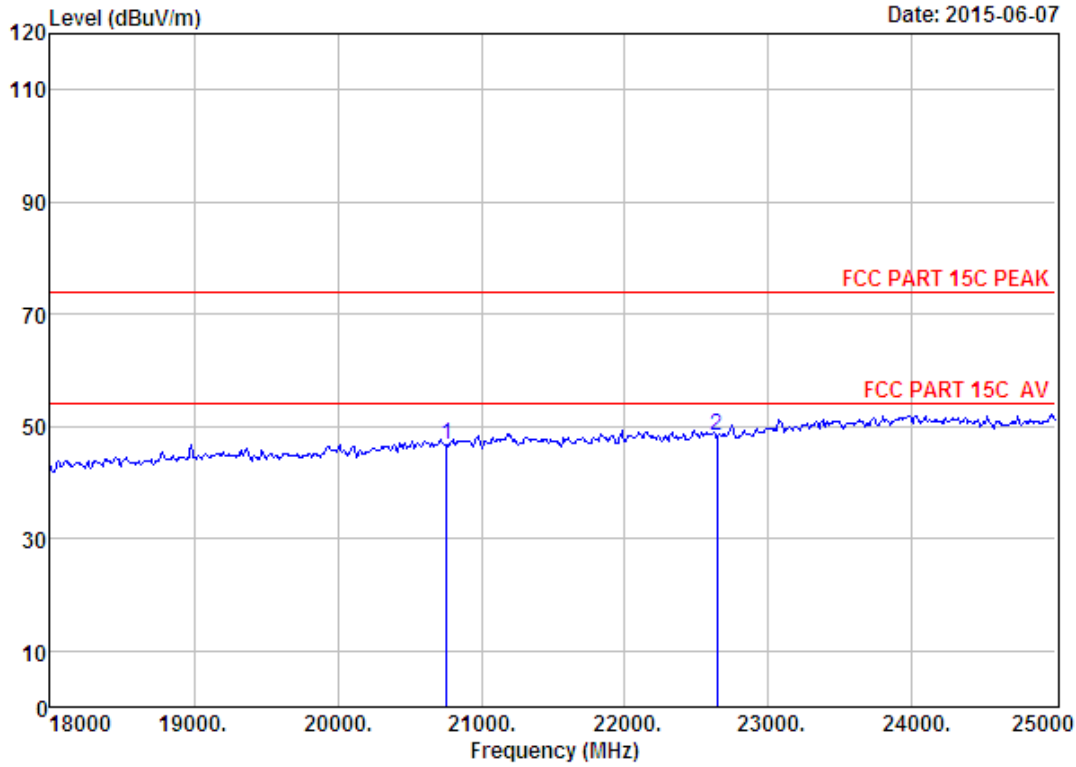


Site no. : 1# 966 chamber Data no. : 261  
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH1 2412TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20758.00	46.15	20.02	36.03	16.46	46.60	74.00	27.40	Peak
2	22641.00	45.75	20.94	34.22	15.77	48.24	74.00	25.76	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




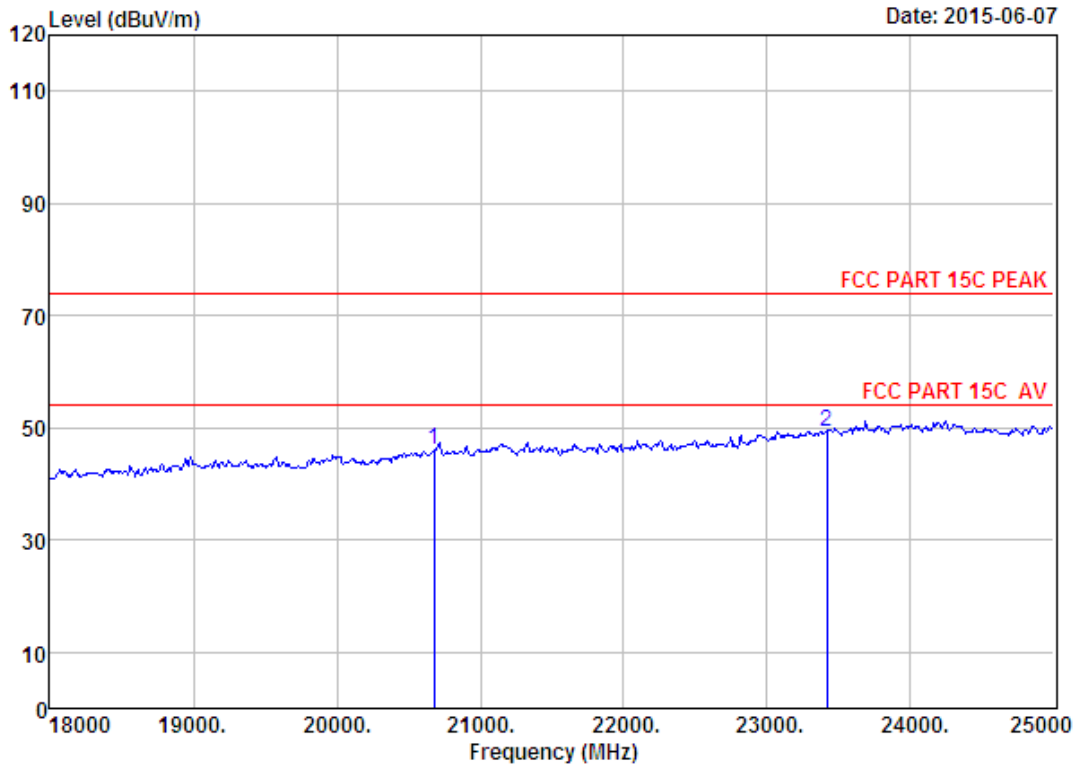

Site no. : 1# 966 chamber                      Data no. : 262  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH1 2412TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20681.00	46.11	19.99	36.09	15.97	45.98	74.00	28.02	Peak
2	23418.00	45.68	21.52	33.40	15.61	49.41	74.00	24.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

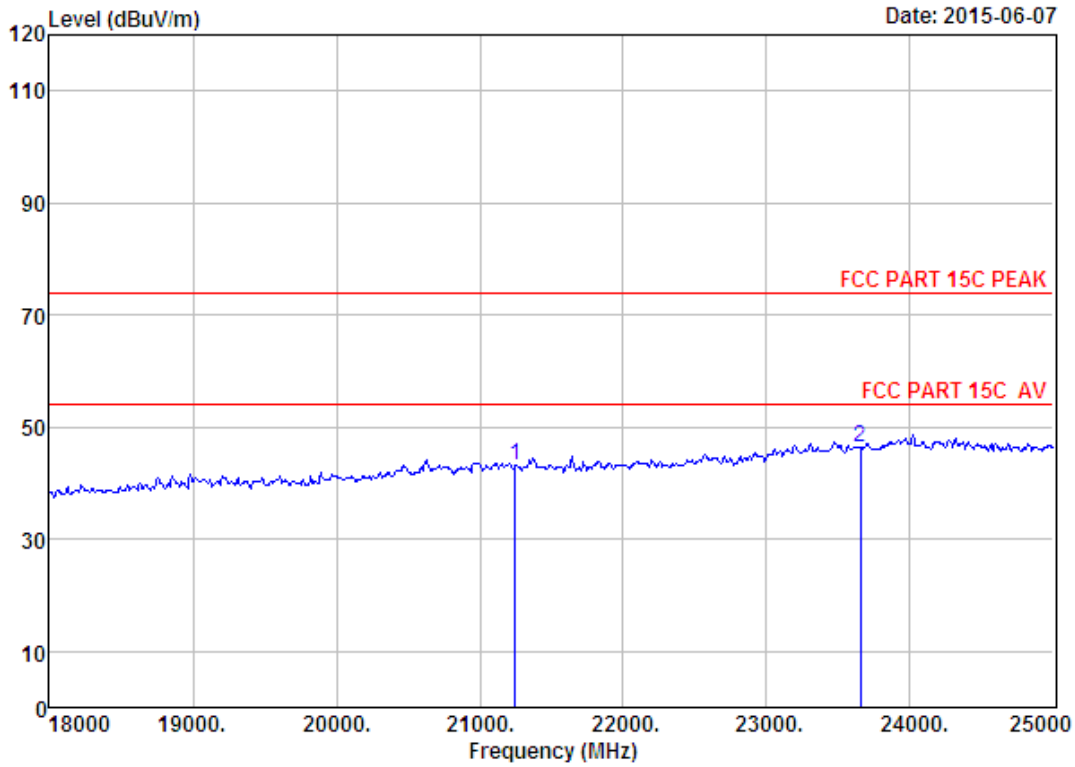

Site no. : 1# 966 chamber                      Data no. : 263  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH7 2442TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21248.00	46.14	20.24	35.58	12.24	43.04	74.00	30.96	Peak
2	23656.00	45.67	21.73	33.17	12.17	46.40	74.00	27.60	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

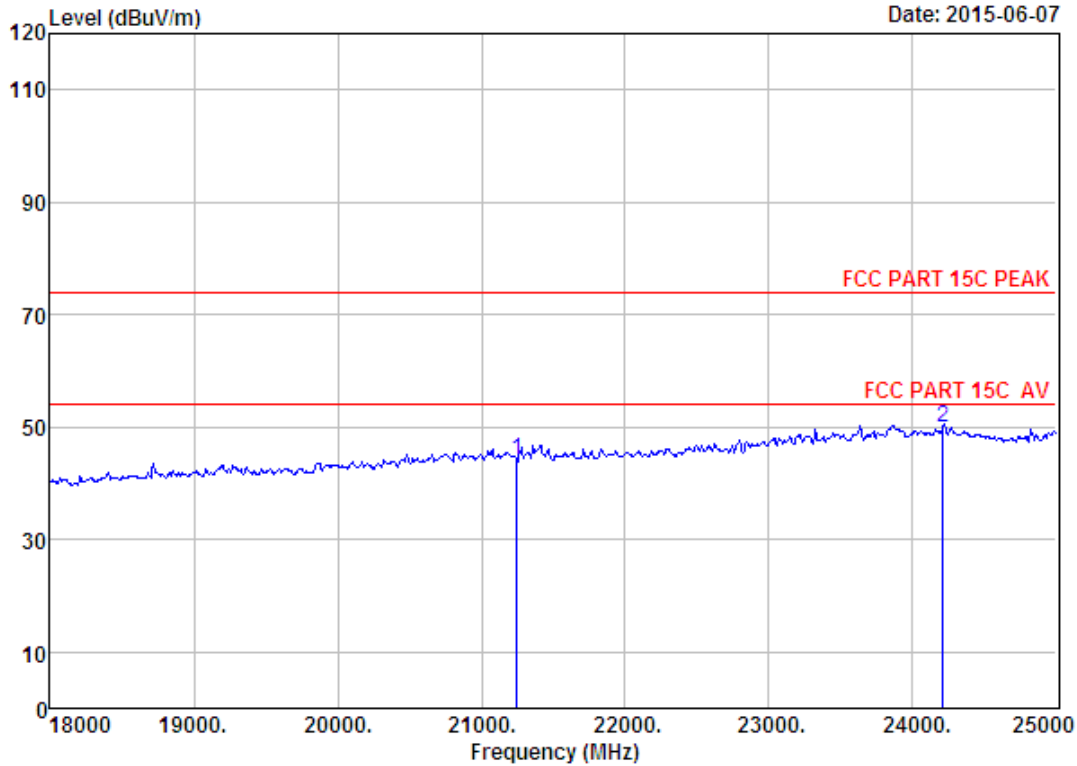

Site no. : 1# 966 chamber Data no. : 264  
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH7 2442TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21248.00	46.14	20.24	35.58	13.41	44.21	74.00	29.79	Peak
2	24209.00	45.64	22.16	33.11	15.33	50.02	74.00	23.98	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

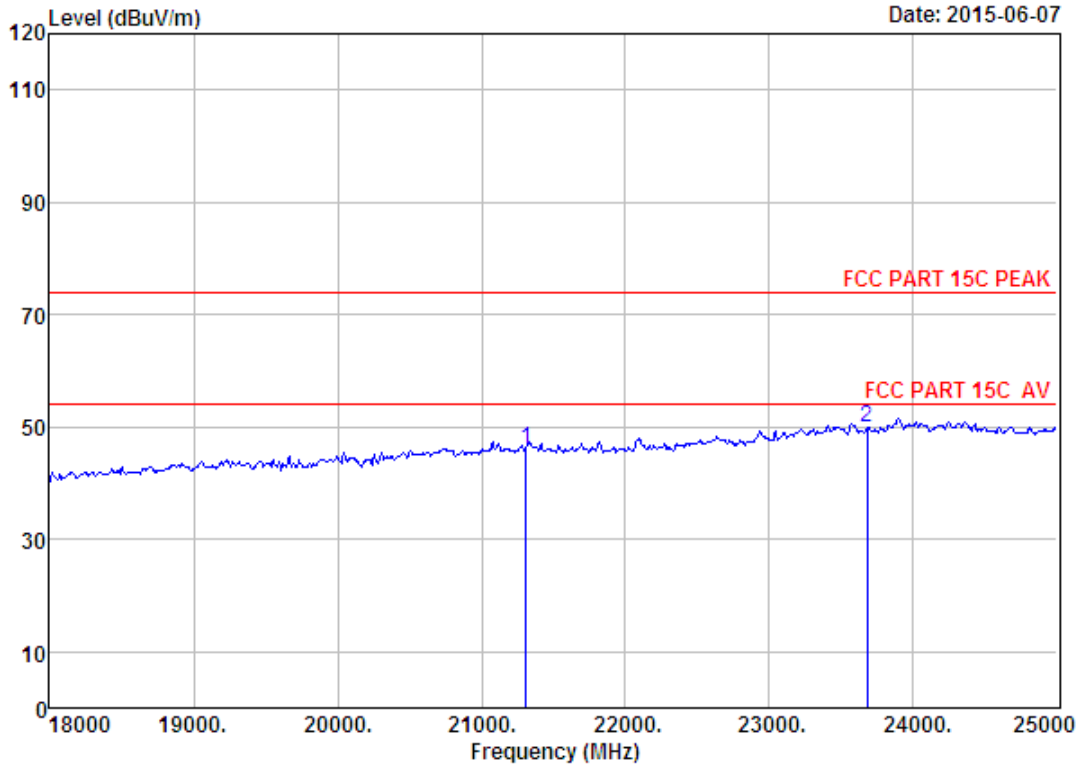

Site no. : 1# 966 chamber                      Data no. : 265  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH13 2472TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21311.00	46.12	20.27	35.53	15.37	46.23	74.00	27.77	Peak
2	23677.00	45.67	21.76	33.14	15.49	49.78	74.00	24.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

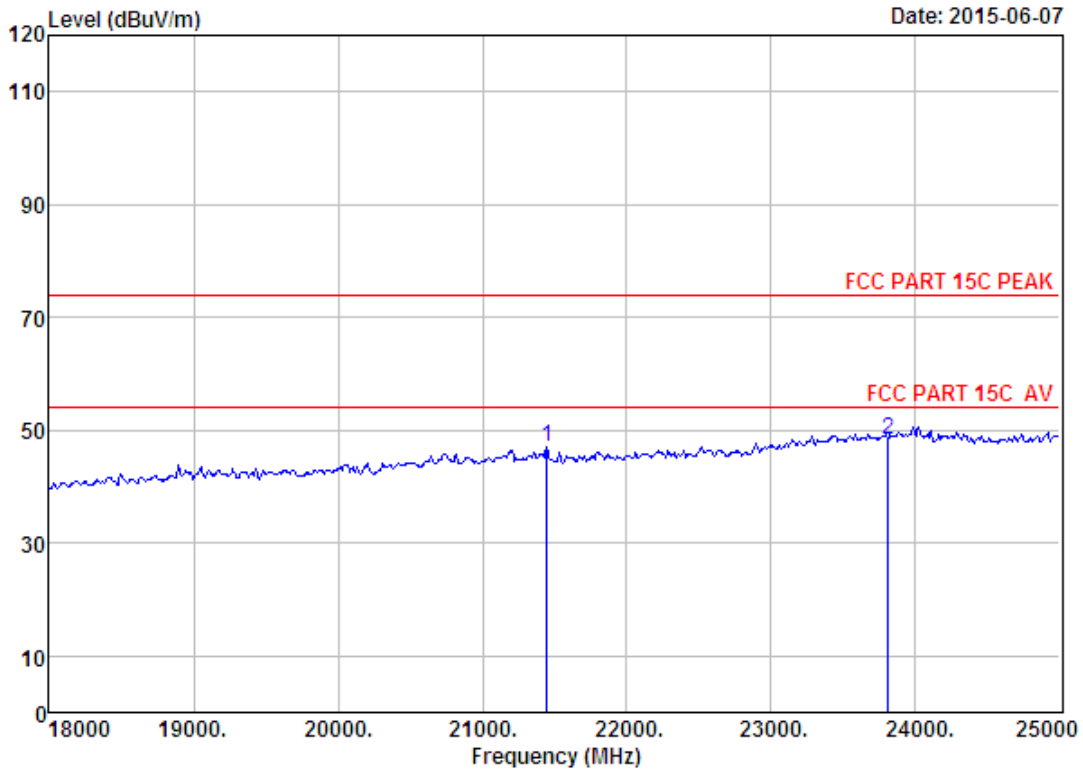


Site no. : 1# 966 chamber                      Data no. : 266  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH13 2472TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21444.00	46.03	20.32	35.40	16.12	47.07	74.00	26.93	Peak
2	23810.00	45.64	21.88	33.01	13.80	48.31	74.00	25.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




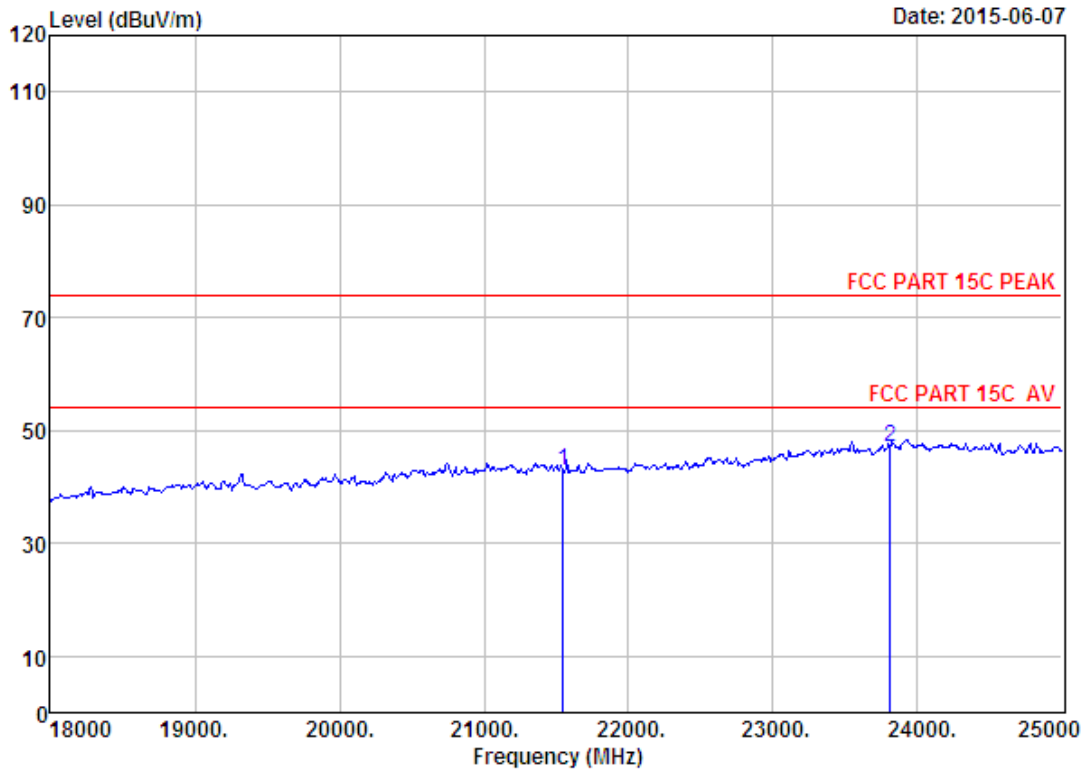

Site no. : 1# 966 chamber                      Data no. : 267  
 Dis. / Ant. : 3m ANT ABVOE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21549.00	45.97	20.37	35.31	11.94	42.97	74.00	31.03	Peak
2	23810.00	45.64	21.88	33.01	12.43	46.94	74.00	27.06	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

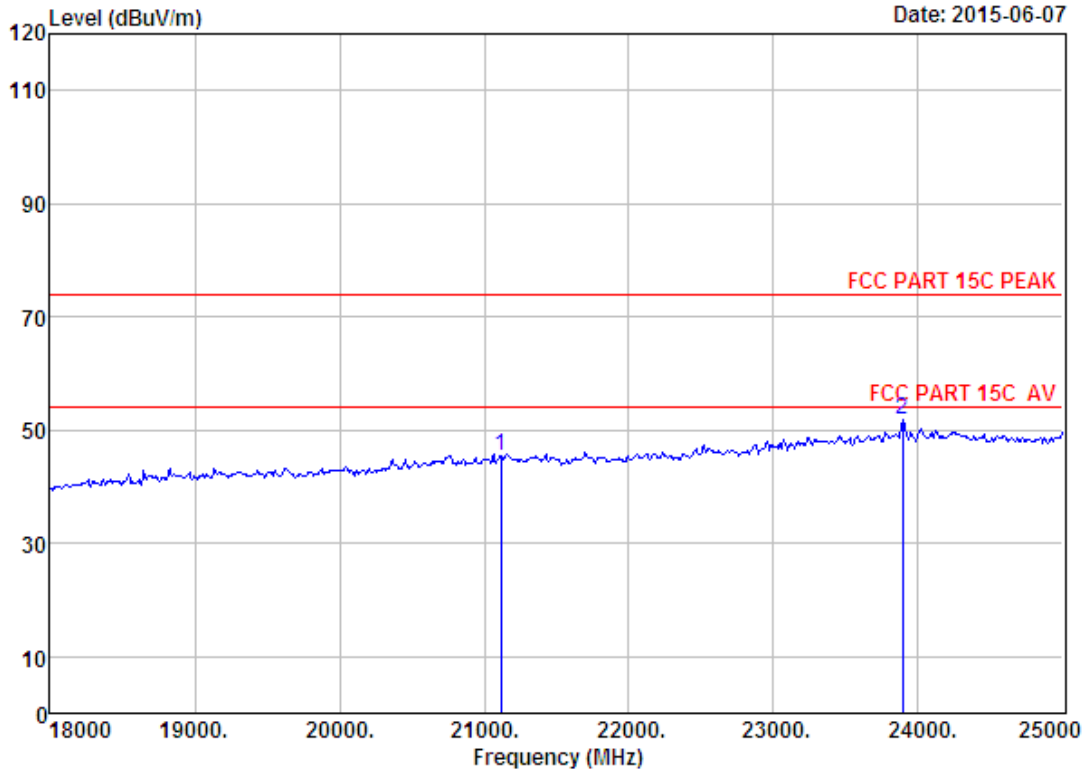

Site no. : 1# 966 chamber Data no. : 268  
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21115.00	46.22	20.18	35.69	14.88	45.59	74.00	28.41	Peak
2	23894.00	45.62	21.95	32.90	17.14	51.81	74.00	22.19	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

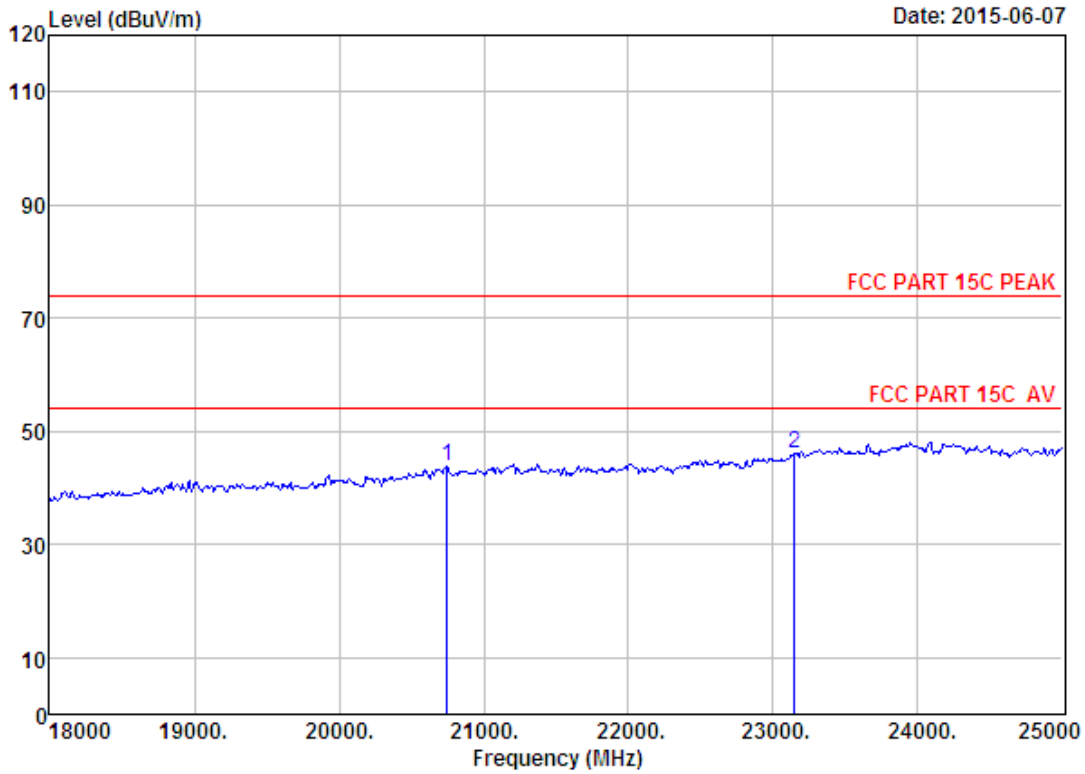

Site no. : 1# 966 chamber Data no. : 269  
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH7 2442TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20744.00	46.15	20.02	36.03	13.68	43.82	74.00	30.18	Peak
2	23145.00	45.63	21.28	33.69	13.00	46.22	74.00	27.78	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

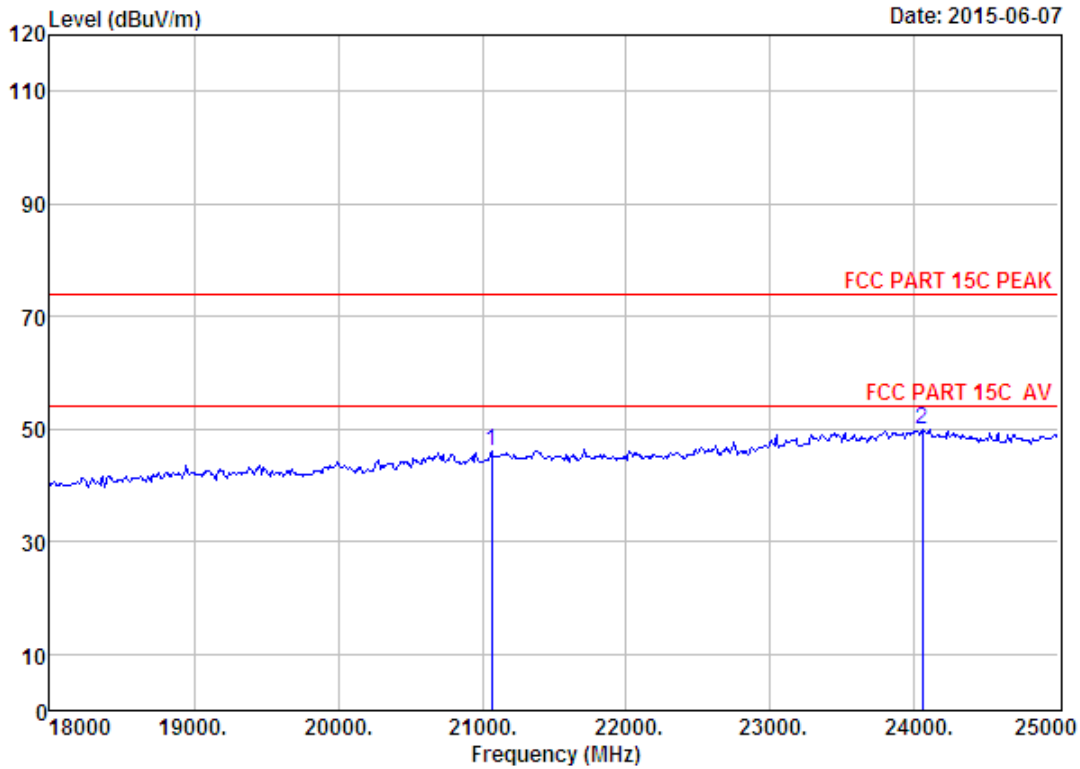

Site no. : 1# 966 chamber Data no. : 270  
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH7 2442TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21066.00	46.26	20.16	35.73	15.51	46.20	74.00	27.80	Peak
2	24055.00	45.61	22.08	32.88	15.12	49.93	74.00	24.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

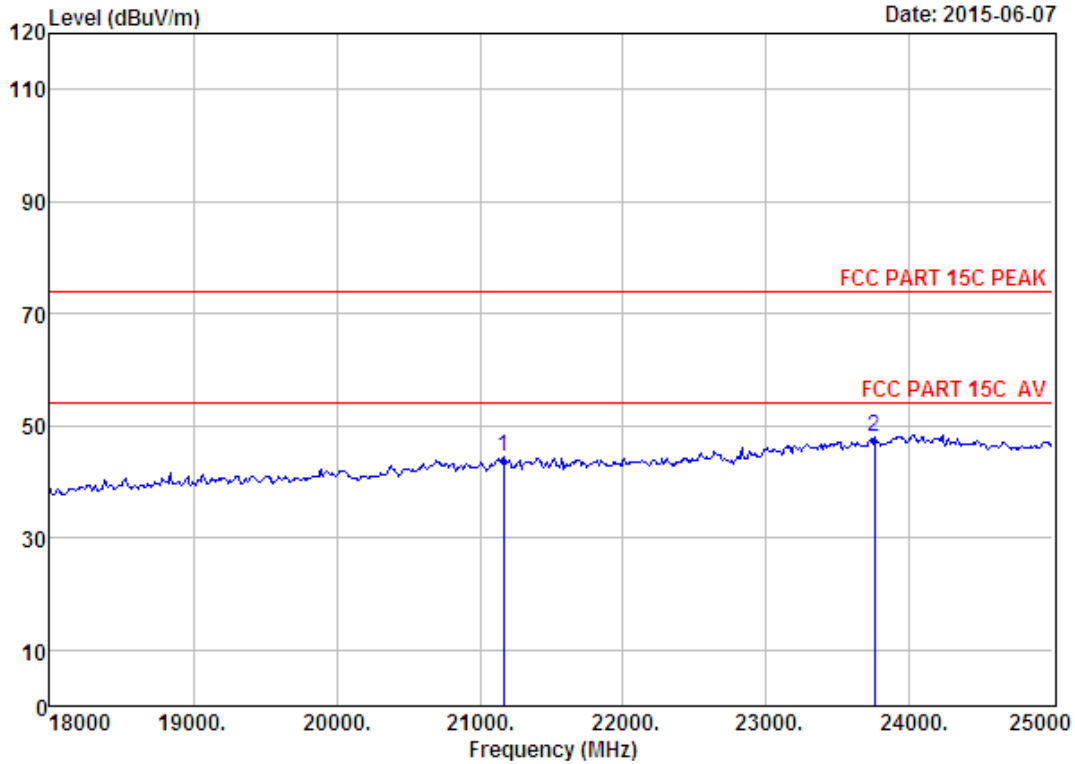

Site no. : 1# 966 chamber                      Data no. : 271  
 Dis. / Ant. : 3m ANT ABVOE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH13 2472TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21164.00	46.20	20.20	35.64	13.75	44.51	74.00	29.49	Peak
2	23754.00	45.65	21.82	33.06	13.44	47.85	74.00	26.15	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

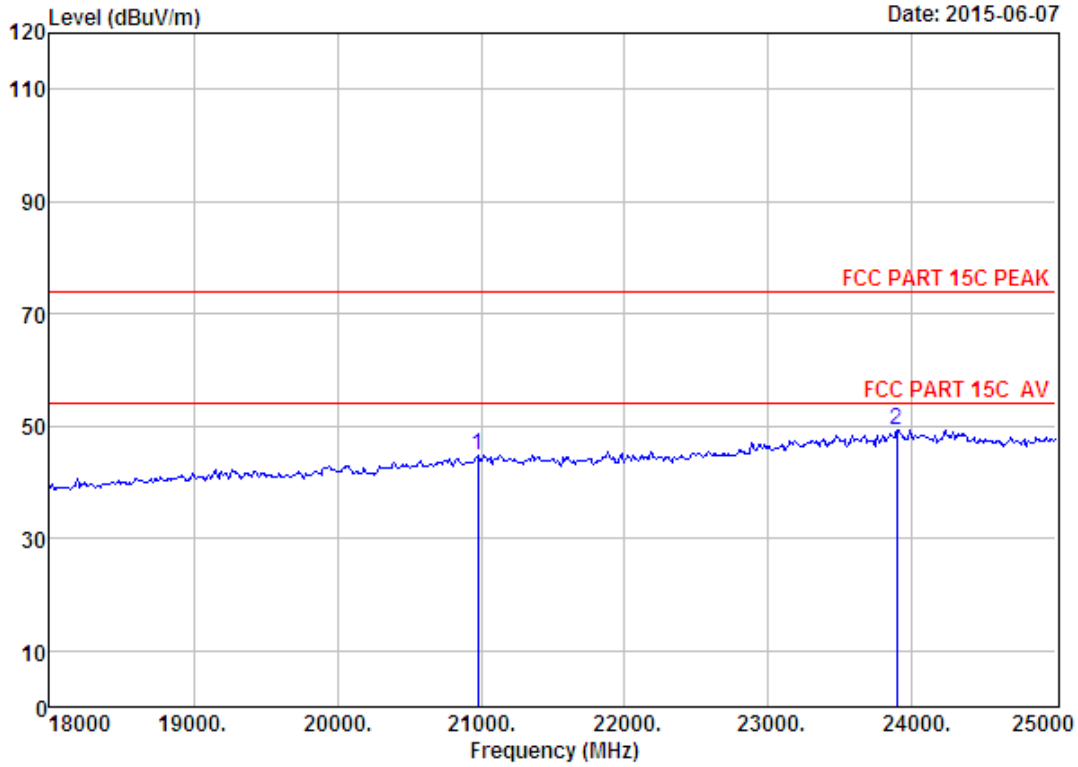

Site no. : 1# 966 chamber                      Data no. : 272  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH13 2472TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20975.00	46.29	20.12	35.82	14.16	44.75	74.00	29.25	Peak
2	23894.00	45.62	21.95	32.90	14.72	49.39	74.00	24.61	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

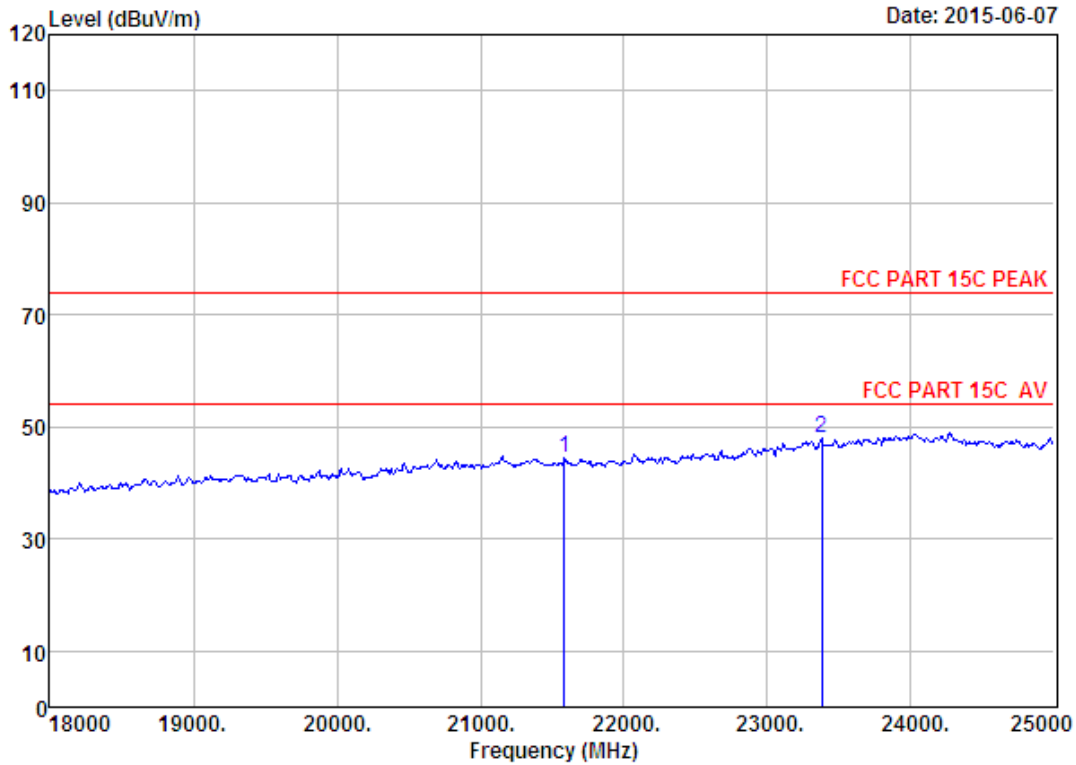

Site no. : 1# 966 chamber                      Data no. : 273  
 Dis. / Ant. : 3m ANT ABOVE 18G                Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX  
               Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	21584.00	45.95	20.38	35.28	13.37	44.42	74.00	29.58	Peak
2	23376.00	45.67	21.48	33.46	14.19	47.88	74.00	26.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

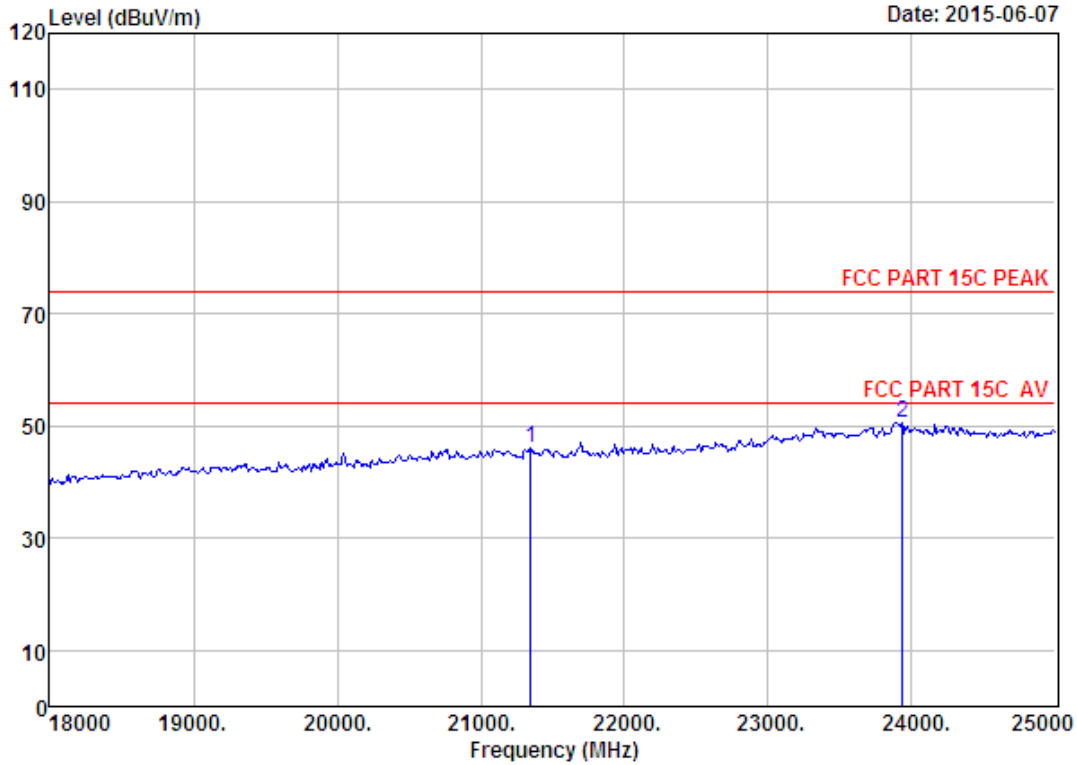


Site no. : 1# 966 chamber                      Data no. : 274  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21346.00	46.09	20.28	35.49	15.07	45.95	74.00	28.05	Peak
2	23936.00	45.61	21.99	32.88	15.96	50.68	74.00	23.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




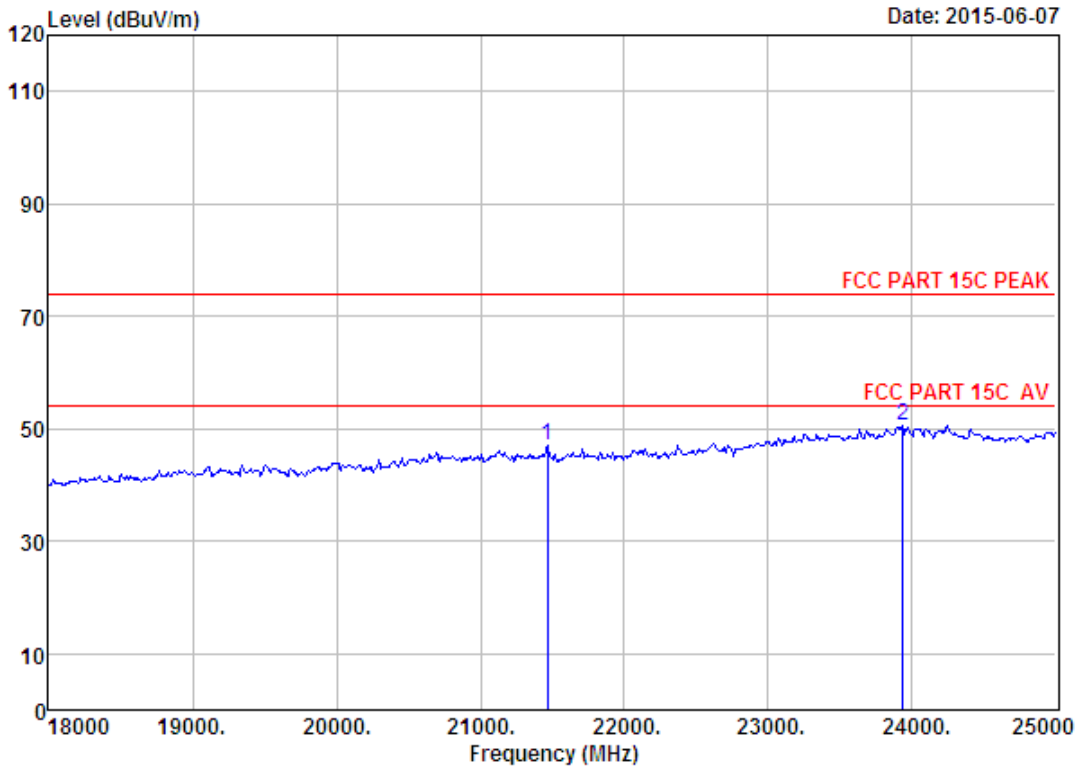

Site no. : 1# 966 chamber                      Data no. : 275  
 Dis. / Ant. : 3m ANT ABOVE 18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH7 2442TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21465.00	46.01	20.33	35.37	15.94	46.91	74.00	27.09	Peak
2	23936.00	45.61	21.99	32.88	15.76	50.48	74.00	23.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

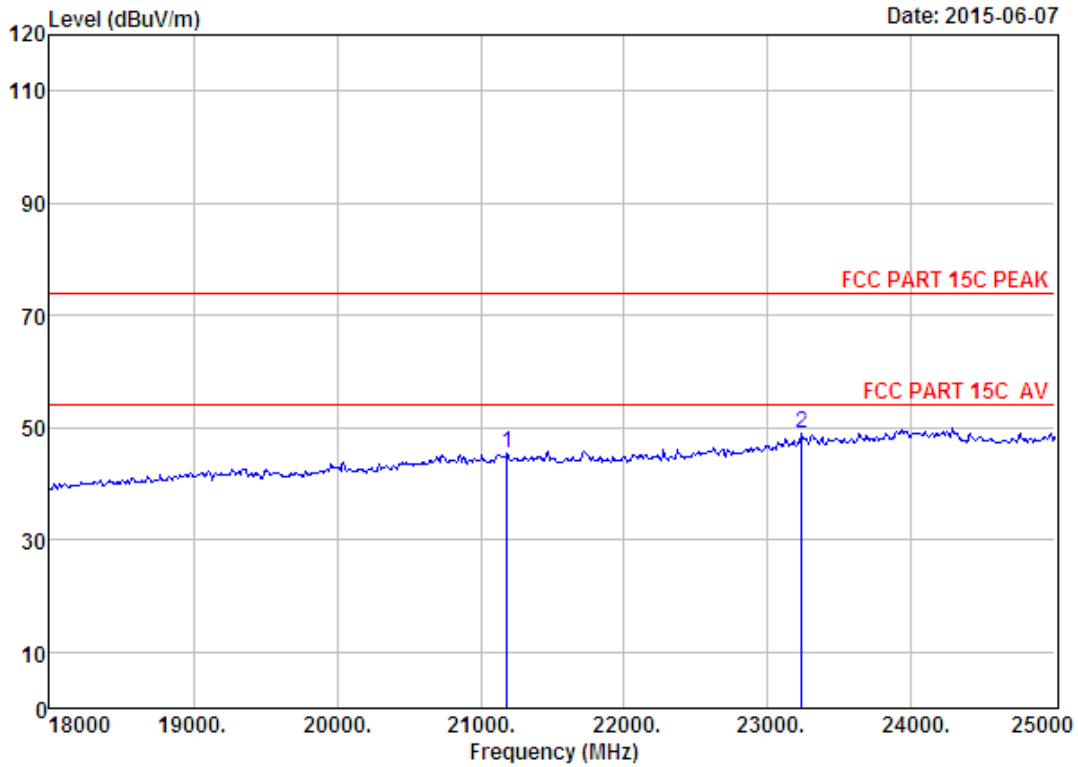


```

Site no.       : 1# 966 chamber           Data no.  : 276
Dis. / Ant.    : 3m  ANT ABOVE 18G       Ant. pol. : VERTICAL
Limit         : FCC PART 15C PEAK
Env. / Ins.    : Temp:23.6';Humi:56%;Press:101.52kPa
Engineer      : Tony
EUT           : LED TV
Power         : AC 120V/60Hz
M/N           : WE85NC4210
Test Mode     : IEEE 802.11n HT20 CH7 2442TX
                Antenna a
    
```

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21185.00	46.18	20.21	35.64	14.67	45.42	74.00	28.58	Peak
2	23236.00	45.65	21.36	33.61	15.47	48.87	74.00	25.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

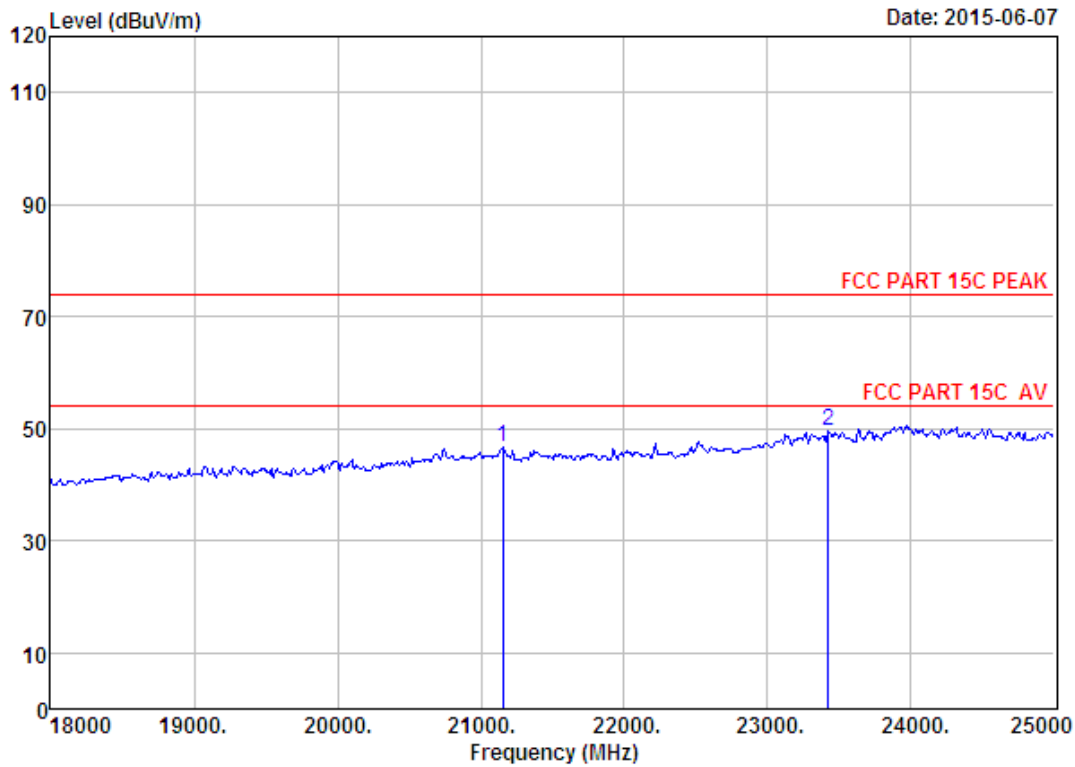

Site no. : 1# 966 chamber                      Data no. : 277  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21150.00	46.21	20.20	35.67	16.10	46.84	74.00	27.16	Peak
2	23425.00	45.69	21.53	33.40	15.64	49.46	74.00	24.54	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

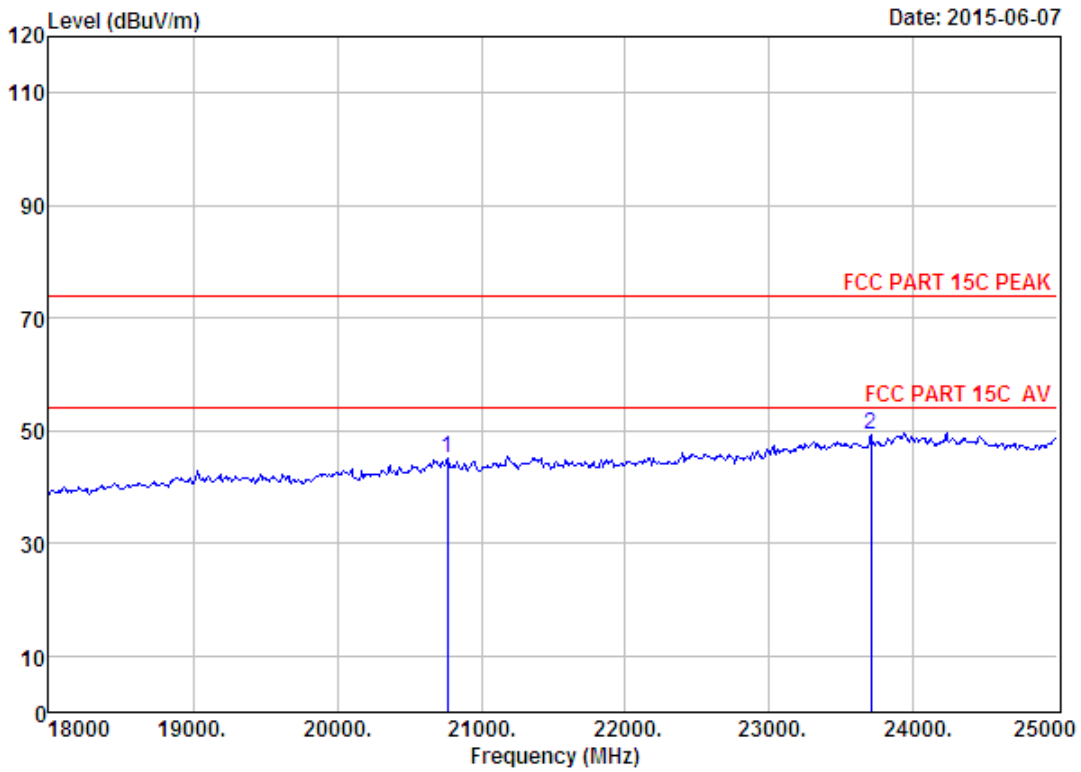

Site no. : 1# 966 chamber                      Data no. : 278  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20765.00	46.16	20.02	36.00	15.08	45.26	74.00	28.74	Peak
2	23705.00	45.66	21.78	33.11	14.89	49.22	74.00	24.78	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

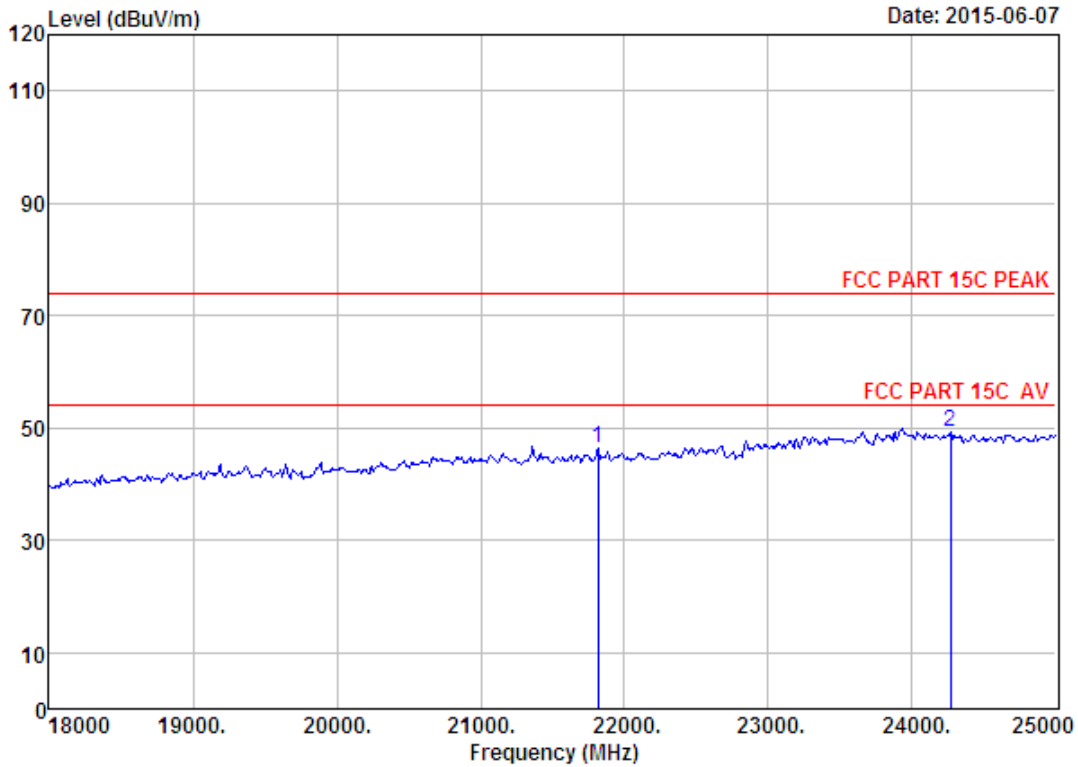

Site no. : 1# 966 chamber Data no. : 279  
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH1 2422TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21815.00	45.82	20.48	35.06	15.27	46.51	74.00	27.49	Peak
2	24265.00	45.65	22.19	33.23	14.61	49.22	74.00	24.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

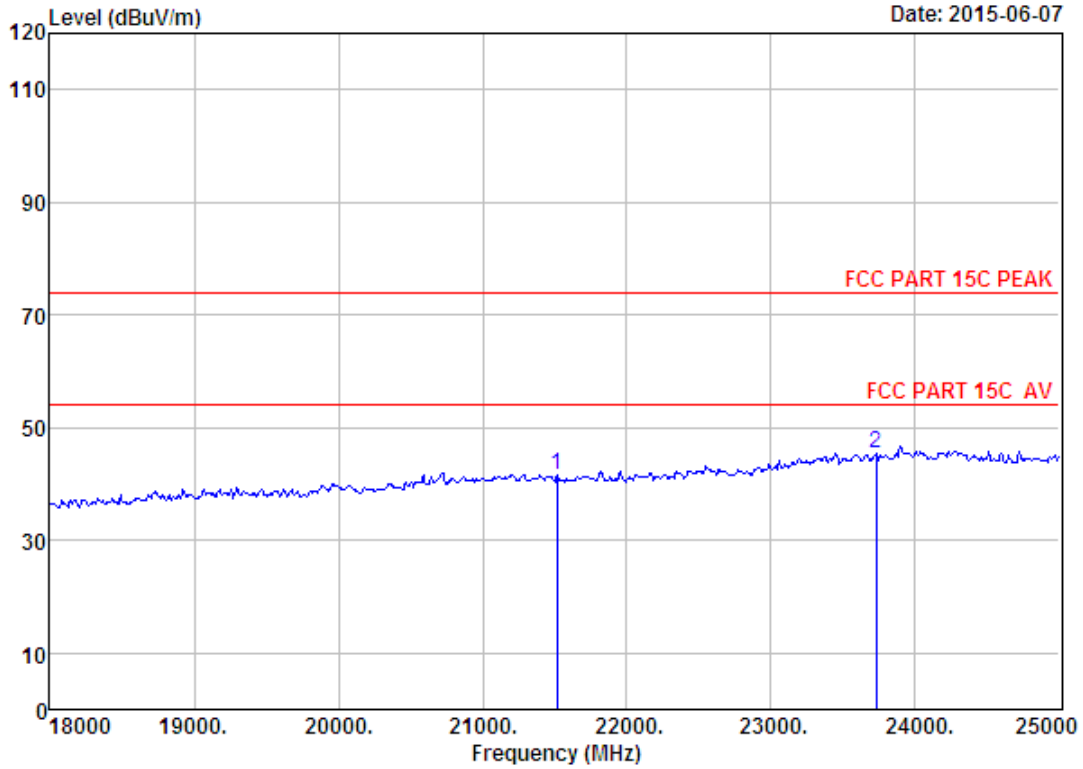


Date: 2015-06-07

Site no. : 1# 966 chamber Data no. : 280  
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH1 2422TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21514.00	45.99	20.35	35.33	10.65	41.66	74.00	32.34	Peak
2	23726.00	45.66	21.80	33.09	11.00	45.37	74.00	28.63	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

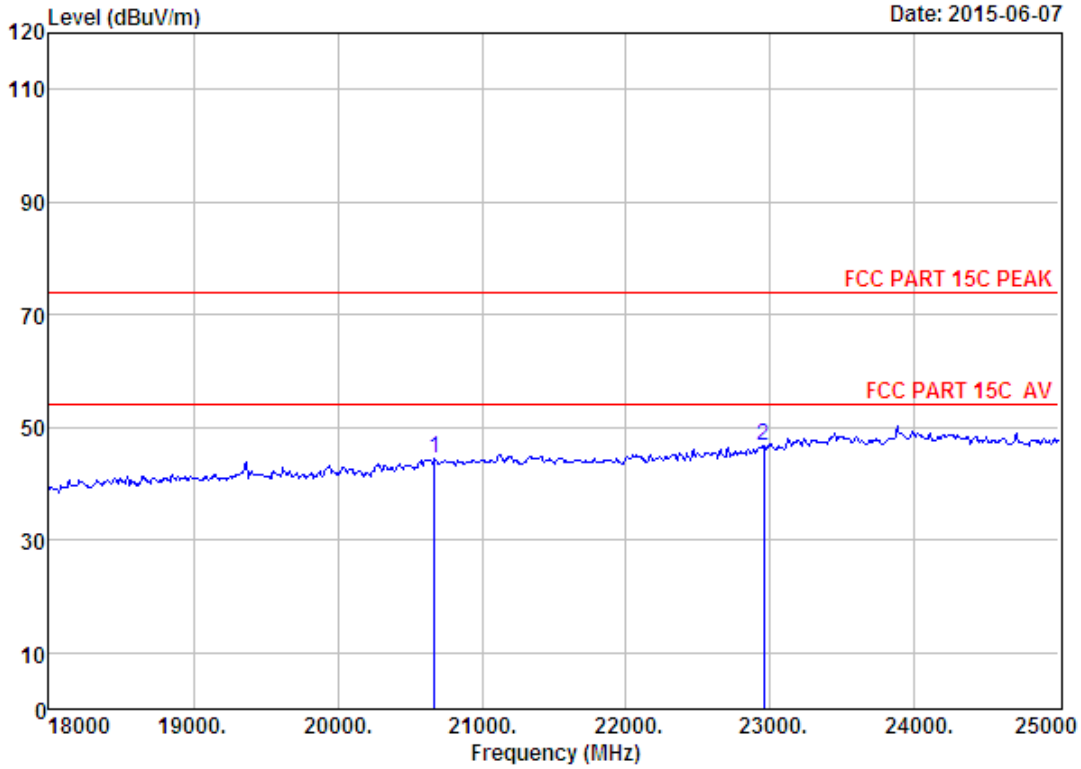

Site no. : 1# 966 chamber Data no. : 281  
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH5 2442TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20674.00	46.11	19.98	36.09	14.36	44.36	74.00	29.64	Peak
2	22956.00	45.62	21.12	33.90	13.94	46.78	74.00	27.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

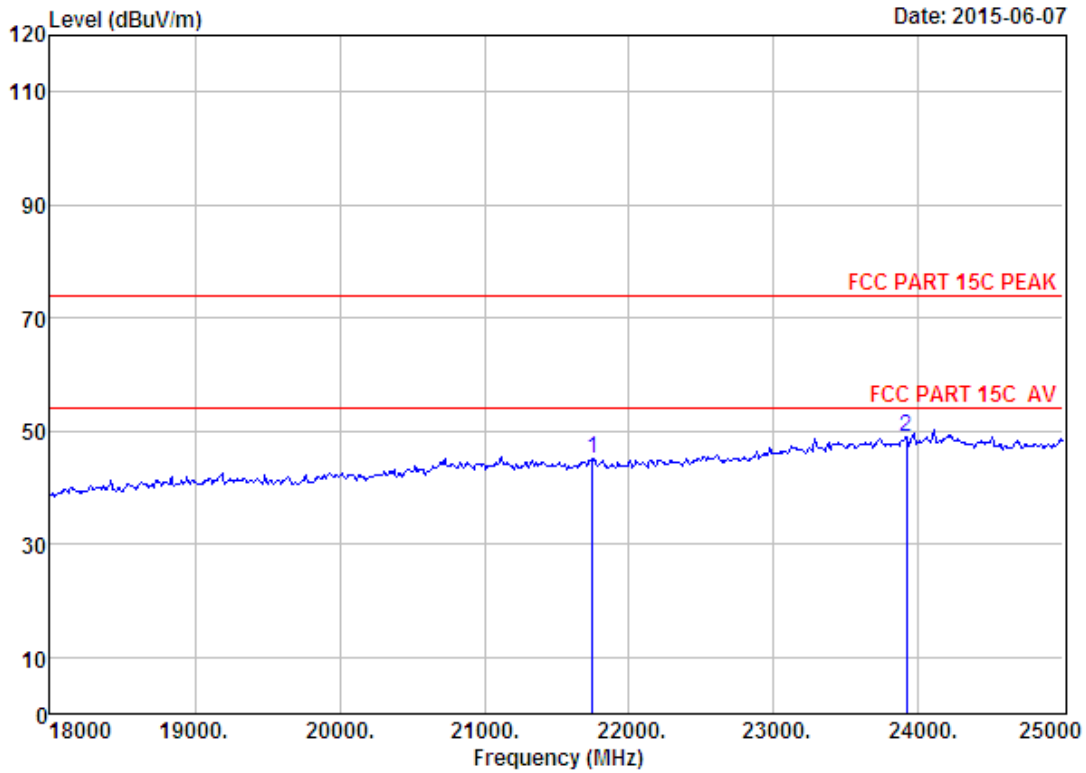


Site no. : 1# 966 chamber                      Data no. : 282  
 Dis. / Ant. : 3m ANT ABOVE 18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH5 2442TX  
                     Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21745.00	45.86	20.45	35.12	13.95	45.14	74.00	28.86	Peak
2	23915.00	45.62	21.97	32.88	14.32	49.03	74.00	24.97	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



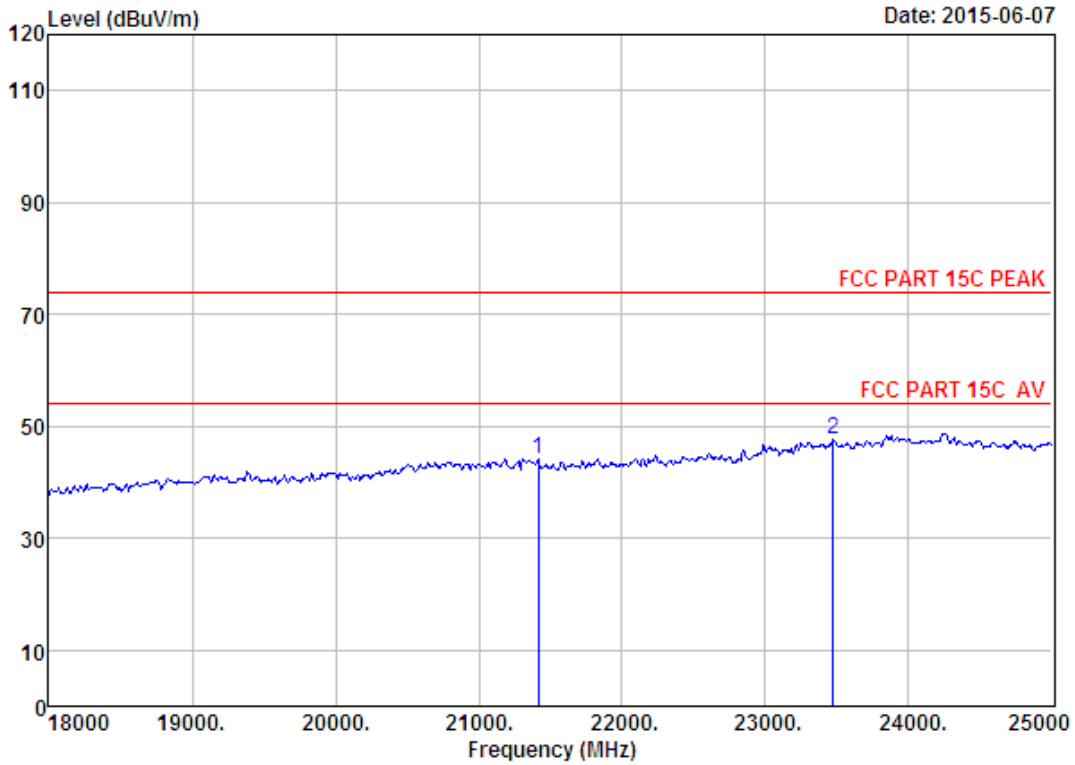


Date: 2015-06-07

Site no. : 1# 966 chamber                      Data no. : 283  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH9 2462TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21416.00	46.05	20.31	35.42	13.35	44.29	74.00	29.71	Peak
2	23474.00	45.70	21.57	33.35	13.72	47.64	74.00	26.36	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

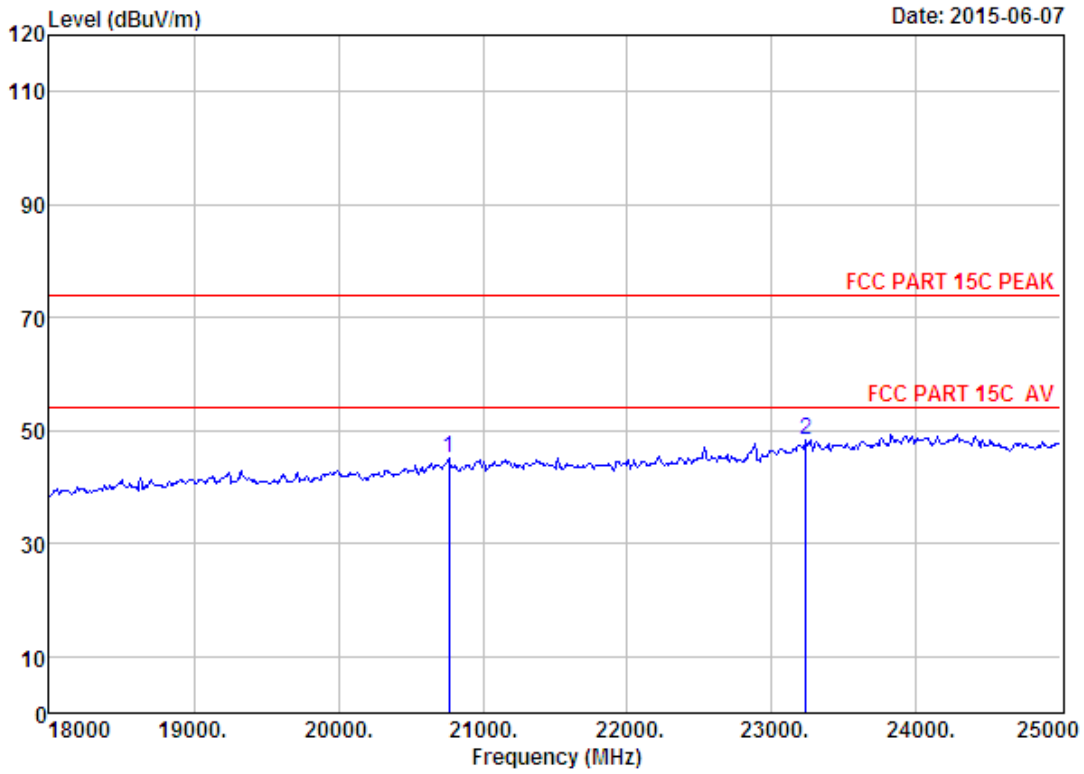

Site no. : 1# 966 chamber                      Data no. : 284  
 Dis. / Ant. : 3m ANT ABOVE 18G                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH9 2462TX  
                     Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20765.00	46.16	20.02	36.00	14.83	45.01	74.00	28.99	Peak
2	23236.00	45.65	21.36	33.61	14.87	48.27	74.00	25.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

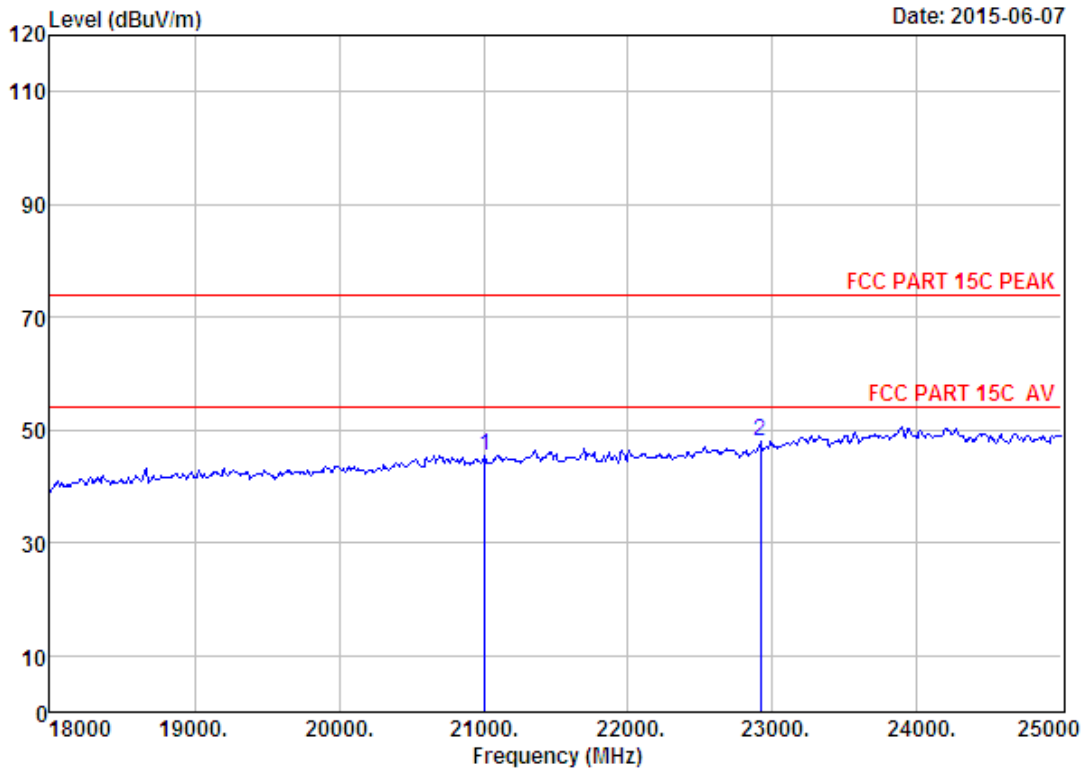


Date: 2015-06-07

Site no. : 1# 966 chamber Data no. : 285  
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH1 2412TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21010.00	46.29	20.13	35.80	14.90	45.52	74.00	28.48	Peak
2	22914.00	45.64	21.10	33.93	15.10	47.91	74.00	26.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



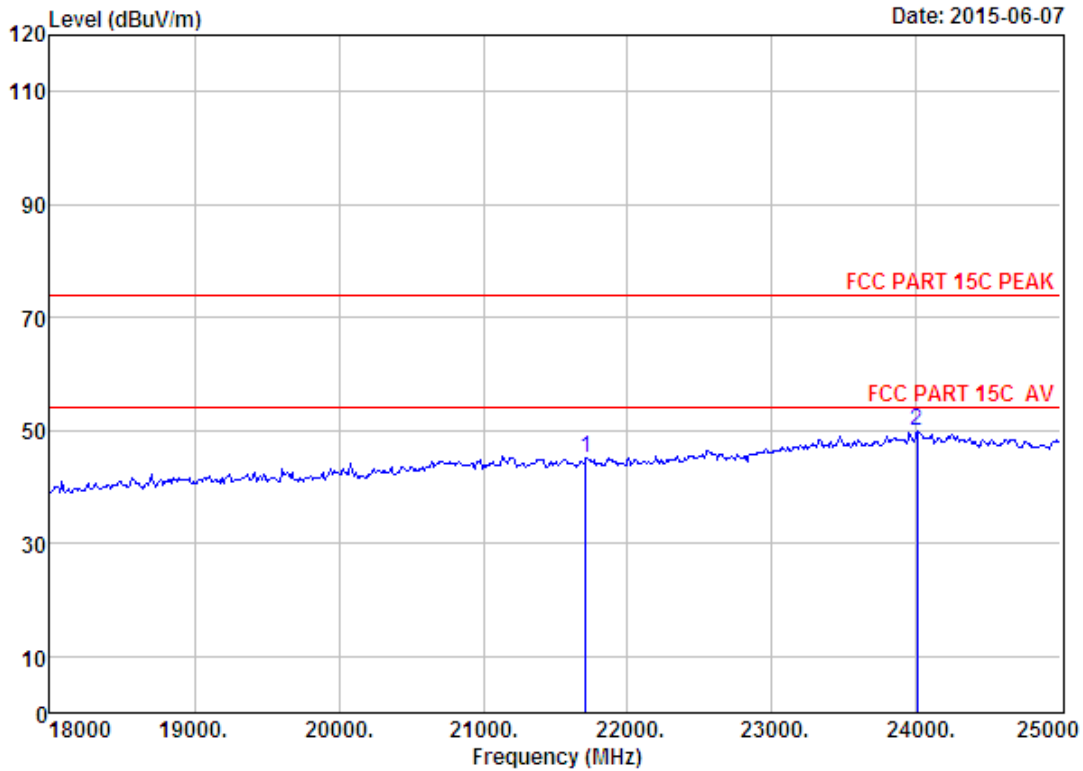


Site no. : 1# 966 chamber                      Data no. : 286  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUI : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH1 2412TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21710.00	45.87	20.44	35.17	13.92	45.06	74.00	28.94	Peak
2	24006.00	45.60	22.05	32.80	14.97	49.82	74.00	24.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.






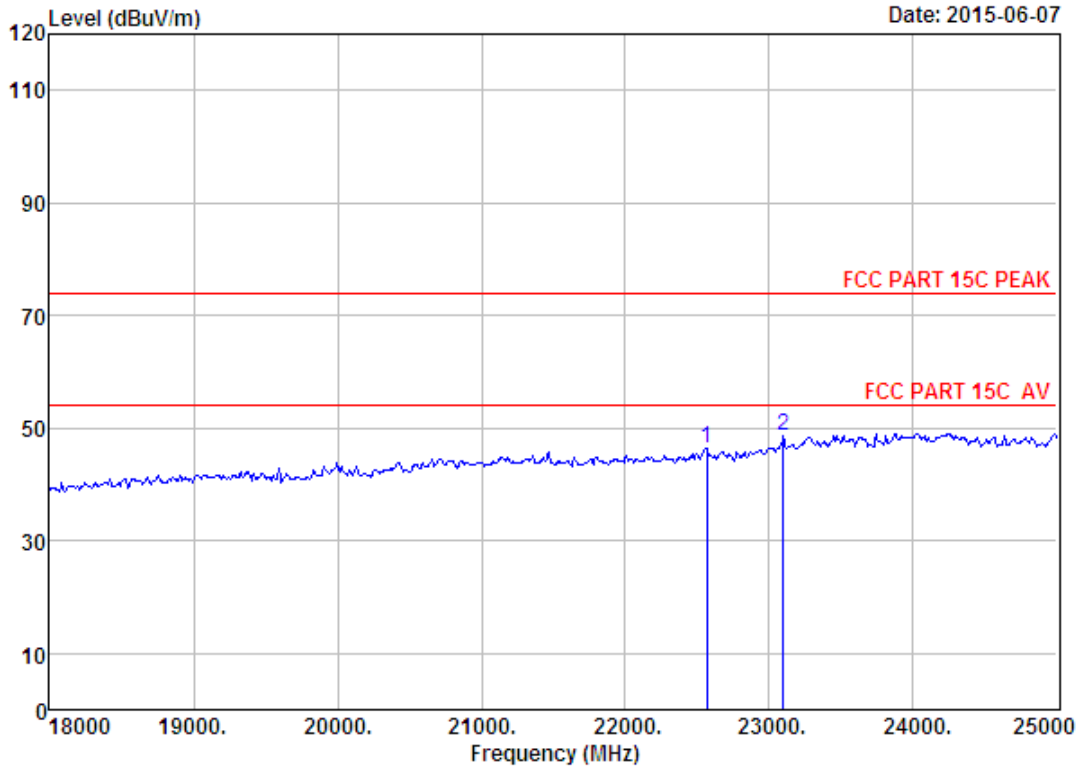

Site no. : 1# 966 chamber                      Data no. : 288  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH7 2442TX  
                     Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	22564.00	45.78	20.89	34.30	13.94	46.31	74.00	27.69	Peak
2	23096.00	45.62	21.23	33.74	15.63	48.74	74.00	25.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

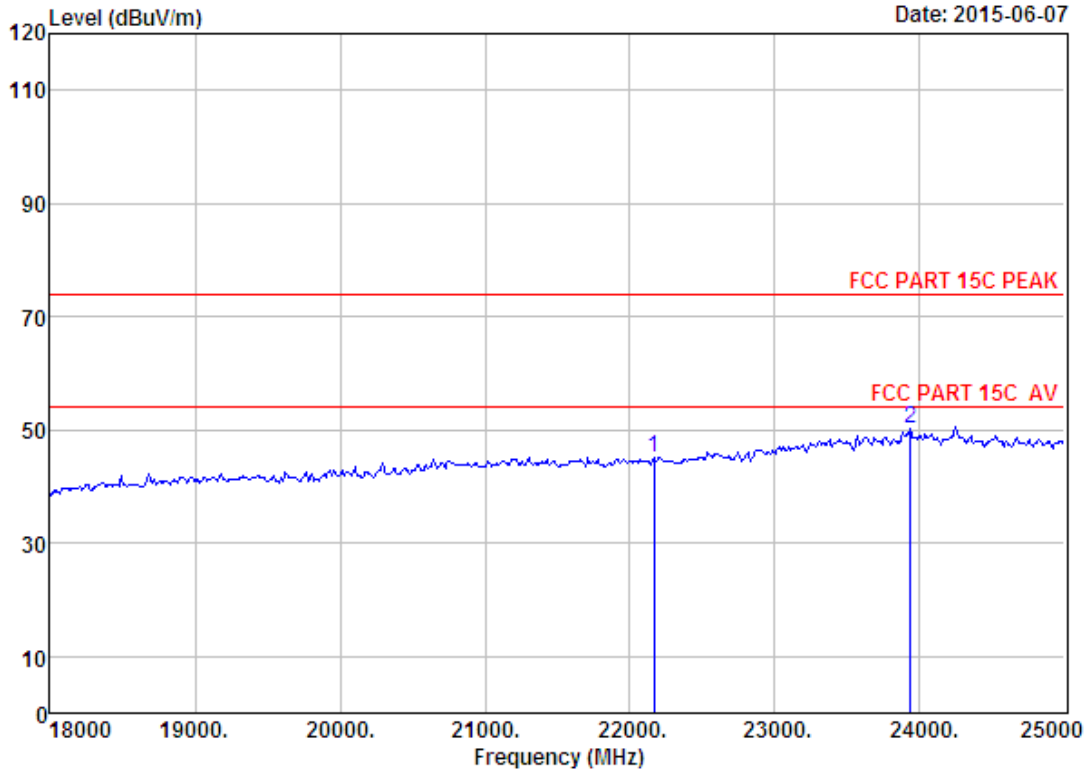


Site no. : 1# 966 chamber                      Data no. : 289  
 Dis. / Ant. : 3m ANT ABOVE 18G                  Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH13 2472TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	22165.00	45.73	20.66	34.72	13.42	45.09	74.00	28.91	Peak
2	23936.00	45.61	21.99	32.88	15.57	50.29	74.00	23.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.






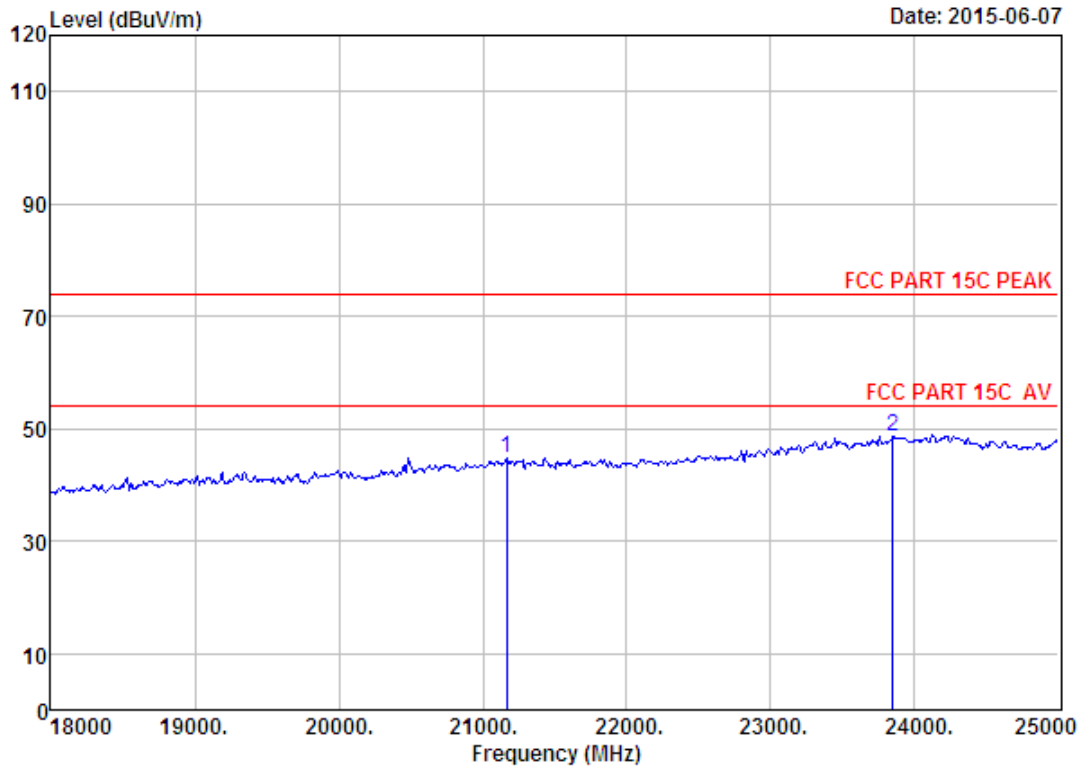

Site no. : 1# 966 chamber Data no. : 291  
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21164.00	46.20	20.20	35.64	14.20	44.96	74.00	29.04	Peak
2	23845.00	45.63	21.90	32.96	13.94	48.51	74.00	25.49	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

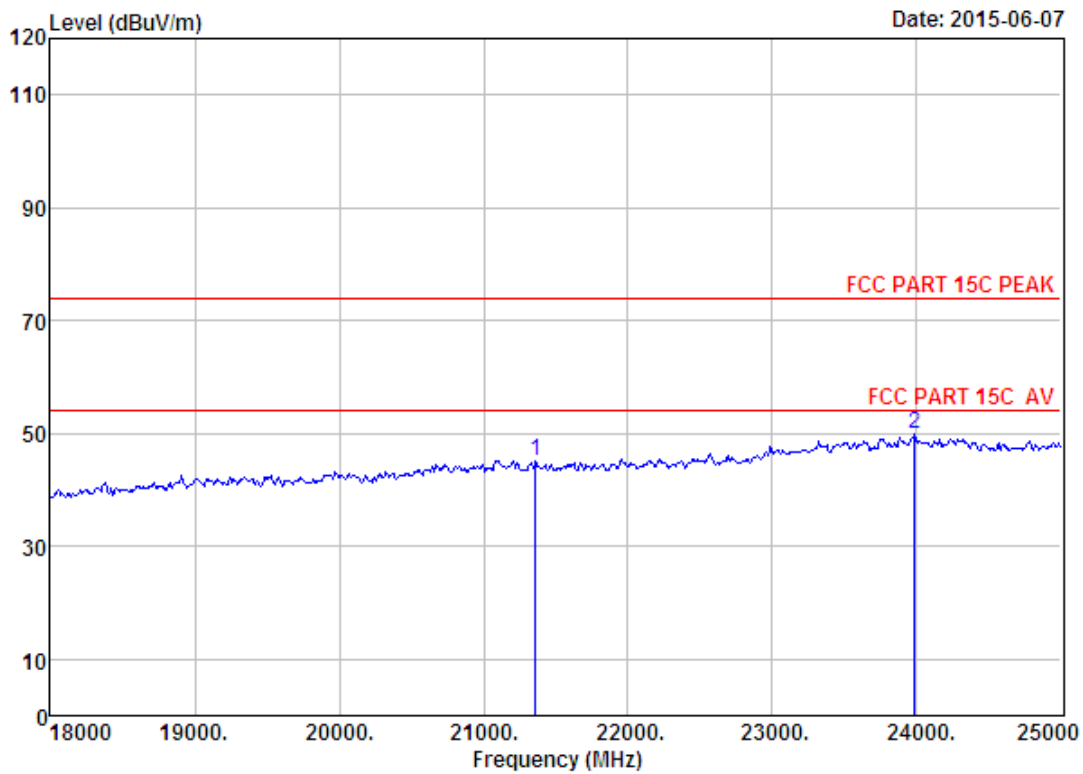

Site no. : 1# 966 chamber Data no. : 292  
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	21360.00	46.08	20.28	35.49	14.18	45.05	74.00	28.95	Peak
2	23985.00	45.60	22.03	32.83	15.05	49.85	74.00	24.15	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

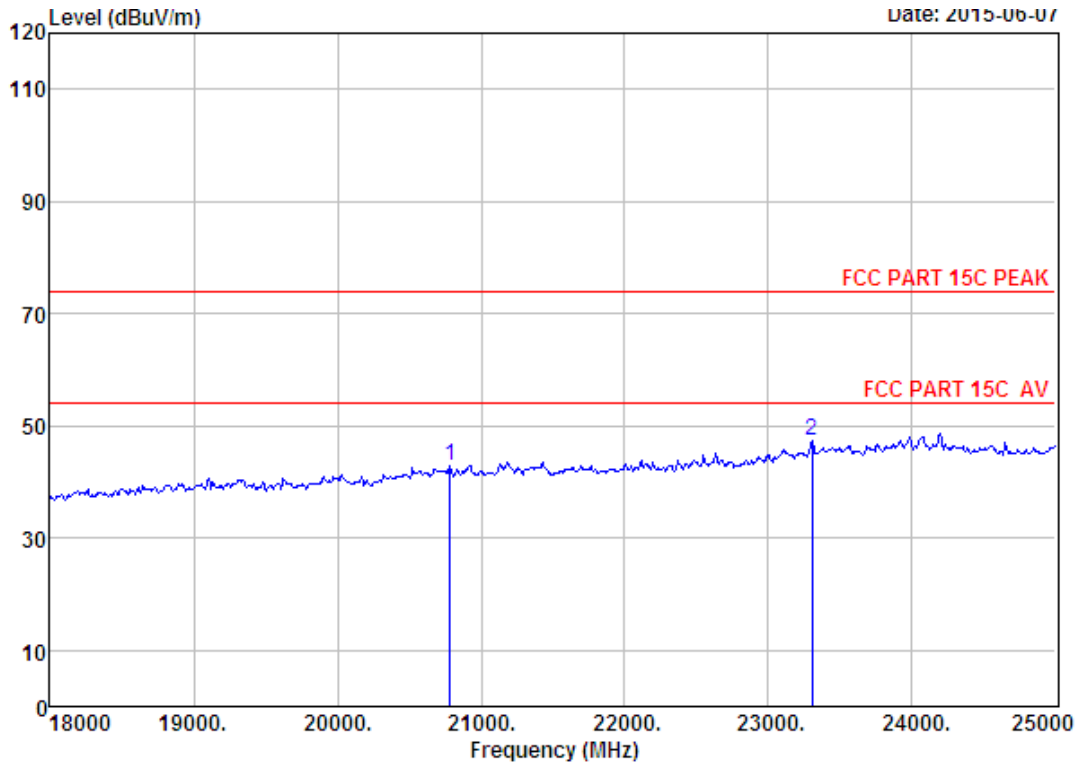

Site no. : 1# 966 chamber                      Data no. : 293  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH7 2442TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20786.00	46.18	20.04	36.00	12.69	42.91	74.00	31.09	Peak
2	23306.00	45.66	21.43	33.53	13.68	47.24	74.00	26.76	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

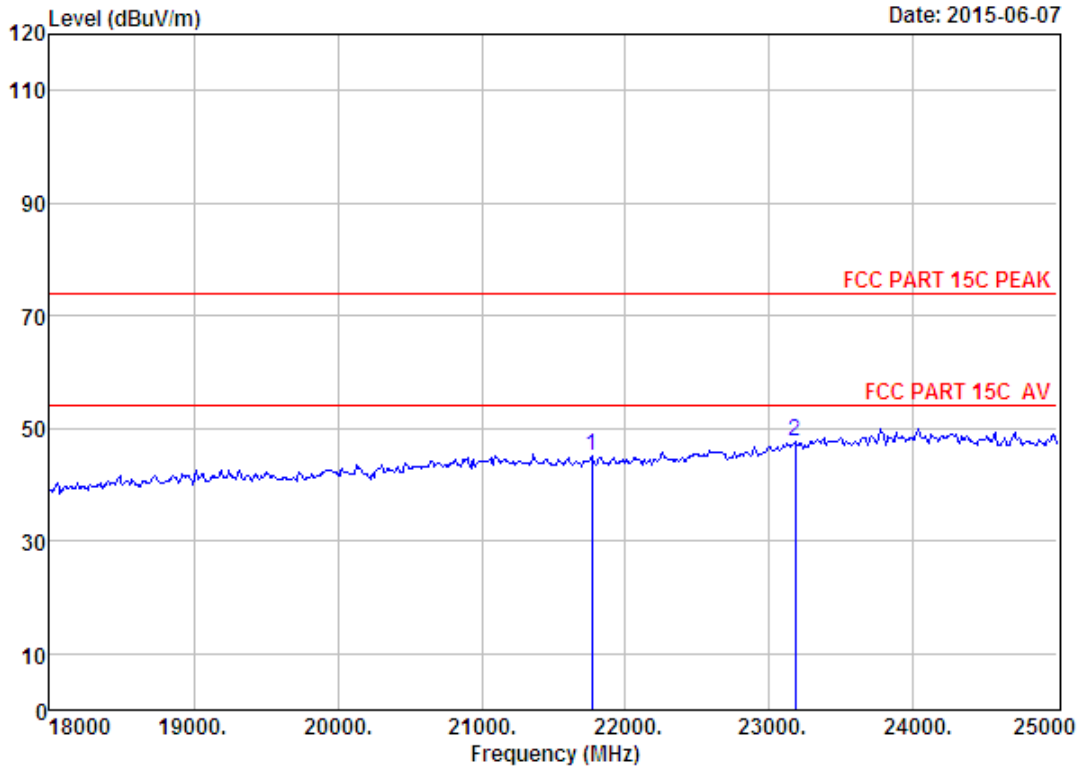

Site no. : 1# 966 chamber                      Data no. : 294  
 Dis. / Ant. : 3m ANT ABVOE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH7 2442TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21766.00	45.84	20.46	35.10	13.78	44.98	74.00	29.02	Peak
2	23180.00	45.63	21.31	33.67	14.30	47.57	74.00	26.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

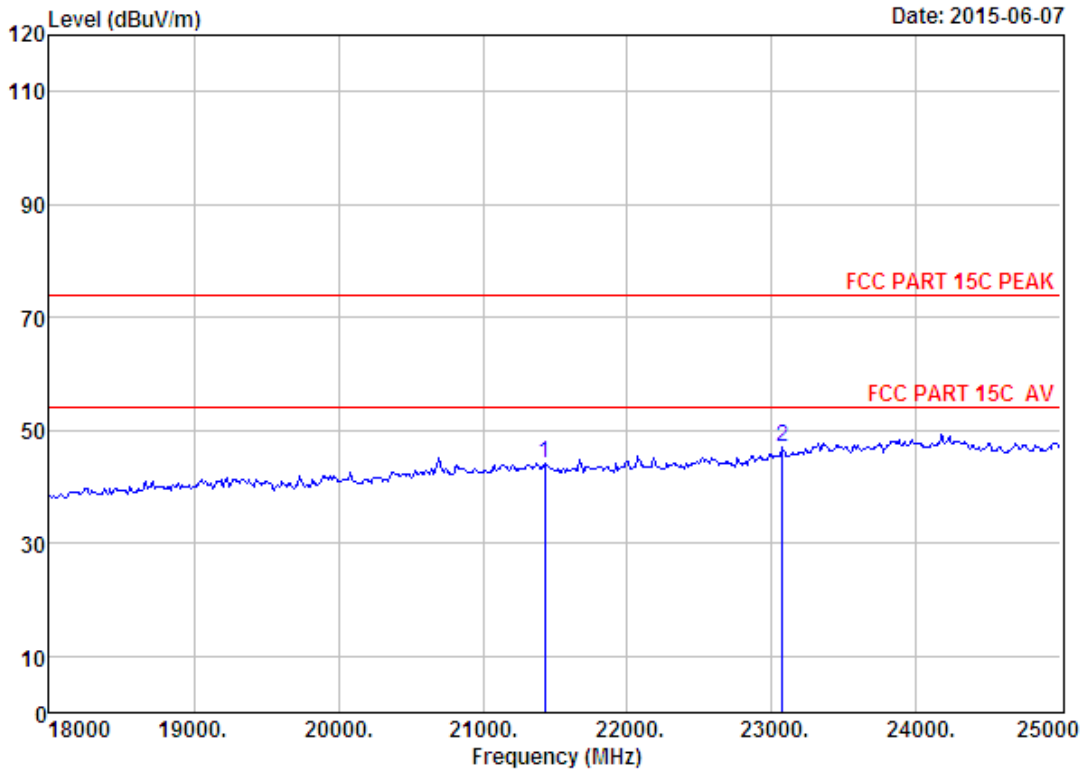


Site no. : 1# 966 chamber Data no. : 295  
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH13 2472TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21430.00	46.04	20.32	35.42	13.10	44.04	74.00	29.96	Peak
2	23075.00	45.62	21.21	33.77	13.94	47.00	74.00	27.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



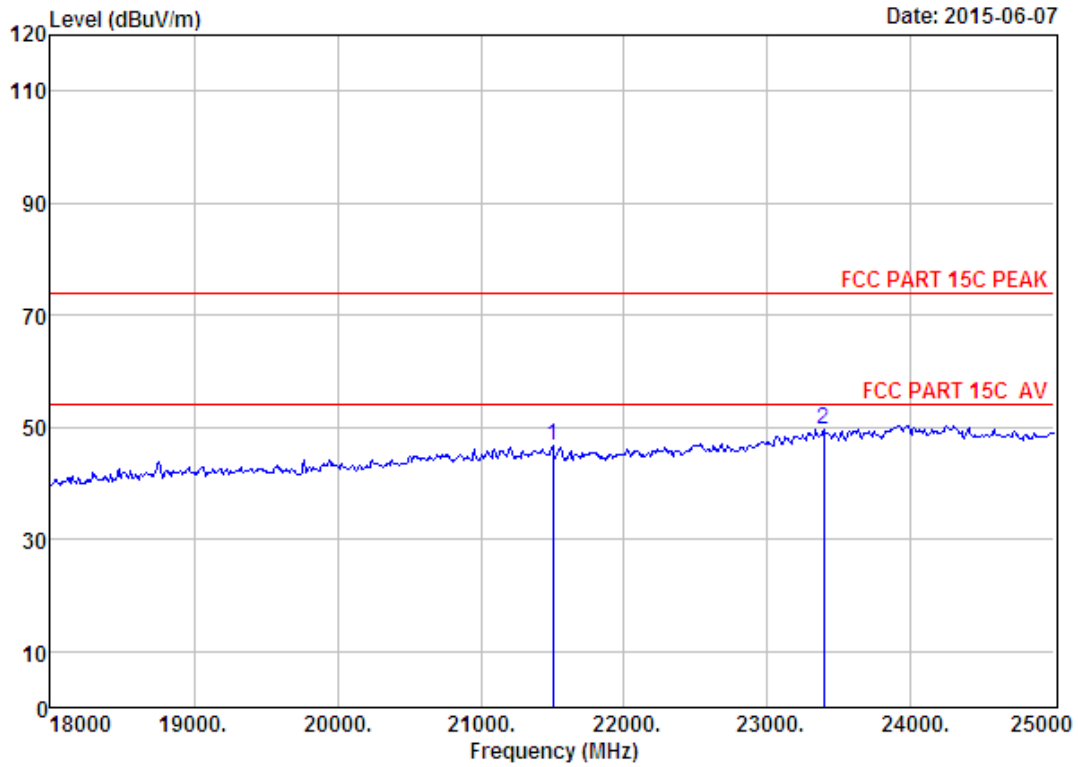


Site no. : 1# 966 chamber                      Data no. : 296  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH13 2472TX  
                     Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21500.00	46.00	20.35	35.35	15.57	46.57	74.00	27.43	Peak
2	23390.00	45.68	21.50	33.43	16.00	49.75	74.00	24.25	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



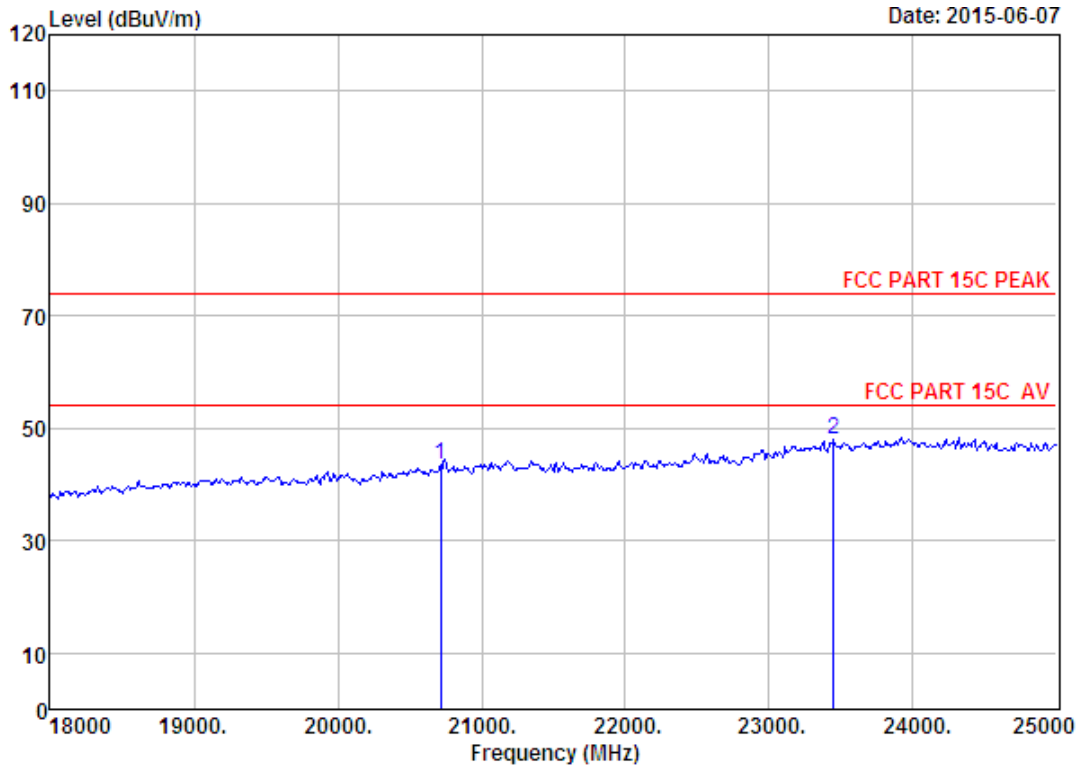


Site no. : 1# 966 chamber                      Data no. : 298  
 Dis. / Ant. : 3m ANT ABVOE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	20716.00	46.12	20.00	36.05	13.52	43.59	74.00	30.41	Peak
2	23446.00	45.69	21.55	33.38	14.07	47.93	74.00	26.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.






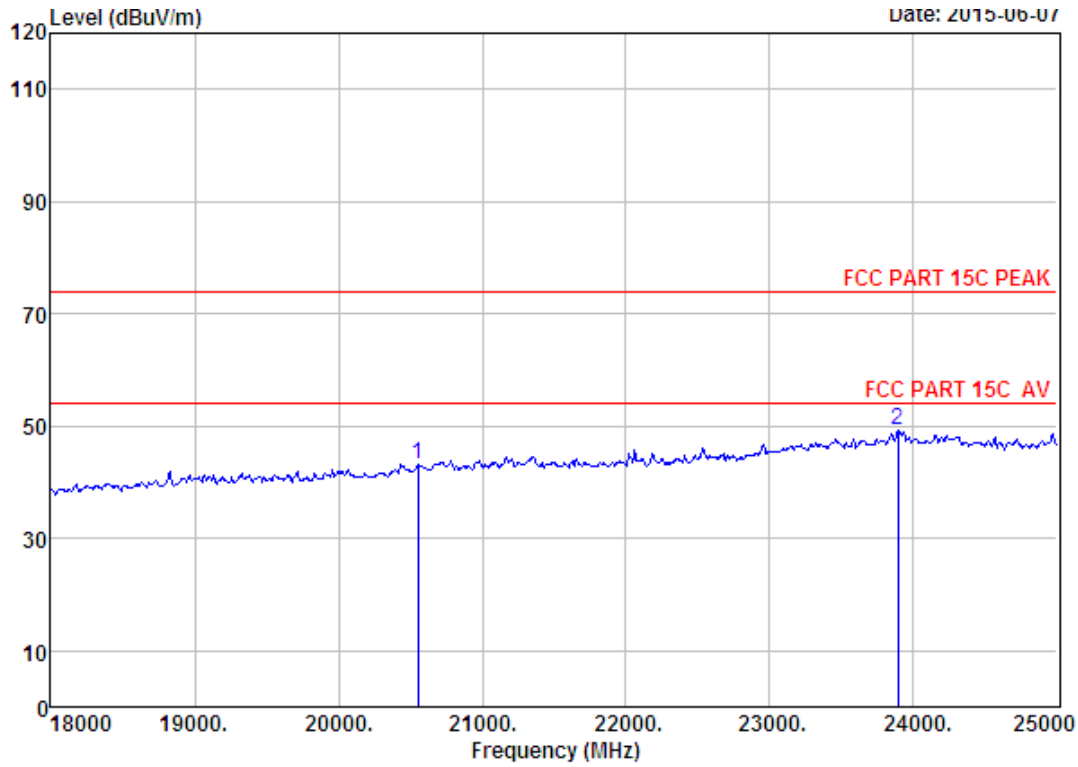

Site no. : 1# 966 chamber                      Data no. : 299  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH7 2442TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20555.00	46.03	19.93	36.21	13.55	43.30	74.00	30.70	Peak
2	23894.00	45.62	21.95	32.90	14.72	49.39	74.00	24.61	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

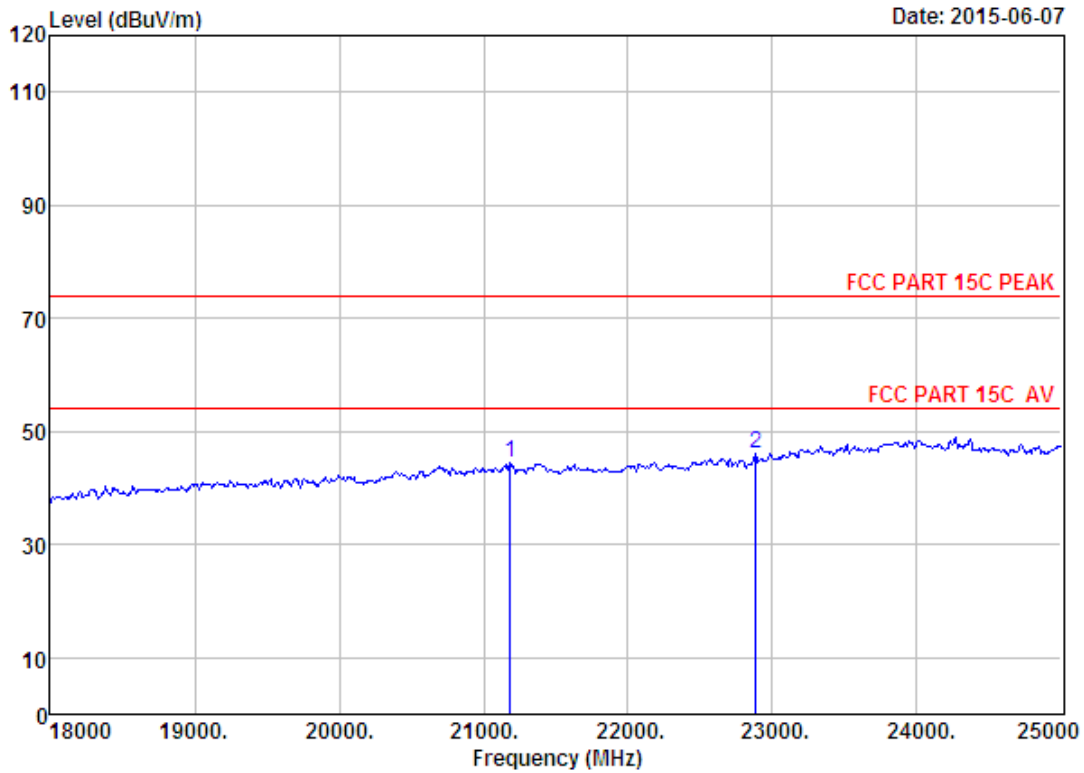

Site no. : 1# 966 chamber                      Data no. : 300  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH7 2442TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21185.00	46.18	20.21	35.64	13.64	44.39	74.00	29.61	Peak
2	22886.00	45.65	21.08	33.98	13.28	46.03	74.00	27.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

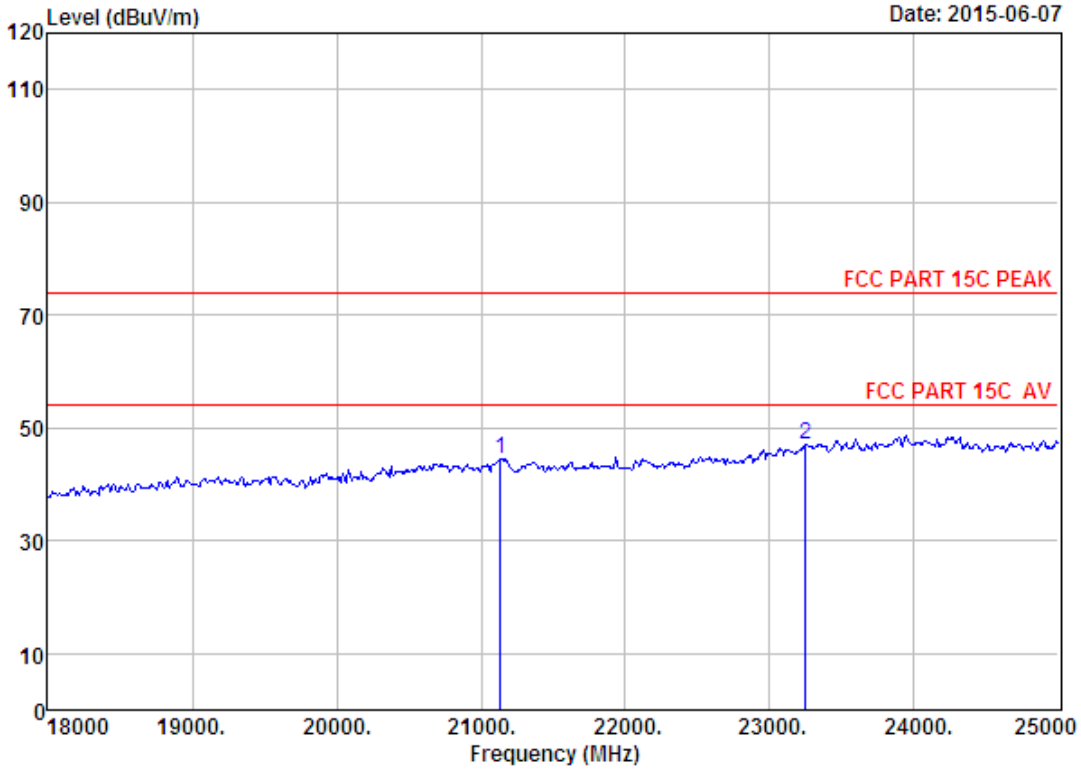

Site no. : 1# 966 chamber Data no. : 301  
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21136.00	46.21	20.19	35.69	13.76	44.47	74.00	29.53	Peak
2	23250.00	45.65	21.37	33.59	13.60	47.03	74.00	26.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

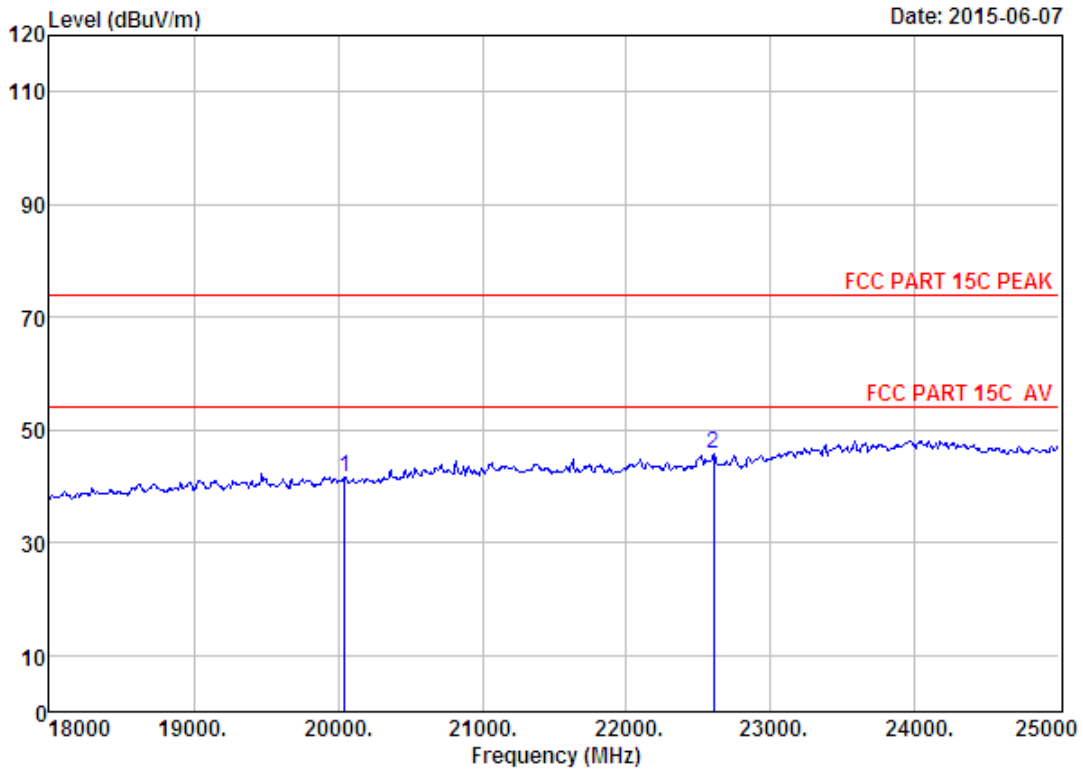

Site no. : 1# 966 chamber                      Data no. : 302  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	20044.00	46.09	19.70	36.66	12.62	41.75	74.00	32.25	Peak
2	22606.00	45.76	20.92	34.27	13.25	45.66	74.00	28.34	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

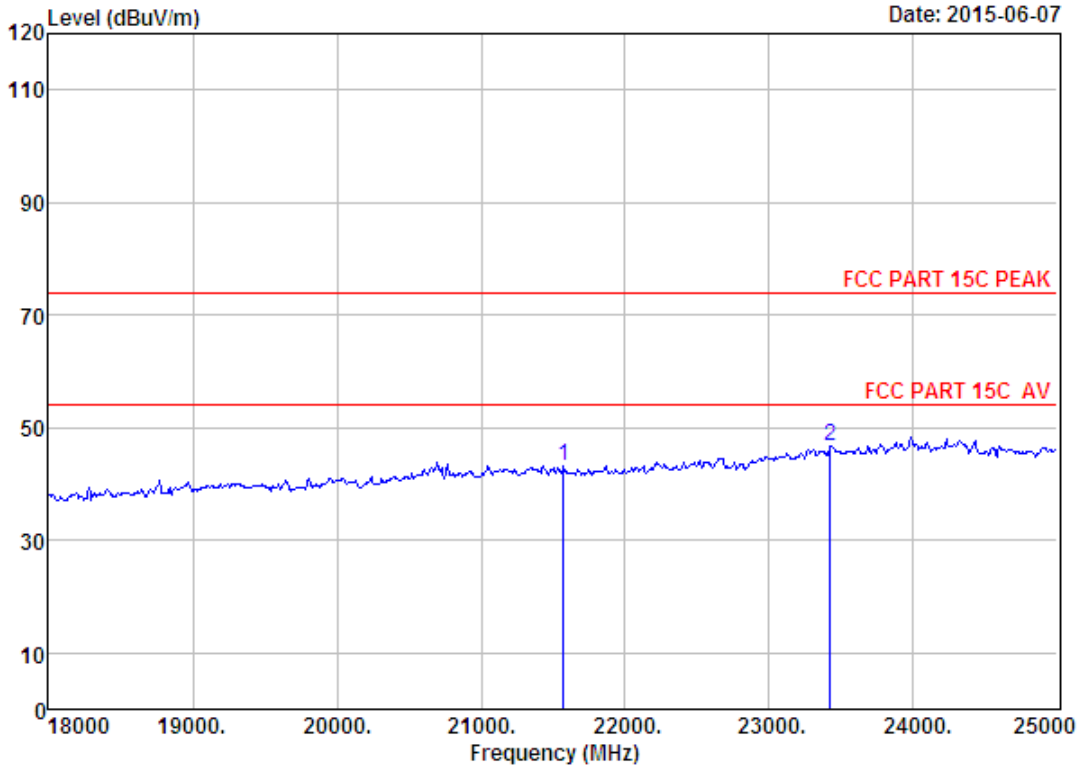

Site no. : 1# 966 chamber Data no. : 303  
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH1 2422TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	21570.00	45.96	20.38	35.28	12.15	43.21	74.00	30.79	Peak
2	23425.00	45.69	21.53	33.40	12.96	46.78	74.00	27.22	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

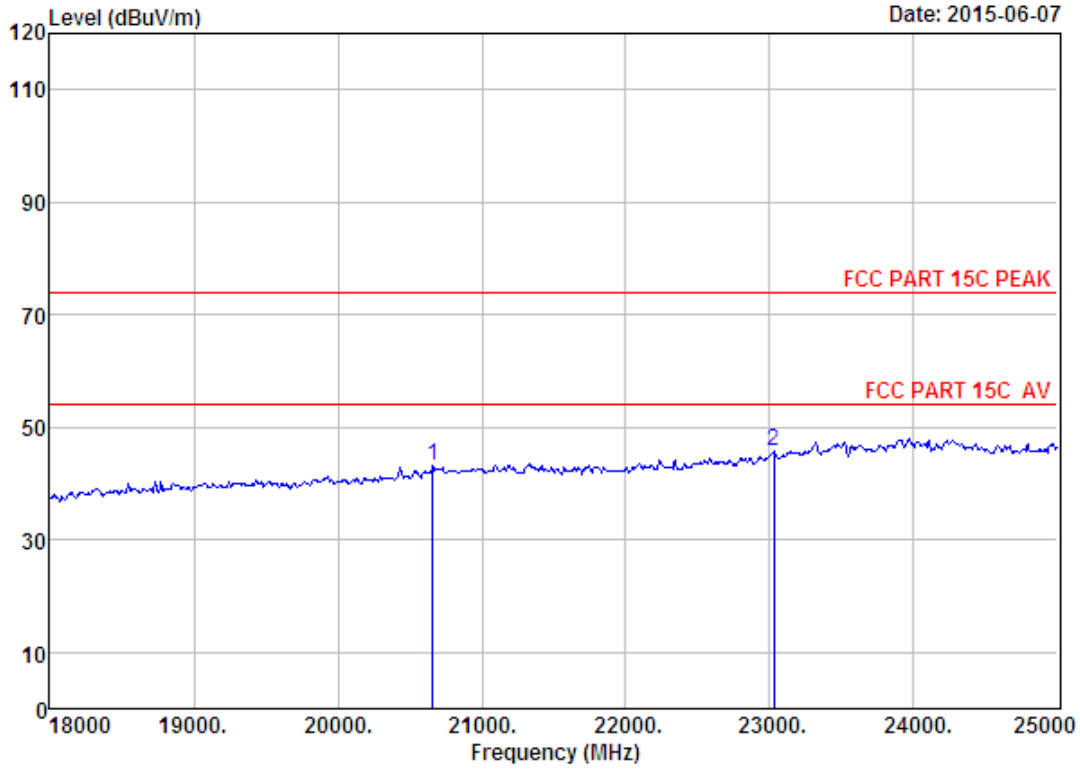

Site no. : 1# 966 chamber                      Data no. : 304  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH1 2422TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20660.00	46.10	19.98	36.12	13.23	43.19	74.00	30.81	Peak
2	23026.00	45.60	21.17	33.82	12.83	45.78	74.00	28.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

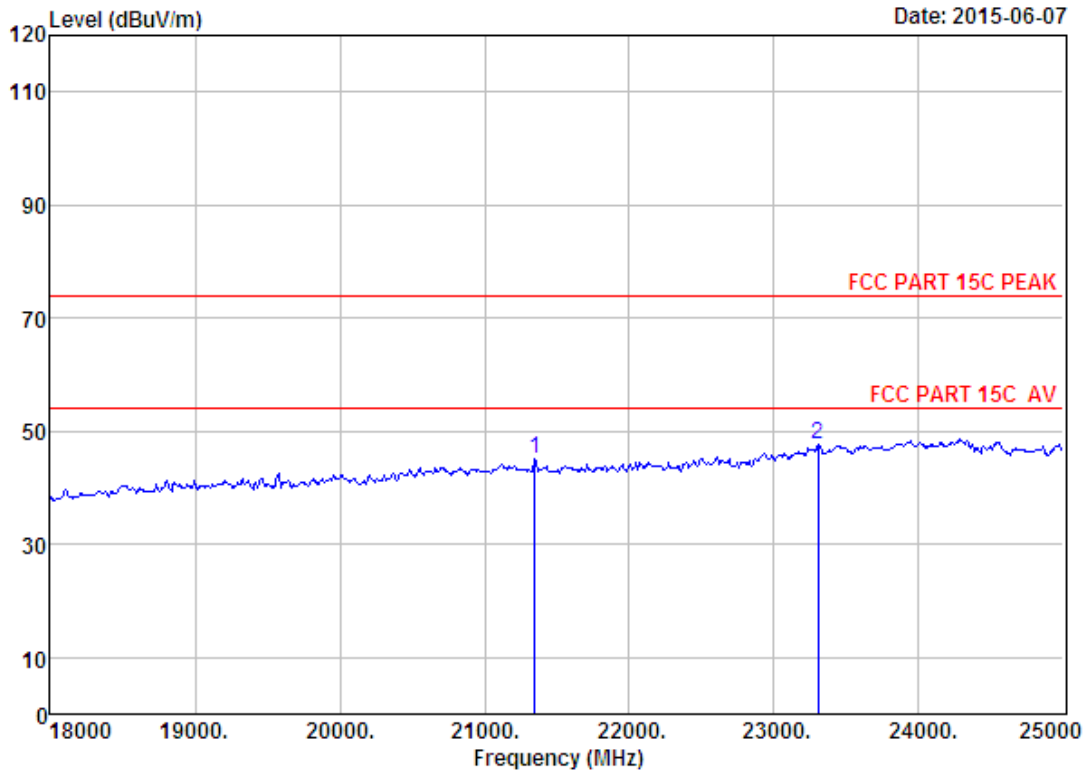


Date: 2015-06-07

Site no. : 1# 966 chamber                      Data no. : 305  
 Dis. / Ant. : 3m ANT ABOVE 18G              Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH5 2442TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21346.00	46.09	20.28	35.49	14.10	44.98	74.00	29.02	Peak
2	23306.00	45.66	21.43	33.53	14.01	47.57	74.00	26.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



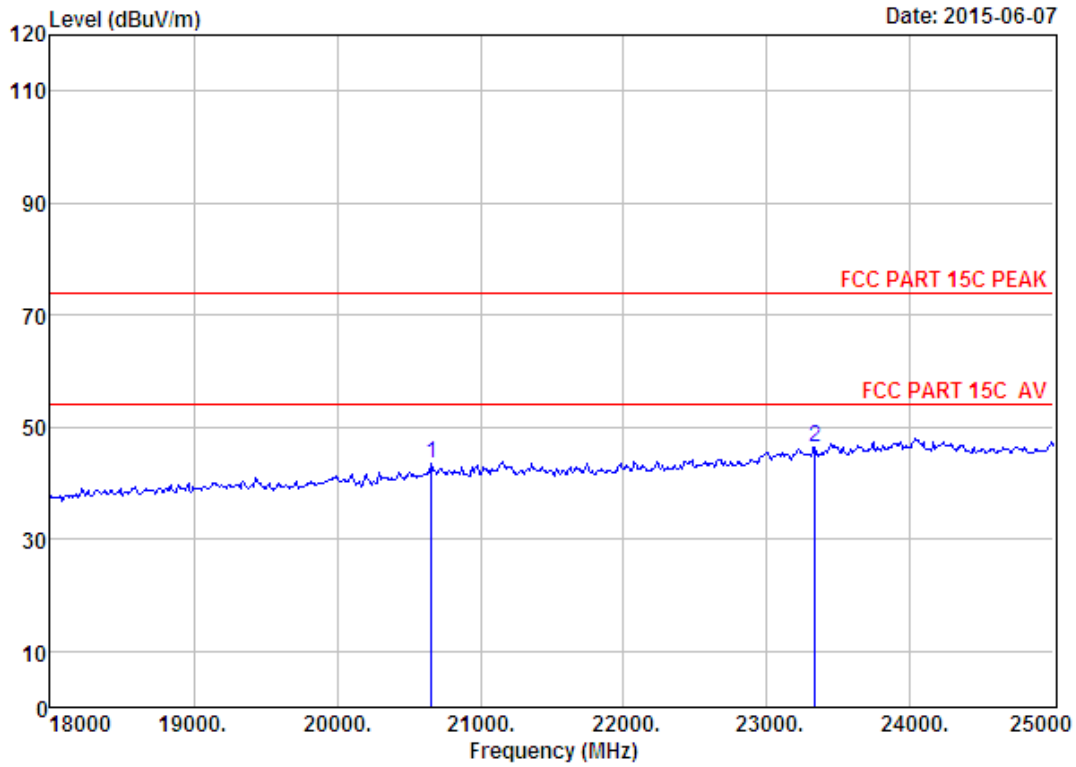


Site no. : 1# 966 chamber                      Data no. : 306  
 Dis. / Ant. : 3m ANT ABVOE 18G                Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH5 2442TX  
               Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20660.00	46.10	19.98	36.12	13.51	43.47	74.00	30.53	Peak
2	23334.00	45.67	21.45	33.51	12.71	46.32	74.00	27.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




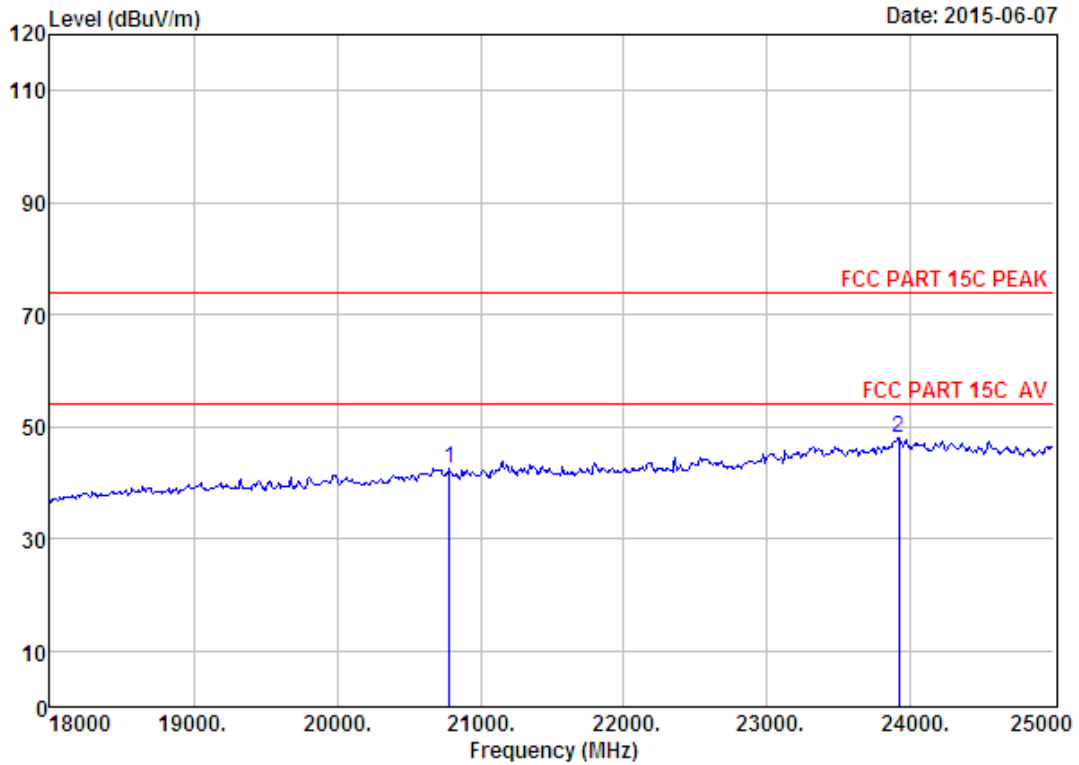

Site no. : 1# 966 chamber Data no. : 307  
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH9 2462TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20786.00	46.18	20.04	36.00	12.35	42.57	74.00	31.43	Peak
2	23915.00	45.62	21.97	32.88	13.38	48.09	74.00	25.91	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

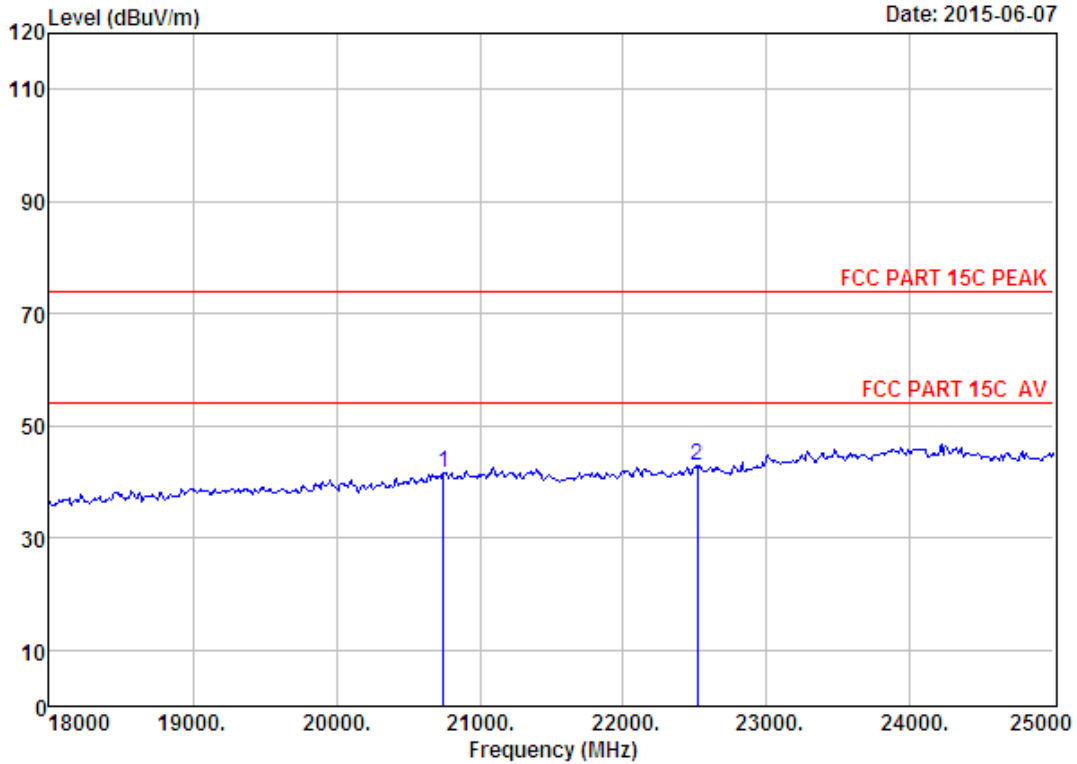

Site no. : 1# 966 chamber                      Data no. : 308  
 Dis. / Ant. : 3m ANT ABOVE 18G                  Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH9 2462TX  
                   Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20744.00	46.15	20.02	36.03	11.42	41.56	74.00	32.44	Peak
2	22515.00	45.80	20.87	34.35	10.67	42.99	74.00	31.01	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 5 BAND EDGE COMPLIANCE TEST

### 5.1 Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits

### 5.2 Test Procedure


1. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) Peak : RBW = 1MHz, VBW = 1MHz, Detector=PEAK detector, Sweep time = auto
  - (b) AV : RBW = 1MHz, VBW = 10Hz, Detector=PEAK detector, Sweep time = auto

### 5.3 Test Result

Pass (The testing data was attached in the next pages.)

- Note:
- 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
  - 2、 The frequency 2412MHz. 2422MHz . 2462MHz and 2472 MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


### 5.4 Test Data

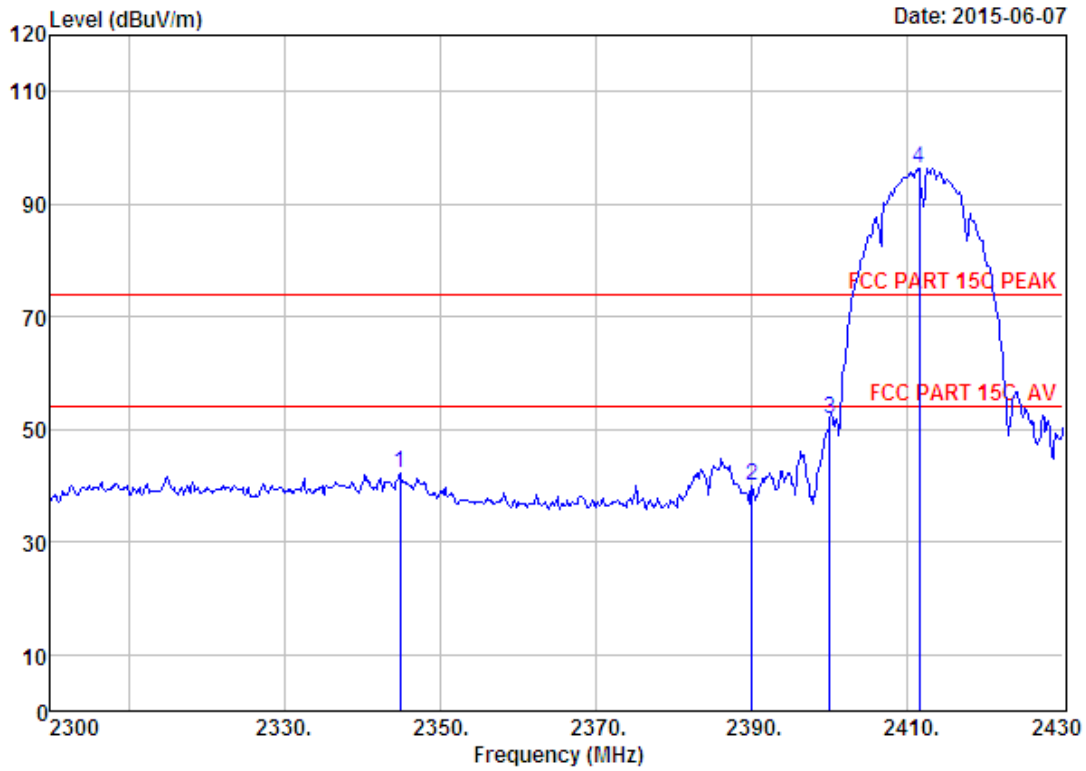

Site no. : 1# 966 chamber                      Data no. : 183  
 Dis. / Ant. : 3m ANI 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH1 2412TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2344.85	27.70	6.56	34.59	42.45	42.12	74.00	31.88	Peak
2	2390.00	27.64	6.62	34.62	40.21	39.85	74.00	34.15	Peak
3	2400.00	27.61	6.62	34.64	52.39	51.98	74.00	22.02	Peak
4	2411.54	27.60	6.64	34.64	96.78	96.38	74.00	-22.38	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

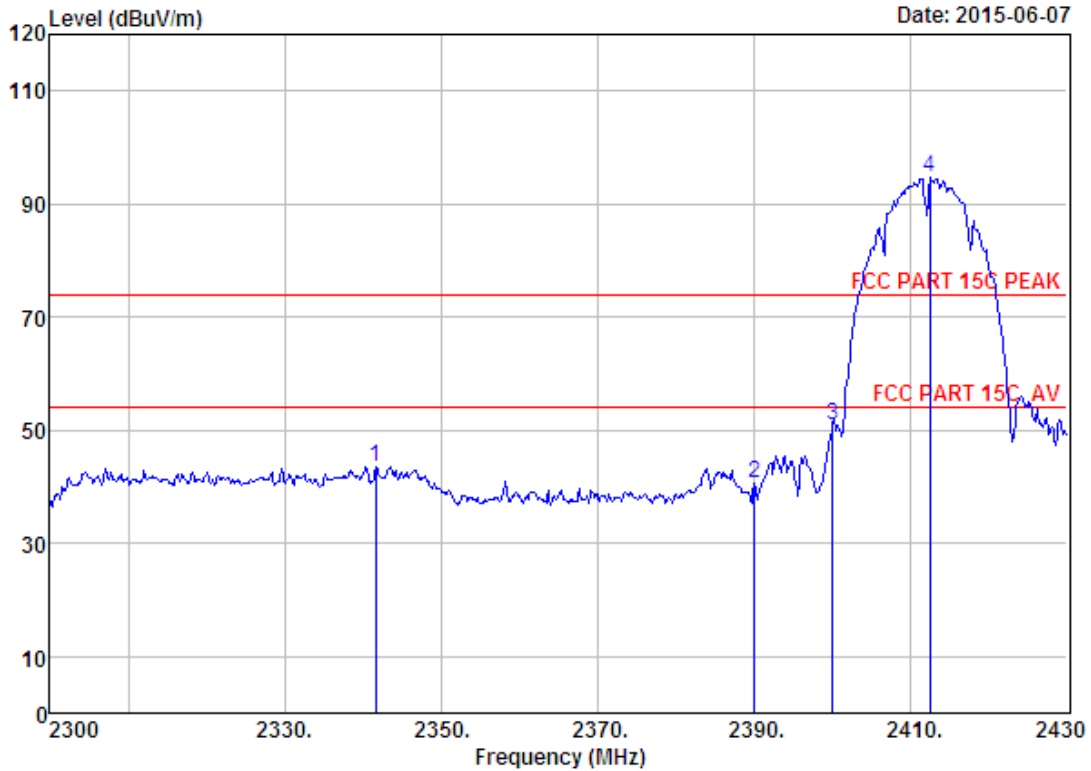

Site no. : 1# 966 chamber Data no. : 184  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH1 2412TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2341.60	27.70	6.56	34.59	44.01	43.68	74.00	30.32	Peak
2	2390.00	27.64	6.62	34.62	41.06	40.70	74.00	33.30	Peak
3	2400.00	27.61	6.62	34.64	51.42	51.01	74.00	22.99	Peak
4	2412.45	27.60	6.64	34.64	95.01	94.61	74.00	-20.61	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

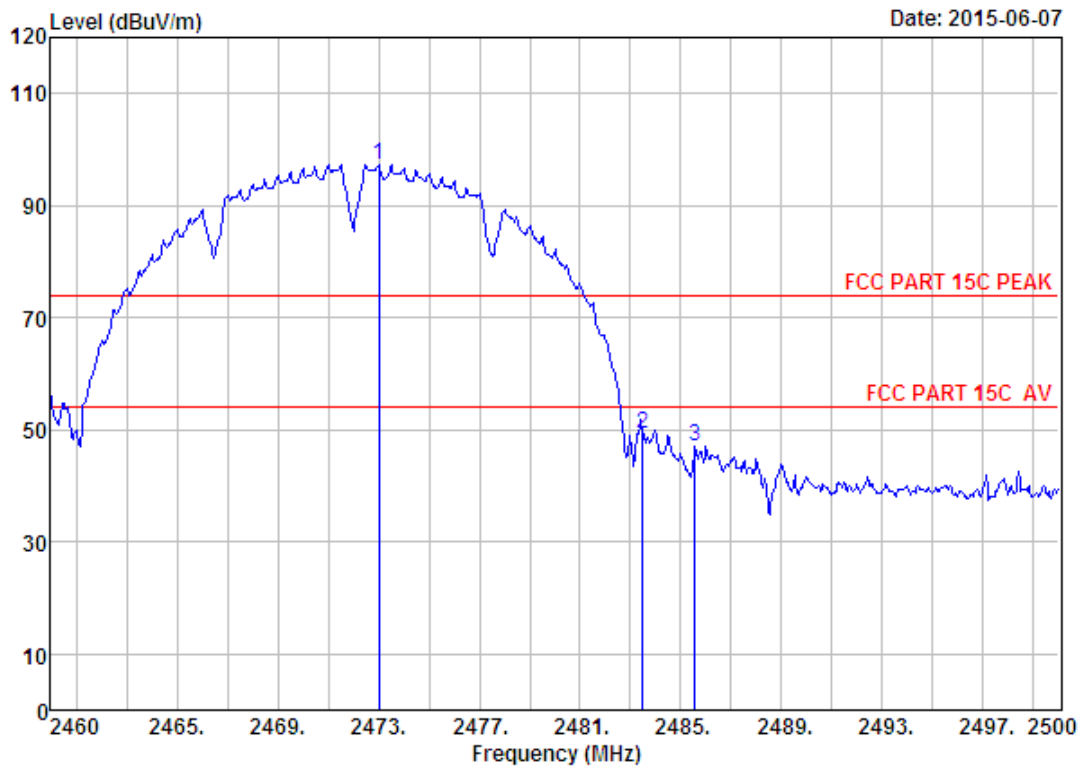

Site no. : 1# 966 chamber Data no. : 189  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH13 2472TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2473.00	27.58	6.71	35.11	98.16	97.34	74.00	-23.34	Peak
2	2483.50	27.58	6.71	35.11	49.97	49.15	74.00	24.85	Peak
3	2485.56	27.58	6.71	35.11	47.93	47.11	74.00	26.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

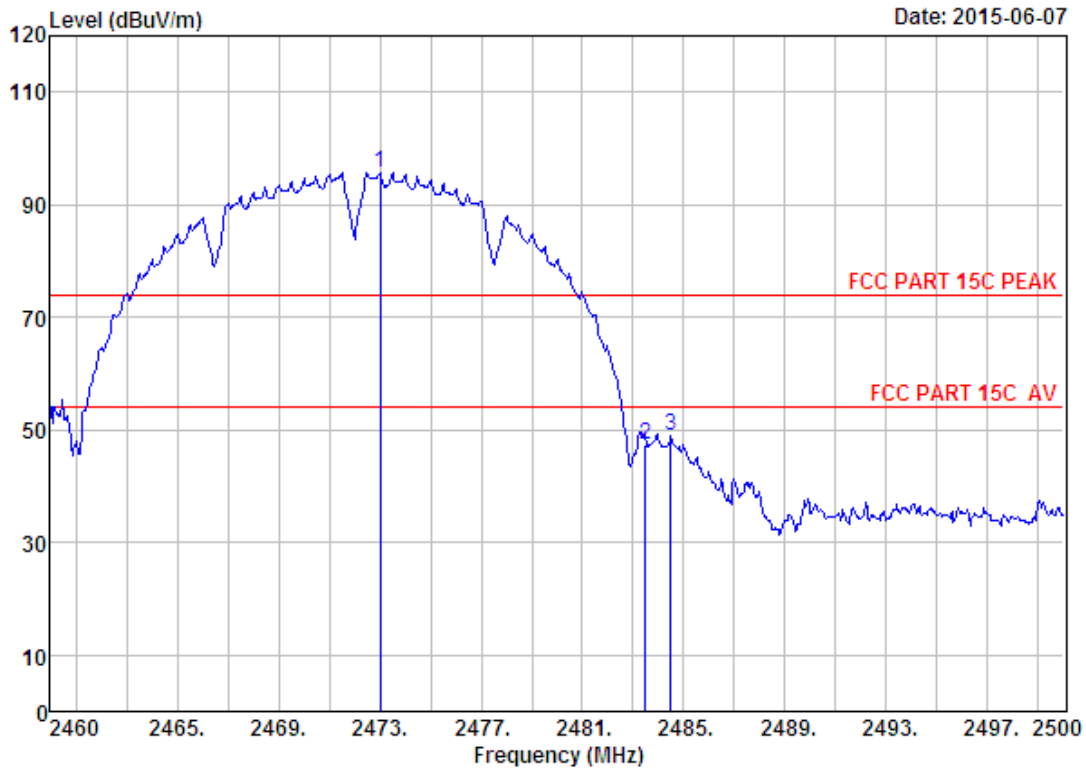

Site no. : 1# 966 chamber Data no. : 190  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH13 2472TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2473.00	27.58	6.71	35.11	96.66	95.84	74.00	-21.84	Peak
2	2483.50	27.58	6.71	35.11	48.08	47.26	74.00	26.74	Peak
3	2484.48	27.58	6.71	35.11	49.77	48.95	74.00	25.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

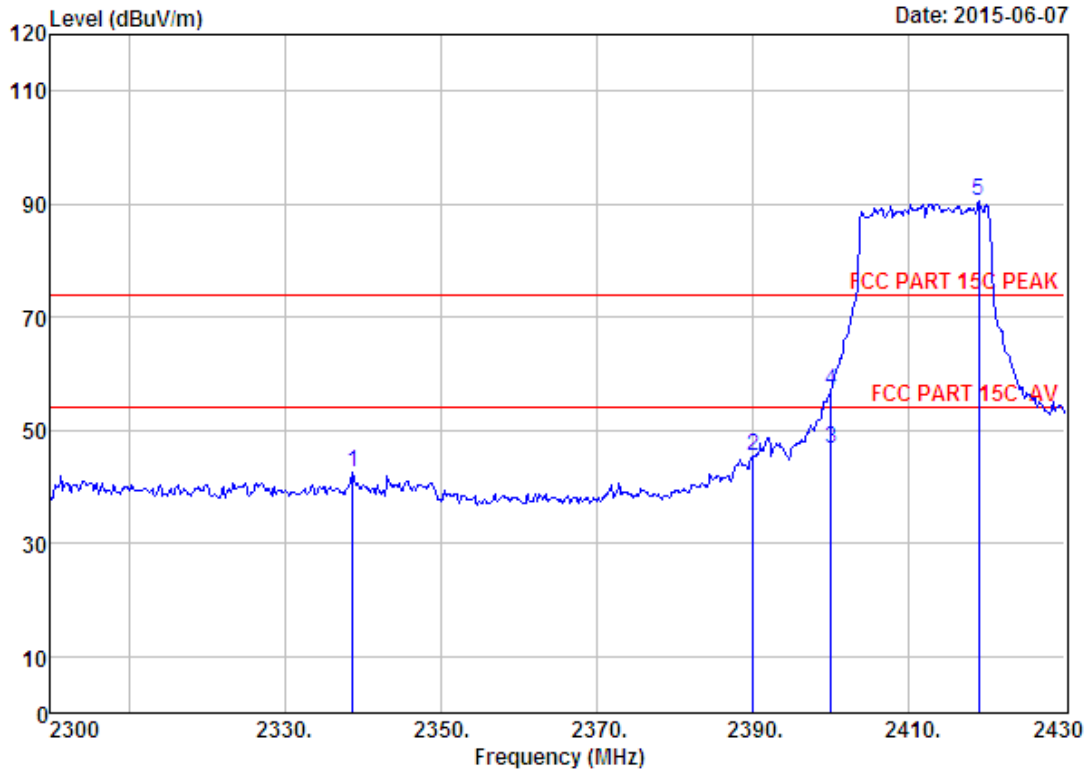


Site no. : 1# 966 chamber Data no. : 193  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2338.74	27.73	6.56	34.59	42.86	42.56	74.00	31.44	Peak
2	2390.00	27.64	6.62	34.62	45.84	45.48	74.00	28.52	Peak
3	2400.00	27.61	6.62	34.64	47.06	46.65	54.00	7.35	Average
4	2400.00	27.61	6.62	34.64	57.49	57.08	74.00	16.92	Peak
5	2418.95	27.60	6.64	34.74	91.21	90.71	74.00	-16.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




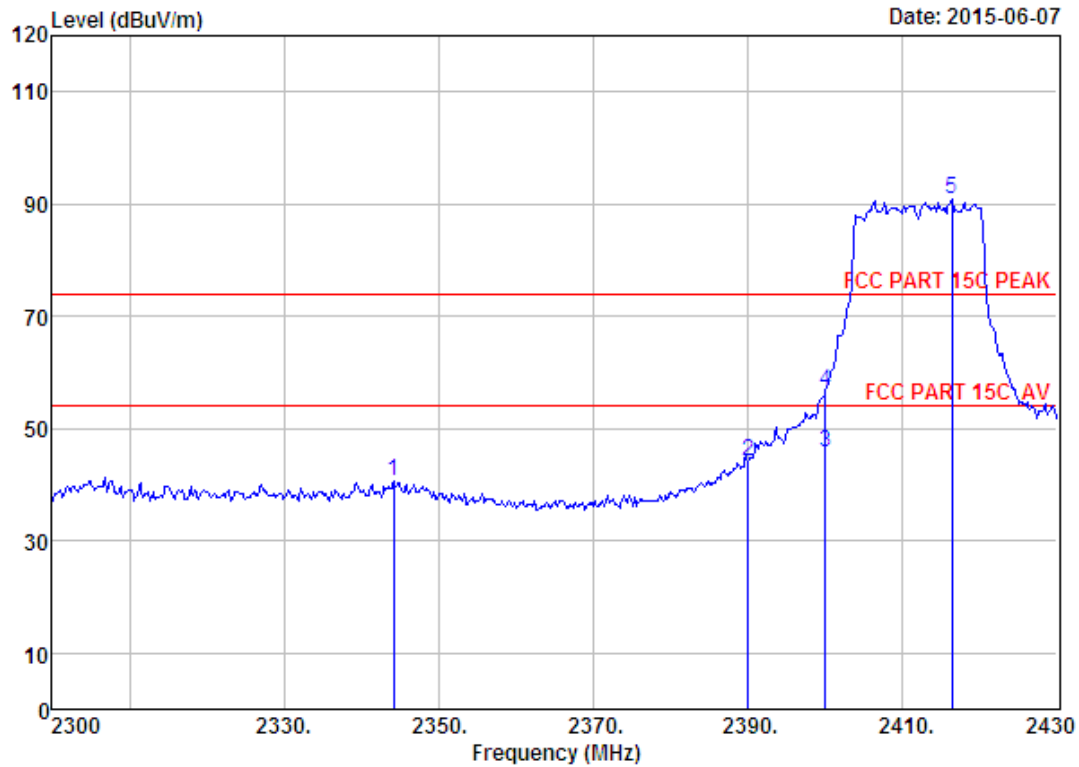

Site no. : 1# 966 chamber Data no. : 194  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limite (dBuV/m)	Margin (dB)	Remark
1	2344.20	27.70	6.56	34.59	41.07	40.74	74.00	33.26	Peak
2	2390.00	27.64	6.62	34.62	44.42	44.06	74.00	29.94	Peak
3	2400.00	27.61	6.62	34.64	46.32	45.91	54.00	8.09	Average
4	2400.00	27.61	6.62	34.64	56.94	56.53	74.00	17.47	Peak
5	2416.35	27.60	6.64	34.64	91.31	90.91	74.00	-16.91	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

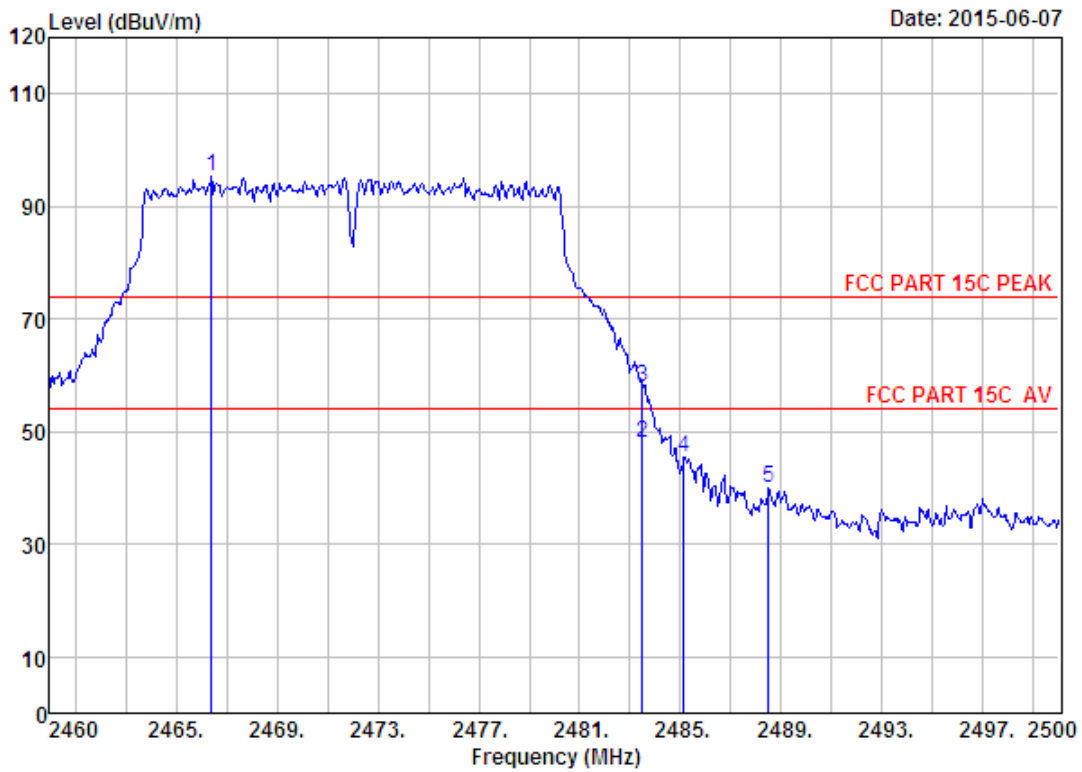

Site no. : 1# 966 chamber Data no. : 199  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH13 2472TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2466.40	27.58	6.69	34.98	96.06	95.35	74.00	-21.35	Peak
2	2483.50	27.58	6.71	35.11	48.69	47.87	54.00	6.13	Average
3	2483.50	27.58	6.71	35.11	58.87	58.05	74.00	15.95	Peak
4	2485.12	27.58	6.71	35.11	46.36	45.54	74.00	28.46	Peak
5	2488.48	27.58	6.73	35.11	40.89	40.09	74.00	33.91	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

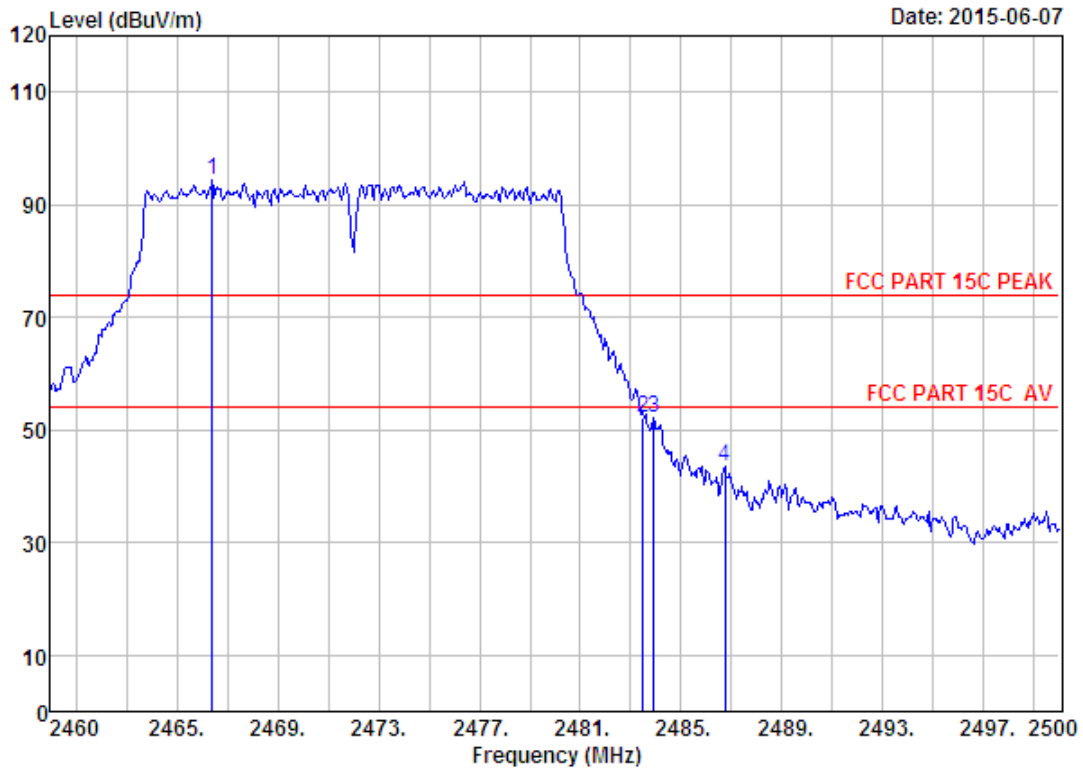

Site no. : 1# 966 chamber Data no. : 200  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH13 2472TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2466.40	27.58	6.69	34.98	94.98	94.27	74.00	-20.27	Peak
2	2483.50	27.58	6.71	35.11	53.11	52.29	74.00	21.71	Peak
3	2483.92	27.58	6.71	35.11	53.03	52.21	74.00	21.79	Peak
4	2486.72	27.58	6.71	35.11	44.46	43.64	74.00	30.36	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

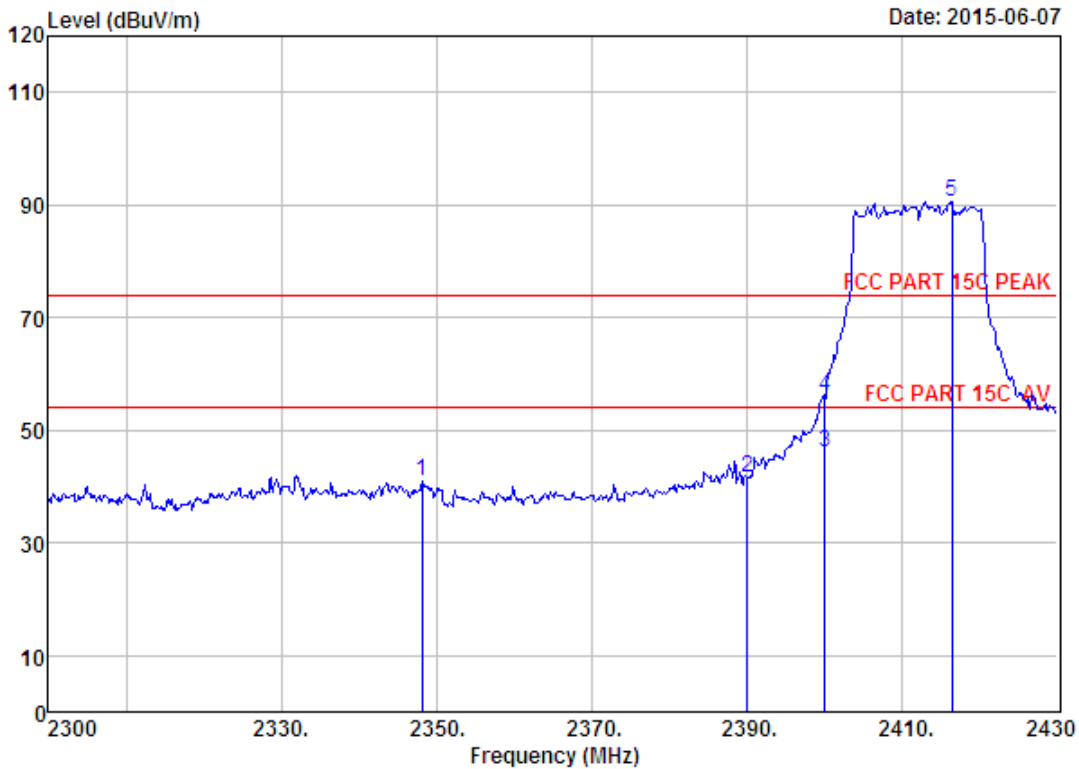

Site no. : 1# 966 chamber Data no. : 203  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2348.10	27.70	6.56	34.57	41.21	40.90	74.00	33.10	Peak
2	2390.00	27.64	6.62	34.62	42.08	41.72	74.00	32.28	Peak
3	2400.00	27.61	6.62	34.64	46.56	46.15	54.00	7.85	Average
4	2400.00	27.61	6.62	34.64	56.45	56.04	74.00	17.96	Peak
5	2416.35	27.60	6.64	34.64	90.95	90.55	74.00	-16.55	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

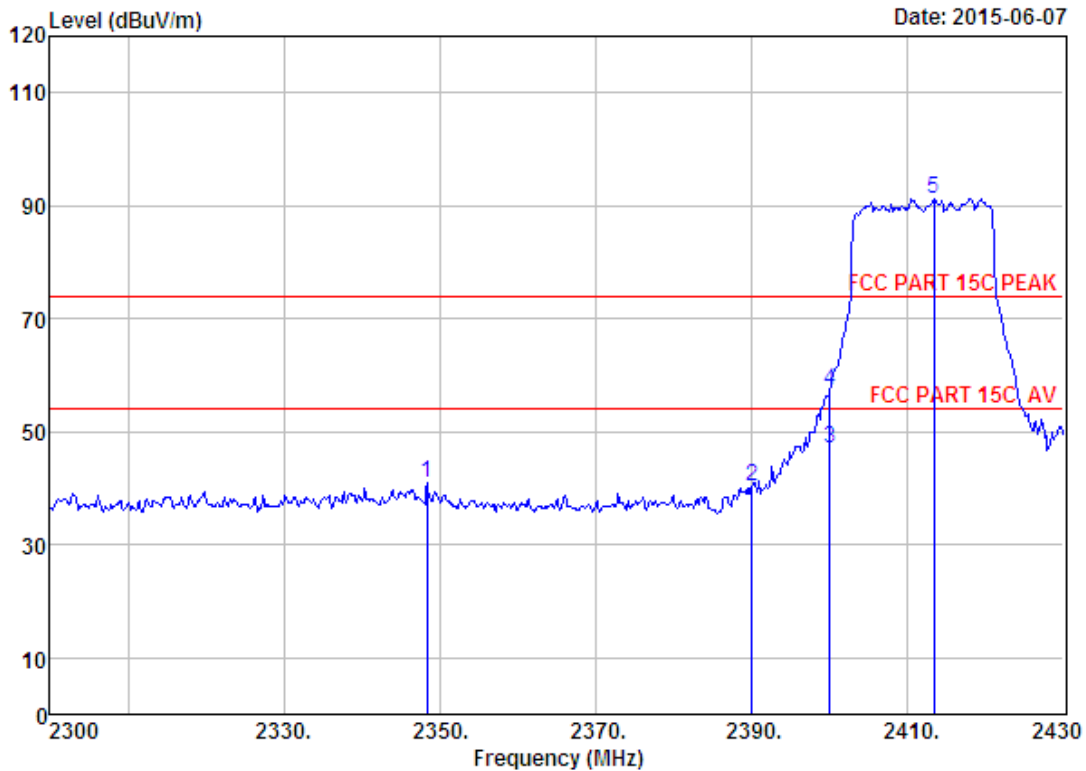

Site no. : 1# 966 chamber                      Data no. : 204  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6°;Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX  
                     Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2348.36	27.70	6.56	34.57	41.25	40.94	74.00	33.06	Peak
2	2390.00	27.64	6.62	34.62	40.81	40.45	74.00	33.55	Peak
3	2400.00	27.61	6.62	34.64	47.59	47.18	54.00	6.82	Average
4	2400.00	27.61	6.62	34.64	57.72	57.31	74.00	16.69	Peak
5	2413.36	27.60	6.64	34.64	91.74	91.34	74.00	-17.34	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

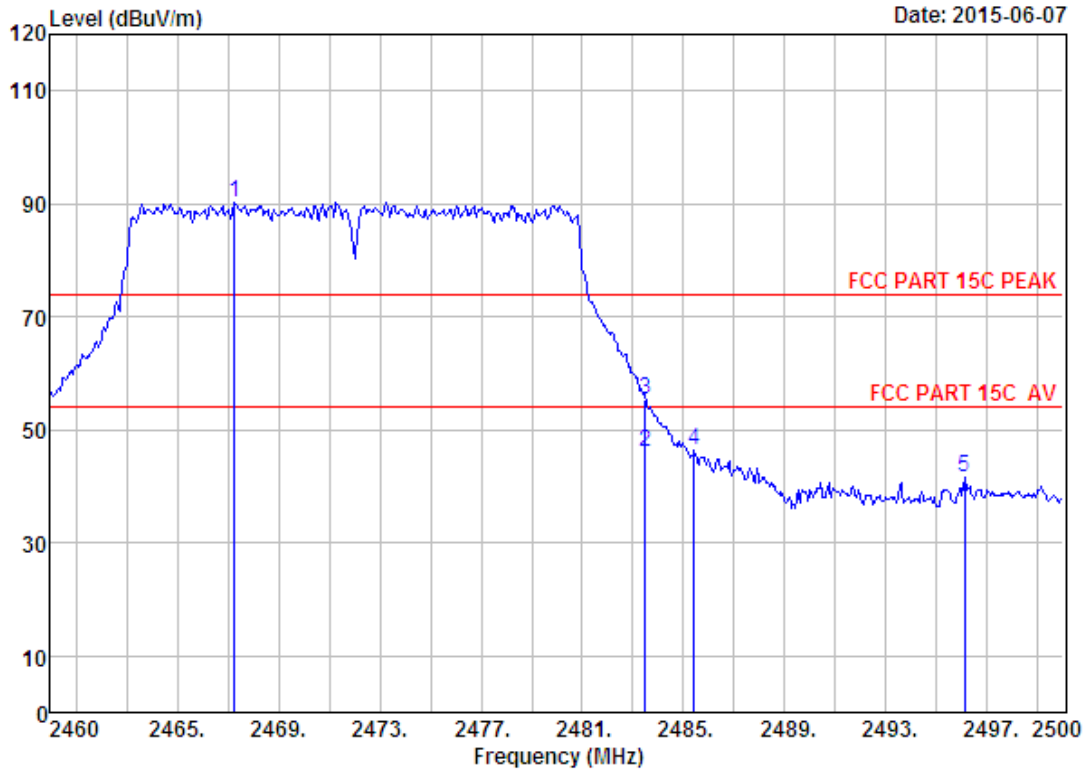

Site no. : 1# 966 chamber Data no. : 209  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2467.28	27.58	6.69	34.98	91.10	90.39	74.00	-16.39	Peak
2	2483.50	27.58	6.71	35.11	47.03	46.21	54.00	7.79	Average
3	2483.50	27.58	6.71	35.11	56.20	55.38	74.00	18.62	Peak
4	2485.40	27.58	6.71	35.11	47.12	46.30	74.00	27.70	Peak
5	2496.08	27.57	6.73	35.24	42.66	41.72	74.00	32.28	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

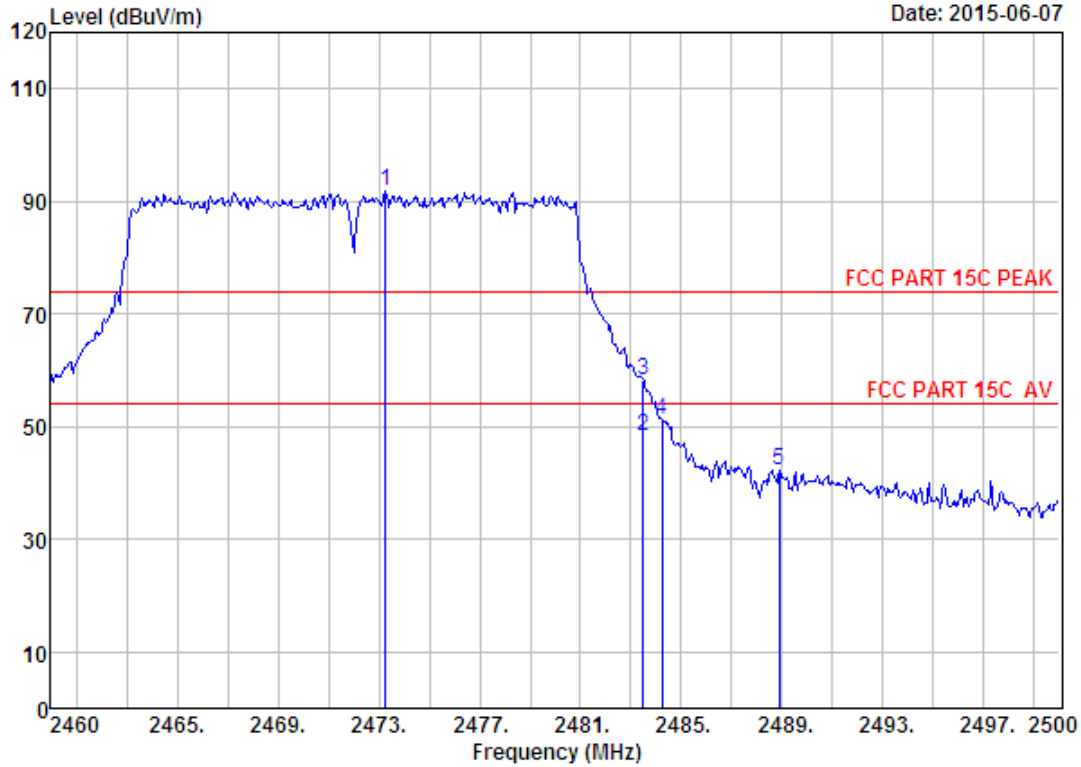

Site no. : 1# 966 chamber Data no. : 210  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2473.28	27.58	6.71	35.11	92.53	91.71	74.00	-17.71	Peak
2	2483.50	27.58	6.71	35.11	49.15	48.33	54.00	5.67	Average
3	2483.50	27.58	6.71	35.11	59.01	58.19	74.00	15.81	Peak
4	2484.24	27.58	6.71	35.11	52.13	51.31	74.00	22.69	Peak
5	2488.88	27.58	6.73	35.11	43.18	42.38	74.00	31.62	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

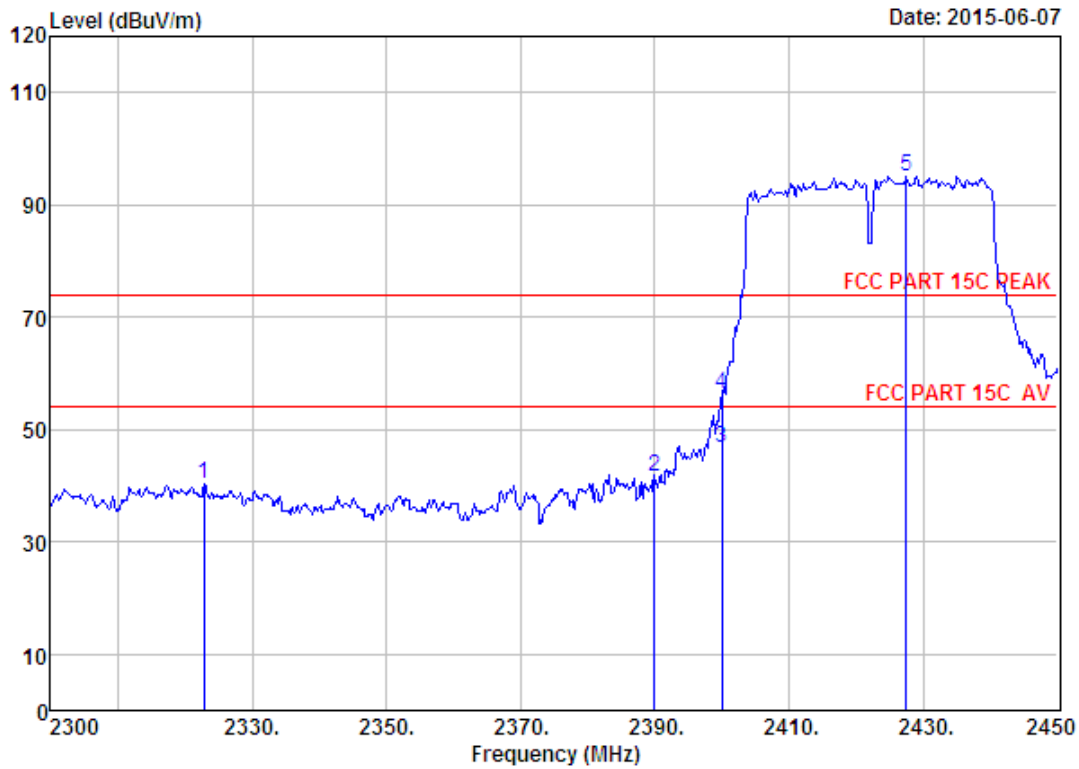


Site no. : 1# 966 chamber Data no. : 211  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH1 2422TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2322.80	27.73	6.54	34.60	40.57	40.24	74.00	33.76	Peak
2	2390.00	27.64	6.62	34.62	41.81	41.45	74.00	32.55	Peak
3	2400.00	27.61	6.62	34.64	47.06	46.65	54.00	7.35	Average
4	2400.00	27.61	6.62	34.64	56.82	56.41	74.00	17.59	Peak
5	2427.50	27.60	6.66	34.74	95.58	95.10	74.00	-21.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




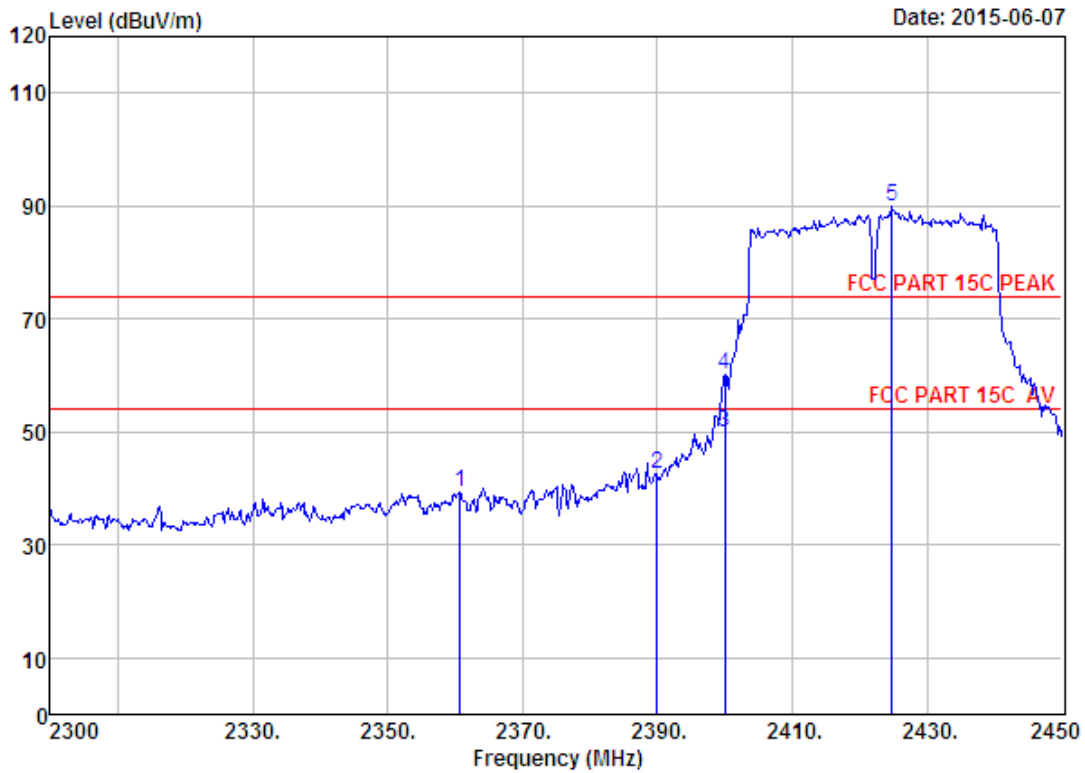

Site no. : 1# 966 chamber                      Data no. : 212  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH1 2422TX  
                   Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2360.75	27.67	6.58	34.57	39.81	39.49	74.00	34.51	Peak
2	2390.00	27.64	6.62	34.62	42.82	42.46	74.00	31.54	Peak
3	2400.00	27.61	6.62	34.64	50.19	49.78	54.00	4.22	Average
4	2400.00	27.61	6.62	34.64	60.65	60.24	74.00	13.76	Peak
5	2424.80	27.60	6.66	34.74	90.35	89.87	74.00	-15.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

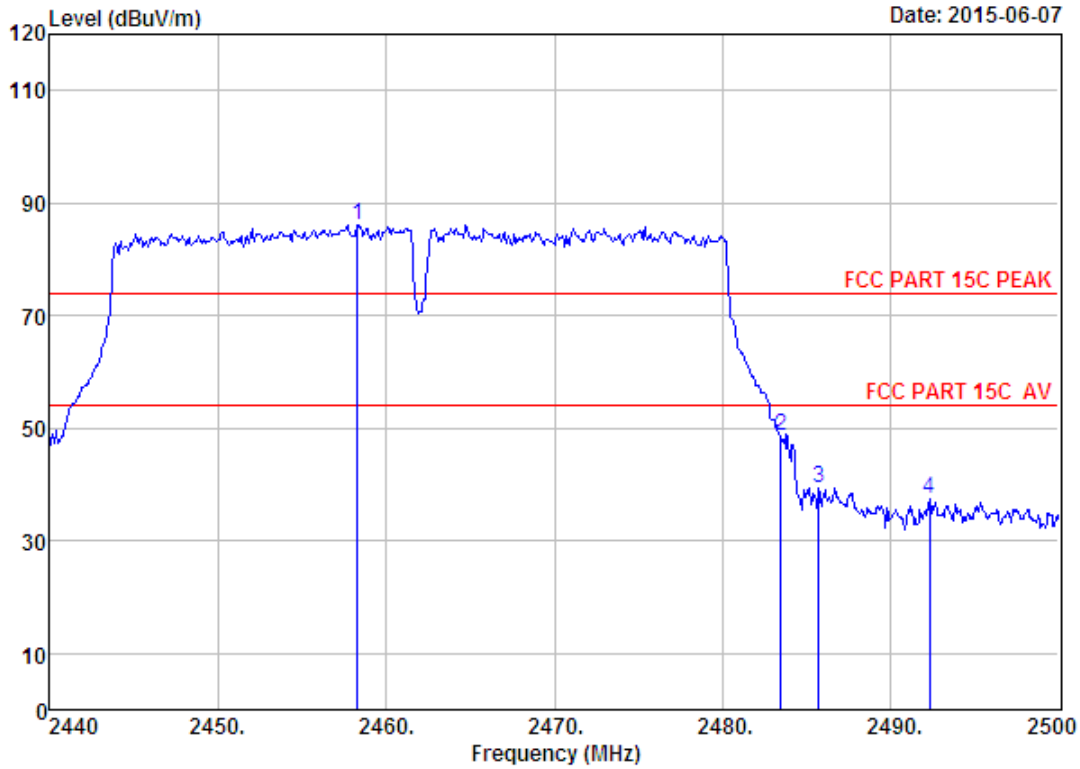


Site no. : 1# 966 chamber  
 Dis. / Ant. : 3m ANT 1-18G  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH9 2462TX  
 Antenna a

Data no. : 217  
 Ant. pol. : HORIZONTAL

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2458.30	27.59	6.69	34.98	86.90	86.20	74.00	-12.20	Peak
2	2483.50	27.58	6.71	35.11	49.43	48.61	74.00	25.39	Peak
3	2485.72	27.58	6.71	35.11	40.25	39.43	74.00	34.57	Peak
4	2492.32	27.58	6.73	35.24	38.42	37.49	74.00	36.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

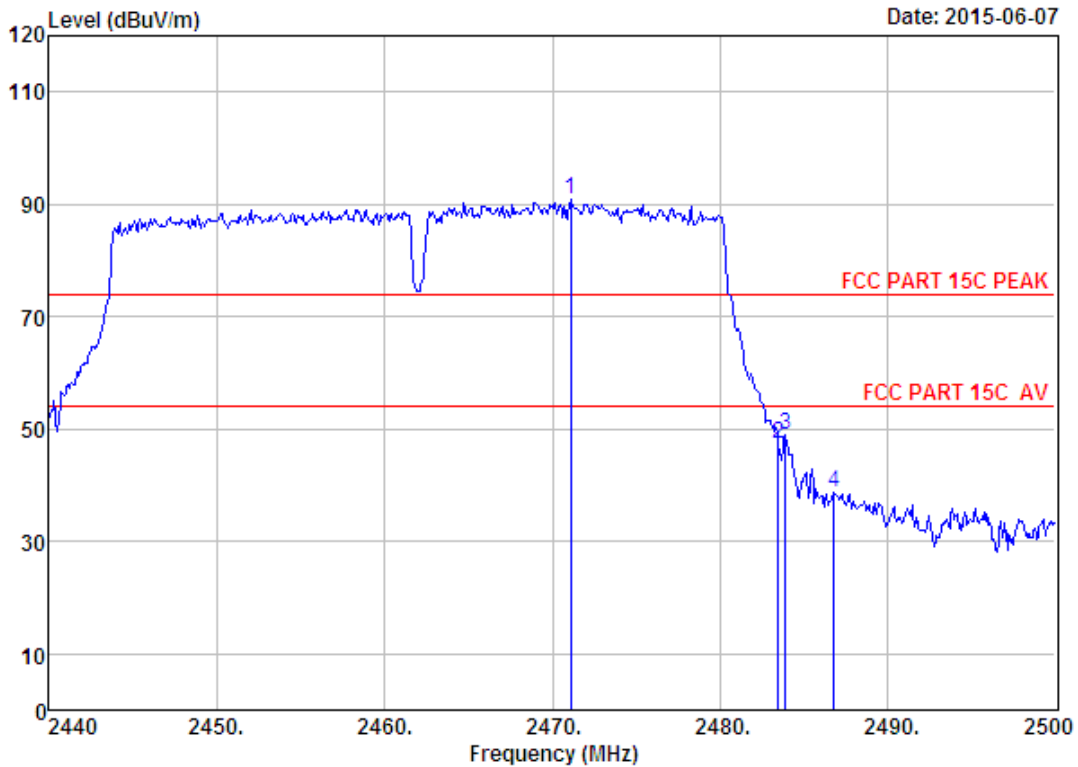

Site no. : 1# 966 chamber Data no. : 218  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH9 2462TX  
 Antenna a

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2471.08	27.58	6.71	35.11	91.66	90.84	74.00	-16.84	Peak
2	2483.50	27.58	6.71	35.11	48.04	47.22	74.00	26.78	Peak
3	2483.92	27.58	6.71	35.11	49.85	49.03	74.00	24.97	Peak
4	2486.80	27.58	6.71	35.11	39.62	38.80	74.00	35.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

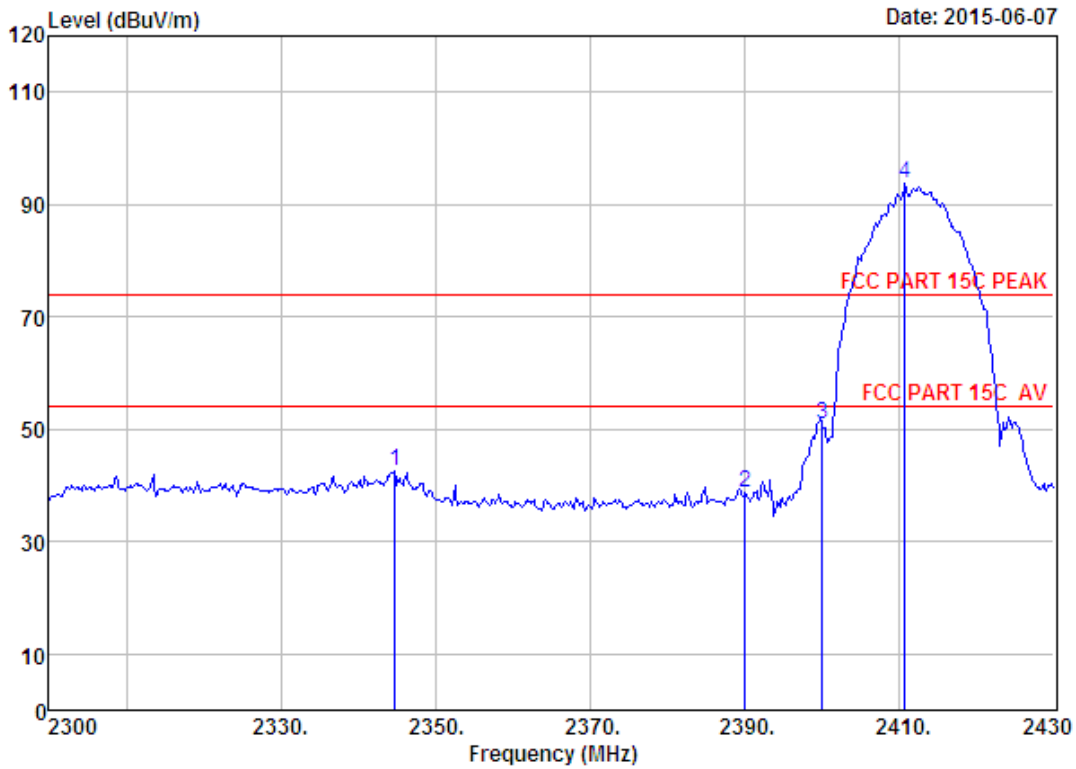

Site no. : 1# 966 chamber  
 Dis. / Ant. : 3m ANT 1-18G  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH1 2412TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2344.70	27.70	6.56	34.59	42.74	42.41	74.00	31.59	Peak
2	2390.00	27.64	6.62	34.62	39.10	38.74	74.00	35.26	Peak
3	2400.00	27.61	6.62	34.64	51.20	50.79	74.00	23.21	Peak
4	2410.70	27.60	6.64	34.64	94.19	93.79	74.00	-19.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

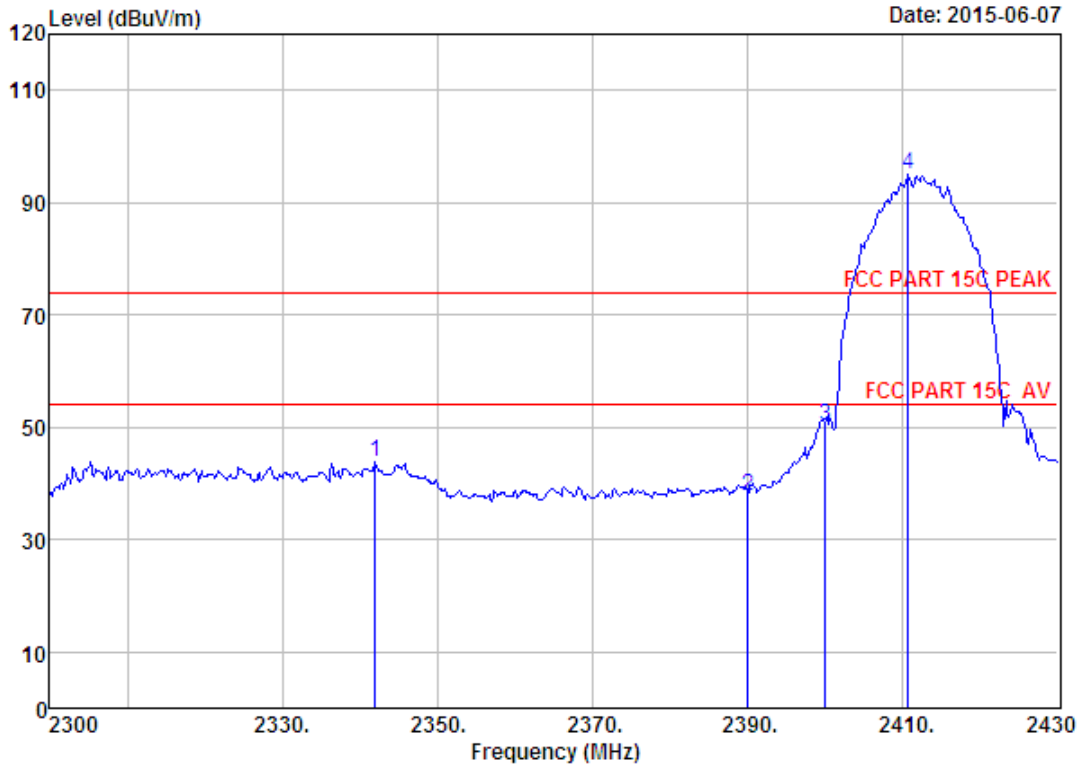


Site no. : 1# 966 chamber Data no. : 222  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH1 2412TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2342.00	27.70	6.56	34.59	44.19	43.86	74.00	30.14	Peak
2	2390.00	27.64	6.62	34.62	38.18	37.82	74.00	36.18	Peak
3	2400.00	27.61	6.62	34.64	50.80	50.39	74.00	23.61	Peak
4	2410.70	27.60	6.64	34.64	95.52	95.12	74.00	-21.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




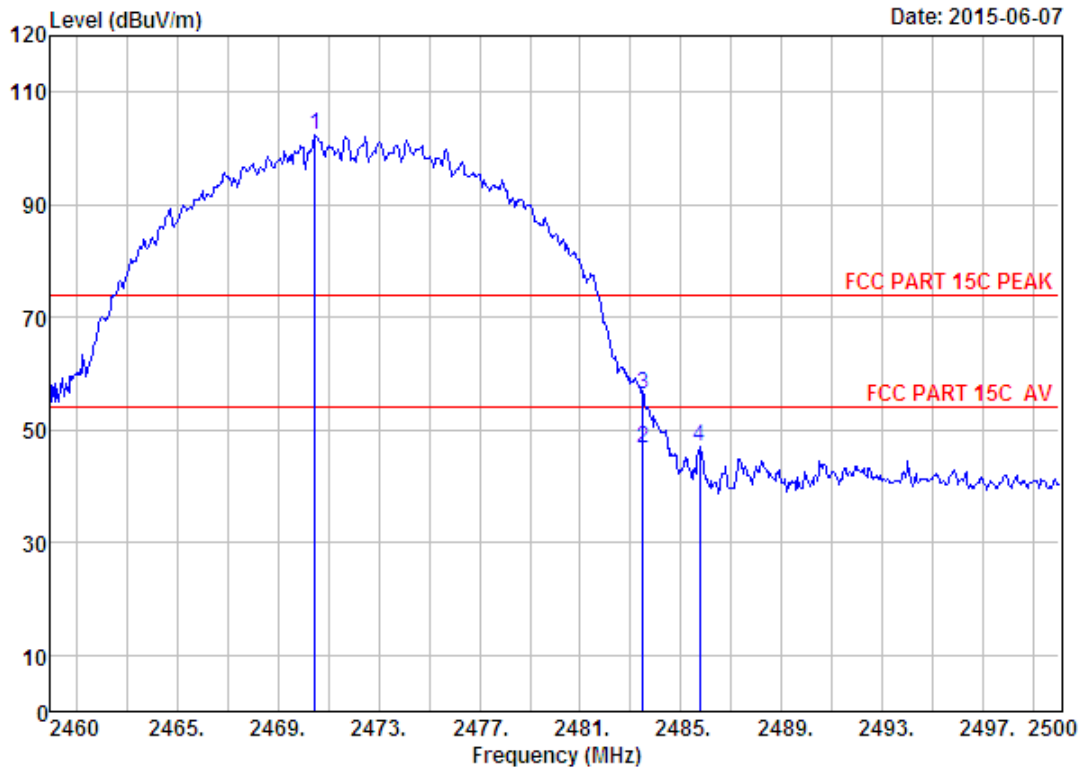

Site no. : 1# 966 chamber Data no. : 228  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11b CH13 2472TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2470.48	27.58	6.69	34.98	103.08	102.37	74.00	-28.37	Peak
2	2483.50	27.58	6.71	35.11	47.63	46.81	54.00	7.19	Average
3	2483.50	27.58	6.71	35.11	57.19	56.37	74.00	17.63	Peak
4	2485.72	27.58	6.71	35.11	47.96	47.14	74.00	26.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

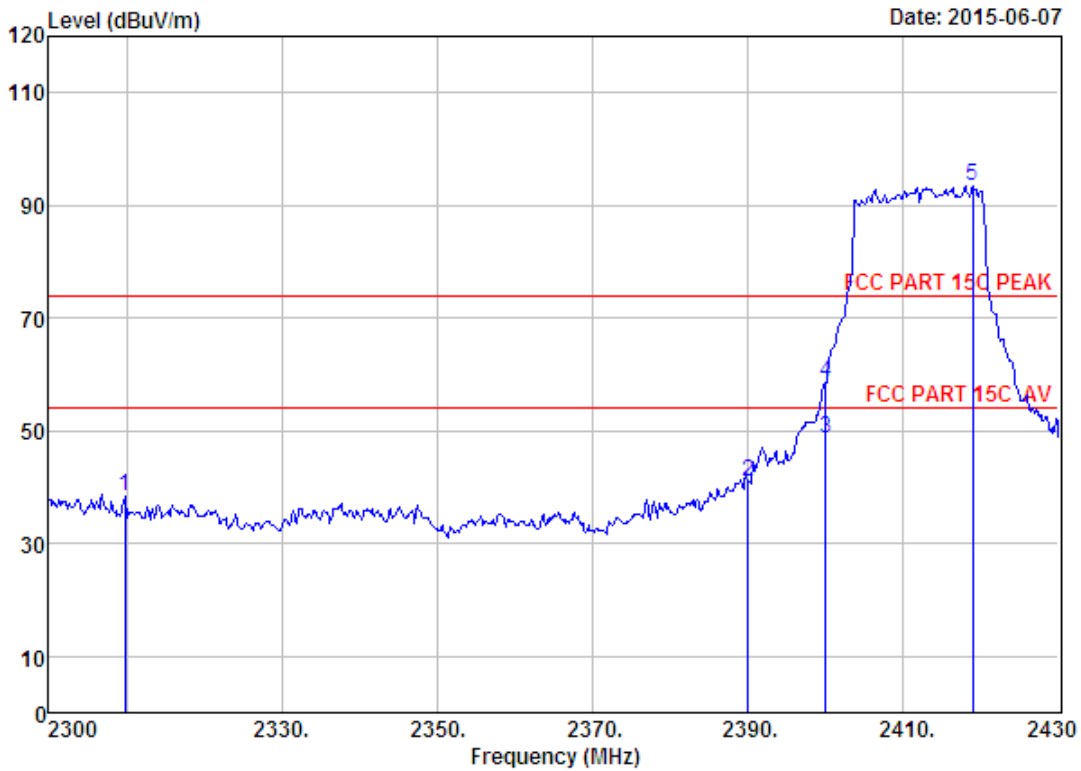


Site no. : 1# 966 chamber                      Data no. : 231  
 Dis. / Ant. : 3m ANT 1-18G                      Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
                     Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2309.75	27.76	6.53	34.60	38.60	38.29	74.00	35.71	Peak
2	2390.00	27.64	6.62	34.62	41.42	41.06	74.00	32.94	Peak
3	2400.00	27.61	6.62	34.64	49.11	48.70	54.00	5.30	Average
4	2400.00	27.61	6.62	34.64	59.09	58.68	74.00	15.32	Peak
5	2418.95	27.60	6.64	34.74	93.85	93.35	74.00	-19.35	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




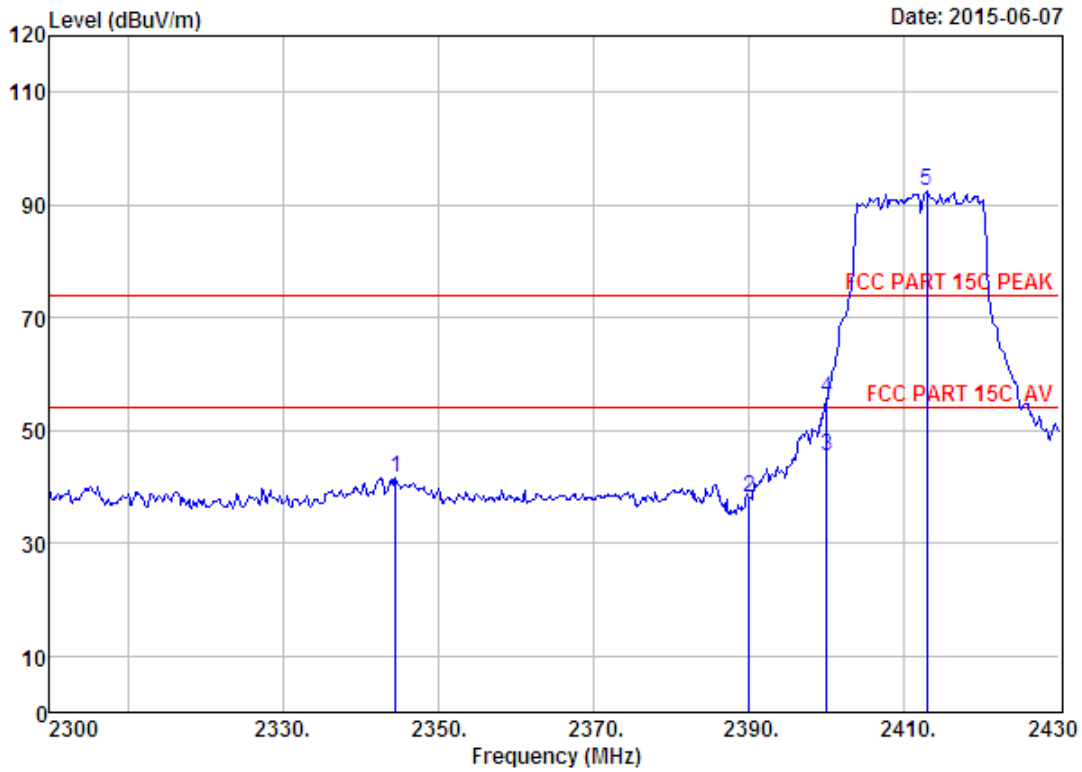

Site no. : 1# 966 chamber Data no. : 232  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH1 2412TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2344.46	27.70	6.56	34.59	41.78	41.45	74.00	32.55	Peak
2	2390.00	27.64	6.62	34.62	38.38	38.02	74.00	35.98	Peak
3	2400.00	27.61	6.62	34.64	46.01	45.60	54.00	8.40	Average
4	2400.00	27.61	6.62	34.64	56.07	55.66	74.00	18.34	Peak
5	2412.84	27.60	6.64	34.64	92.91	92.51	74.00	-18.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

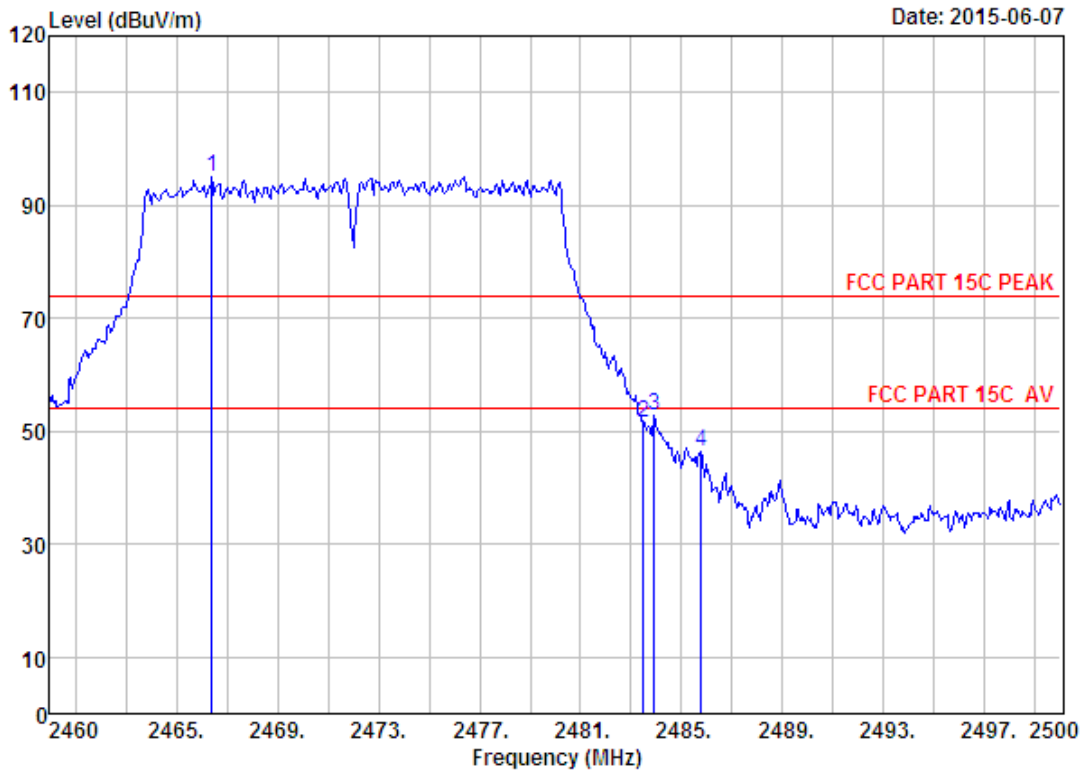

Site no. : 1# 966 chamber Data no. : 237  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH13 2472TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2466.40	27.58	6.69	34.98	95.86	95.15	74.00	-21.15	Peak
2	2483.50	27.58	6.71	35.11	52.40	51.58	74.00	22.42	Peak
3	2483.92	27.58	6.71	35.11	53.65	52.83	74.00	21.17	Peak
4	2485.76	27.58	6.71	35.11	47.11	46.29	74.00	27.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

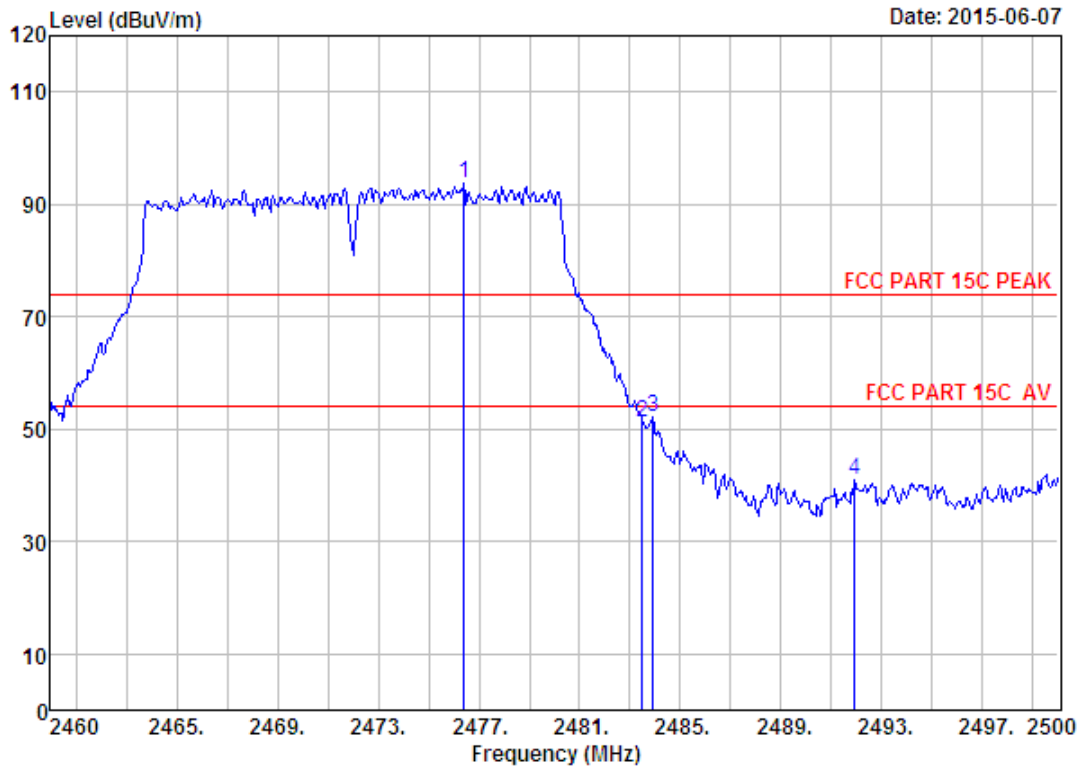


Site no. : 1# 966 chamber Data no. : 238  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11g CH13 2472TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2476.40	27.58	6.71	35.11	94.60	93.78	74.00	-19.78	Peak
2	2483.50	27.58	6.71	35.11	51.96	51.14	74.00	22.86	Peak
3	2483.92	27.58	6.71	35.11	52.86	52.04	74.00	21.96	Peak
4	2491.92	27.58	6.73	35.24	41.84	40.91	74.00	33.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




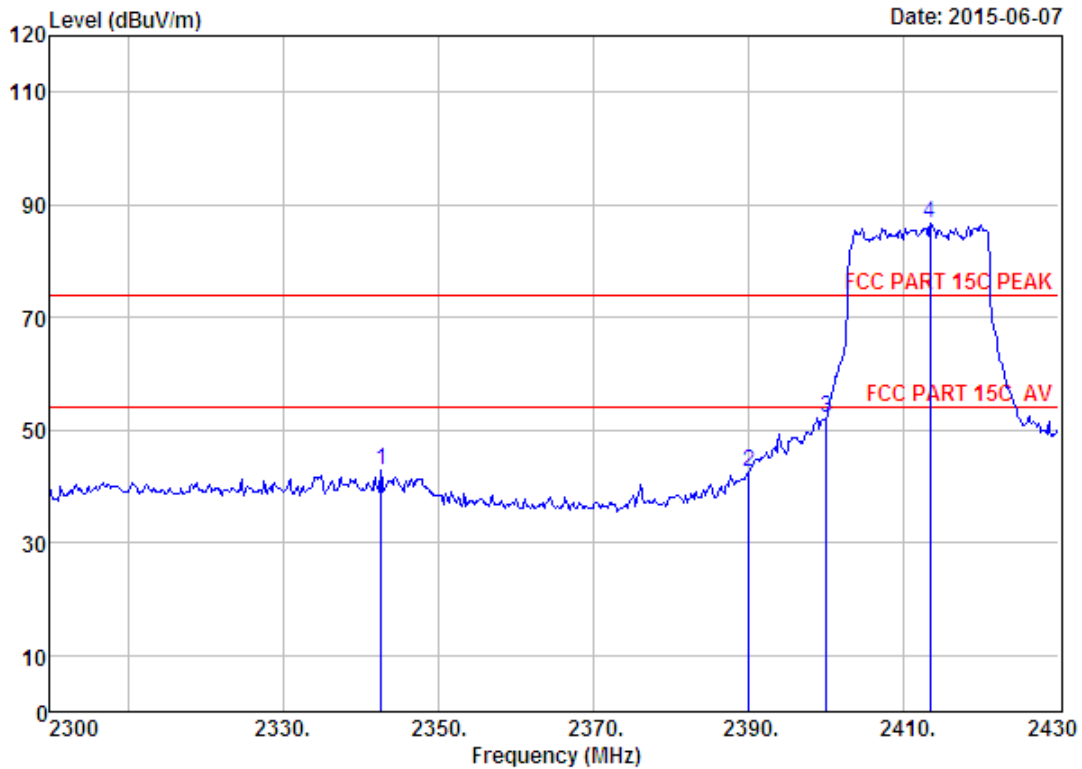

Site no. : 1# 966 chamber Data no. : 242  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH1 2412TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2342.64	27.70	6.56	34.59	43.36	43.03	74.00	30.97	Peak
2	2390.00	27.64	6.62	34.62	42.92	42.56	74.00	31.44	Peak
3	2400.00	27.61	6.62	34.64	52.61	52.20	74.00	21.80	Peak
4	2413.36	27.60	6.64	34.64	87.07	86.67	74.00	-12.67	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

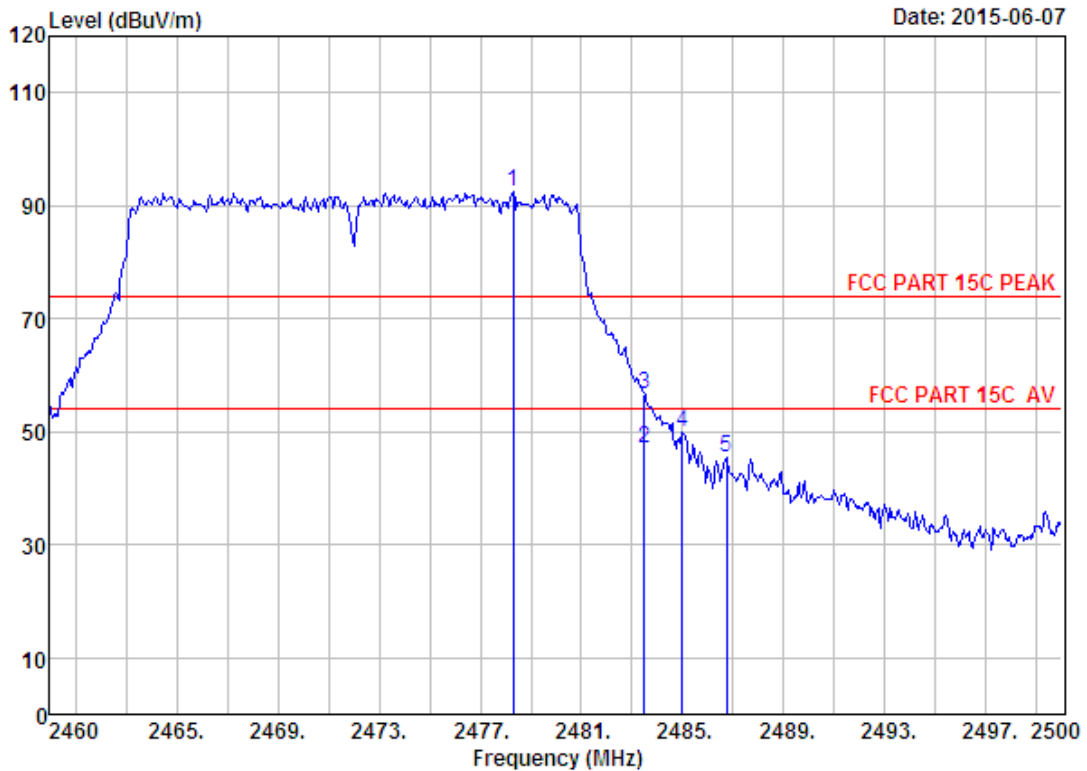

Site no. : 1# 966 chamber Data no. : 247  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2478.32	27.58	6.71	35.11	93.17	92.35	74.00	-18.35	Peak
2	2483.50	27.58	6.71	35.11	47.88	47.06	54.00	6.94	Average
3	2483.50	27.58	6.71	35.11	57.52	56.70	74.00	17.30	Peak
4	2485.00	27.58	6.71	35.11	50.76	49.94	74.00	24.06	Peak
5	2486.72	27.58	6.71	35.11	46.33	45.51	74.00	28.49	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

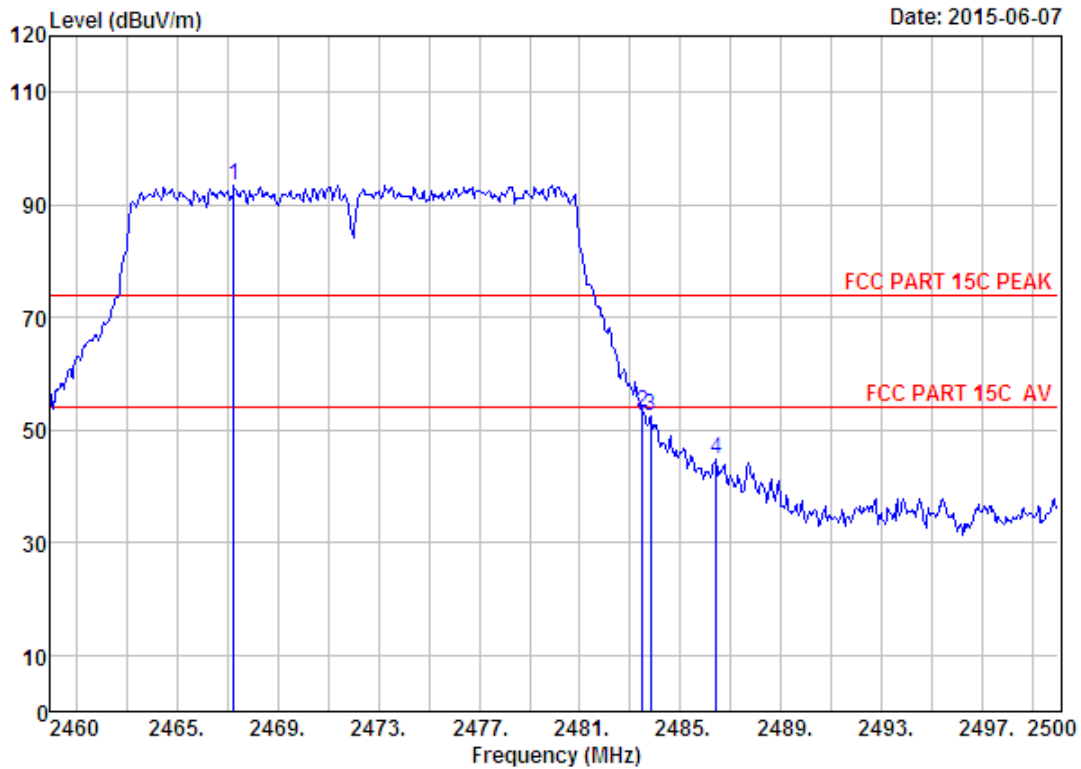

Site no. : 1# 966 chamber Data no. : 248  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT20 CH13 2472TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2467.28	27.58	6.69	34.98	94.08	93.37	74.00	-19.37	Peak
2	2483.50	27.58	6.71	35.11	53.81	52.99	74.00	21.01	Peak
3	2483.80	27.58	6.71	35.11	53.17	52.35	74.00	21.65	Peak
4	2486.40	27.58	6.71	35.11	45.46	44.64	74.00	29.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

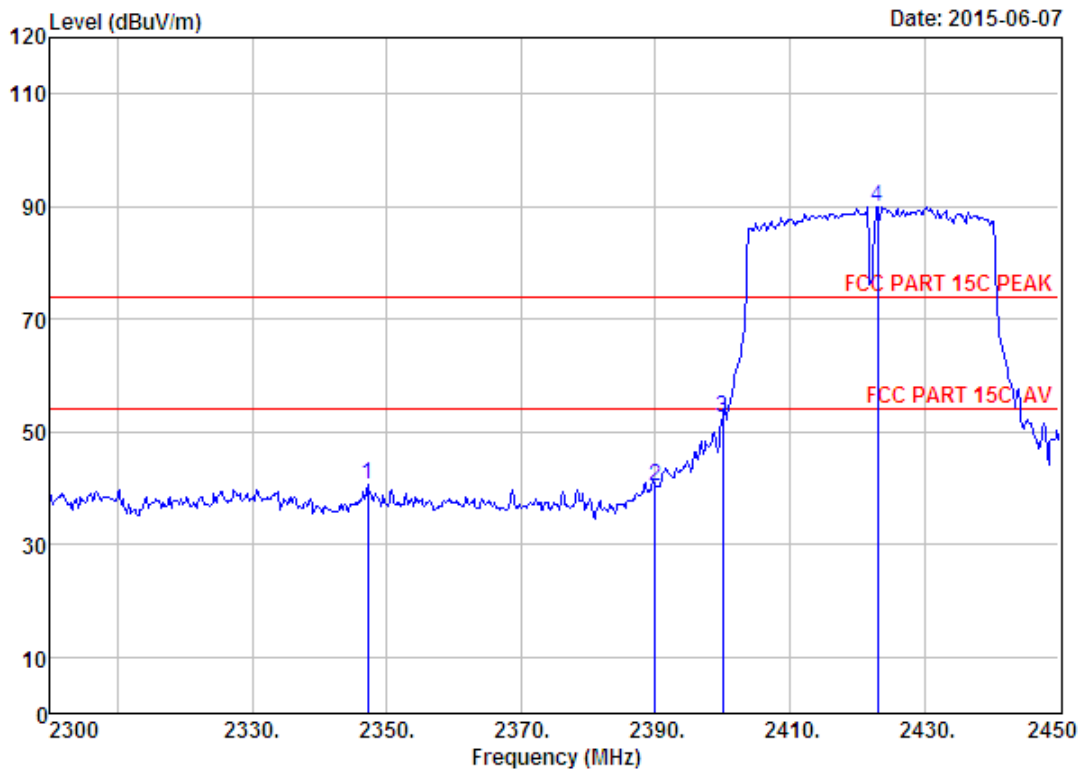


Site no. : 1# 966 chamber Data no. : 251  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH1 2422TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2347.25	27.70	6.56	34.57	41.01	40.70	74.00	33.30	Peak
2	2390.00	27.64	6.62	34.62	40.61	40.25	74.00	33.75	Peak
3	2400.00	27.61	6.62	34.64	52.85	52.44	74.00	21.56	Peak
4	2423.00	27.60	6.66	34.74	90.53	90.05	74.00	-16.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.






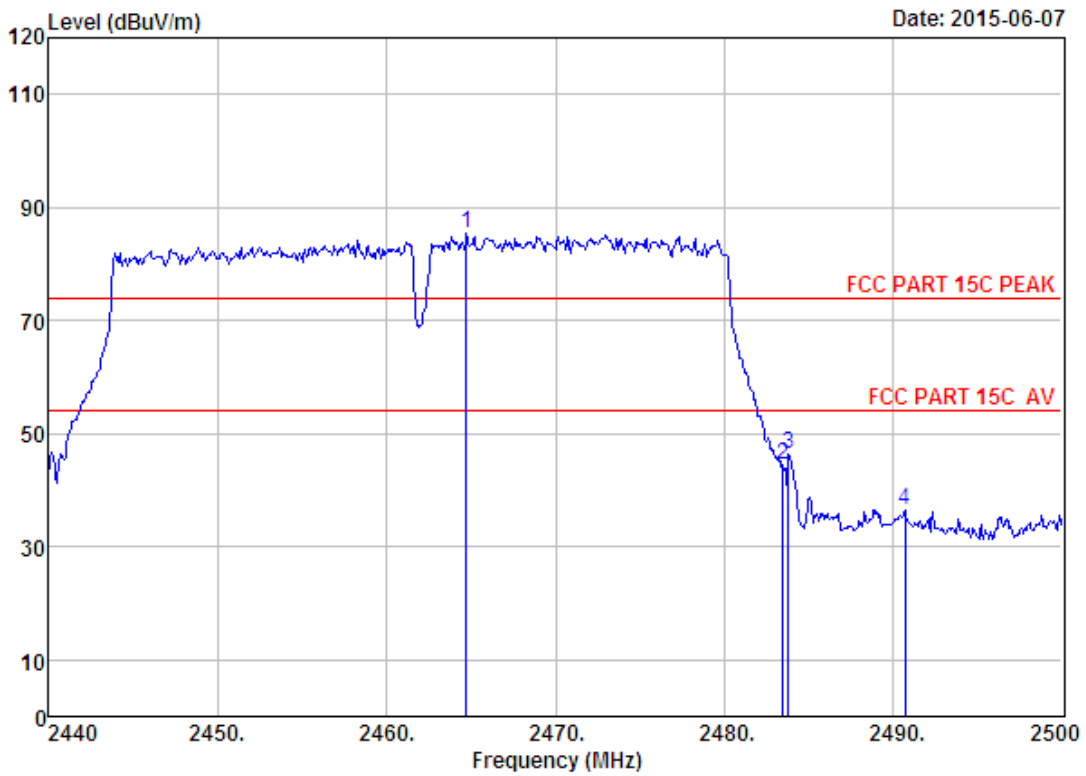

Site no. : 1# 966 chamber Data no. : 257  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH9 2462TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.72	27.58	6.69	34.98	86.09	85.38	74.00	-11.38	Peak
2	2483.50	27.58	6.71	35.11	45.35	44.53	74.00	29.47	Peak
3	2483.80	27.58	6.71	35.11	47.25	46.43	74.00	27.57	Peak
4	2490.70	27.58	6.73	35.24	37.28	36.35	74.00	37.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

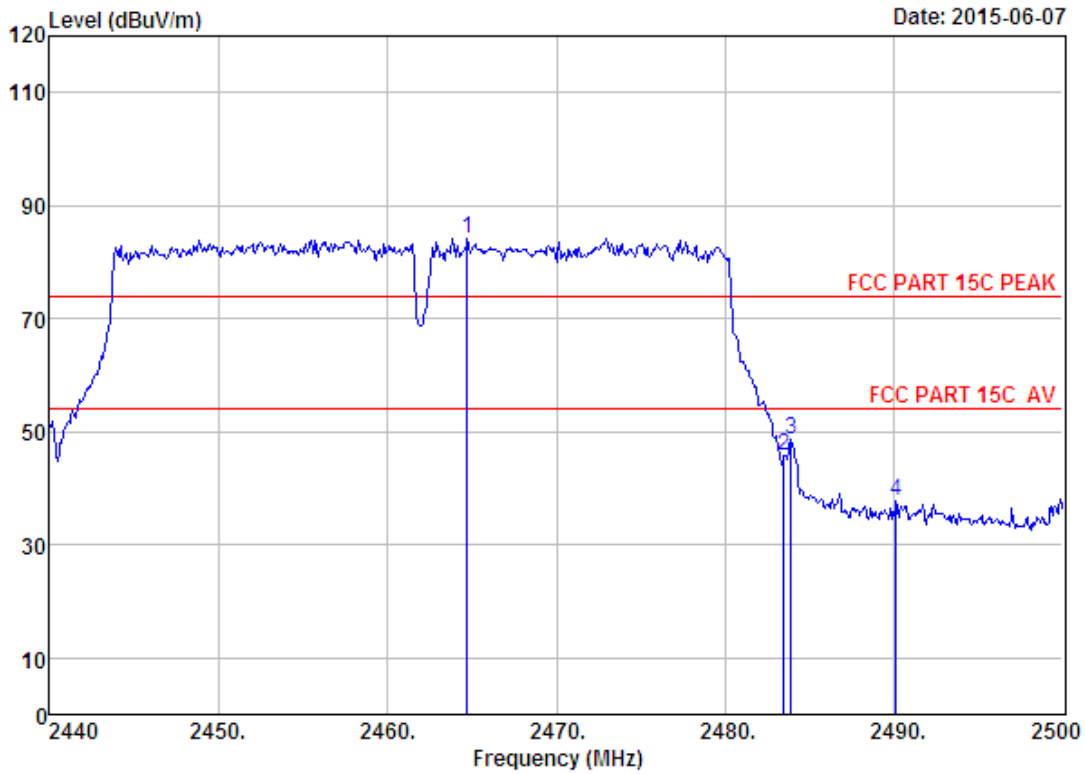

Site no. : 1# 966 chamber Data no. : 258  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : LED TV  
 Power : AC 120V/60Hz  
 M/N : WE85NC4210  
 Test Mode : IEEE 802.11n HT40 CH9 2462TX  
 Antenna b

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.72	27.58	6.69	34.98	84.91	84.20	74.00	-10.20	Peak
2	2483.50	27.58	6.71	35.11	46.46	45.64	74.00	28.36	Peak
3	2483.92	27.58	6.71	35.11	49.30	48.48	74.00	25.52	Peak
4	2490.10	27.58	6.73	35.24	38.57	37.64	74.00	36.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 6 6dB & 20dB Bandwidth Test

### 6.1 Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

### 6.2 Test Procedure

- 1, Connected the EUT's antenna port to spectrum analyzer device.
- 2, Follow the test procedure as described in KDB 558074
  - (1). Set resolution bandwidth (RBW) = 100 kHz.
  - (2). Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
  - (3). Detector = Peak.
  - (4). Trace mode = max hold.
  - (5). Sweep = auto couple.
  - (6). Allow the trace to stabilize.
  - (7). Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


### 6.3 Test Result

EUT: LED TV				
M/N: WE85NC4210				
Test date: 2015-06-09		Tested by: Tony.Tang		Test site: RF Site
Test Mode	CH	6dB bandwidth ( MHz )	20dB bandwidth ( MHz )	Limit (KHz)
IEEE 802.11 b (ANT a)	CH1	10.125	17.468	>500
	CH7	9.516	17.510	>500
	CH13	9.498	17.486	>500
IEEE 802.11 g (ANT a)	CH1	16.609	19.361	>500
	CH7	16.630	19.436	>500
	CH13	16.603	19.458	>500
IEEE 802.11 n HT 20(ANT a)	CH1	17.875	20.329	>500
	CH7	17.890	20.088	>500
	CH13	17.877	20.106	>500
IEEE 802.11 n HT 40(ANT a)	CH1	36.608	40.081	>500
	CH5	36.602	40.045	>500
	CH9	36.609	40.100	>500
Conclusion : PASS				


EUT: LED TV				
M/N: WE85NC4210				
Test date: 2015-06-09		Tested by: Tony.Tang		Test site: RF Site
Test Mode	CH	6dB bandwidth ( MHz )	20dB bandwidth ( MHz )	Limit (KHz)
IEEE 802.11 b (ANT b)	CH1	9.514	17.635	>500
	CH7	9.507	17.490	>500
	CH13	9.499	17.489	>500
IEEE 802.11 g (ANT b)	CH1	16.610	19.228	>500
	CH7	16.586	19.418	>500
	CH13	16.606	19.483	>500
IEEE 802.11 n HT 20(ANT b)	CH1	17.850	20.363	>500
	CH7	17.860	20.316	>500
	CH13	17.850	20.281	>500
IEEE 802.11 n HT 40(ANT b)	CH1	36.430	40.063	>500
	CH5	36.460	40.135	>500
	CH9	36.490	40.013	>500
Conclusion : PASS				

### 6.4 6dB Test Data

Test Mode: IEEE 802.11b 2412MHz (ANT a)

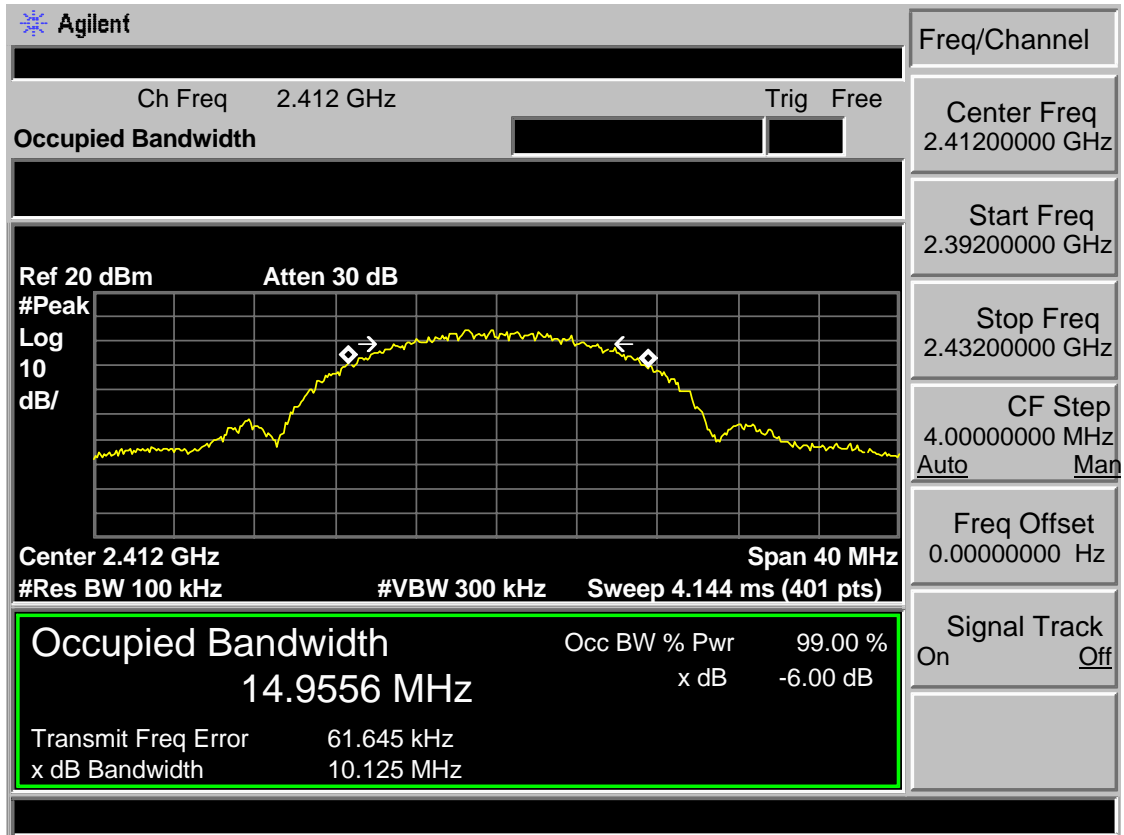

Test Mode: IEEE 802.11b 2442MHz (ANT a)

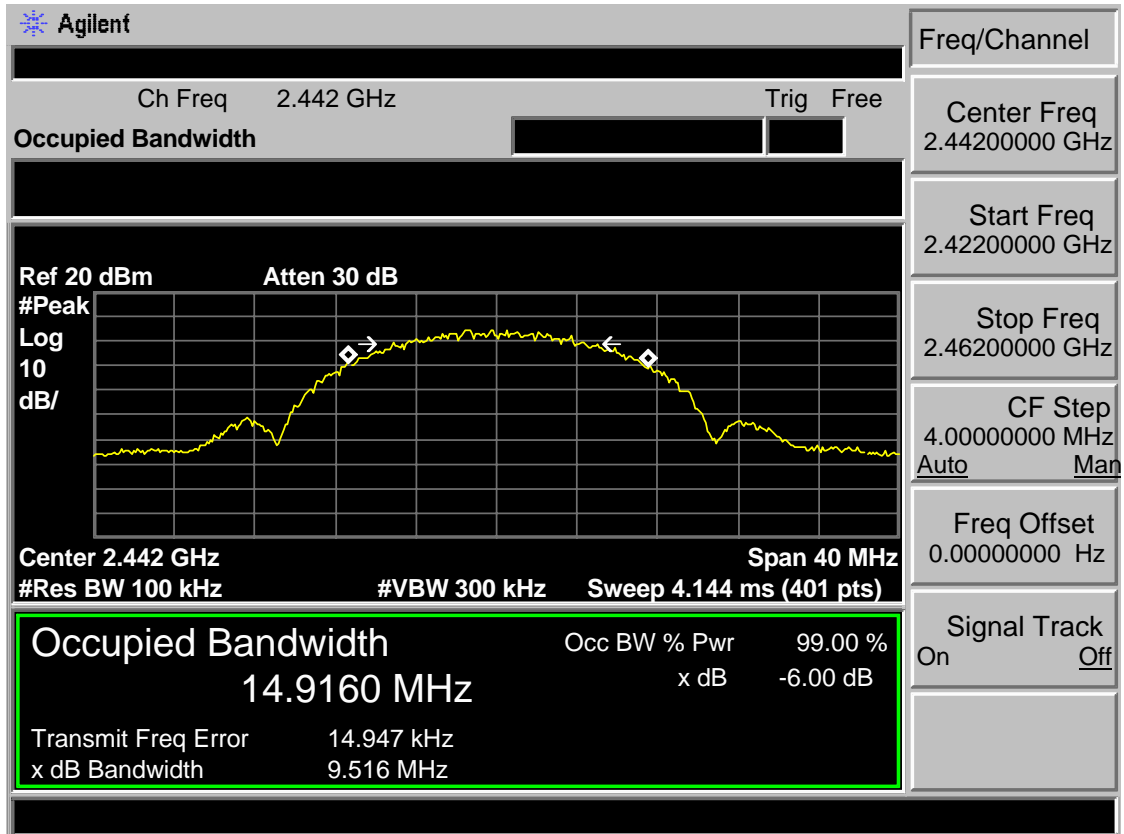

Test Mode: IEEE 802.11b 2472MHz (ANT a)

Agilent

Freq/Channel

---

Ch Freq 2.472 GHz

Trig Free

**Occupied Bandwidth**

---

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

**Center Freq**  
2.47200000 GHz

**Start Freq**  
2.45200000 GHz

**Stop Freq**  
2.49200000 GHz

**CF Step**  
4.00000000 MHz  
Auto Man

**Freq Offset**  
0.00000000 Hz

**Signal Track**  
On Off

---

Center 2.472 GHz

Span 40 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 4.144 ms (401 pts)

Occupied Bandwidth

Occ BW % Pwr 99.00 %


14.8399 MHz

Transmit Freq Error -40.786 kHz


x dB -6.00 dB

x dB Bandwidth 9.498 MHz

Test Mode: IEEE 802.11g 2412MHz (ANT a)

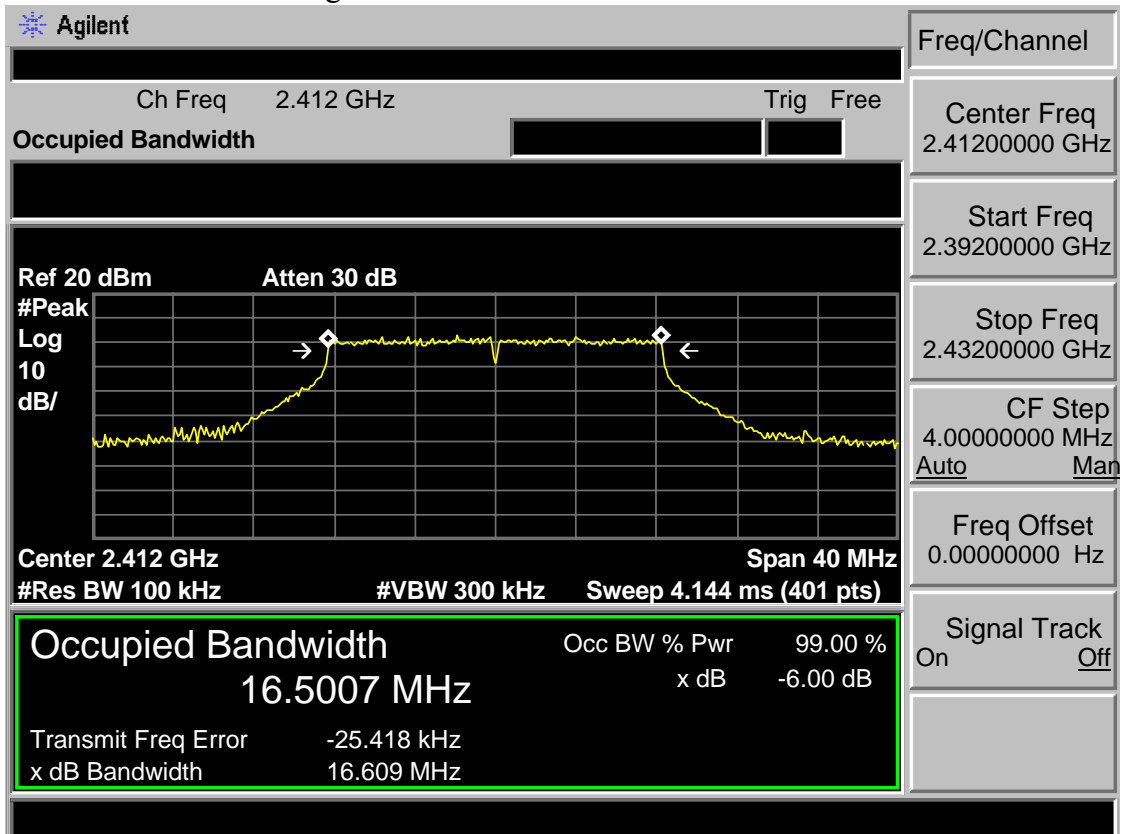


Test Mode: IEEE 802.11g 2442MHz (ANT a)

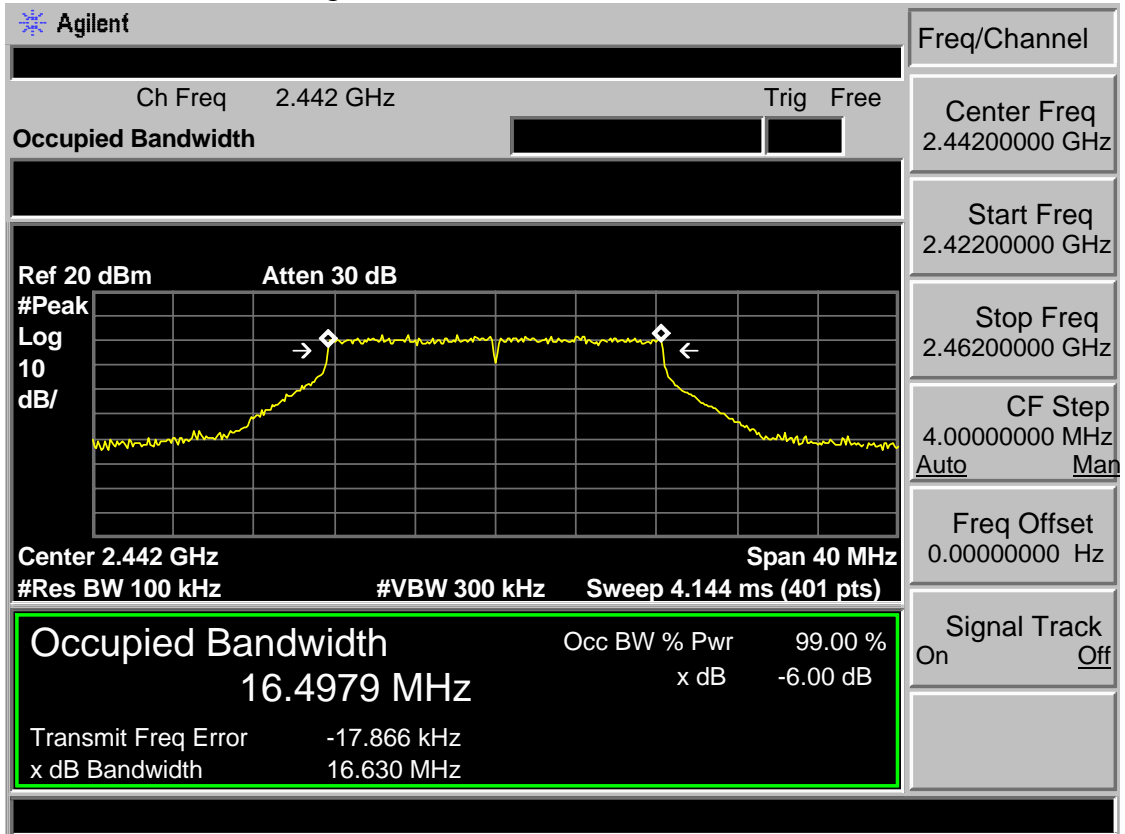





Test Mode: IEEE 802.11g 2472MHz (ANT a)

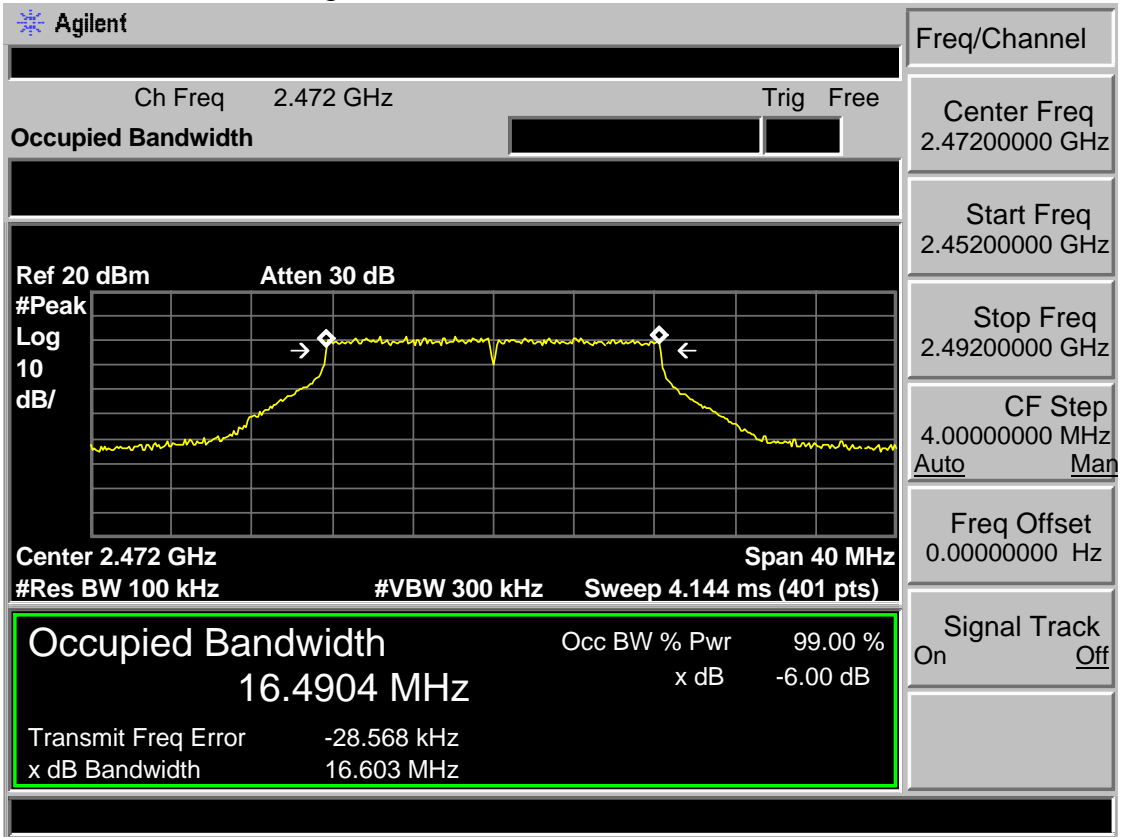


Test Mode: IEEE 802.11n HT20 2412MHz (ANT a)

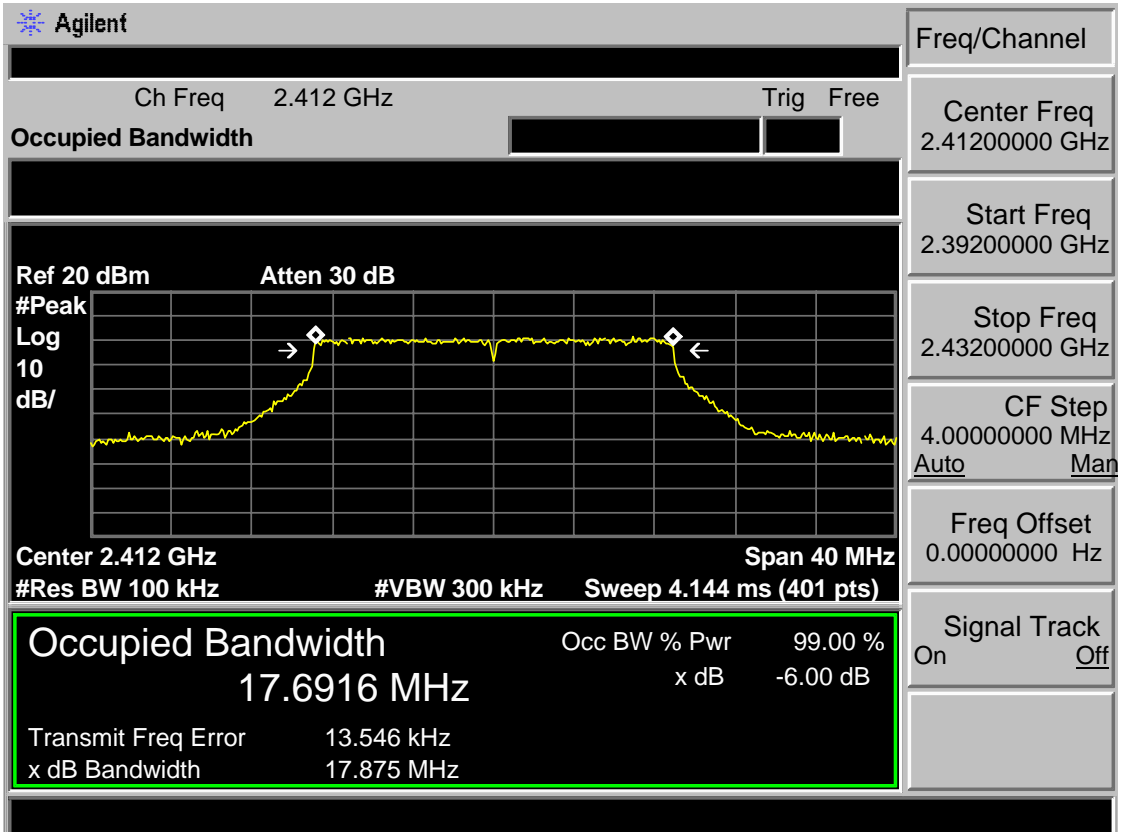


Test Mode: IEEE 802.11n HT20 2442MHz (ANT a)

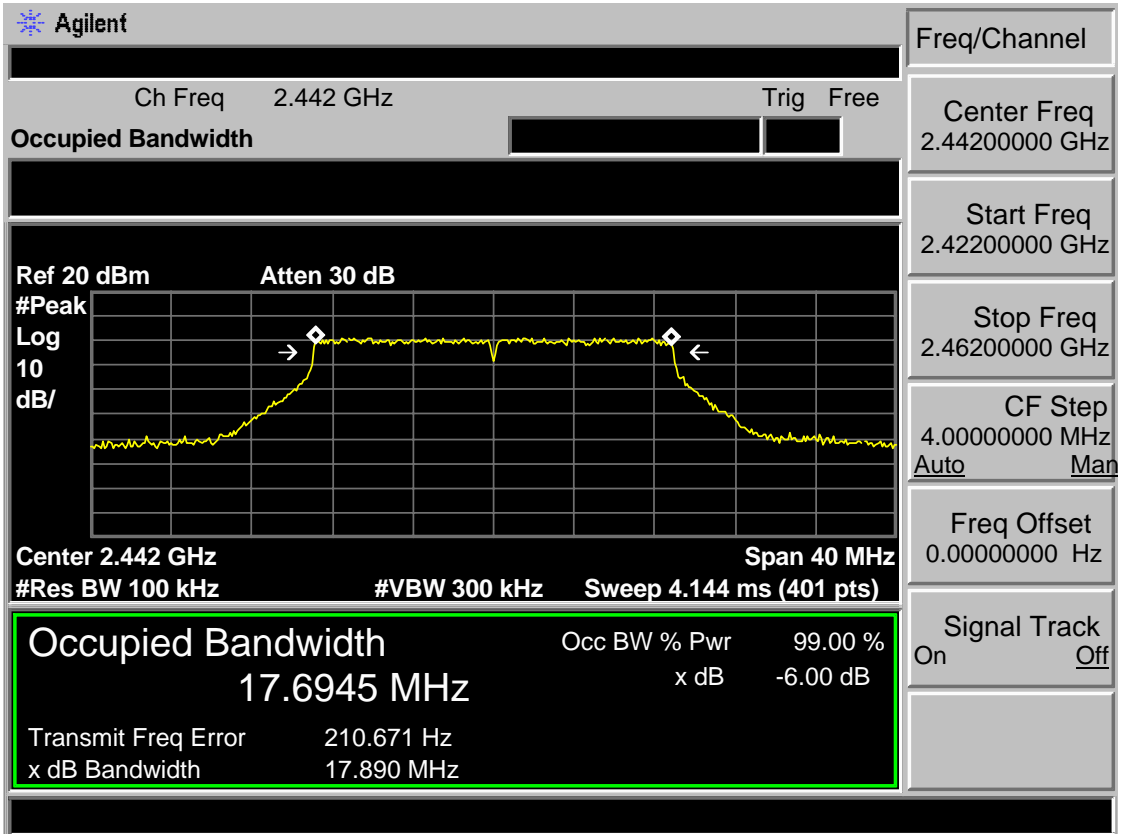


Test Mode: IEEE 802.11n HT20 2472MHz (ANT a)

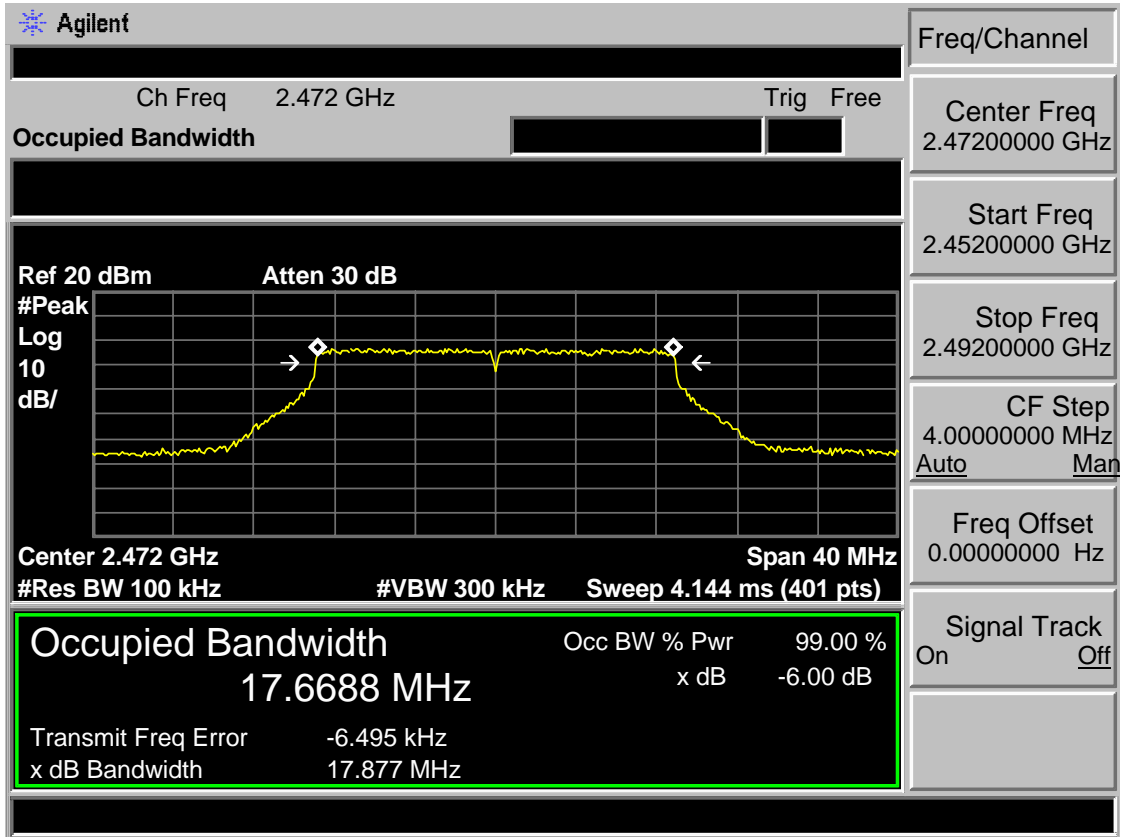


Test Mode: IEEE 802.11n HT40 2422MHz (ANT a)

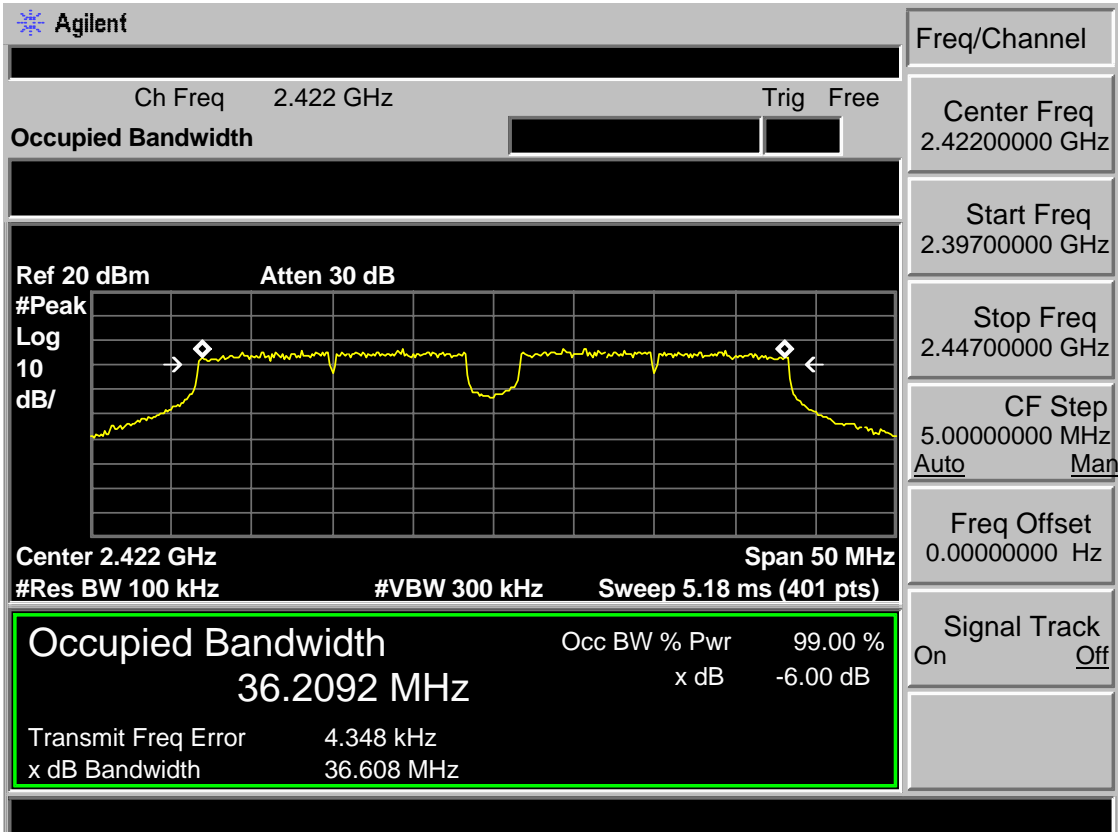


Test Mode: IEEE 802.11n HT40 2442MHz (ANT a)

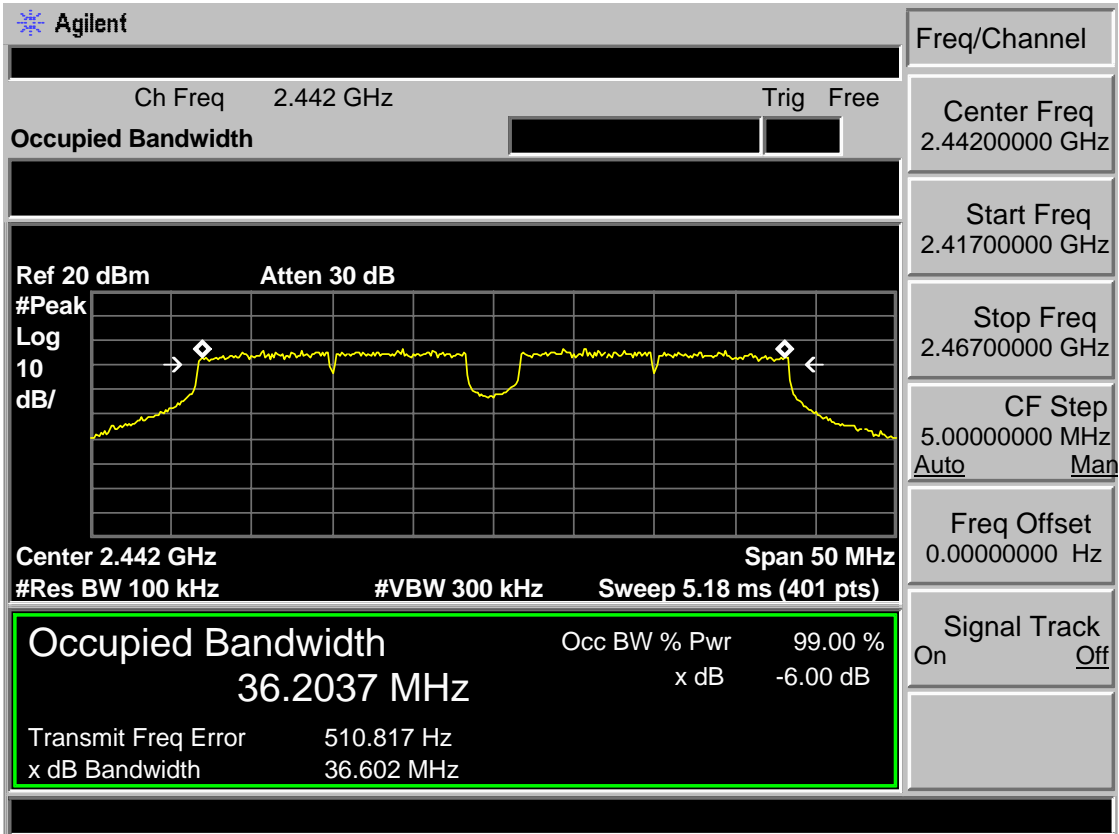


Test Mode: IEEE 802.11n HT40 2462MHz (ANT a)

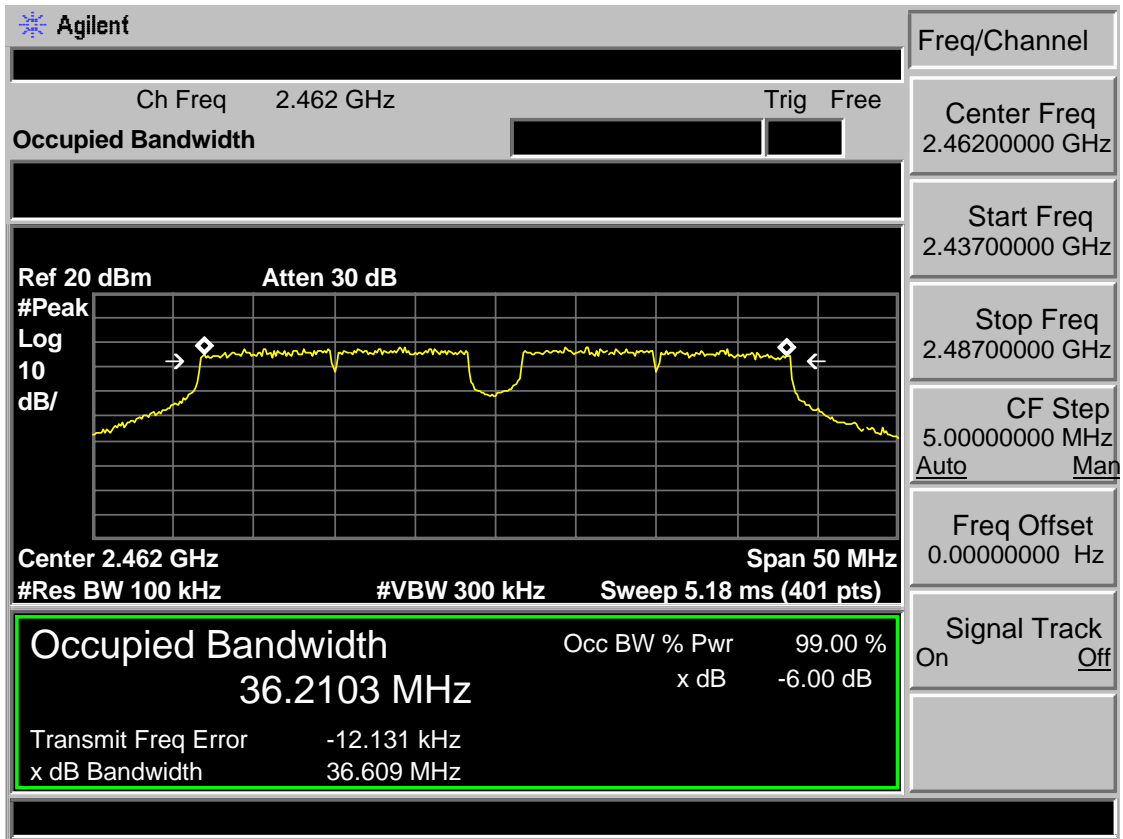


Test Mode: IEEE 802.11b 2412MHz (ANT b)

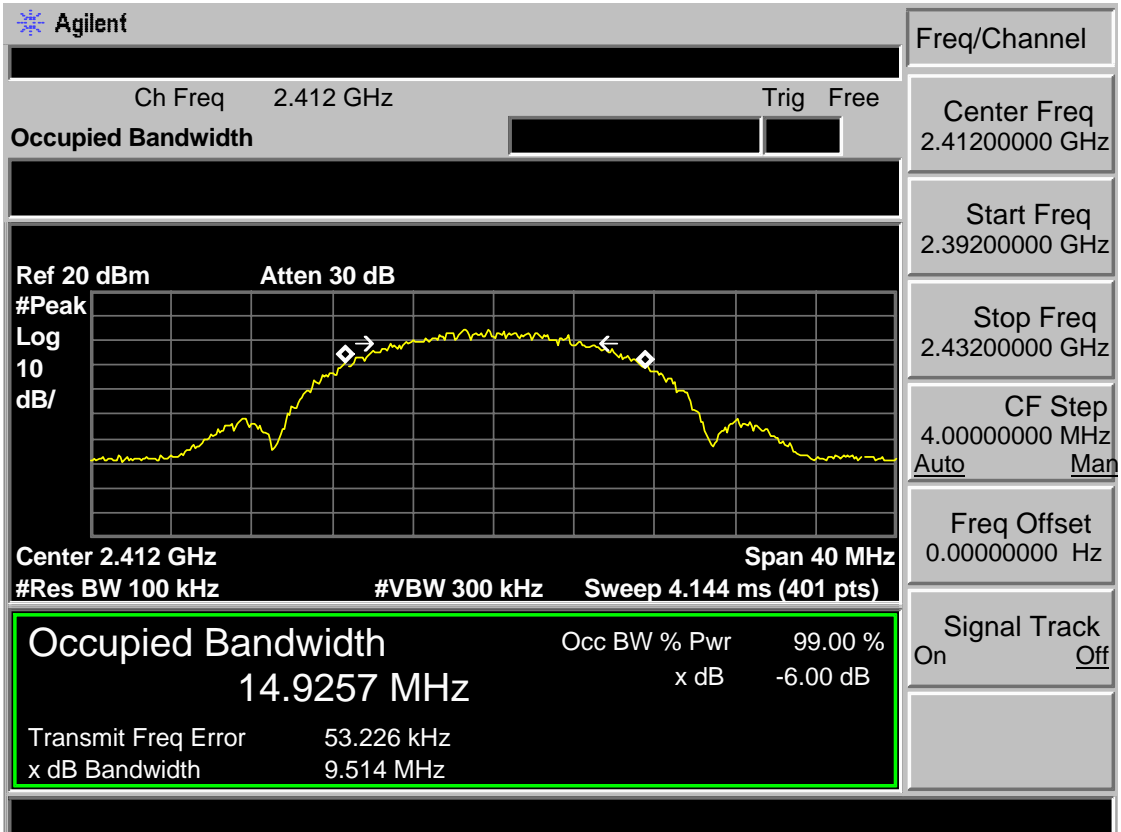


Test Mode: IEEE 802.11b 2442MHz (ANT b)

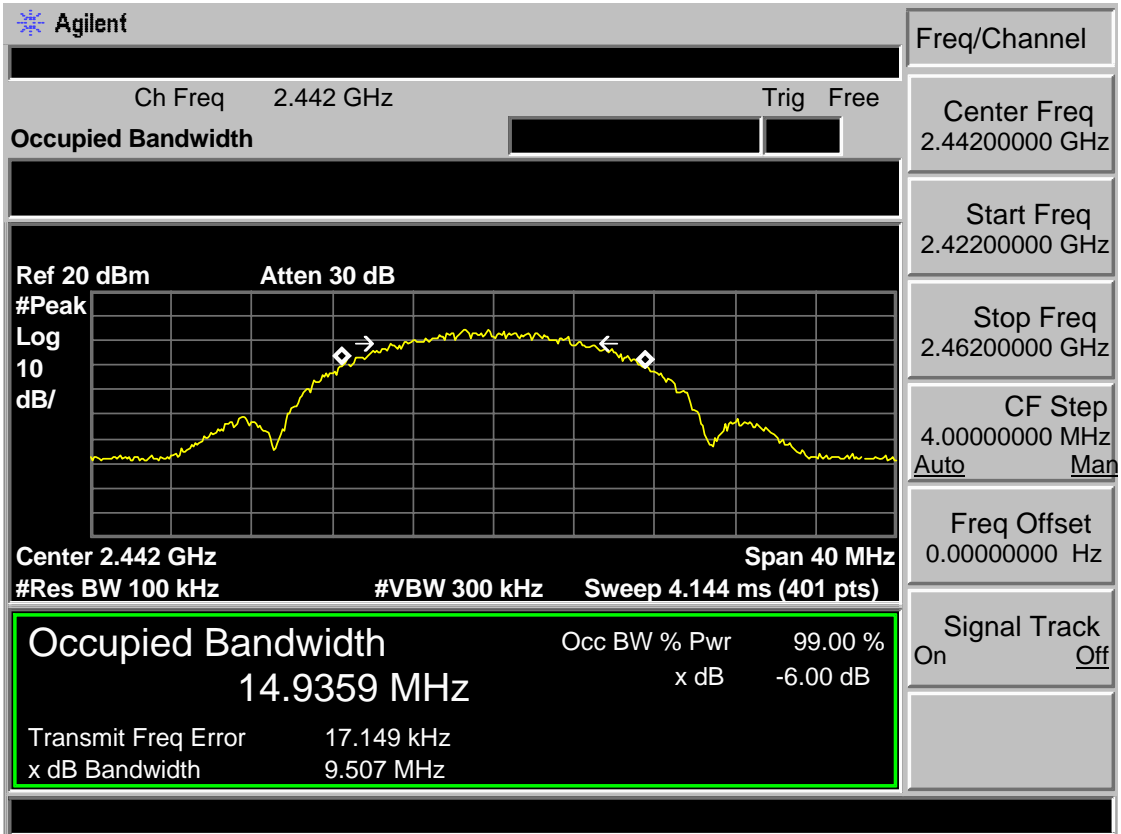


Test Mode: IEEE 802.11b 2472MHz (ANT b)

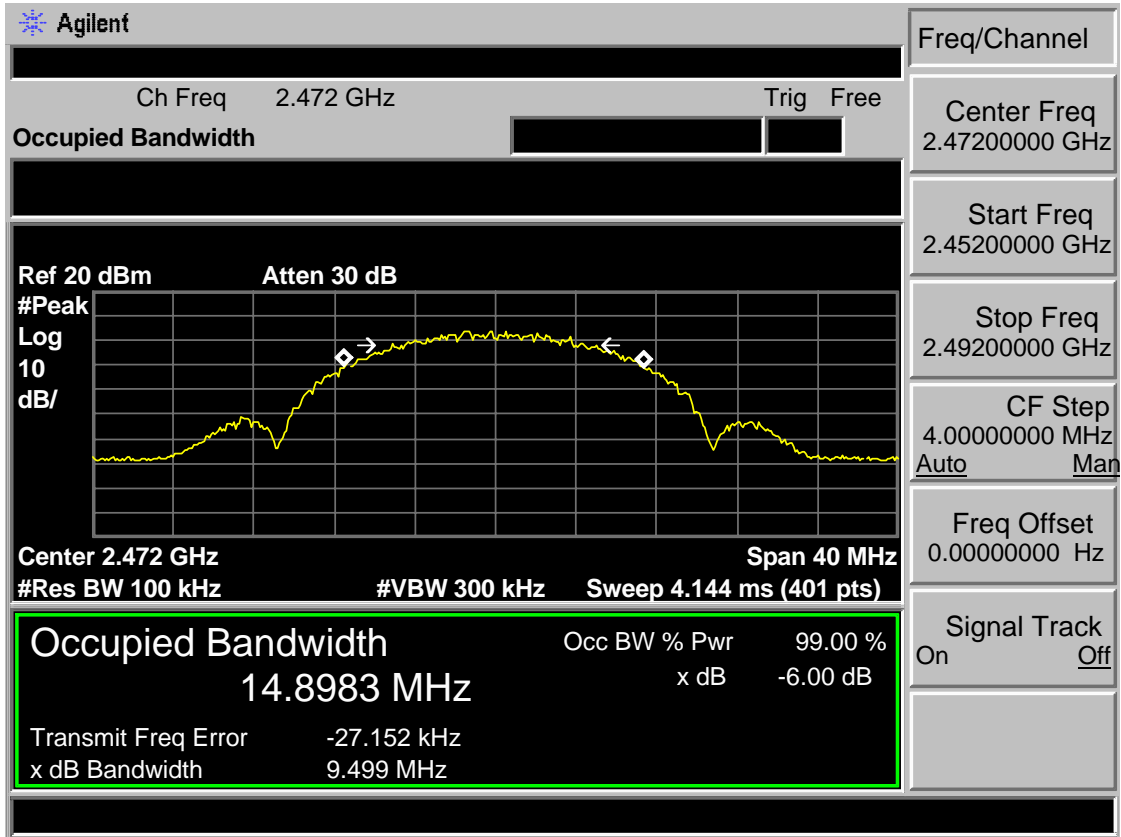

Test Mode: IEEE 802.11g 2412MHz (ANT b)

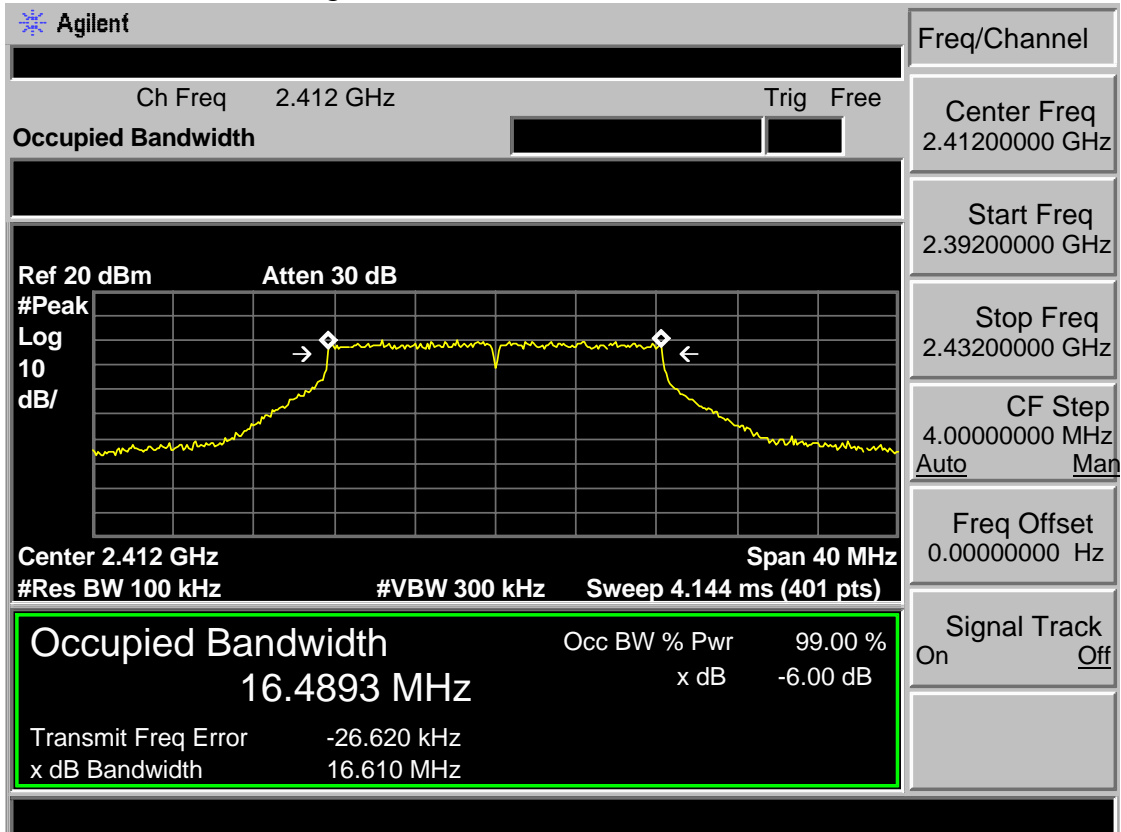


Test Mode: IEEE 802.11g 2442MHz (ANT b)

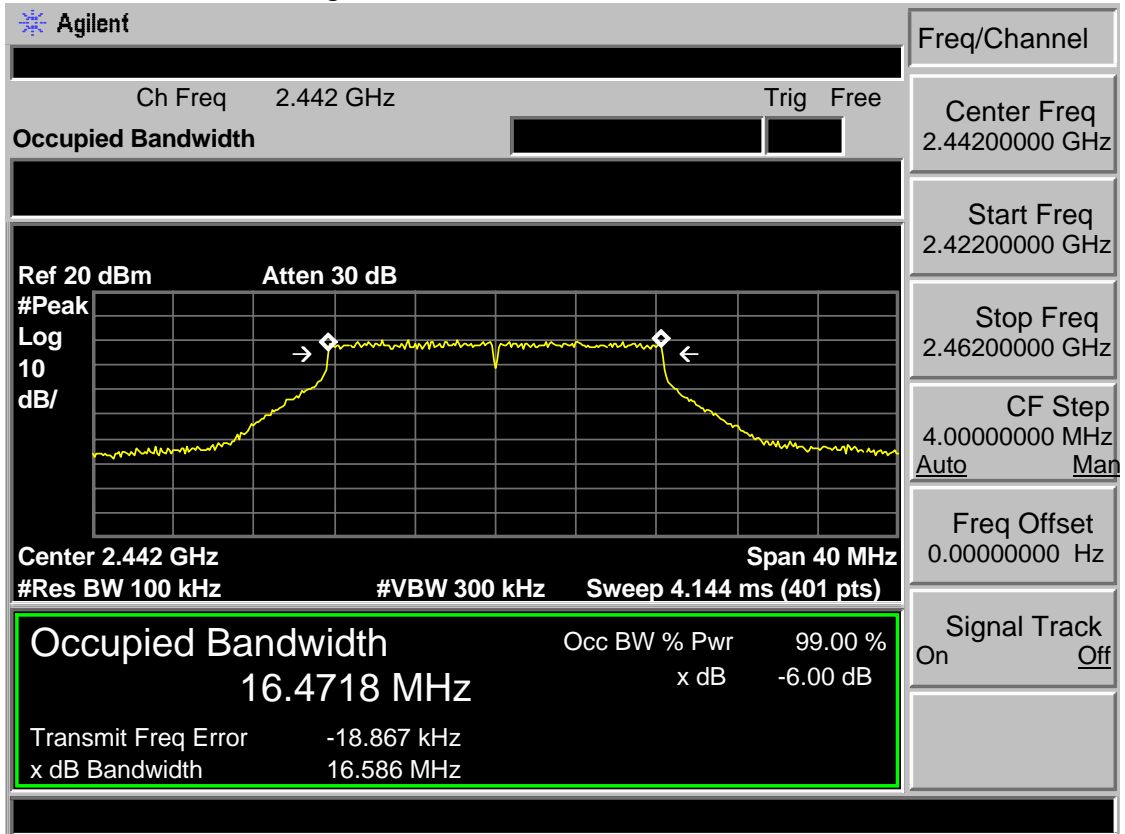





Test Mode: IEEE 802.11g 2472MHz (ANT b)

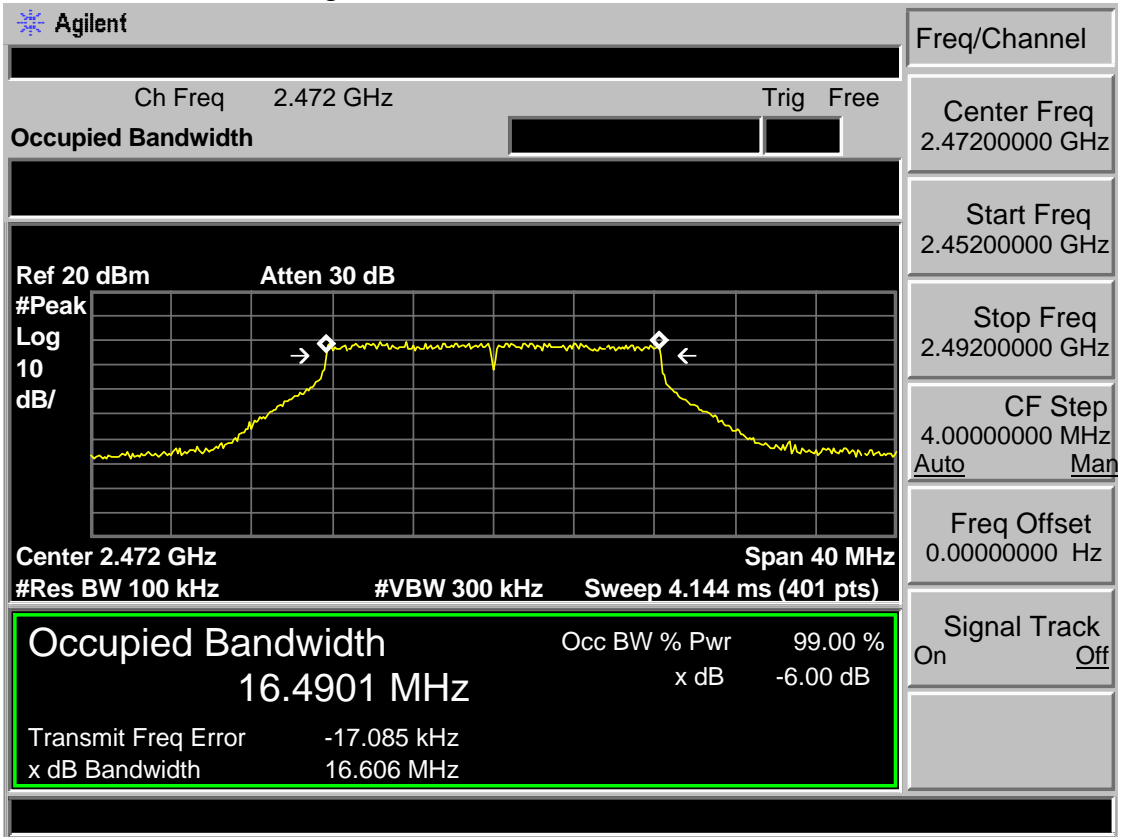


Test Mode: IEEE 802.11n HT20 2412MHz (ANT b)

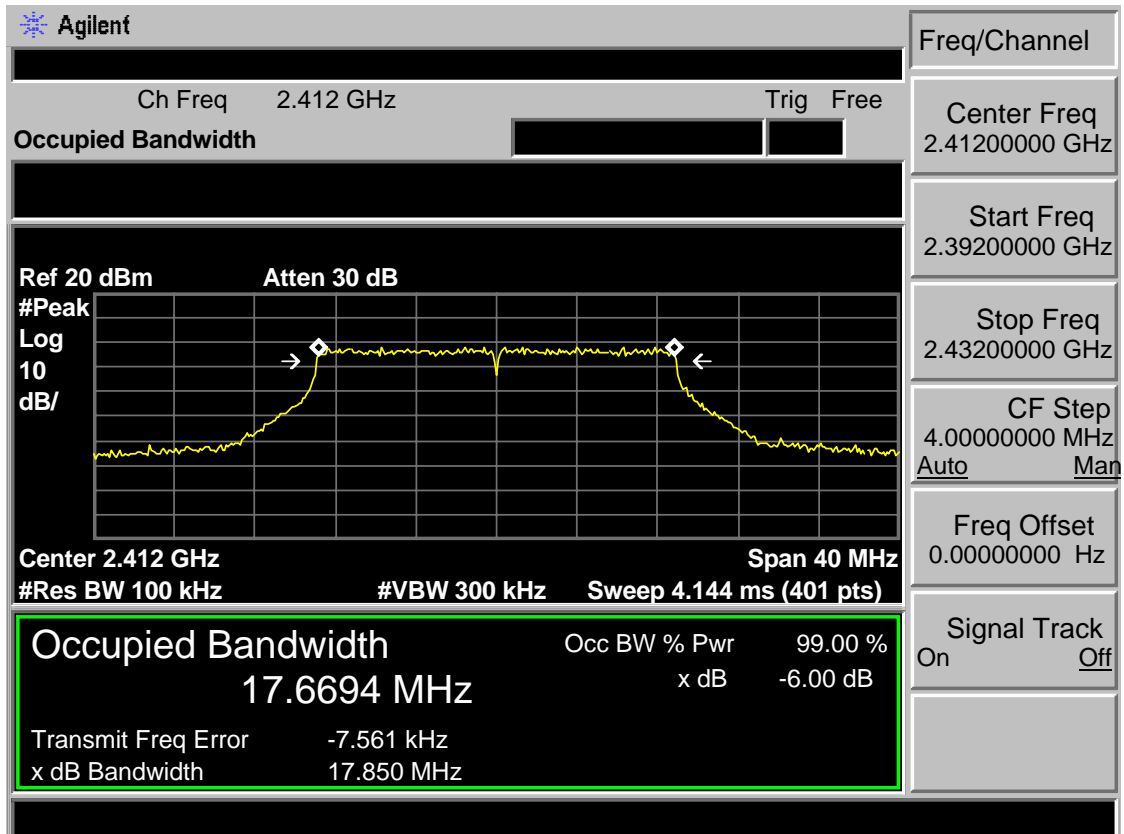


Test Mode: IEEE 802.11n HT20 2442MHz (ANT b)

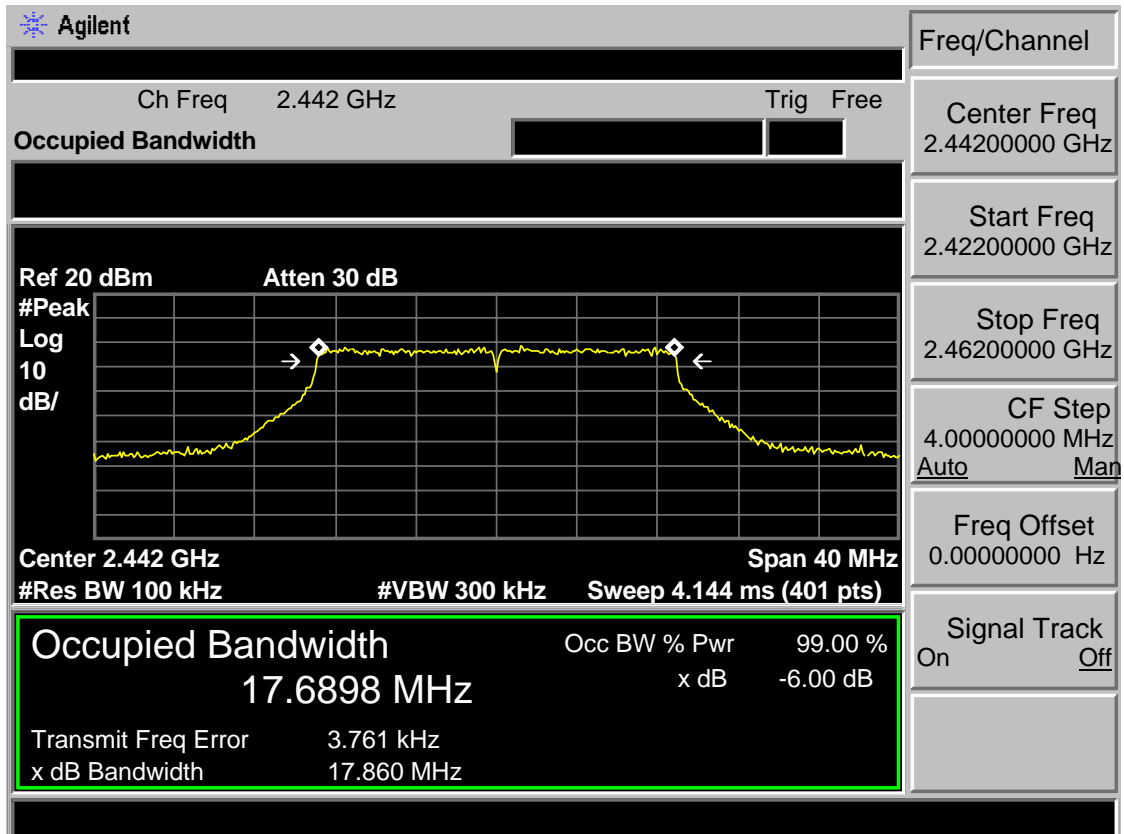


Test Mode: IEEE 802.11n HT20 2472MHz (ANT b)

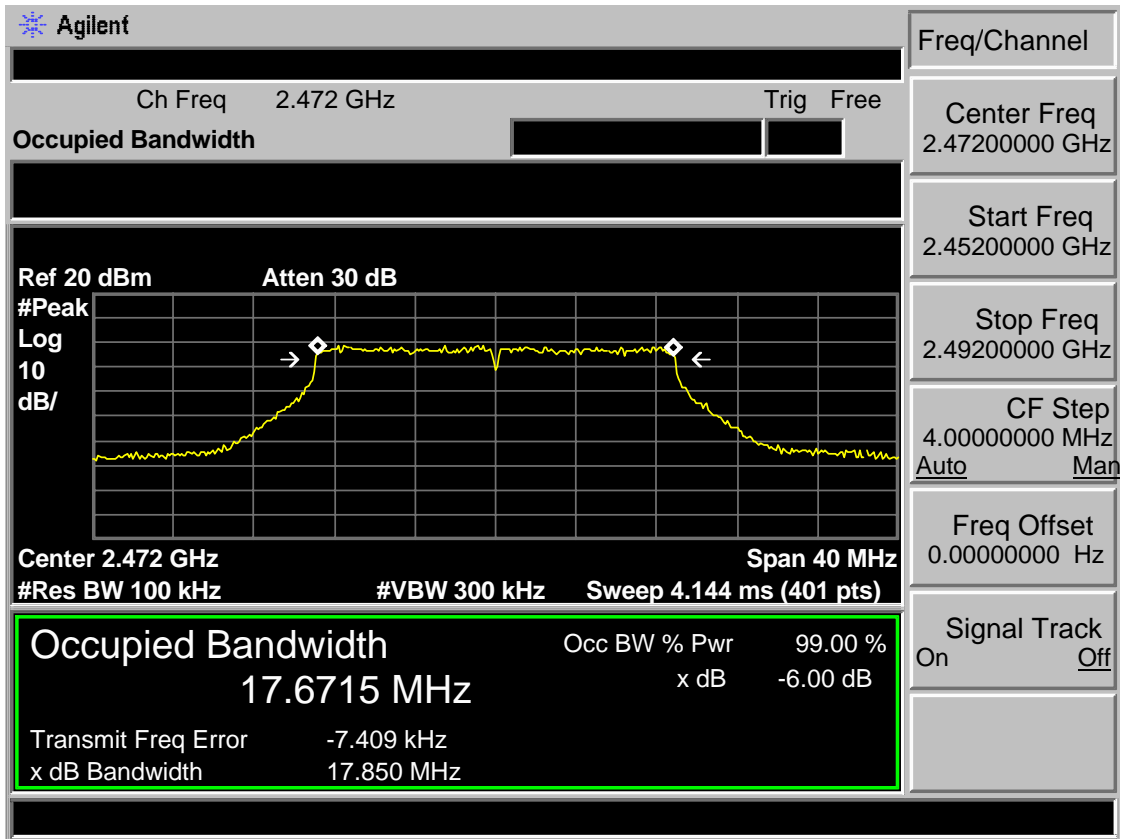


Test Mode: IEEE 802.11n HT40 2422MHz (ANT b)

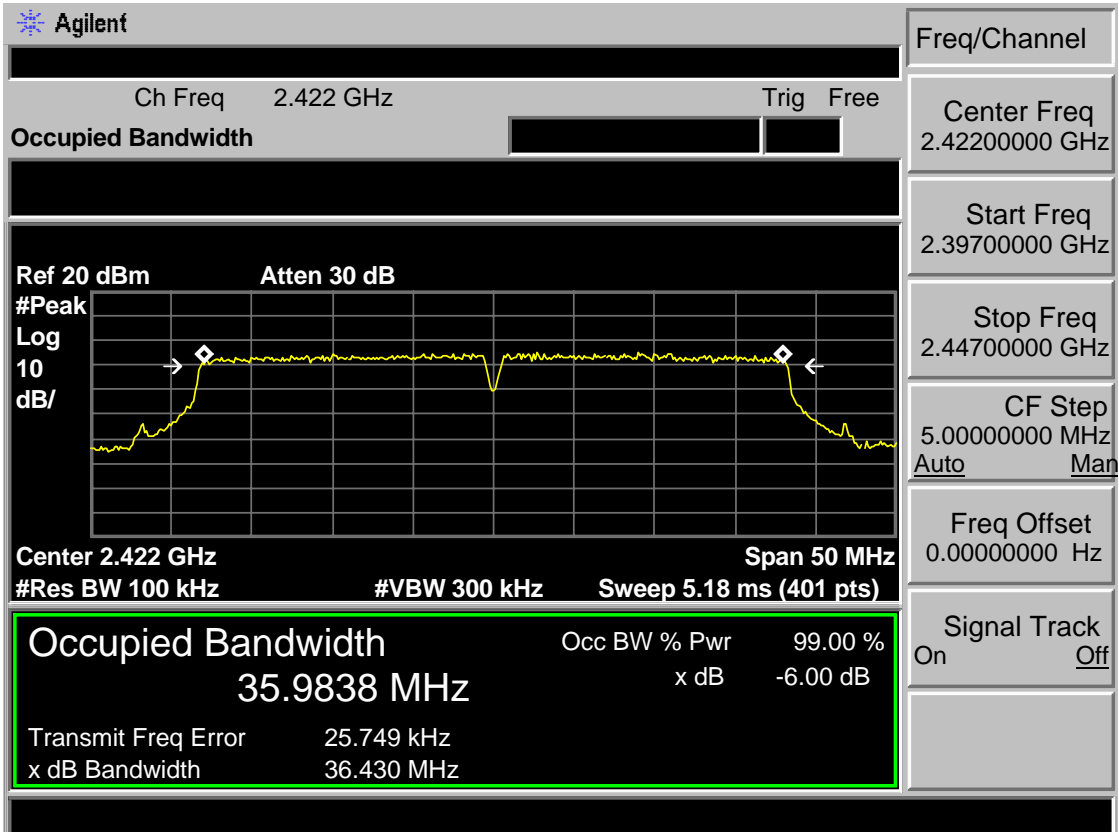

Test Mode: IEEE 802.11n HT40 2442MHz (ANT b)

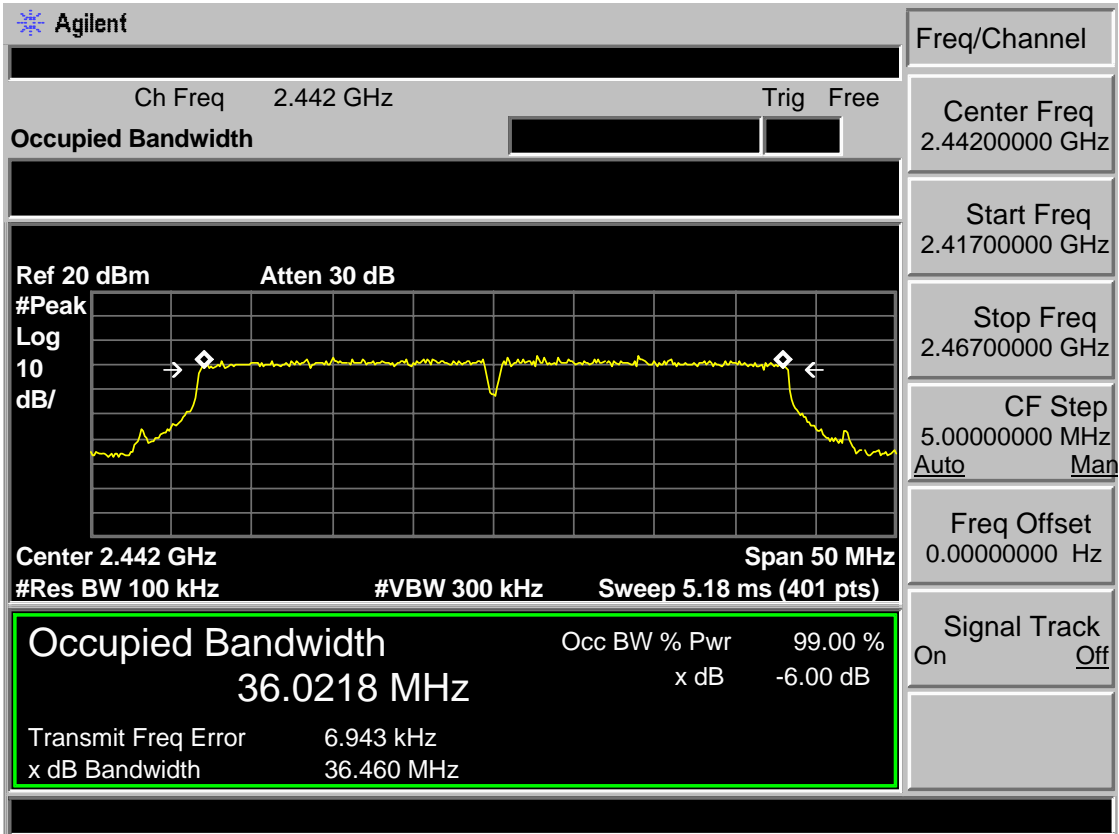


Test Mode: IEEE 802.11n HT40 2462MHz (ANT b)

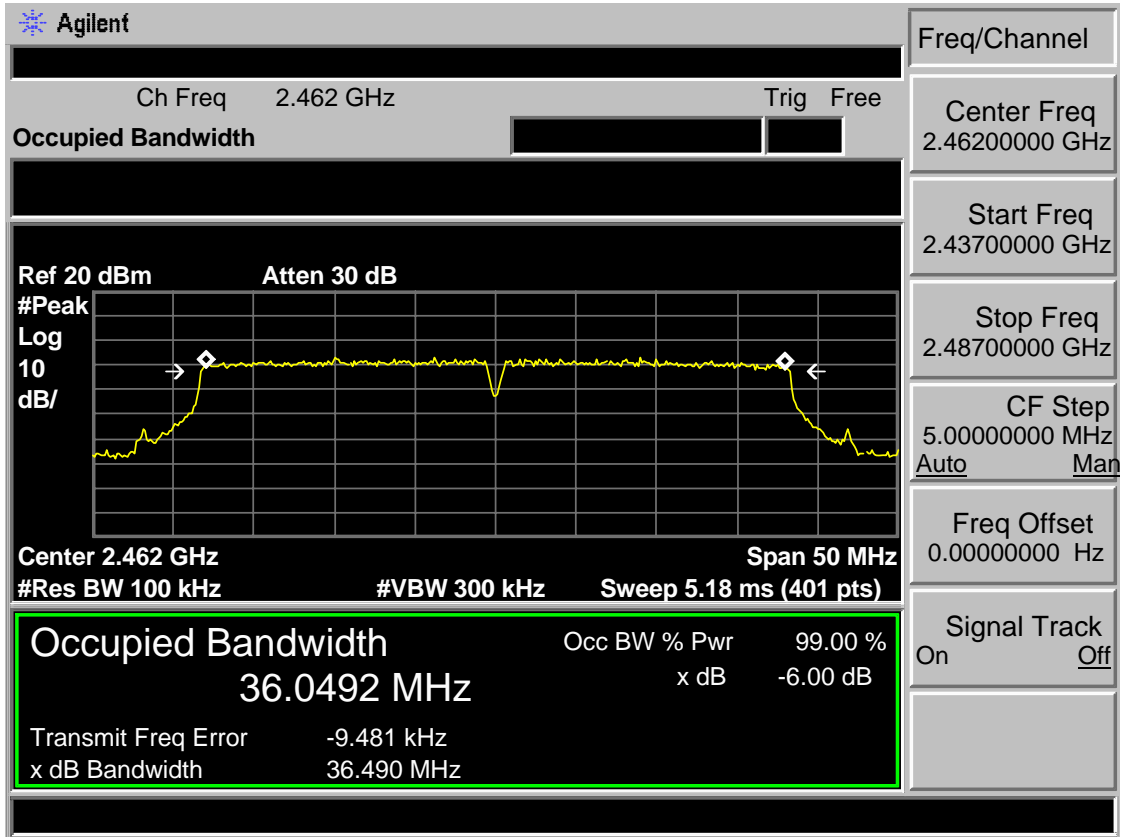


### 6.5 20dB Test Data

Test Mode: IEEE 802.11b 2412MHz(ANT a)

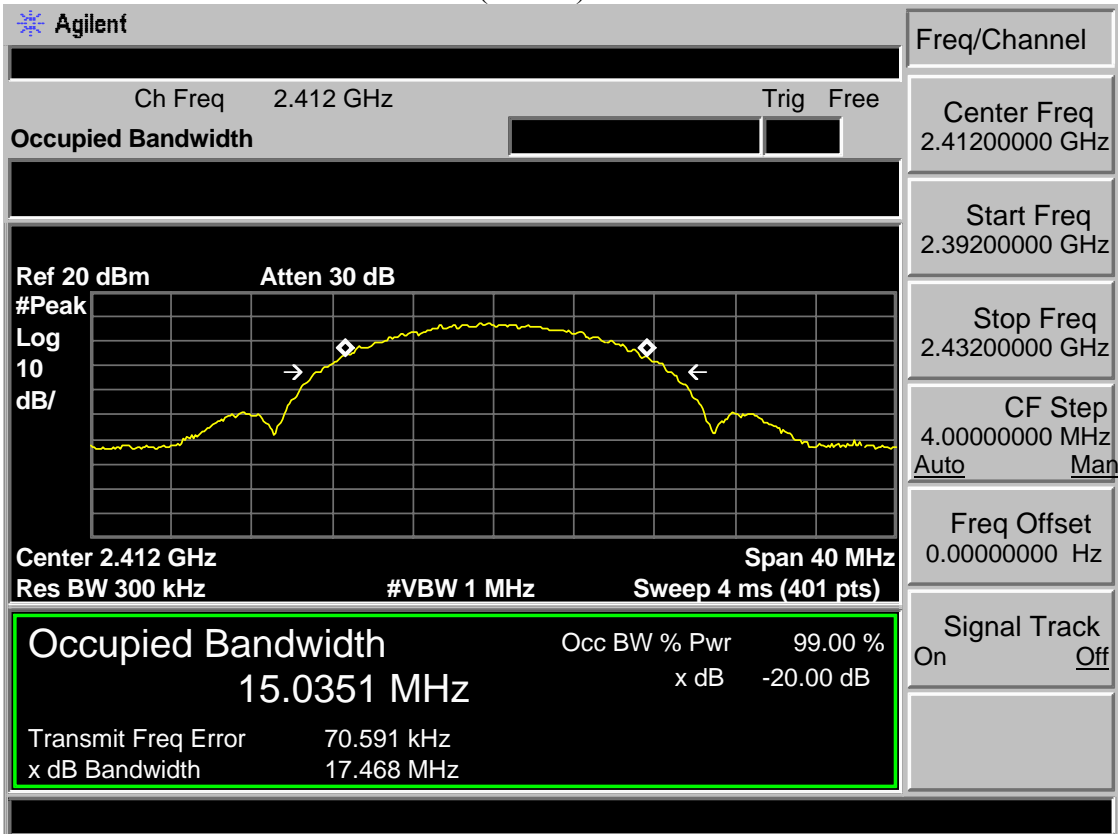

Test Mode: IEEE 802.11b 2442MHz(ANT a)

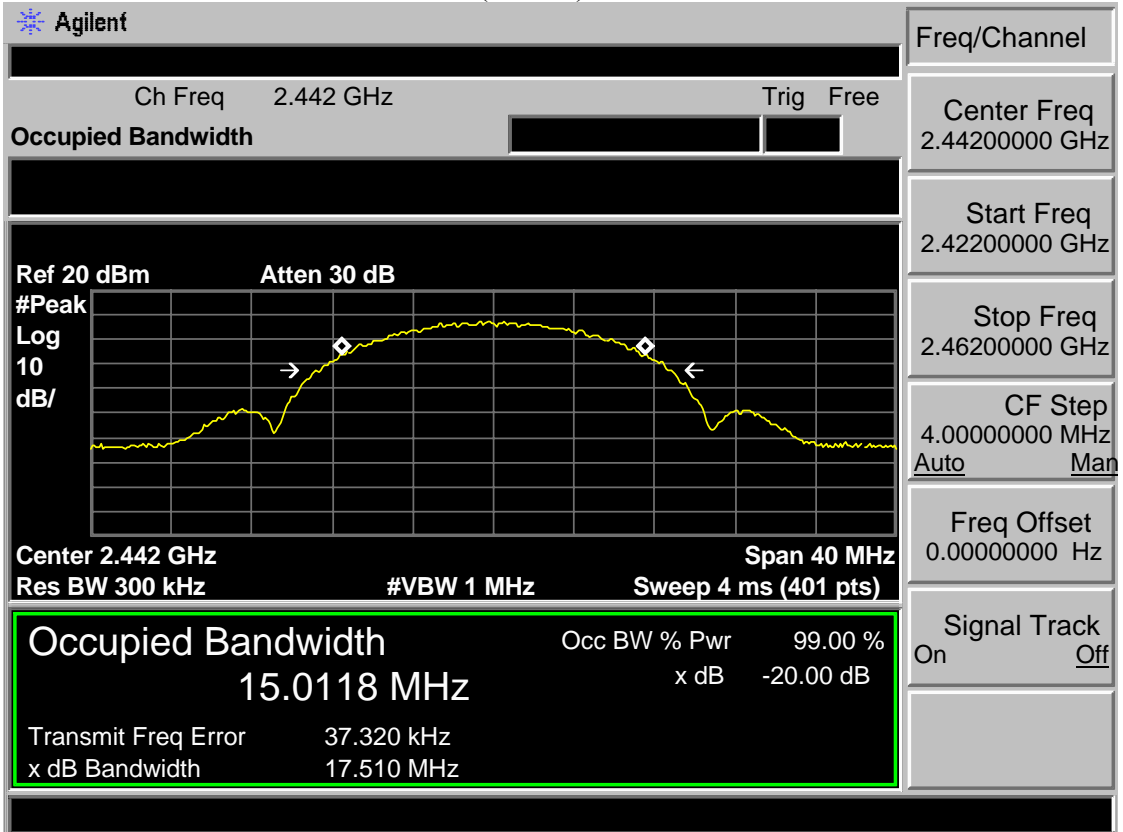

Test Mode: IEEE 802.11b 2472MHz(ANT a)

**Agilent**

Ch Freq 2.472 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

#Peak Log 10 dB/

Center 2.472 GHz Span 40 MHz

Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %
15.0021 MHz		x dB	-20.00 dB
Transmit Freq Error	7.335 kHz		
x dB Bandwidth	17.486 MHz		

Freq/Channel

Center Freq 2.47200000 GHz

Start Freq 2.45200000 GHz


Stop Freq 2.49200000 GHz

CF Step 4.00000000 MHz  
Auto Man


Freq Offset 0.00000000 Hz

Signal Track On Off

Test Mode: IEEE 802.11g 2412MHz(ANT a)

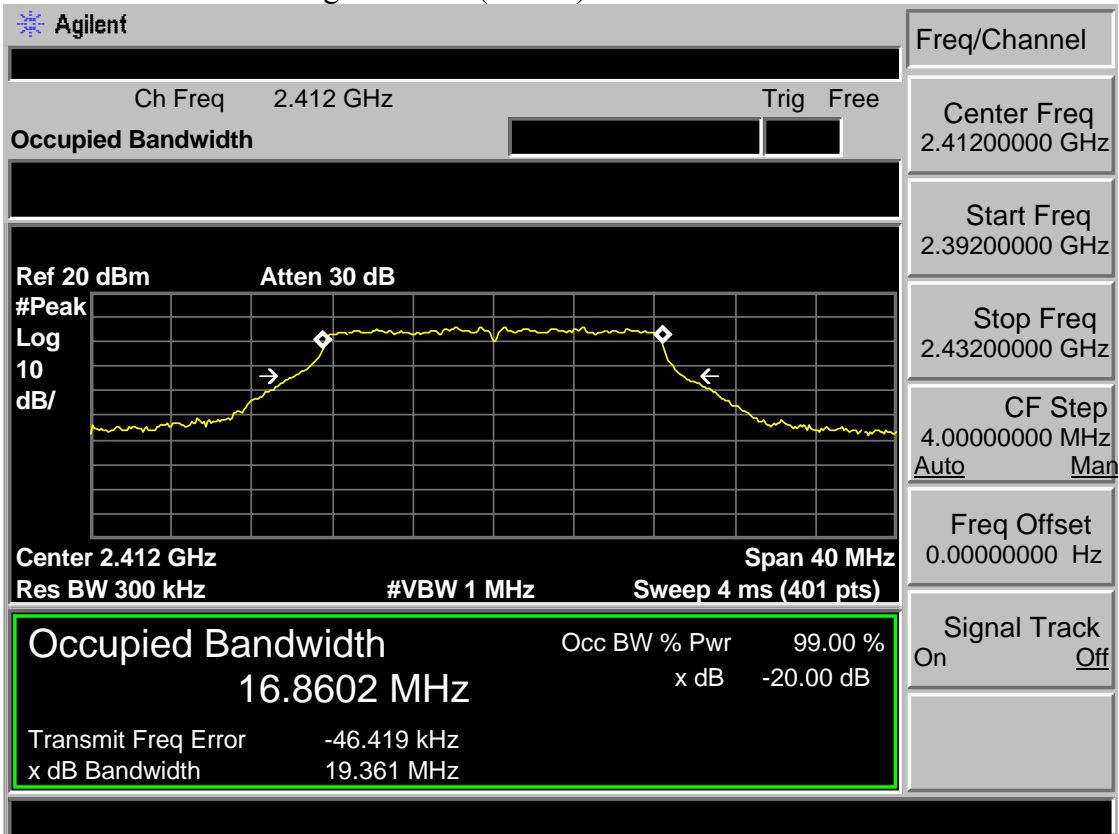

Test Mode: IEEE 802.11g 2442MHz(ANT a)

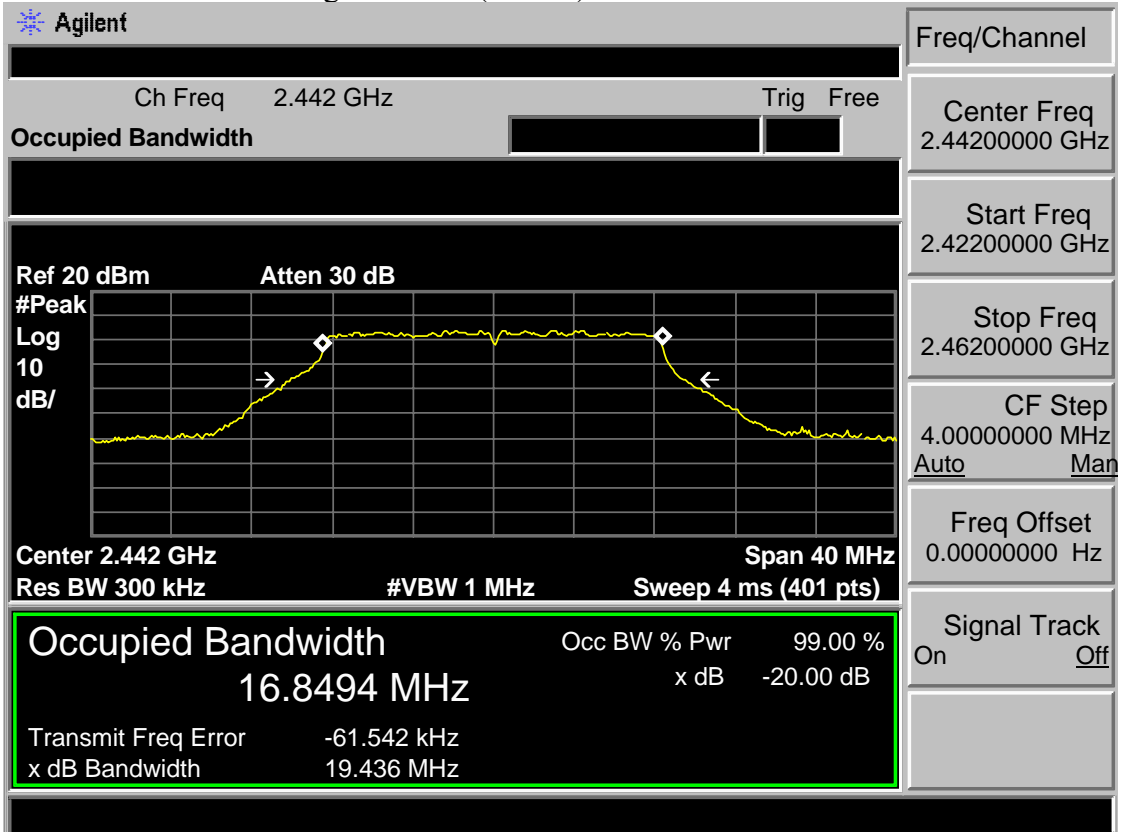



Test Mode: IEEE 802.11g 2472MHz(ANT a)

Agilent

Freq/Channel

---

Ch Freq 2.472 GHz

Trig Free

**Occupied Bandwidth**

---

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

**Center Freq**  
2.47200000 GHz

**Start Freq**  
2.45200000 GHz

**Stop Freq**  
2.49200000 GHz

**CF Step**  
4.00000000 MHz  
Auto Man

**Freq Offset**  
0.00000000 Hz

**Signal Track**  
On Off

---

Center 2.472 GHz

Span 40 MHz

Res BW 300 kHz

#VBW 1 MHz

Sweep 4 ms (401 pts)

Occupied Bandwidth

Occ BW % Pwr 99.00 %


16.8650 MHz

x dB -20.00 dB


Transmit Freq Error -79.324 kHz

x dB Bandwidth 19.458 MHz


Test Mode: IEEE 802.11n HT20 2412MHz(ANT a)

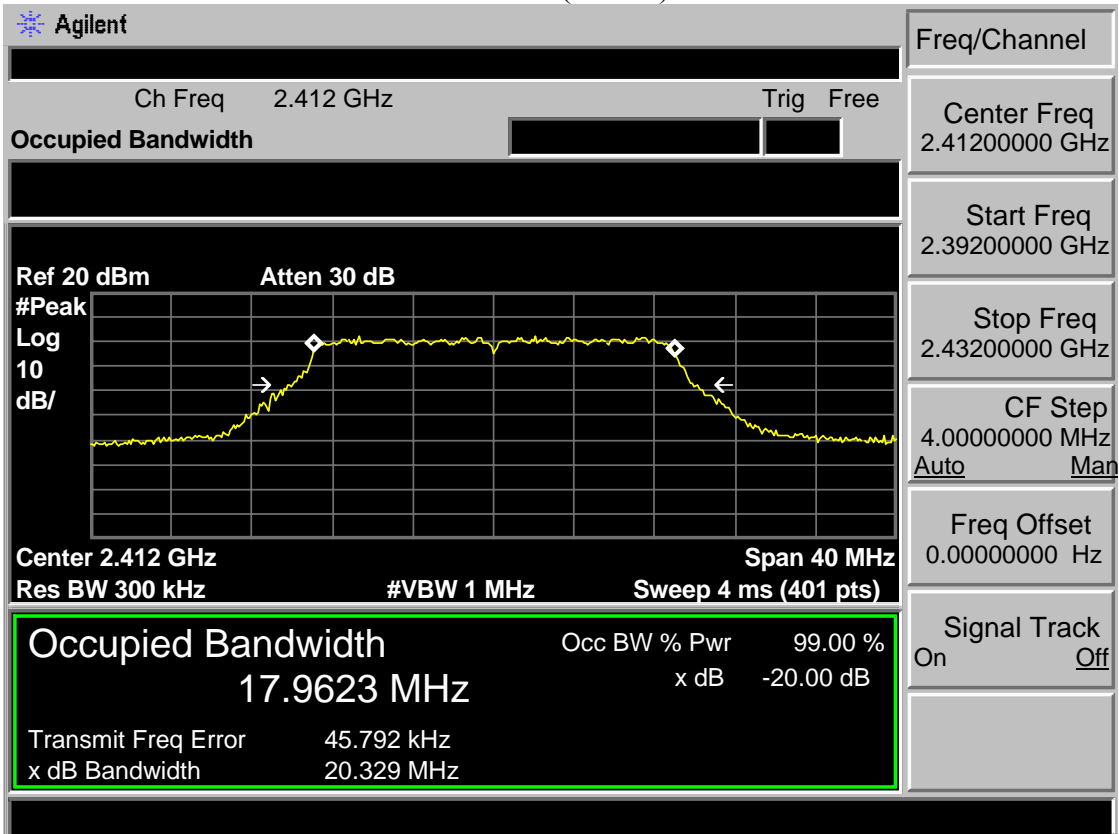


Test Mode: IEEE 802.11n HT20 2442MHz(ANT a)

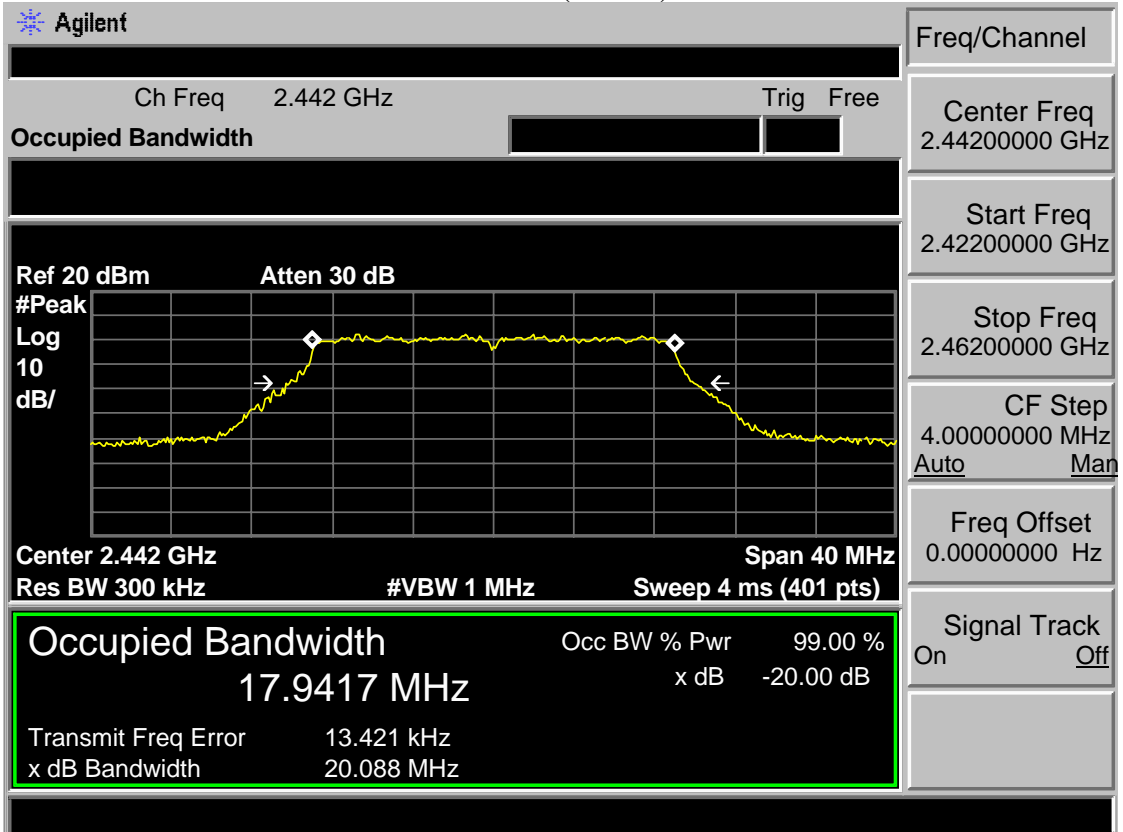


Test Mode: IEEE 802.11n HT20 2472MHz(ANT a)

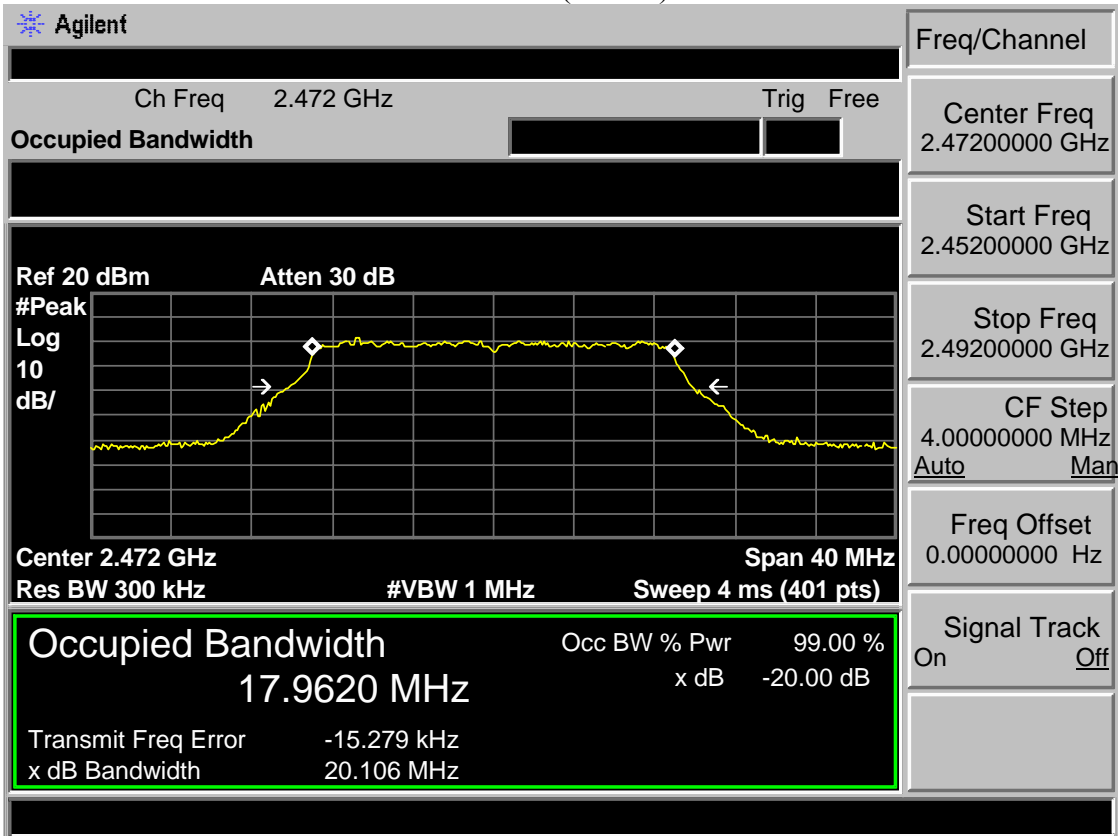

Test Mode: IEEE 802.11n HT40 2422MHz(ANT a)

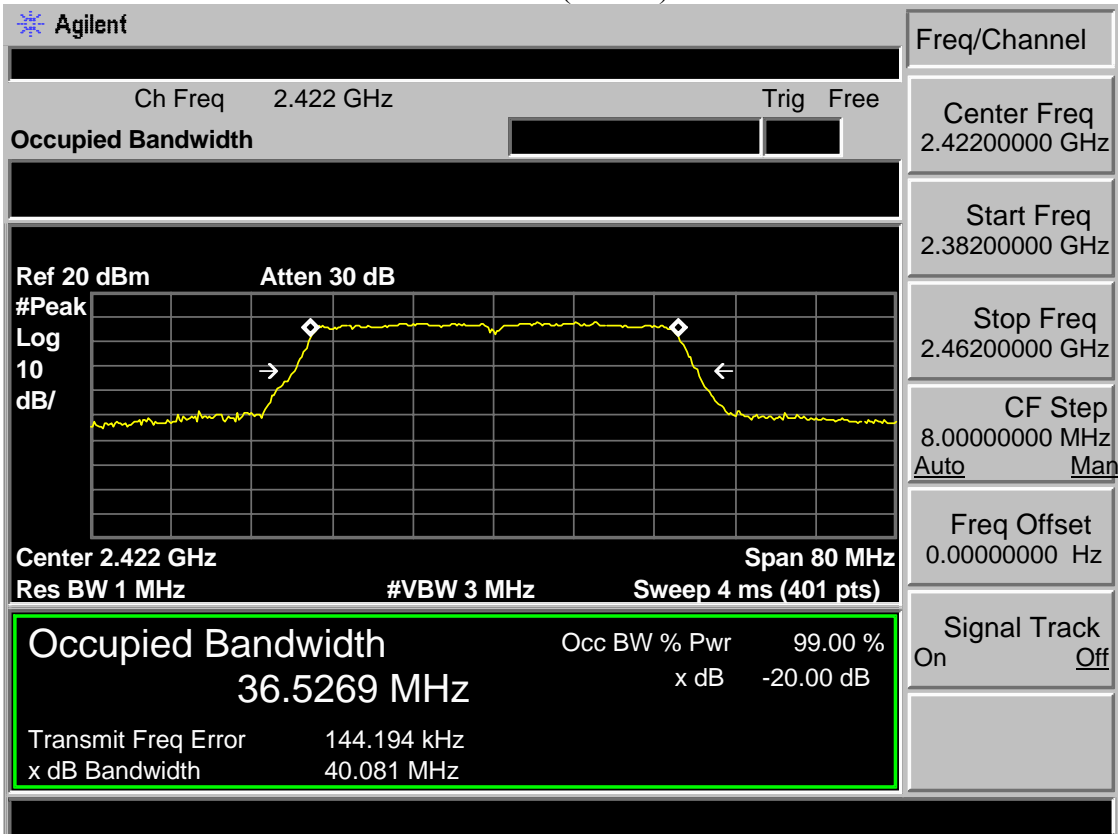

Test Mode: IEEE 802.11n HT40 2442MHz(ANT a)

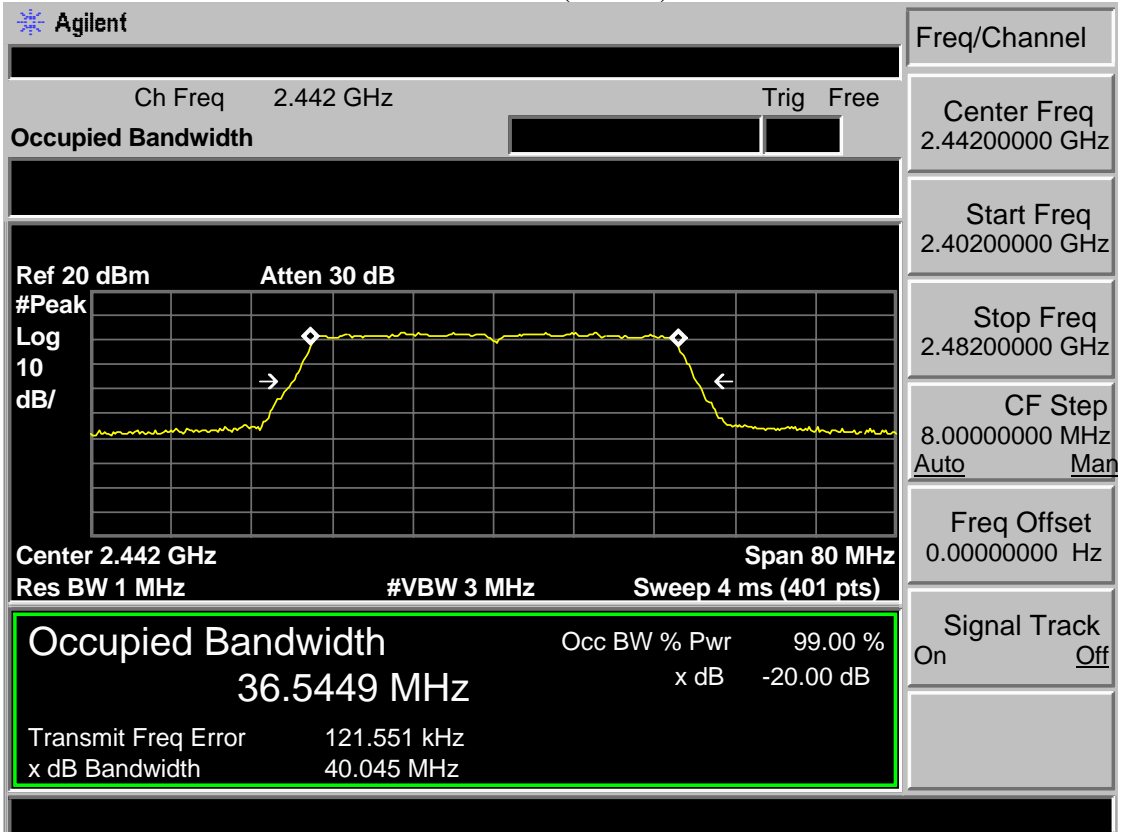

Test Mode: IEEE 802.11n HT40 2462MHz(ANT a)

Agilent

Freq/Channel  
 Center Freq  
2.46200000 GHz  
 Start Freq  
2.42200000 GHz  
 Stop Freq  
2.50200000 GHz  
 CF Step  
8.00000000 MHz  
Auto    Man

Ch Freq    2.462 GHz  
 Trig    Free

Occupied Bandwidth

Ref 20 dBm
Atten 30 dB

Center 2.462 GHz
Span 80 MHz


Res BW 1 MHz
#VBW 3 MHz
Sweep 4 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
36.5439 MHz	x dB	-20.00 dB
Transmit Freq Error	96.554 kHz	
x dB Bandwidth	40.100 MHz	


Freq Offset  
0.00000000 Hz

Signal Track  
On    Off

Test Mode: IEEE 802.11b 2412MHz(ANT b)

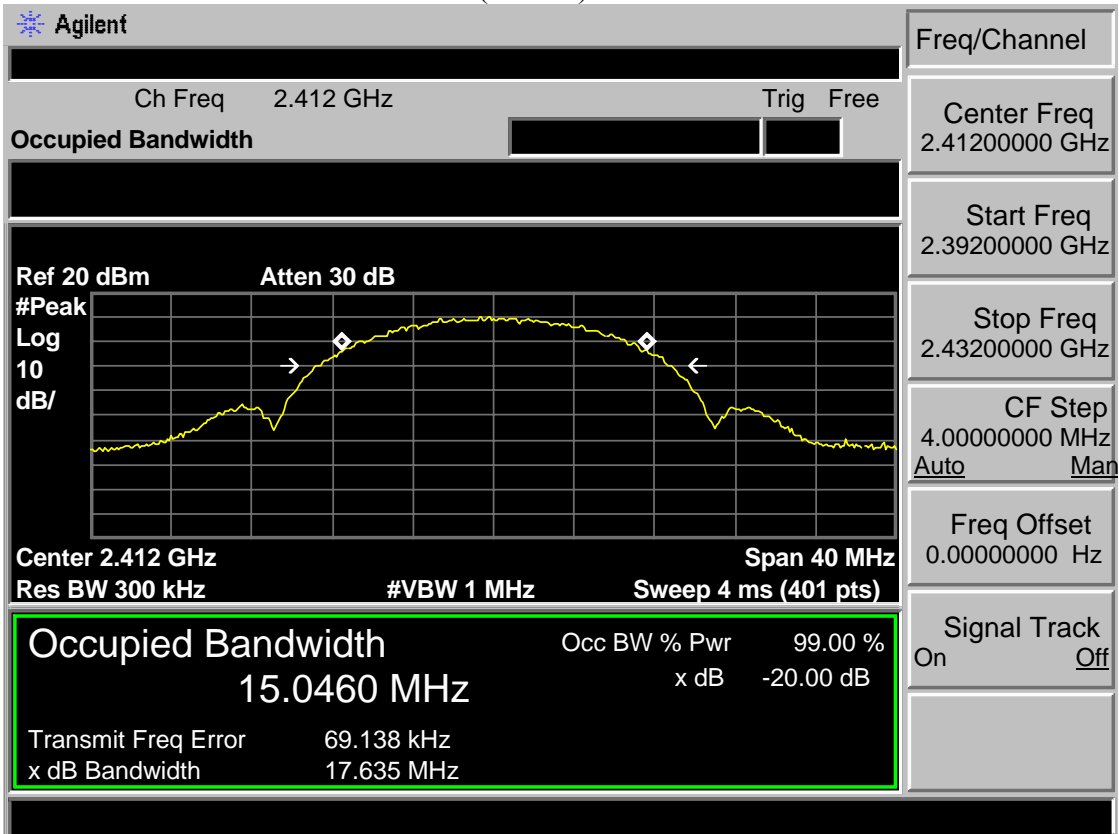

Test Mode: IEEE 802.11b 2442MHz(ANT b)

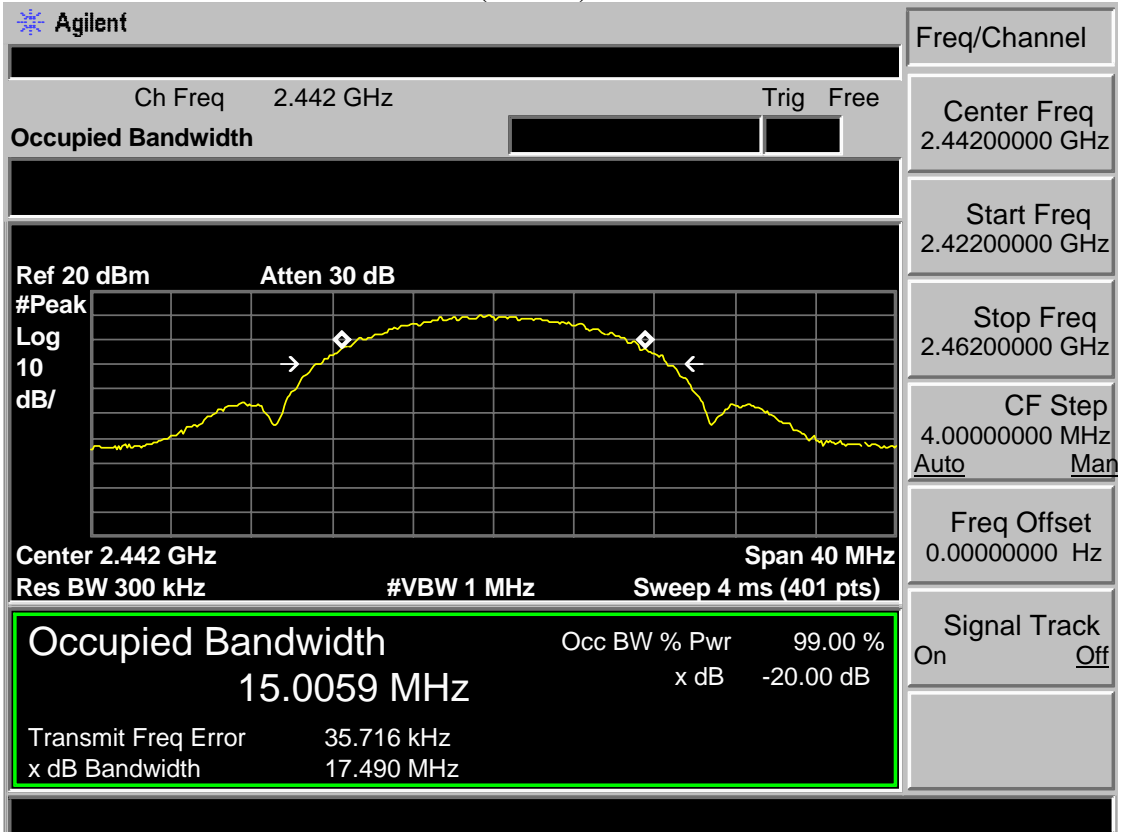

Test Mode: IEEE 802.11b 2472MHz(ANT b)

**Agilent**

Ch Freq 2.472 GHz Trig Free

**Occupied Bandwidth**

Ref 20 dBm Atten 30 dB

#Peak Log 10 dB/

Center 2.472 GHz Span 40 MHz

Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %

14.9795 MHz x dB -20.00 dB

Transmit Freq Error 4.869 kHz

x dB Bandwidth 17.489 MHz

Freq/Channel

Center Freq 2.47200000 GHz

Start Freq 2.45200000 GHz

Stop Freq 2.49200000 GHz


CF Step 4.00000000 MHz

Auto Man


Freq Offset 0.00000000 Hz

Signal Track On Off

Test Mode: IEEE 802.11g 2412MHz(ANT b)

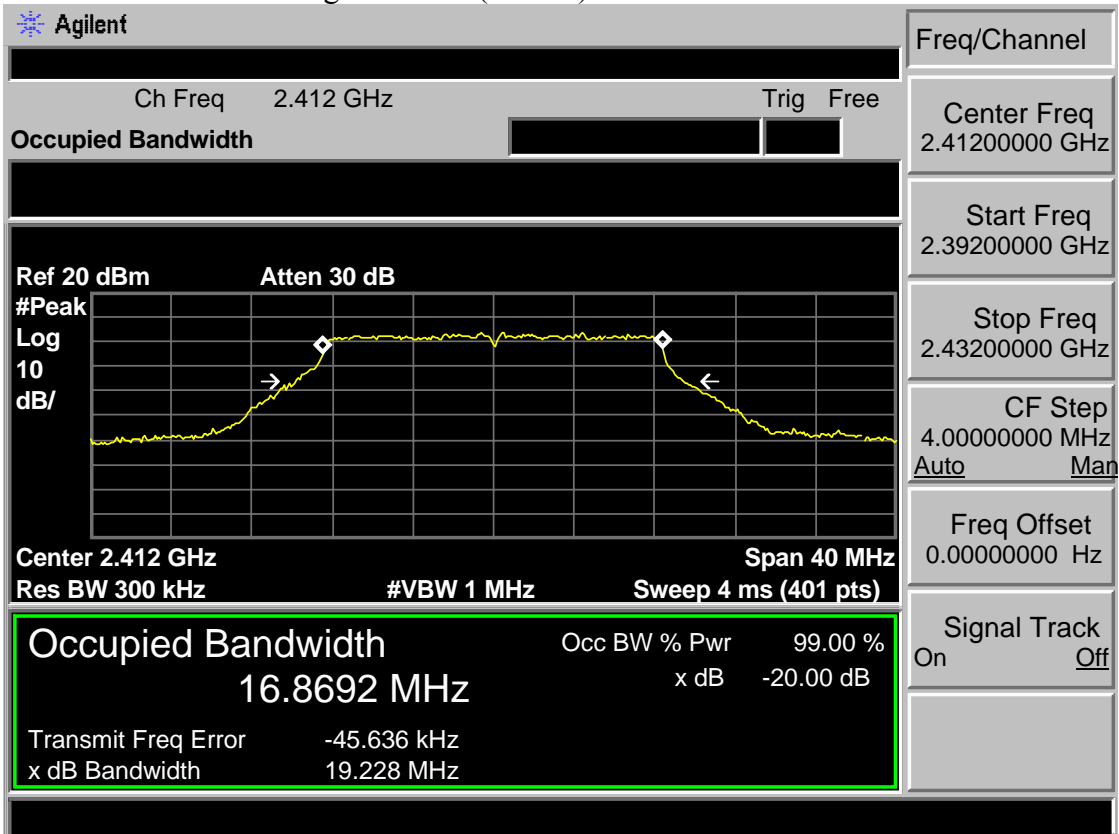


Test Mode: IEEE 802.11g 2442MHz(ANT b)

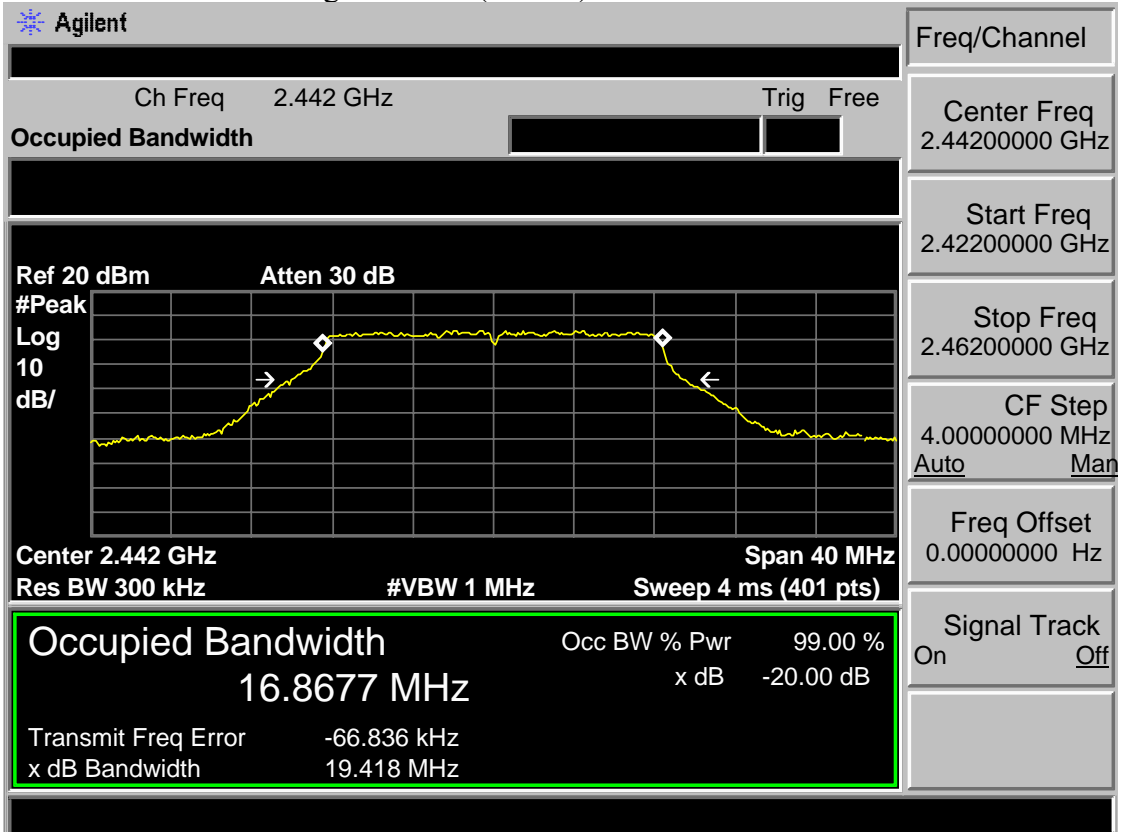





Test Mode: IEEE 802.11g 2472MHz(ANT b)

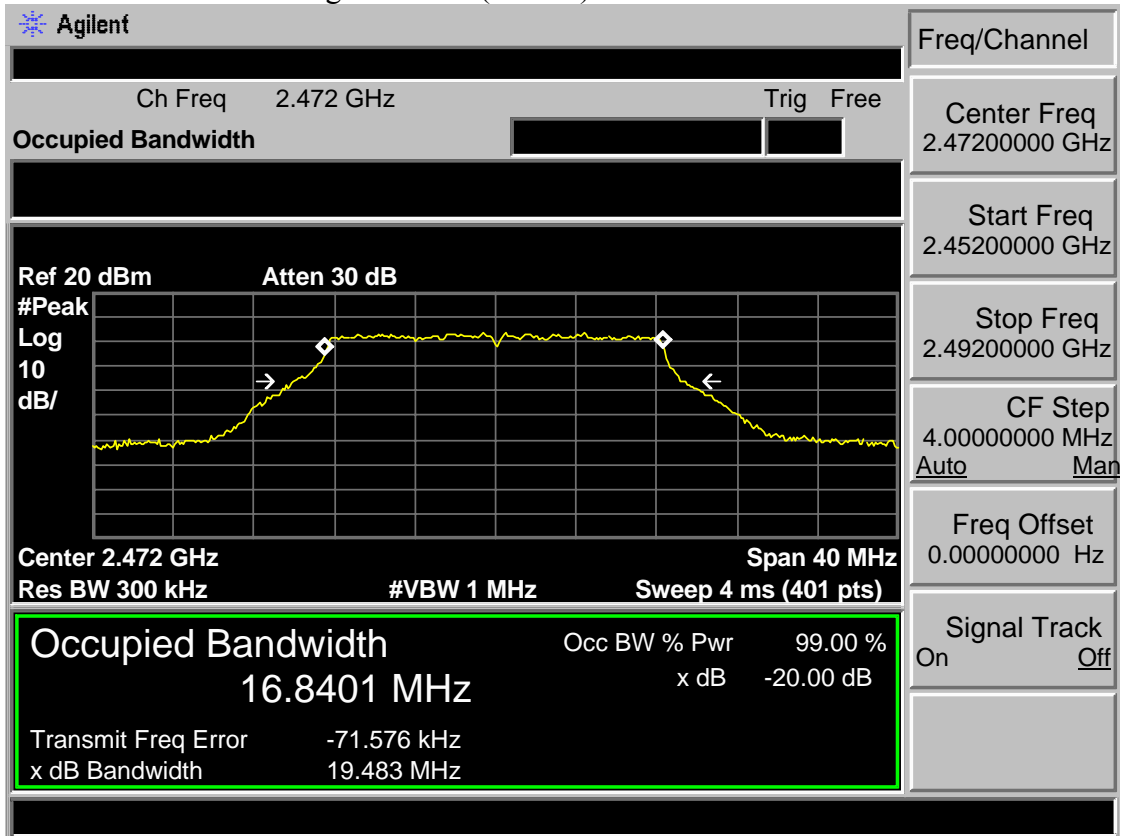


Test Mode: IEEE 802.11n HT20 2412MHz(ANT b)

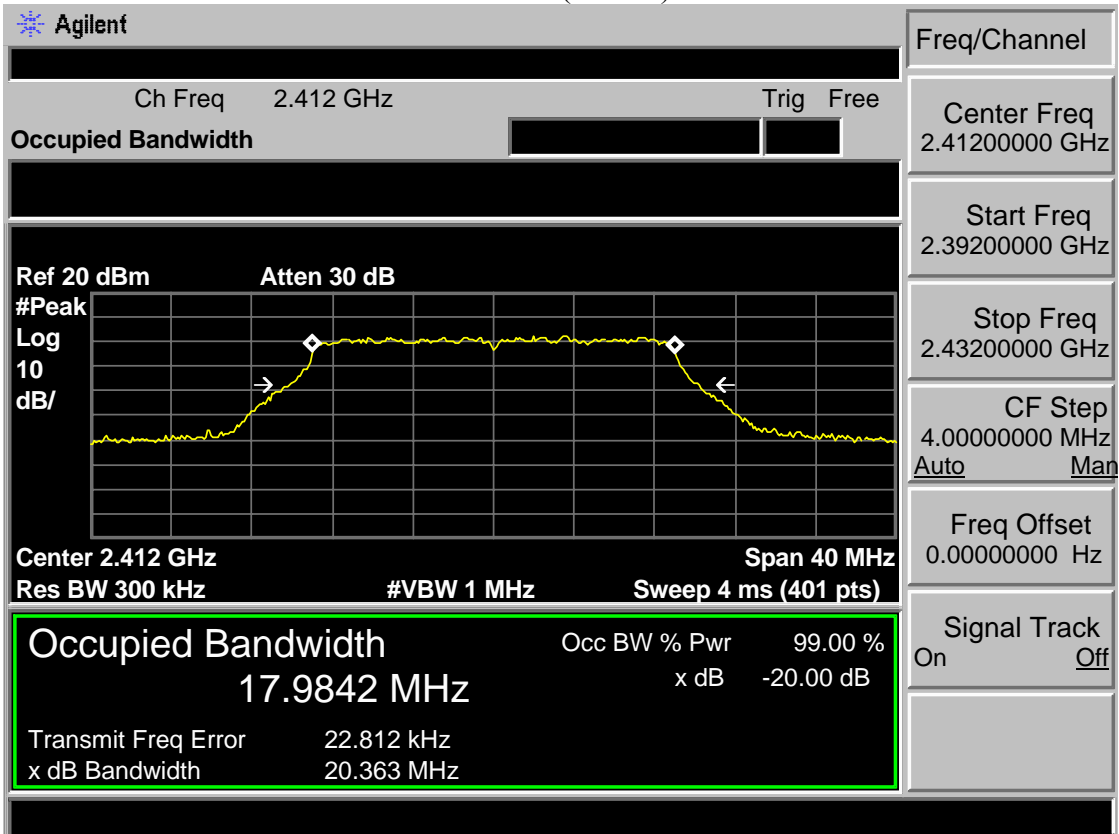


Test Mode: IEEE 802.11n HT20 2442MHz(ANT b)

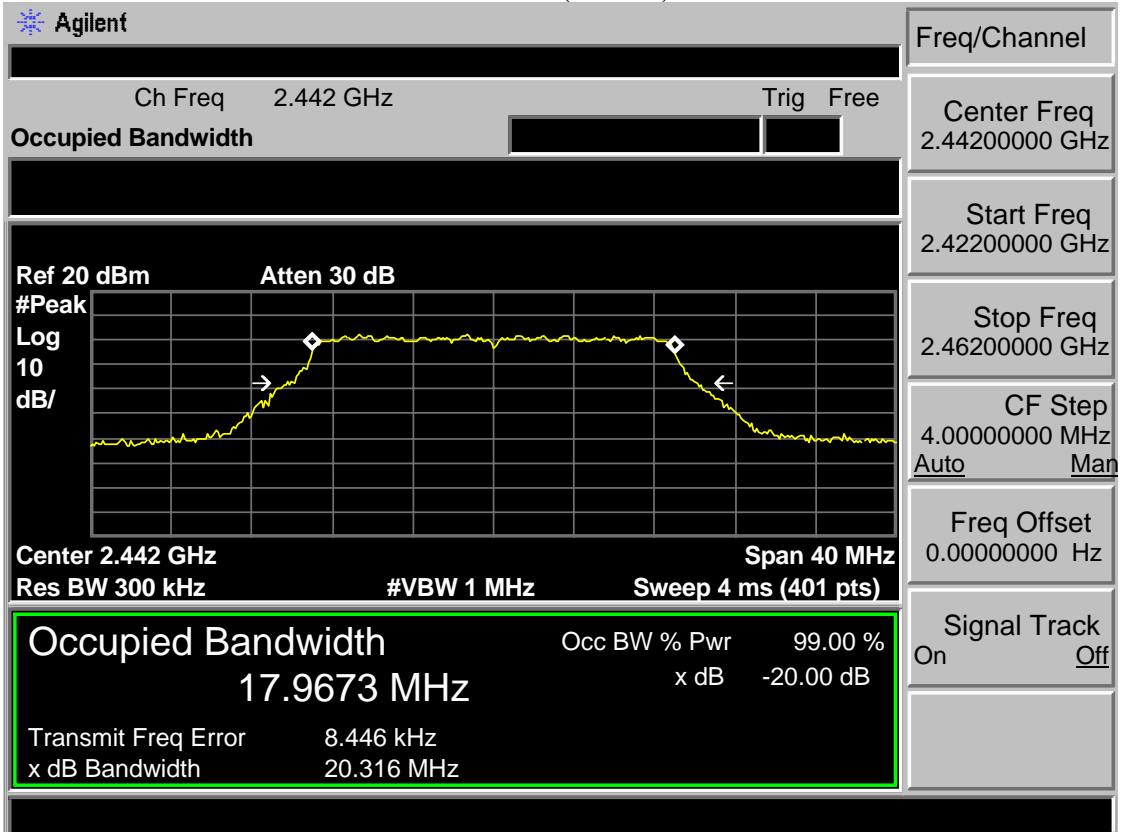


Test Mode: IEEE 802.11n HT20 2472MHz(ANT b)

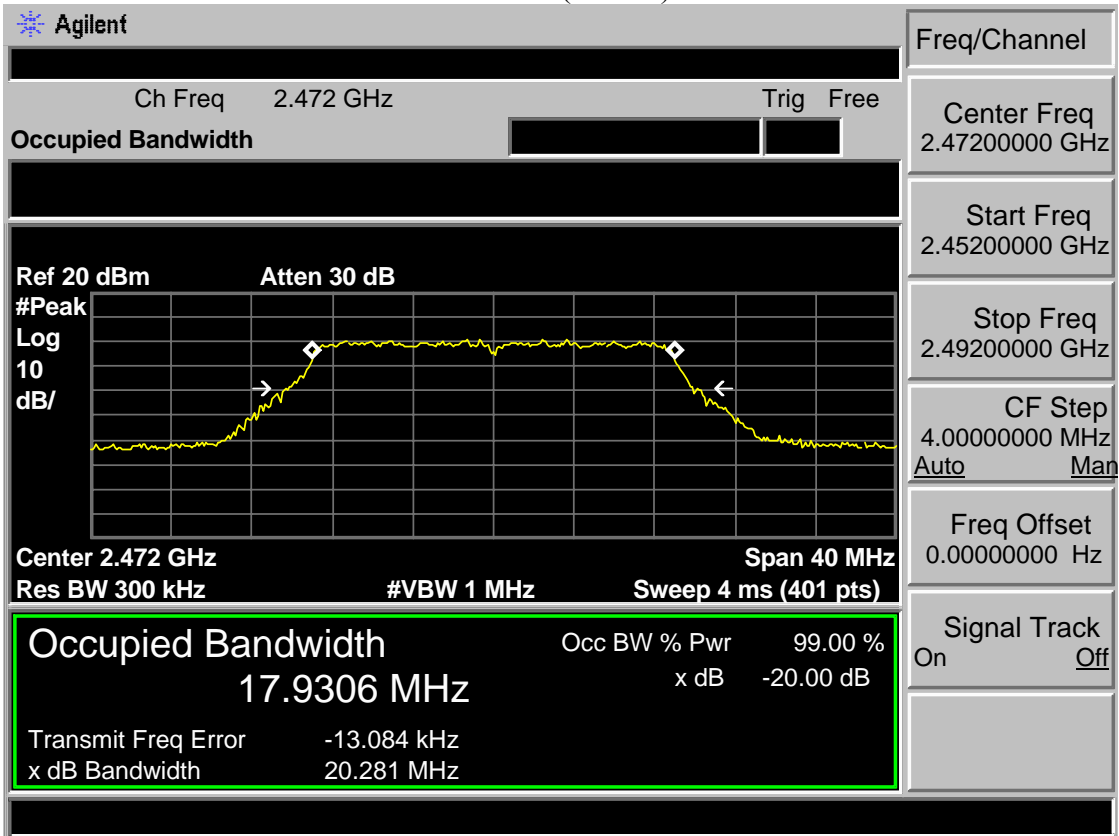

Test Mode: IEEE 802.11n HT40 2422MHz(ANT b)

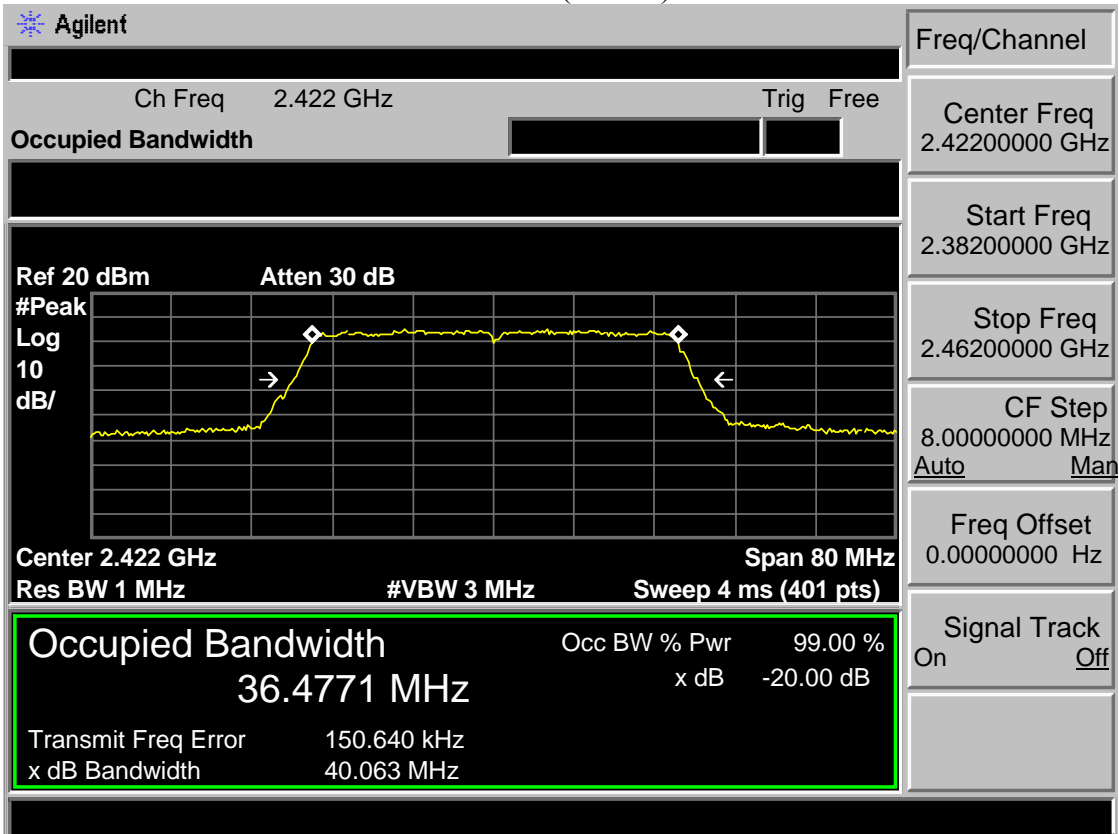

Test Mode: IEEE 802.11n HT40 2442MHz(ANT b)

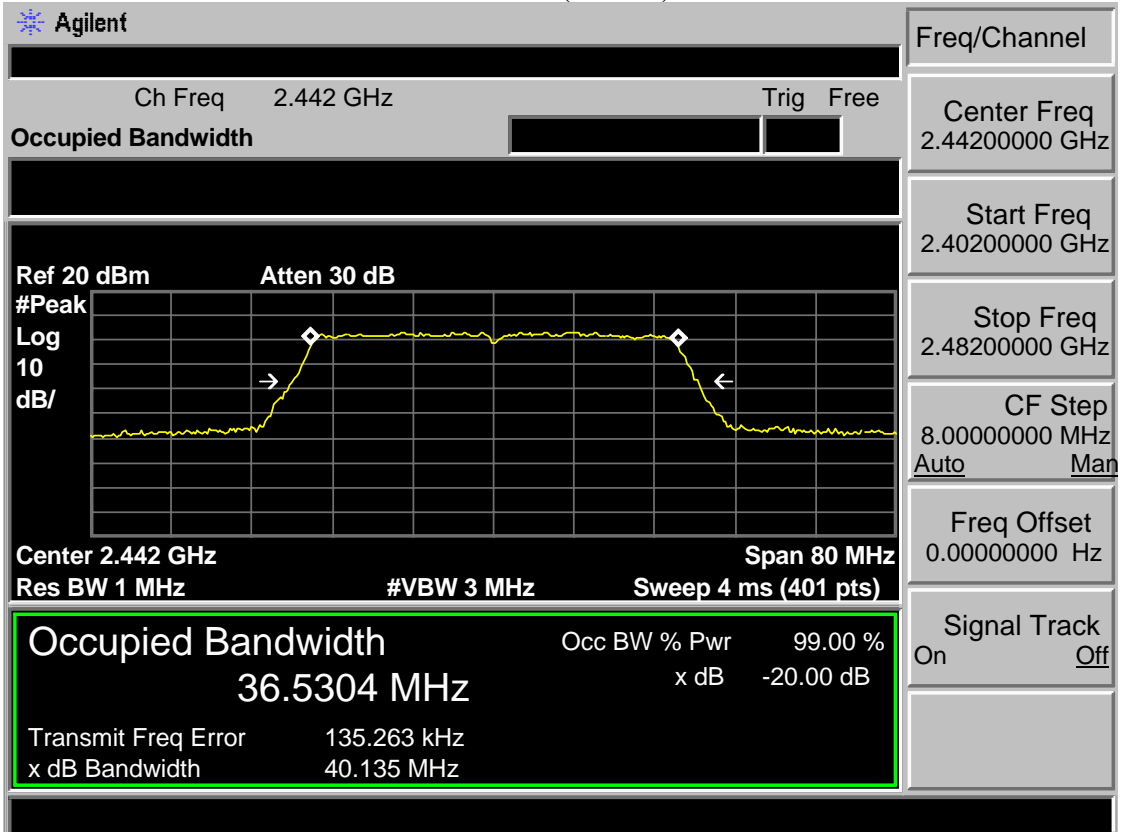

Test Mode: IEEE 802.11n HT40 2462MHz(ANT b)

Agilent

Freq/Channel  
 Center Freq  
2.46200000 GHz  
 Start Freq  
2.42200000 GHz  
 Stop Freq  
2.50200000 GHz  
 CF Step  
8.00000000 MHz  
Auto Man  
 Freq Offset  
0.00000000 Hz  
 Signal Track  
On Off

Ch Freq 2.462 GHz  
 Trig Free

Occupied Bandwidth

Ref 20 dBm
Atten 30 dB

#Peak									
Log									
10									
dB/									

Center 2.462 GHz
Span 80 MHz

Res BW 1 MHz
#VBW 3 MHz
Sweep 4 ms (401 pts)

<b>Occupied Bandwidth</b>	Occ BW % Pwr	99.00 %
<b>36.4895 MHz</b>	x dB	-20.00 dB
Transmit Freq Error	85.215 kHz	
x dB Bandwidth	40.013 MHz	

EST Technology Co., Ltd

Report No. ESTE-R1506037

Page 229 of 281

## 7 OUTPUT POWER TEST

### 7.1 Limit

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm)

### 7.2 Test Procedure

#### 7.3 Test Procedure

- 1, Connected the EUT's antenna port to spectrum analyzer device.
- 2, Follow the test procedure as described in KDB 558074
  - (1)Set span to at least 1.5 times the OBW.
  - (2)Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
  - (3)Set VBW  $\geq 3 \times$  RBW.
  - (4)Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
  - (4)Sweep time = auto.
  - (5)Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
  - (6)If transmit duty cycle  $< 98 \%$ , use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98 \%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
  - (7)Trace average at least 100 traces in power averaging (i.e., RMS) mode.
  - (8)Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

7.4 Test Result


EUT: LED TV			
M/N: WE85NC4210			
Test date: 2015-06-09		Tested by: Tony.Tang	Test site: RF Site
Pass			
Test Mode	CH	Conducted Power (dBm)	Limit (dBm)
IEEE 802.11 b (ANT a)	CH1	13.64	30
	CH7	13.06	30
	CH13	12.71	30
IEEE 802.11 g (ANT a)	CH1	11.91	30
	CH7	11.78	30
	CH13	11.87	30
IEEE 802.11 b (ANT b)	CH1	11.73	30
	CH7	11.66	30
	CH13	10.71	30
IEEE 802.11 g (ANT b)	CH1	10.07	30
	CH7	9.89	30
	CH13	9.64	30
Conclusion : PASS			

EUT:LED TV						
M/N: WE85NC4210						
Test Date:2015-06-09				Tested by: Tony		
Test mode	CH			Conducted Power (dBm)	Limit (dBm)	Result
		ANT a	ANT b			
IEEE 802.11 n HT20	CH1	10.26	9.17	12.76	<b>30</b>	Pass
	CH7	8.80	9.42	12.13		Pass
	CH13	8.76	8.66	11.72		Pass
IEEE 802.11 n HT40	CH1	9.52	6.99	11.45		Pass
	CH5	7.58	7.73	10.67		Pass
	CH9	7.44	6.57	10.04		Pass




### 7.5 Test Data


Test Mode: IEEE 802.11 b 2412MHz(ANT a)

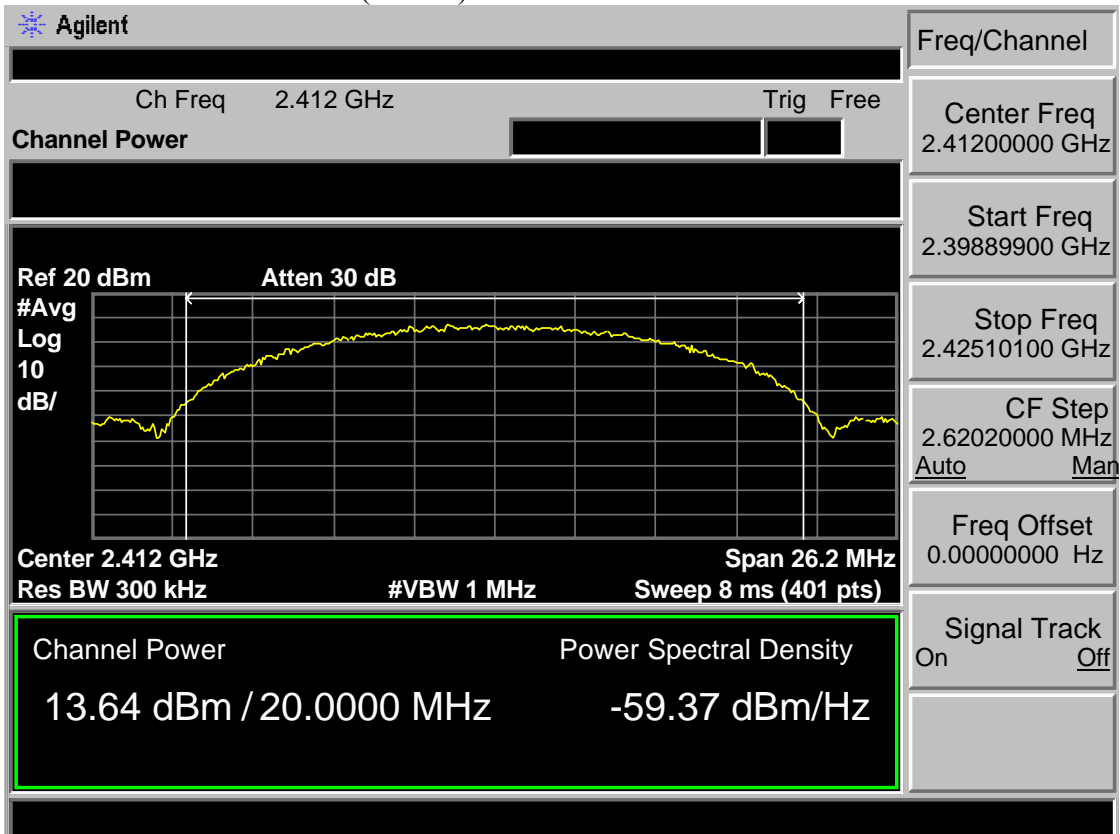


Test Mode: IEEE 802.11 b 2442MHz(ANT a)

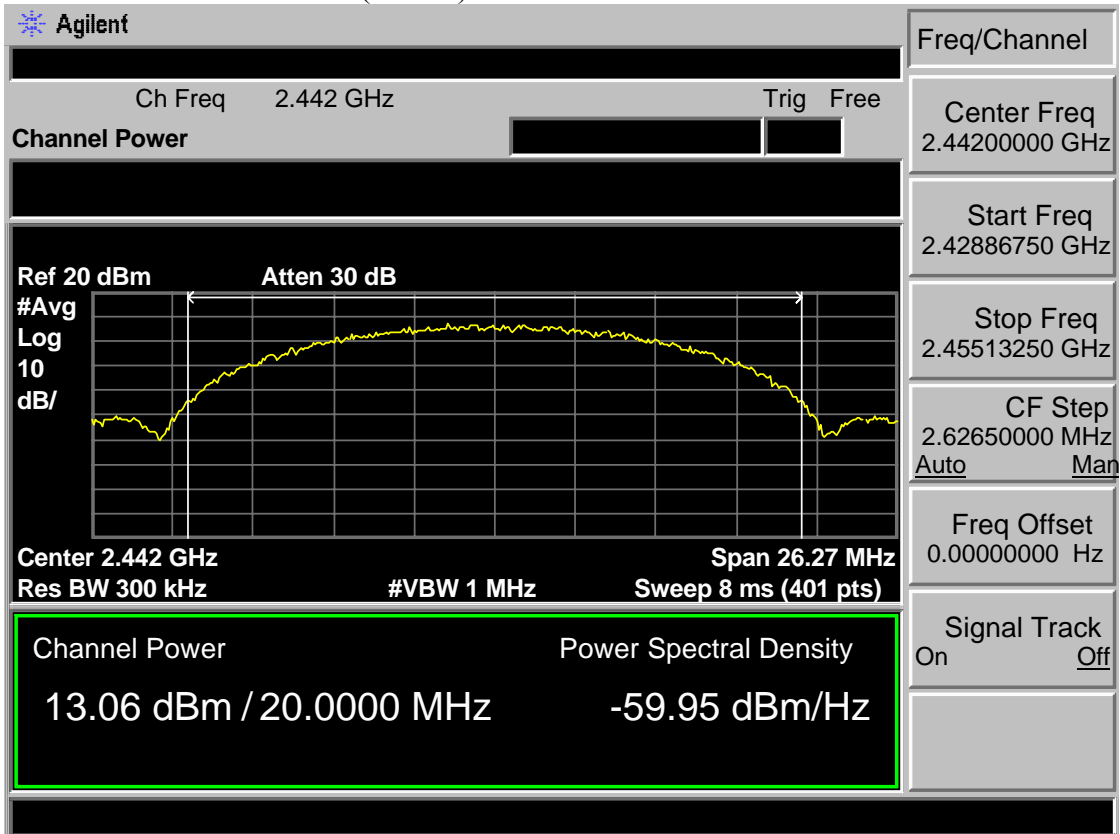


Test Mode: IEEE 802.11 b 2472MHz(ANT a)

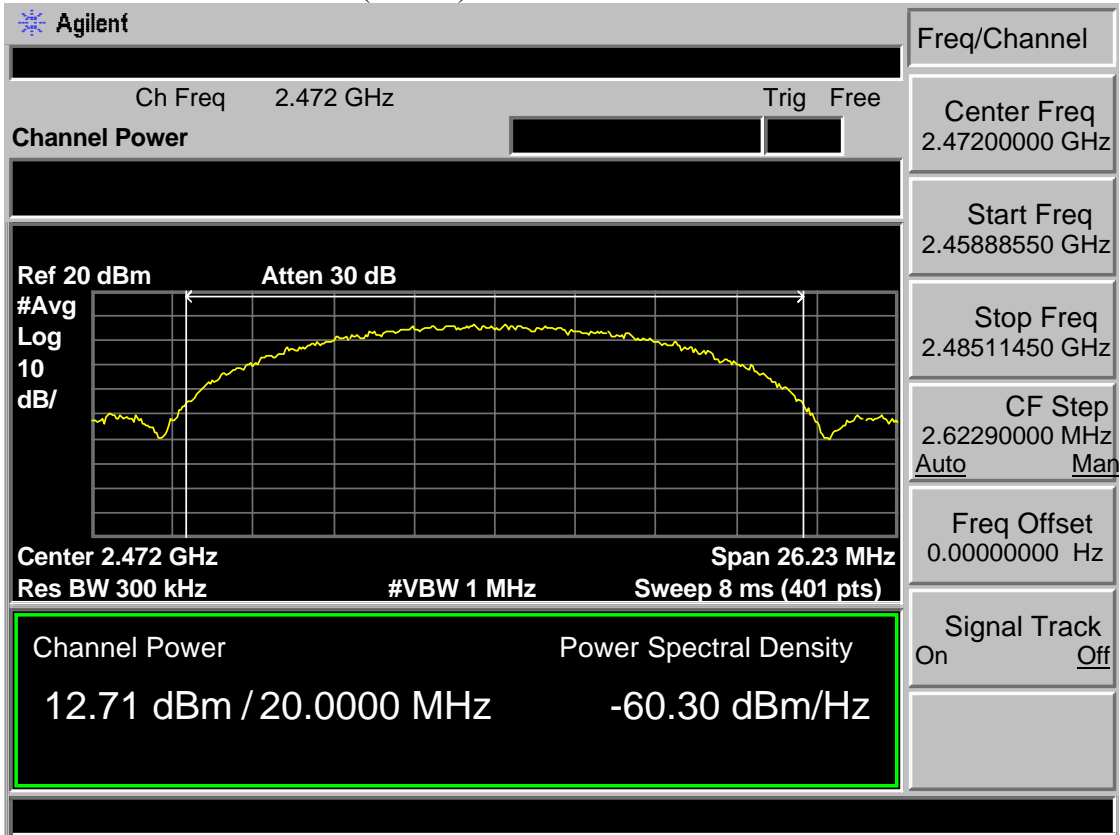


Test Mode: IEEE 802.11 g 2412MHz(ANT a)

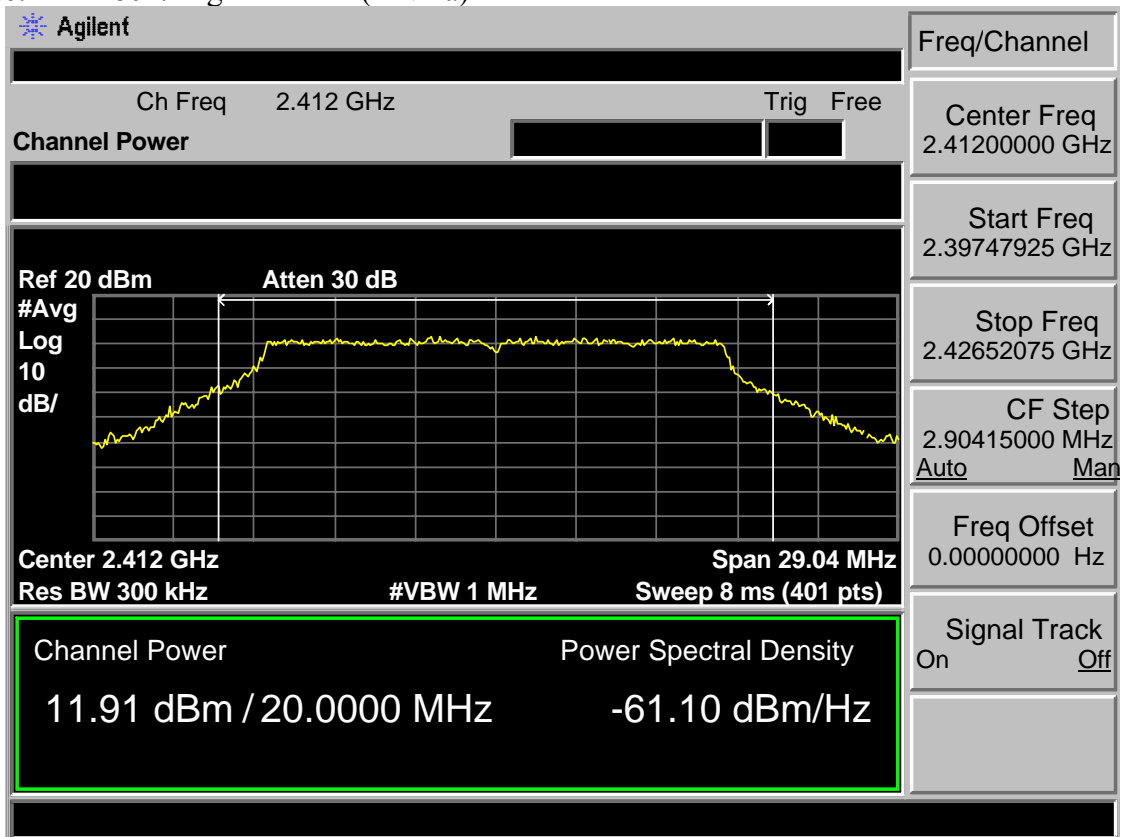


Test Mode: IEEE 802.11 g 2442MHz(ANT a)

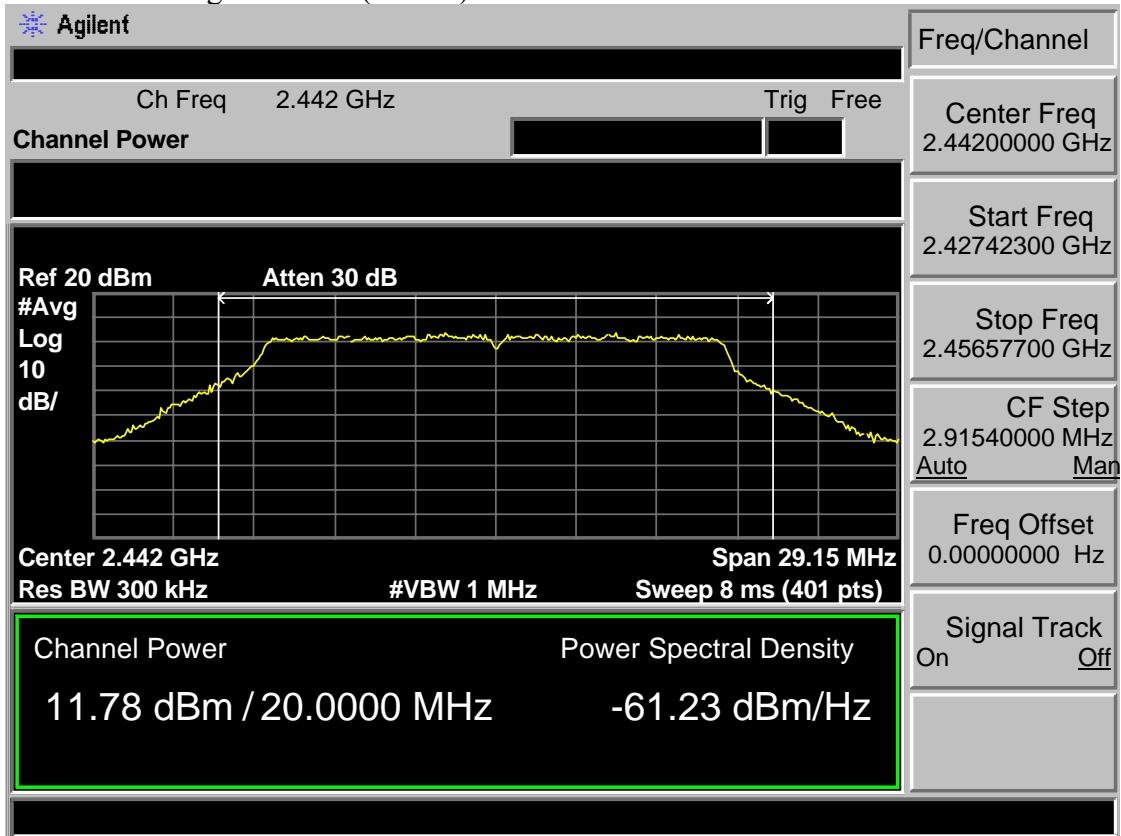


Test Mode: IEEE 802.11 g 2472MHz(ANT a)

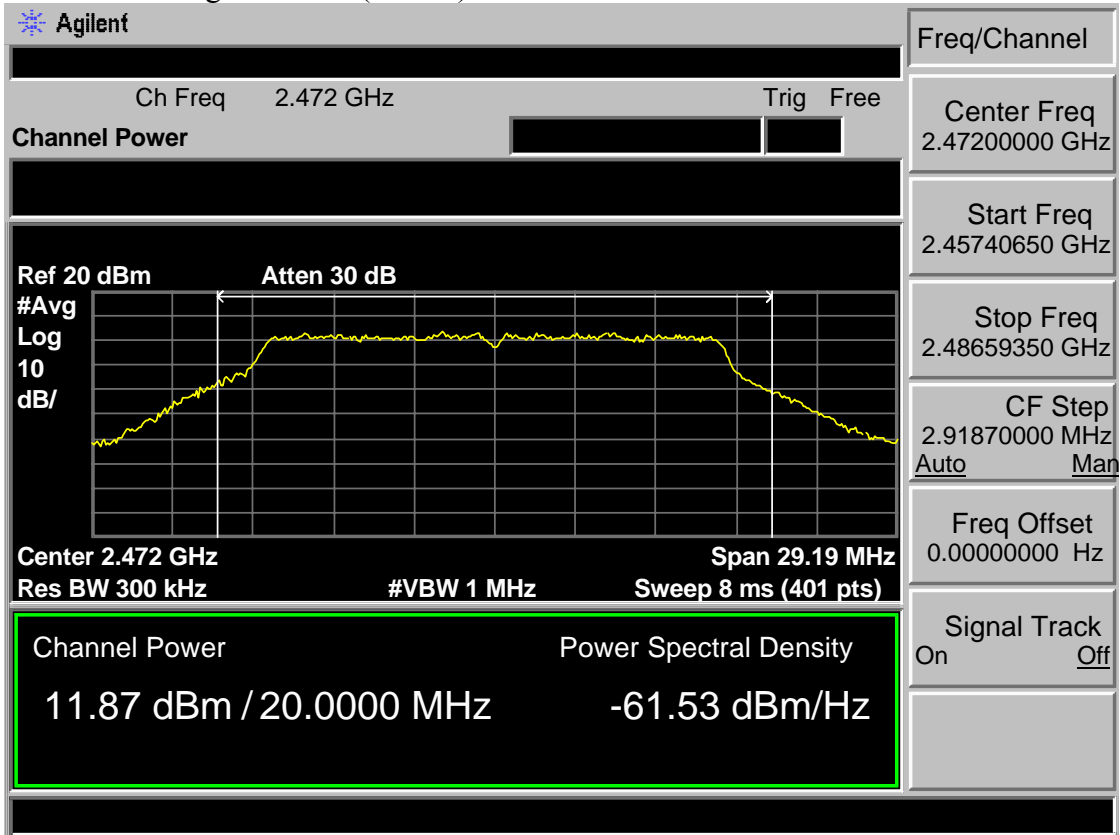


Test Mode: IEEE 802.11n HT20 2412MHz(ANT a)

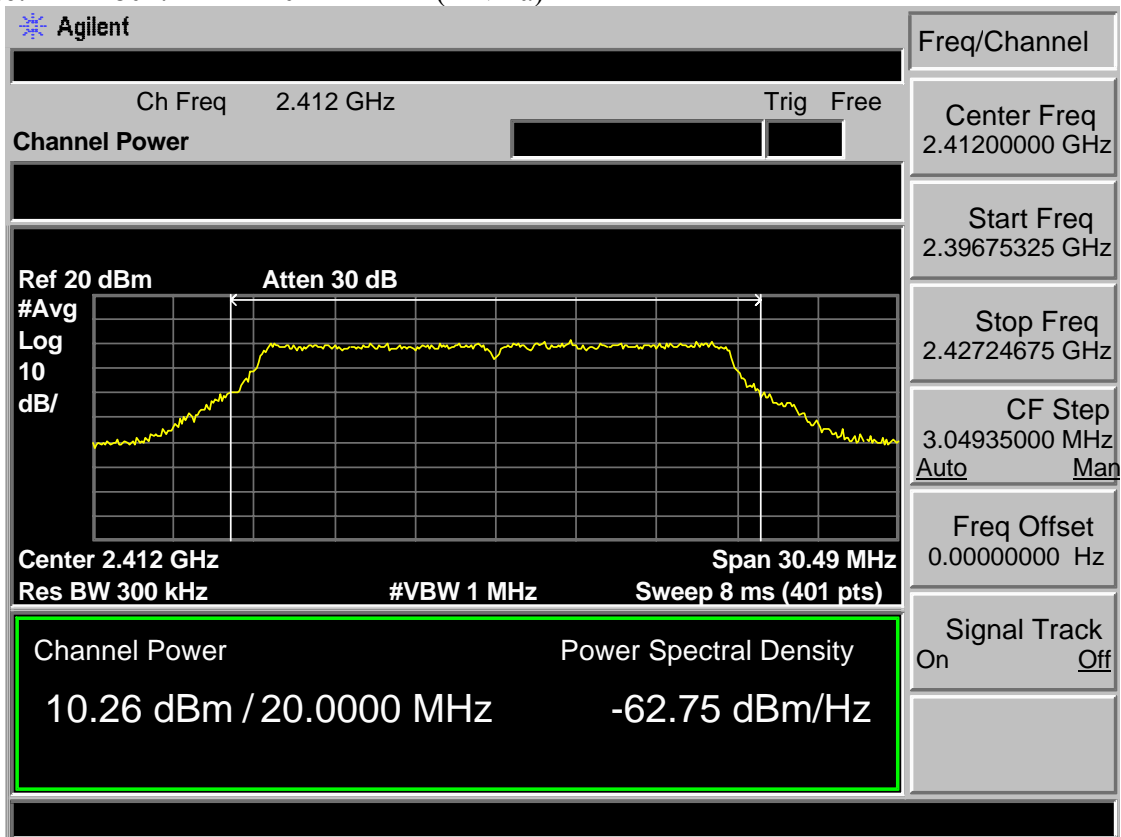


Test Mode: IEEE 802.11 n HT20 2442MHz(ANT a)

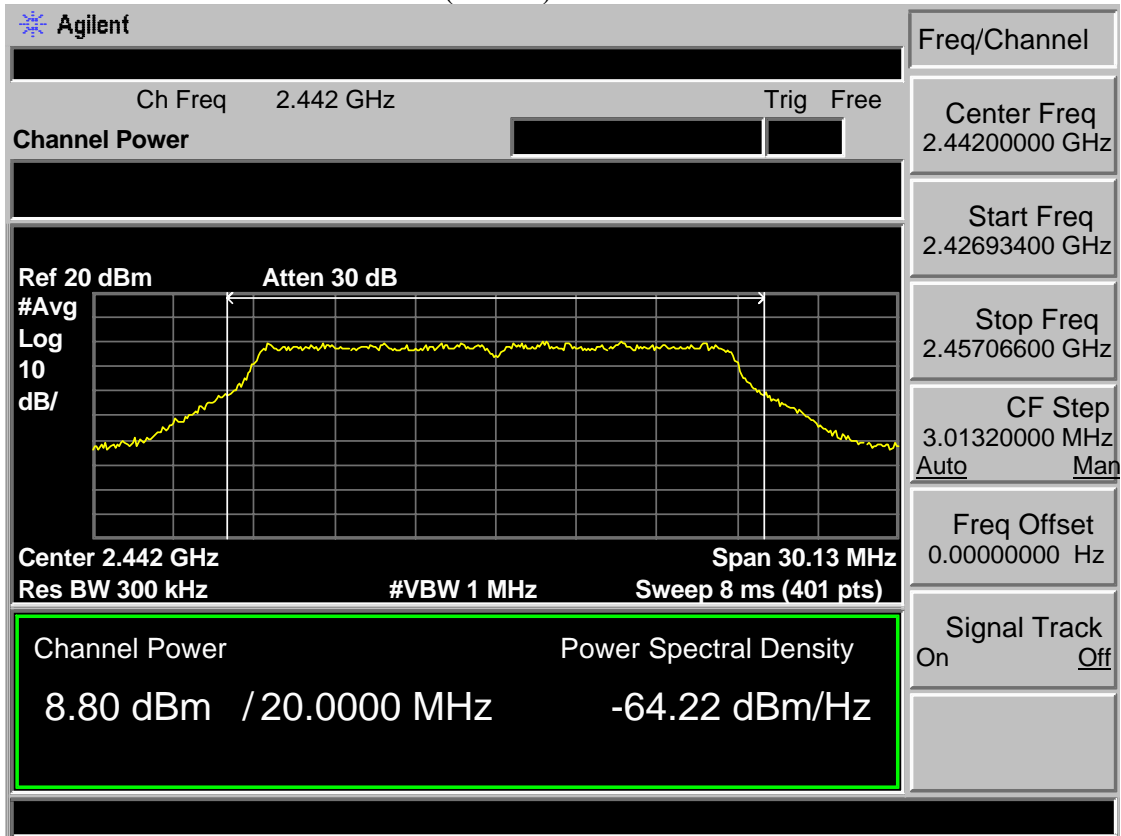


Test Mode: IEEE 802.11 n HT20 2472MHz(ANT a)

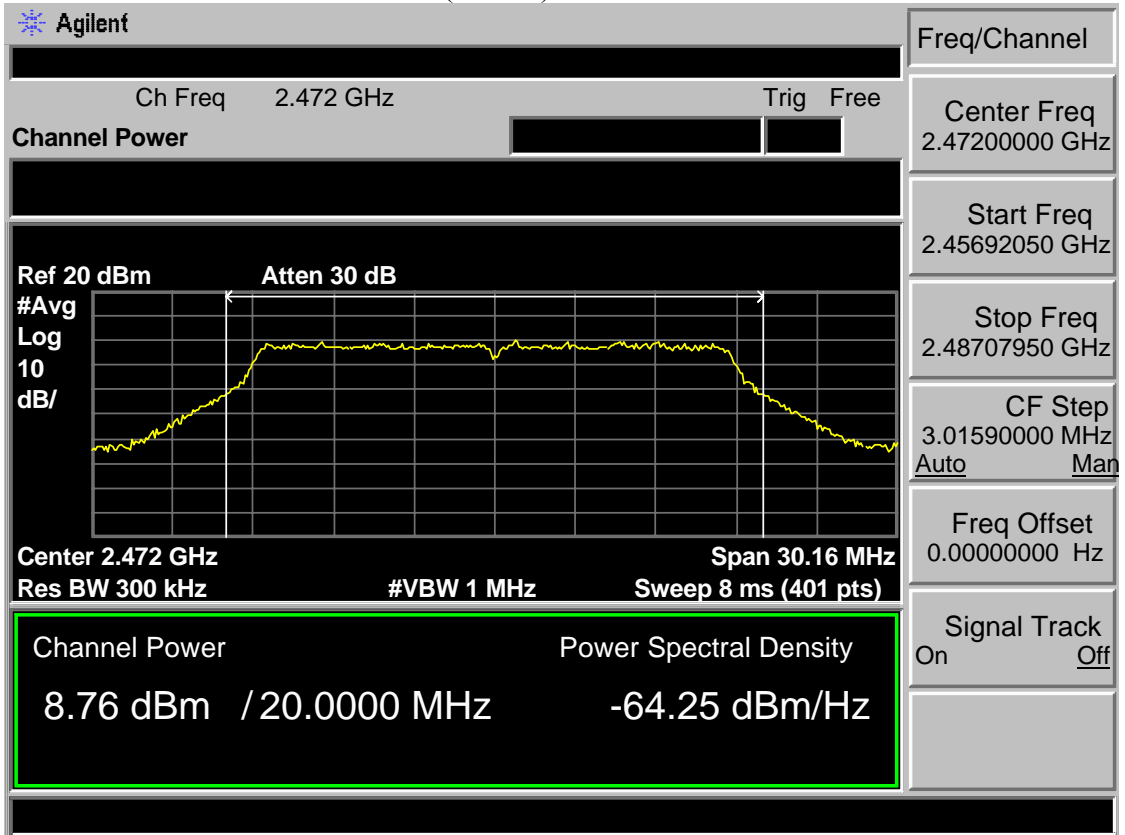


Test Mode: IEEE 802.11 n HT40 2422MHz(ANT a)

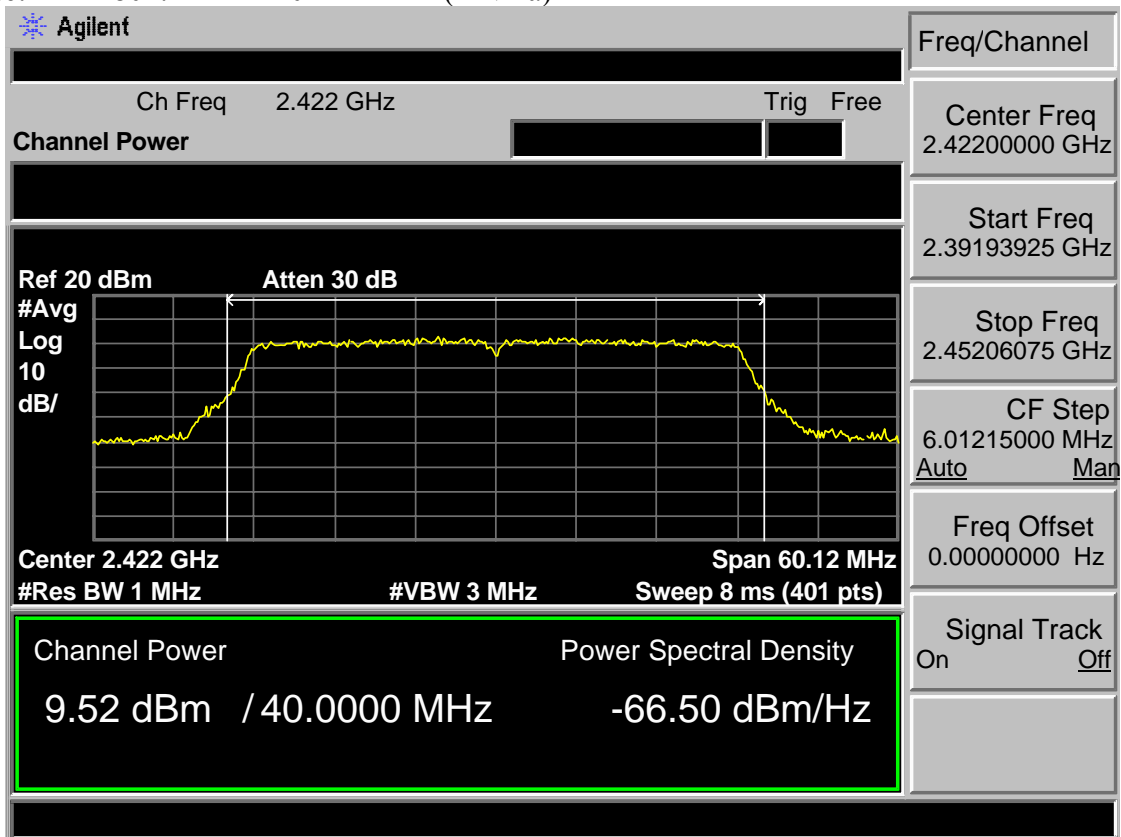

Test Mode: IEEE 802.11 n HT40 2442MHz(ANT a)

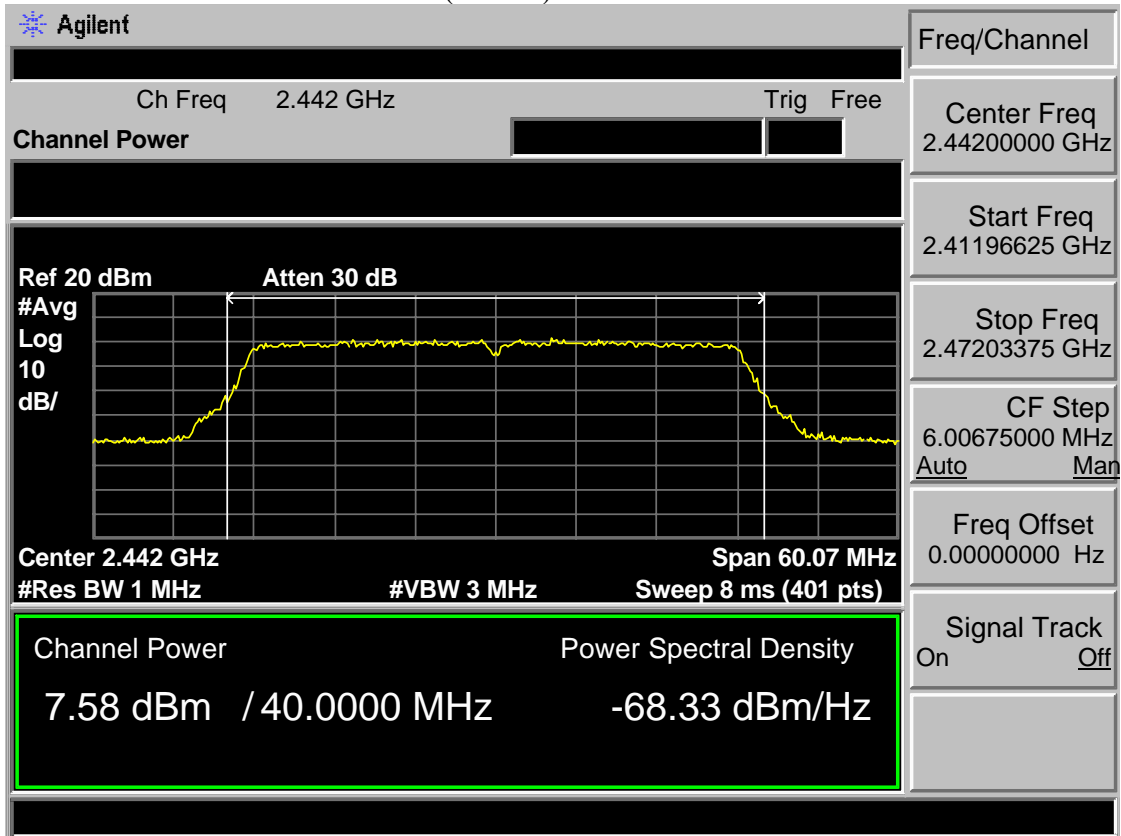


Test Mode: IEEE 802.11 n HT40 2462MHz(ANT a)

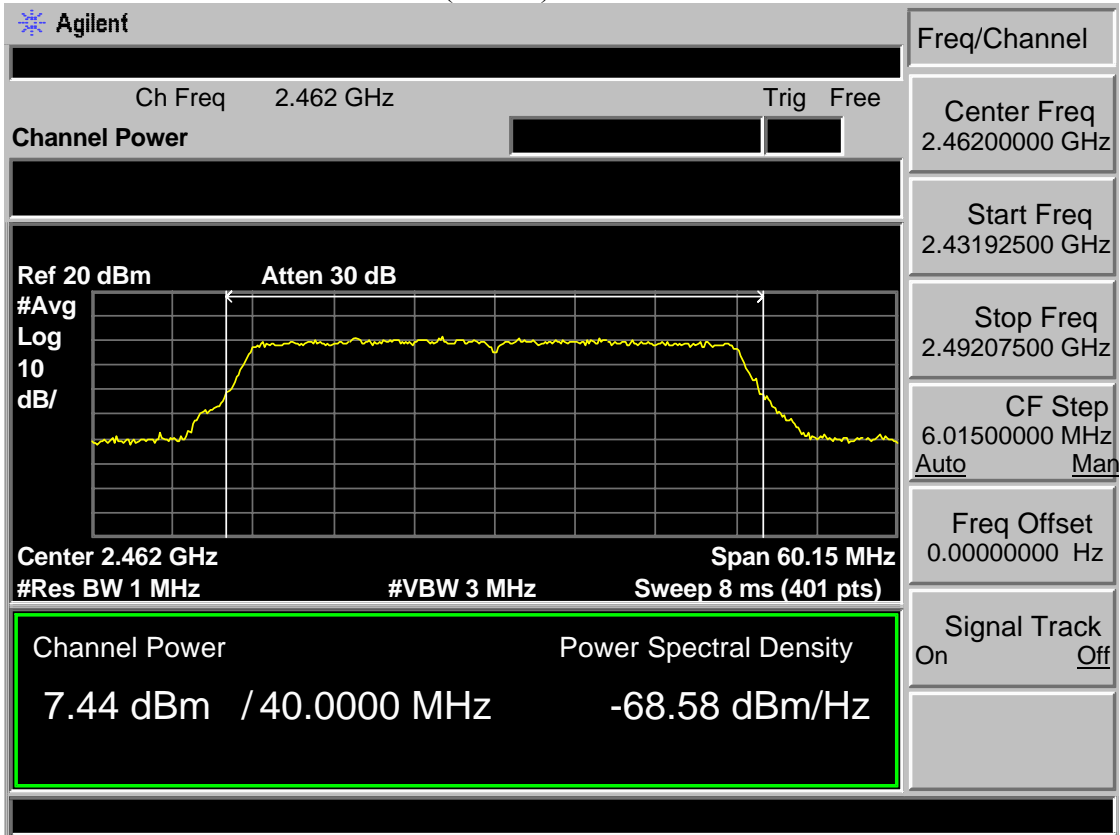





Test Mode: IEEE 802.11b 2412MHz(ANT b)

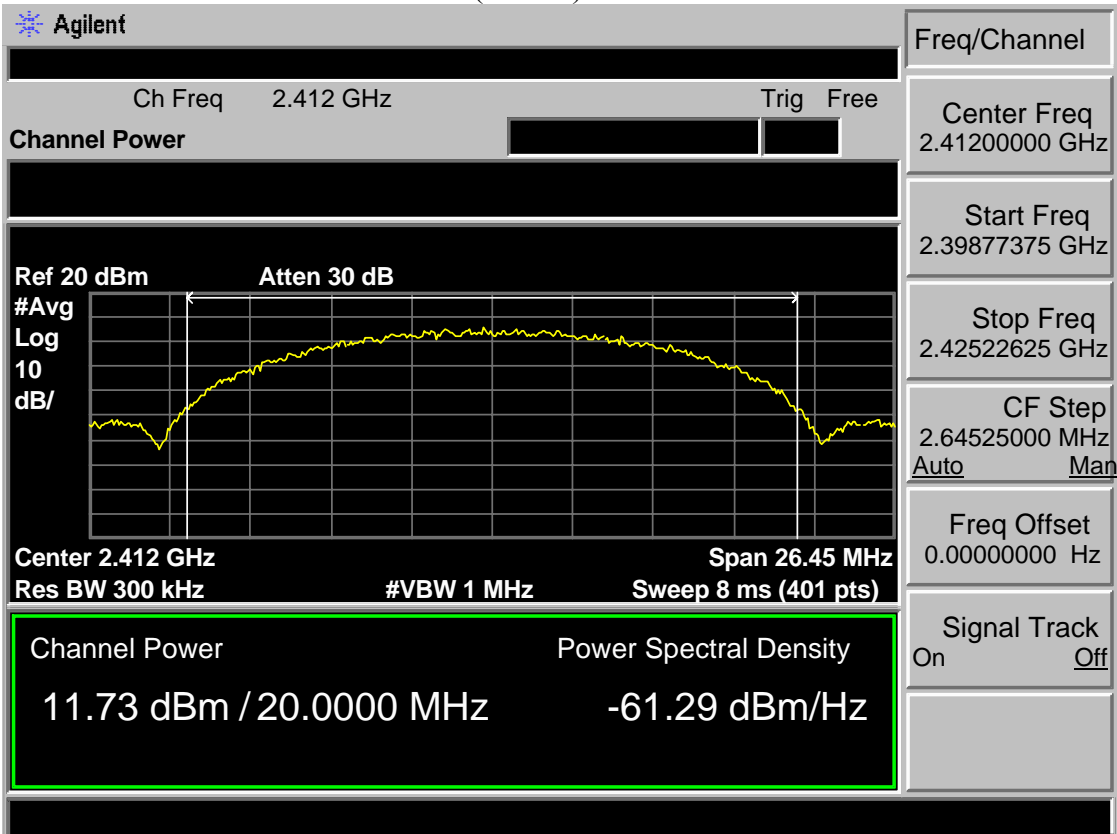


Test Mode: IEEE 802.11b 2442MHz(ANT b)

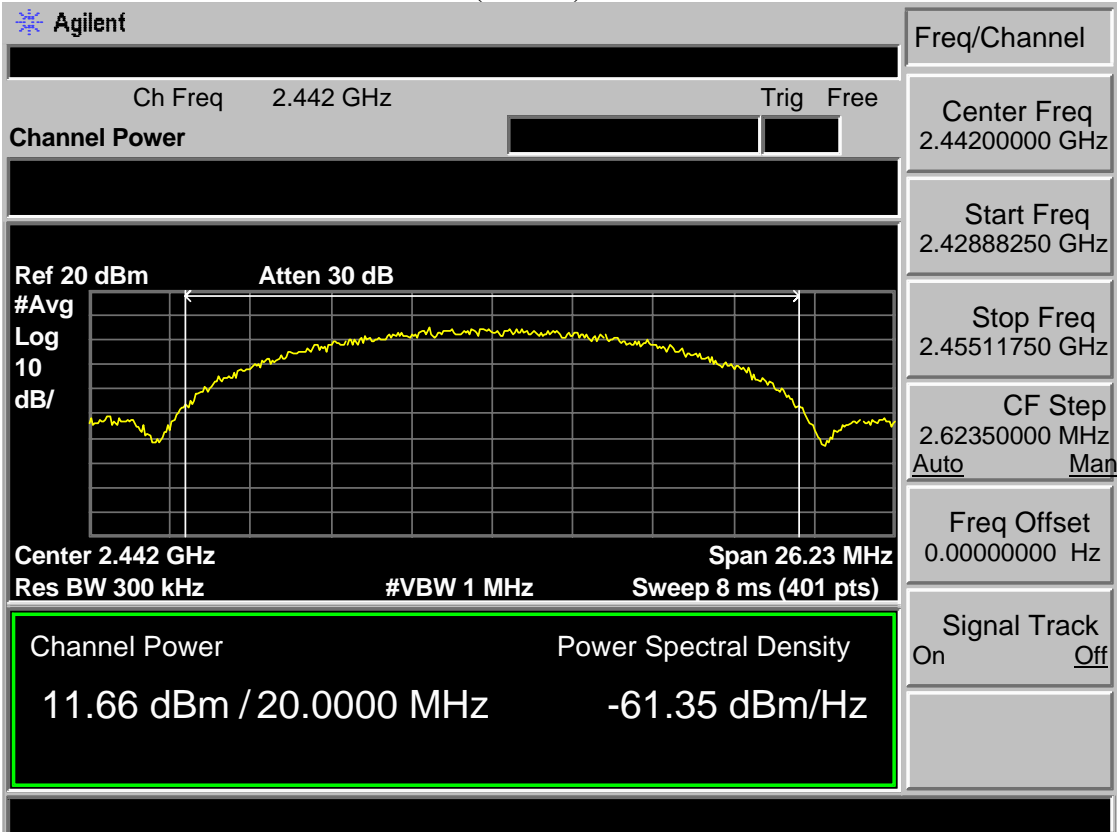


Test Mode: IEEE 802.11b 2472MHz(ANT b)

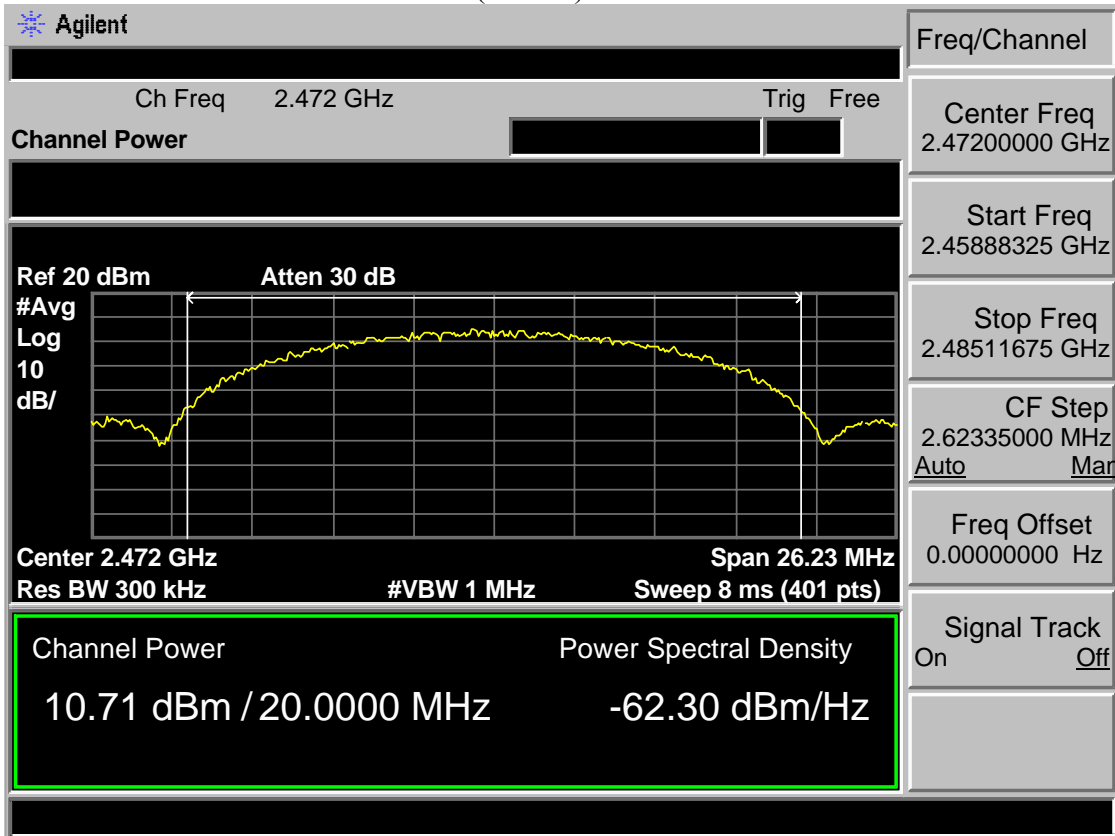


Test Mode: IEEE 802.11g 2412MHz(ANT b)

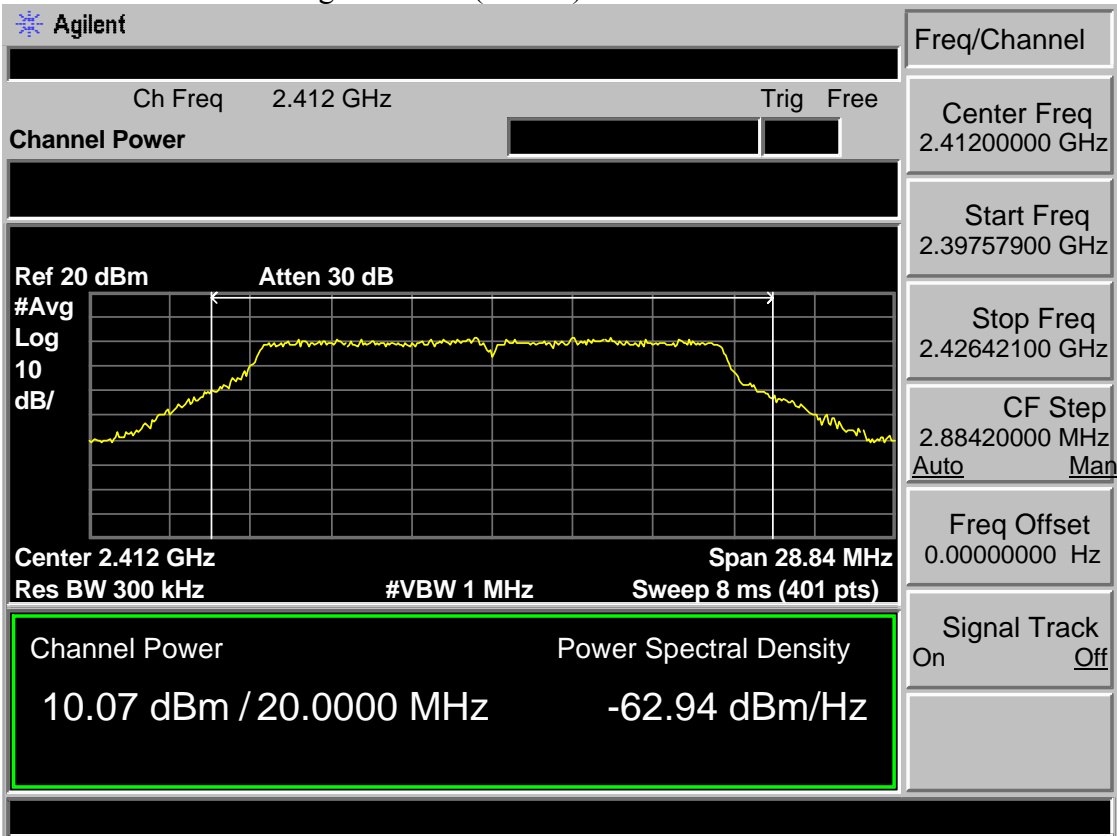


Test Mode: IEEE 802.11g 2442MHz(ANT b)

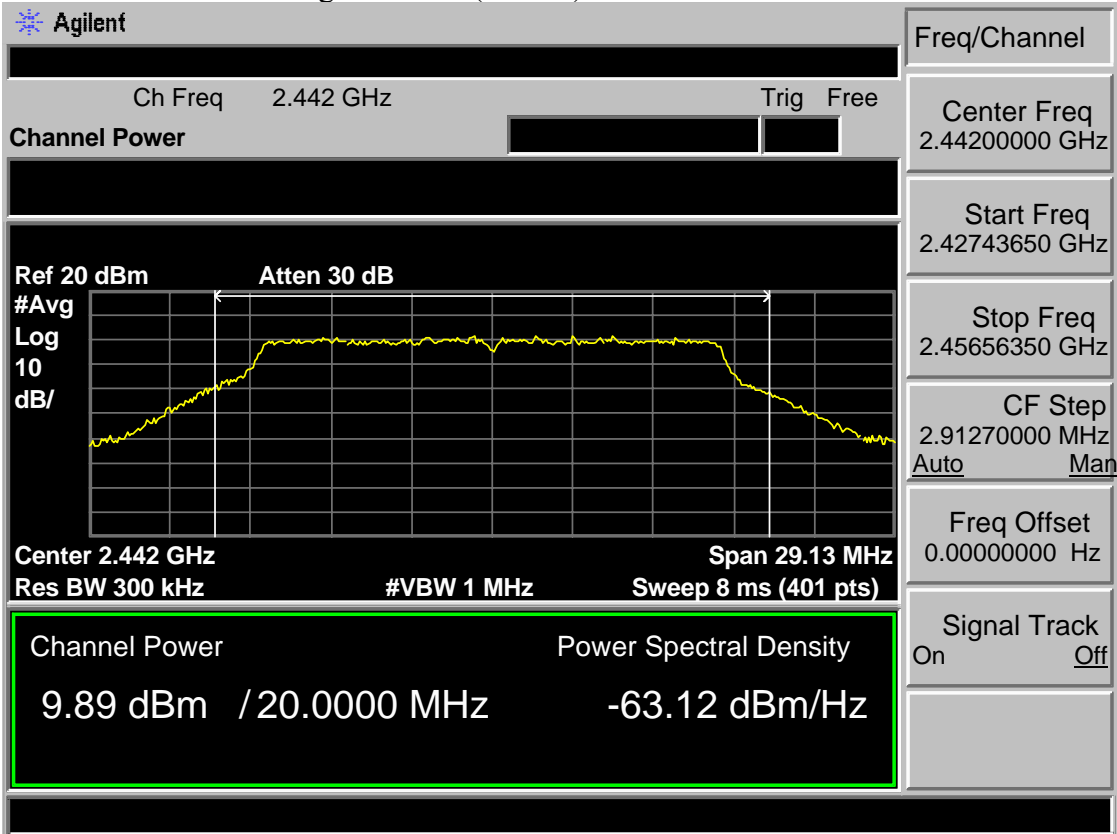


Test Mode: IEEE 802.11g 2472MHz(ANT b)

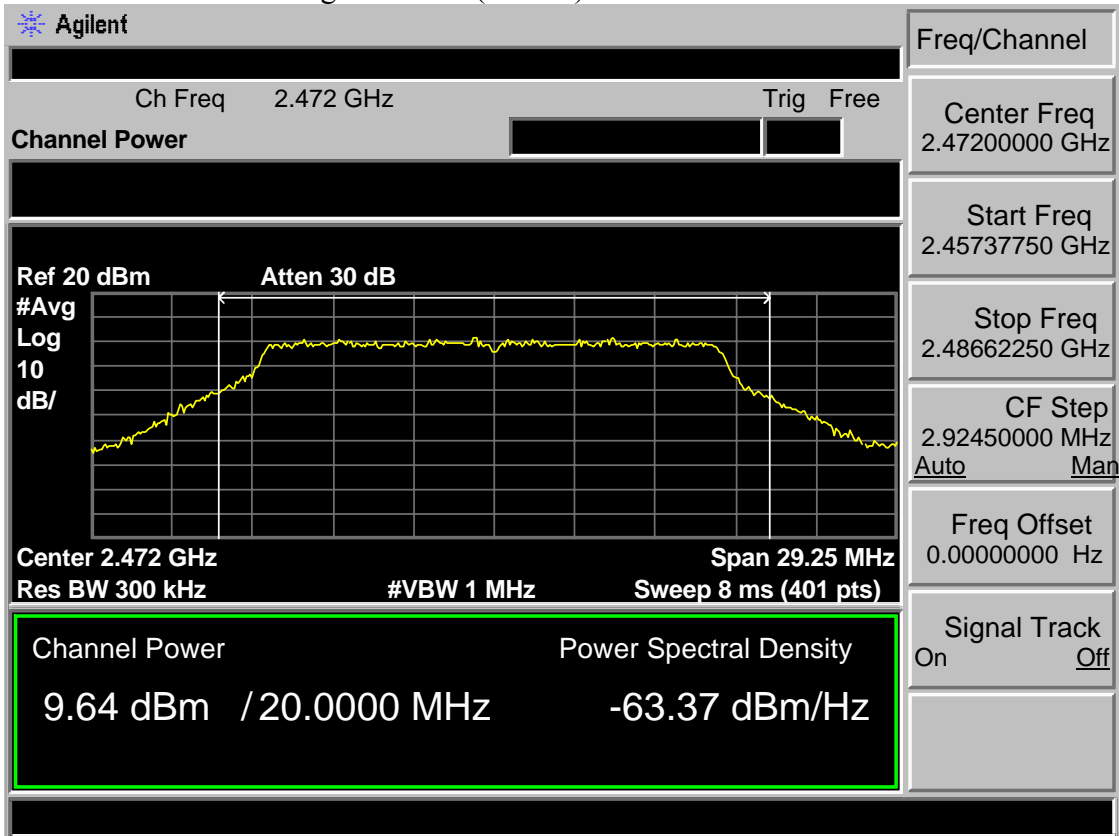


Test Mode: IEEE 802.11n HT20 2412MHz(ANT b)

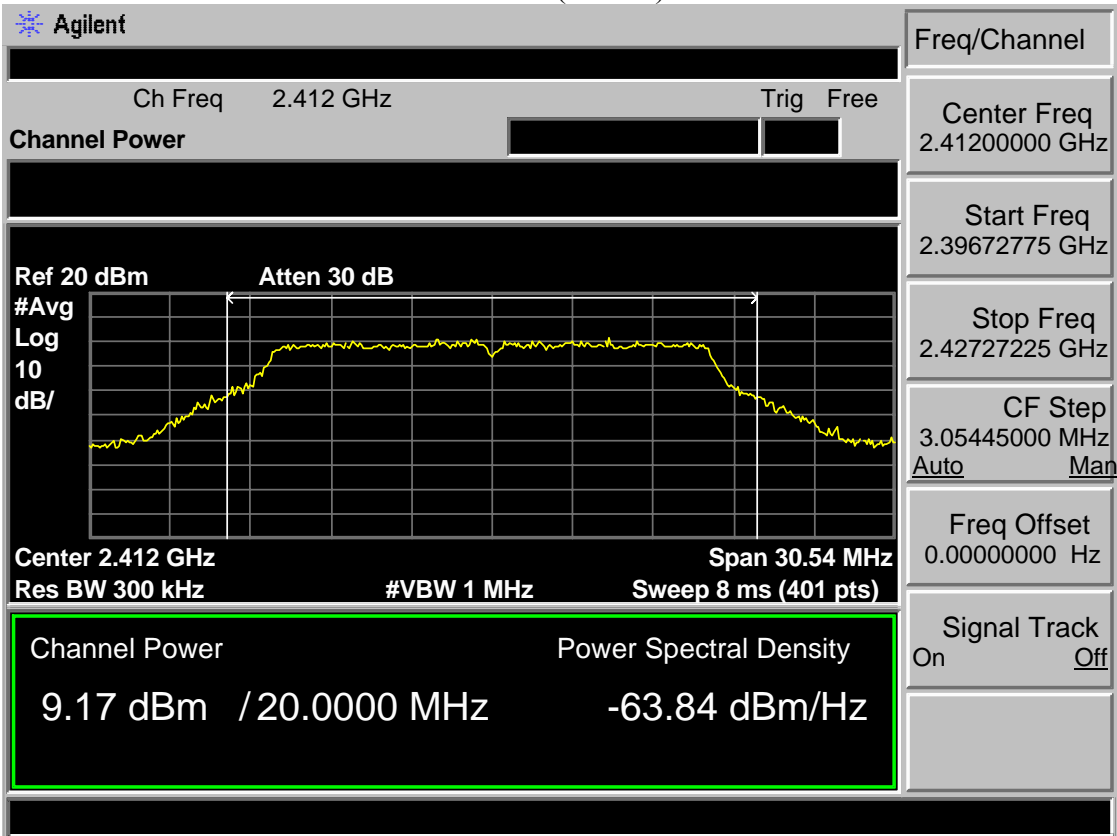


Test Mode: IEEE 802.11n HT20 2442MHz(ANT b)

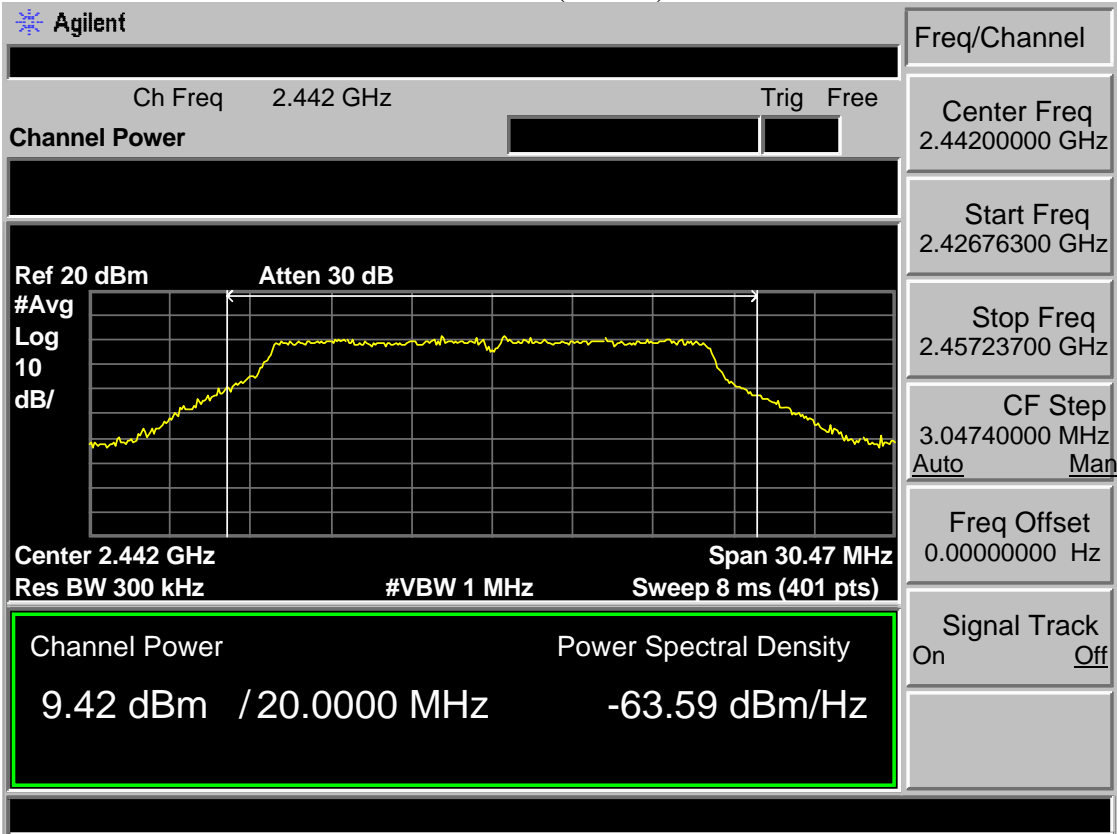


Test Mode: IEEE 802.11n HT20 2472MHz(ANT b)

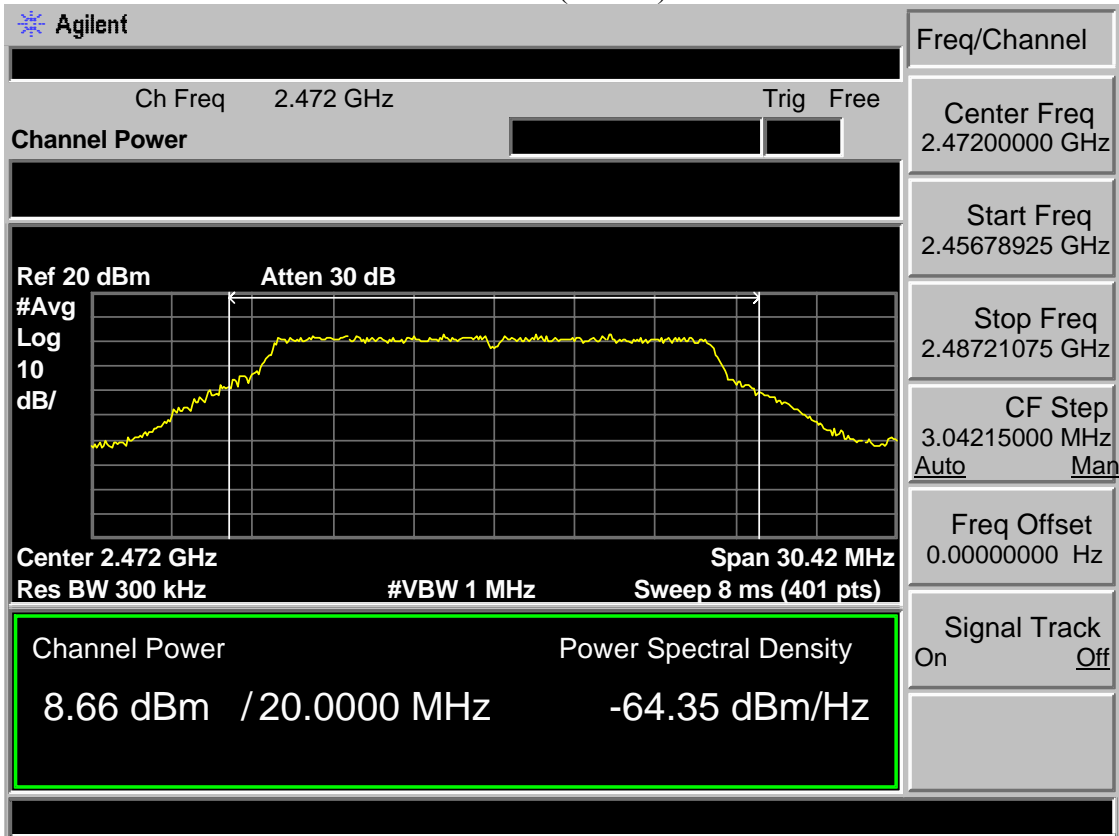


Test Mode: IEEE 802.11n HT40 2422MHz(ANT b)

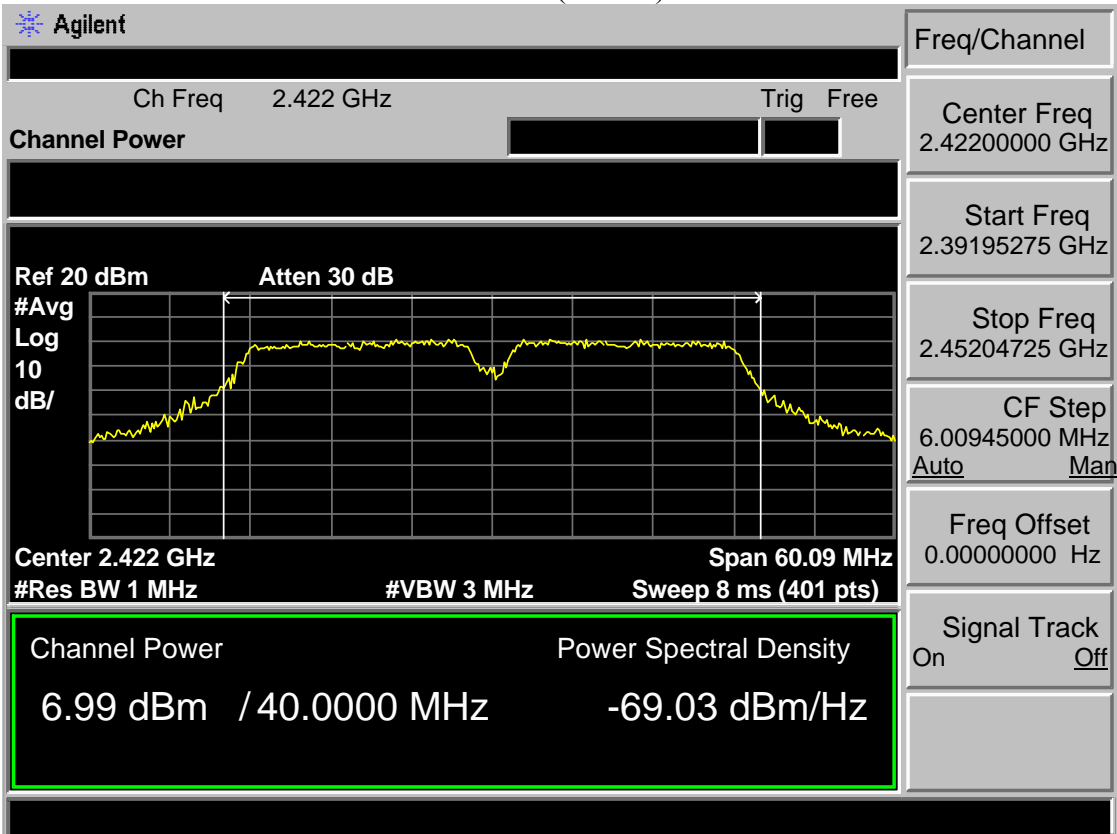

Test Mode: IEEE 802.11n HT40 2442MHz(ANT b)

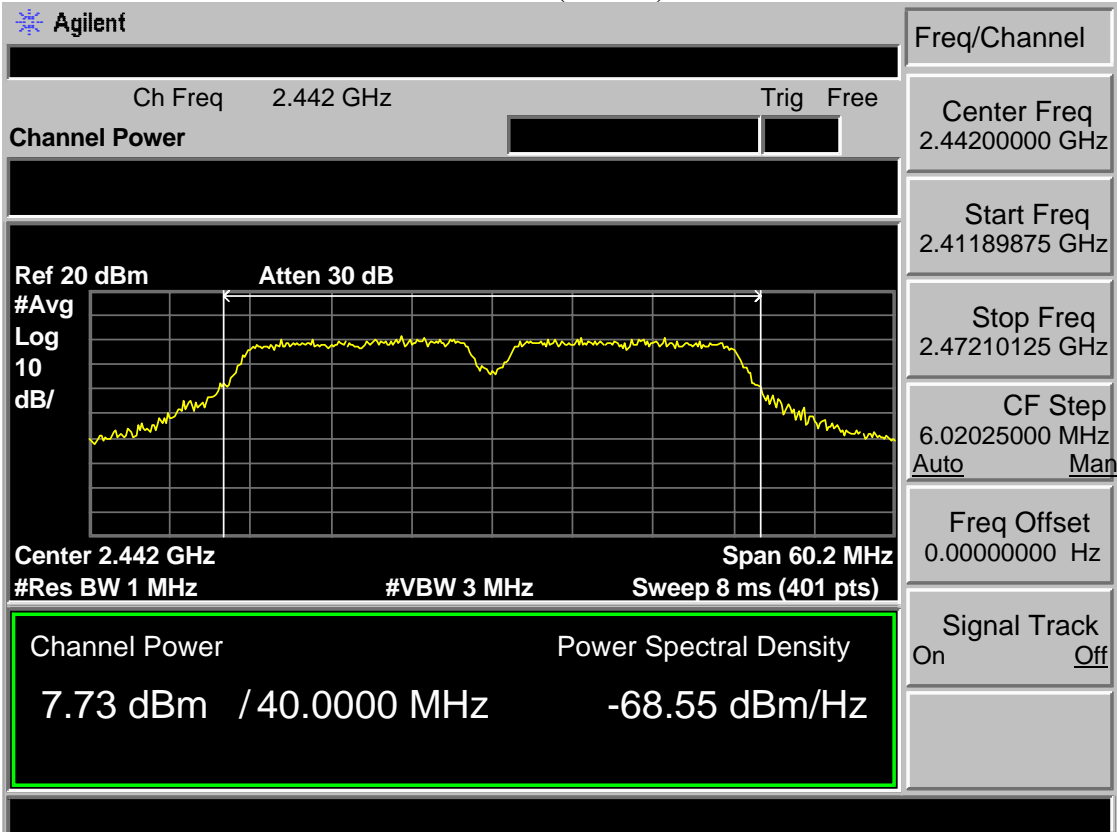

Test Mode: IEEE 802.11n HT40 2462MHz(ANT b)

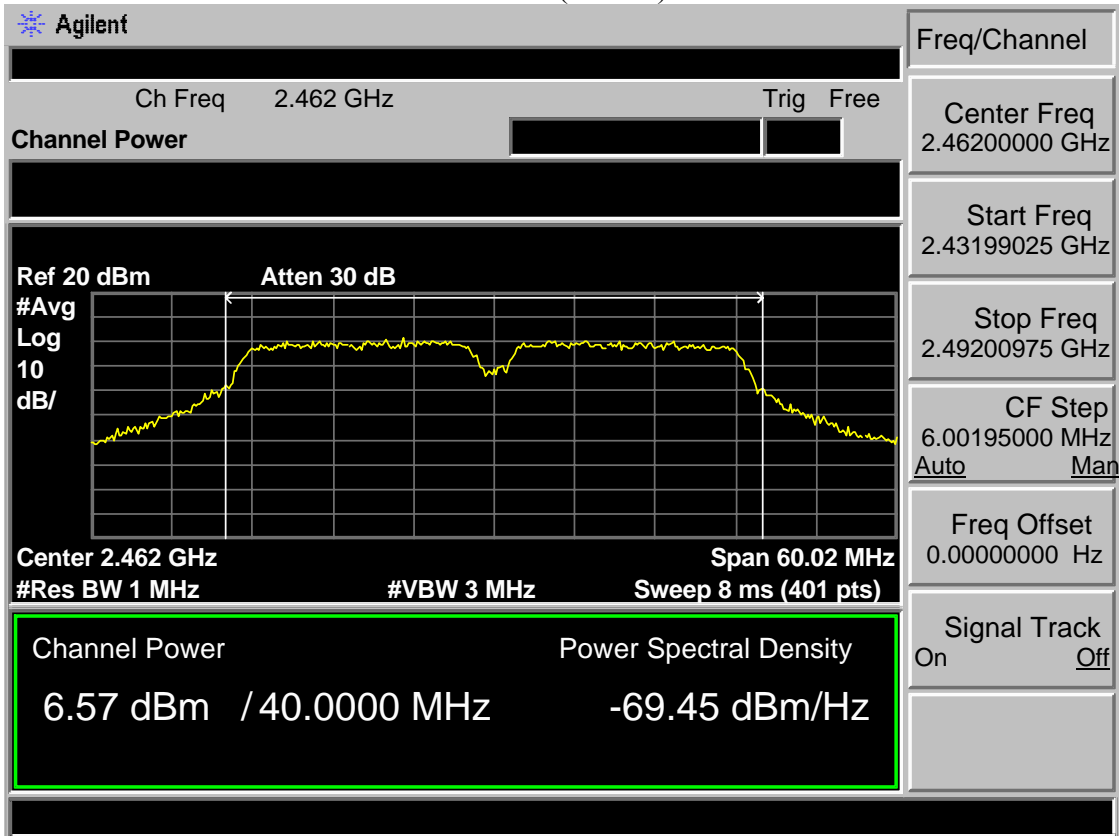



## 8 POWER SPECTRAL DENSITY TEST

### 8.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 8.2 Test Procedure

- 1, Connected the EUT's antenna port to spectrum analyzer device.
  
- 2, Follow the test procedure as described in KDB 558074
  - (1). Set analyzer center frequency to DTS channel center frequency.
  - (2). Set the span to 1.5 times the DTS bandwidth.
  - (3). Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
  - (4). Set the VBW  $\geq 3 \text{ RBW}$ .
  - (5). Detector = peak.
  - (6). Sweep time = auto couple.
  - (7). Trace mode = max hold.
  - (8). Allow trace to fully stabilize.
  - (9). Use the peak marker function to determine the maximum amplitude level.
  - (10). If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


### 8.3 Test Result

EUT: LED TV			
M/N: WE85NC4210			
Test date: 2015-06-09		Tested by: Tony Tang	Test site: RF site
Pass			
Test Mode	CH	Power density (dBm/3kHz)	Limit (dBm/3kHz)
IEEE 802.11 b (ANT a)	CH1	-9.82	8
	CH7	-5.02	8
	CH13	-10.16	8
IEEE 802.11 g (ANT a)	CH1	-14.65	8
	CH7	-14.49	8
	CH13	-14.93	8
IEEE 802.11 b (ANT b)	CH1	-9.37	8
	CH7	-9.38	8
	CH13	-7.64	8
IEEE 802.11 g (ANT b)	CH1	-14.95	8
	CH7	-14.59	8
	CH13	-16.42	8
Conclusion: PASS			


EUT:LED TV						
M/N: WE85NC4210						
Test Date:2015-06-09				Tested by: Tony		
Test site: RF site				Test result: Pass		
Test Mode	CH				Limit (dBm/3kHz)	Result
		ANT 1	ANT 2	Power density (dBm/3 kHz)		
IEEE 802.11n (HT20)	CH1	-15.62	-16.85	-13.18	<b>8</b>	Pass
	CH7	-14.59	-16.19	-12.31		Pass
	CH13	-15.84	-16.88	-13.33		Pass
IEEE 802.11n (HT40)	CH1	-17.81	-19.92	-15.73		Pass
	CH5	-20.14	-20.48	-17.30		Pass
	CH9	-20.23	-20.18	-17.19		Pass

### 8.4 Test Data


Test Mode: IEEE 802.11b 2412MHz(ANT a)

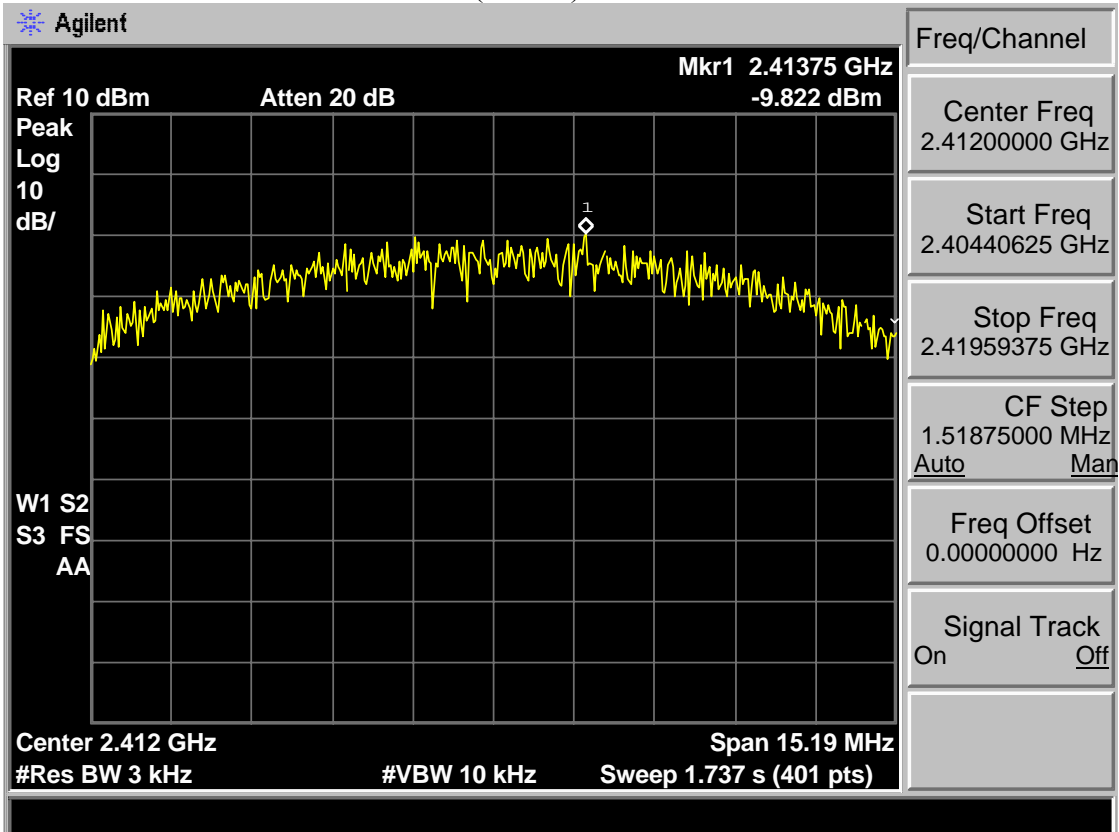


Test Mode: IEEE 802.11b 2442MHz(ANT a)

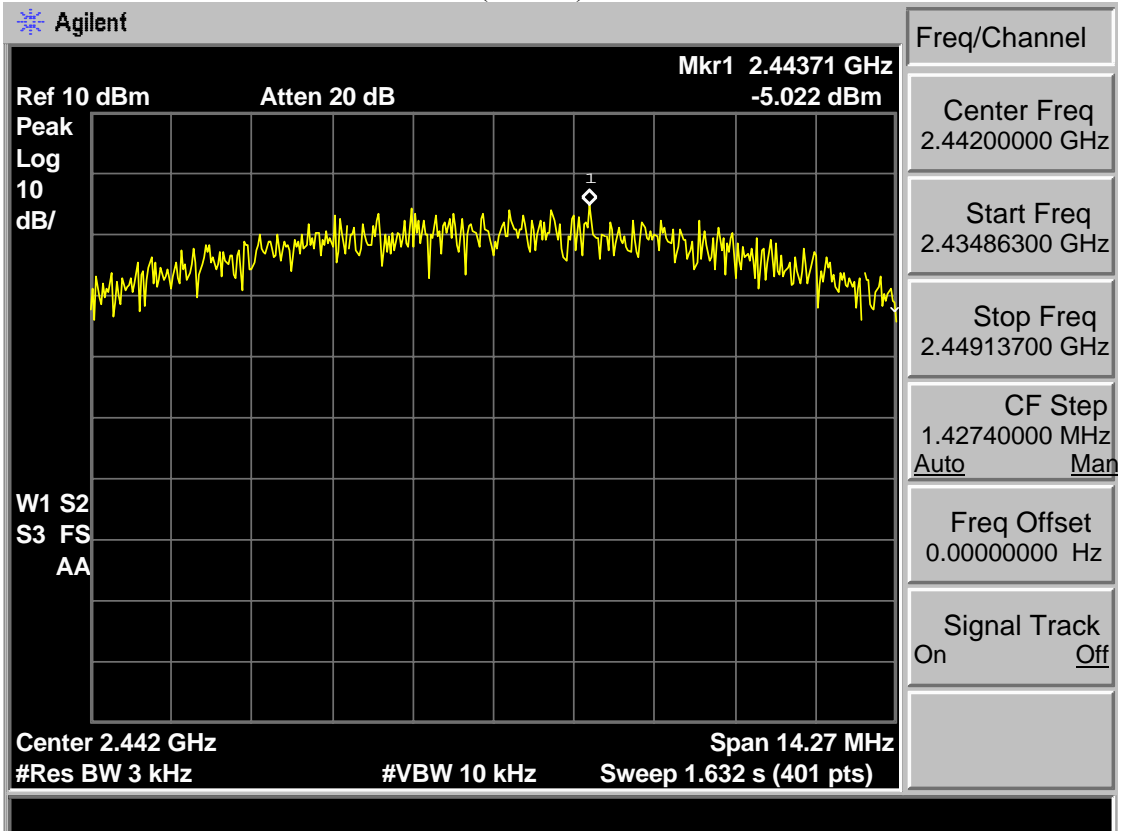


Test Mode: IEEE 802.11b 2472MHz(ANT a)

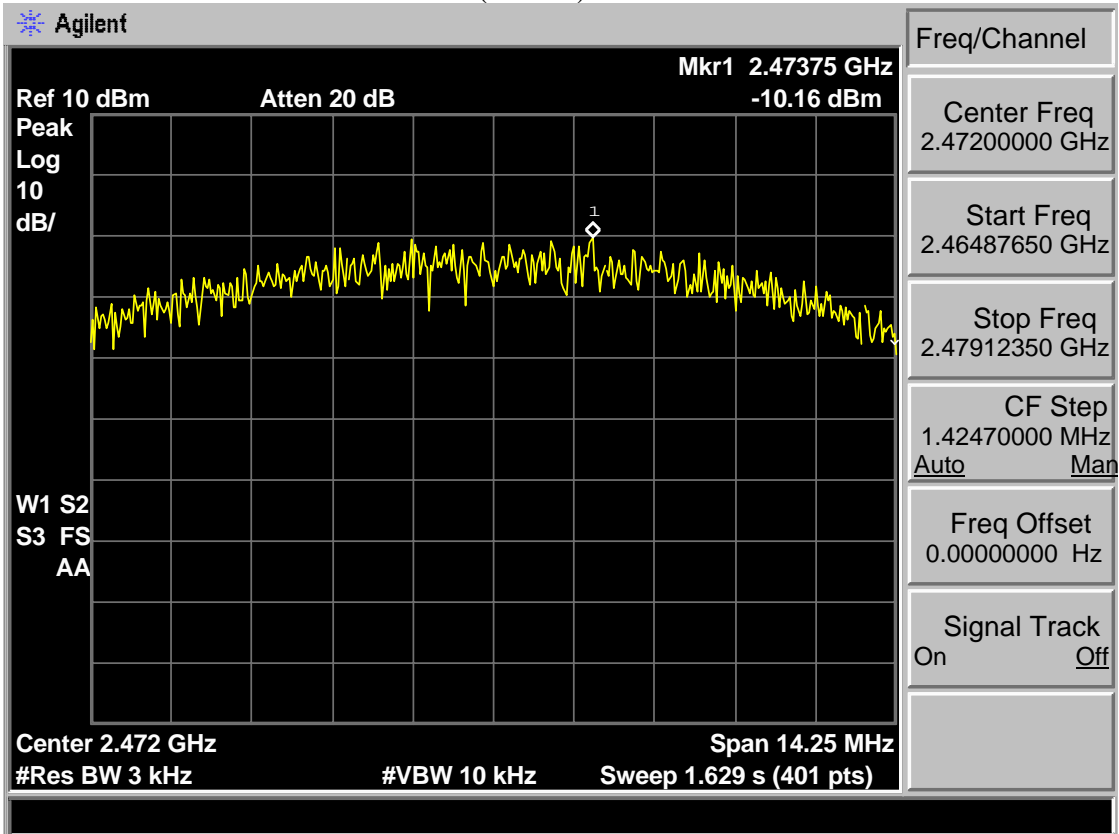


Test Mode: IEEE 802.11g 2412MHz(ANT a)

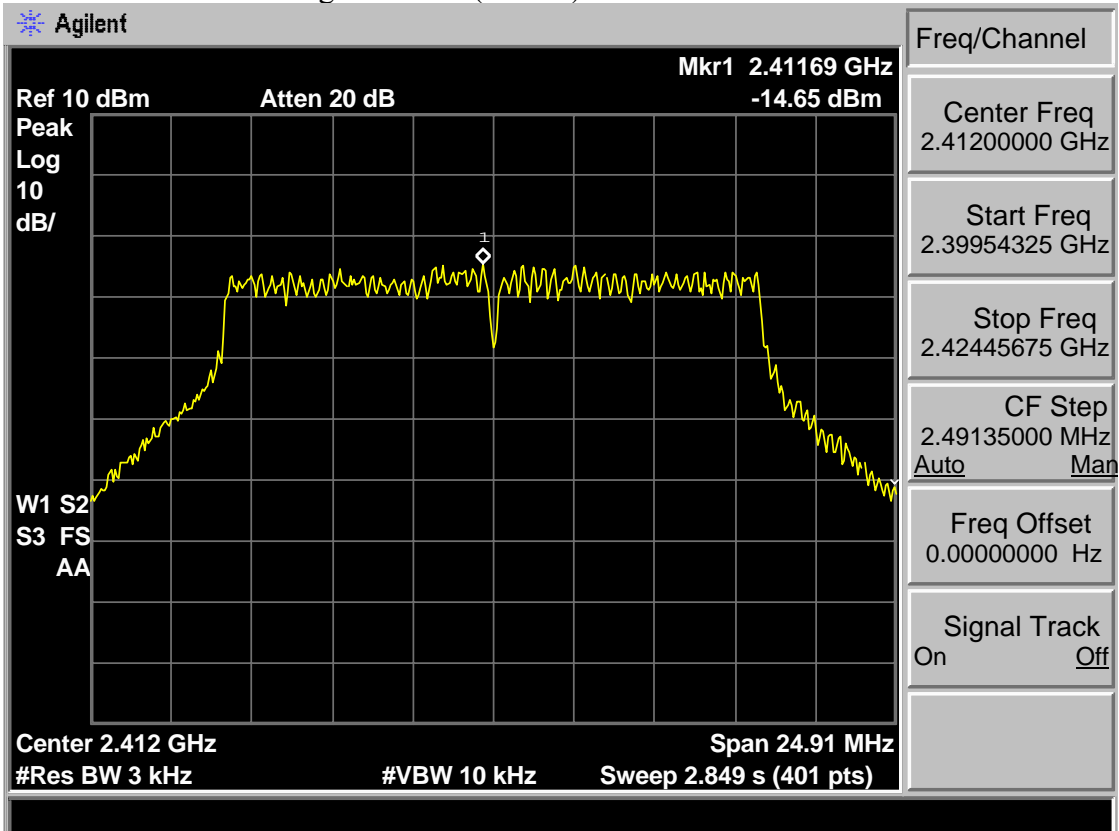


Test Mode: IEEE 802.11g 2442MHz(ANT a)

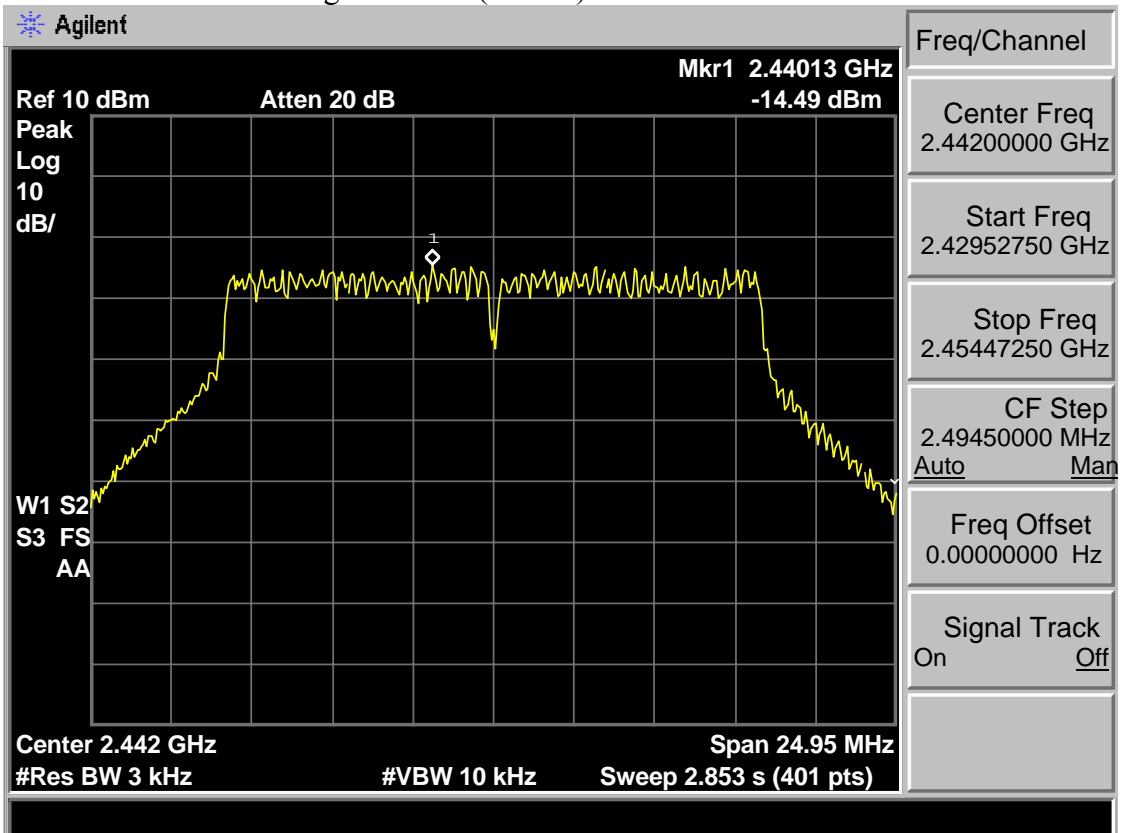


Test Mode: IEEE 802.11g 2472MHz(ANT a)

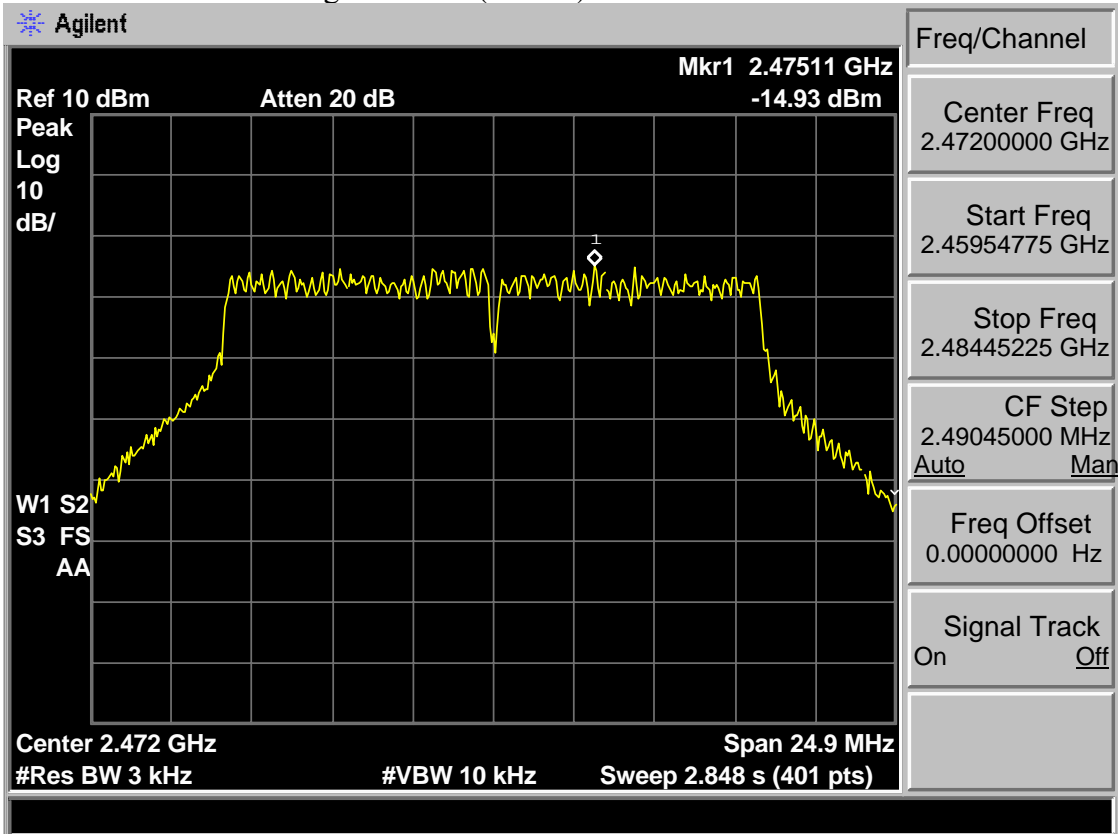

Test Mode: IEEE 802.11n HT20 2412MHz(ANT a)

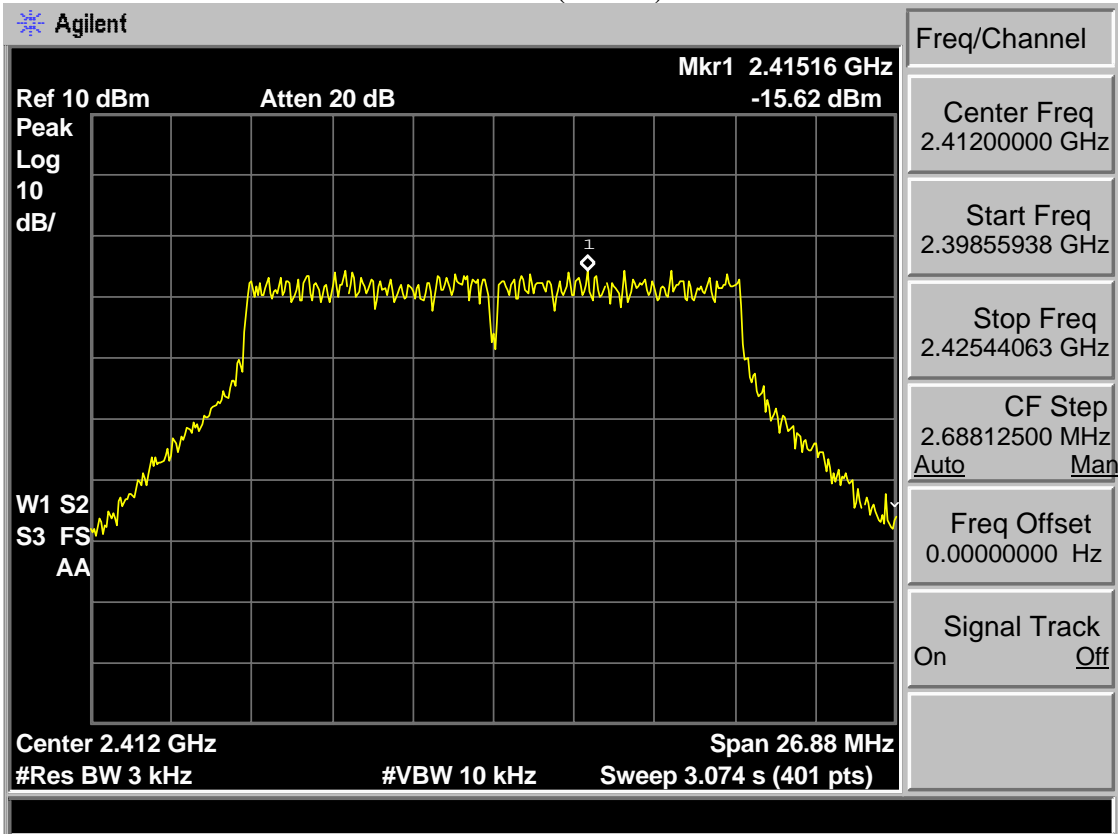


Test Mode: IEEE 802.11n HT20 2442MHz(ANT a)

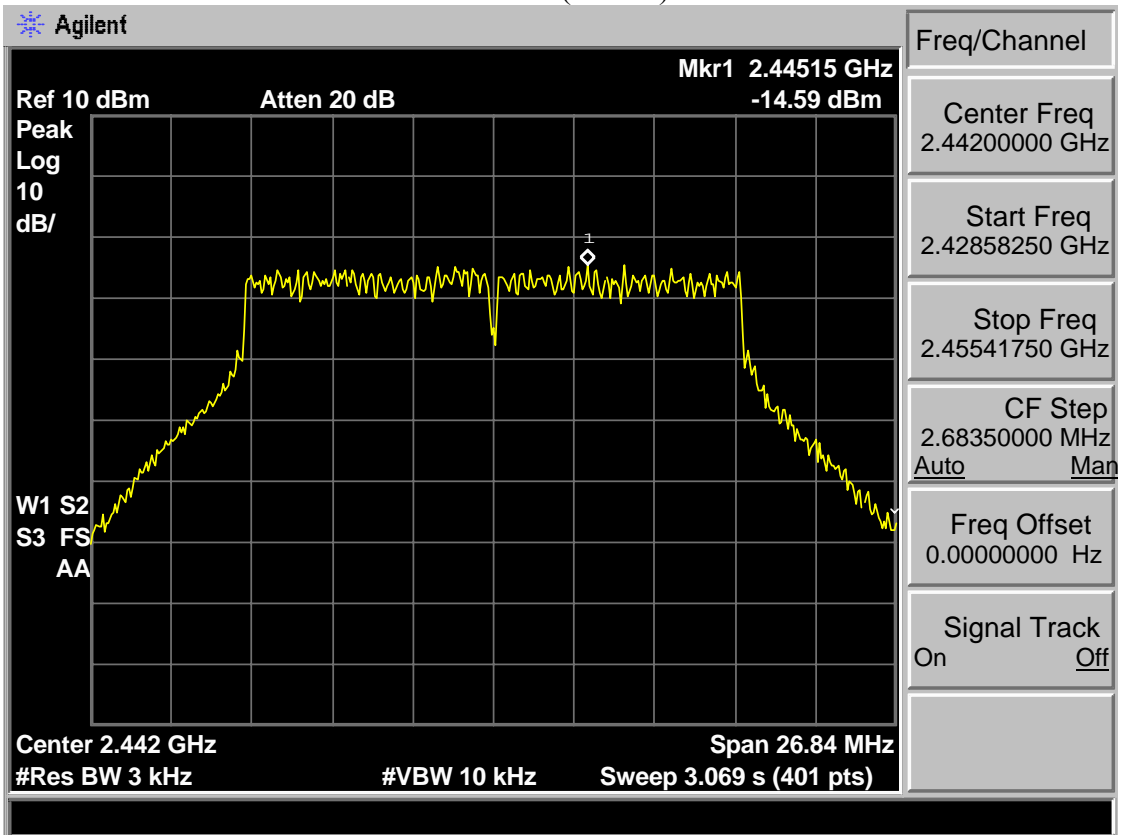





Test Mode: IEEE 802.11n HT20 2472MHz(ANT a)

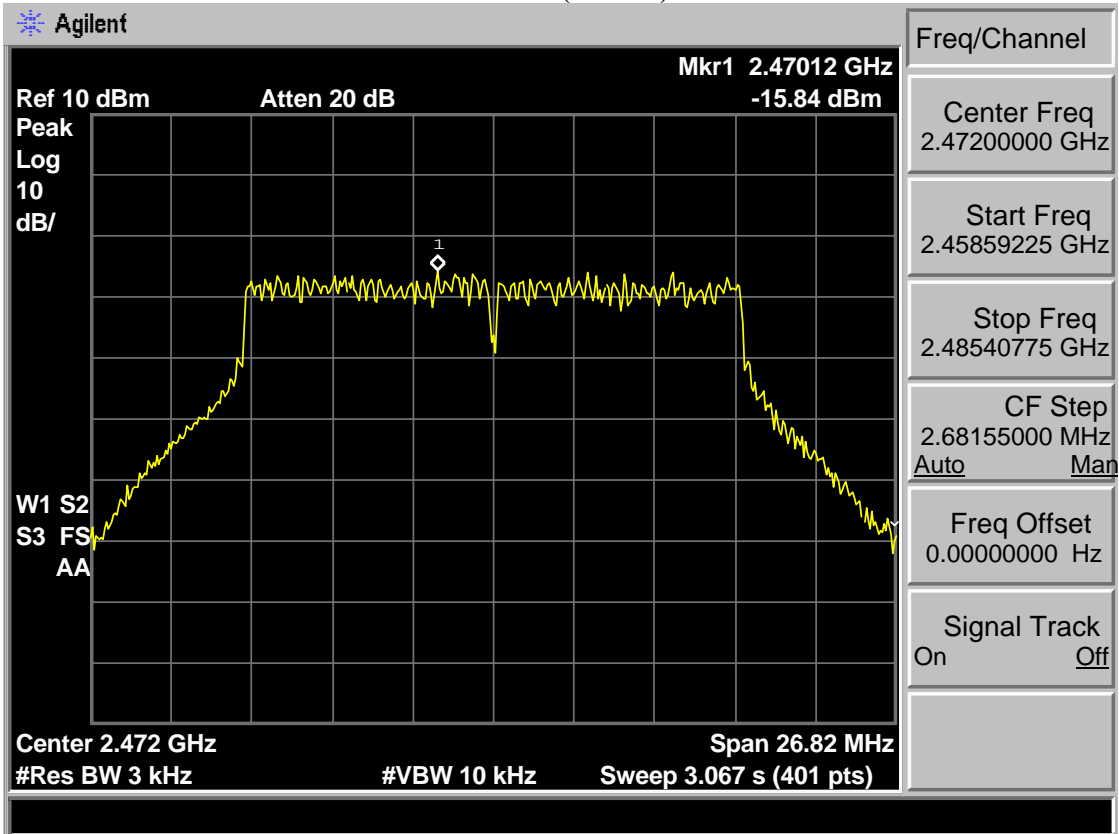


Test Mode: IEEE 802.11n HT40 2422MHz(ANT a)

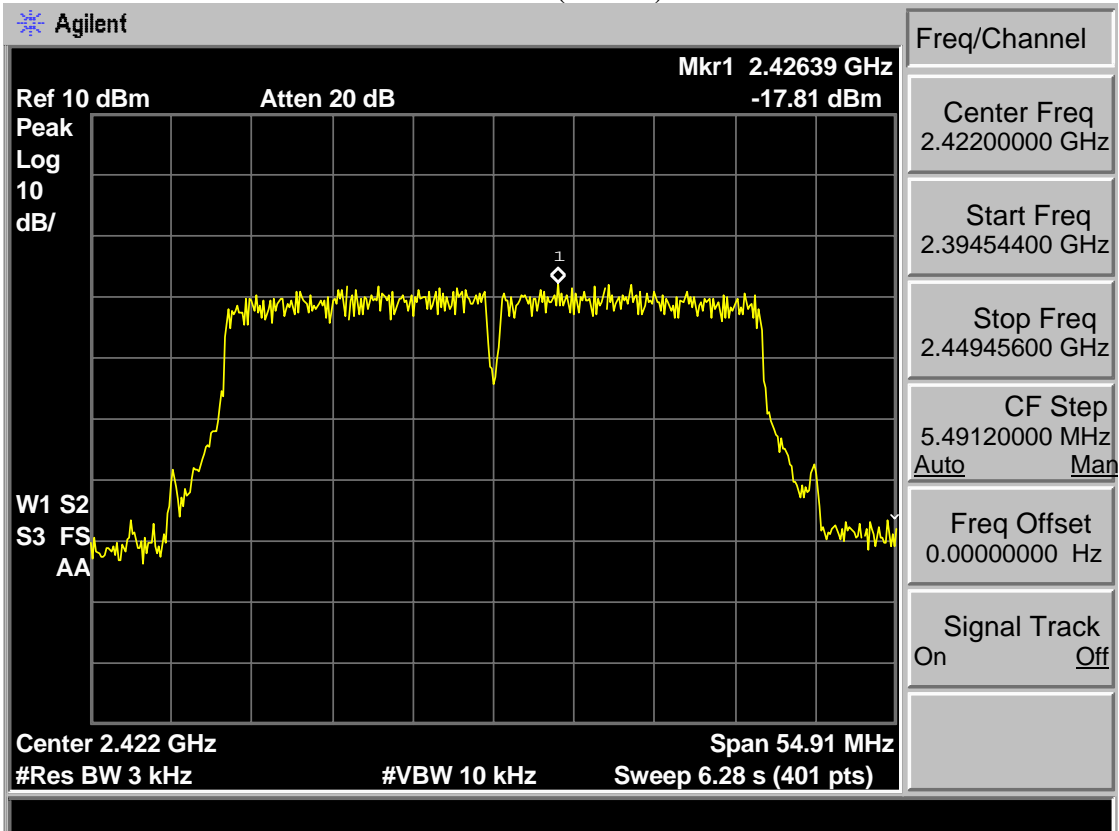


Test Mode: IEEE 802.11n HT40 2442MHz(ANT a)

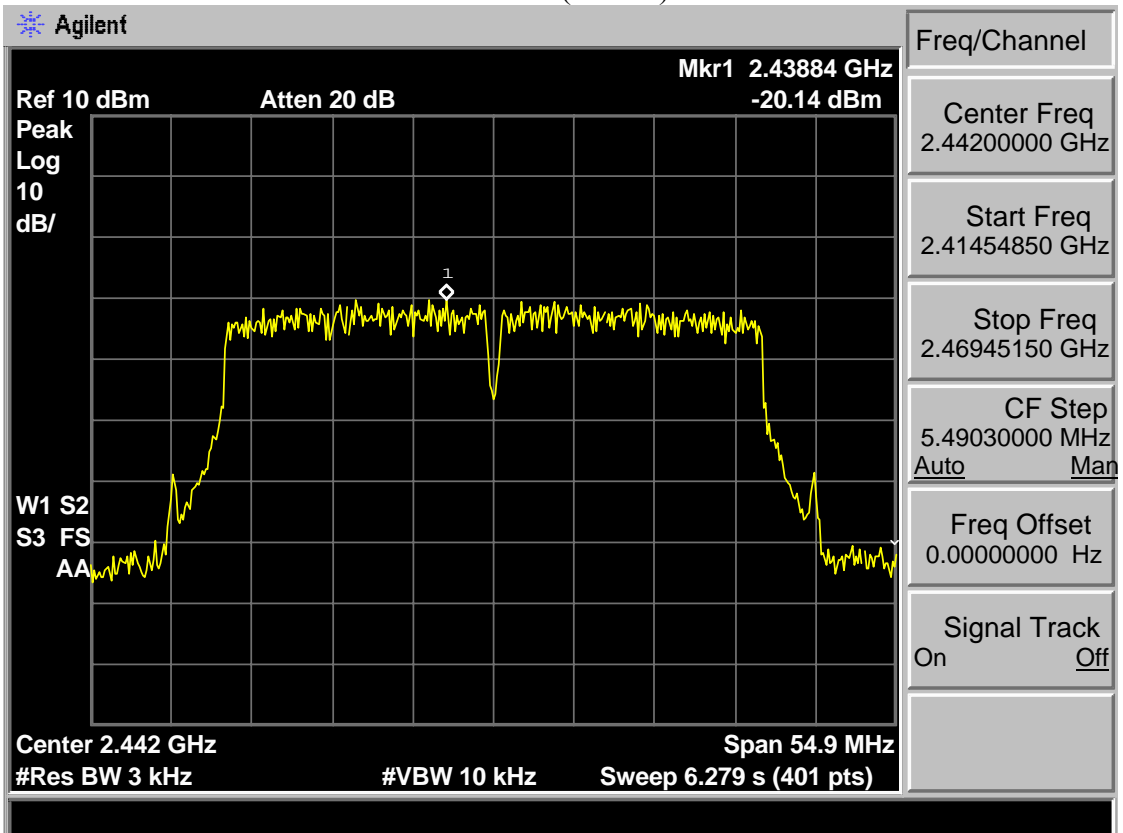


Test Mode: IEEE 802.11n HT40 2462MHz(ANT a)

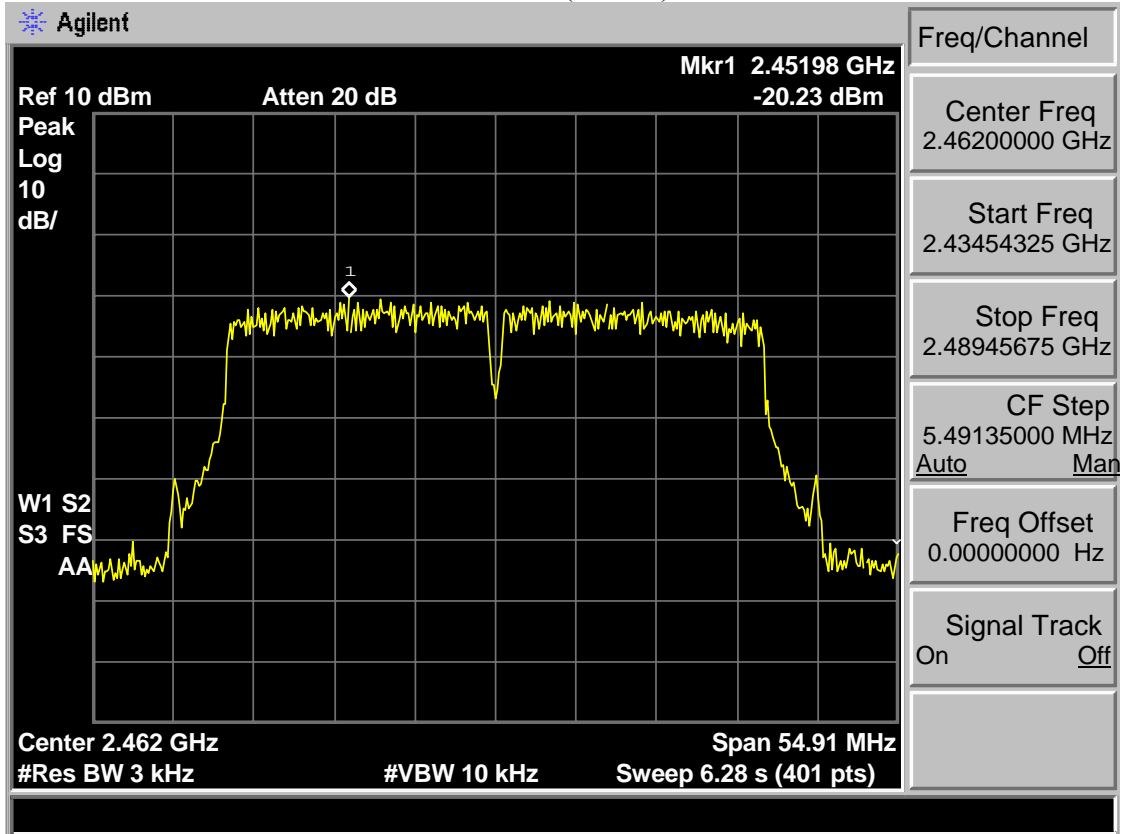


Test Mode: IEEE 802.11b 2412MHz(ANT b)

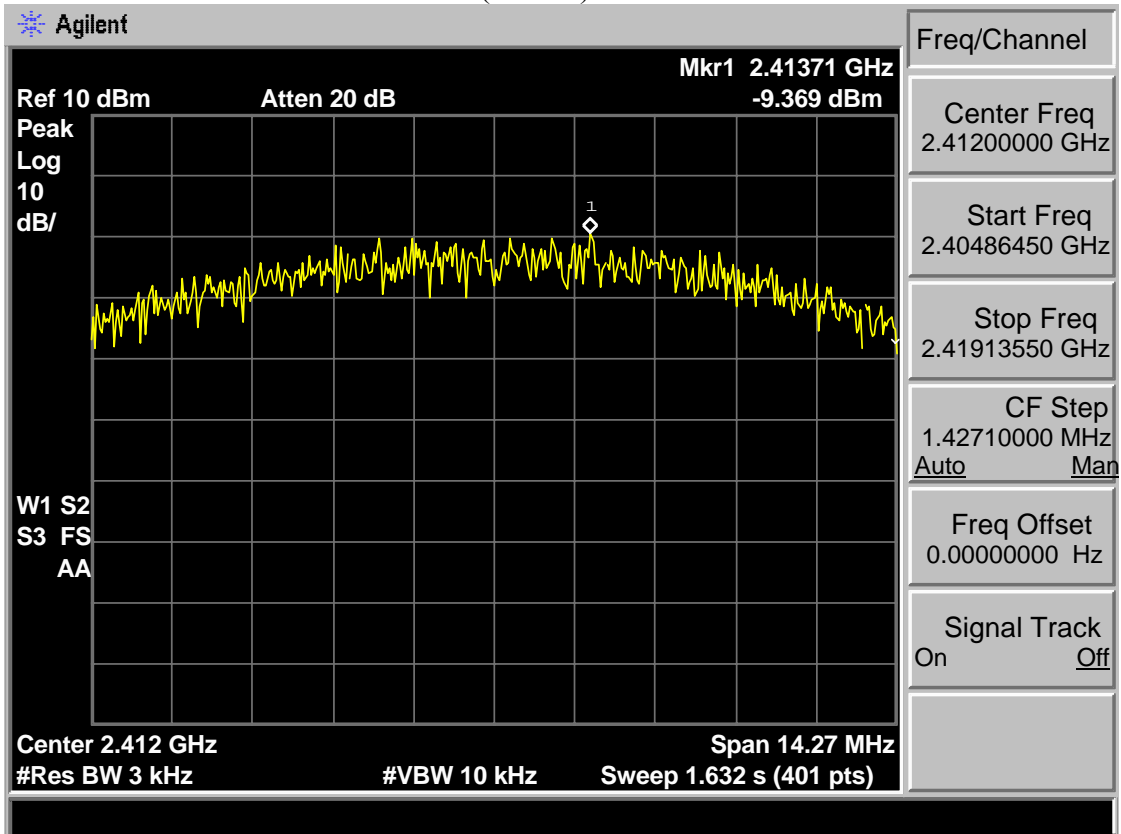


Test Mode: IEEE 802.11b 2442MHz(ANT b)

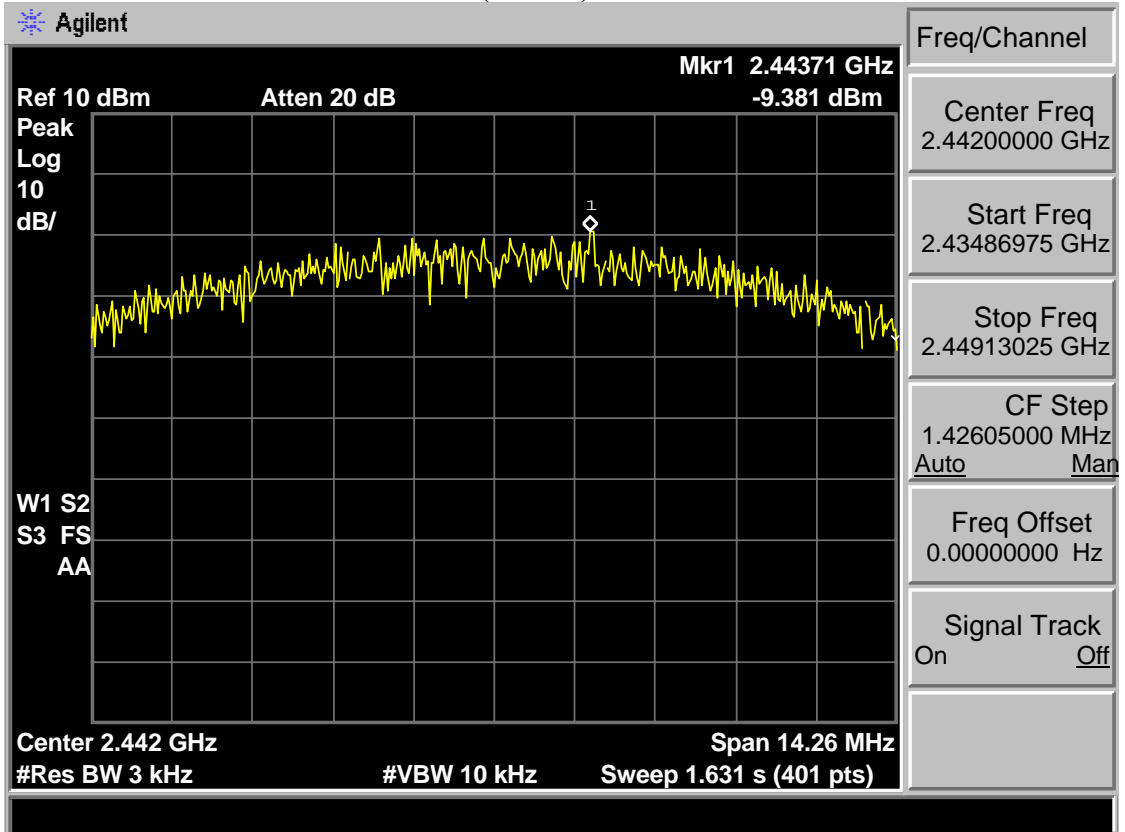


Test Mode: IEEE 802.11b 2472MHz(ANT b)

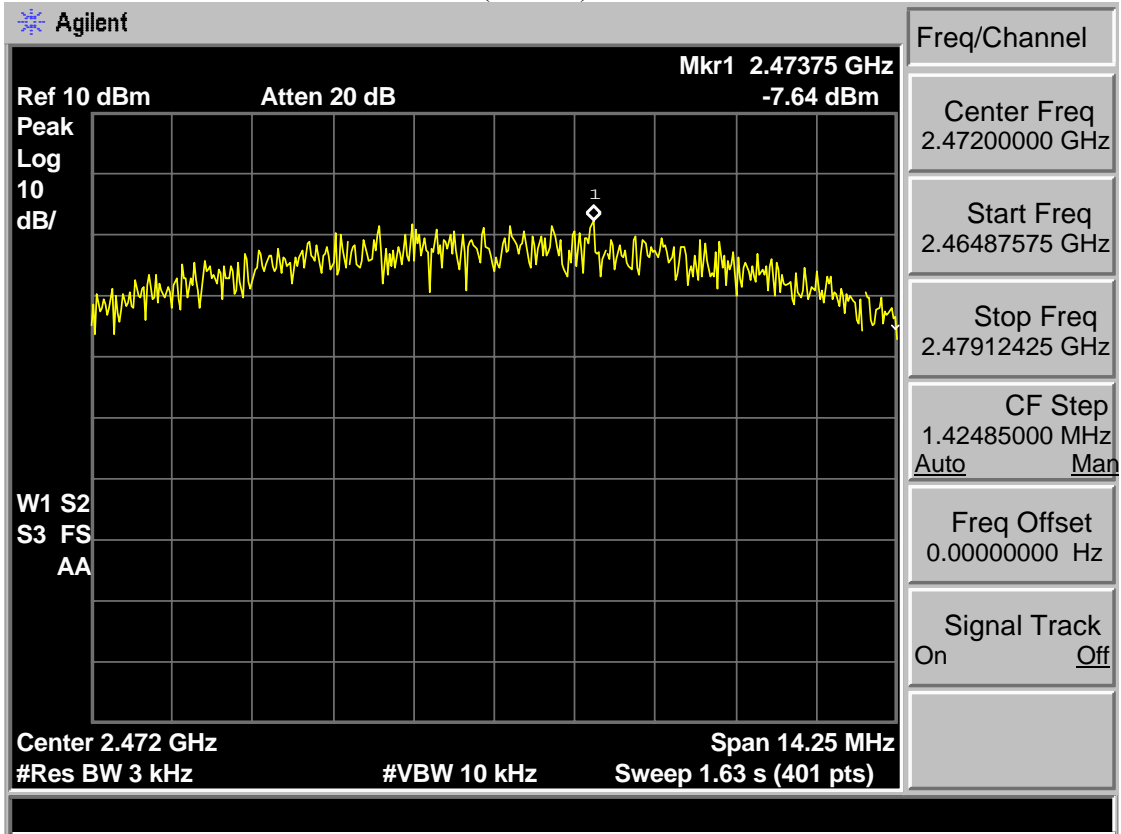


Test Mode: IEEE 802.11g 2412MHz(ANT b)

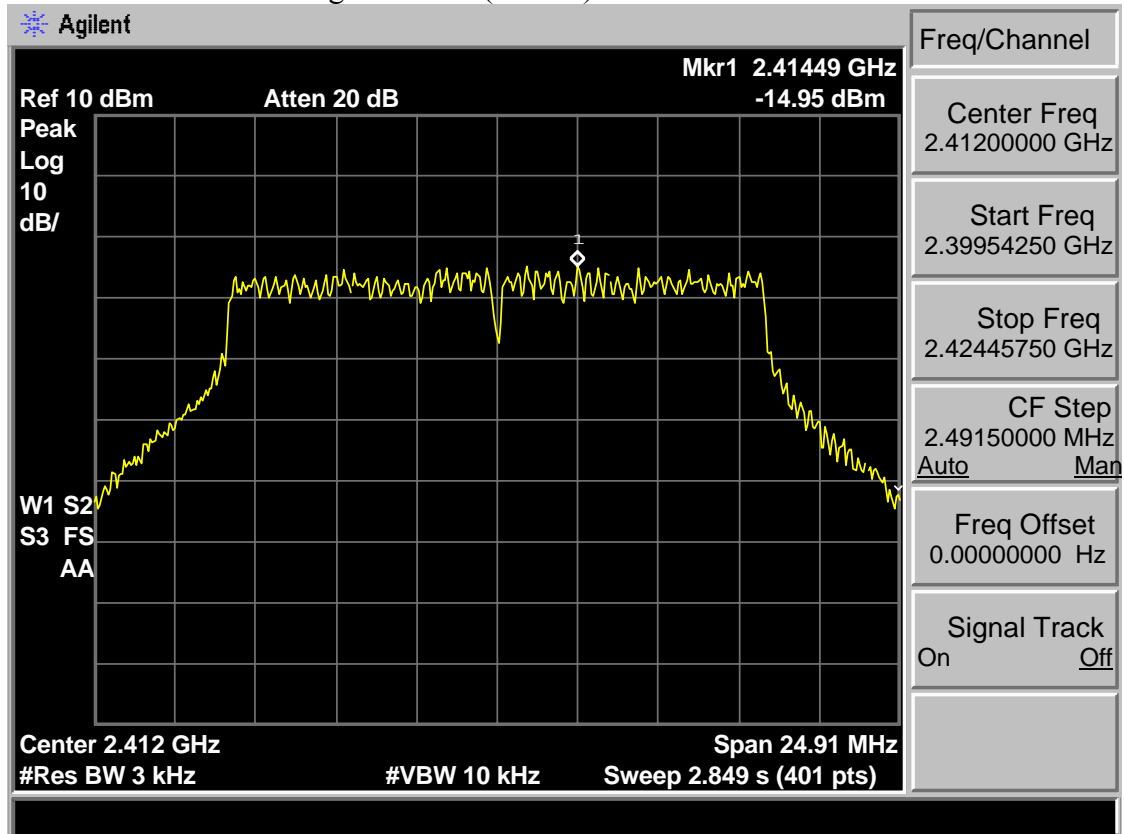


Test Mode: IEEE 802.11g 2442MHz(ANT b)

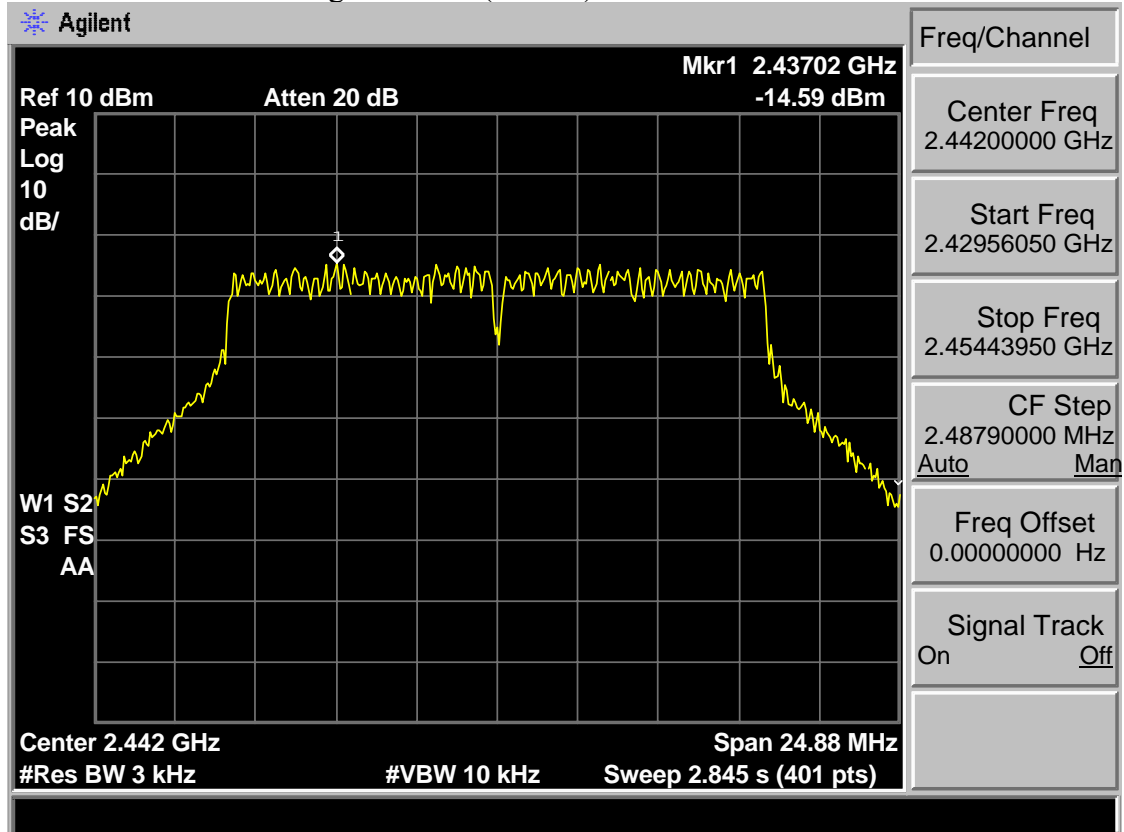


Test Mode: IEEE 802.11g 2472MHz(ANT b)

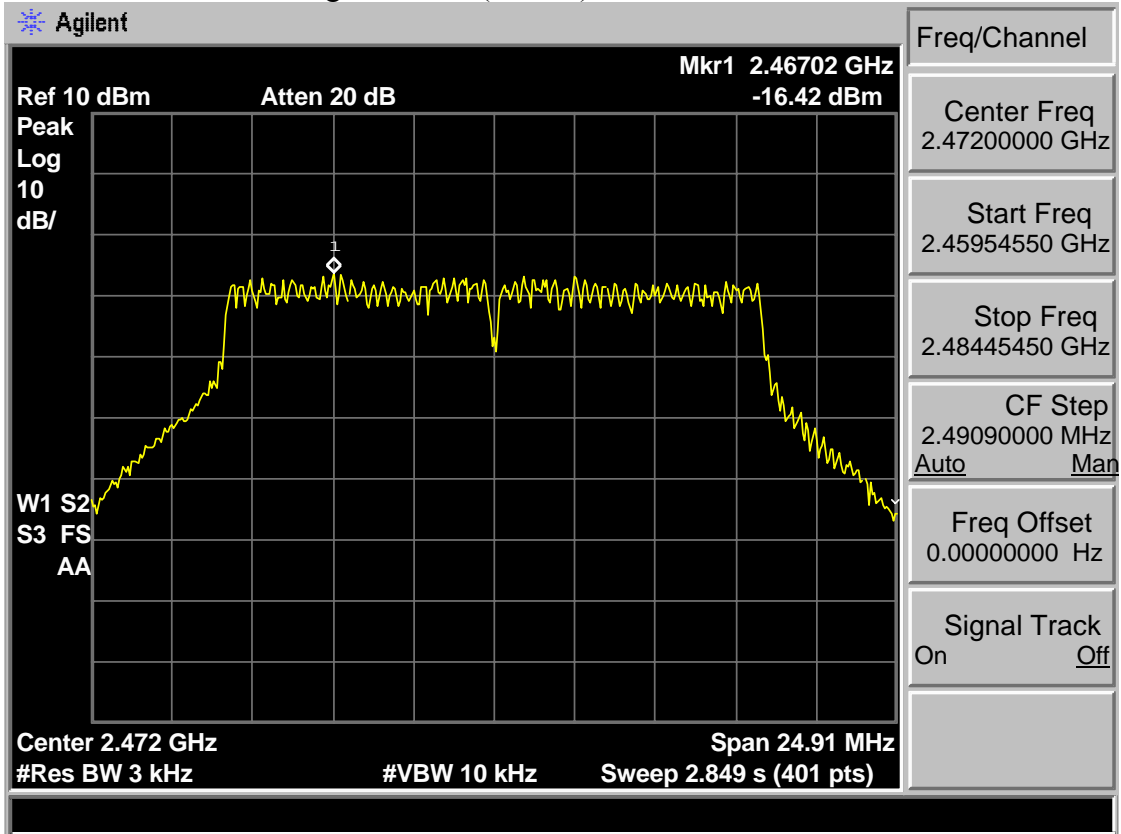

Test Mode: IEEE 802.11n HT20 2412MHz(ANT b)

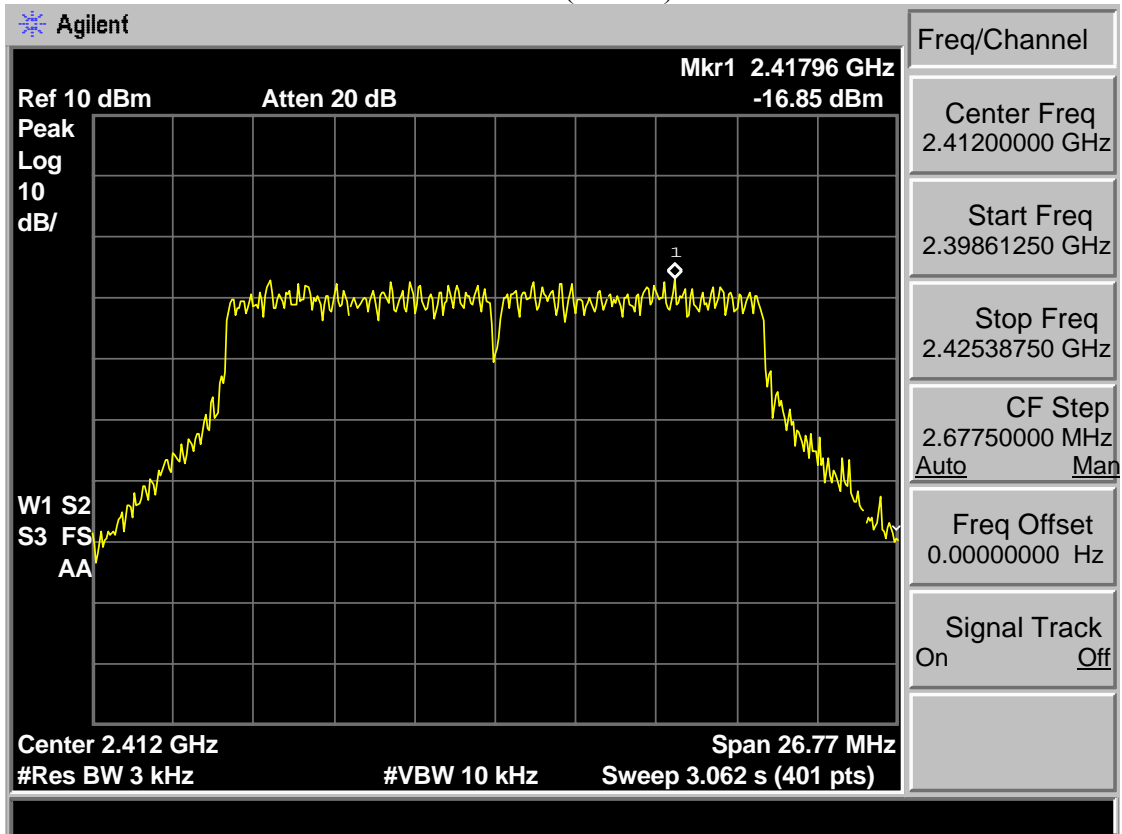


Test Mode: IEEE 802.11n HT20 2442MHz(ANT b)

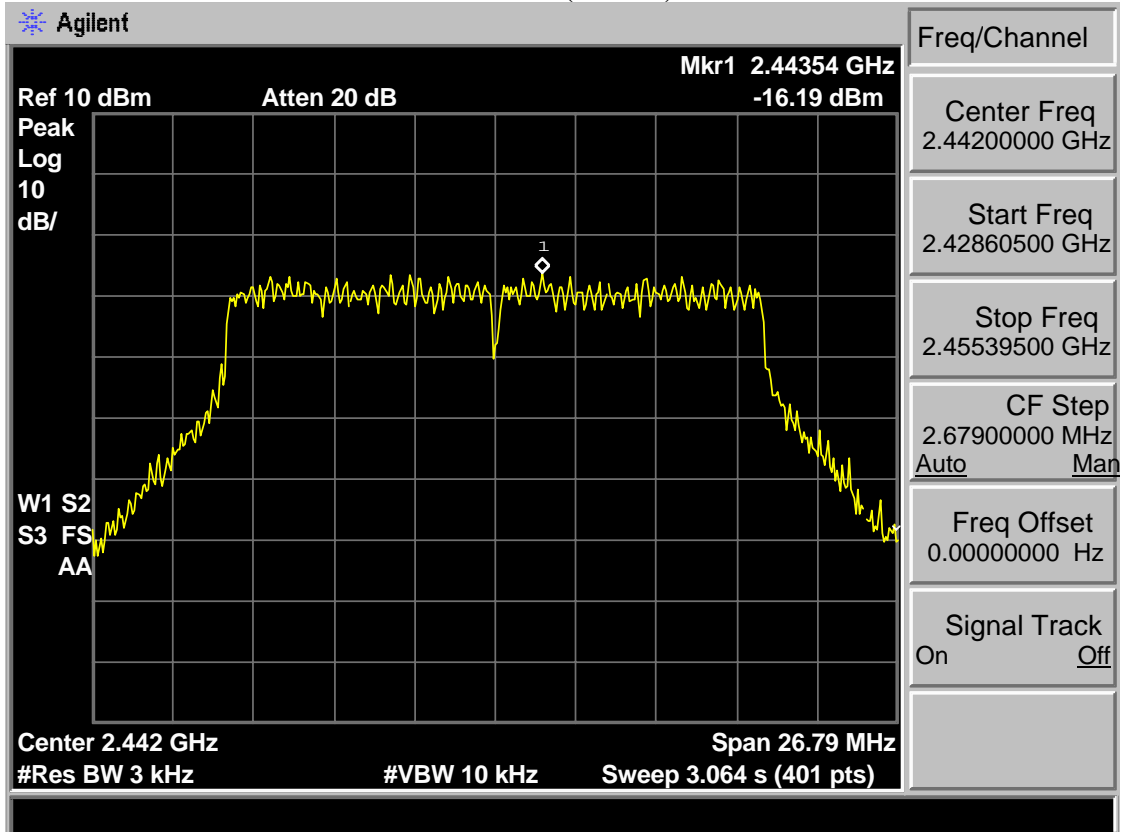





Test Mode: IEEE 802.11n HT20 2472MHz(ANT b)

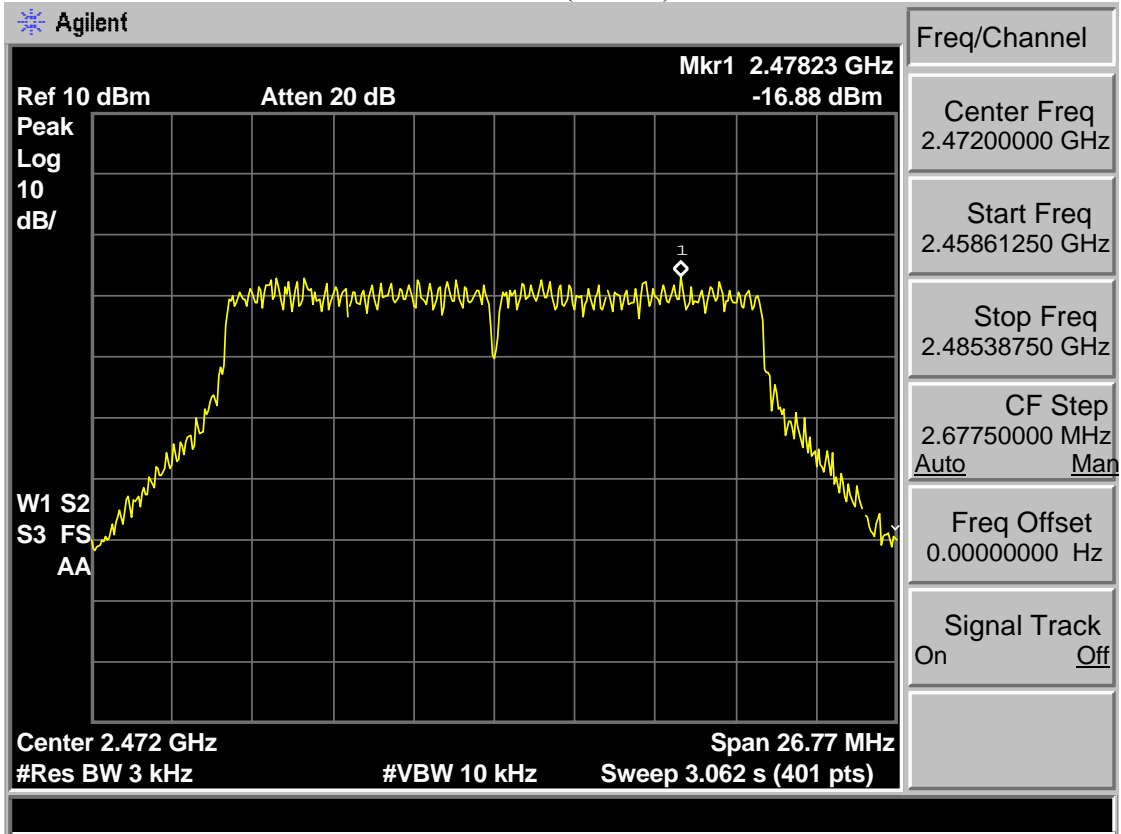


Test Mode: IEEE 802.11n HT40 2422MHz(ANT b)

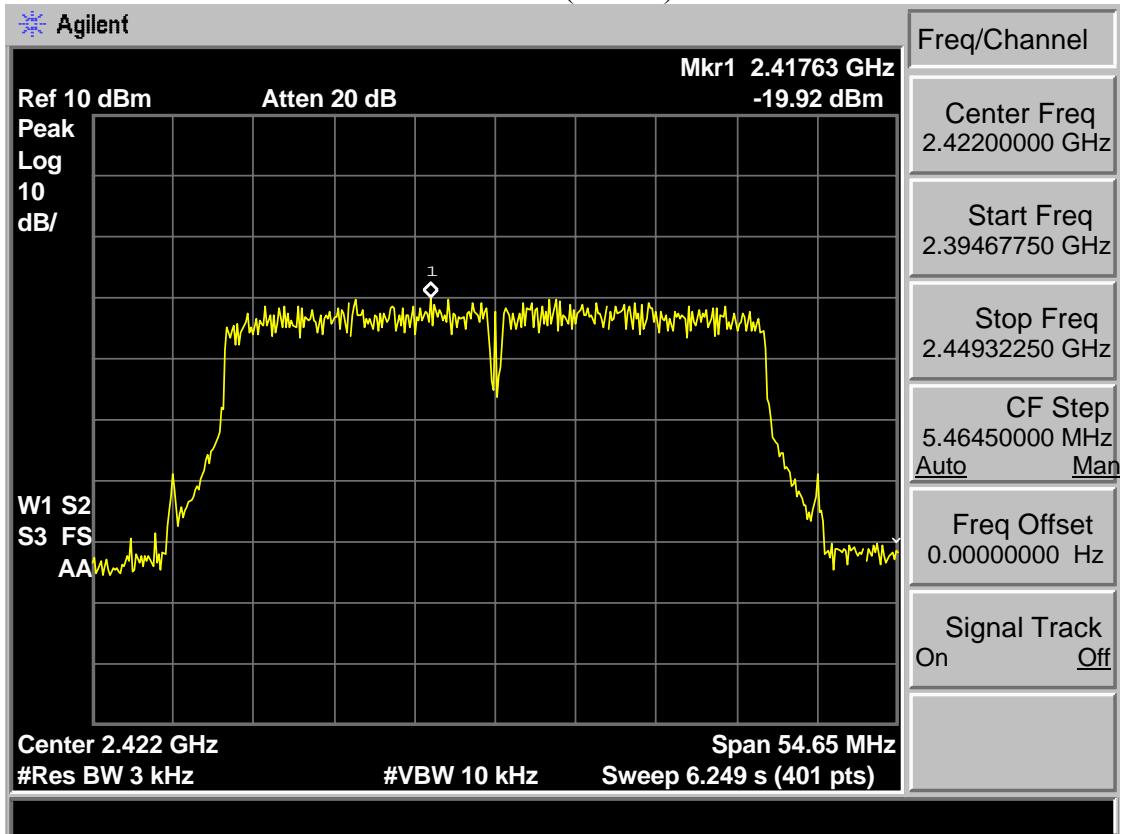

Test Mode: IEEE 802.11n HT40 2442MHz(ANT b)

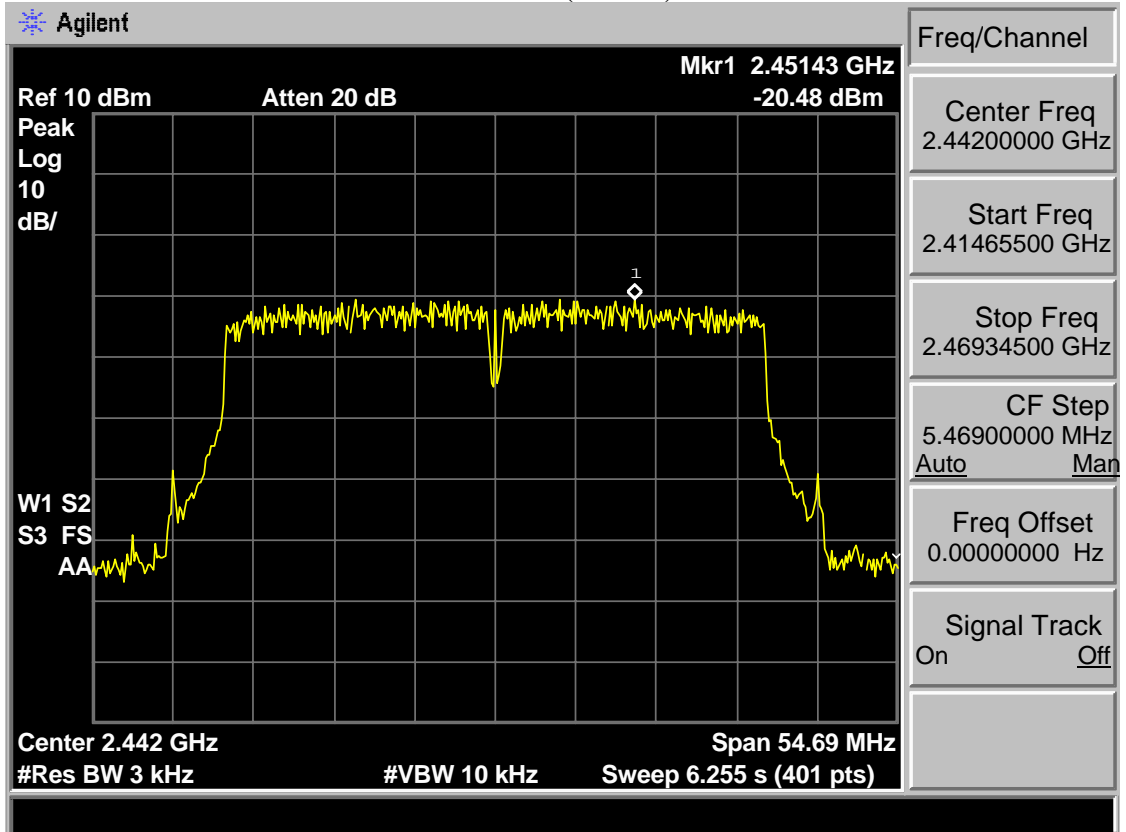

Test Mode: IEEE 802.11n HT40 2462MHz(ANT b)

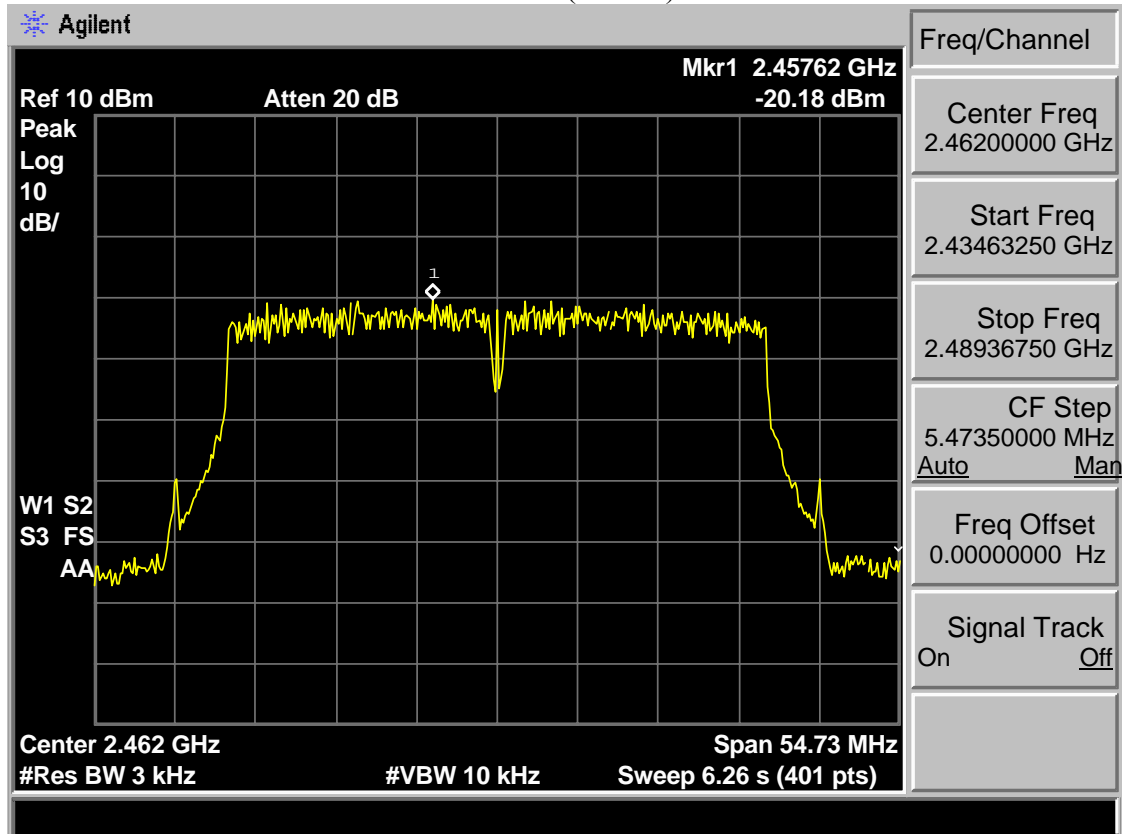

## 9 ANTENNA REQUIREMENTS

### 9.1 Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 9.2 Result

The antennas used for this product are Integral antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 2 dBi.