




FCC RADIO TEST REPORT

Applicant : SHENZHEN Hitevision Technology Co., Ltd.
Address : Honghe Mansion No. 1 Building A, 1 Danzi North Road, Shatian, Kengzi Street, Pingshan District, Shenzhen
Equipment : Wireless Module
Model No. : AZ932-HN
Trade Name : N/A
FCC ID. : 2ACYT-AZ932
Standard : FCC part 15 Subpart C §15.247

I HEREBY CERTIFY THAT :

The sample was received on Oct. 28, 2022 and the testing was completed on Nov. 17, 2022 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:



Leevin Li /Supervisor



CONTENTS

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels	8
2.3 Test Mode and Test Software	9
2.5 Description of Test System	11
2.6 General Information of Test	12
2.7 Measurement Uncertainty	12
3. Test Equipment and Ancillaries Used for Tests	13
4. Antenna Requirements	14
4.1 Standard Applicable	14
4.2 Antenna Construction and Directional Gain	14
5. Test of AC Power Line Conducted Emission	15
5.1 Test Limit	15
5.2 Test Procedures	15
5.3 Typical Test Setup	16
5.4 Test Result and Data	17
6. Test of Spurious Emission (Radiated)	19
6.1 Test Limit	19
6.2 Test Procedures	19
6.3 Typical Test Setup	20
6.4 Test Result and Data (9KHz ~ 30MHz)	21
6.5 Test Result and Data (30MHz ~ 1GHz).....	21
6.6 Test Result and Data (1GHz ~ 25GHz).....	23
6.7 Restricted Bands of Operation	47
6.8 Restrict Band Emission Measurement Data	48
7. Test of Conducted Spurious Emission	64
7.1 Test Limit	64
7.2 Test Procedure	64
7.3 Test Setup Layout.....	64
7.4 Test Result and Data	64
8. On Time, Duty Cycle and Measurement methods	69
8.1 Test Limit	69
8.2 Test Procedure	69
8.3 Test Setup Layout.....	69
8.4 Test Result and Data	69
9. 6Db Bandwidth Measurement Data	71
9.1 Test Limit	71
9.2 Test Procedures	71
9.3 Test Setup Layout.....	71
9.4 Test Result and Data	72
10.Maximum Peak Output Power	75
10.1 Test Limit	75



10.2 Test Procedures 75

10.3 Test Setup Layout..... 75

10.4 Test Result and Data 76

11. Power Spectral Density 77

11.1 Test Limit 77

11.2 Test Procedures 77

11.3 Test Setup Layout..... 77

11.4 Test Result and Data 78



History of this test report

Original.

Additional attachment as following record:

Attachment No.	Issue Date	Description
DEF12210072-79823	Nov. 25, 2022	Initial Issue



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
FCC CFR Title 47 Part 15 Subpart C: Section 15.203/15.247 (b)	. Antenna Requirement	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.207	. AC Power Line Conducted Emission	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.205/15.209	. Spurious Emission(Radiated)	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.247(d)	. Spurious Emission(Conducted)	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.247(a)(2)	. 6dB Bandwidth	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.247(b)	. Maximum Peak Output Power	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.247(e)	. Power Spectral Density	Pass
Note: Deviations Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> *The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.		



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Equipment	Wireless Module
Model Name	AZ932-HN
Model Discrepancy	N/A
Chipset	RTL8852BU& RTL8811CU
Frequency Range	RTL8852BU BT/BLE/ WIFI 2.4G: 2400MHz-2483.5MHz WIFI 5G: 5150MHz-5250MHz, 5725MHz -5850MHz
	RTL8811CU WIFI 2.4G: 2400MHz-2483.5MHz WIFI 5G: 5150MHz-5250MHz, 5725MHz -5850MHz
Modulation Type	RTL8852BU BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK 2.4GHz 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 5GHz 802.11a/n: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
	RTL8811CU 2.4GHz 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM 5GHz 802.11a/n: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Data Rate	RTL8852BU BT: GFSK:1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK:3Mbps BLE: GFSK: 1Mbps, 2Mbps, 125kbps, 500kbps WIFI 2.4GHz: 802.11b: 1, 2, 5.5,11Mbps 802.11g: 6,9,12,18,24,36,48,54Mbps 802.11n: MCS0-MCS15, HT20/HT40 802.11ax: MCS0-MCS11, HE20/HE40 WIFI 5GHz: 802.11a: 6,9,12,18,24,36,48,54Mbps 802.11n: MCS0-MCS15, HT20/HT40 802.11ac: MCS0-MCS9, VHT20/40/80 802.11ax: MCS0-MCS11, HE20/HE40/HE80
	RTL8811CU WIFI 2.4GHz: 802.11b: 1, 2, 5.5,11Mbps 802.11g: 6,9,12,18,24,36,48,54Mbps 802.11n: HT20 reach up to72.2Mbps, HT40 reach up to150Mbps WIFI 5GHz: 802.11a: 6,9,12,18,24,36,48,54Mbps 802.11n: HT20 reach up to 72.2Mbps, HT40 reach up to150Mbps



	802.11ac: VHT20 reach up to 86.7Mbps, VHT40 reach up to 200Mbps, VHT80 reach up to 433.3Mbps
Antenna Type	Dipole Antenna
Working Temperature	0°C to +45°C
Storage Temperature	-40°C to +70°C
Operating Voltage	DC 12V from adapter

Note: 1) This report is for RTL8811CU. For other features of this EUT, test report will be issued separately.

2) RTL8852BU supports CDD mode and 11AX supports FULL RU only.

3) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT 20 (2412MHz~2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	*11	2462
*06	2437	---	---

802.11n HT40 (2422MHz~2452MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
*03	2422	*09	2452
04	2427	---	---
05	2432	---	---
*06	2437	---	---

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included Notebook, adapter and EUT for RF test.
- c. An executive program, "REALTEK 11ac 8821CU USB WLAN NIC Massproduction Kit (Ver. 1.2.0.9)" under Windows 7 system was executed to transmit and receive data via WLAN.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports / Radiation Emissions (30MHz ~ 1GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps) for 120V
2	802.11g (6Mbps) for 120V
3	802.11n HT20 (6.5Mbps) for 120V
4	802.11n HT40 (13.5Mbps) for 120V
5	802.11 g (6Mbps) for 240V
caused "Test Mode 2 at CH01:2412" generated the worst case, it was reported as the final data.	
Radiated emission (below 1GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)
caused "Test Mode 2 at CH01:2412" generated the worst case, it was reported as the final data.	
Radiated emission (above 1GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)
caused "Test Mode 1~4" generated the worst case, it was reported as the final data.	

Modulation Type	TX CONFIGURATION
802.11b	1TX
802.11g	1TX
802.11n HT20	1TX
802.11n HT40	1TX




2.4 Power Parameter Value of the test software

Mode	Frequency (MHz)	Power Setting			
		Ant 1	Ant 2	Ant 1+2	
				Ant 1	Ant 2
802.11b	2412	Default	N/A	N/A	N/A
	2437	Default	N/A	N/A	N/A
	2462	Default	N/A	N/A	N/A
802.11g	2412	Default	N/A	N/A	N/A
	2437	Default	N/A	N/A	N/A
	2462	Default	N/A	N/A	N/A
802.11n (20MHz)	2412	Default	N/A	N/A	N/A
	2437	Default	N/A	N/A	N/A
	2462	Default	N/A	N/A	N/A
802.11n (40MHz)	2422	Default	N/A	N/A	N/A
	2437	Default	N/A	N/A	N/A
	2452	Default	N/A	N/A	N/A



2.5 Description of Test System

Product	Manufacturer	Model No.	Power Cord
1 Notebook	SONY	PCG-71811P	Non-Shielded, 1.8m
2 Adapter	Asian	WA-36WFU	N/A

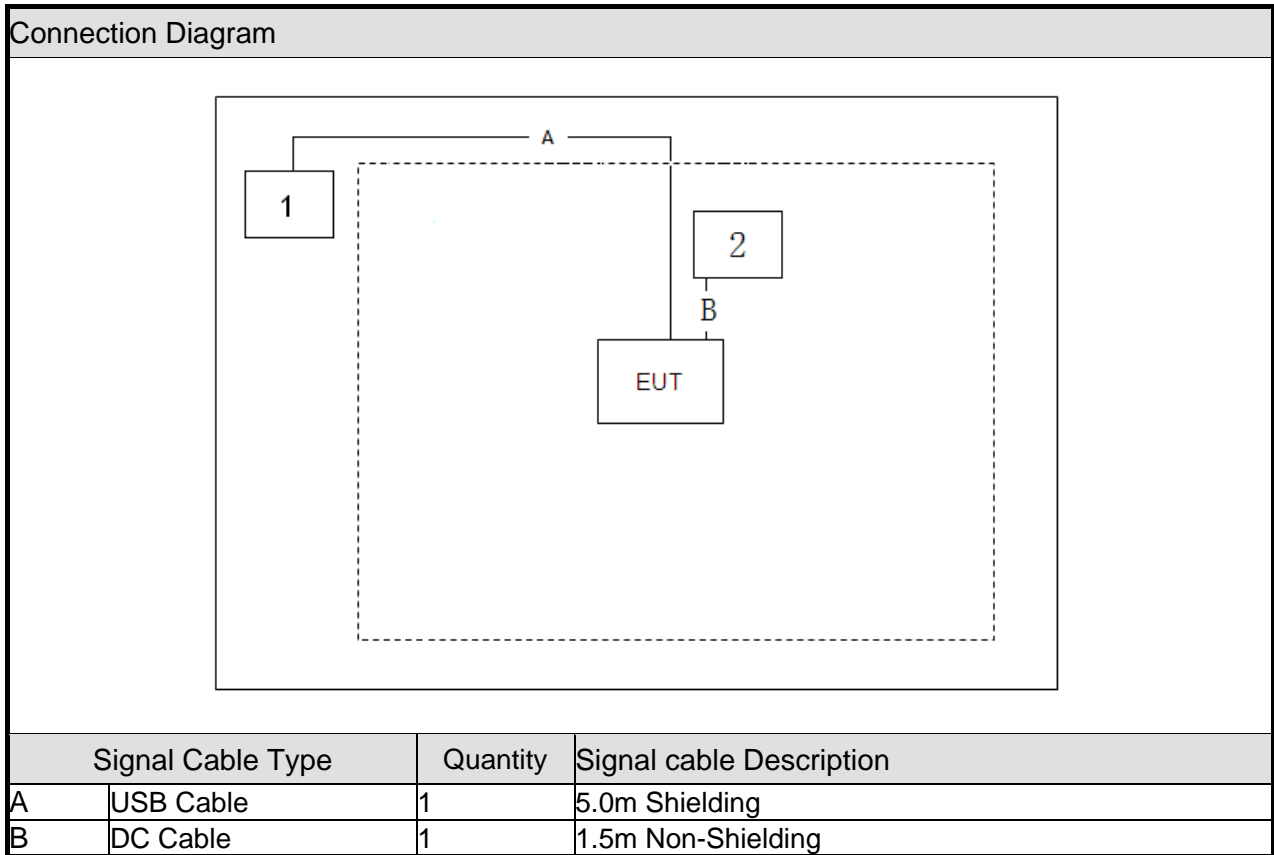



2.6 General Information of Test

Test Site	CerpPASS Technology Corporation(CerpPASS Laboratory) Address: Room 102, No. 5, Xing'an Road, Chang'an Town, Dongguan City, Guangdong Province Tel: +86-769-8547-1212 Fax: +86-769-8547-1912
FCC Designation No.:	CN1288
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-DG	2022/11/09	25°C / 53%	Amos Zhang
Radiated Emissions	3M01-DG	2022/11/03~2022/11/17	23~26°C / 52~56%	Amos Zhang
AC Power Line Conducted Emission	CON01-DG	2022/11/16	24°C / 54%	Amos Zhang

2.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.17dB
Radiated Spurious Emission(9KHz~30MHz)	±4.99dB
Radiated Spurious Emission(30MHz~1GHz)	±4.39dB
Radiated Spurious Emission(1GHz~18GHz)	±5.36dB
Radiated Spurious Emission(18GHz~40GHz)	±5.43dB
6dB Bandwidth&20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±0.57 dB
Power Spectral Density	±1.01 dB
Dwell Time / Deactivation Time	±1.1%

**3. Test Equipment and Ancillaries Used for Tests**

AC Power Line Conducted Emission					
Test Site	CON01-DG				
Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100564	2022.01.08	2023.01.07
LISN	SCHWARZBECK	NSLK 8127	8127748	2022.01.08	2023.01.07
LISN	R&S	ENV216	100024	2022.01.08	2023.01.07
ISN	TESEQ	ISN T800	42809	2022.05.07	2023.05.06
Pulse Limiter with 10dB Attenuation	SCHWARZBECK	VTSD 9561-F	9561-F106	2022.01.08	2023.01.07
Temperature/ Humidity Meter	GEMLEAD	STH200A	N/A	2022.08.05	2023.08.04

Radiated Emissions					
Test Site	3M01-DG				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Test Receiver	R&S	ESCI	100565	2022.05.07	2023.05.06
Amplifier	EMCI	EMC330	980082	2022.05.07	2023.05.06
Loop Antenna	R&S	HFH2-Z2	100150	2022.05.11	2024.05.10
Bilog Antenna	Sunol Science	JB1	A072414-2	2022.05.25	2024.05.24
Preamplifier	Agilent	8449B	3008A02342	2022.01.08	2023.01.07
Preamplifier	COM-POWER	PA-840	711885	2022.05.07	2023.05.06
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120 D	9120D-619	2022.05.22	2024.05.21
Standard Gain Horn Antenna	TRC	HA-2640	18050	2022.05.09	2024.05.08
Standard Gain Horn Antenna	TRC	HA-1726	18051	2022.05.09	2024.05.08
FSQ Signal Analyzer	R&S	FSQ40	200012	2022.05.07	2023.05.06
Temperature/ Humidity Meter	GEMLEAD	STH200A	N/A	2022.08.05	2023.08.04

RF Conducted					
Test Site	RFCON01-DG				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
MXA Signal Analyzer	KEYSIGHT	N9020A	US46220290	2022.05.07	2023.05.06
EXA Signal Analyzer	KEYSIGHT	N9010A	MY53400169	2022.05.07	2023.05.06
ESG VECTOR SIGNAL GENERATOR	Agilent	E4438C	MY45092582	2022.05.07	2023.05.06
MXG VECTOR SIGNAL GENERATOR	Agilent	N5182B	MY53050127	2022.05.07	2023.05.06
USB Wideband Power Sensor	Boonton	55006	9778	2022.01.08	2023.01.07
Temperature/ Humidity Meter	mingle	ETH529	N/A	2022.01.08	2023.01.07



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

WIFI 2.4G:

Antenna Type	Dipole Antenna
Antenna Gain	3.73dBi

(Non-Beamforming)



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 6.2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

The EUT was setup according to ANSI C63.10, 2013 and tested according to DTS test procedure of Oct 2014 KDB558074 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.




5.3 Typical Test Setup

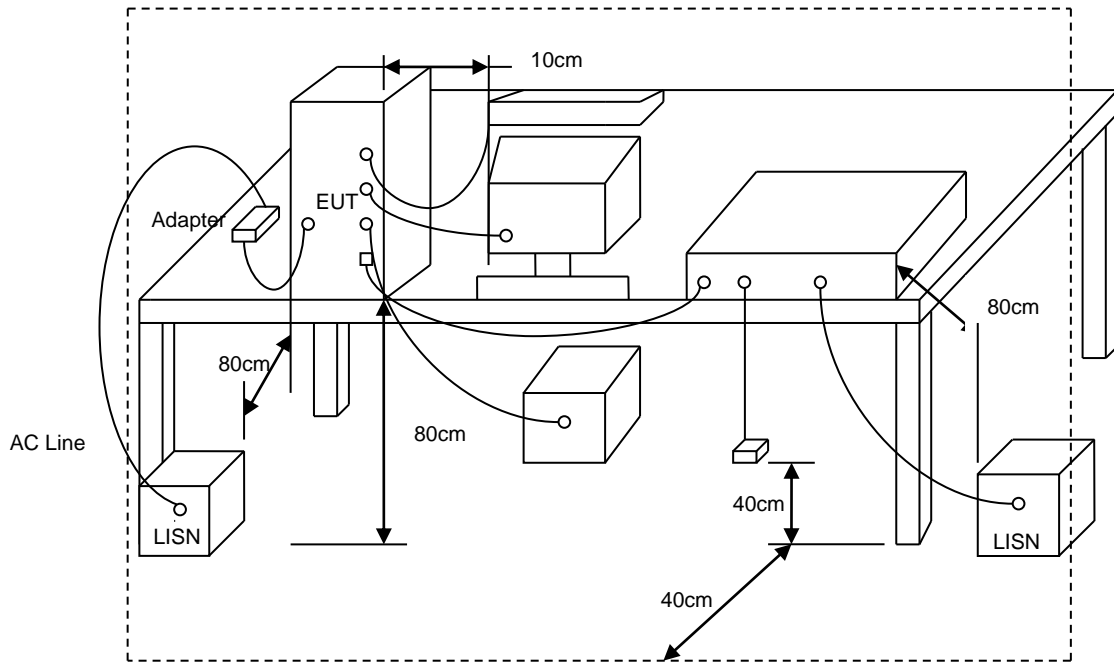




5.4 Test Result and Data

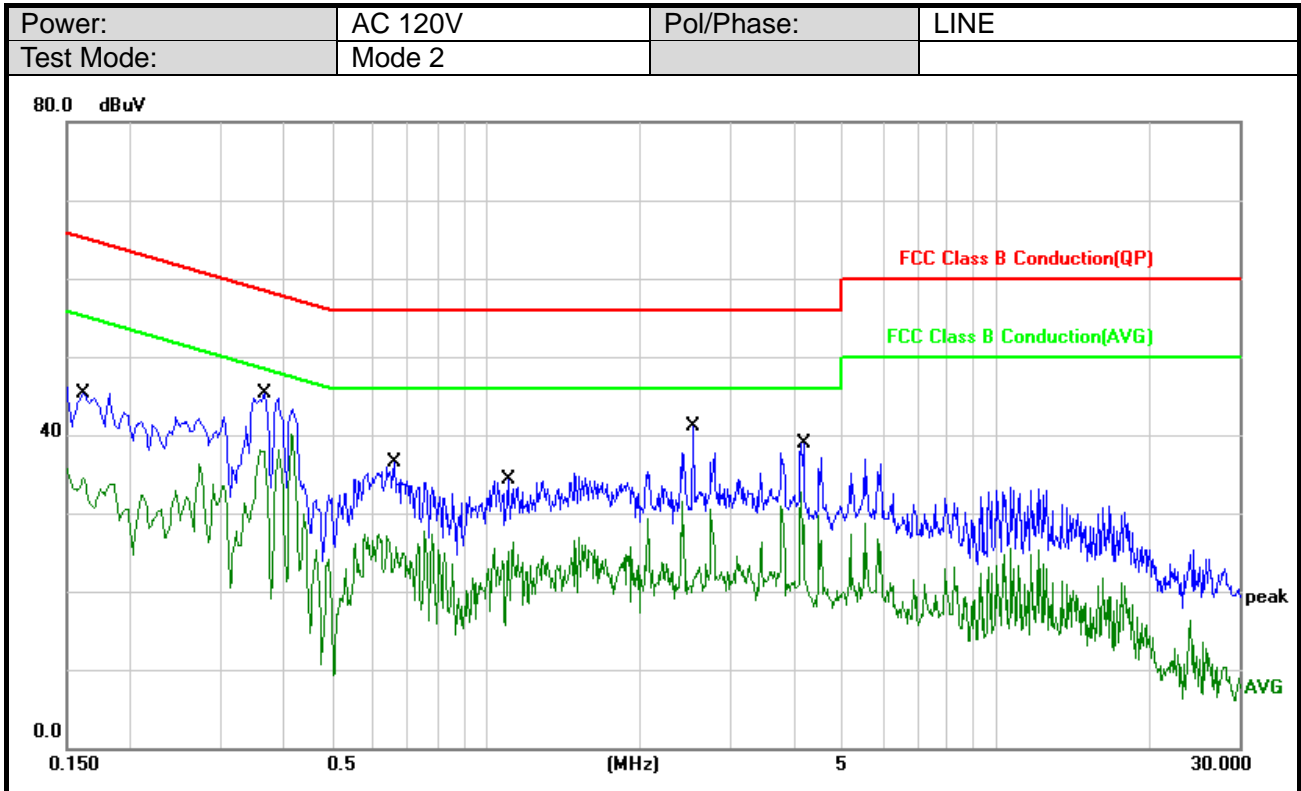

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	9.81	33.06	42.87	65.36	-22.49	QP
2	0.1620	9.81	22.54	32.35	55.36	-23.01	AVG
3	0.3660	9.83	33.74	43.57	58.59	-15.02	QP
4	0.3660	9.83	27.31	37.14	48.59	-11.45	AVG
5	0.6580	9.87	19.79	29.66	56.00	-26.34	QP
6	0.6580	9.87	12.56	22.43	46.00	-23.57	AVG
7	1.1019	9.69	20.05	29.74	56.00	-26.26	QP
8	1.1019	9.69	14.04	23.73	46.00	-22.27	AVG
9	2.5500	9.66	17.80	27.46	56.00	-28.54	QP
10	2.5500	9.66	11.23	20.89	46.00	-25.11	AVG
11	4.1860	9.70	25.72	35.42	56.00	-20.58	QP
12	4.1860	9.70	15.89	25.59	46.00	-20.41	AVG

Note: Level = Reading + Factor
 Margin = Level – Limit

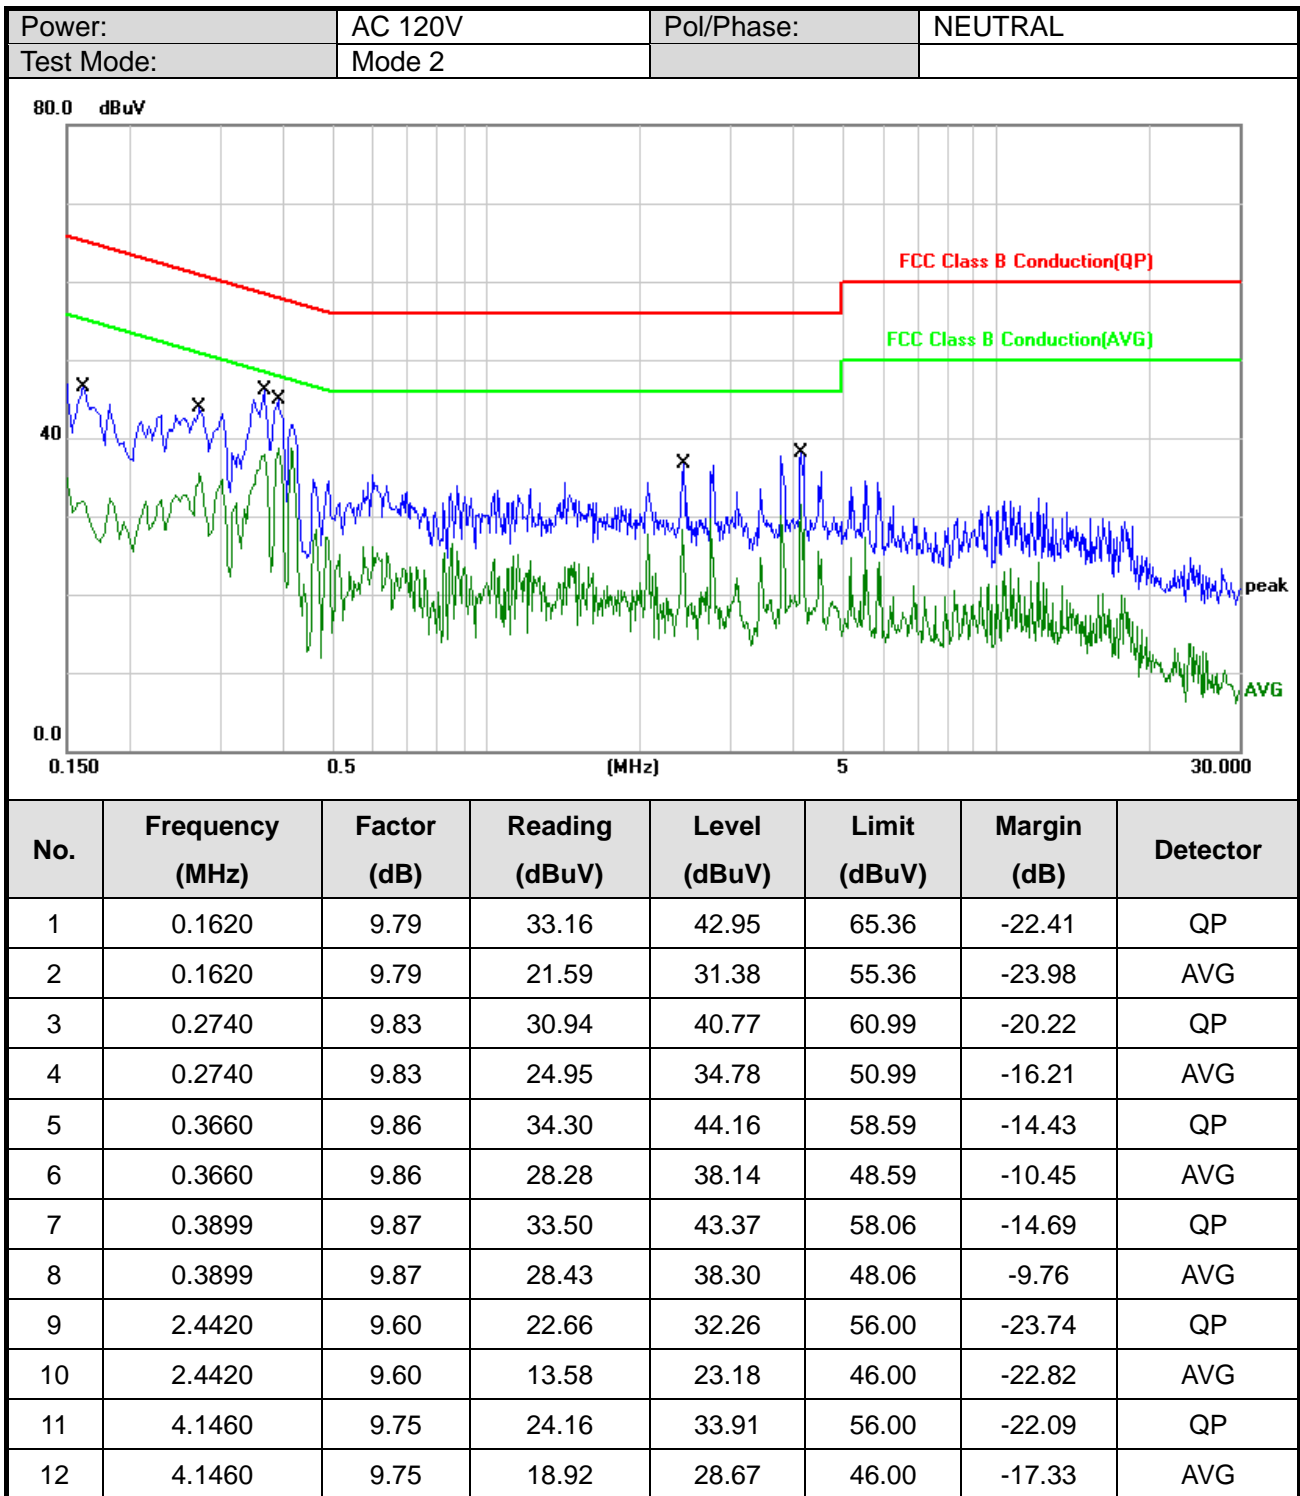

Note: Level = Reading + Factor
 Margin = Level – Limit



6. Test of Spurious Emission (Radiated)

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

6.2 Test Procedures


- a. The EUT was placed on a rotatable table top 0.8 meter for frequency below 1GHz and 1.5meter for frequency above 1GHz above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than AVG limit (that means the emission level in peak mode also complies with the limit in AVG mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in AVG mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.
Note: The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions sch that emissions from the EUT are maximized.

(X-AXIS is the worst.)




6.3 Typical Test Setup


Below 30MHz test setup

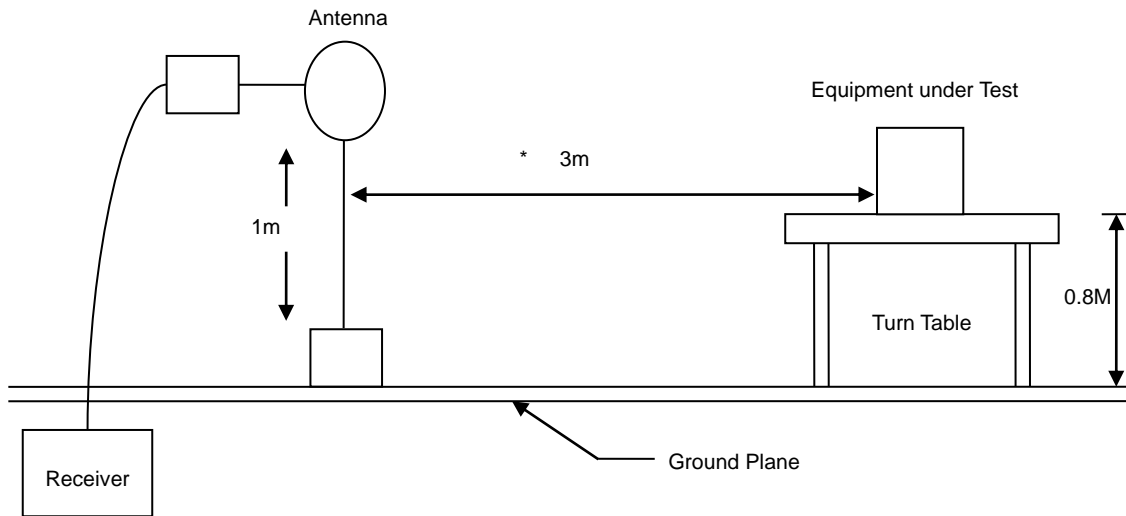

30MHz- 1GHz Test Setup

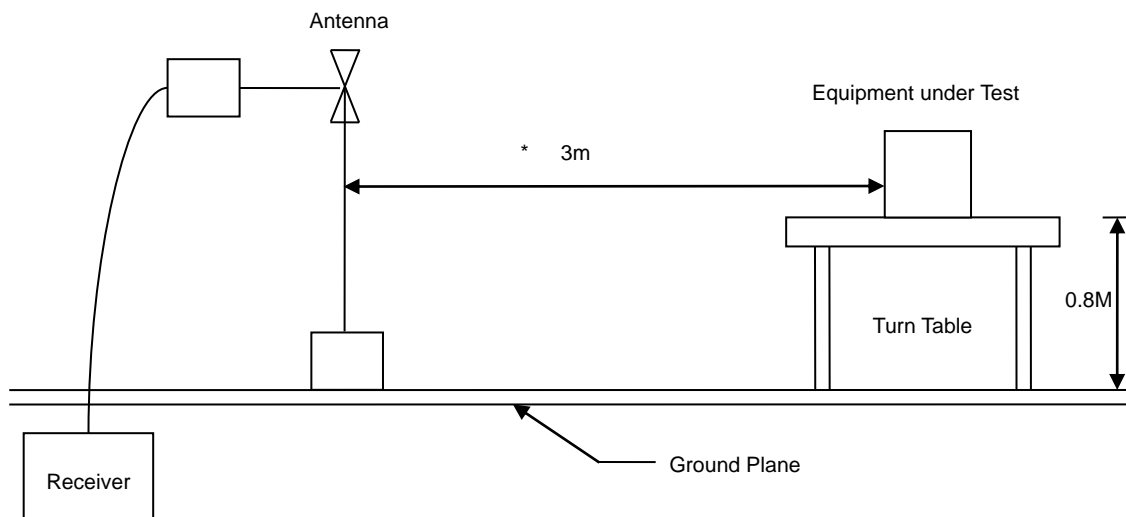

Above 1GHz Test Setup

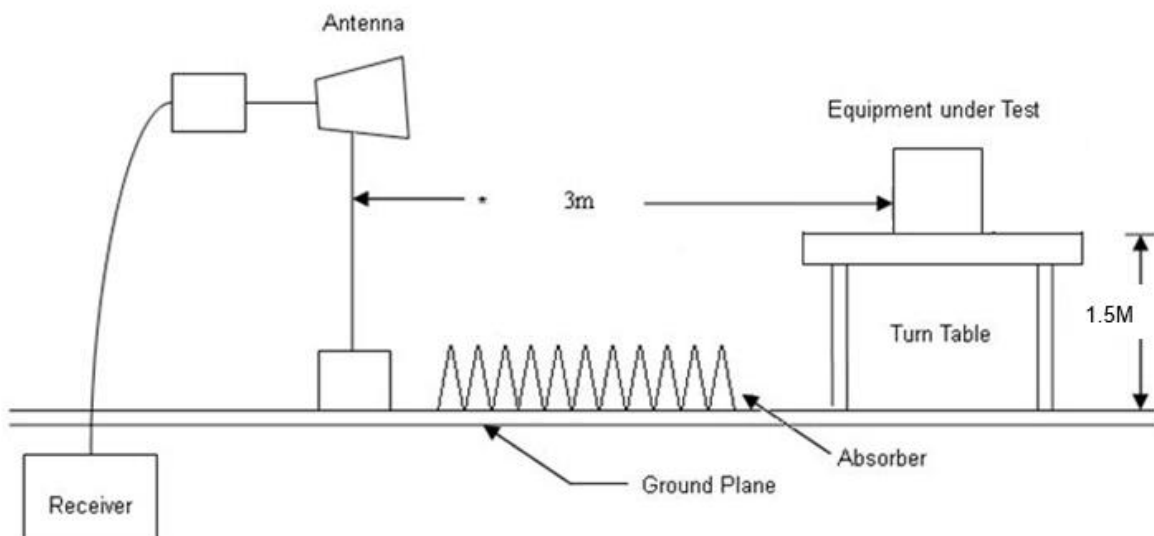




6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.


6.5 Test Result and Data (30MHz ~ 1GHz)

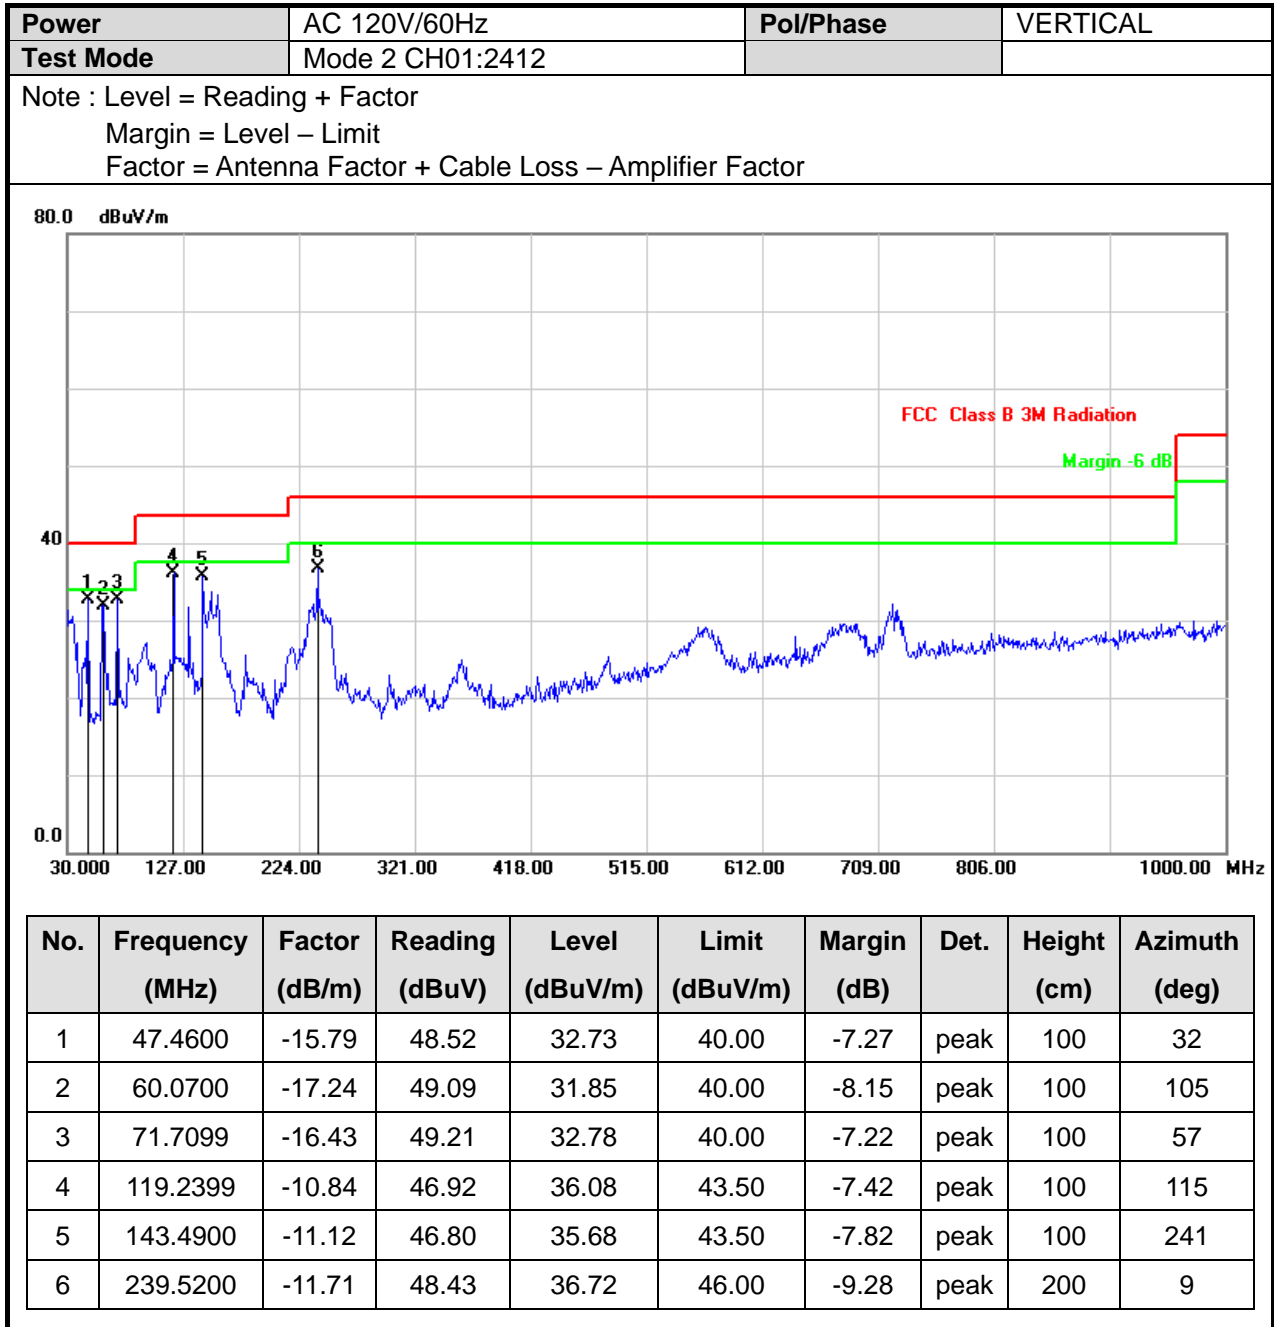



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 2 CH01:2412		

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor

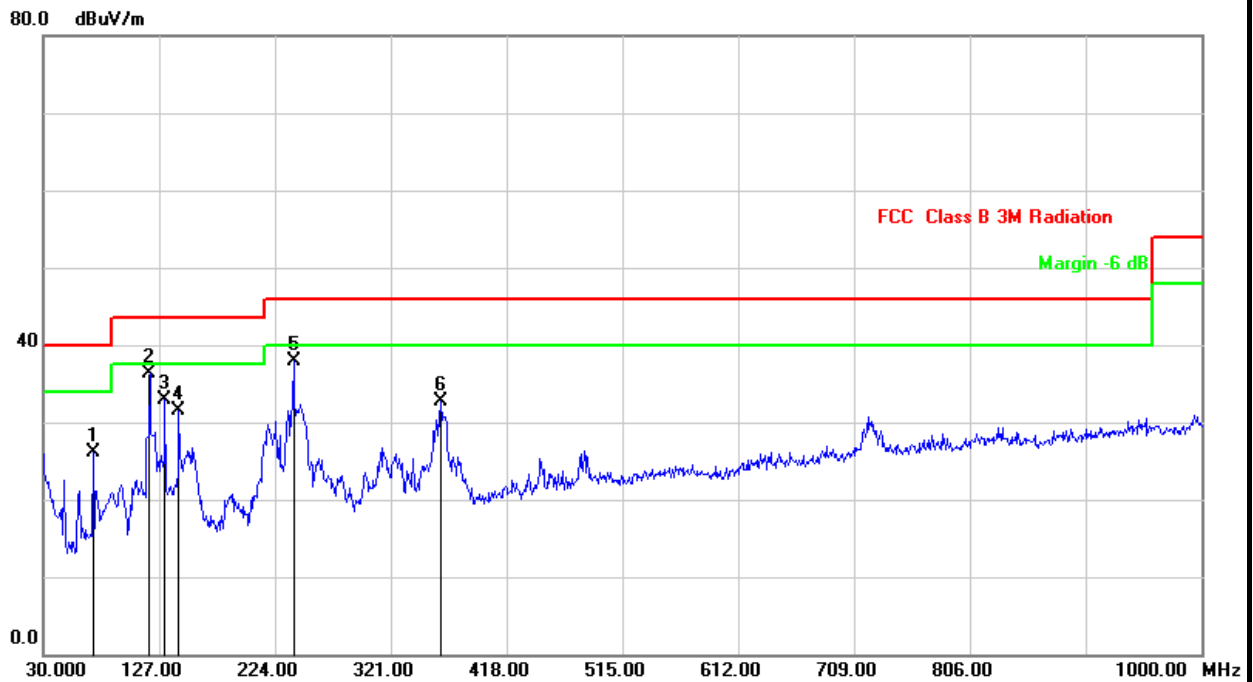


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	71.7099	-16.43	42.63	26.20	40.00	-13.80	peak	100	31
2	119.2399	-10.84	47.19	36.35	43.50	-7.15	peak	200	106
3	131.8499	-10.45	43.44	32.99	43.50	-10.51	peak	100	244
4	143.4900	-11.12	42.57	31.45	43.50	-12.05	peak	100	72
5	239.5200	-11.71	49.64	37.93	46.00	-8.07	peak	100	305
6	362.7099	-8.00	40.64	32.64	46.00	-13.36	peak	100	118



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 1, CH01	Operation mode	TX

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor
 The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

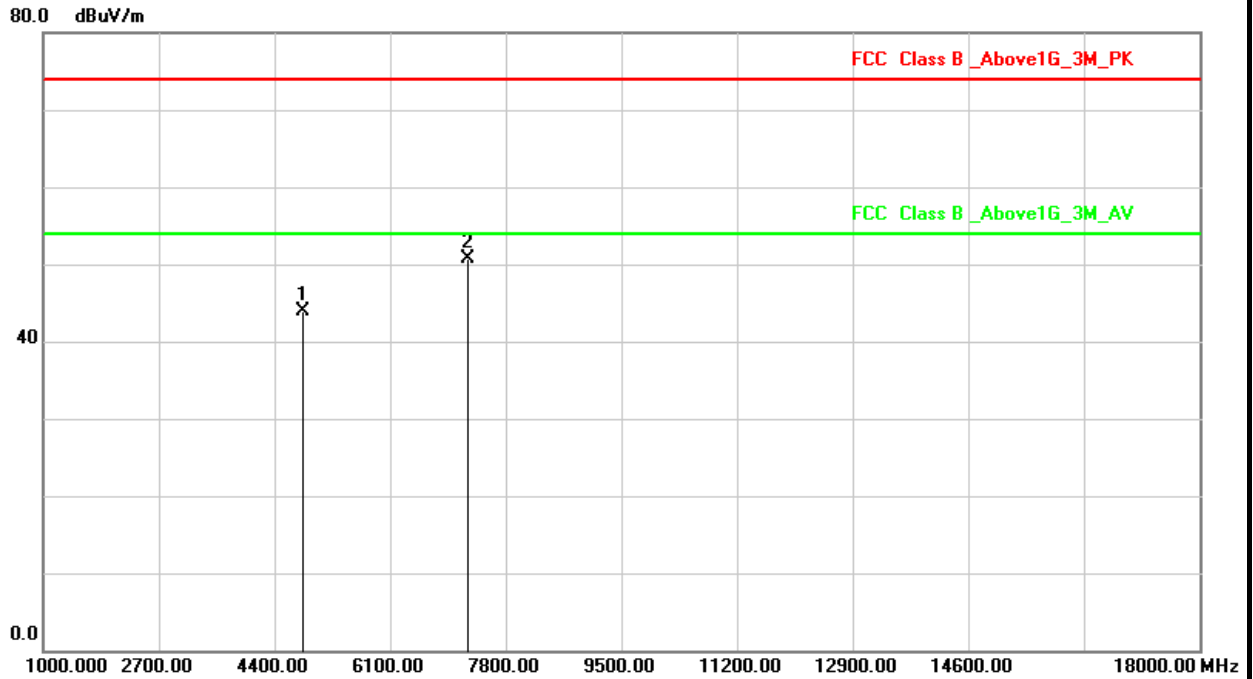


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4824.000	3.53	40.34	43.87	74.00	-30.13	peak
2	7236.000	11.54	39.19	50.73	74.00	-23.27	peak



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 1, CH01	Operation mode	TX

Note : Level = Reading + Factor
Margin = Level – Limit
Factor = Antenna Factor + Cable Loss – Amplifier Factor
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

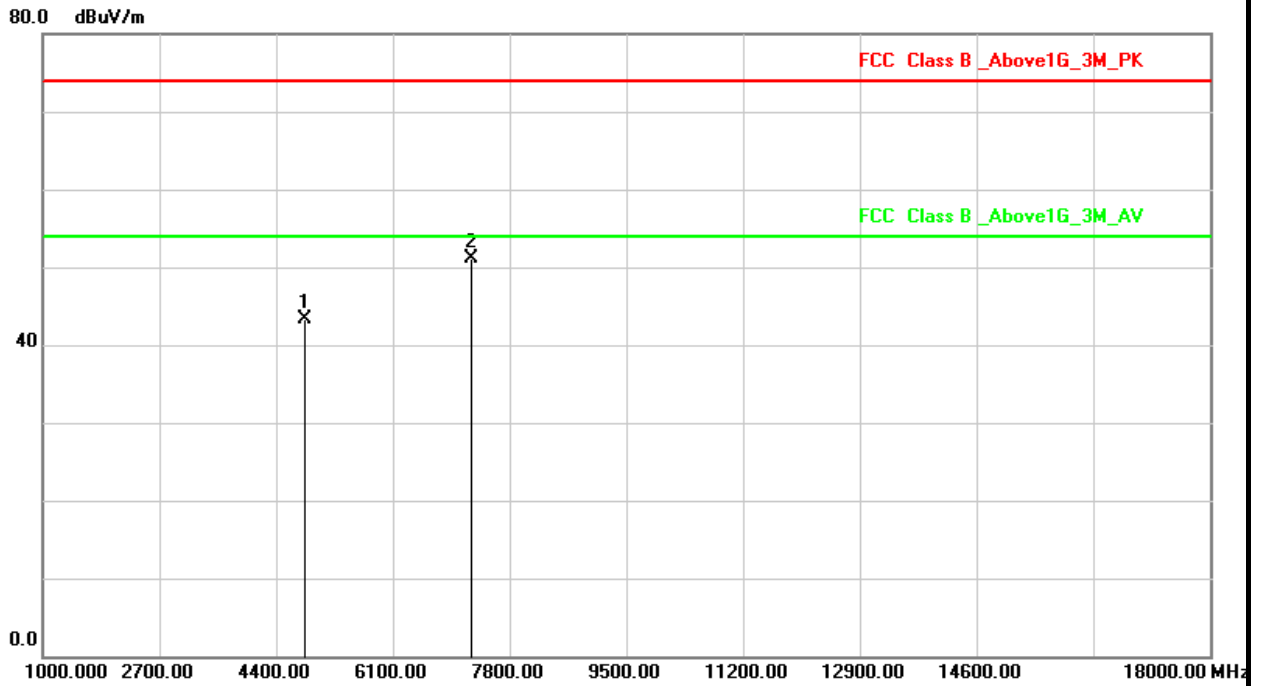


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4824.000	3.53	39.75	43.28	74.00	-30.72	peak
2	7236.000	11.54	39.63	51.17	74.00	-22.83	peak



Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 1, CH06	Operation mode	TX

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor
 The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

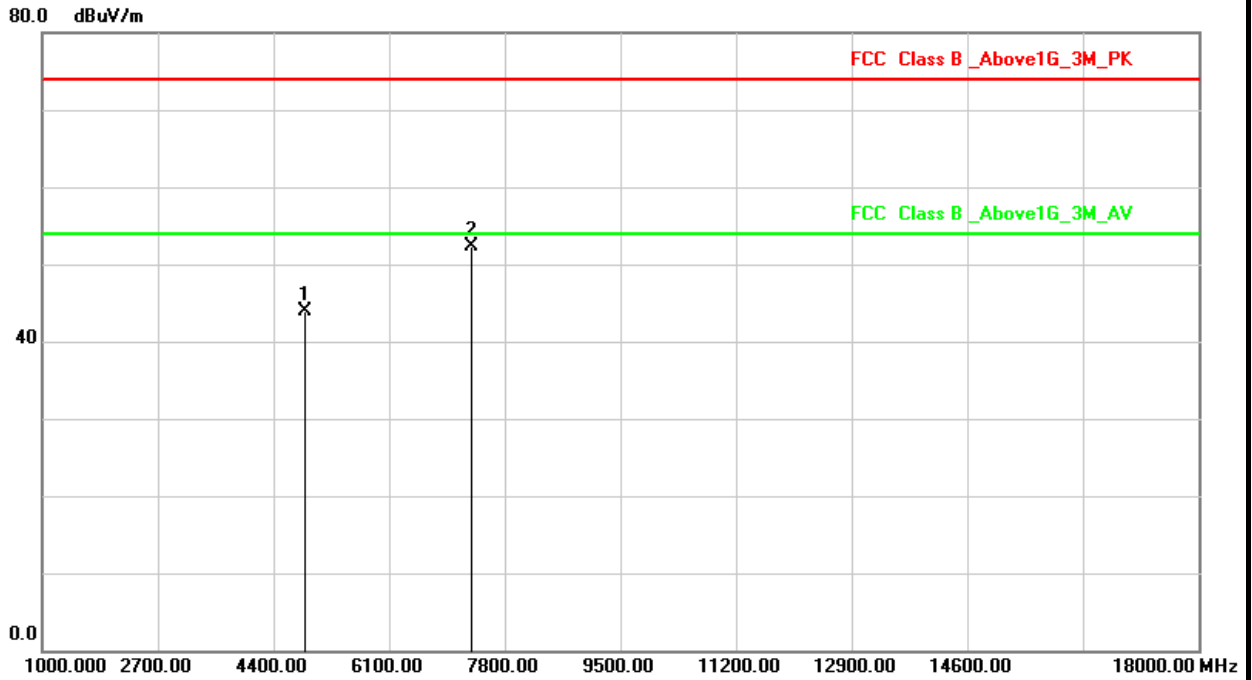


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4874.000	3.63	40.25	43.88	74.00	-30.12	peak
2	7311.000	11.48	40.81	52.29	74.00	-21.71	peak



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 1, CH06	Operation mode	TX

Note : Level = Reading + Factor
Margin = Level – Limit
Factor = Antenna Factor + Cable Loss – Amplifier Factor
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

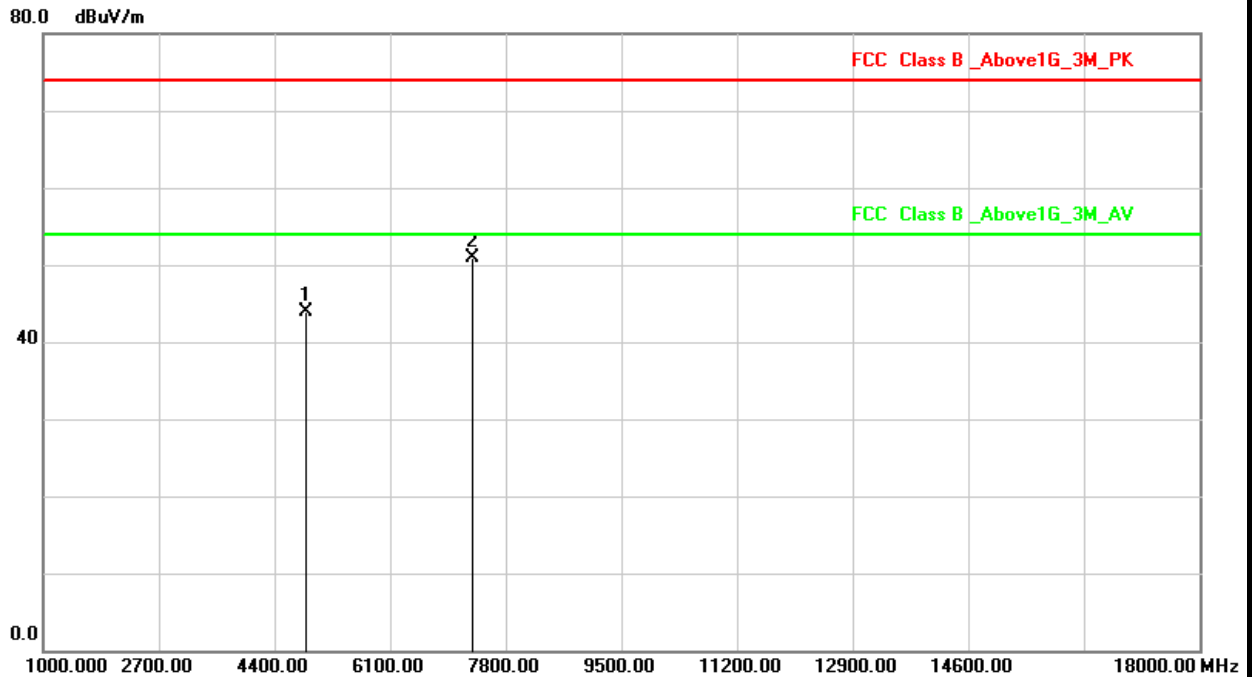


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4874.000	3.63	40.25	43.88	74.00	-30.12	peak
2	7311.000	11.48	39.50	50.98	74.00	-23.02	peak



Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 1, CH11	Operation mode	TX

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor
 The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

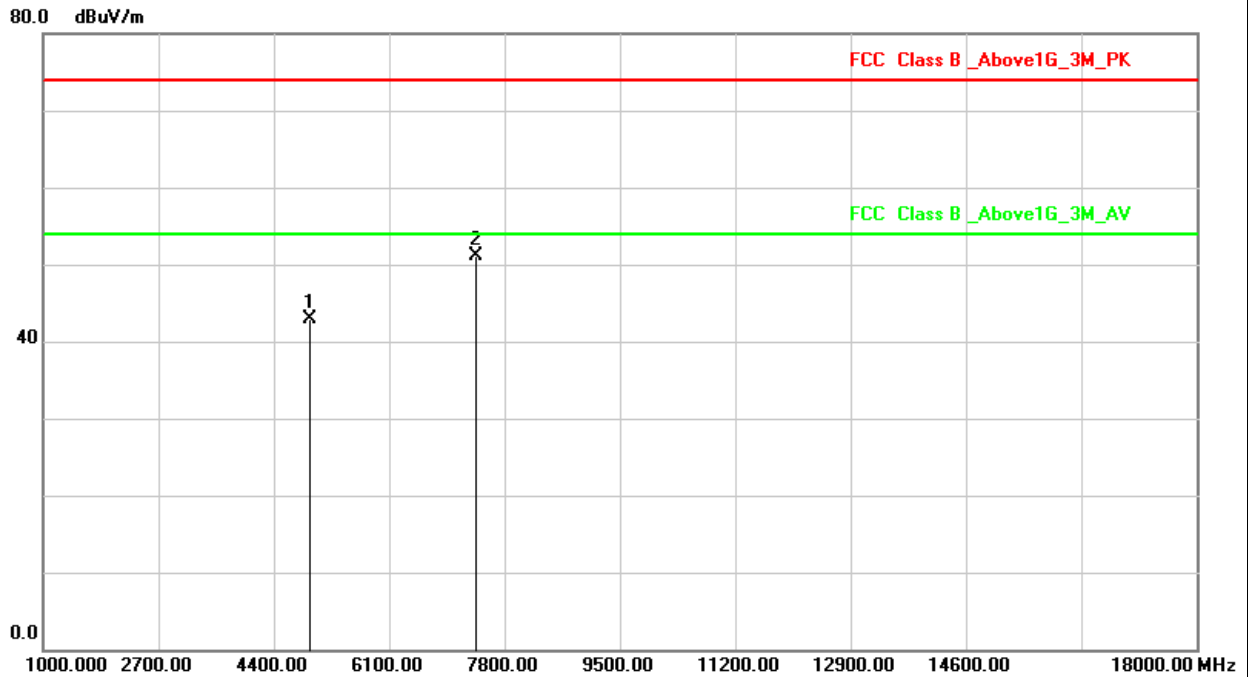


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4924.000	3.74	39.14	42.88	74.00	-31.12	peak
2	7386.000	11.41	39.71	51.12	74.00	-22.88	peak



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 1, CH11	Operation mode	TX

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor
 The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

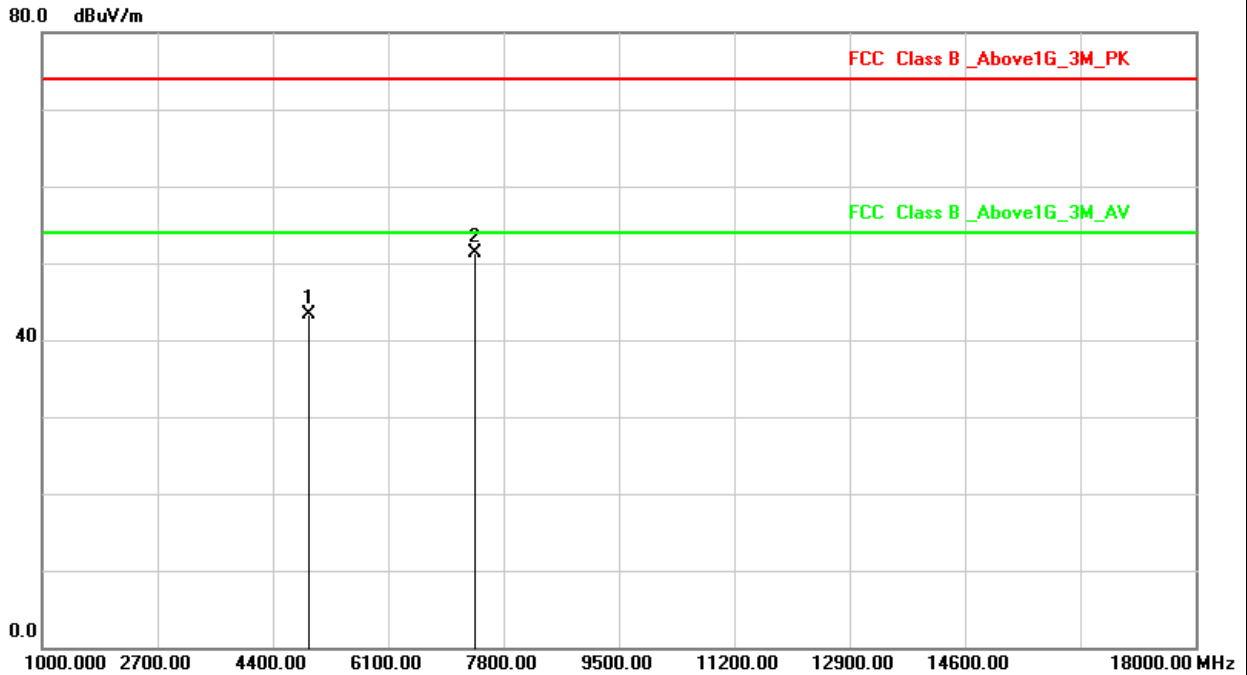


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4924.000	3.74	39.54	43.28	74.00	-30.72	peak
2	7386.000	11.41	39.83	51.24	74.00	-22.76	peak



Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 2, CH01	Operation mode	TX

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor
 The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

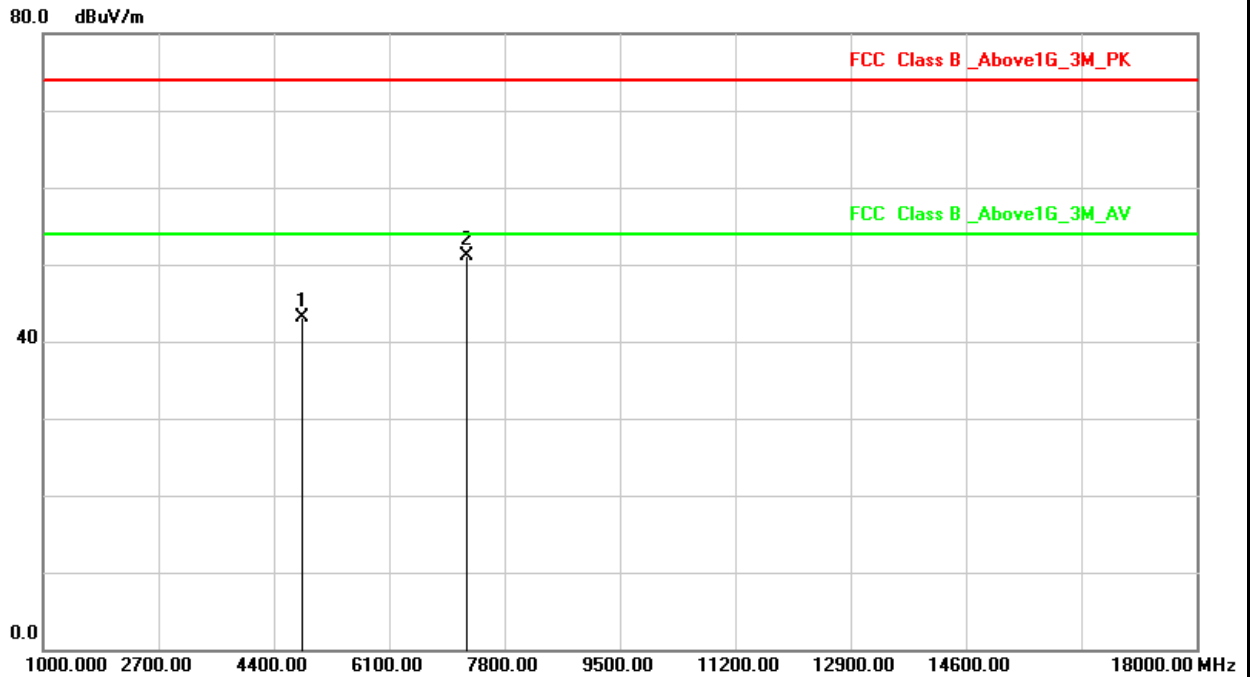


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4824.000	3.53	39.49	43.02	74.00	-30.98	peak
2	7236.000	11.54	39.63	51.17	74.00	-22.83	peak



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 2, CH01	Operation mode	TX

Note : Level = Reading + Factor
Margin = Level – Limit
Factor = Antenna Factor + Cable Loss – Amplifier Factor
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

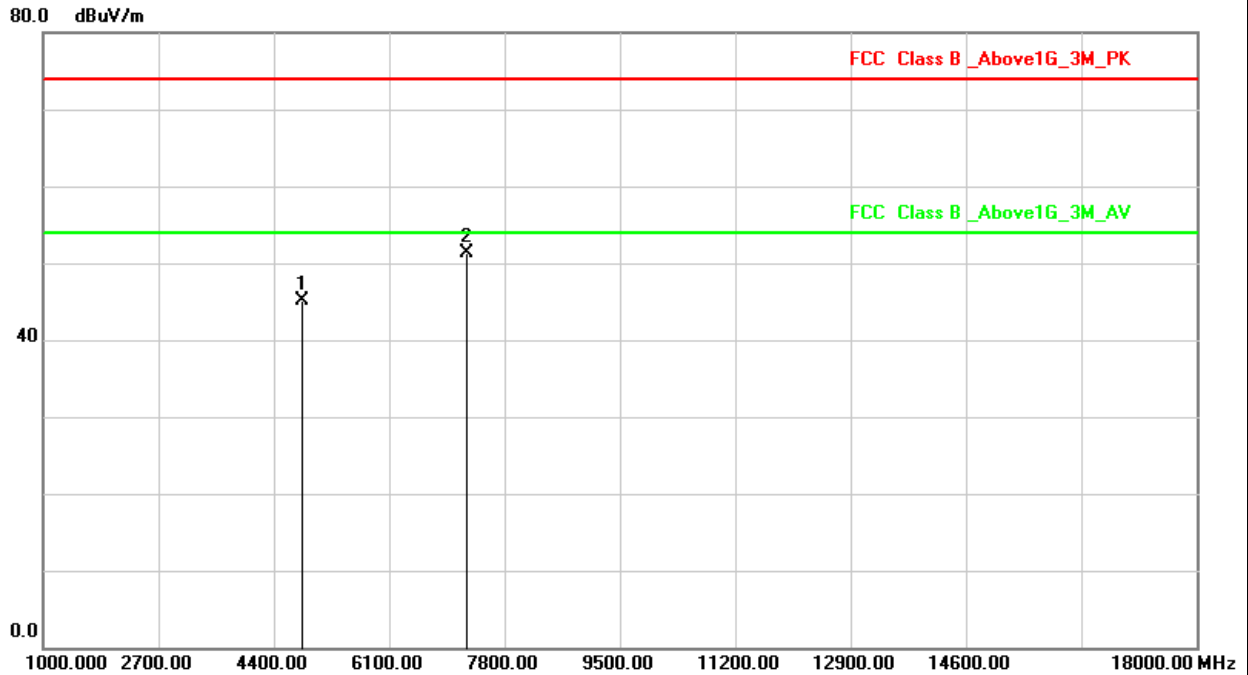


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4824.000	3.53	41.59	45.12	74.00	-28.88	peak
2	7236.000	11.54	39.78	51.32	74.00	-22.68	peak



Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 2, CH06	Operation mode	TX

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor
 The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

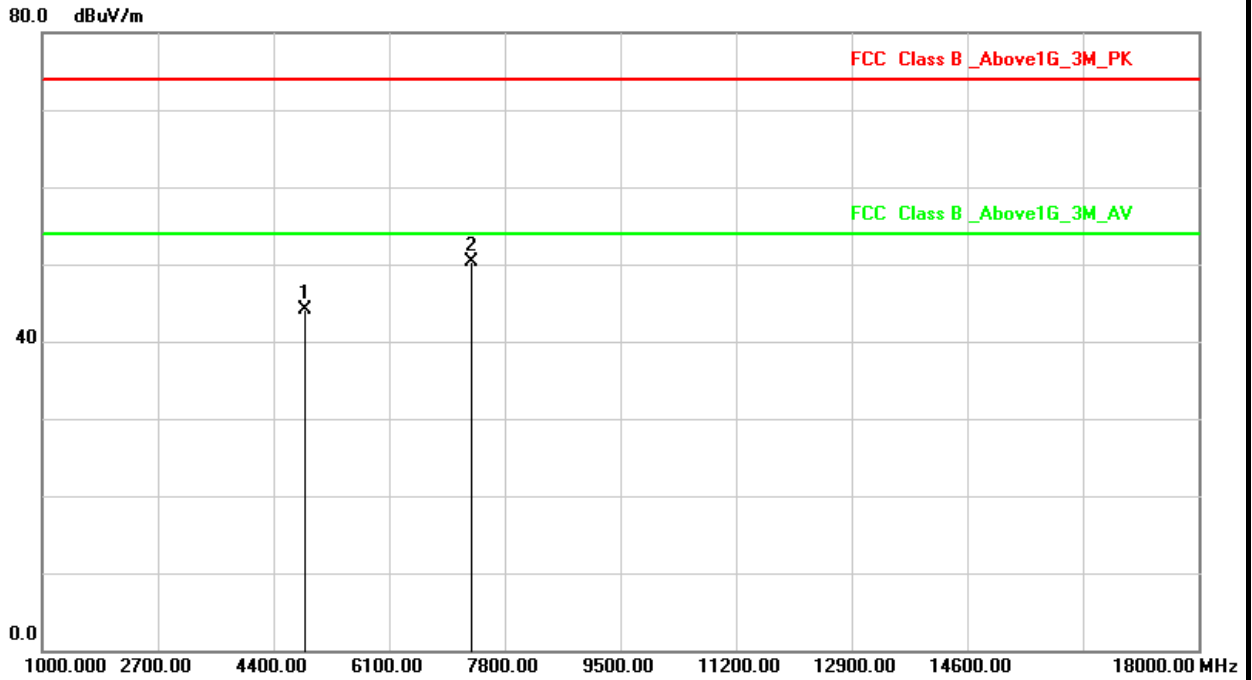


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4874.000	3.63	40.47	44.10	74.00	-29.90	peak
2	7311.000	11.48	38.81	50.29	74.00	-23.71	peak



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 2, CH06	Operation mode	TX

Note : Level = Reading + Factor
Margin = Level – Limit
Factor = Antenna Factor + Cable Loss – Amplifier Factor
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

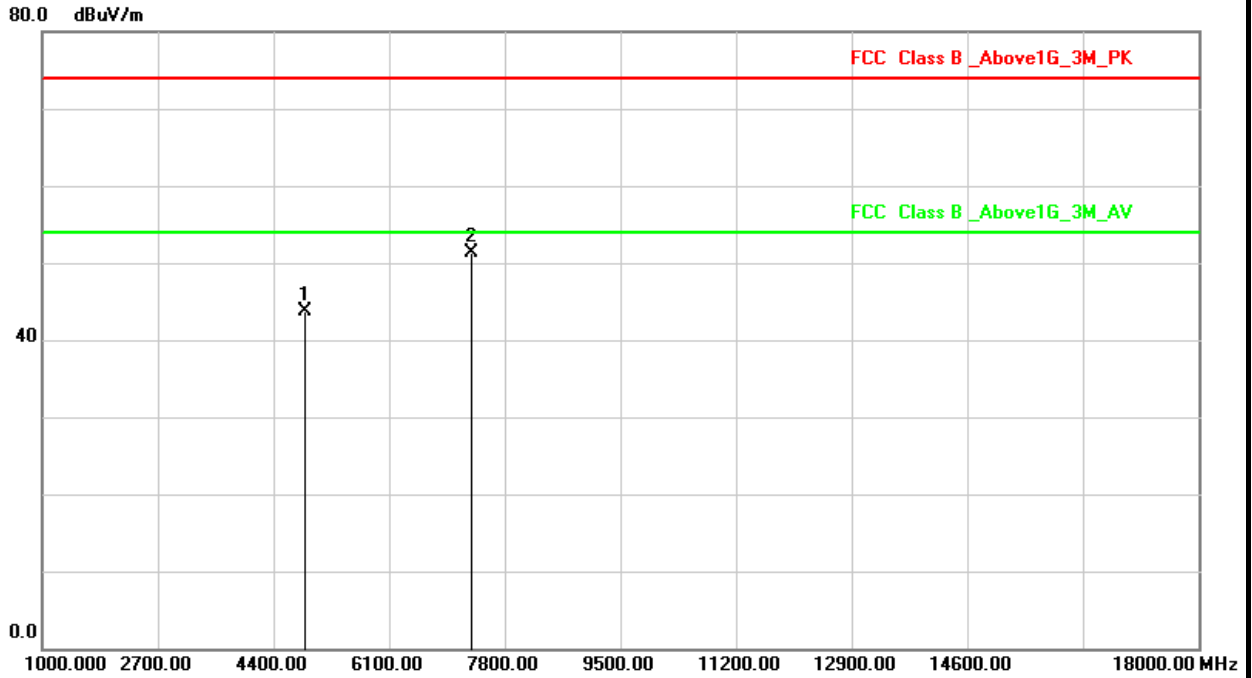


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4874.000	3.63	40.16	43.79	74.00	-30.21	peak
2	7311.000	11.48	39.91	51.39	74.00	-22.61	peak



Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 2, CH11	Operation mode	TX

Note : Level = Reading + Factor
Margin = Level – Limit
Factor = Antenna Factor + Cable Loss – Amplifier Factor
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

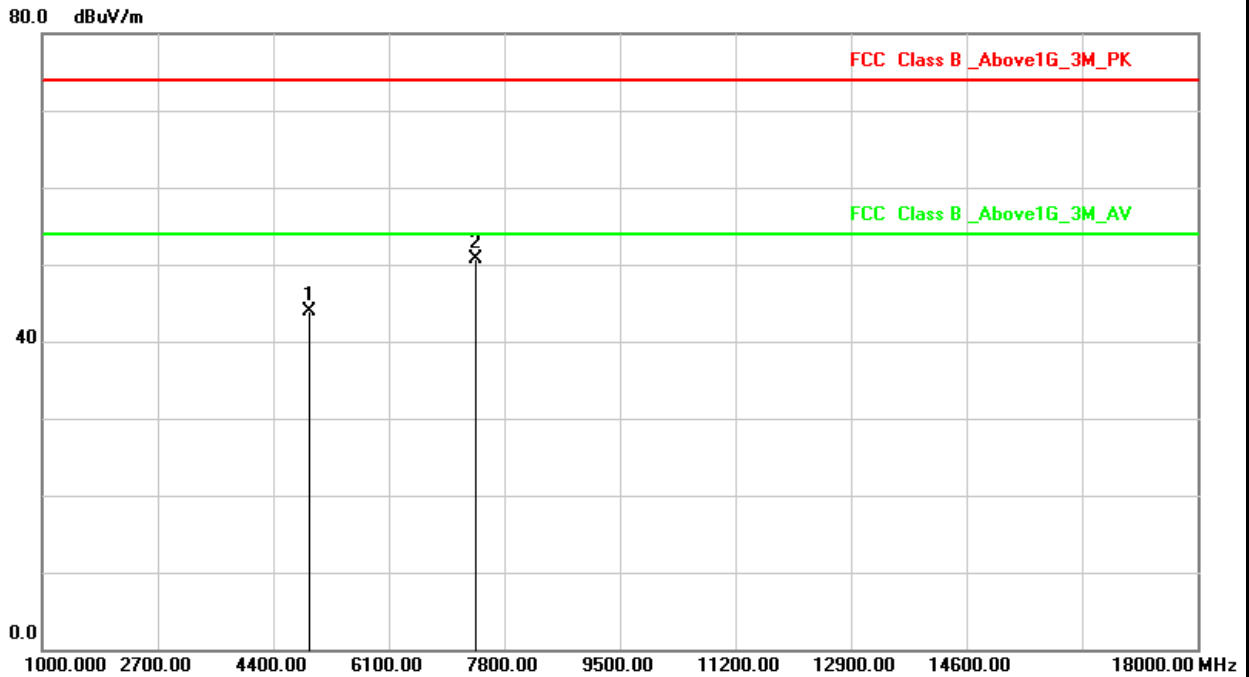


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4924.000	3.74	40.08	43.82	74.00	-30.18	peak
2	7386.000	11.41	39.20	50.61	74.00	-23.39	peak



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 2, CH11	Operation mode	TX

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor
 The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

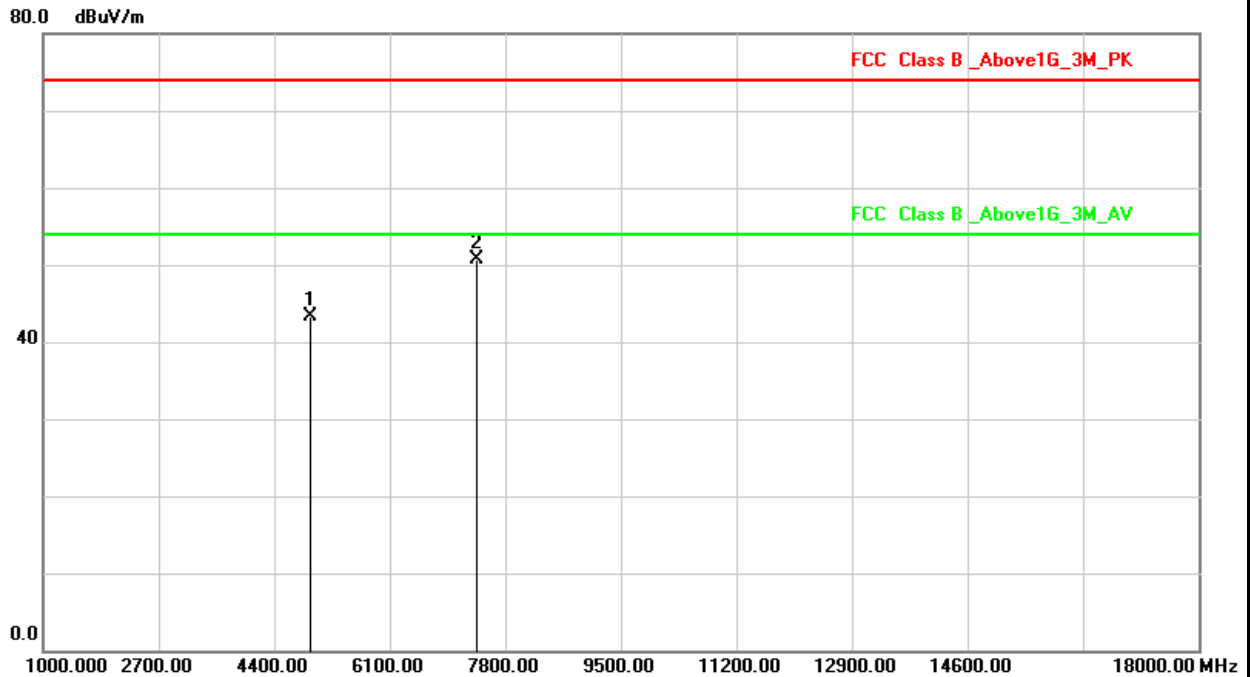


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4924.000	3.74	39.66	43.40	74.00	-30.60	peak
2	7386.000	11.41	39.25	50.66	74.00	-23.34	peak



Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 3, CH01	Operation mode	TX

Note : Level = Reading + Factor
Margin = Level – Limit
Factor = Antenna Factor + Cable Loss – Amplifier Factor
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

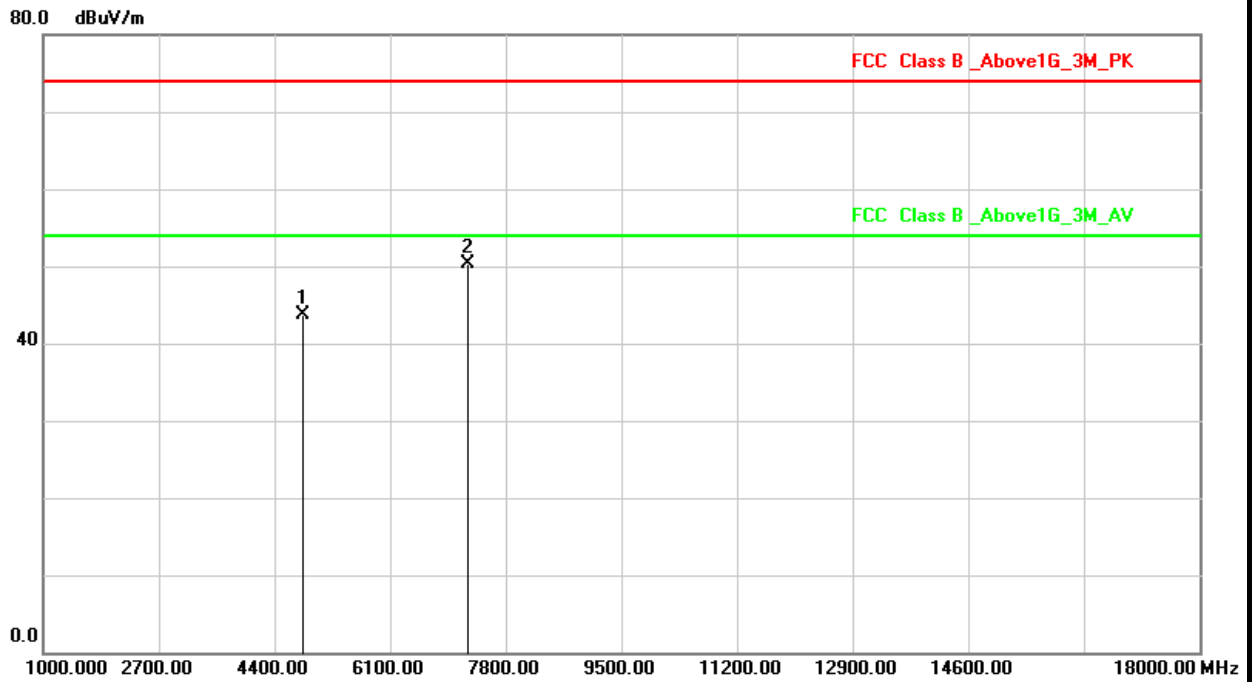


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4824.000	3.53	40.21	43.74	74.00	-30.26	peak
2	7236.000	11.54	38.76	50.30	74.00	-23.70	peak



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 3, CH01	Operation mode	TX

Note : Level = Reading + Factor
Margin = Level – Limit
Factor = Antenna Factor + Cable Loss – Amplifier Factor
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

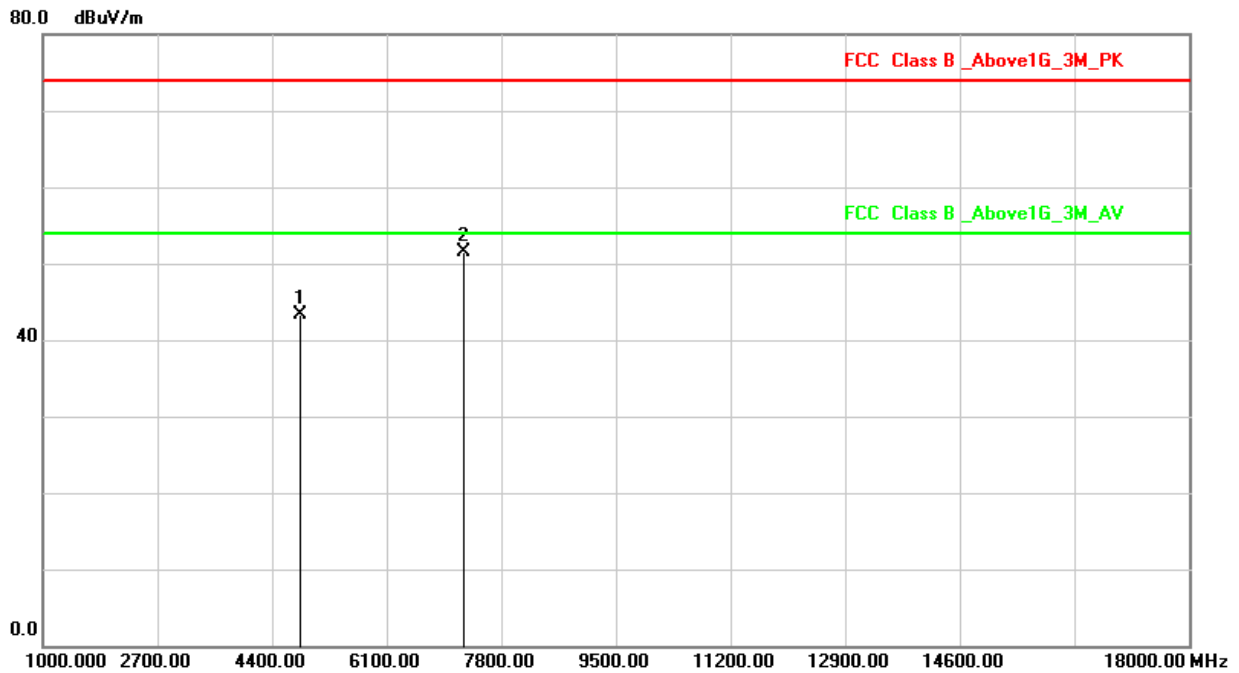


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4824.000	3.53	39.82	43.35	74.00	-30.65	peak
2	7236.000	11.54	39.97	51.51	74.00	-22.49	peak



Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 3, CH06	Operation mode	TX

Note : Level = Reading + Factor
Margin = Level – Limit
Factor = Antenna Factor + Cable Loss – Amplifier Factor
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

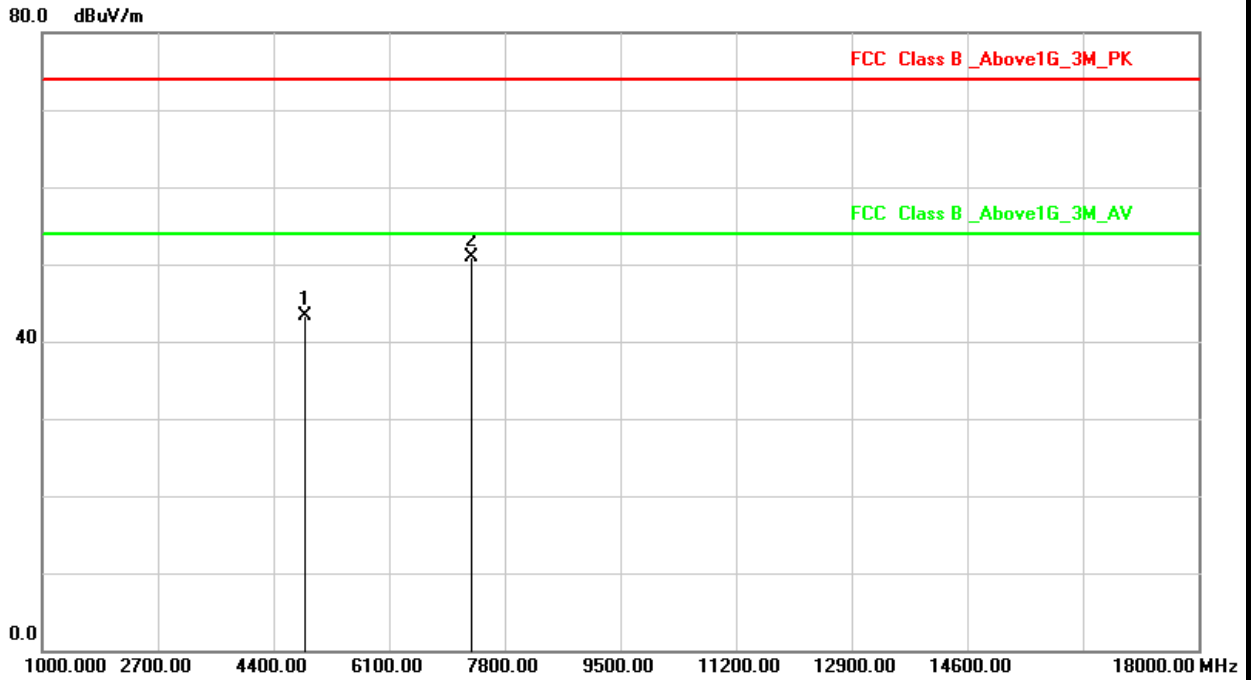


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4874.000	3.63	39.77	43.40	74.00	-30.60	peak
2	7311.000	11.48	39.47	50.95	74.00	-23.05	peak



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 3, CH06	Operation mode	TX

Note : Level = Reading + Factor
Margin = Level – Limit
Factor = Antenna Factor + Cable Loss – Amplifier Factor
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

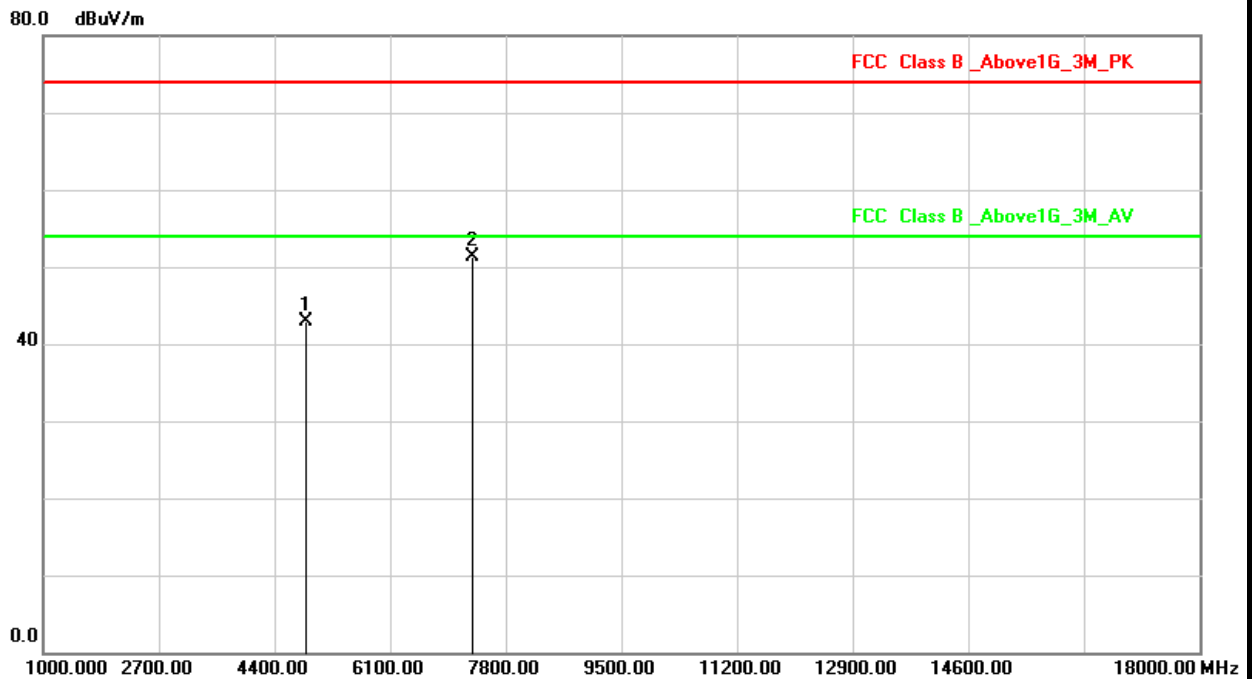


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4874.000	3.63	39.37	43.00	74.00	-31.00	peak
2	7311.000	11.48	39.92	51.40	74.00	-22.60	peak



Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 3, CH11	Operation mode	TX

Note : Level = Reading + Factor
Margin = Level – Limit
Factor = Antenna Factor + Cable Loss – Amplifier Factor
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

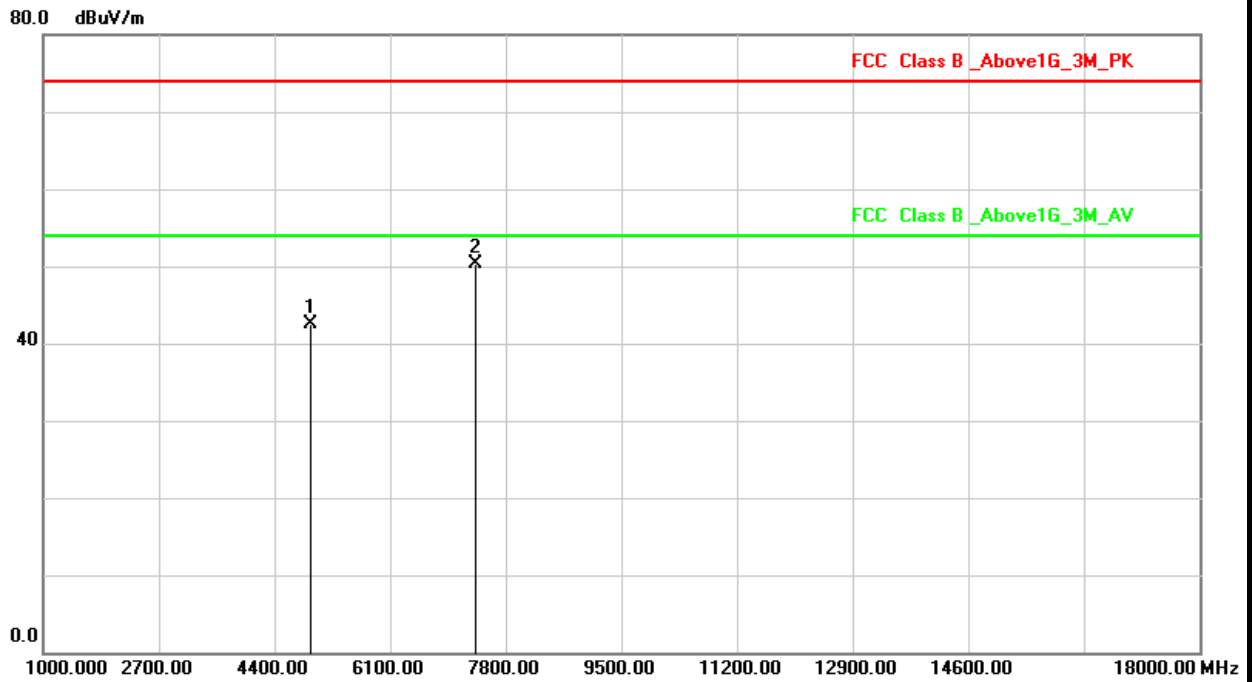


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4924.000	3.74	38.72	42.46	74.00	-31.54	peak
2	7386.000	11.41	38.81	50.22	74.00	-23.78	peak



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 3, CH11	Operation mode	TX

Note : Level = Reading + Factor
Margin = Level – Limit
Factor = Antenna Factor + Cable Loss – Amplifier Factor
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

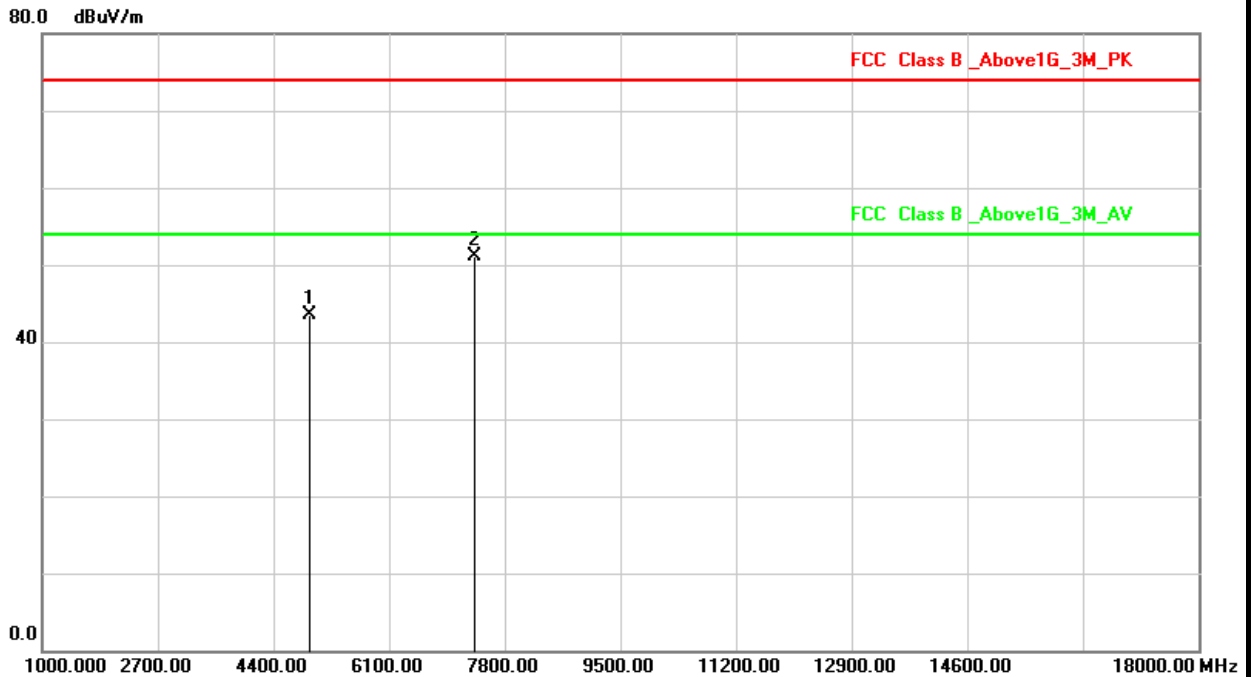


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4924.000	3.74	39.73	43.47	74.00	-30.53	peak
2	7386.000	11.41	39.78	51.19	74.00	-22.81	peak



Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 4, CH03	Operation mode	TX

Note : Level = Reading + Factor
Margin = Level – Limit
Factor = Antenna Factor + Cable Loss – Amplifier Factor
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

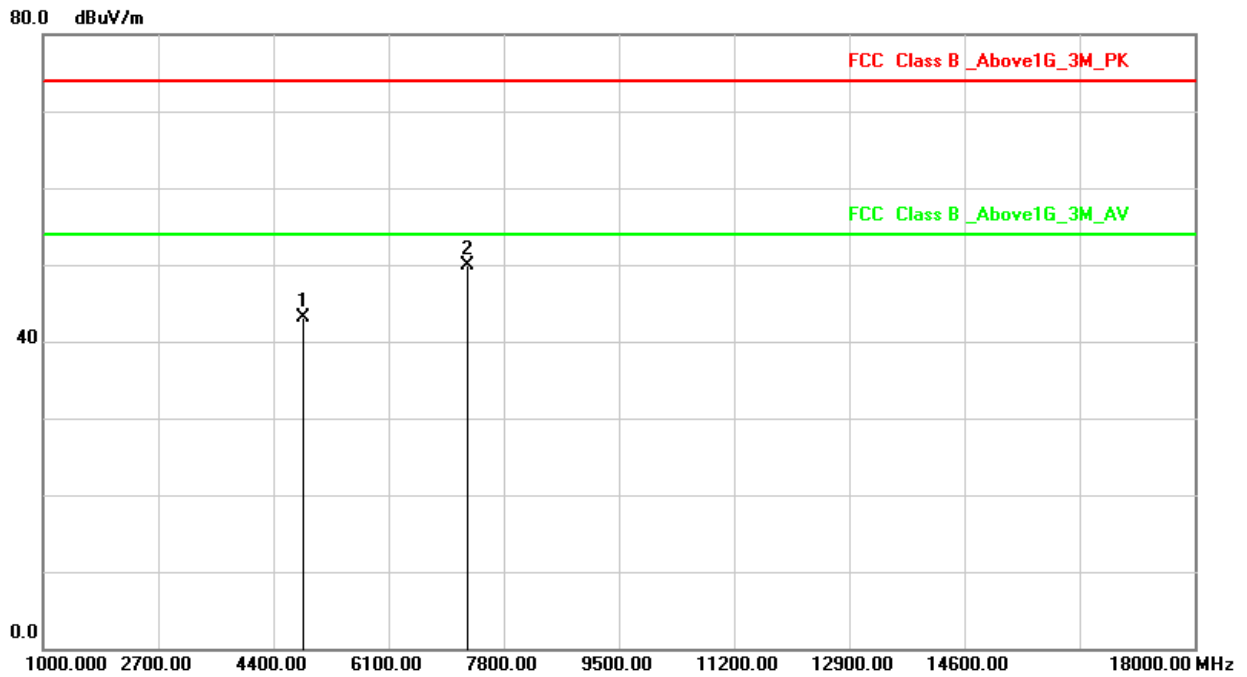


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4844.000	3.57	39.56	43.13	74.00	-30.87	peak
2	7266.000	11.51	38.31	49.82	74.00	-24.18	peak



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 4, CH03	Operation mode	TX

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor
 The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

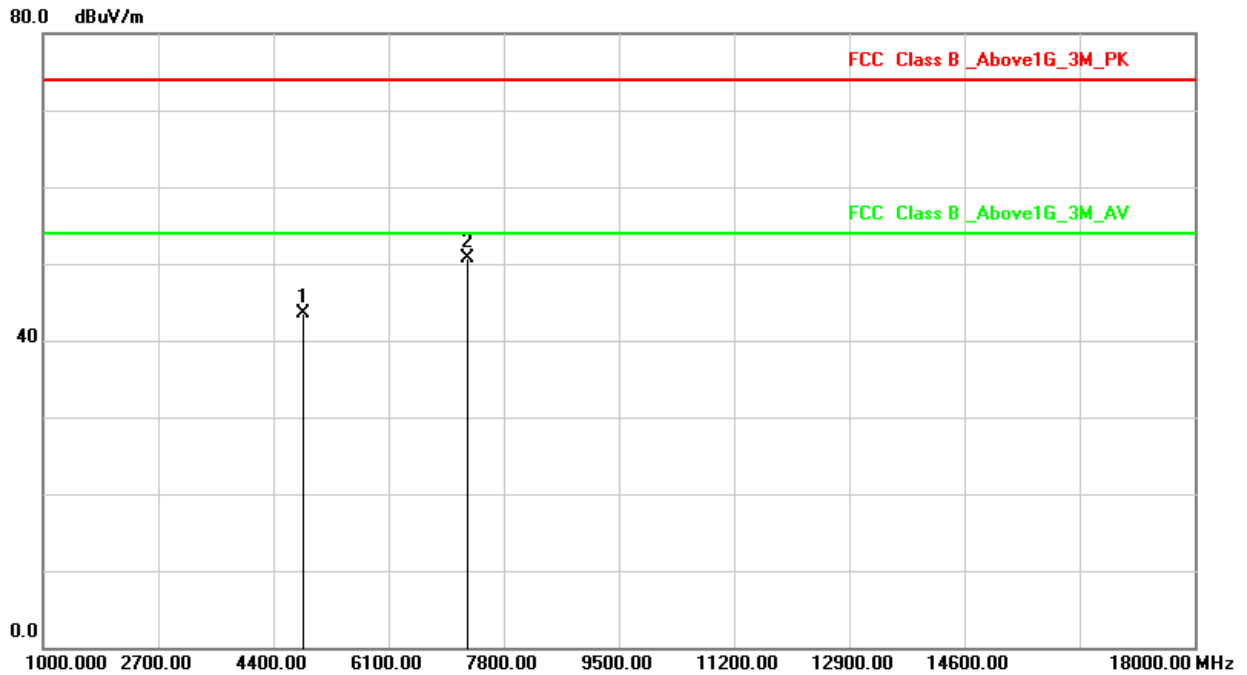


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4844.000	3.57	39.88	43.45	74.00	-30.55	peak
2	7266.000	11.51	39.18	50.69	74.00	-23.31	peak



Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 4, CH06	Operation mode	TX

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor
 The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

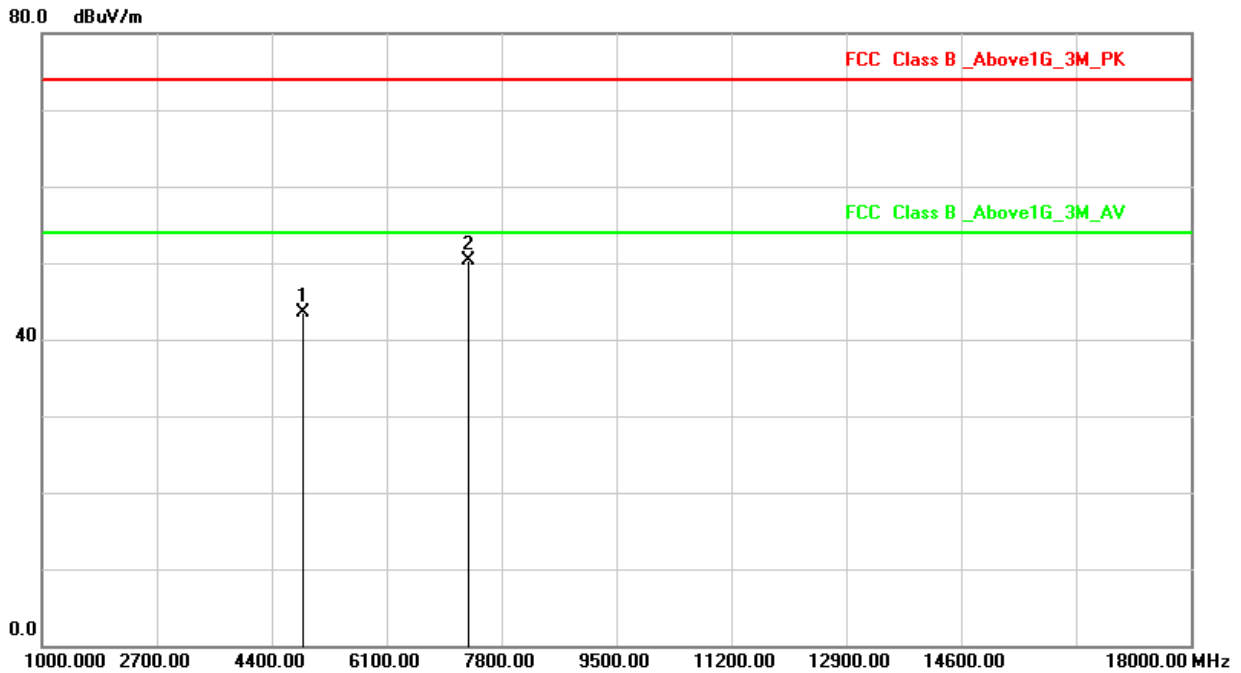


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4874.000	3.63	39.88	43.51	74.00	-30.49	peak
2	7311.000	11.48	38.75	50.23	74.00	-23.77	peak



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 4, CH06	Operation mode	TX

Note : Level = Reading + Factor
Margin = Level – Limit
Factor = Antenna Factor + Cable Loss – Amplifier Factor
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

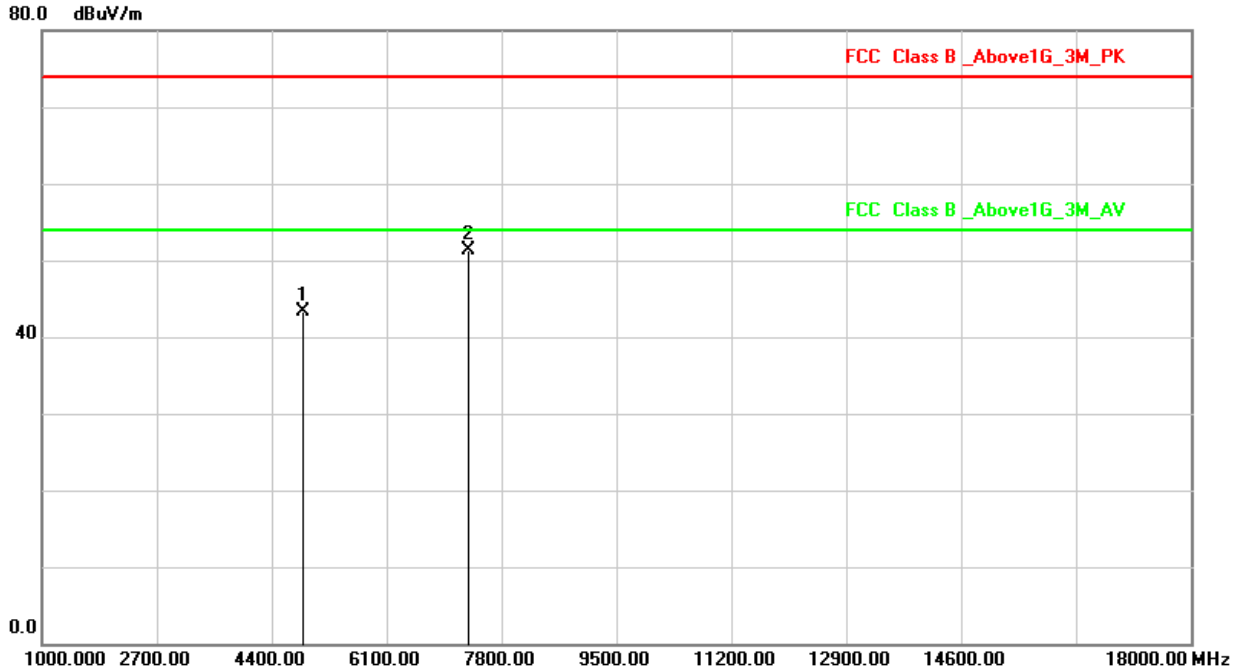


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4874.000	3.63	39.73	43.36	74.00	-30.64	peak
2	7311.000	11.48	39.76	51.24	74.00	-22.76	peak



Power	AC 120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 4, CH09	Operation mode	TX

Note : Level = Reading + Factor
Margin = Level – Limit
Factor = Antenna Factor + Cable Loss – Amplifier Factor
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

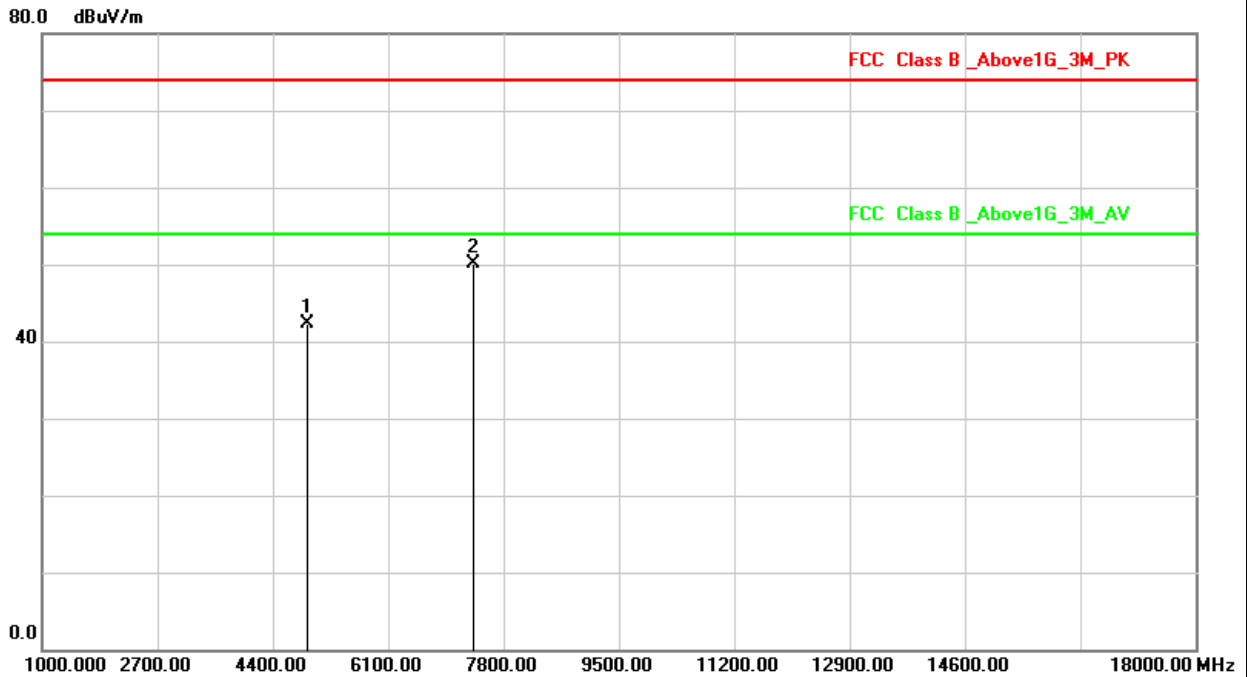


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4904.000	3.69	38.64	42.33	74.00	-31.67	peak
2	7356.000	11.43	38.74	50.17	74.00	-23.83	peak



Power	AC 120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 4, CH09	Operation mode	TX

Note : Level = Reading + Factor
Margin = Level – Limit
Factor = Antenna Factor + Cable Loss – Amplifier Factor
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

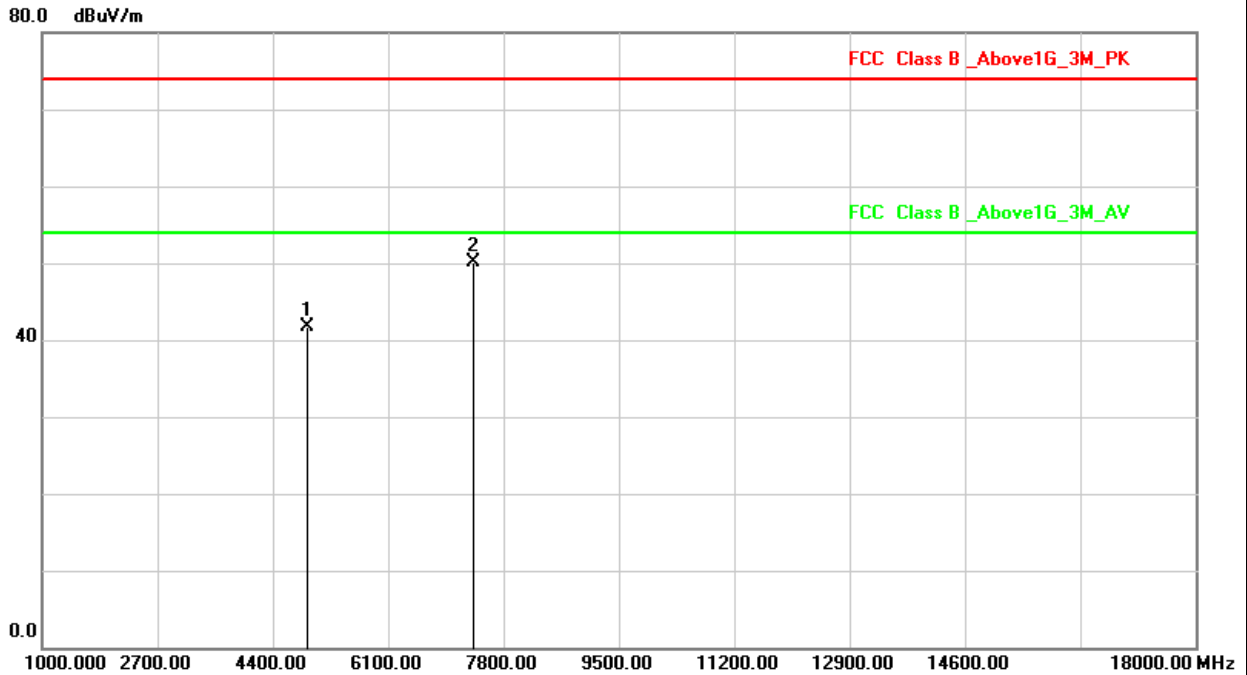

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4904.000	3.69	38.03	41.72	74.00	-32.28	peak
2	7356.000	11.43	38.74	50.17	74.00	-23.83	peak



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



6.8 Restrict Band Emission Measurement Data

Power	: AC 120V/60Hz	Pol/Phase	: VERTICAL
Test Mode	: 802.11b, CH01		

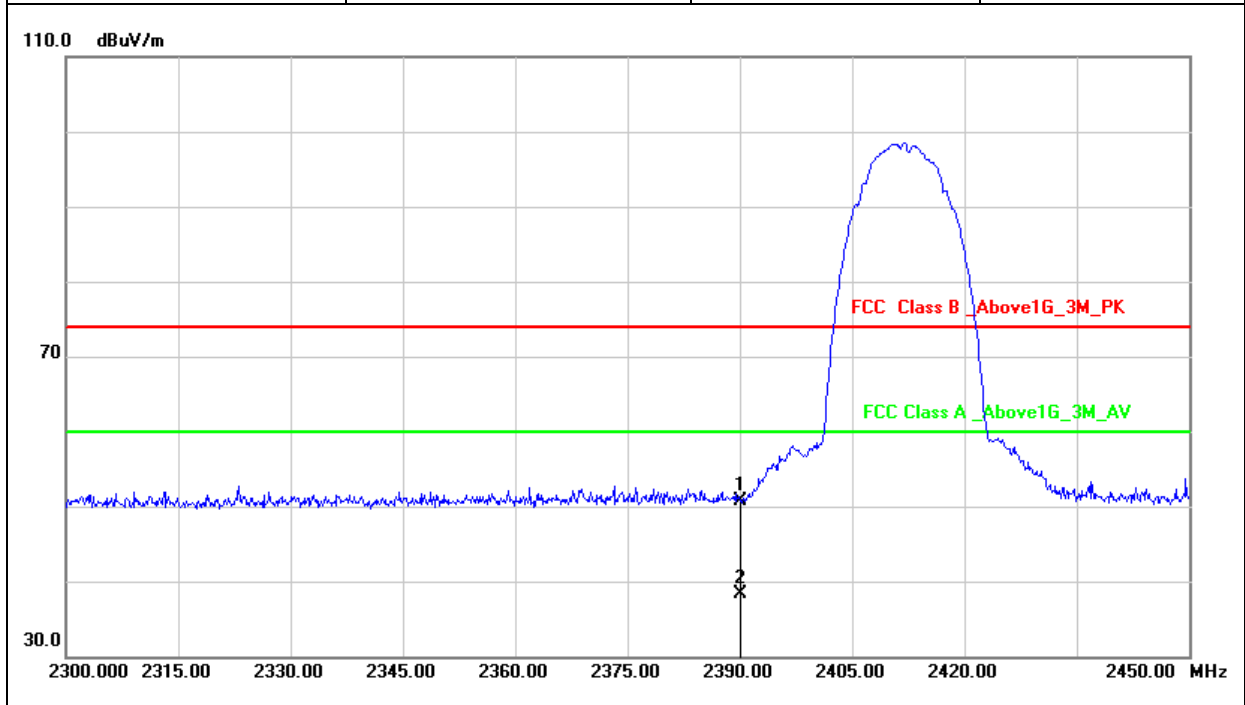


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	6.24	44.40	50.64	74.00	-23.36	peak
2	2390.000	6.24	31.98	38.22	60.00	-21.78	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b, CH01		

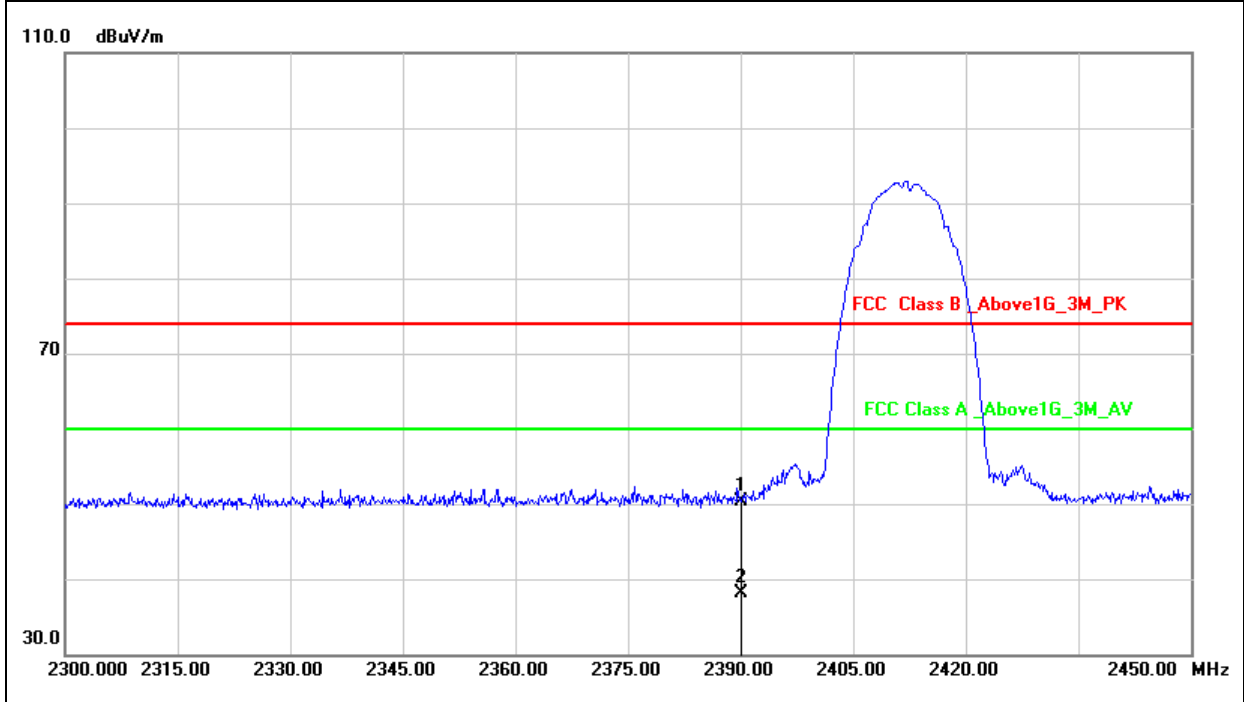


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	6.24	44.04	50.28	74.00	-23.72	peak
2	2390.000	6.24	31.88	38.12	60.00	-21.88	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: VERTICAL
Test Mode	: 802.11b, CH11		

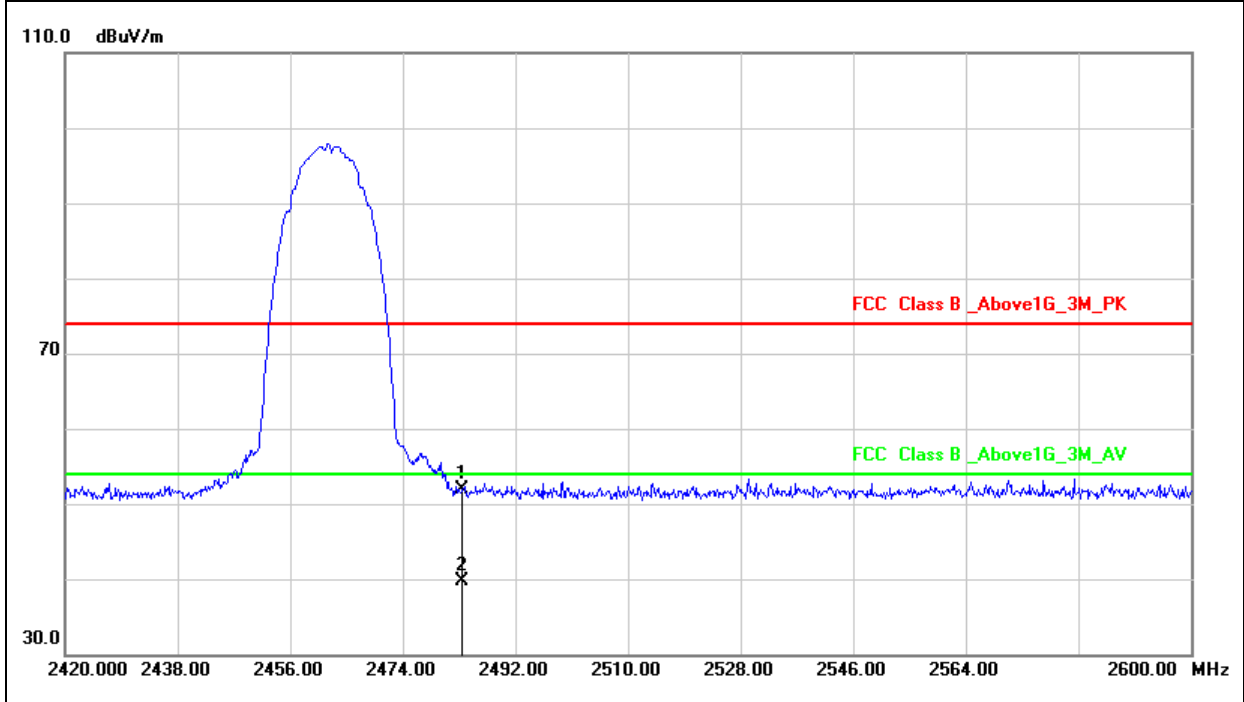


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	6.49	45.51	52.00	74.00	-22.00	peak
2	2483.500	6.49	33.15	39.64	54.00	-14.36	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b, CH11		

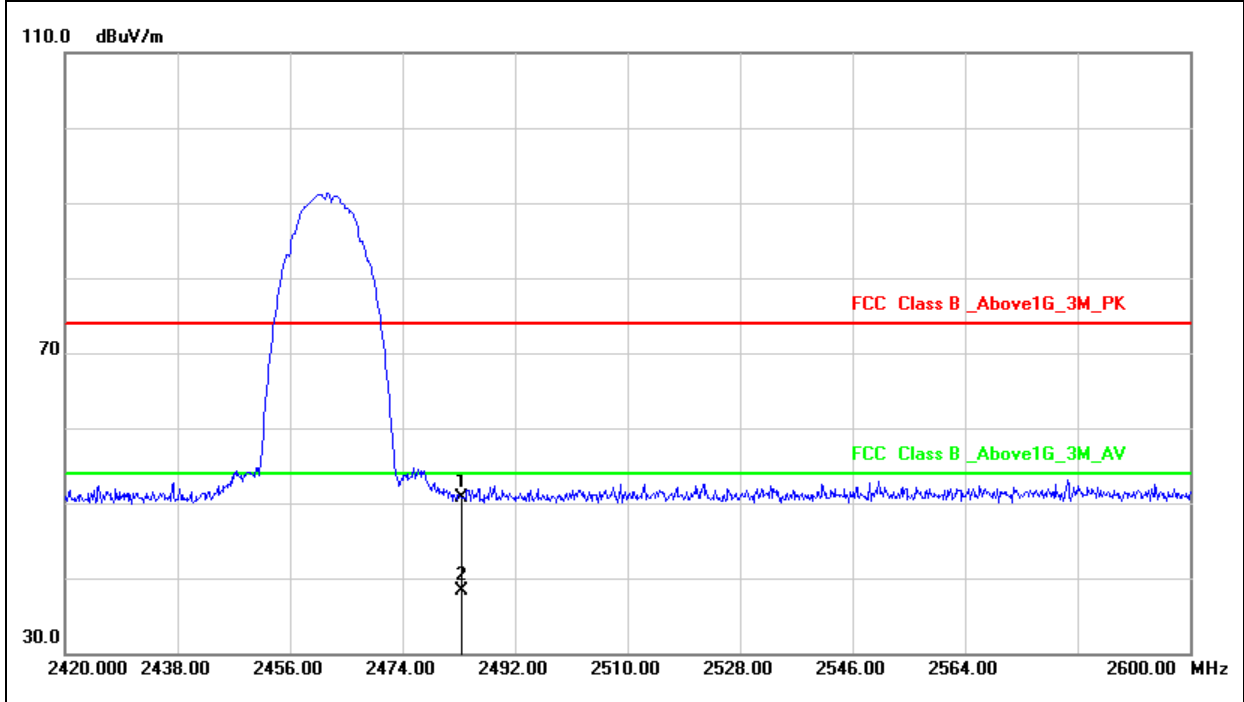


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	6.49	44.26	50.75	74.00	-23.25	peak
2	2483.500	6.49	31.79	38.28	54.00	-15.72	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: VERTICAL
Test Mode	: 802.11g, CH01		

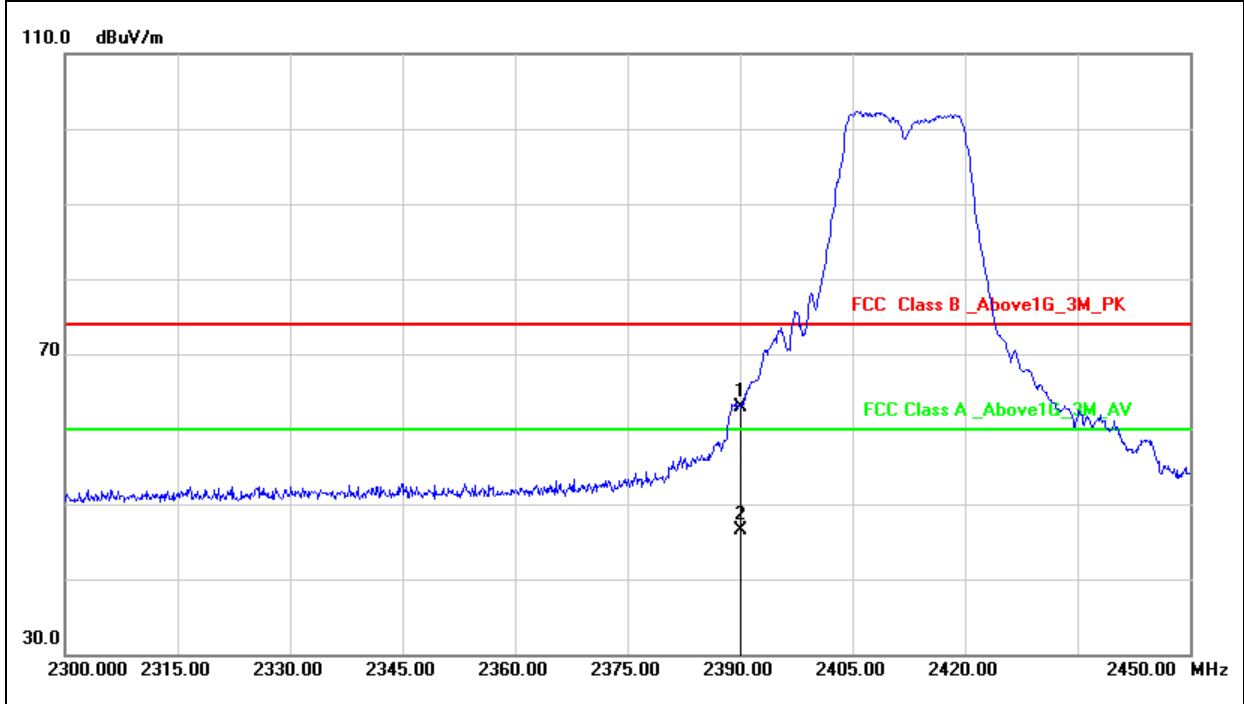


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	6.24	56.73	62.97	74.00	-11.03	peak
2	2390.000	6.24	40.27	46.51	60.00	-13.49	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g, CH01		

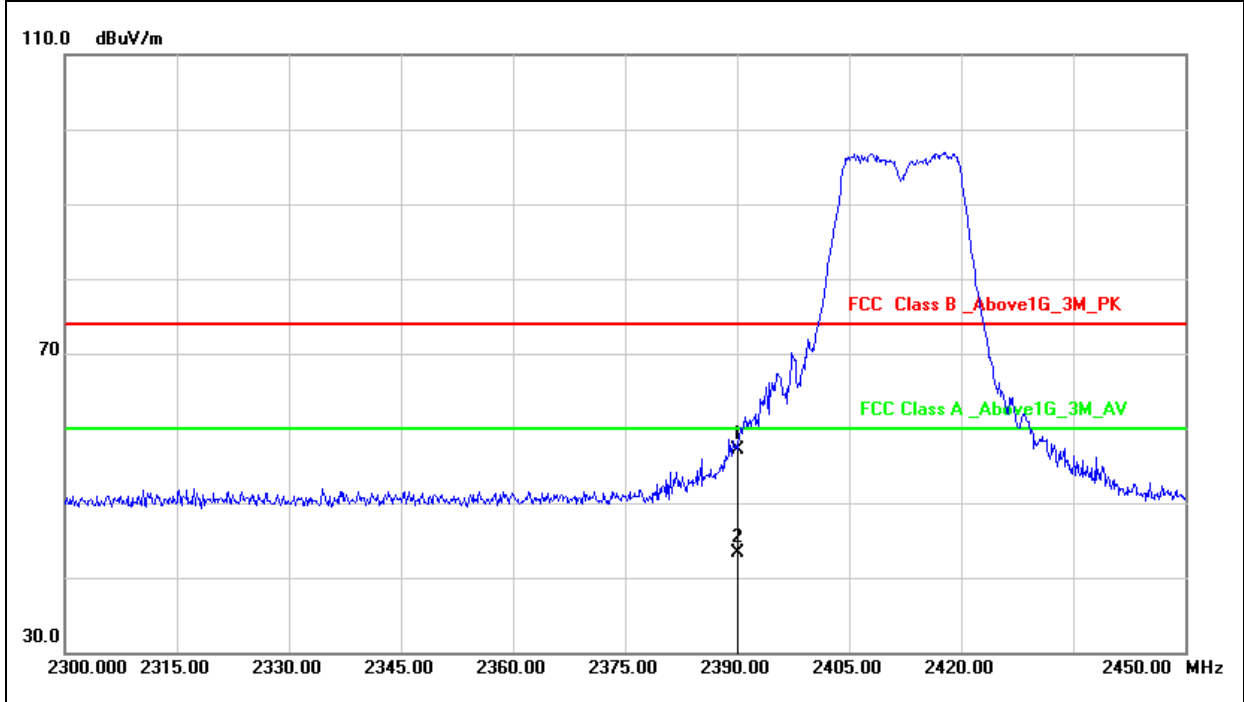


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	6.24	50.83	57.07	74.00	-16.93	peak
2	2390.000	6.24	37.12	43.36	60.00	-16.64	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: VERTICAL
Test Mode	: 802.11g, CH11		

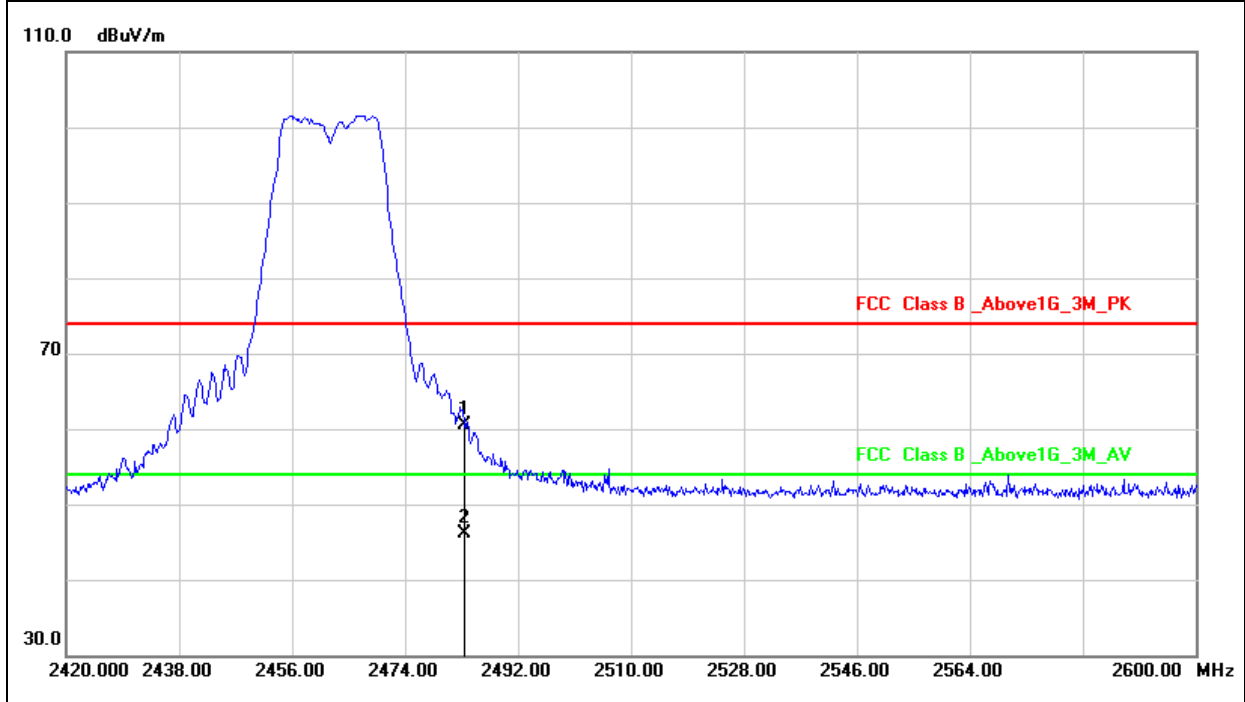


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	6.49	53.93	60.42	74.00	-13.58	peak
2	2483.500	6.49	39.68	46.17	54.00	-7.83	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11g, CH11		

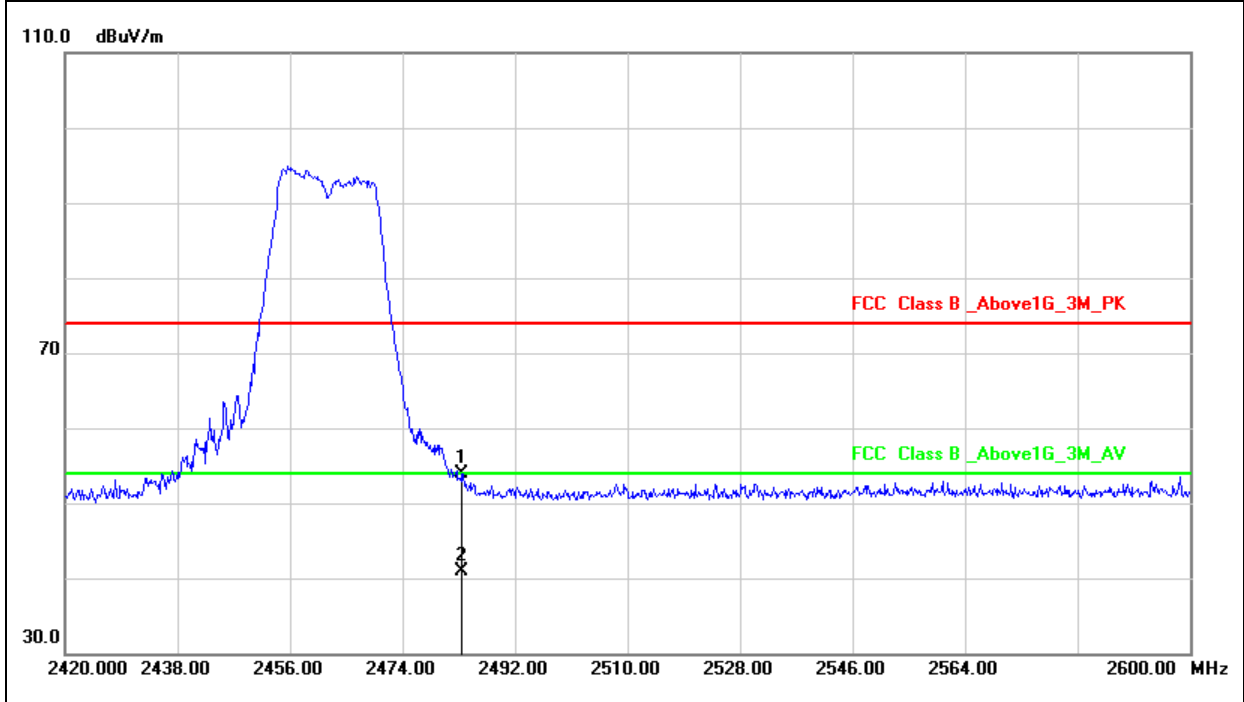


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	6.49	47.36	53.85	74.00	-20.15	peak
2	2483.500	6.49	34.35	40.84	54.00	-13.16	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20, CH01		

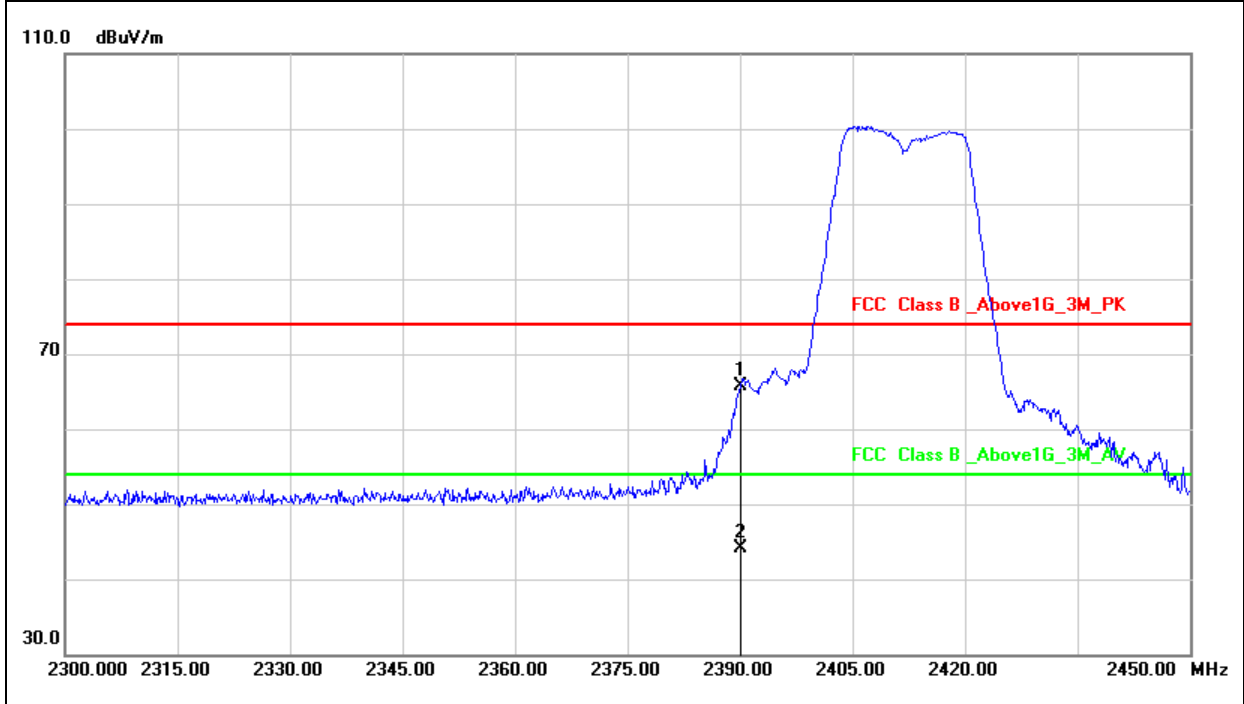


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	6.24	59.42	65.66	74.00	-8.34	peak
2	2390.000	6.24	37.78	44.02	54.00	-9.98	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20, CH01		

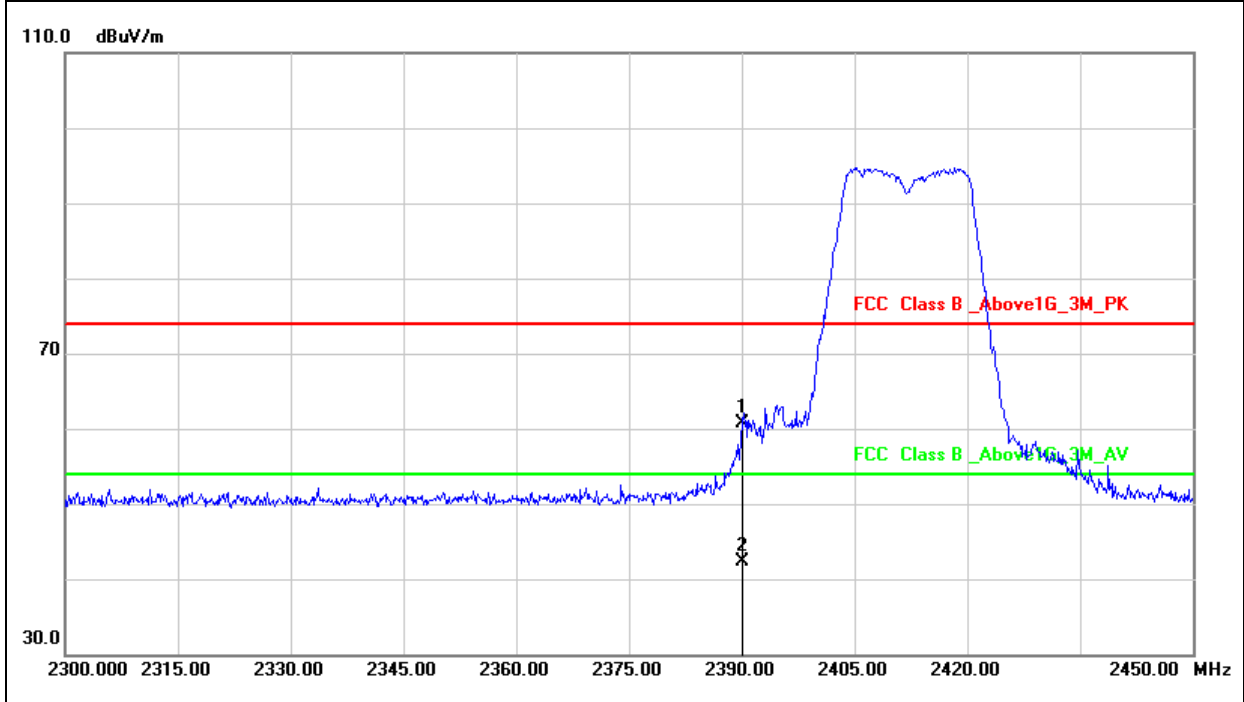


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	6.24	54.43	60.67	74.00	-13.33	peak
2	2390.000	6.24	36.04	42.28	54.00	-11.72	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT20, CH11		

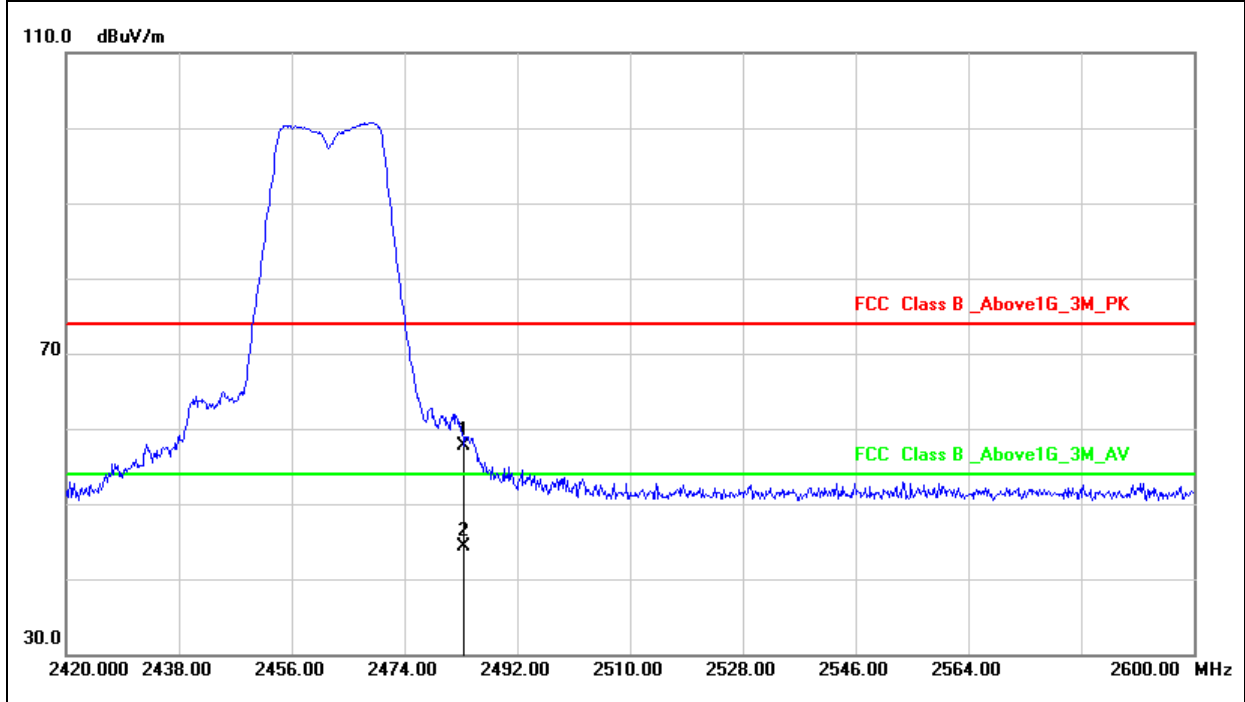


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	6.49	51.31	57.80	74.00	-16.20	peak
2	2483.500	6.49	37.85	44.34	54.00	-9.66	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20, CH11		

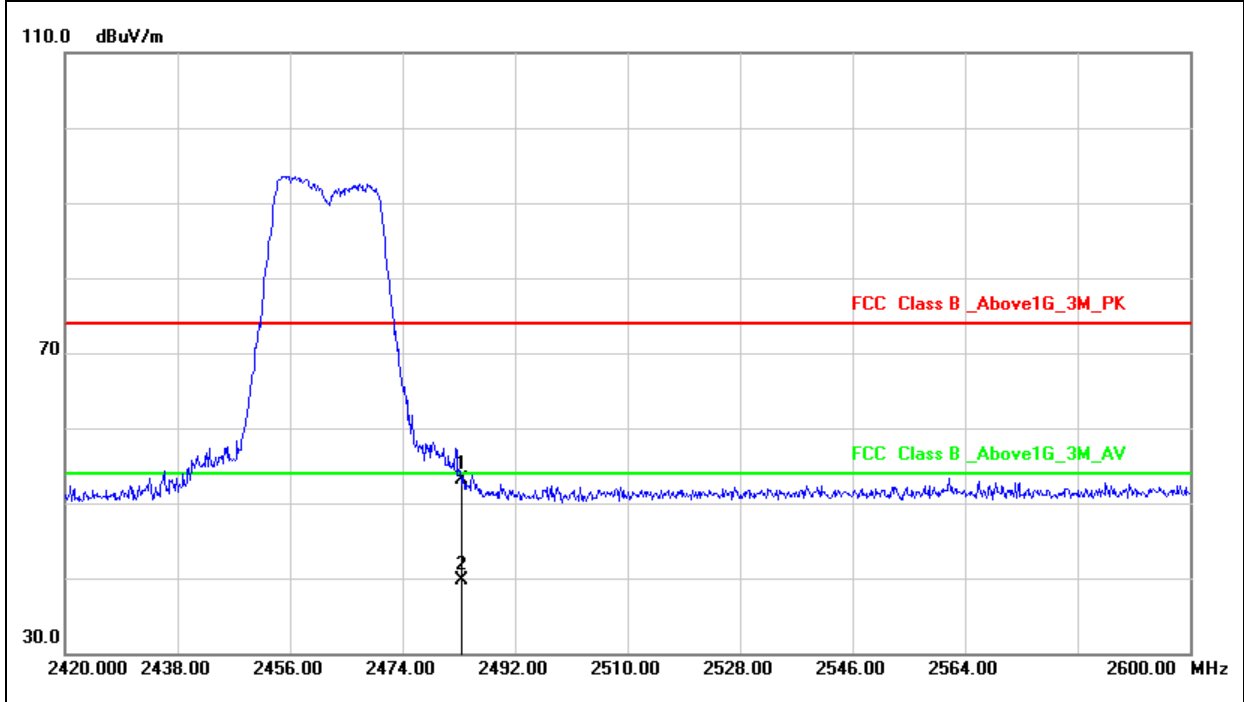


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	6.49	46.63	53.12	74.00	-20.88	peak
2	2483.500	6.49	33.25	39.74	54.00	-14.26	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40, CH03		

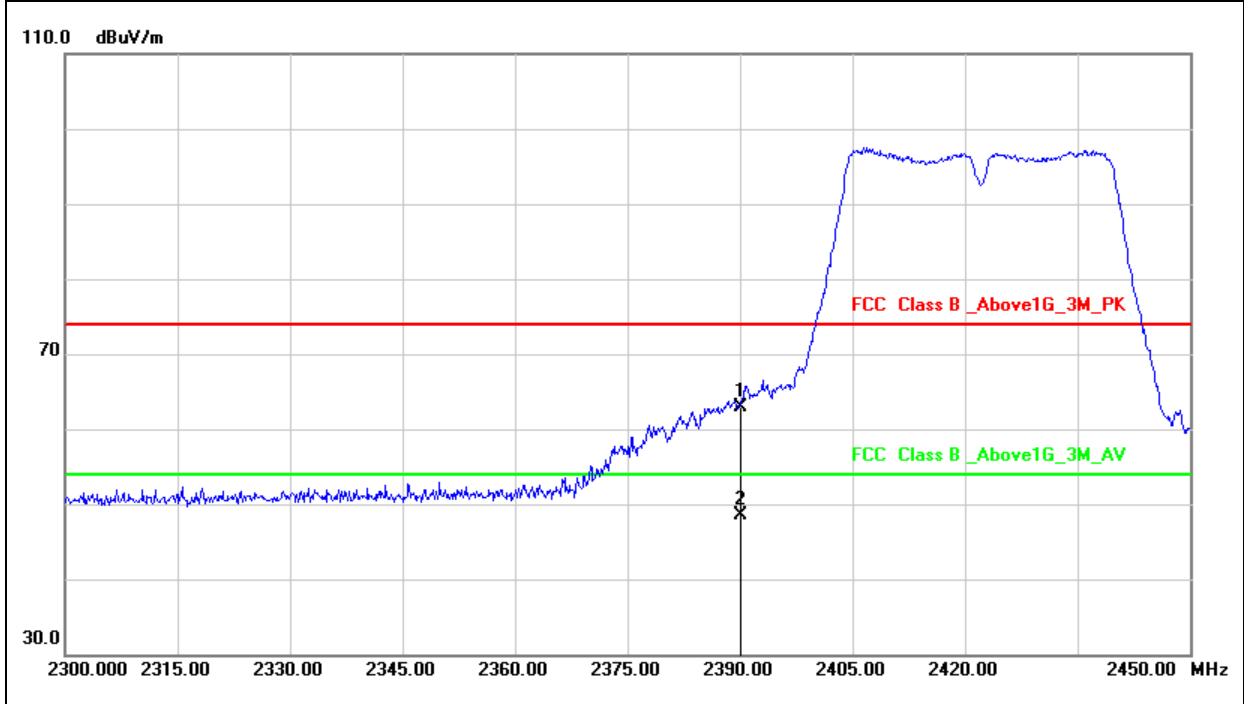


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	6.24	56.64	62.88	74.00	-11.12	peak
2	2390.000	6.24	42.28	48.52	54.00	-5.48	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40, CH03		

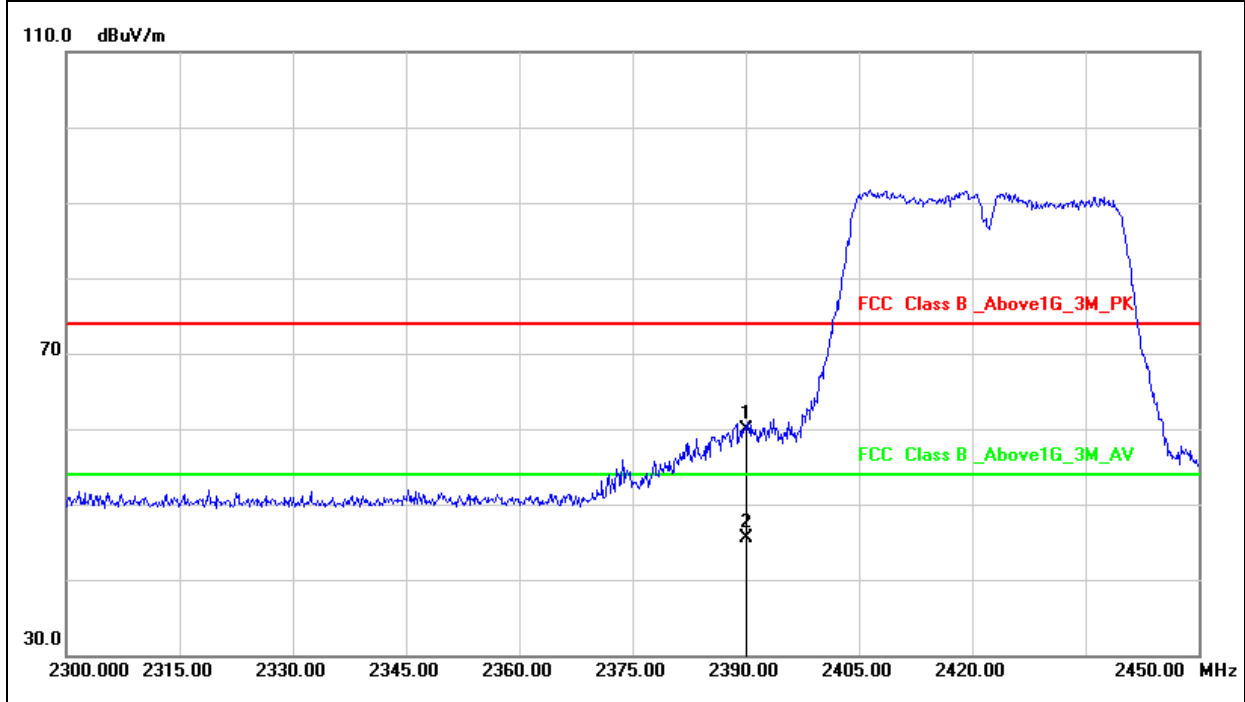


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	6.24	53.61	59.85	74.00	-14.15	peak
2	2390.000	6.24	39.35	45.59	54.00	-8.41	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40, CH09		

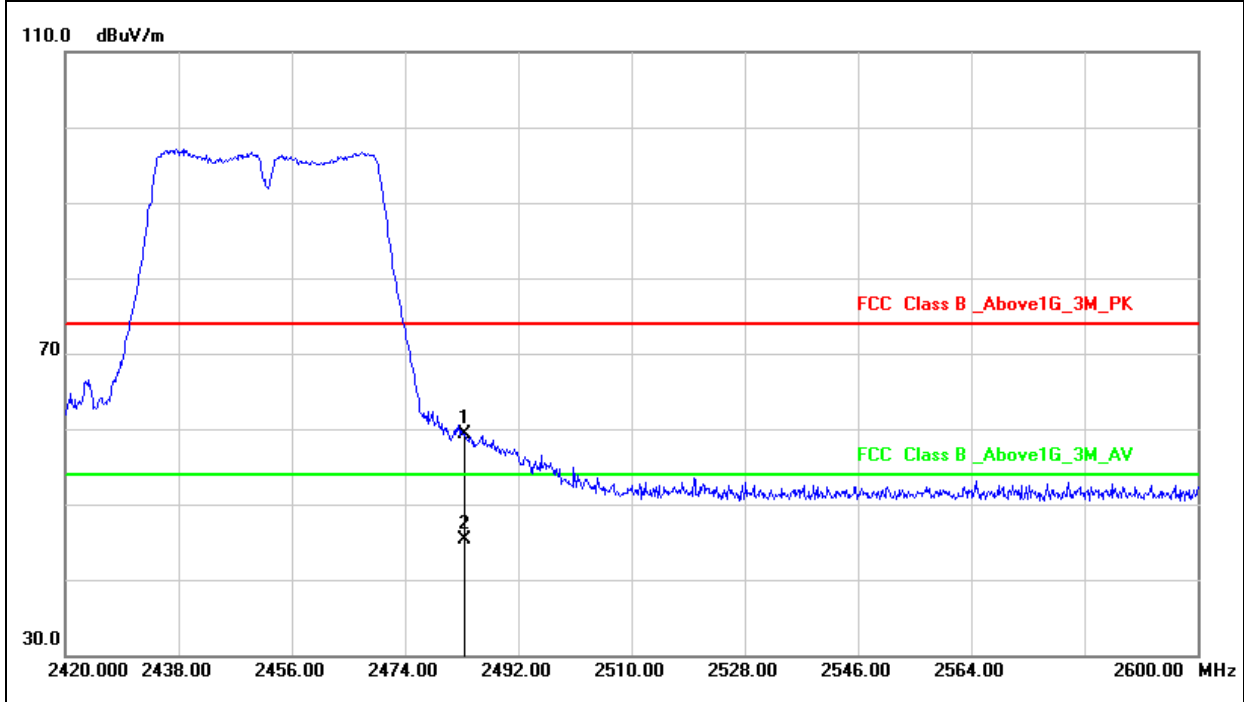


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	6.49	52.74	59.23	74.00	-14.77	peak
2	2483.500	6.49	38.77	45.26	54.00	-8.74	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40, CH09		

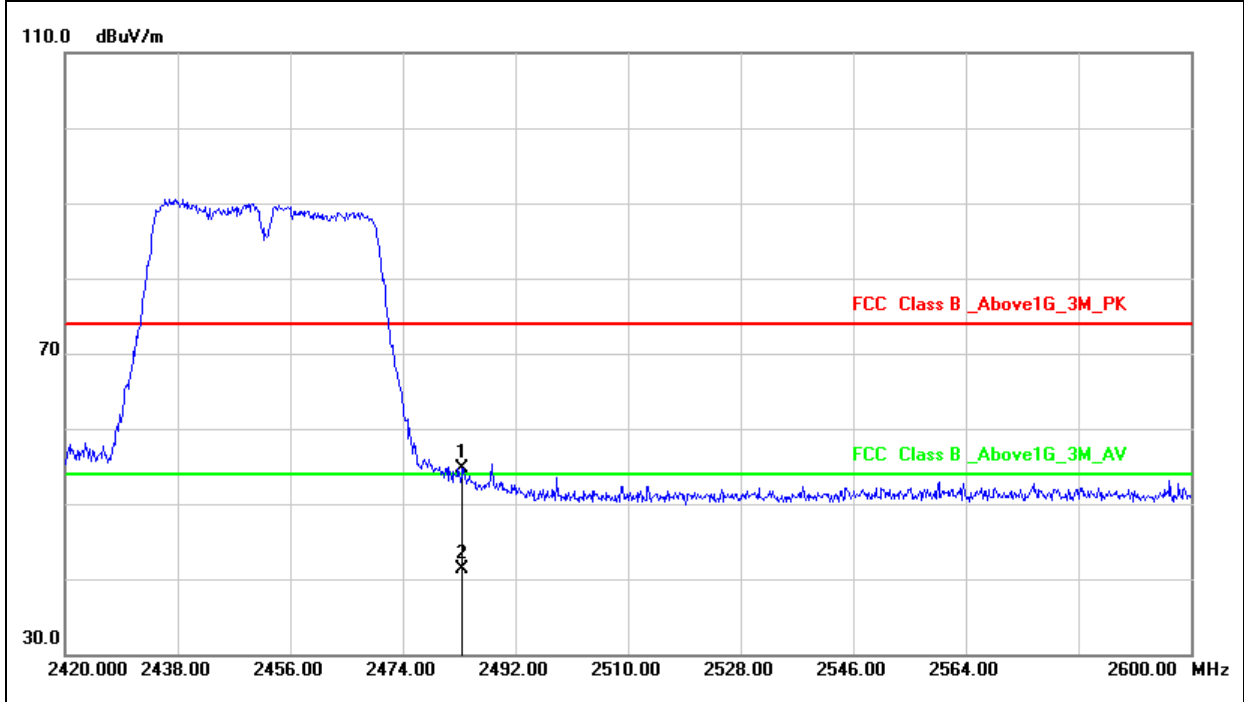

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	6.49	48.25	54.74	74.00	-19.26	peak
2	2483.500	6.49	34.79	41.28	54.00	-12.72	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



7. Test of Conducted Spurious Emission


7.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

7.3 Test Setup Layout





7.4 Test Result and Data



Note: Test plots refers to the following pages.





Modulation Standard: 802.11b
Channel: 01

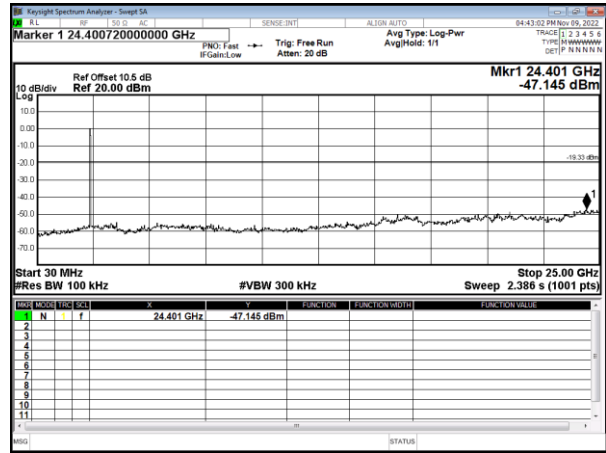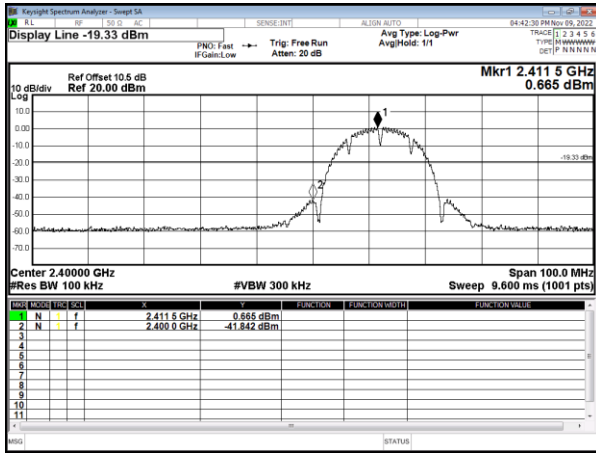

Modulation Standard: 802.11b
Channel: 06

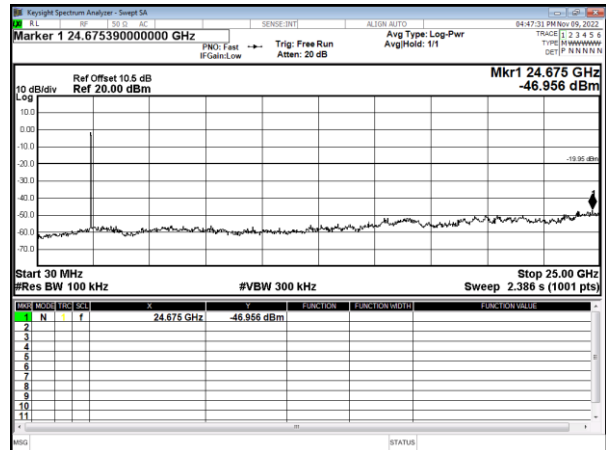
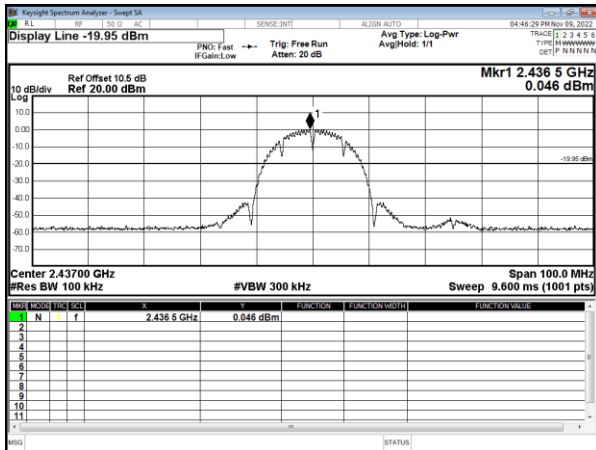


Modulation Standard: 802.11b
Channel: 11

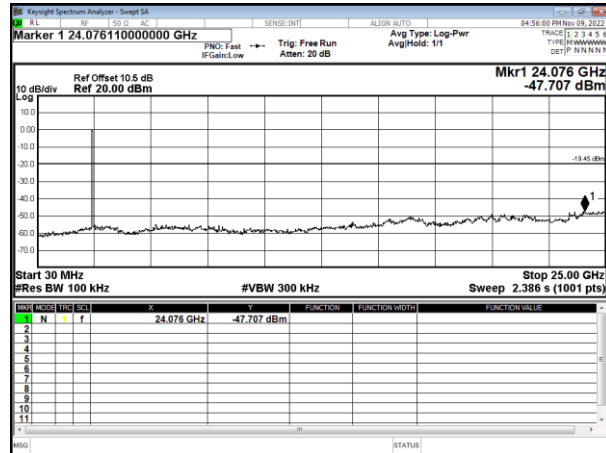
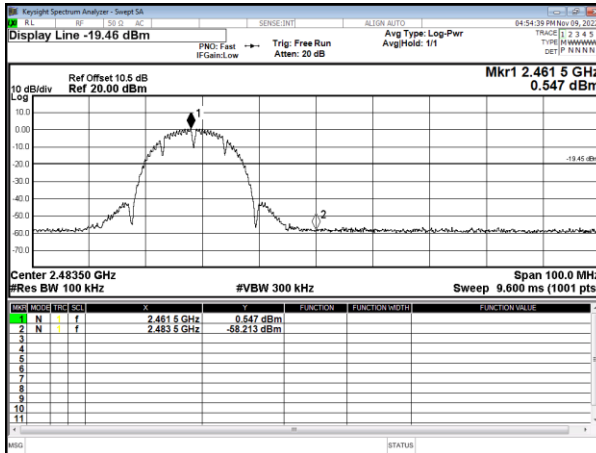






Modulation Standard: 802.11g
Channel: 01

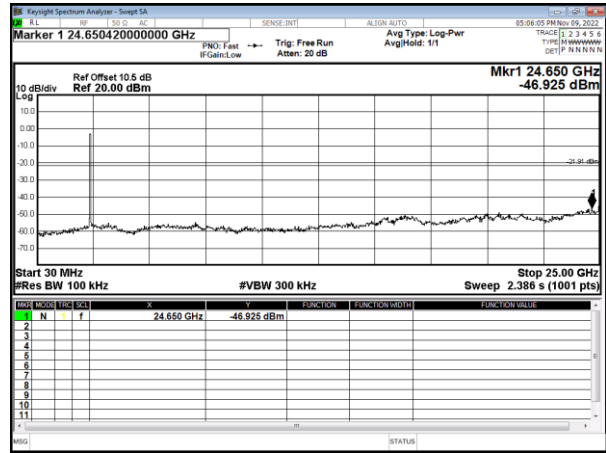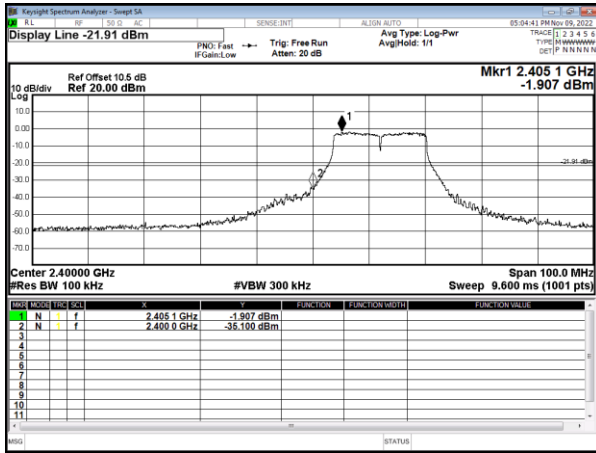

Modulation Standard: 802.11g
Channel: 06

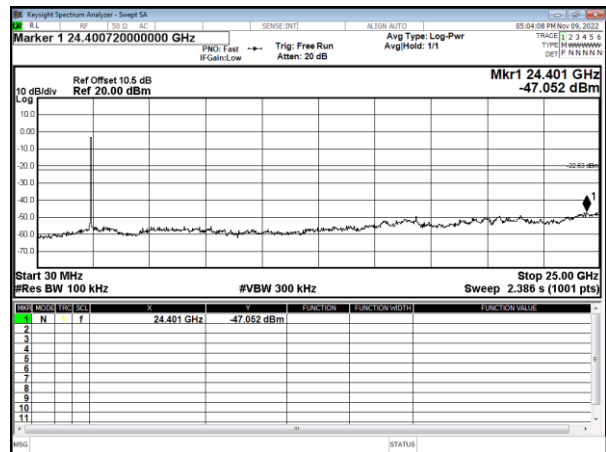
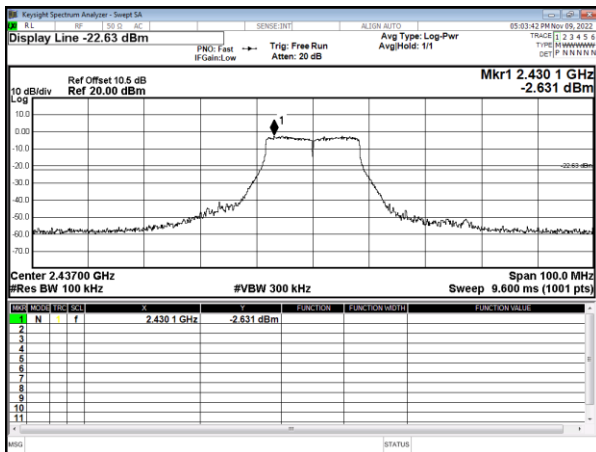


Modulation Standard: 802.11g
Channel: 11

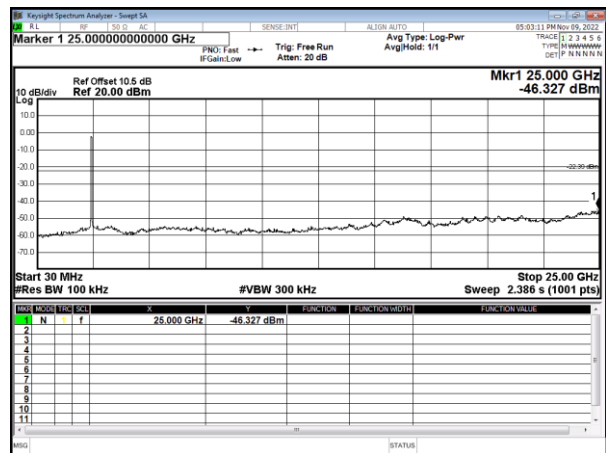
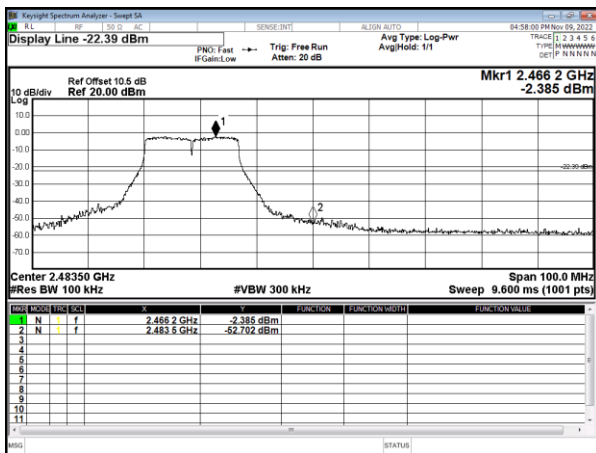






Modulation Standard: 802.11n HT20
Channel: 01

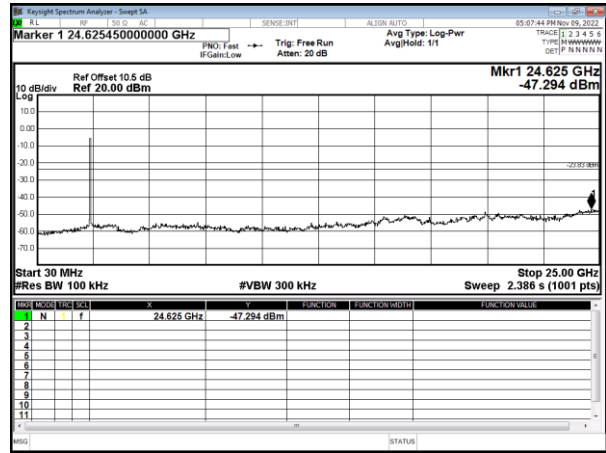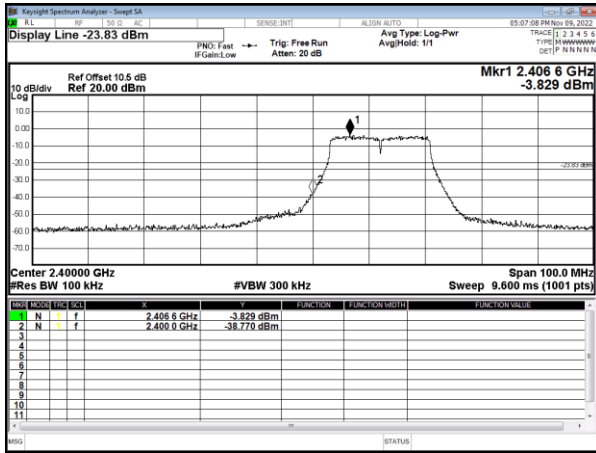

Modulation Standard: 802.11n HT20
Channel: 06

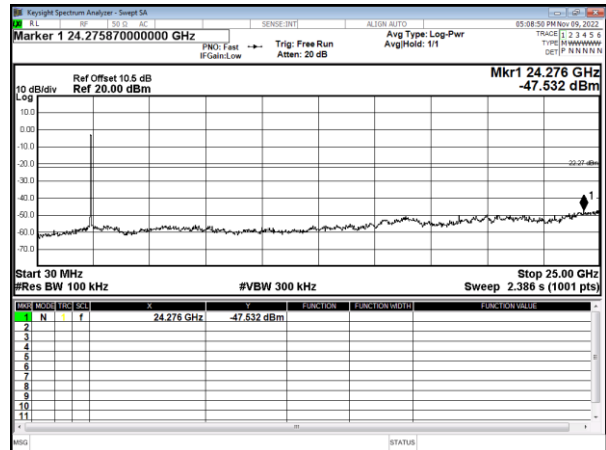
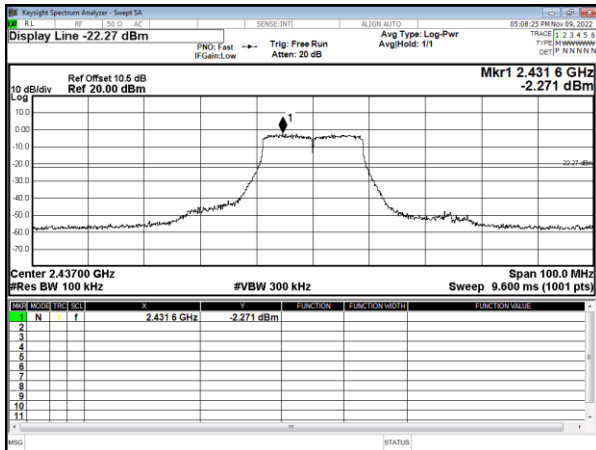


Modulation Standard: 802.11n HT20
Channel: 11

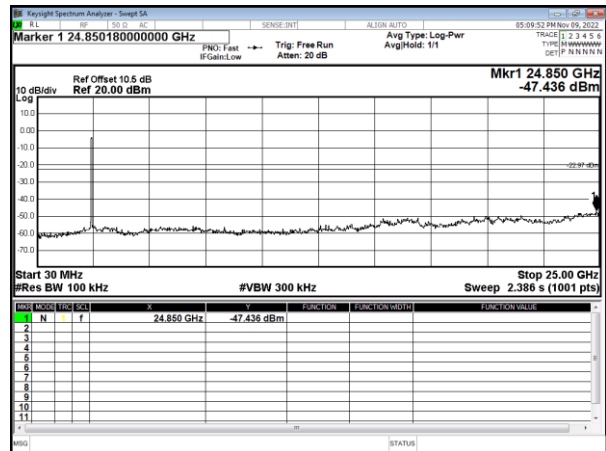
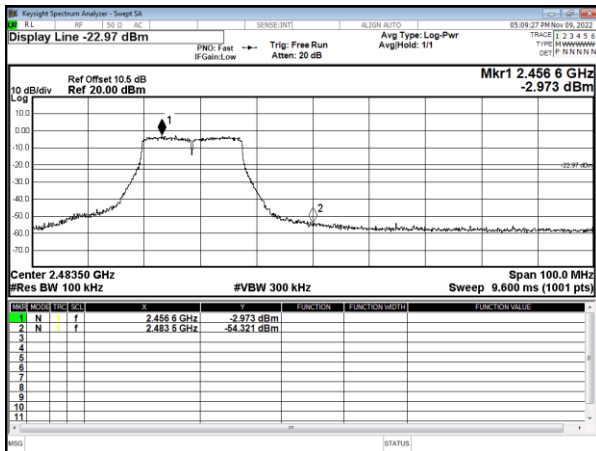






Modulation Standard: 802.11n HT40
Channel: 03

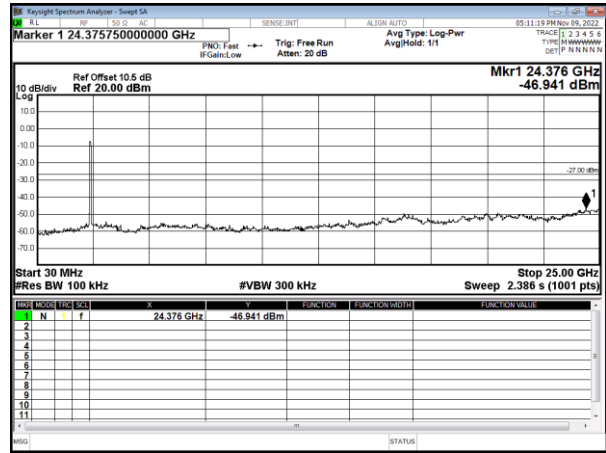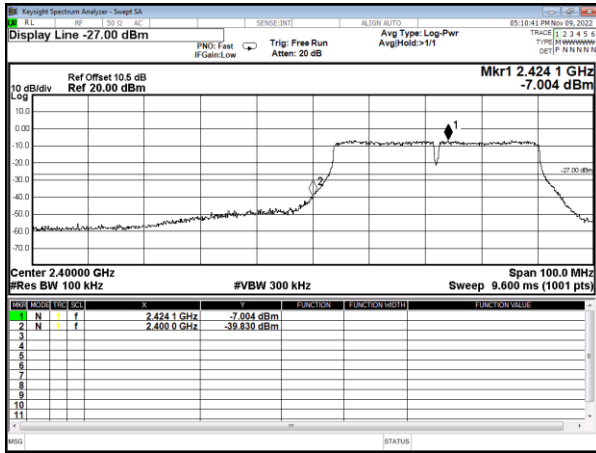

Modulation Standard: 802.11n HT40
Channel: 06

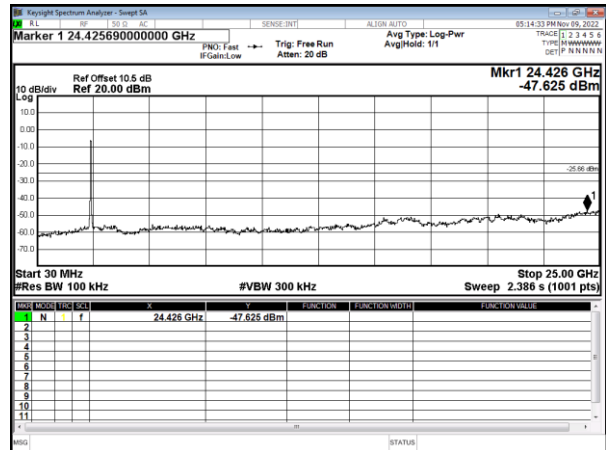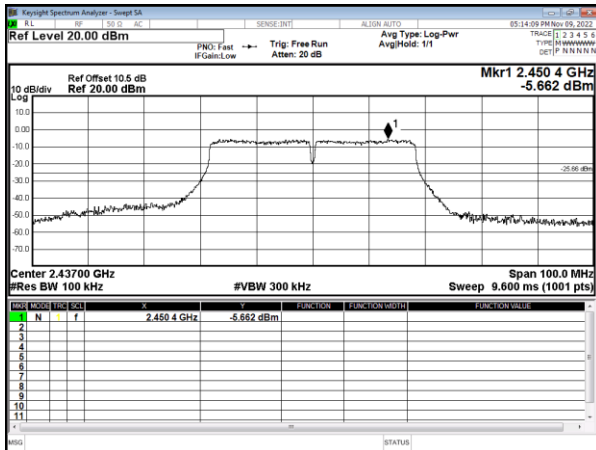

Modulation Standard: 802.11n HT40
Channel: 09

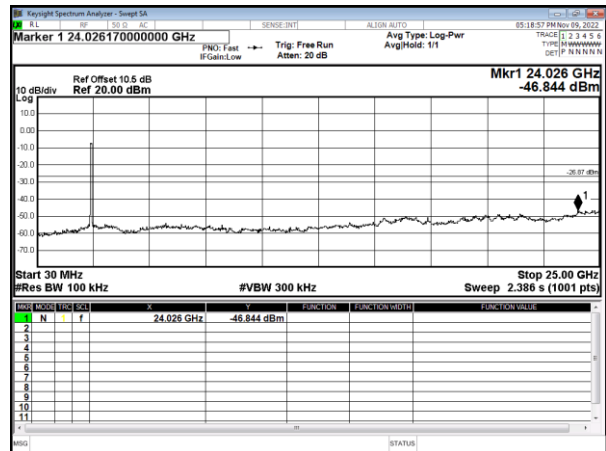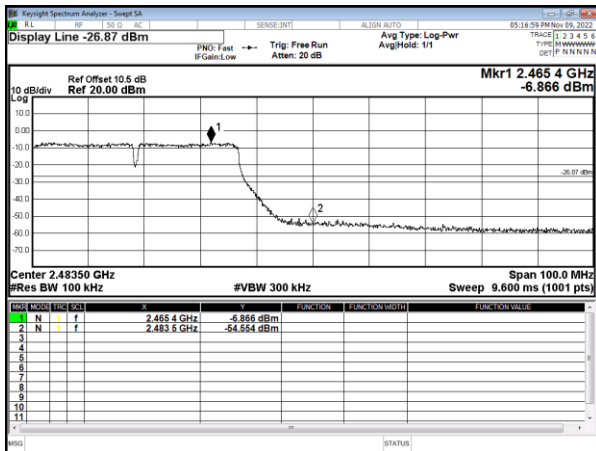



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout




8.4 Test Result and Data


Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
11b	100.00	100.00	100.00%
11g	100.00	100.00	100.00%
11n HT20	100.00	100.00	100.00%
11n HT40	100.00	100.00	100.00%




Modulation Type: 802.11b(1Mbps)

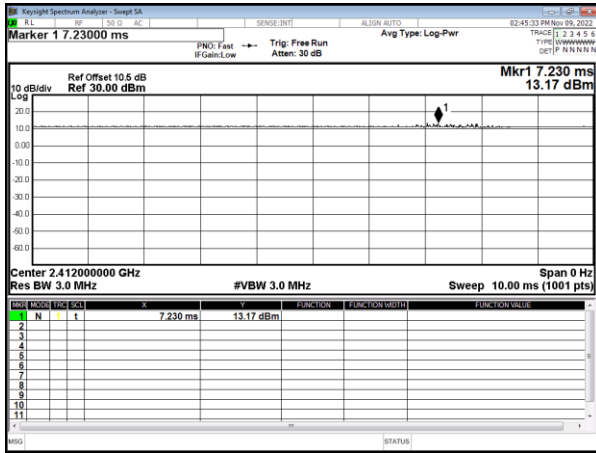


Modulation Type: 802.11n HT20(6.5Mbps)

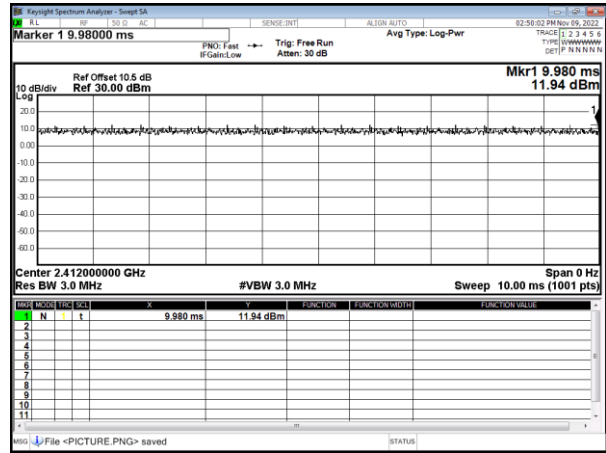

Modulation Type: 802.11g(6Mbps)

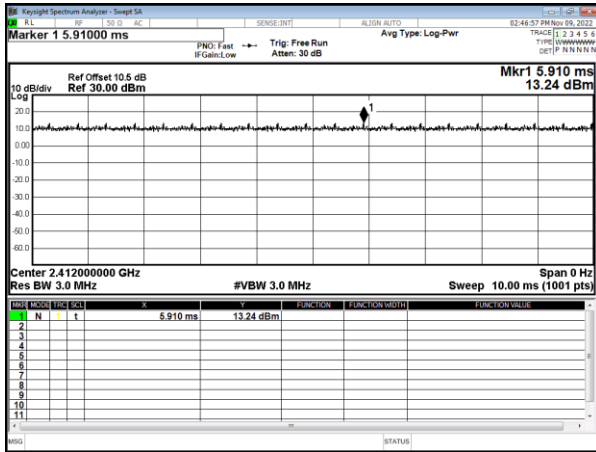

Modulation Type: 802.11n HT40(13.5Mbps)

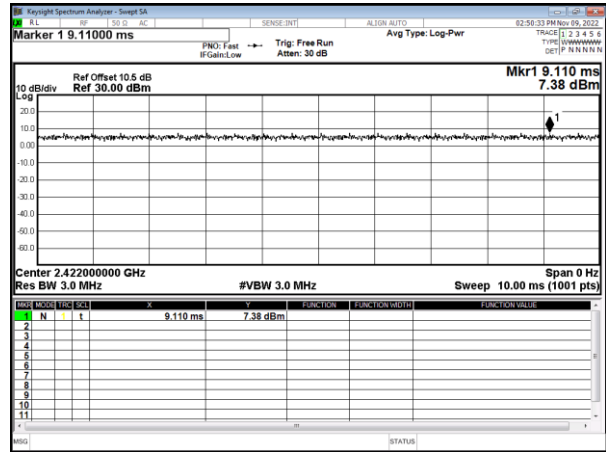



9. 6dB Bandwidth Measurement Data


9.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- c. Set spectrum analyzer X dB to 6 dB.
- d. Set spectrum analyzer peak detector with maximum hold.

9.3 Test Setup Layout






9.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
			ANT A	
IEEE 802.11b	01	2412	10.16	0.5
	06	2437	10.16	0.5
	11	2462	10.16	0.5
IEEE 802.11g	01	2412	16.59	0.5
	06	2437	16.59	0.5
	11	2462	16.59	0.5
IEEE 802.11n HT20	01	2412	17.83	0.5
	06	2437	17.76	0.5
	11	2462	17.76	0.5
IEEE 802.11n HT40	03	2422	36.53	0.5
	06	2437	36.51	0.5
	09	2452	36.52	0.5




Modulation Type: 802.11b
CH01

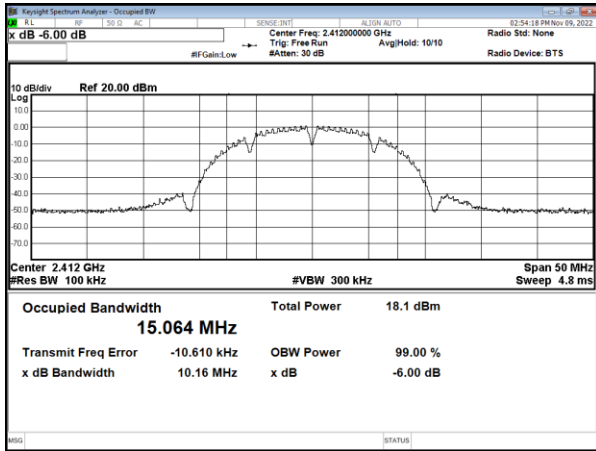


Modulation Type: 802.11g
CH01

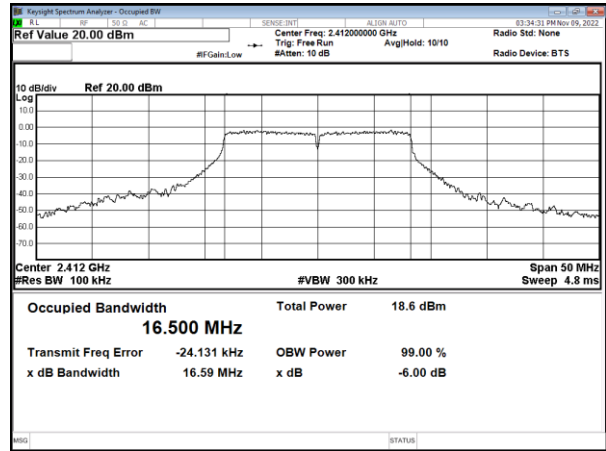


CH06

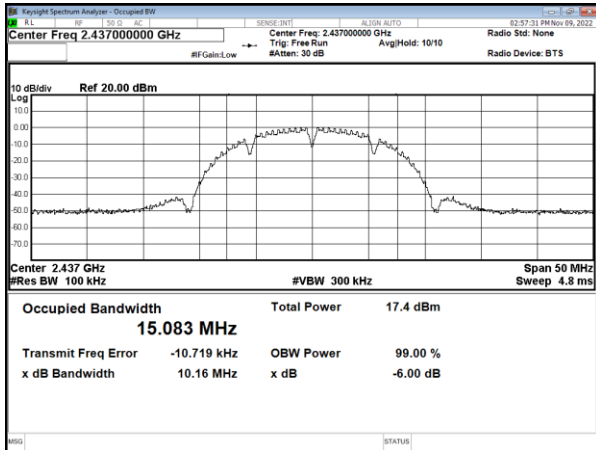


CH06

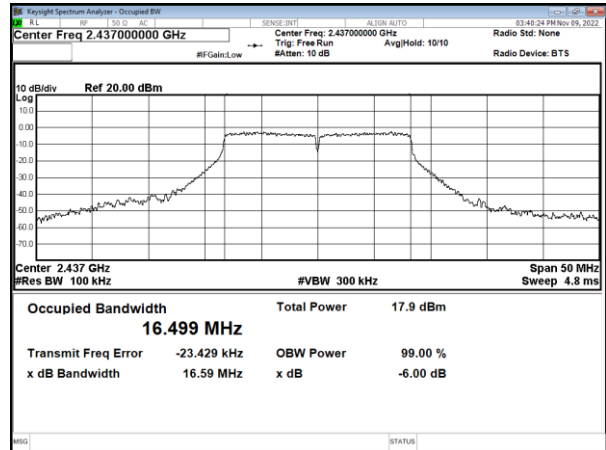

CH11

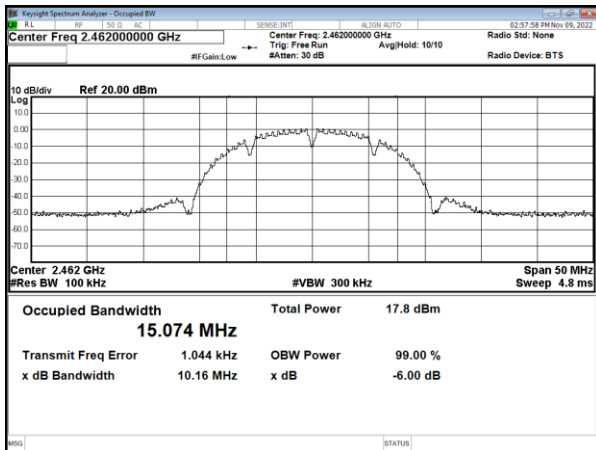


CH11

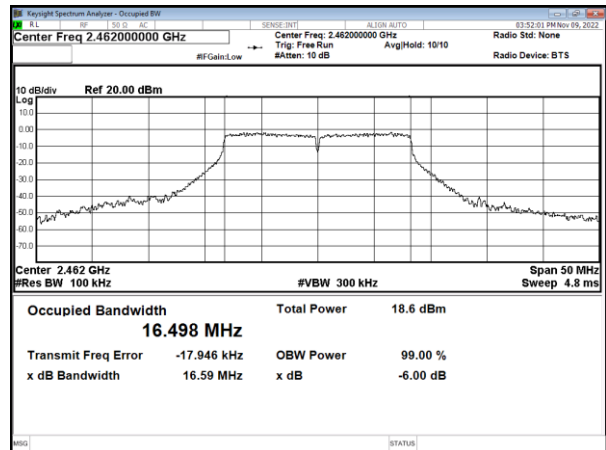





Modulation Type: 802.11n HT20
CH01

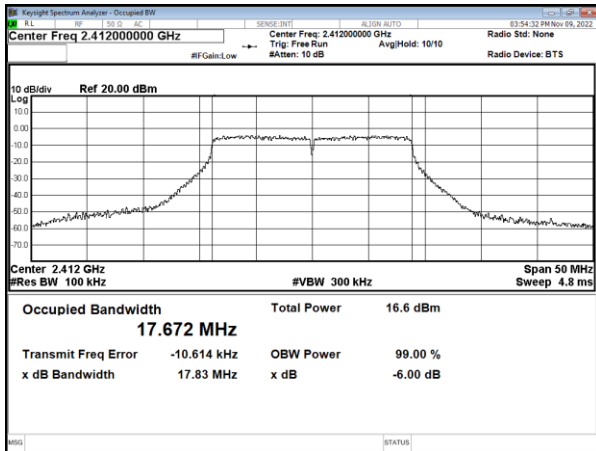


Modulation Type: 802.11n HT40
CH03

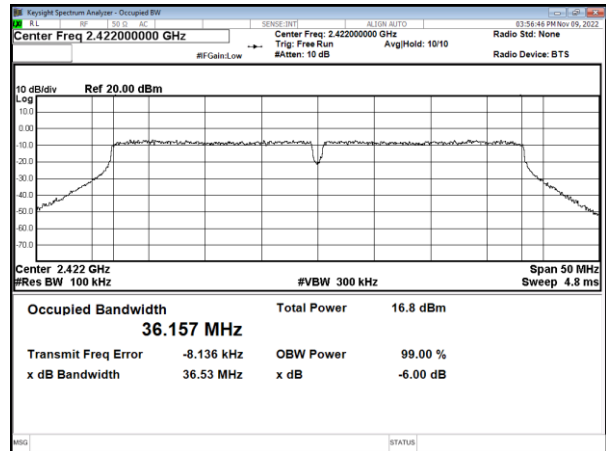


CH06

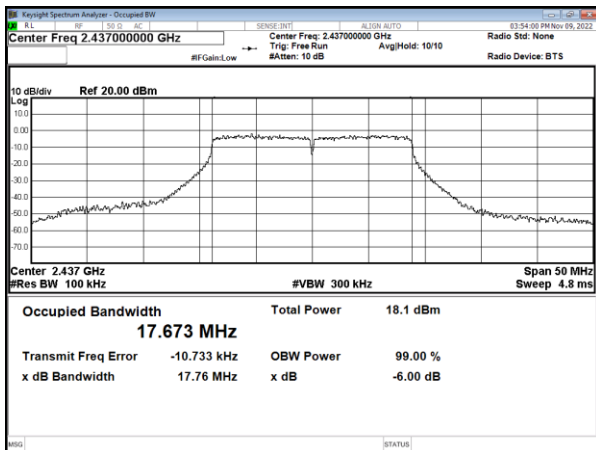


CH06

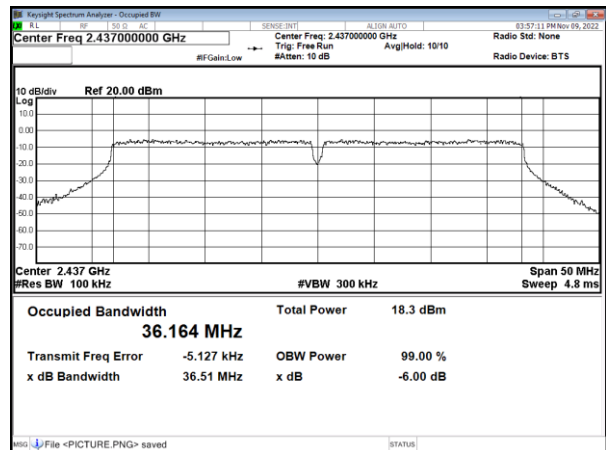

CH11

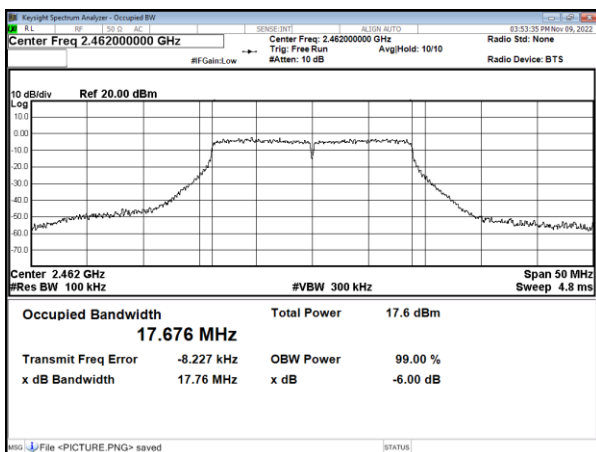

CH09

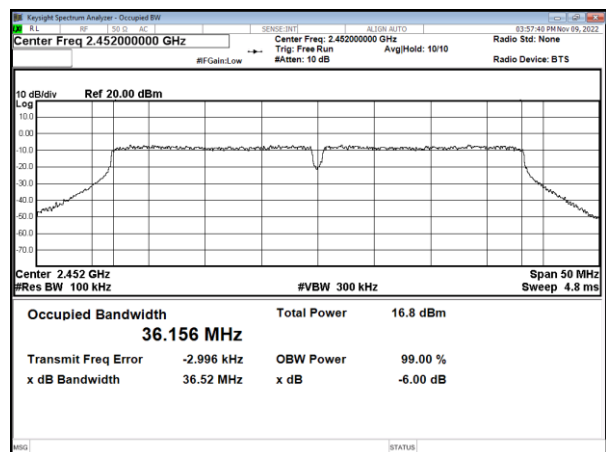



10. Maximum Peak Output Power


10.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

10.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout





10.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	Conduct ed(peak) output power (dBm)	Total peak power (mW)	Power Limit (dBm)
			ANT A		
11b	1	2412	14.53	28.379	30.00
	6	2437	13.71	23.496	30.00
	11	2462	14.14	25.942	30.00
11g	1	2412	19.95	98.855	30.00
	6	2437	19.43	87.700	30.00
	11	2462	19.82	95.940	30.00
11n HT20	1	2412	18.20	66.069	30.00
	6	2437	19.42	87.498	30.00
	11	2462	18.92	77.983	30.00
11n HT40	3	2422	18.42	69.502	30.00
	6	2437	19.73	93.972	30.00
	9	2452	18.16	65.464	30.00



11. Power Spectral Density

11.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

11.2 Test Procedures

- a. The transmitter output was connected to spectrum analyzer.
- b. The spectrum analyzer's resolution bandwidth were set at 3kHz RBW and 10KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- c. The power spectral density was measured and recorded.

11.3 Test Setup Layout






11.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)	Limit (dBm)
			ANT A	
11b	1	2412	-19.352	8.00
	6	2437	-20.077	8.00
	11	2462	-19.609	8.00
11g	1	2412	-16.422	8.00
	6	2437	-16.895	8.00
	11	2462	-16.068	8.00
11n HT20	1	2412	-18.161	8.00
	6	2437	-17.172	8.00
	11	2462	-17.778	8.00
11n HT40	3	2422	-19.308	8.00
	6	2437	-16.950	8.00
	9	2452	-19.771	8.00




Modulation Type: 802.11b
CH01

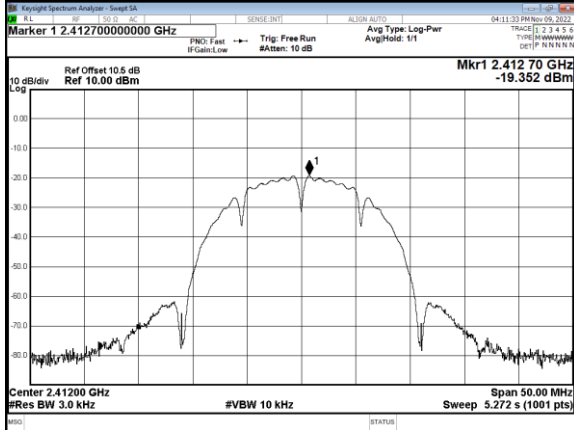


Modulation Type: 802.11g
CH01

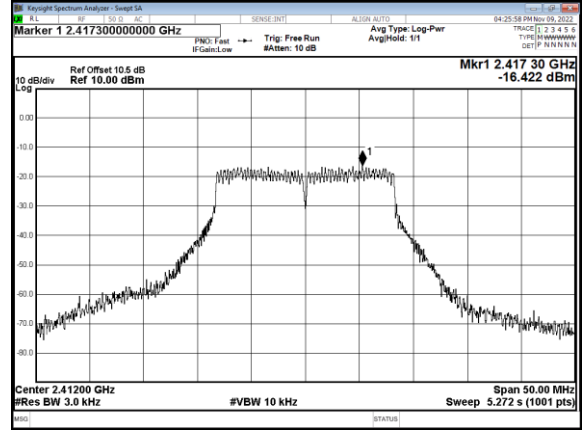


CH06

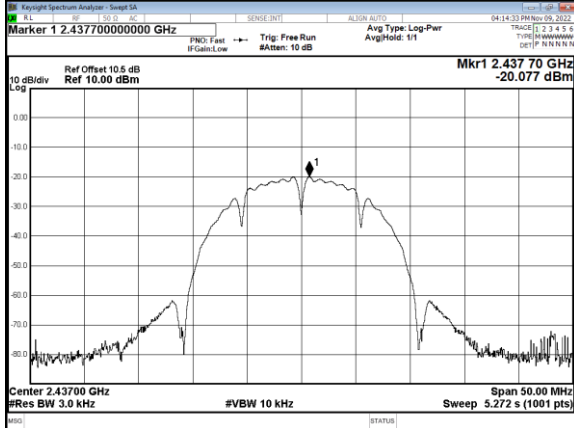


CH06

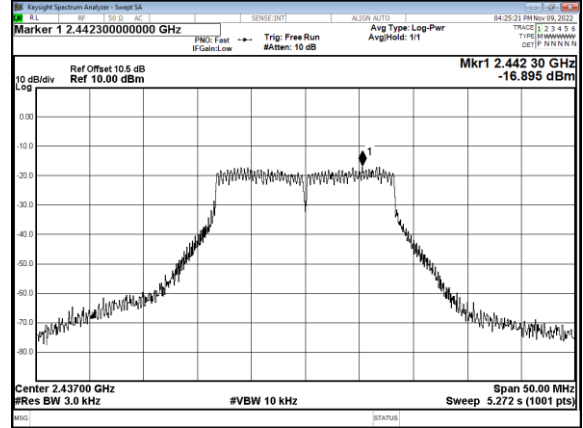

CH11

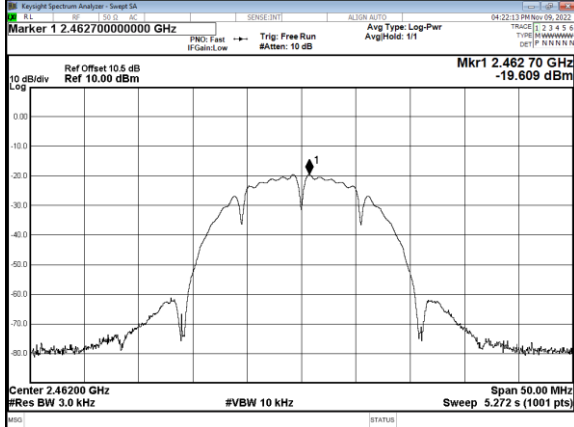


CH11

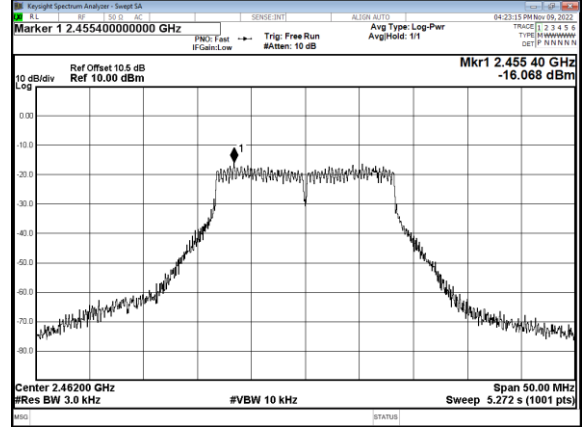





Modulation Type: 802.11n HT20
CH01

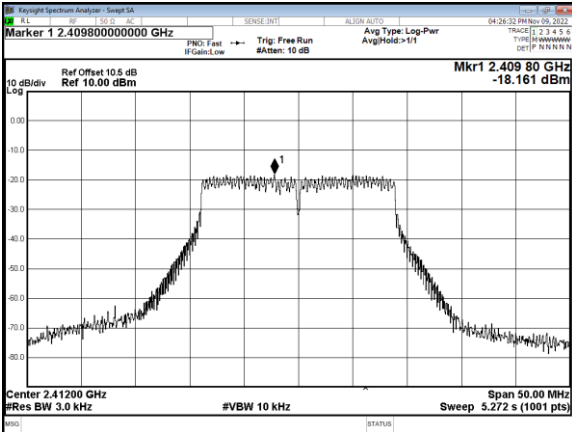


Modulation Type: 802.11n HT40
CH03

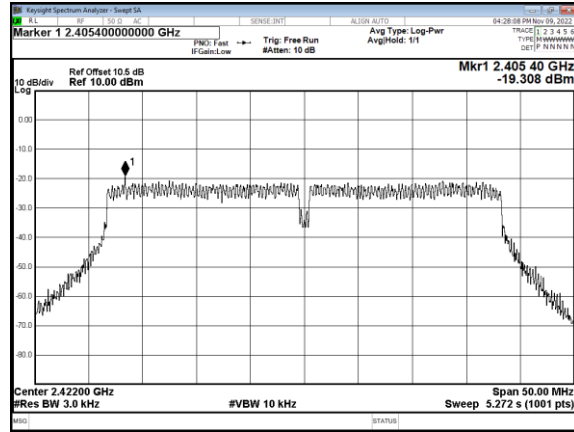


CH06

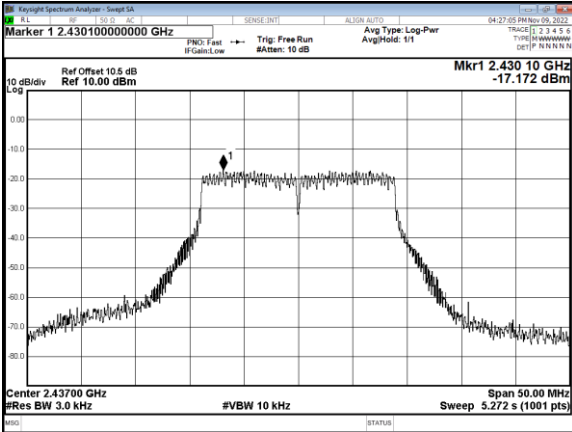


CH06

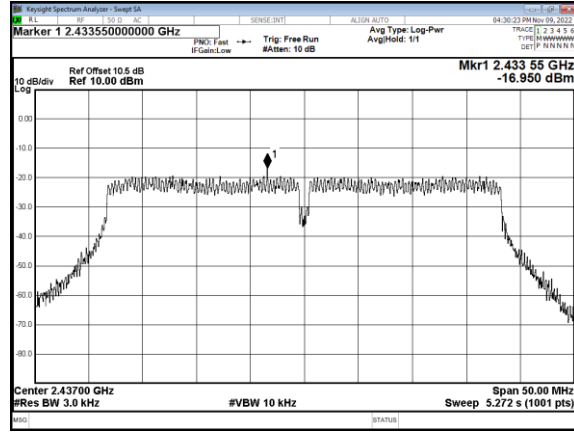

CH11

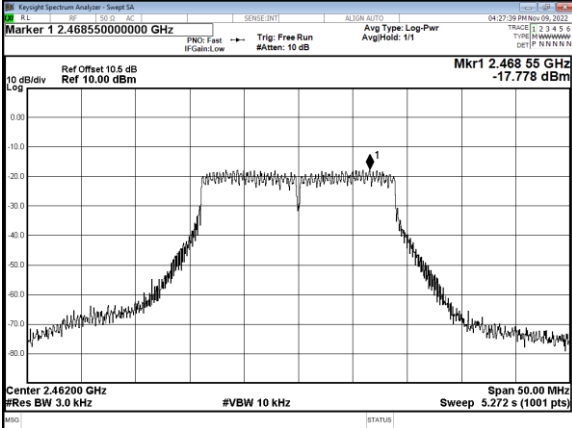

CH09

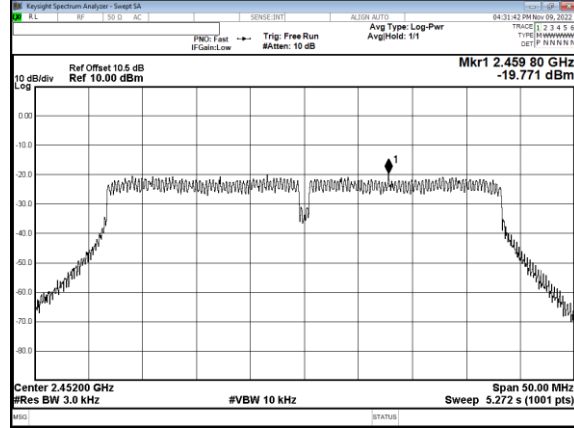

----- End of the report -----