

**FCC PART 15 SUBPART C MEASUREMENT AND TEST REPORT**

For

**Shenzhen Spreadview Century Technology Co., Ltd**

**13-A1, Shijhaoting Mansion, Chegongmiao, Futian District, Shenzhen,  
518040, P.R.China**

**E.U.T.: SMART Pico**

**Model Name: P96, D5, FHD-90a, SMT-80**

**Brand Name: Juneto, Axer, Lumex, Sooall**

**FCC ID: 2ACZZP96**

**Report Number: NTC1408101F**

**Test Date(s): August 20, 2014 to September 04, 2014**

**Report Date(s): September 04, 2014**

**Prepared by**

**Dongguan Nore Testing Center Co., Ltd.**

**Building D, Gaosheng Science and Technology Park, Hongtu Road,  
Nancheng District, Dongguan City, Guangdong, China**

**Tel: +86-769-22022444**

**Fax: +86-769-22022799**

**Prepared By**

**Approved & Authorized Signer**



**Rose Hu / Engineer**



**Sunm Lv / Q.A. Director**

**Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan Nore Testing Center Co., Ltd. The test results referenced from this report are relevant only to the sample tested.**



## Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST .....	4
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	6
1.3 TEST METHODOLOGY .....	6
1.4 EQUIPMENT MODIFICATIONS .....	6
1.5 SUPPORT DEVICE .....	6
1.6 TEST FACILITY AND LOCATION.....	7
1.7 SUMMARY OF TEST RESULTS.....	7
<b>2. SYSTEM TEST CONFIGURATION.....</b>	<b>8</b>
2.1 EUT CONFIGURATION.....	8
2.2 SPECIAL ACCESSORIES.....	8
2.3 DESCRIPTION OF TEST MODES .....	8
2.4 EUT EXERCISE.....	8
<b>3. CONDUCTED EMISSIONS TEST .....</b>	<b>9</b>
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	9
3.2 TEST CONDITION .....	9
3.3 MEASUREMENT RESULTS.....	9
<b>4. RADIATED EMISSION TEST.....</b>	<b>12</b>
4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	12
4.2 MEASUREMENT PROCEDURE .....	13
4.3 LIMIT.....	13
4.4 MEASUREMENT RESULTS .....	15
<b>5. CHANNEL SEPARATION TEST.....</b>	<b>20</b>
5.1 MEASUREMENT PROCEDURE .....	20
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	20
5.3 MEASUREMENT RESULTS.....	20
<b>6. 20DB BANDWIDTH.....</b>	<b>26</b>
6.1 MEASUREMENT PROCEDURE .....	26
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	26
6.3 MEASUREMENT RESULTS.....	26
<b>7. HOPPING CHANNEL NUMBER .....</b>	<b>27</b>
7.1 MEASUREMENT PROCEDURE .....	32
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	32
7.3 MEASUREMENT RESULTS.....	32



---

<b>8. TIME OF OCCUPANCY (DWELL TIME)</b> .....	<b>34</b>
8.1 MEASUREMENT PROCEDURE .....	34
8.2 MEASUREMENT RESULTS.....	34
<b>9. MAXIMUM PEAK OUTPUT POWER</b> .....	<b>34</b>
9.1 MEASUREMENT PROCEDURE .....	40
9.2 MEASUREMENT RESULTS.....	40
<b>10. BAND EDGE</b> .....	<b>40</b>
10.1 MEASUREMENT PROCEDURE .....	46
10.2 LIMIT.....	46
10.3 MEASUREMENT RESULTS.....	47
<b>11. ANTENNA APPLICATION</b> .....	<b>47</b>
11.1 ANTENNA REQUIREMENT .....	54
11.2 MEASUREMENT RESULTS.....	54
<b>12. CONDUCTED SPURIOUS EMISSIONS</b> .....	<b>55</b>
12.1 MEASUREMENT PROCEDURE .....	55
12.2. MEASUREMENT RESULTS.....	55
<b>13. TEST EQUIPMENT LIST</b> .....	<b>68</b>

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test

This device is a smart projector with WIFI, BT and project, etc functions. It's powered by DC 5V come from Adapter or DC 3.7V internal Li-ion battery. For more details features, please refer to User's Manual.

Manufacturer : Shenzhen Spreadview Century Technology Co., Ltd

Address : 13-A1, Shijihaoing Mansion, Chegongmiao, Futian District, Shenzhen, 518040, P.R.China

Power Supply : DC 5V com from Adapter,  
Adapter M/N: GP303U-050-300  
Input: AC 100-240V 50/60Hz 0.8A  
Output: DC 5V 3A  
DC 3.7V Li-ion battery

Model name : P96, D5, FHD-90a, SMT-80

**Note:** : All models have the same circuitry, electrical mechanical and physical construction. Their differences in model name and trade mark for trading purpose.

**Technical parameters**

**For WIFI Function**

Frequency Range	: 2412-2462MHz for 802.11b/g/n(HT20)
Modulation	: CCK, DQPSK, DBPSK for 802.11b OFDM for 802.11g/n
Number of Channel	: 11 for 802.11b/g/n(HT20)
Channel space	: 5MHz
Date Rate	: 802.11b:1~11Mbps, 802.11g:6~54Mbps 802.11n: 6.5~65Mbps
Antenna Type	: PCB
Antenna Gain	: 0 dBi (declared by manufacturer)

**For BT function**

BT Version	: BLE and backward compatible 3.0HS, 2.1+EDR version. We prepare version BLE and 2.1+EDR for RF test.
Frequency:	: 2402-2480MHz
Modulation	: For V2.1+EDR: GFSK, $\pi/4$ -DQPSK, 8DPSK For V4.0: GFSK
Number of Channel	: For V2.1+EDR: 79; For V4.0: 40
Channel space	: For V2.1+EDR: 1MHz; For V4.0: 2MHz
Antenna Type	: PCB
Antenna Gain	: 0dBi (declaration by manufacturer)
Note	: N/A



## 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2ACZZP96 filing to comply with Section 15.247 of the FCC Part 15 (2013), Subpart C Rule.

## 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009) and DA 00-705. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

## 1.4 Equipment Modifications

Not available for this EUT intended for grant.

## 1.5 Support Device

Mouse : Manufacturer: HP  
M/N: MODGUO  
S/N: PSA1104008298  
Data Cable: 1.5m Shielded  
CE, FCC: DOC



### 1.6 Test Facility and Location

Listed by FCC, August 02, 2011  
 The Certificate Registration Number is 665078.  
 Listed by Industry Canada, July 01, 2011  
 The Certificate Registration Number is 46405-9743.

Dongguan NTC Co., Ltd.  
 (Full Name: Dongguan Nore Testing Center Co., Ltd.)

Building D, Gaosheng Science and Technology Park, Hongtu Road,  
 Nancheng District, Dongguan City, Guangdong, China  
 (Full Name: Building D, Gaosheng Science & Technology Park,  
 Zhouxi Longxi Road, Nancheng District, Dongguan, Guangdong, China.

### 1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Hopping Channel Number	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.207 (a)	AC Power Conducted Emission	Compliant
§15.247(d),§15.209, §15.205	Radiated Emission	Compliant
§15.203	Antenna Requirement	Compliant
§15.247(d)	Conducted Spurious Emission	Compliant

---

## 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 Special Accessories

Not available for this EUT intended for grant.

### 2.3 Description of test modes

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing, and all packets DH1, DH3 and DH5 mode in all modulation type GFSK,  $\pi/4$ -DQPSK, 8DPSK were tested.


### 2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.



### 3. Conducted Emissions Test

#### 3.1 Test SET-UP (Block Diagram of Configuration)

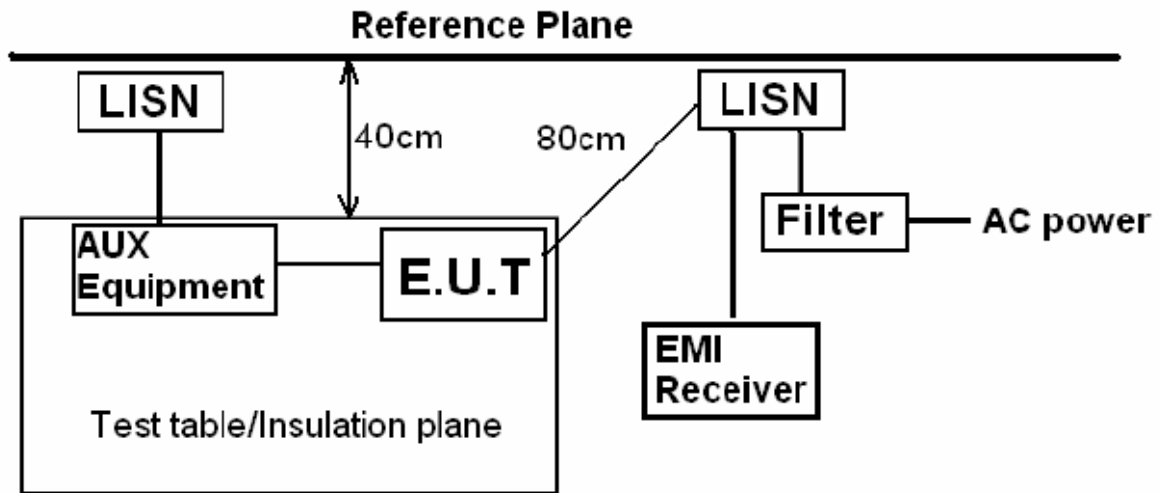


#### 3.2 Test Condition

- Test Requirement: FCC Part 15.207
- Frequency Range: 150KHz ~ 30MHz
- Detector: RBW 9KHz, VBW 30KHz
- Operation Mode: Charging+BT Mode

#### 3.3 Measurement Results


Please refer to following plots.

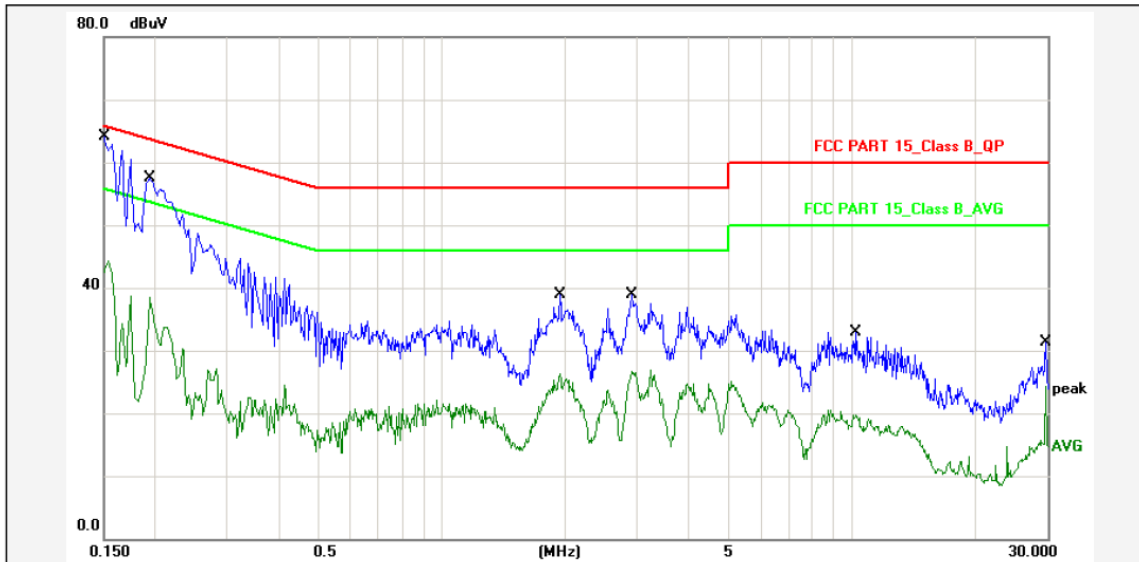

Report No.: P96  
 Test Standard: FCC PART 15\_Class B\_QP  
 Test item: Conducted Emission Phase: L1  
 Applicant: Spreadview century Temp.( )/Hum.(%): 25(C) / 46 %  
 Product: SMART Pico Power Rating: AC 120V/60Hz  
 Model No.: P96 Test Engineer: Sance  
 Test Mode: Charging+BT Mode  
 Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	10.80	52.30	63.10	65.99	-2.89	QP	P	
2	0.1500	10.80	30.48	41.28	55.99	-14.71	AVG	P	
3	0.1940	10.80	43.62	54.42	63.86	-9.44	QP	P	
4	0.1940	10.80	23.78	34.58	53.86	-19.28	AVG	P	
5	1.9460	10.80	25.18	35.98	56.00	-20.02	QP	P	
6	1.9460	10.80	12.41	23.21	46.00	-22.79	AVG	P	
7	2.9100	10.80	25.10	35.90	56.00	-20.10	QP	P	
8	2.9100	10.80	14.10	24.90	46.00	-21.10	AVG	P	
9	10.1819	10.80	20.10	30.90	60.00	-29.10	QP	P	
10	10.1819	10.80	6.90	17.70	50.00	-32.30	AVG	P	
11	29.7020	10.80	17.43	28.23	60.00	-31.77	QP	P	
12	29.7020	10.80	10.53	21.33	50.00	-28.67	AVG	P	

Note: Level=Reading+Factor.  
 Margin=Limit-Level.

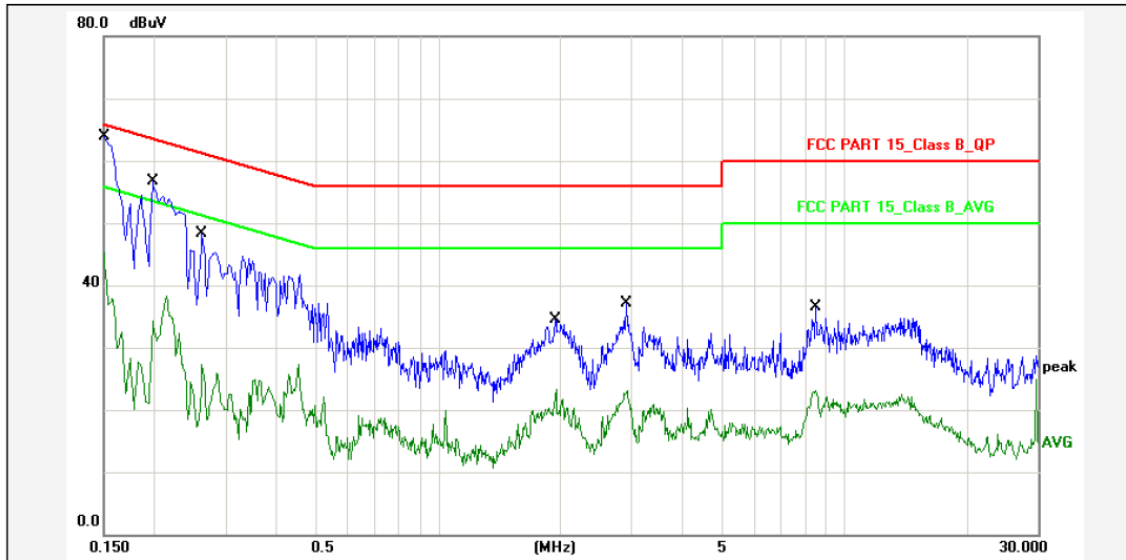

Report No.: P96  
 Test Standard: FCC PART 15\_Class B\_QP  
 Test item: Conducted Emission Phase: N  
 Applicant: Spreadview century Temp.( )/Hum.(%): 25(C) / 46 %  
 Product: SMART Pico Power Rating: AC 120V/60Hz  
 Model No.: P96 Test Engineer: Sance  
 Test Mode: Charging+BT Mode  
 Remark:


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	10.80	47.20	58.00	65.99	-7.99	QP	P	
2	0.1500	10.80	29.20	40.00	55.99	-15.99	AVG	P	
3	0.1980	10.80	47.36	58.16	63.69	-5.53	QP	P	
4	0.1980	10.80	23.60	34.40	53.69	-19.29	AVG	P	
5	0.2620	10.80	35.53	46.33	61.36	-15.03	QP	P	
6	0.2620	10.80	19.59	30.39	51.36	-20.97	AVG	P	
7	1.9420	10.80	19.62	30.42	56.00	-25.58	QP	P	
8	1.9420	10.80	9.43	20.23	46.00	-25.77	AVG	P	
9	2.9140	10.80	24.26	35.06	56.00	-20.94	QP	P	
10	2.9140	10.80	9.25	20.05	46.00	-25.95	AVG	P	
11	8.5457	10.80	23.64	34.44	60.00	-25.56	QP	P	
12	8.5457	10.80	9.22	20.02	50.00	-29.98	AVG	P	

Note: Level=Reading+Factor.  
 Margin=Limit-Level.


## 4. Radiated Emission Test

### 4.1 Test SET-UP (Block Diagram of Configuration)

#### 4.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

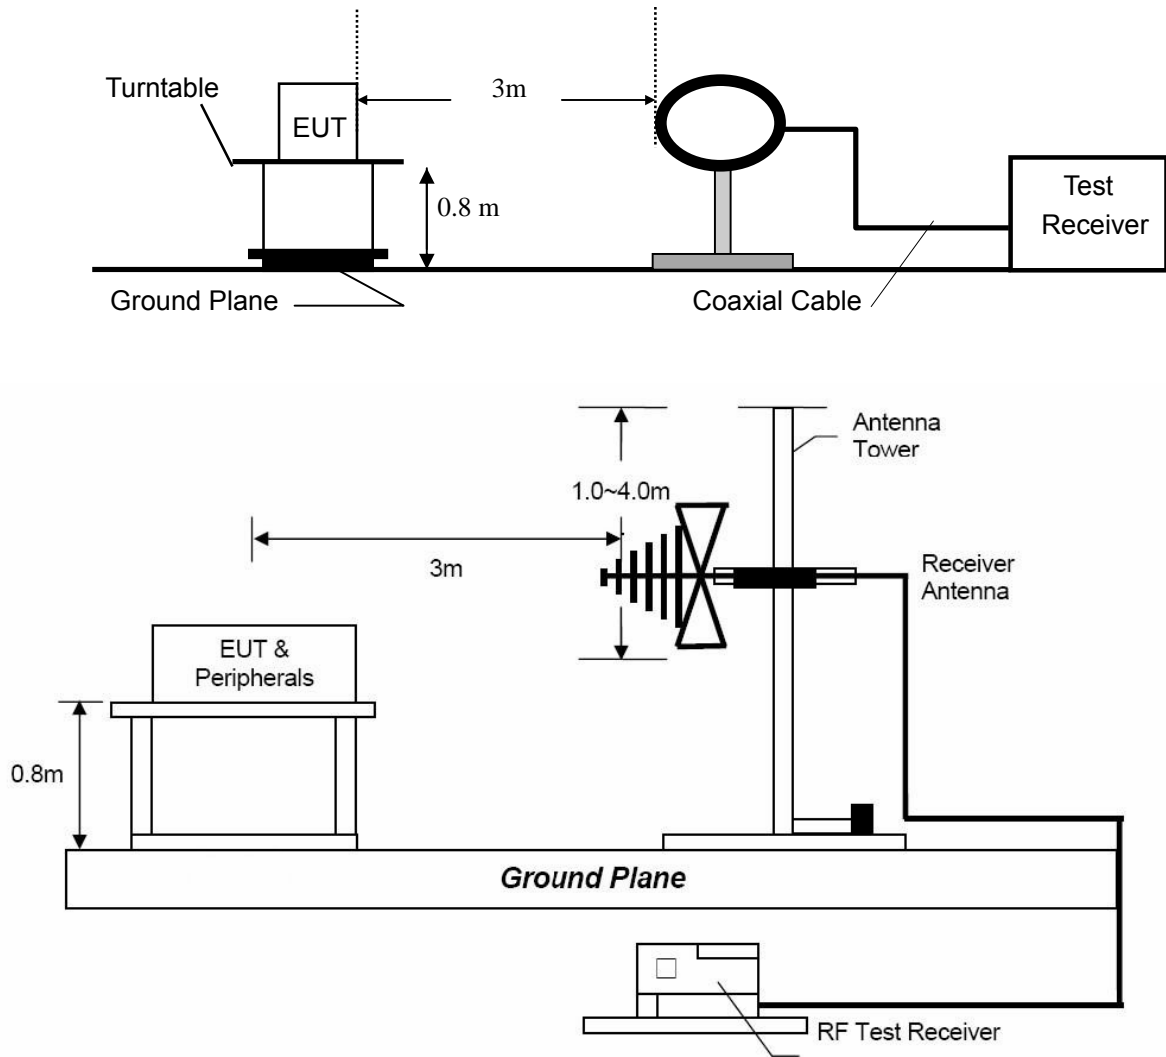

#### 4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

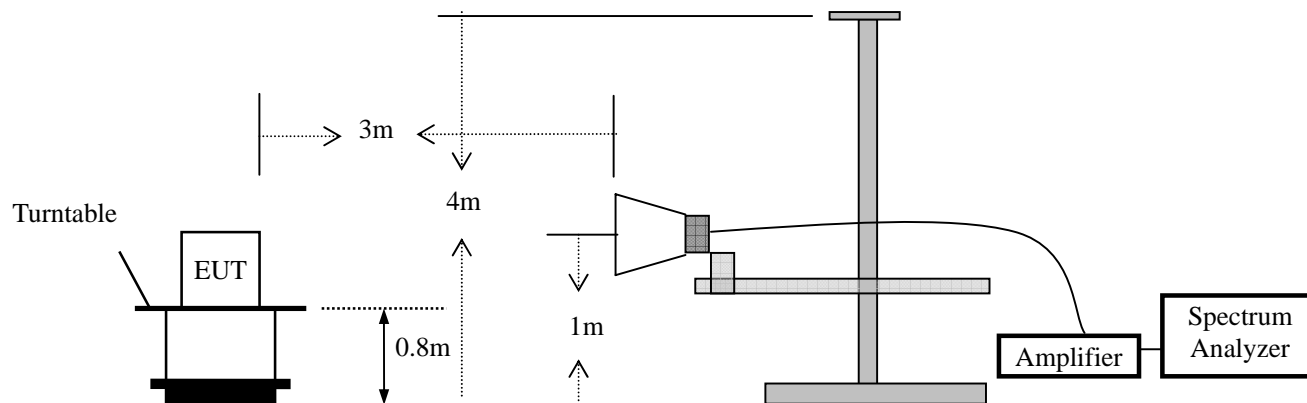

#### 4.2 Measurement Procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- e. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.
  1. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300KHz for Quasi-peak detection at frequency below 1GHz.
  2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
  3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for average detection(AV) at below at frequency above 1GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

### 4.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark :
- (1) Emission level (dB) $\mu\text{V} = 20 \log$  Emission level  $\mu\text{V/m}$
  - (2) The smaller limit shall apply at the cross point between two frequency bands.
  - (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
  - (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.



#### 4.4 Measurement Results

Operation Mode: TX  
 Frequency Range: 9KHz~1GHz      Temperature : 22 °C  
 Test Result: PASS      Humidity : 54 %  
 Measured Distance: 3m      Test By: Sance  
 Test Date : August 21, 2014

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Note
63.9500	V	27.10	40.00	-12.90	QP
466.5000	V	45.66	46.00	-9.90	QP
600.3600	V	46.10	46.00	-6.90	QP
---					
118.2700	H	36.50	43.50	-7.00	QP
149.3100	H	31.80	43.50	-11.70	QP
196.8400	H	36.40	43.50	-7.10	QP
235.6400	H	38.70	46.00	-7.30	QP
466.5000	H	38.30	46.00	-7.70	QP
533.4300	H	38.10	46.00	-7.90	QP

**Other emissions are lower than 10dB below the allowable limit.**

- Note:**
- (1) Emission Level= Reading Level + Factor
  - (2) Factor= Antenna Gain + Cable Loss – Amplifier Gain
  - (3) Measurement uncertainty : ±3.4dB
  - (4) Loop antenna used for the emission below 30MHz.
  - (5) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.

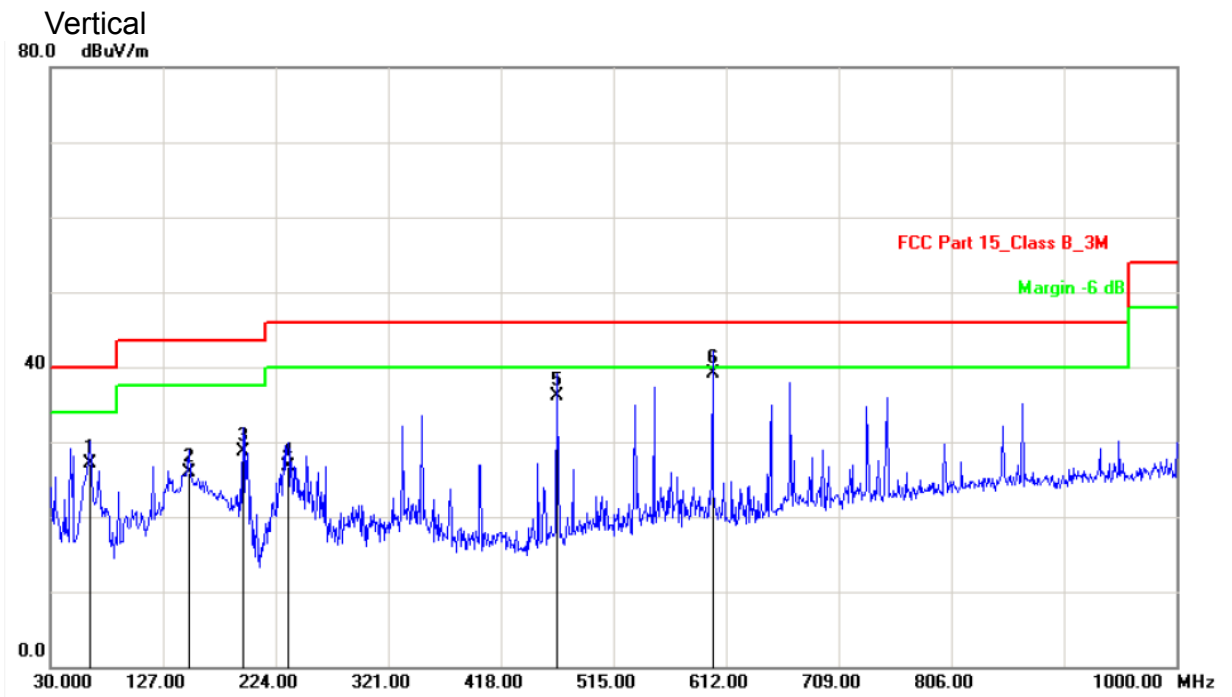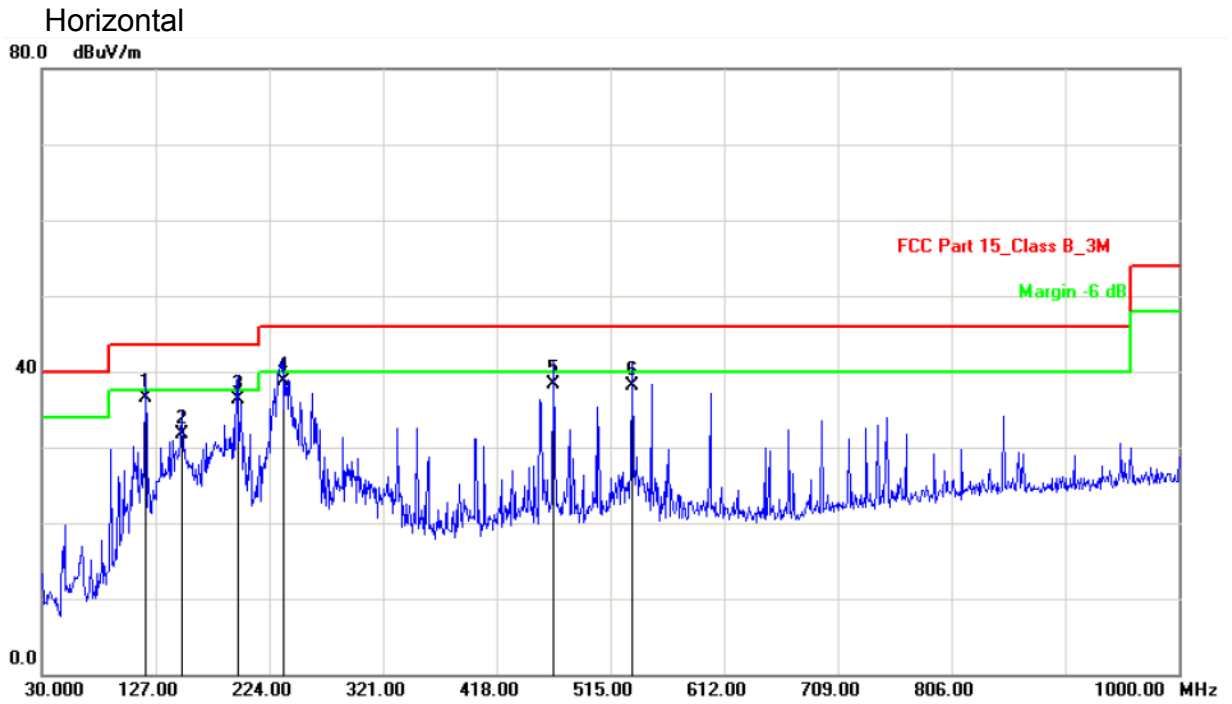





Modulation: GFSK (the worst case)  
 (Low Frequency: 2402MHz)  
 Operation Mode: TX Mode (Low) Test Date : August 21, 2014  
 Frequency Range: 1-25GHz Temperature : 22 °C  
 Test Result: PASS Humidity : 54 %  
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant. Pol.	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		Peak	AV	Peak	AV	Peak	AV
4804	V	52.32	39.45	74.00	54.00	-21.68	-14.55
7206	V	58.76	45.55	74.00	54.00	-15.24	-8.45
---							
---							
4804	H	51.25	39.52	74.00	54.00	-22.75	-14.48
7206	H	58.44	46.13	74.00	54.00	-15.56	-7.87
---							
---							

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level + Factor
  - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
  - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
  - (5) Measurement uncertainty : ±3.7dB.
  - (6) Horn antenna used for the emission over 1000MHz.



Modulation: GFSK (the worst case)  
 (Mid Frequency: 2441MHz)  
 Operation Mode: TX Mode (Mid) Test Date : August 21, 2014  
 Frequency Range: 1-25GHz Temperature : 22 °C  
 Test Result: PASS Humidity : 54 %  
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant. Pol.	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		Peak	AV	Peak	AV	Peak	AV
4882	V	52.53	39.62	74.00	54.00	-21.47	-14.38
7323	V	58.67	46.48	74.00	54.00	-15.33	-7.52
---							
---							
4882	H	50.69	39.12	74.00	54.00	-23.31	-14.88
7323	H	58.77	46.65	74.00	54.00	-15.23	-7.35
---							
---							

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level + Factor
  - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
  - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
  - (5) Measurement uncertainty : ±3.7dB.
  - (6) Horn antenna used for the emission over 1000MHz.



Modulation: GFSK (the worst case)  
 (High Frequency: 2480MHz)  
 Operation Mode: TX Mode (High) Test Date : August 21, 2014  
 Frequency Range: 1-25GHz Temperature : 22 °C  
 Test Result: PASS Humidity : 54 %  
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant. Pol.	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		Peak	AV	Peak	AV	Peak	AV
4960	V	50.76	39.33	74.00	54.00	-23.24	-14.67
7440	V	58.26	46.29	74.00	54.00	-15.74	-7.71
---							
---							
4960	H	51.21	39.12	74.00	54.00	-22.79	-14.88
7440	H	60.50	46.52	74.00	54.00	-13.50	-7.48
---							
---							

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level + Factor
  - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
  - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
  - (5) Measurement uncertainty : ±3.7dB.
  - (6) Horn antenna used for the emission over 1000MHz.


## 5. Channel Separation test

### 5.1 Measurement Procedure

Minimum Hopping Channel Carrier Frequency Separation, FCC Rule 15.247(a)(1):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable, and using the MARKER and Max-Hold function to record the separation of two adjacent channels.

### 5.2 Test SET-UP (Block Diagram of Configuration)




### 5.3 Measurement Results

Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	100KHz	VBW:	300KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	Sep. 03, 2014
Temperature :	24 °C	Humidity :	56 %
Test Result:	PASS		


Channel number	Channel frequency (MHz)	Separation Read Value (KHz)	Separation Limit (KHz)
GFSK			
Lowest	2402	1002	>822
Middle	2441	1008	>822
Highest	2480	1002	>828
$\pi/4$ -DQPSK			
Lowest	2402	1002	>816
Middle	2441	1002	>820
Highest	2480	1002	>832
8DPSK			
Lowest	2402	1002	>840
Middle	2441	1002	>844
Highest	2480	1002	>844

### GFSK Lowest Channel

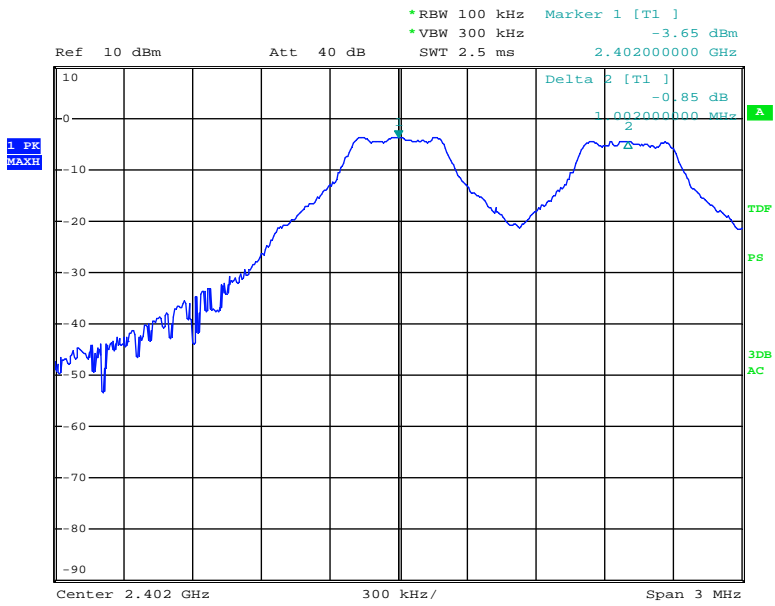


Date: 3.SEP.2014 19:31:22

### GFSK Middle Channel

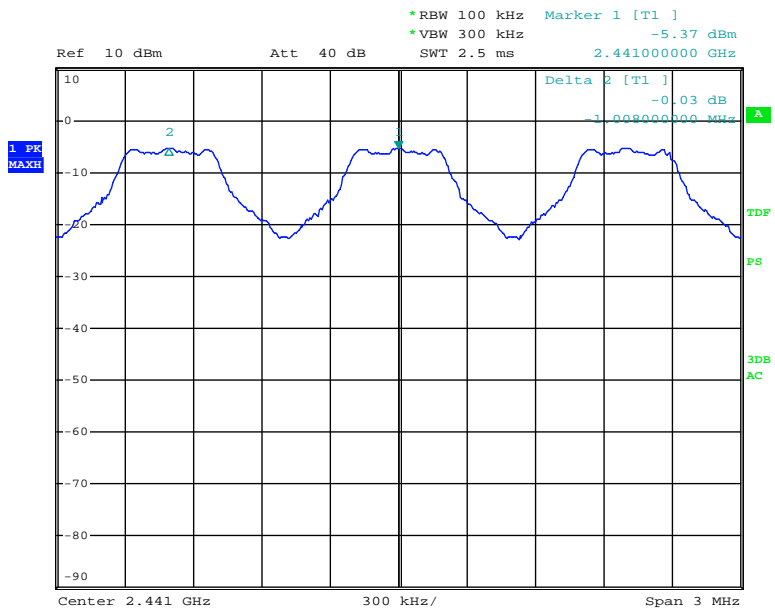


Date: 3.SEP.2014 19:32:16

### GFSK Highest Channel

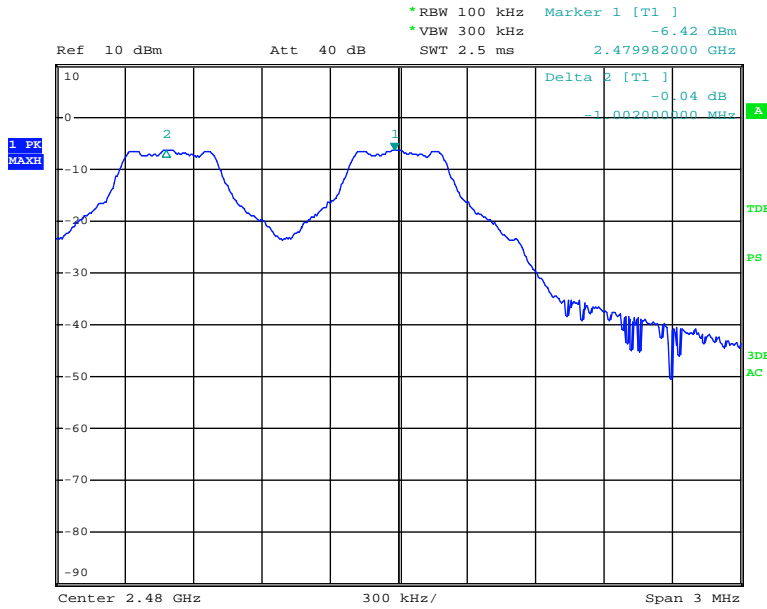


Date: 3.SEP.2014 19:33:06

### $\pi/4$ -DQPSK Lowest Channel

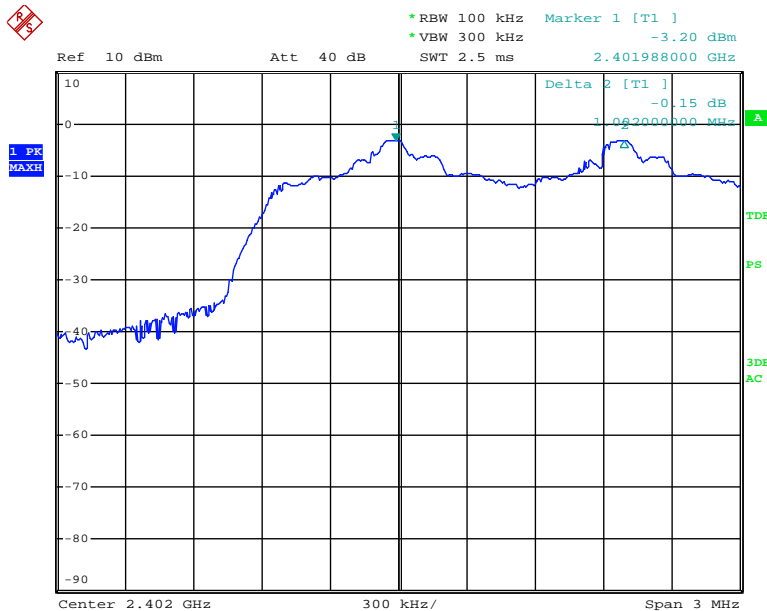


Date: 3.SEP.2014 19:39:41

### $\pi/4$ -DQPSK Middle Channel

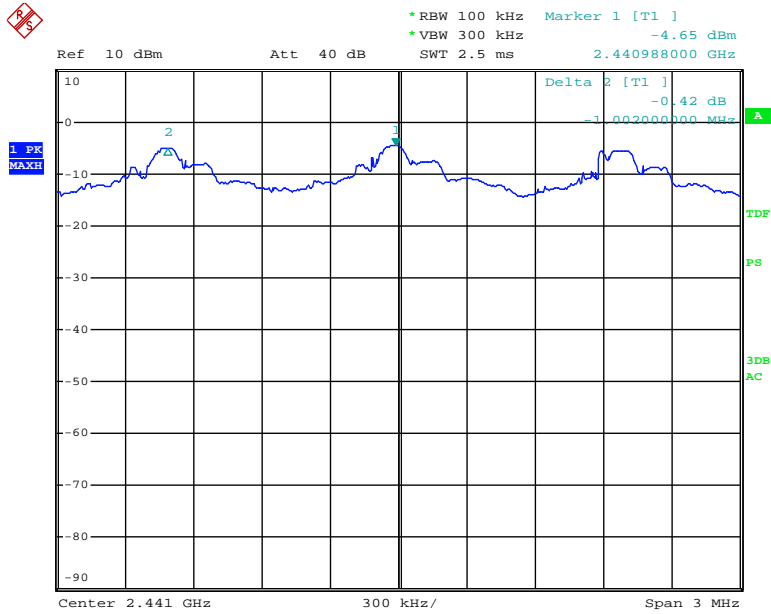


Date: 3.SEP.2014 19:40:53

### $\pi/4$ -DQPSK Highest Channel

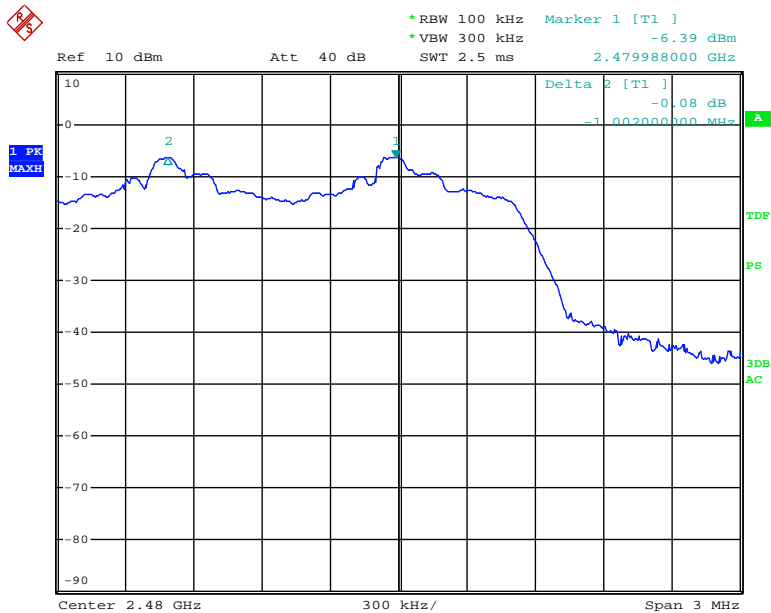


Date: 3.SEP.2014 19:42:01

### 8DPSK Lowest Channel

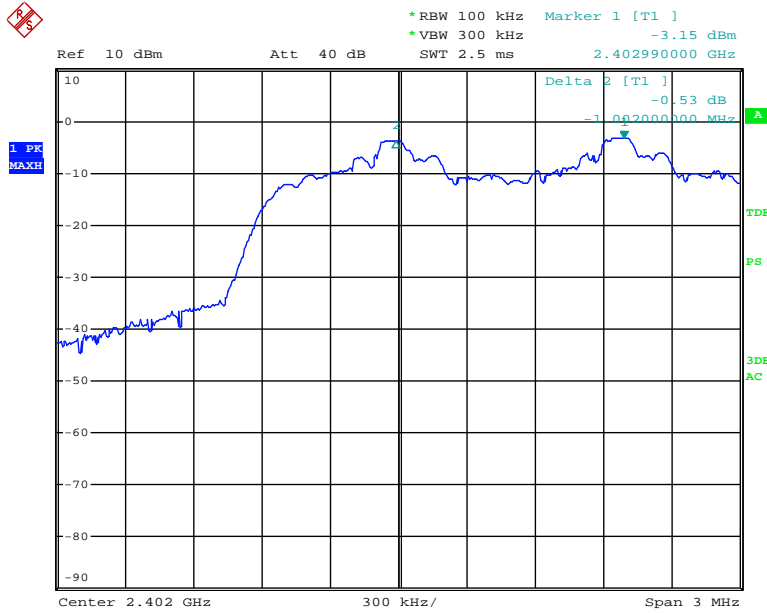

Date: 3.SEP.2014 19:43:21


### 8DPSK Middle Channel

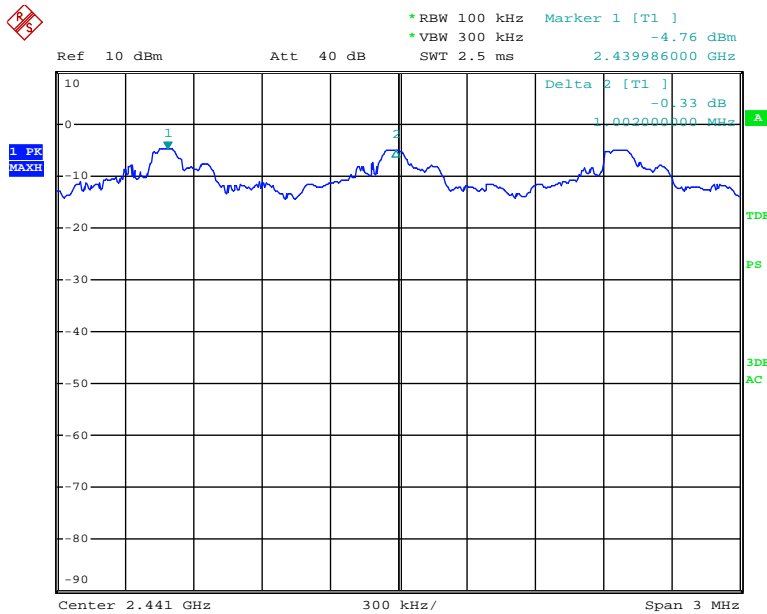

Date: 3.SEP.2014 19:44:08



### 8DPSK Highest Channel

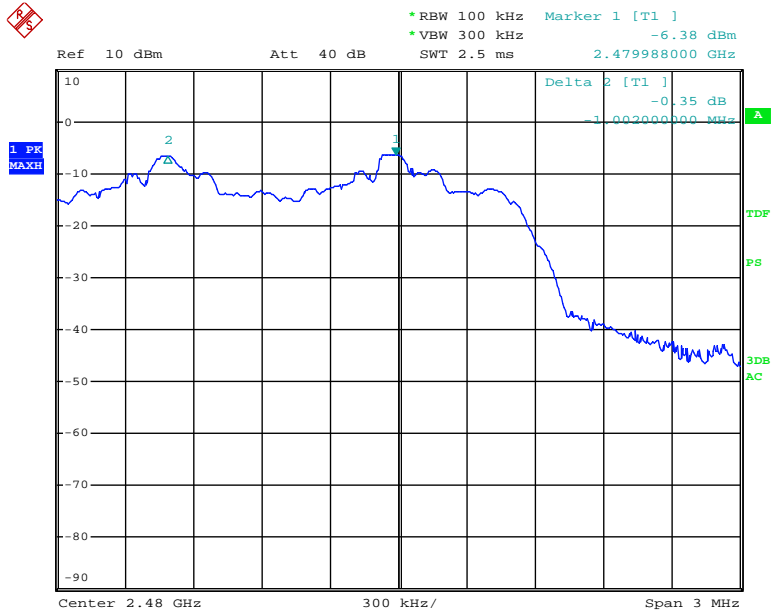

Date: 3.SEP.2014 19:45:25


## 6. 20dB Bandwidth

### 6.1 Measurement Procedure

Maximum 20dB RF Bandwidth, FCC Rule 15.247(a)(1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

### 6.2 Test SET-UP (Block Diagram of Configuration)




### 6.3 Measurement Results

Refer to attached data chart.

Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	30KHz	VBW:	100KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	Sep. 03 2014
Temperature :	24 °C	Humidity :	56 %
Test Result:	PASS		


Channel frequency (MHz)	20dB Down BW(kHz)
<b>GFSK</b>	
2402	822
2441	822
2480	828
<b><math>\pi/4</math>-DQPSK</b>	
2402	1224
2441	1230
2480	1248
<b>8DPSK</b>	
2402	1260
2441	1266
2480	1266

### GFSK Lowest Channel

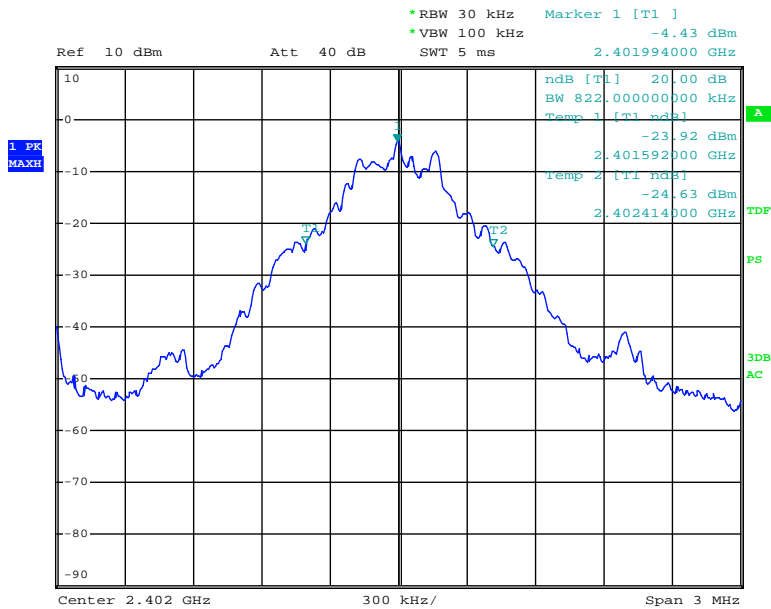


Date: 3.SEP.2014 10:53:46

### GFSK Middle Channel

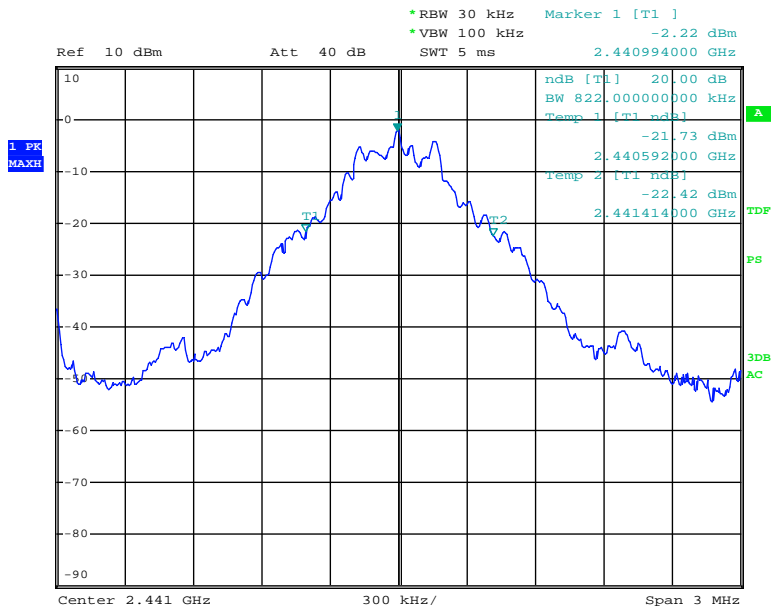


Date: 3.SEP.2014 10:54:18

### GFSK Highest Channel

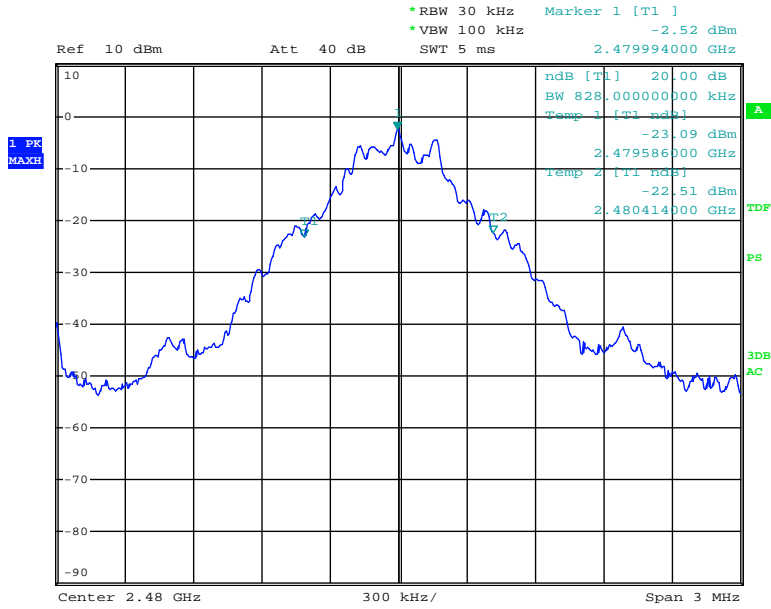


Date: 3.SEP.2014 10:55:04

### $\pi/4$ -DQPSK Lowest Channel

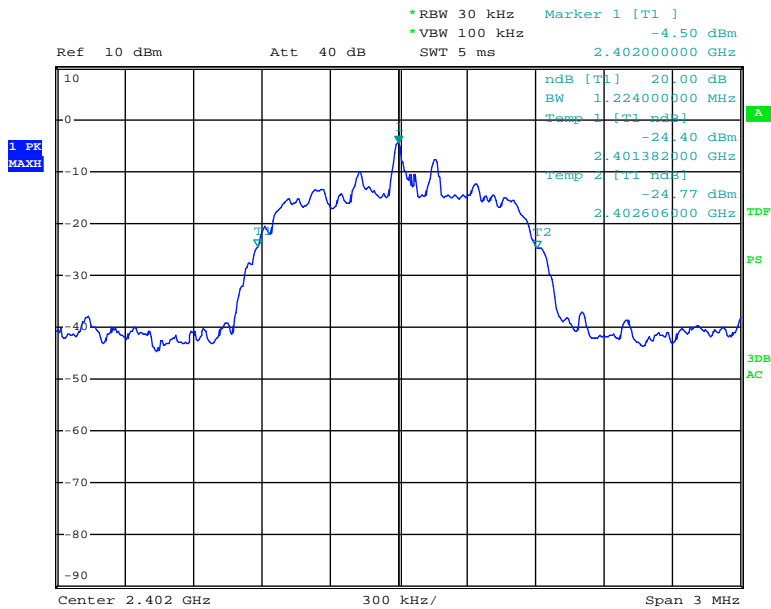


Date: 3.SEP.2014 10:55:44

### $\pi/4$ -DQPSK Middle Channel

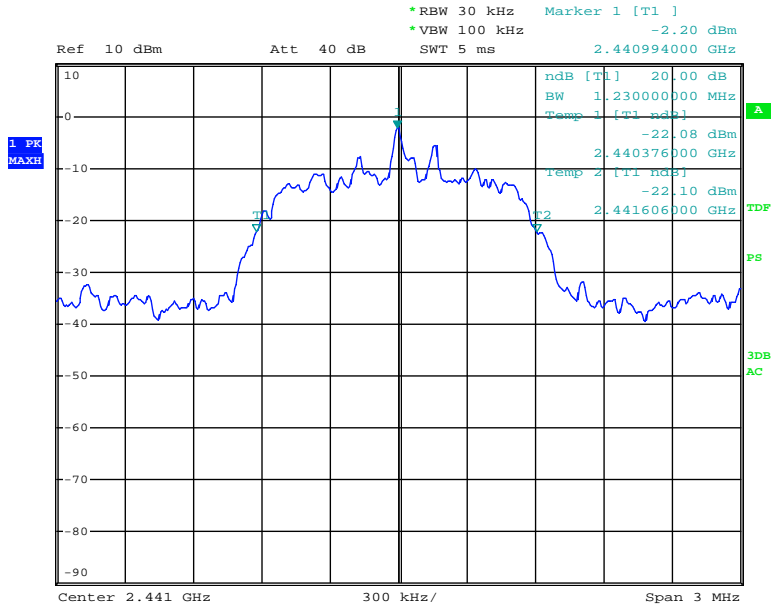


Date: 3.SEP.2014 10:56:13

### $\pi/4$ -DQPSK Highest Channel

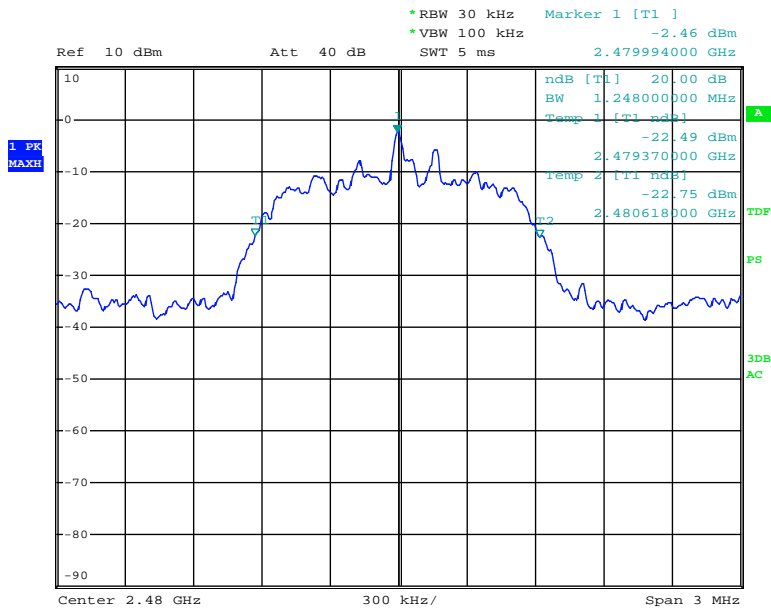


Date: 3.SEP.2014 10:56:48

### 8DPSK Lowest Channel

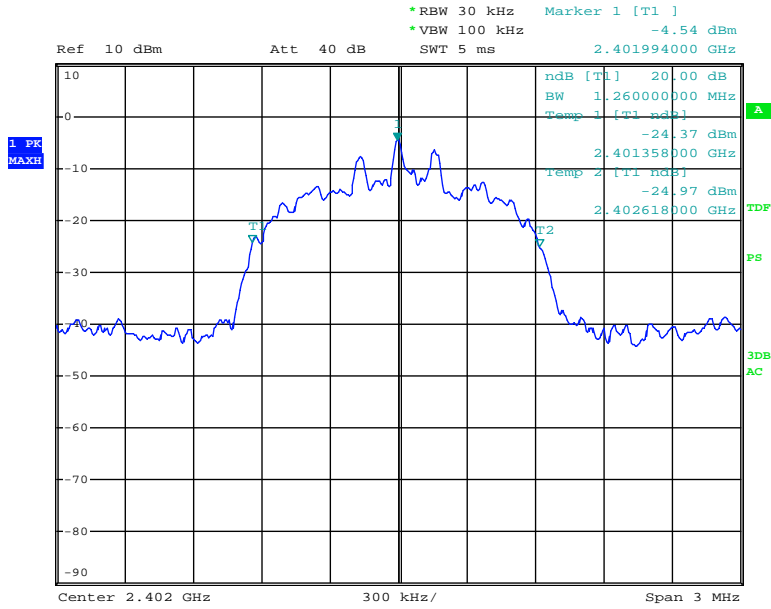


Date: 3.SEP.2014 10:57:35

### 8DPSK Middle Channel

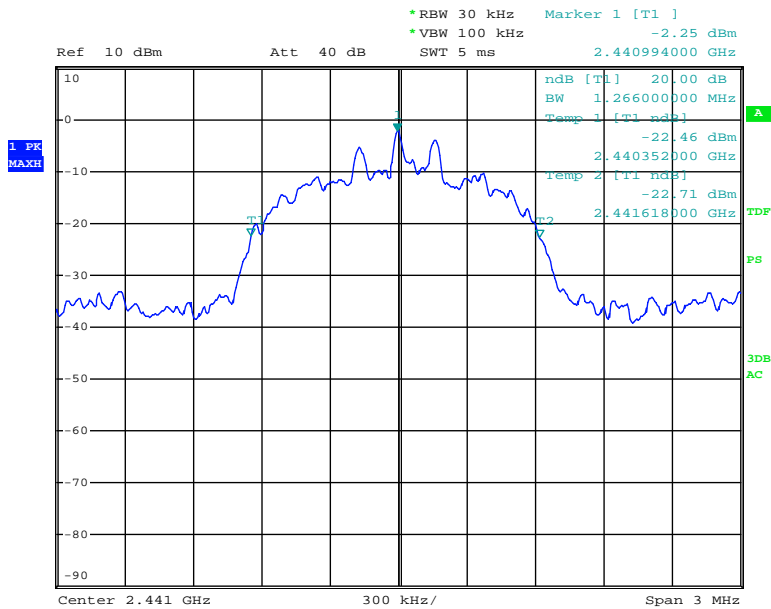

Date: 3.SEP.2014 10:58:08

### 8DPSK Highest Channel

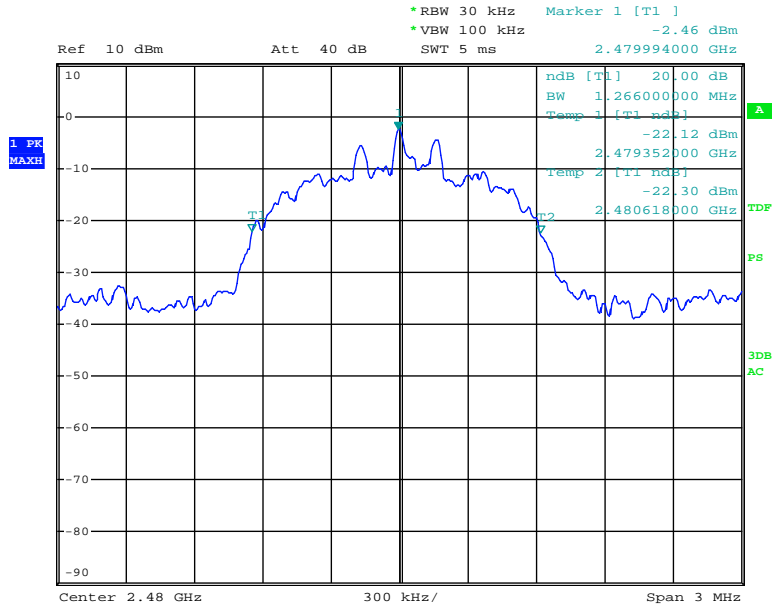

Date: 3.SEP.2014 10:58:51


## 7. Hopping Channel Number

### 7.1 Measurement Procedure

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a)(1)(iii):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, and the spectrum analyzer set to MAX HOLD readings were taken for 3-5 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

### 7.2 Test SET-UP (Block Diagram of Configuration)



### 7.3 Measurement Results


Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	100KHz	VBW:	300KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	Sep. 03, 2014
Temperature :	24 °C	Humidity :	56 %
Test Result:	PASS		

Hopping Channel Frequency Range	Number of Hopping Channels	Limit
2402-2480	79	$\geq 15$

The worst case: GFSK



### GFSK

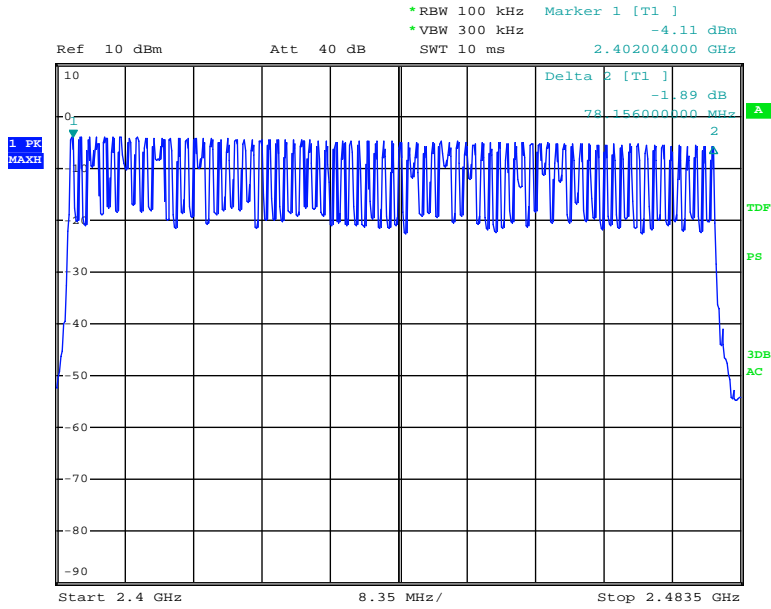

Date: 3.SEP.2014 20:11:54

## 8. Time of Occupancy (Dwell Time)

### 8.1 Measurement Procedure

Average Channel Occupancy Time, FCC Ref:15.247(a)(1)(iii):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable. The spectrum analyzer center frequency was set to one of the known hopping channels. The Sweep was set to 10 ms, the SPAN was set to Zero SPAN. The time duration of the transmissions so captured was measured with the Marker Delta function

### 8.2 Measurement Results


The maximum number of hopping channels in 31.6s (0.4s/Channel x 79 Channel)

Refer to attached data chart.

Modulation :	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW :	1MHz	VBW :	3MHz
Spectrum Detector:	PK	Test By:	Sance
Test Date :	Sep. 03, 2014	Temperature :	24°C
Test Result:	PASS	Humidity :	56 %


Packet	Frequency (MHz)	Result (msec)	Limit (msec)
GFSK			
DH1	2402	$0.505(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 161.6$	400
DH3	2402	$1.765(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 282.4$	400
DH5	2402	$2.995(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 319.5$	400
$\pi/4$ -DQPSK			
2-DH1	2402	$0.515(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 164.8$	400
2-DH3	2402	$1.775(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 284.0$	400
2-DH5	2402	$3.005(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 320.5$	400
8DPSK			
3-DH1	2402	$0.510(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 163.2$	400
3-DH3	2402	$1.770(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 283.2$	400
3-DH5	2402	$3.015(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 321.6$	400

### GFSK DH1

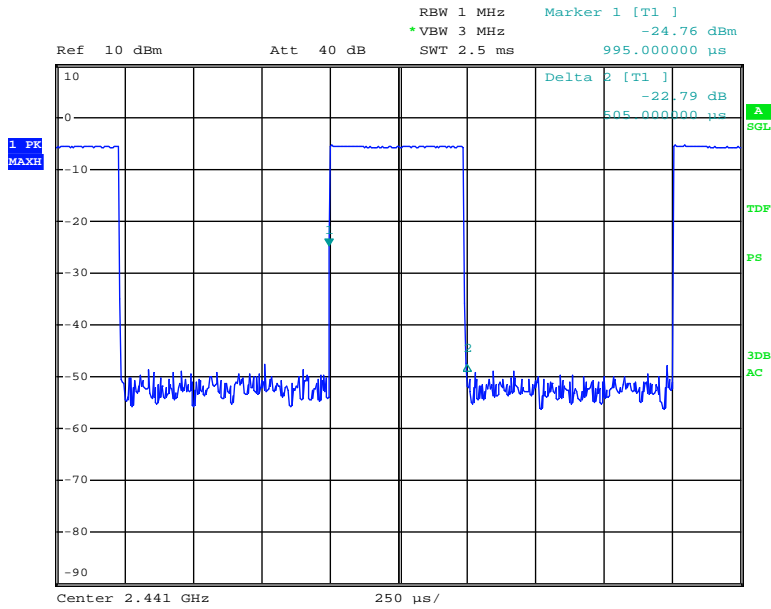


Date: 3.SEP.2014 19:47:14

### GFSK DH3

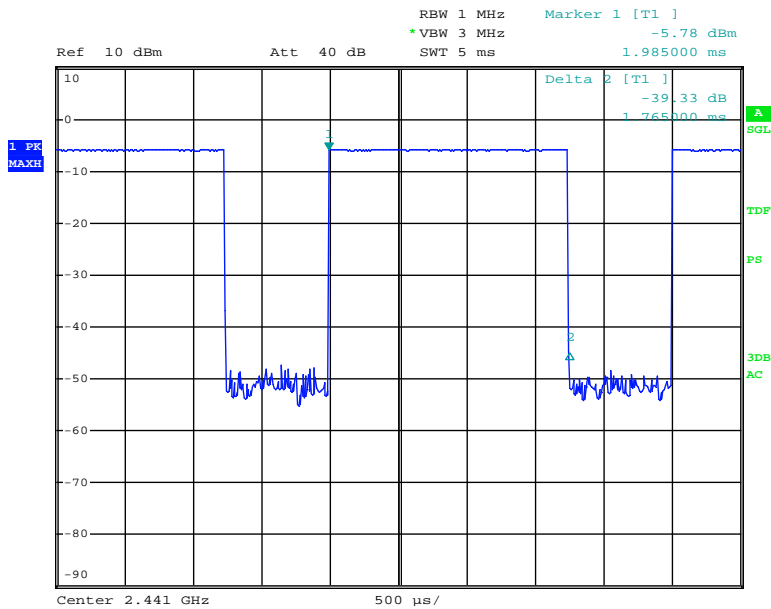


Date: 3.SEP.2014 19:47:35

### GFSK DH5

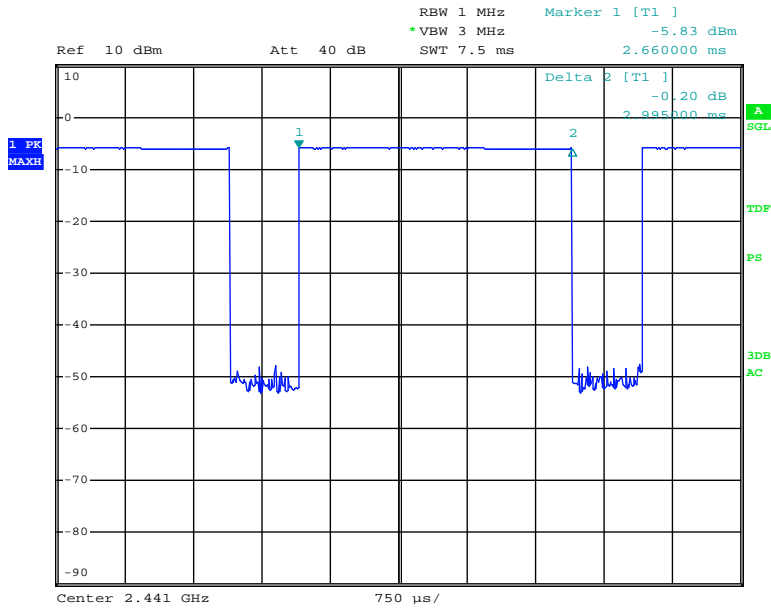


Date: 3.SEP.2014 19:47:57

### $\pi/4$ -DQPSK 2-DH1

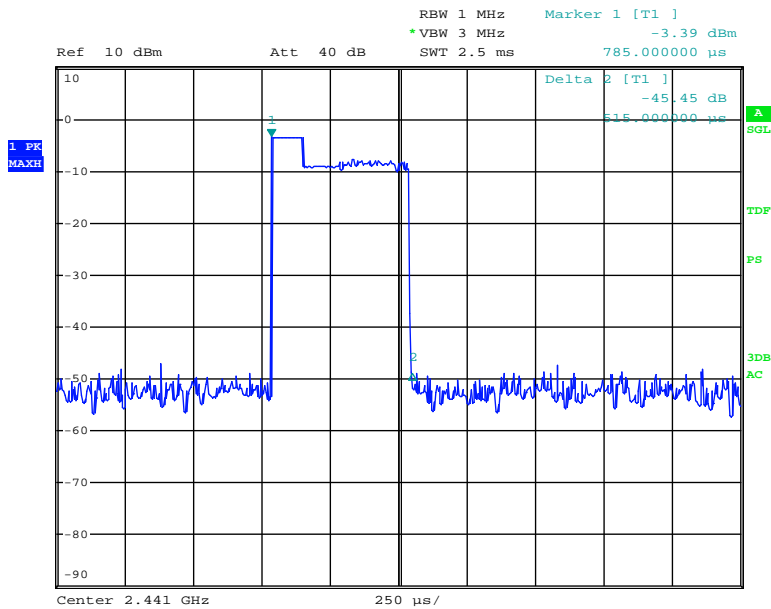


Date: 3.SEP.2014 19:48:27

### $\pi/4$ -DQPSK 2-DH3

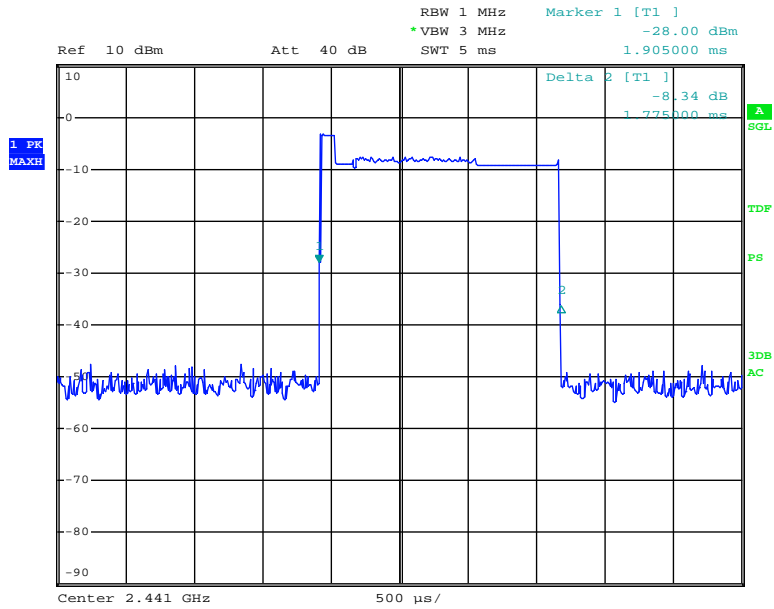


Date: 3.SEP.2014 19:48:49

### $\pi/4$ -DQPSK 2-DH5

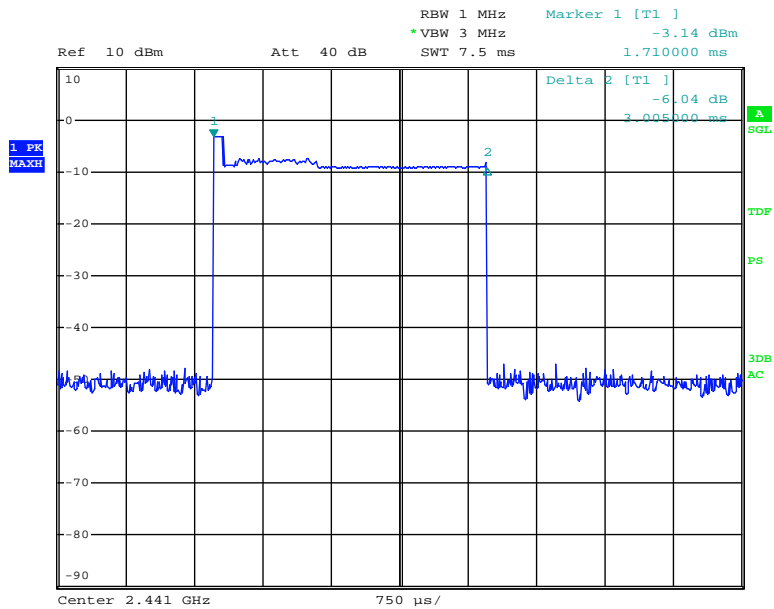


Date: 3.SEP.2014 19:49:12

### 8DPSK 3-DH1

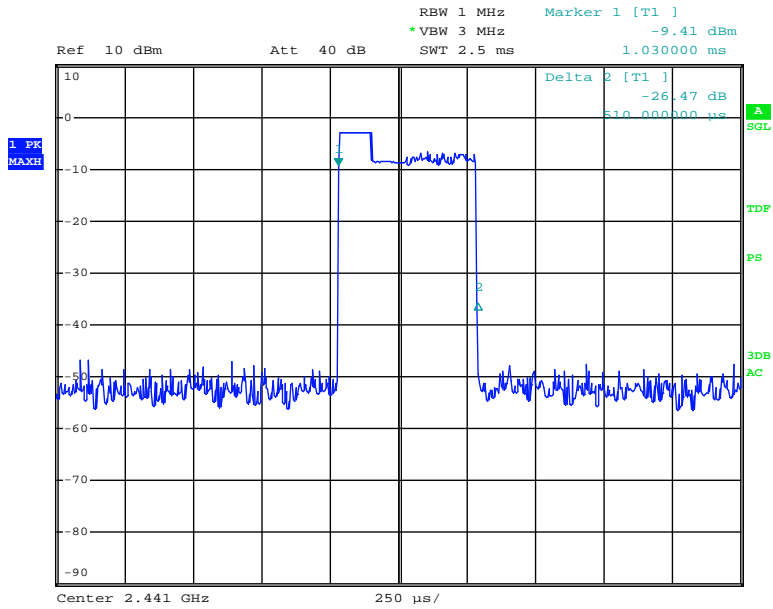


Date: 3.SEP.2014 19:49:34

### 8DPSK 3-DH3

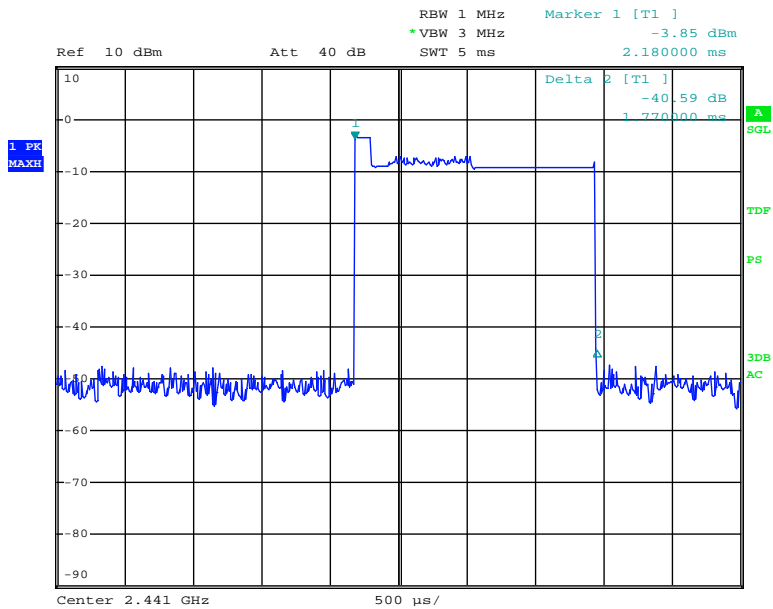

Date: 3.SEP.2014 19:50:00

### 8DPSK 3-DH5

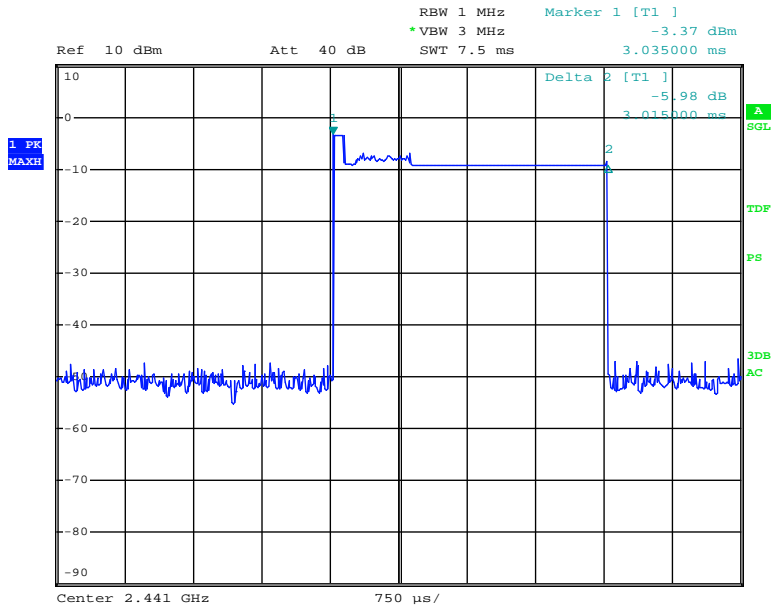

Date: 3.SEP.2014 19:50:21

## 9. MAXIMUM PEAK OUTPUT POWER

### 9.1 Measurement Procedure

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(1):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. The analyzer was set for RBW > 20dB bandwidth and power was read directly in dBm. Cable loss was considered during this measurement.

### 9.2 Measurement Results


Refer to attached data chart.

Modulation :	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW :	3MHz	VBW :	3MHz
Spectrum Detector:	PK	Test Date :	Sep. 03, 2014
Test By:	Sance	Temperature :	24 °C
Test Result:	PASS	Humidity :	56 %

Channel Frequency (MHz)	Cable Loss dB	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(dBm)	Pass/Fail
<b>GFSK</b>					
2402.00	1.5	0.94	-0.29	30	PASS
2441.00	1.5	0.81	-0.93	30	PASS
2480.00	1.5	0.66	-1.81	30	PASS
<b><math>\pi/4</math>-DQPSK</b>					
2402.00	1.5	0.94	-0.29	21	PASS
2441.00	1.5	0.85	-0.71	21	PASS
2480.00	1.5	0.69	-1.60	21	PASS
<b>8DPSK</b>					
2402.00	1.5	0.90	-0.44	21	PASS
2441.00	1.5	0.85	-0.70	21	PASS
2480.00	1.5	0.69	-1.61	21	PASS




### GFSK Lowest Channel

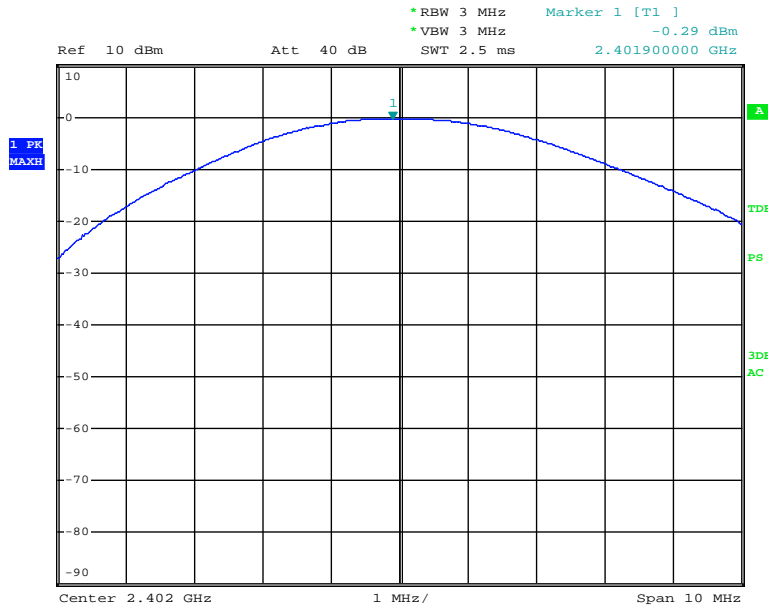


Date: 3.SEP.2014 19:59:26

### GFSK Middle Channel

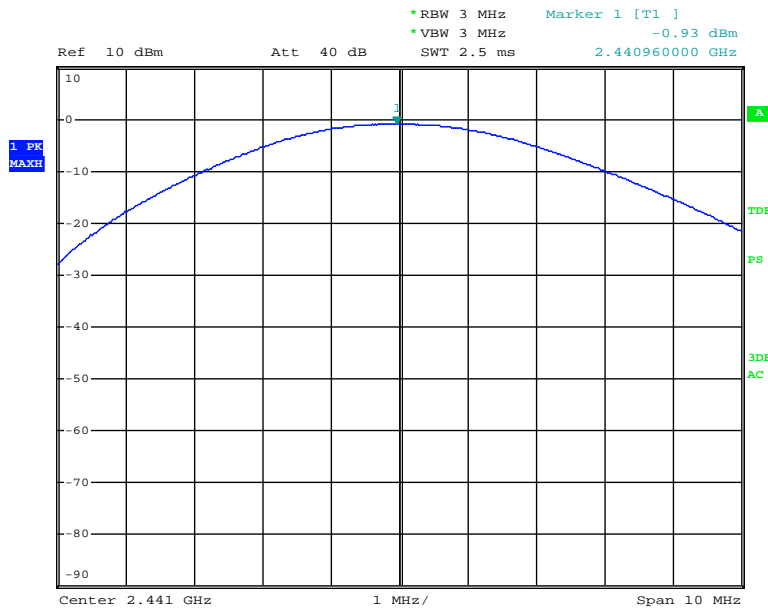


Date: 3.SEP.2014 19:59:38

### GFSK Highest Channel

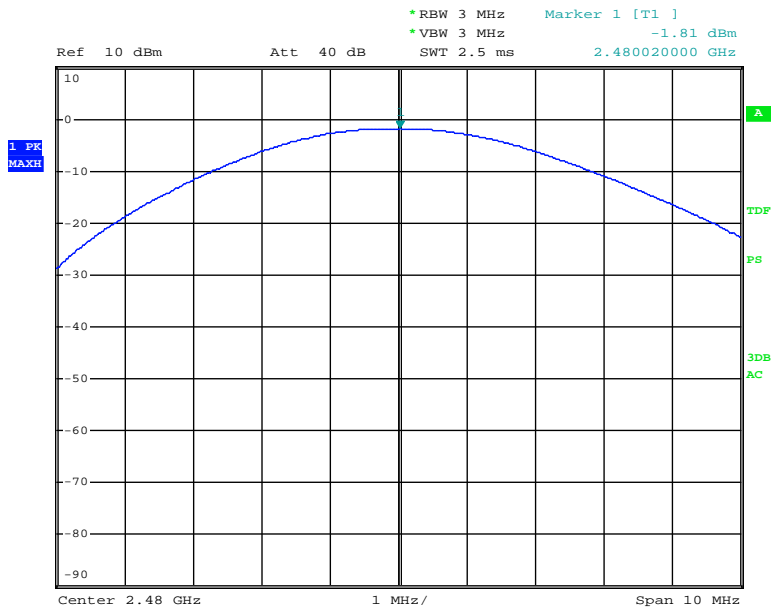


Date: 3.SEP.2014 19:59:53

### $\pi/4$ -DQPSK Lowest Channel

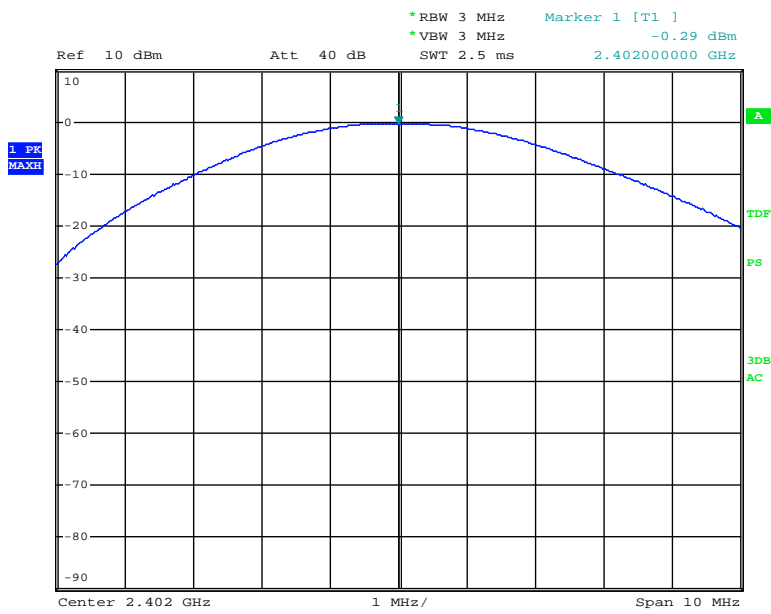


Date: 3.SEP.2014 20:00:06

### $\pi/4$ -DQPSK Middle Channel

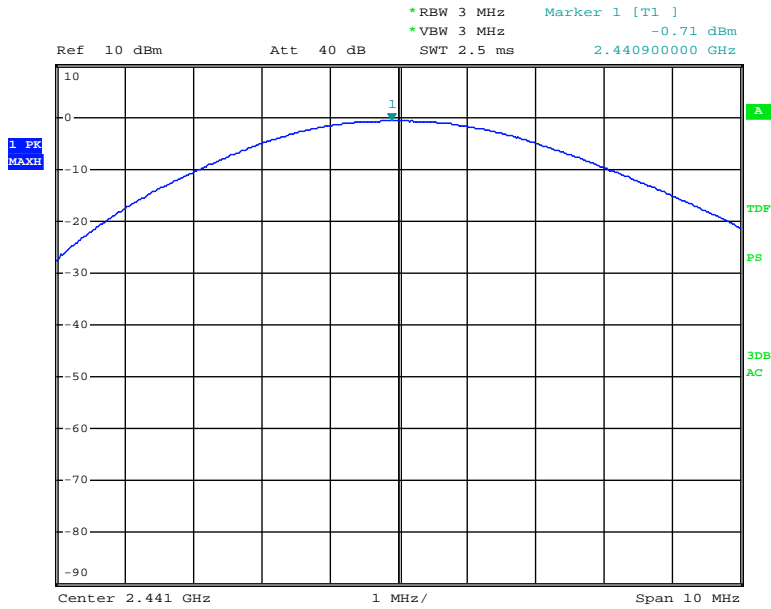


Date: 3.SEP.2014 20:00:18

### $\pi/4$ -DQPSK Highest Channel

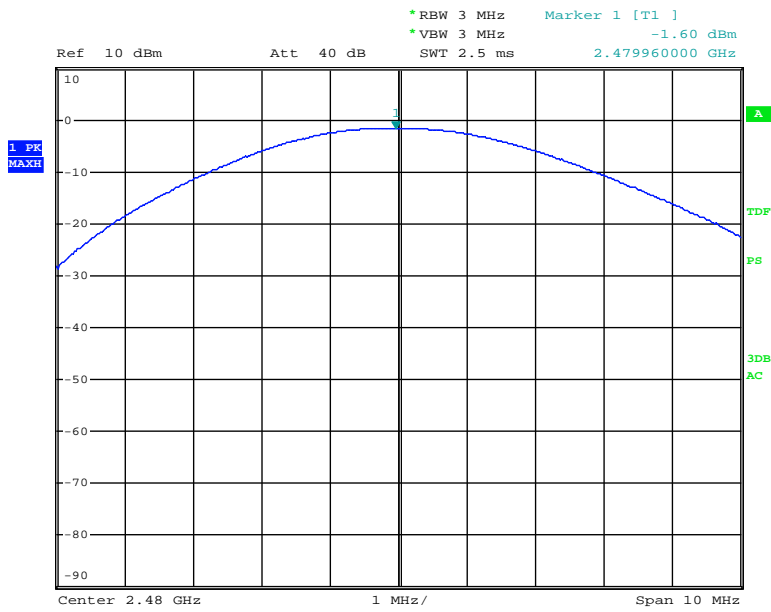


Date: 3.SEP.2014 20:00:32

### 8DPSK Lowest Channel

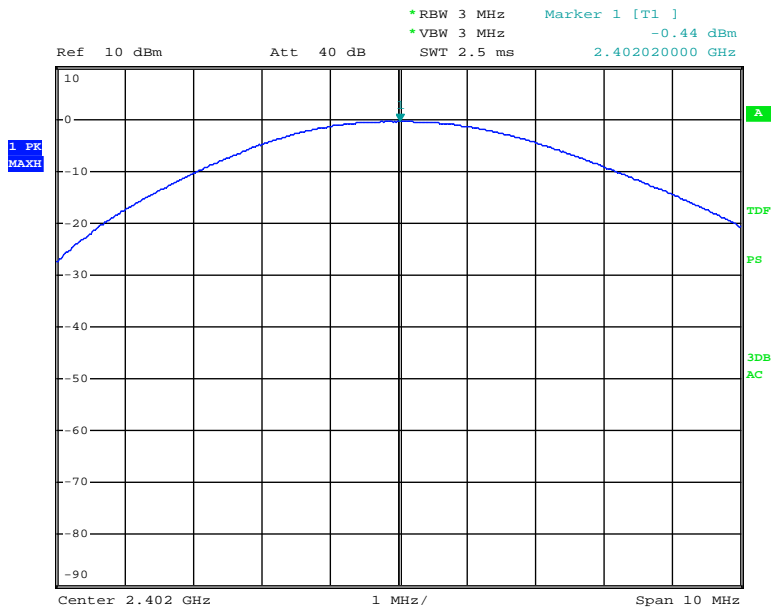


Date: 3.SEP.2014 20:00:45

### 8DPSK Middle Channel

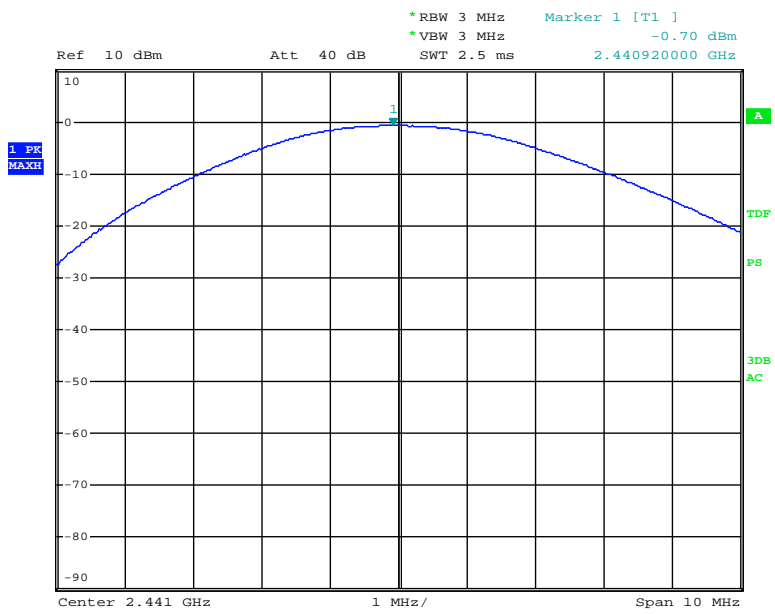

Date: 3.SEP.2014 20:00:57

### 8DPSK Highest Channel

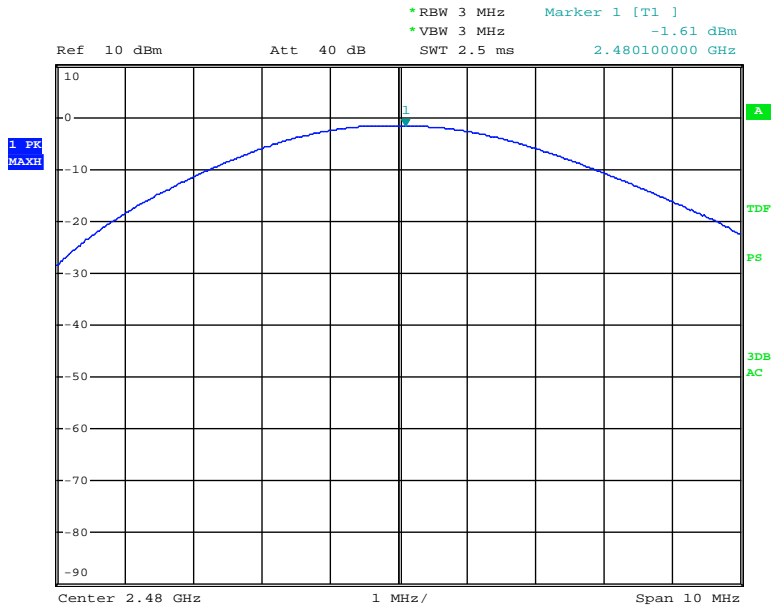

Date: 3.SEP.2014 20:01:09

## 10. Band Edge

### 10.1 Measurement Procedure

Out of Band Conducted Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. The resolution bandwidth is set to 100KHz, and the video bandwidth set to 300KHz.

A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

- 1.The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300KHz for Quasi-peak detection at frequency below 1GHz.
- 2.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
- 3.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for average detection(AV) at below at frequency above 1GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

### 10.2 Limit

15.247(d) In any 100KHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 10.3 Measurement Results


Please see below test table and plots.  
 For Radiated Emission  
 The worst case: GFSK

Freq. (MHz)	Ant. Pol.	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		Peak	AV	Peak	AV	Peak	AV
2398.8800	H	66.12	51.76	74.00	54.00	-7.88	-2.24
2399.210	V	64.87	50.52	74.00	54.00	-9.13	-3.48
2484.590	H	59.28	51.76	74.00	54.00	-14.72	-2.24
2486.670	V	60.10	51.52	74.00	54.00	-13.90	-2.48


- Note:**
- (1) Emission Level= Reading Level + Factor
  - (2) Factor= Antenna Gain + Cable Loss – Amplifier Gain
  - (3) Horn antenna used for the emission over 1000MHz.

For RF Conducted

### GFSK Lowest Channel

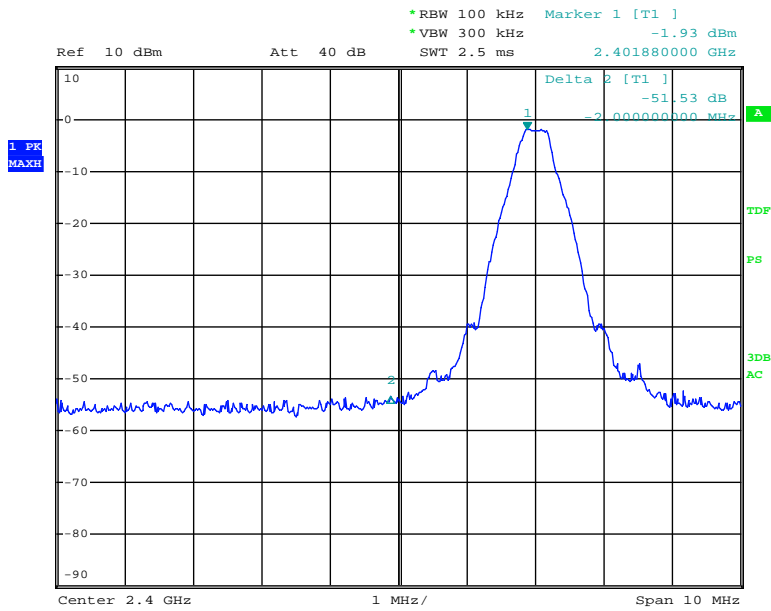


Date: 3.SEP.2014 19:52:00

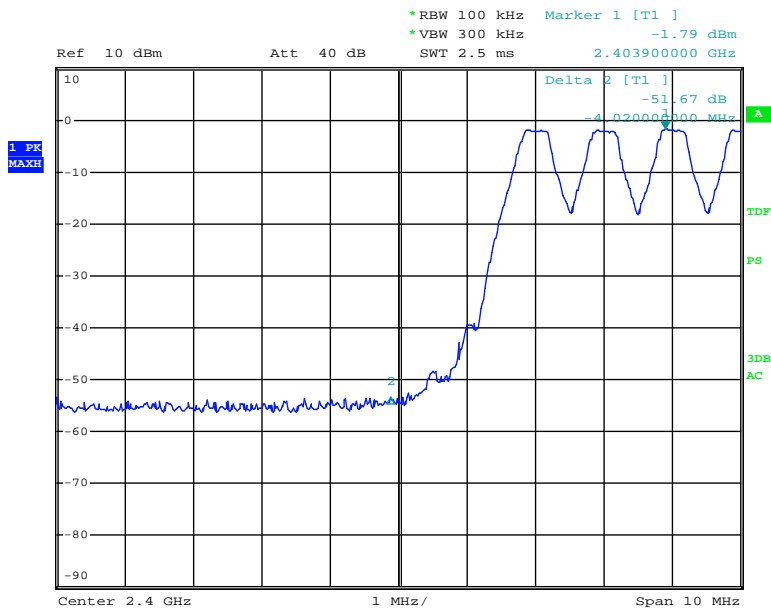


Date: 3.SEP.2014 19:52:51



### GFSK Highest Channel

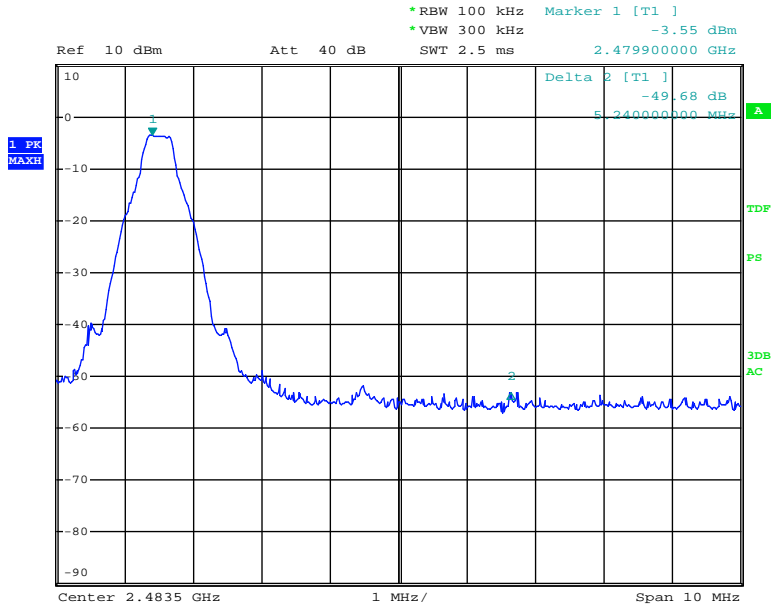


Date: 3.SEP.2014 19:53:50

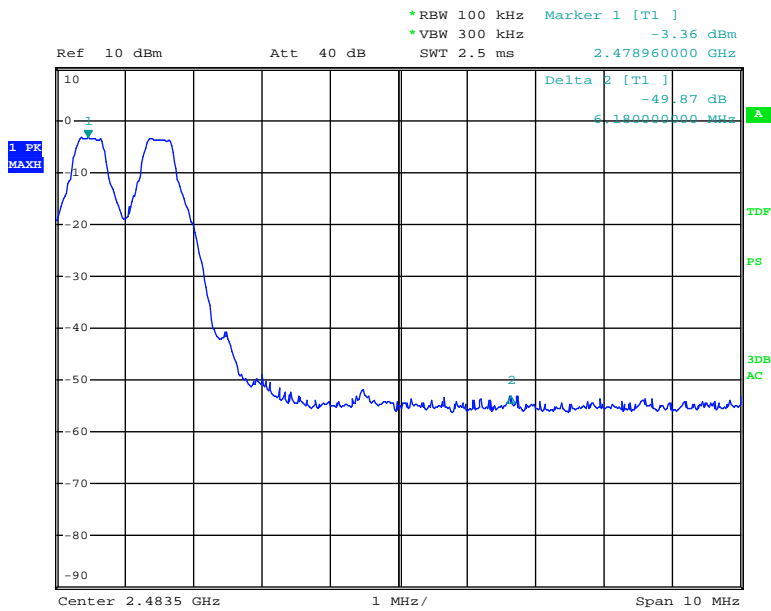


Date: 3.SEP.2014 19:54:37

### $\pi/4$ -DQPSK Lowest Channel

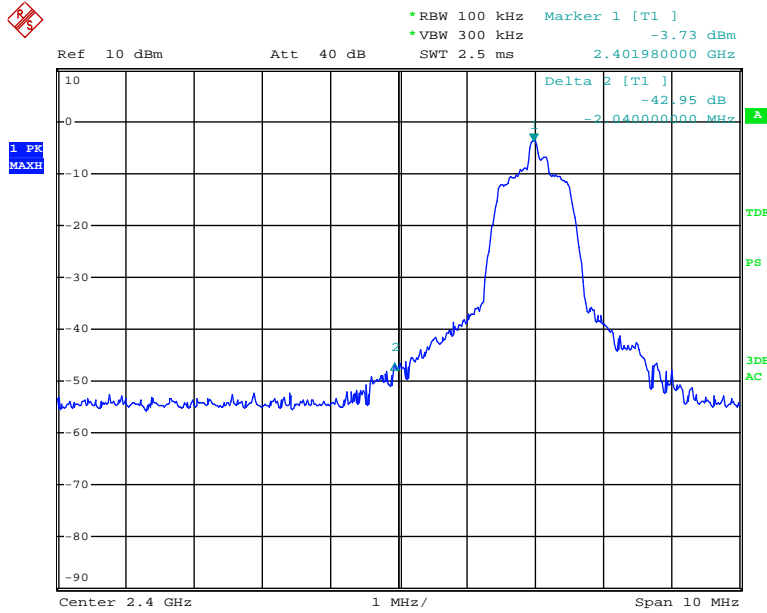


Date: 3.SEP.2014 19:57:04

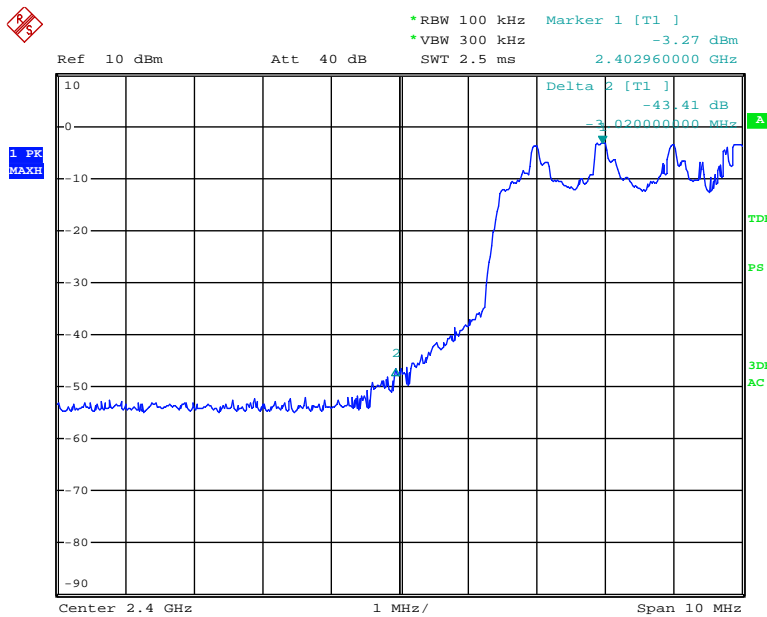


Date: 3.SEP.2014 19:56:30

### $\pi/4$ -DQPSK Highest Channel

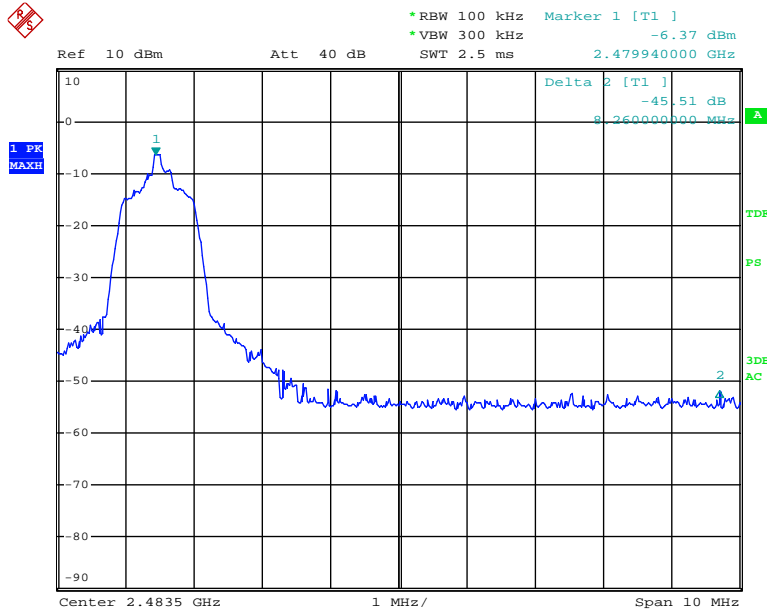


Date: 3.SEP.2014 19:55:20

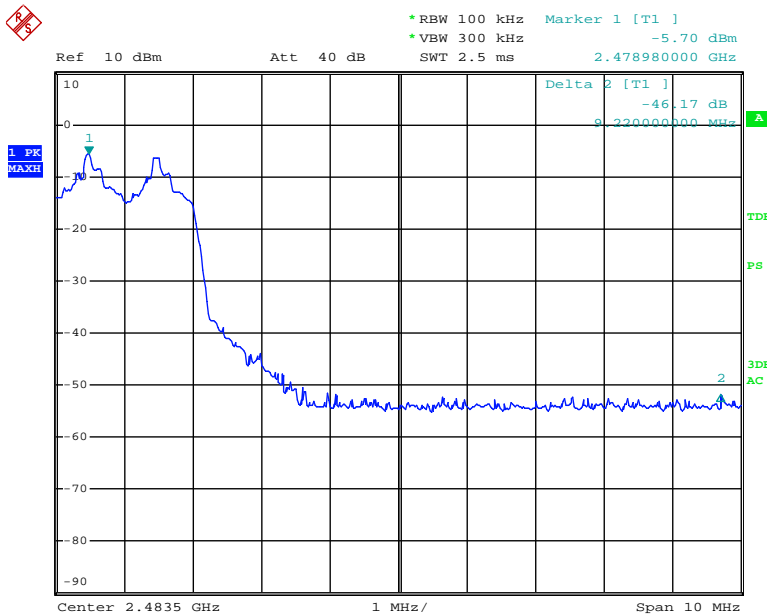


Date: 3.SEP.2014 19:55:32

### 8DPSK Lowest Channel

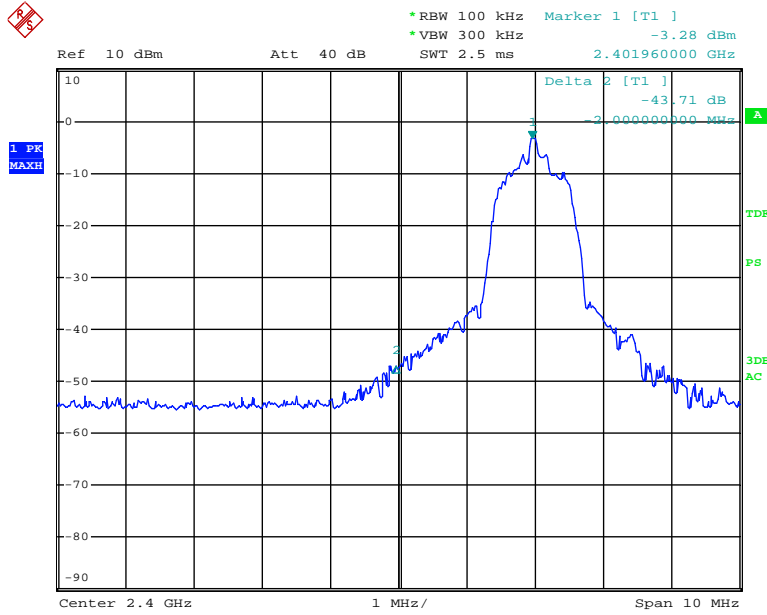


Date: 3.SEP.2014 19:57:41

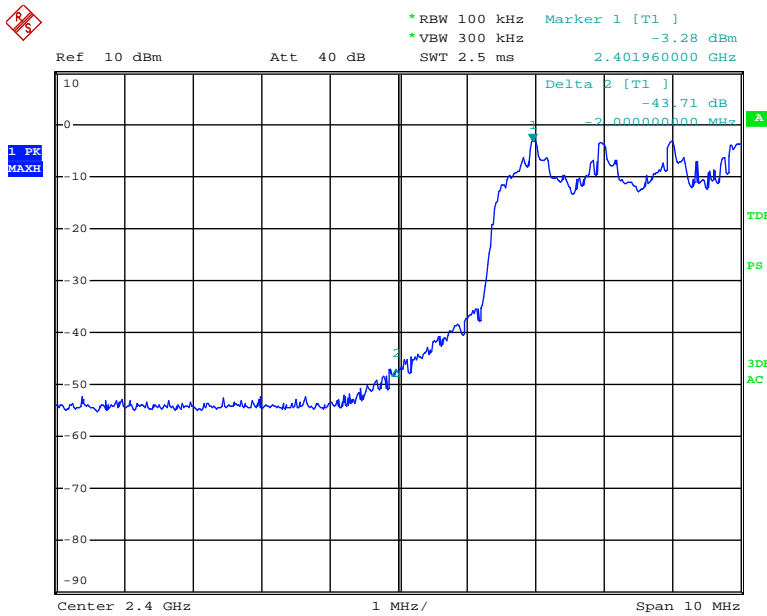


Date: 3.SEP.2014 19:58:17

### 8DPSK Highest Channel

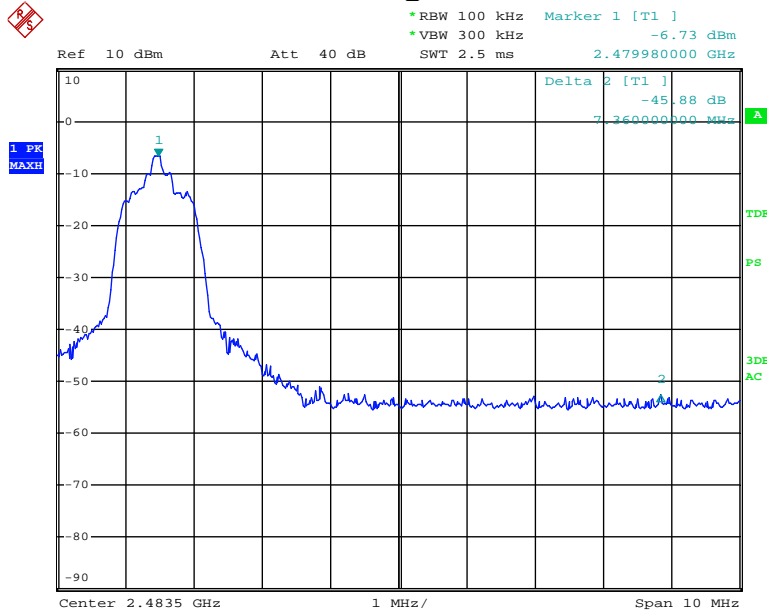

Date: 3.SEP.2014 19:58:33

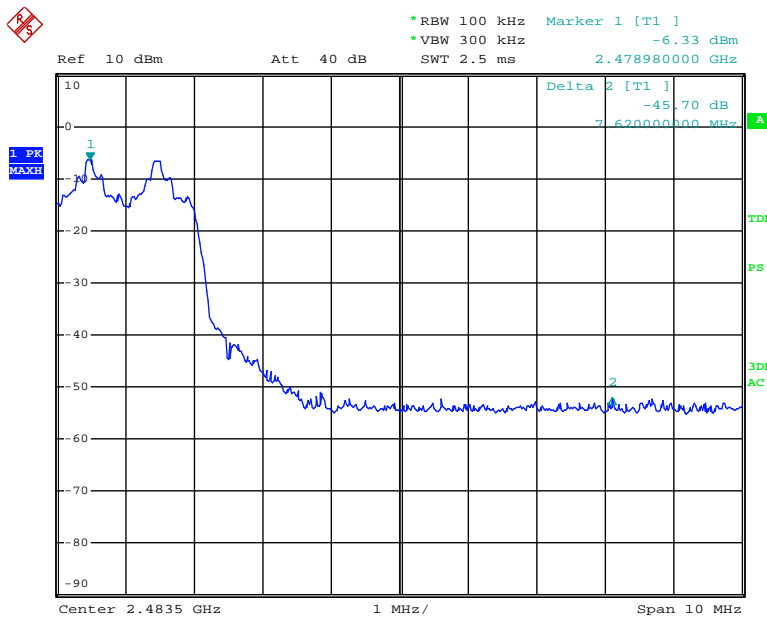

Date: 3.SEP.2014 19:58:50

---

## 11. Antenna Application

### 11.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 11.2 Measurement Results

The antenna is integrated on the main PCB and no consideration of replacement, and the best case gain of the antenna is 0dBi. So, the antenna is consider meet the requirement.

---

## 12. Conducted Spurious Emissions

### 12.1 Measurement Procedure


Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband.

### 12.2. Measurement Results

Please refer to following plots, the worst case (GFSK) was shown.

### Lowest Channel

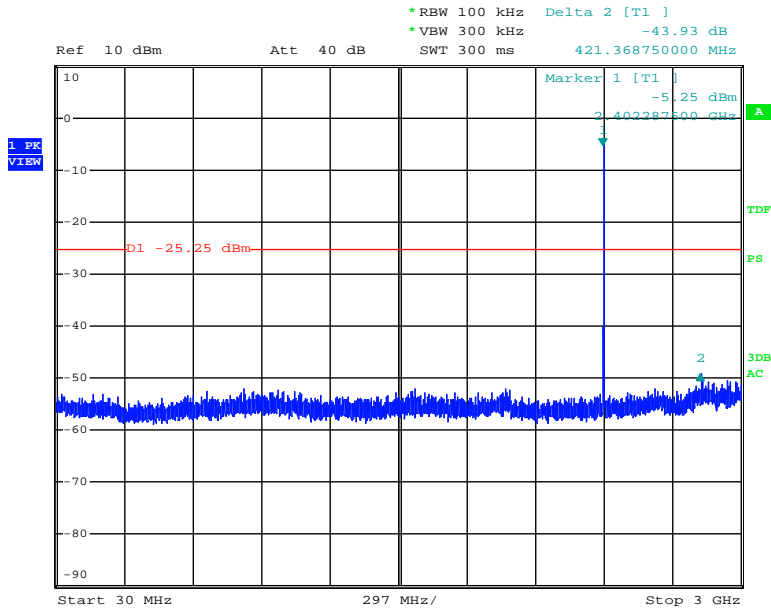

Date: 3.SEP.2014 10:50:26

Agilent 15:37:27 Sep 5, 2014 R T

Ref 1.5 dBm Atten 10 dB Mkr1 3.510 GHz  
 -53.71 dBm

Peak Log 10 dB/ Offst 1.5 dB

DI -25.2 dBm



Marker  
 3.510000000 GHz  
 -53.71 dBm



M1 S2  
 S3 FC  
 AA


Start 3 GHz Stop 7 GHz  
 #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (401 pts)

Peak Search  
 Meas Tools  
 Next Peak  
 Next Pk Right  
 Next Pk Left  
 Min Search  
 Pk-Pk Search  
 More 1 of 2




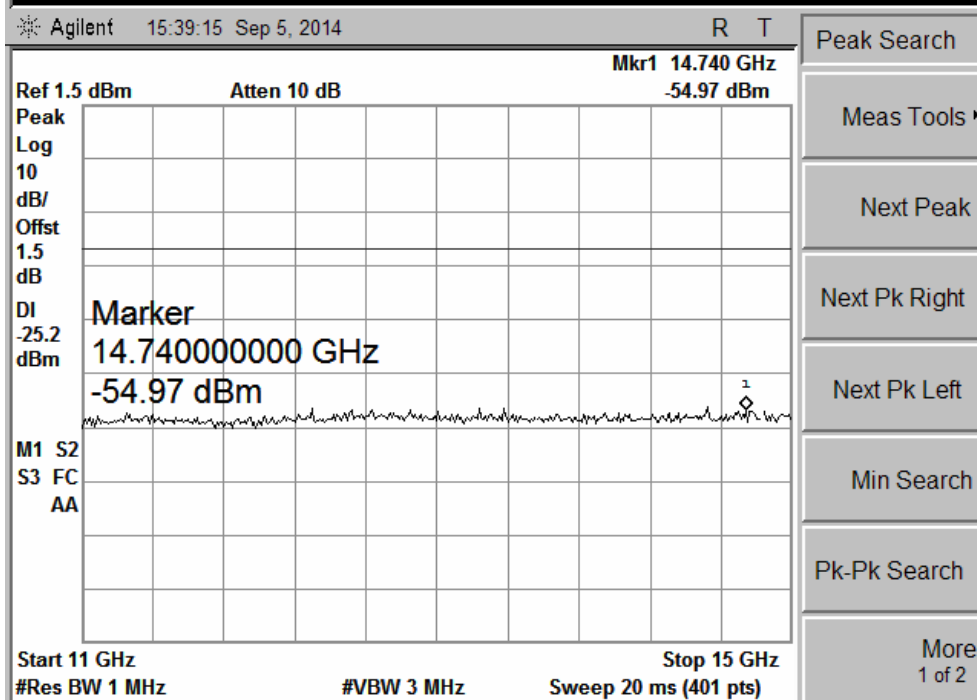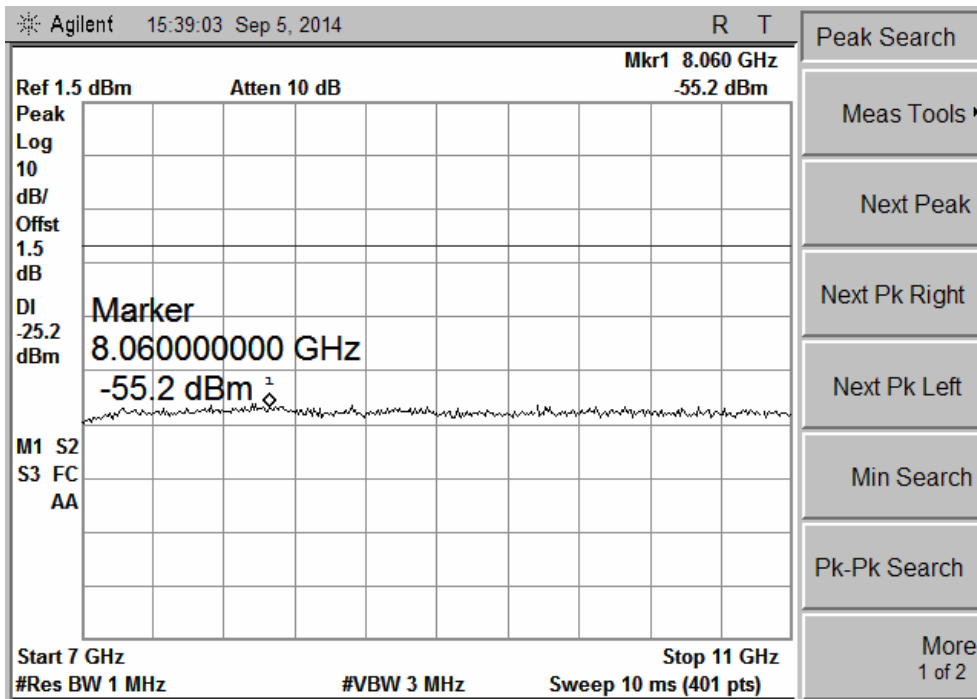

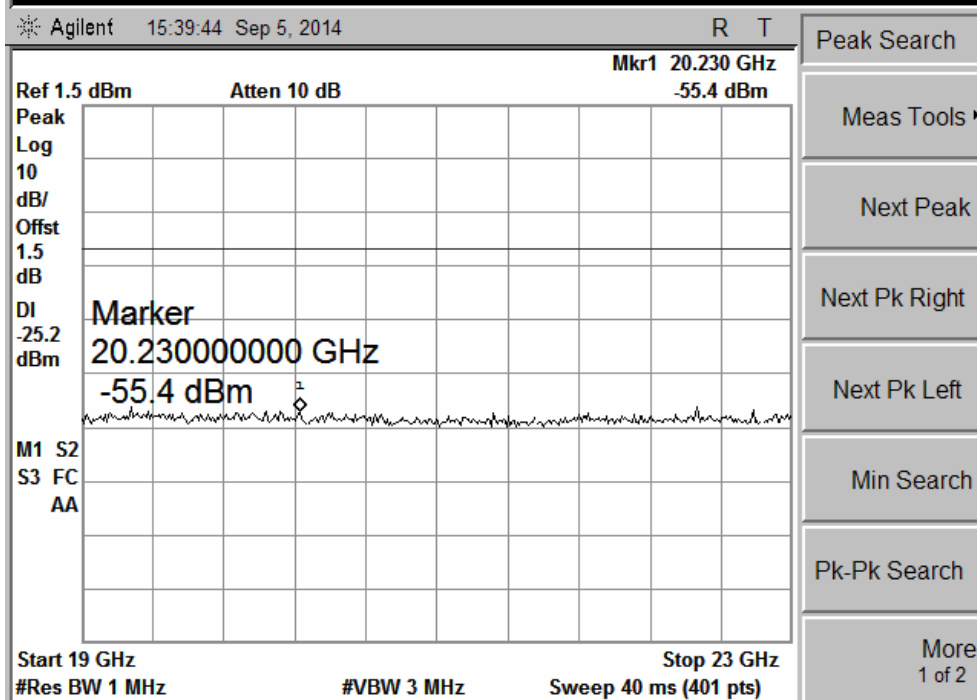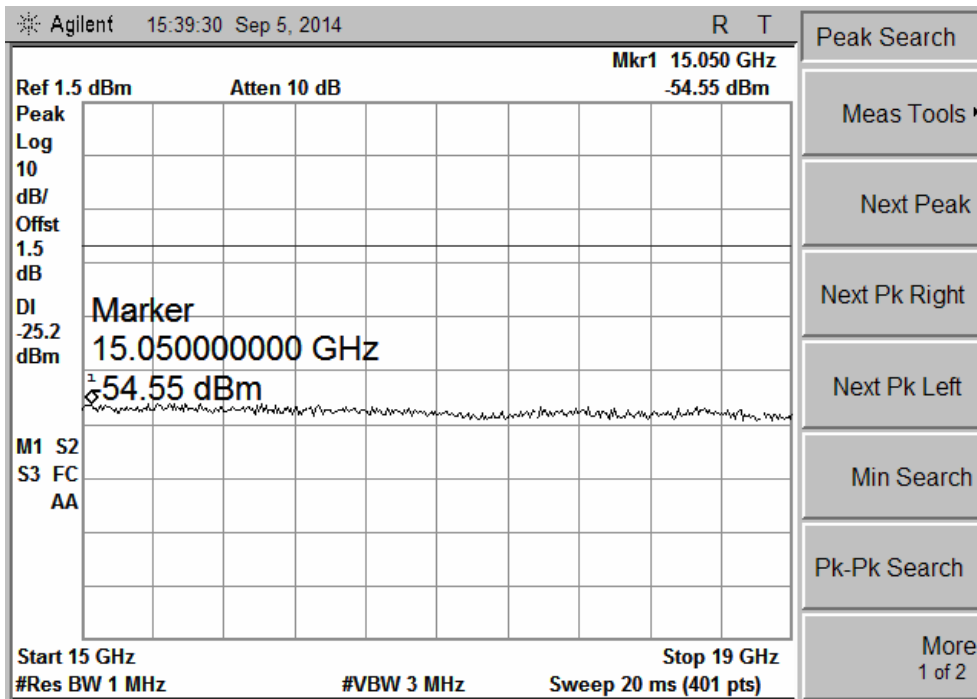

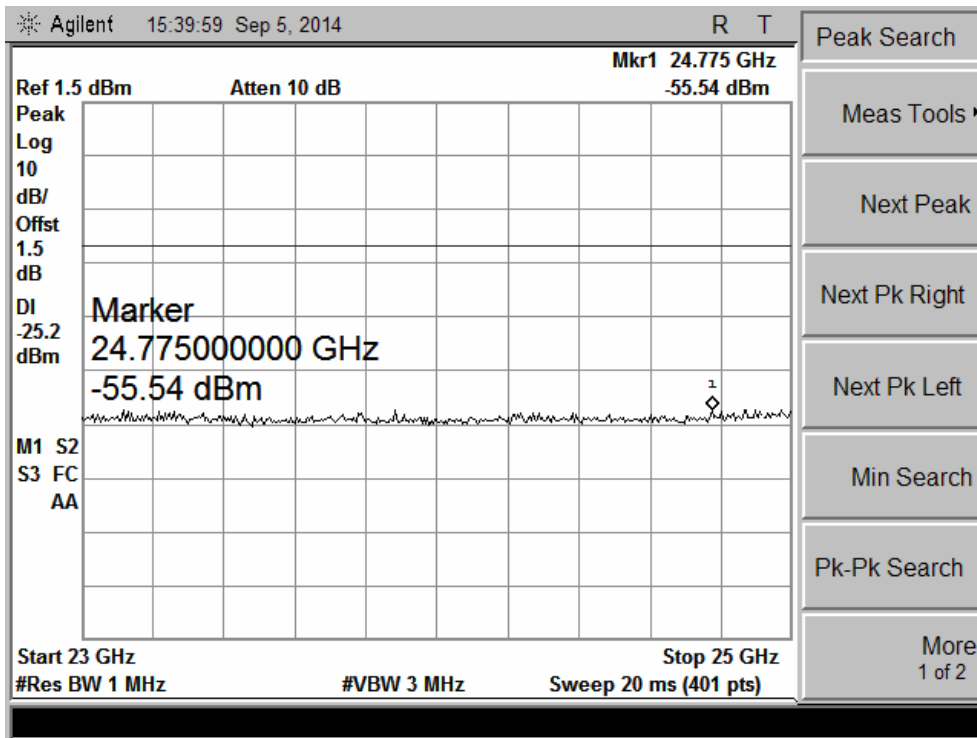

### Middle Channel

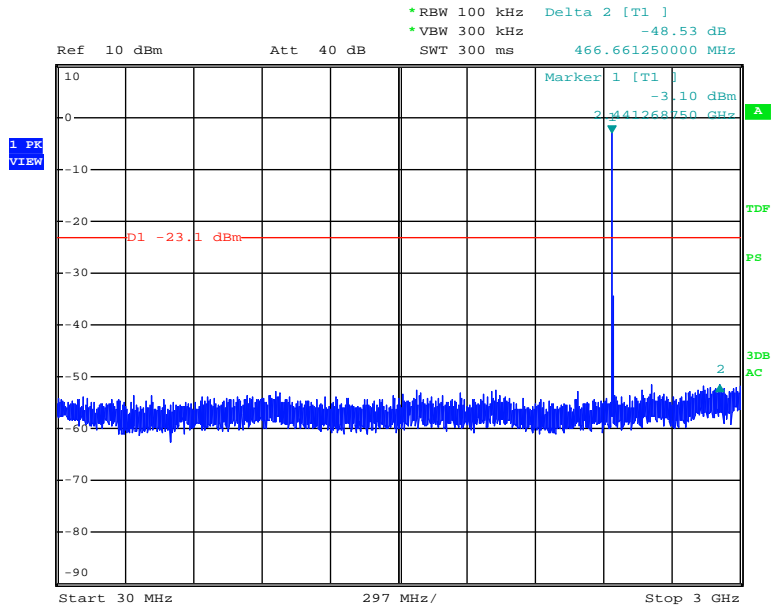

Date: 3.SEP.2014 10:51:08

Agilent 15:40:24 Sep 5, 2014 R T

Ref 1.5 dBm Atten 10 dB Mkr1 3.140 GHz -55.23 dBm

Peak Log 10 dB/ Offst 1.5 dB



DI -23.1 dBm



Marker 3.140000000 GHz -55.23 dBm


M1 S2 S3 FC AA

Start 3 GHz Stop 7 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (401 pts)


Peak Search  
 Meas Tools ▾  
 Next Peak  
 Next Pk Right  
 Next Pk Left  
 Min Search  
 Pk-Pk Search  
 More 1 of 2

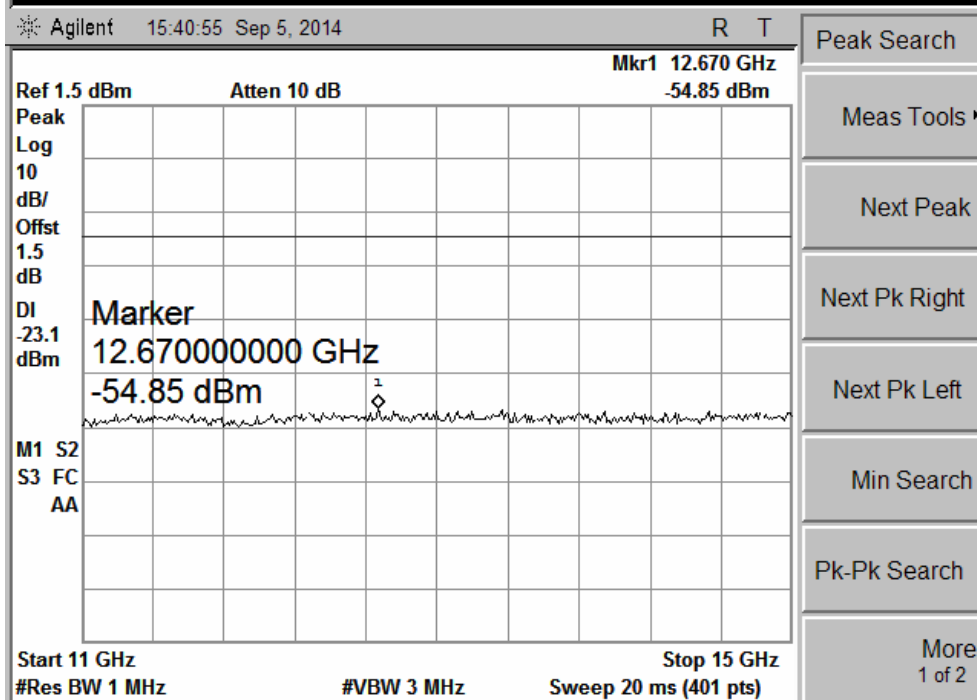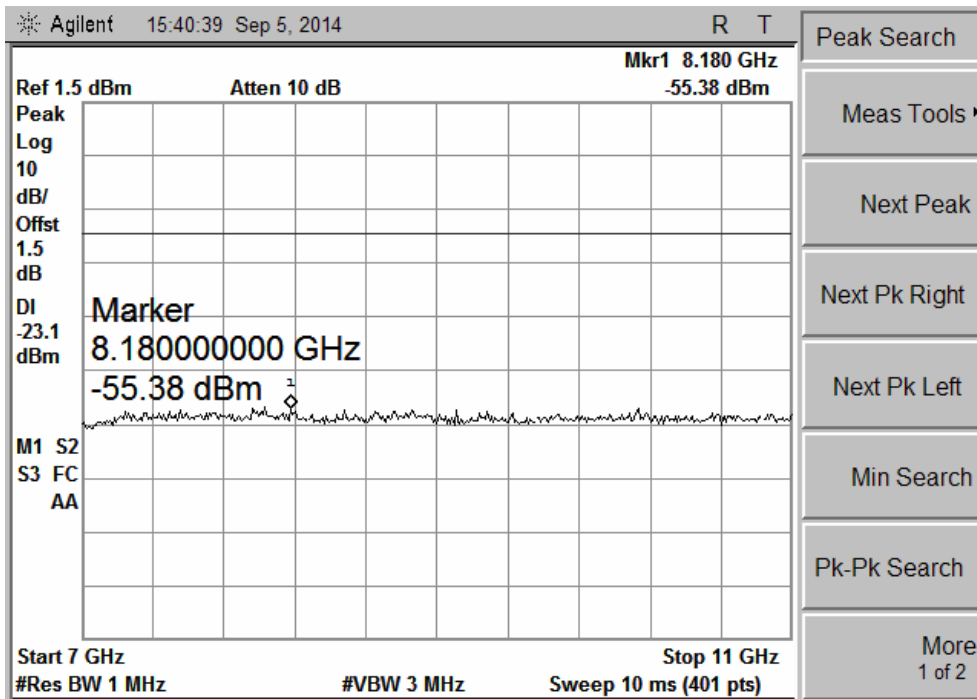

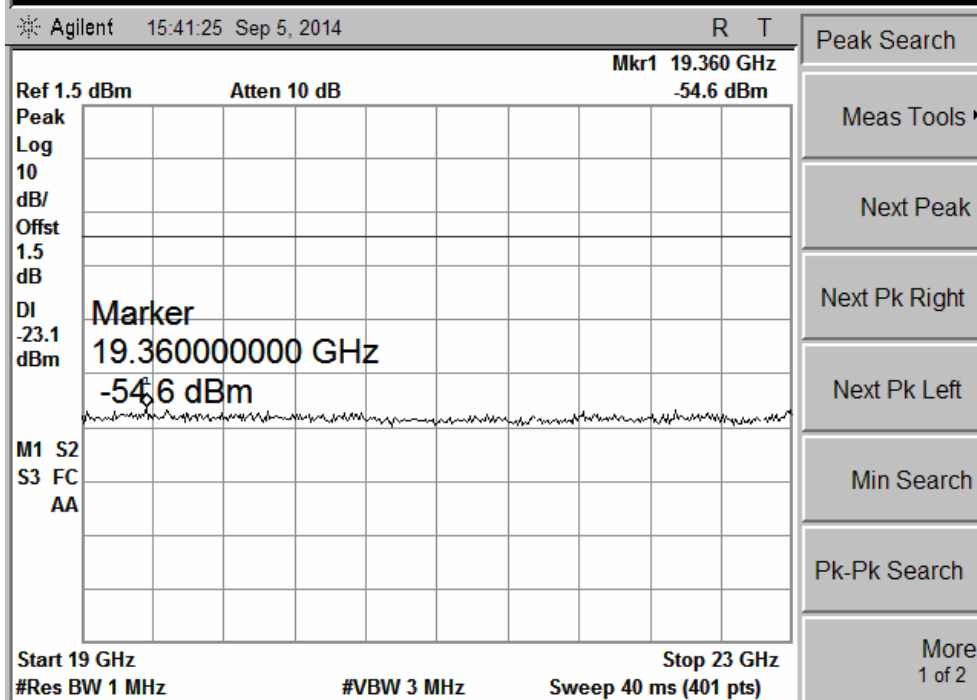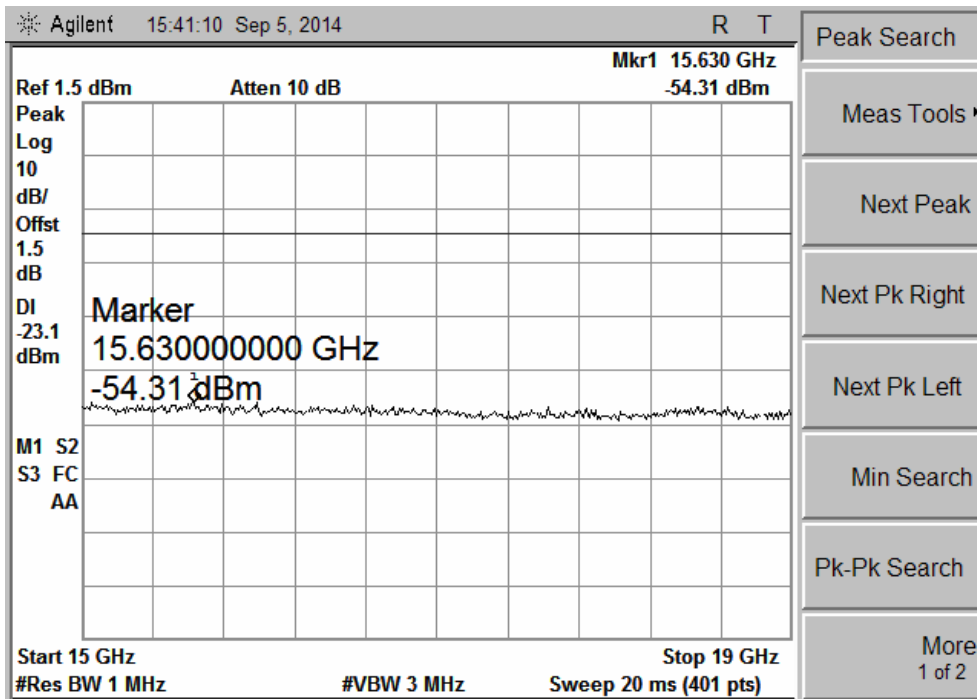

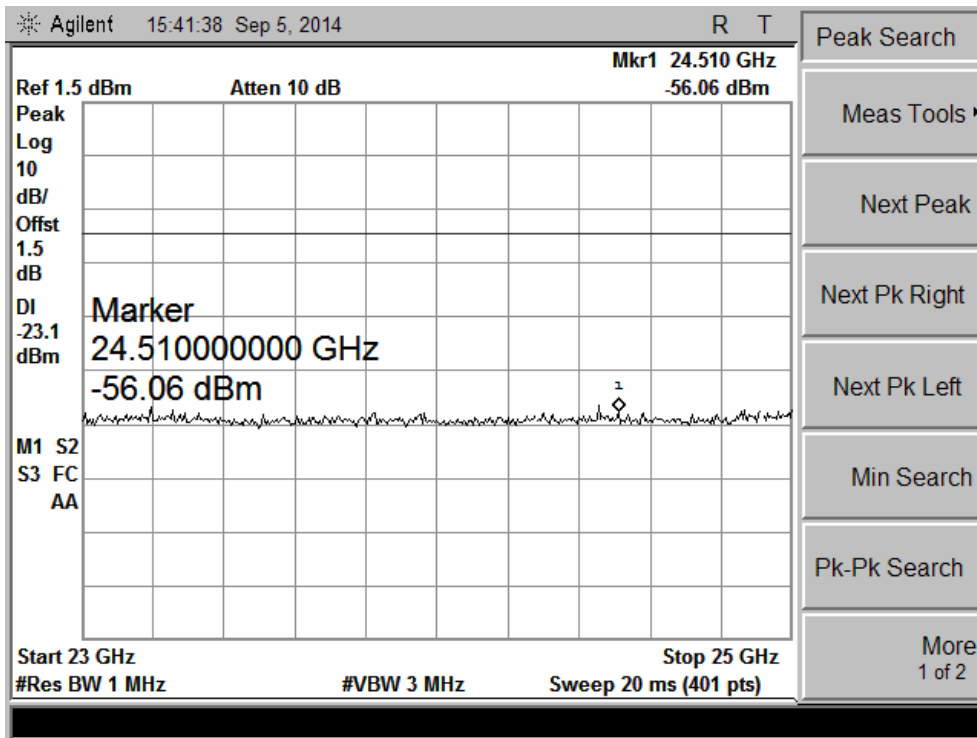

### Highest Channel

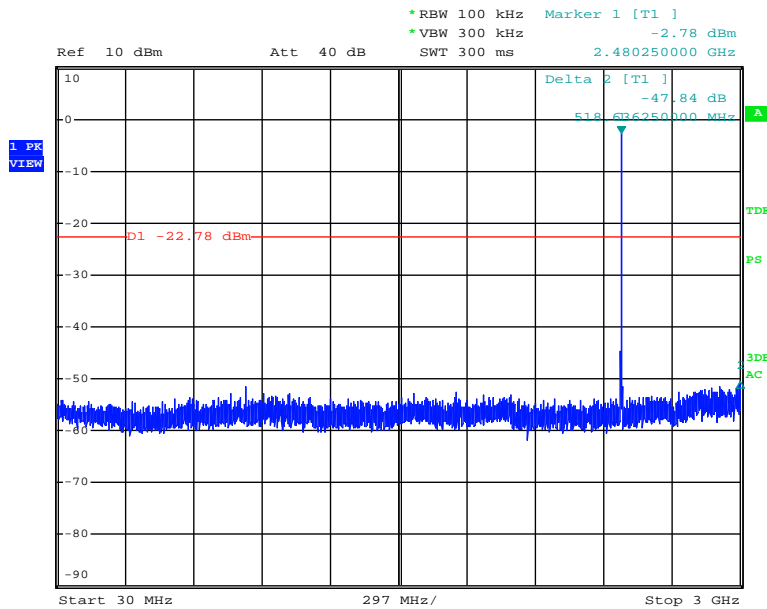

Date: 3.SEP.2014 10:51:52

Agilent 15:42:00 Sep 5, 2014 R T

Ref 1.5 dBm Atten 10 dB Mkr1 3.000 GHz  
 -55.65 dBm

Peak Log 10 dB/ Offst 1.5 dB  
 DI -22.8 dBm  
 Marker 3.000000000 GHz  
 -55.65 dBm

M1 S2  
 S3 FC  
 AA

Start 3 GHz Stop 7 GHz  
 #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (401 pts)

Peak Search

Meas Tools ▾

Next Peak

Next Pk Right



Next Pk Left



Min Search


Pk-Pk Search

More 1 of 2



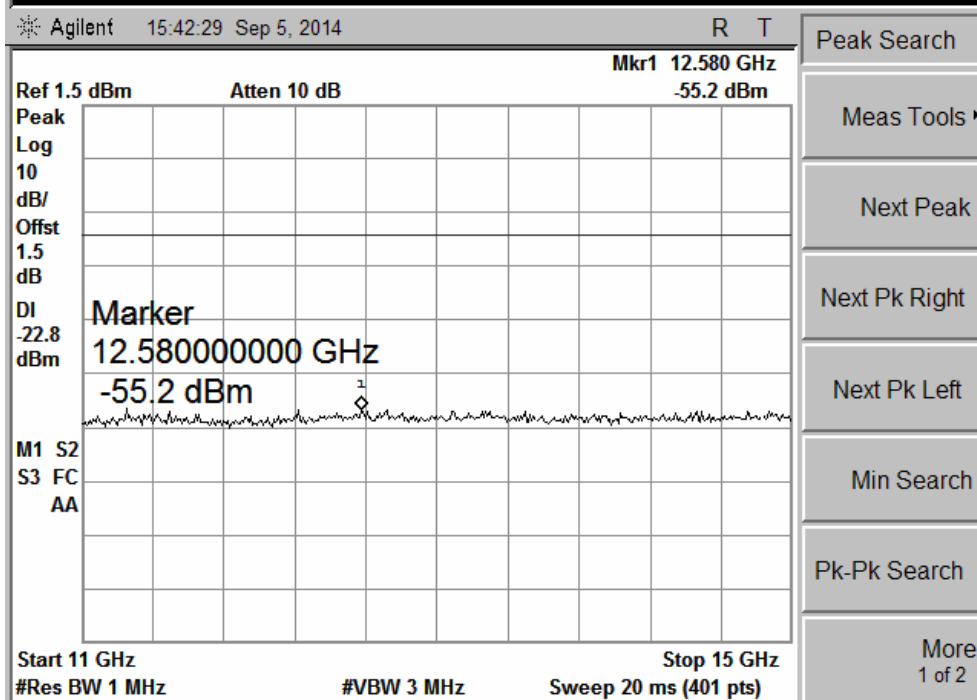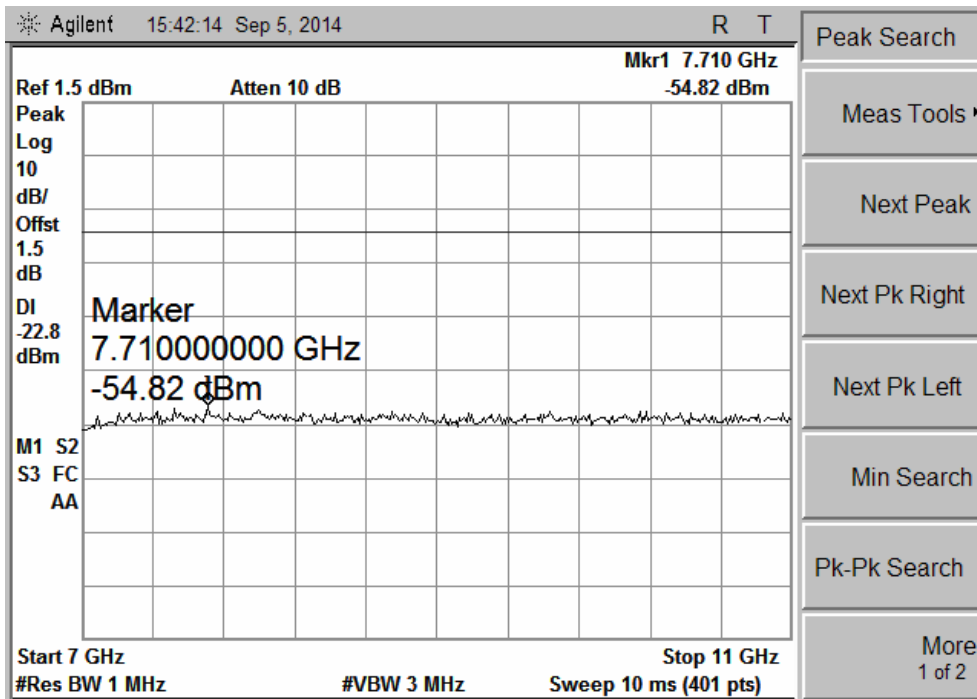

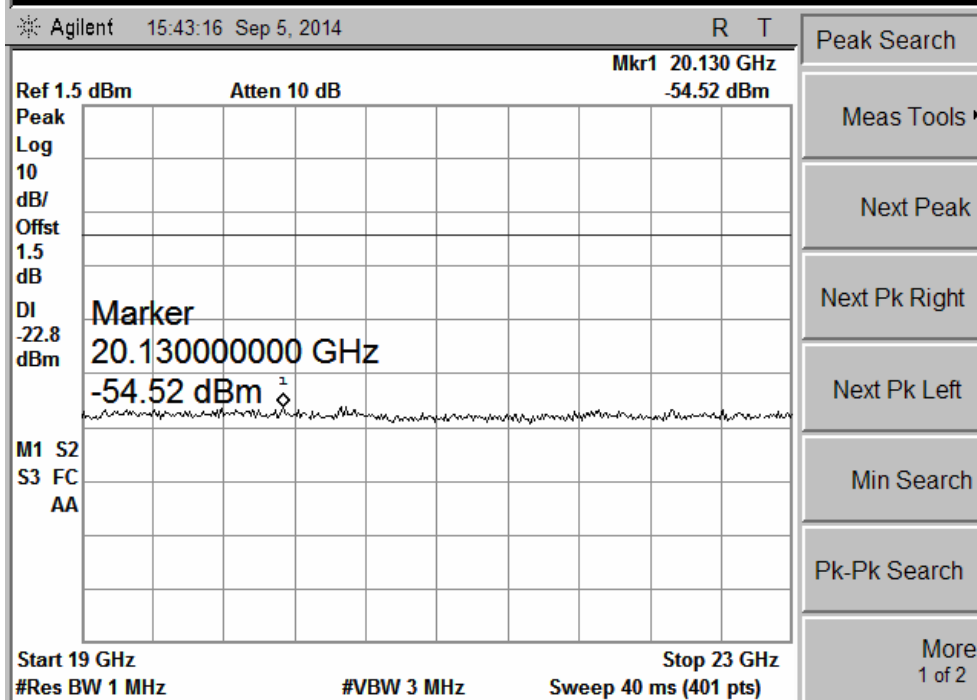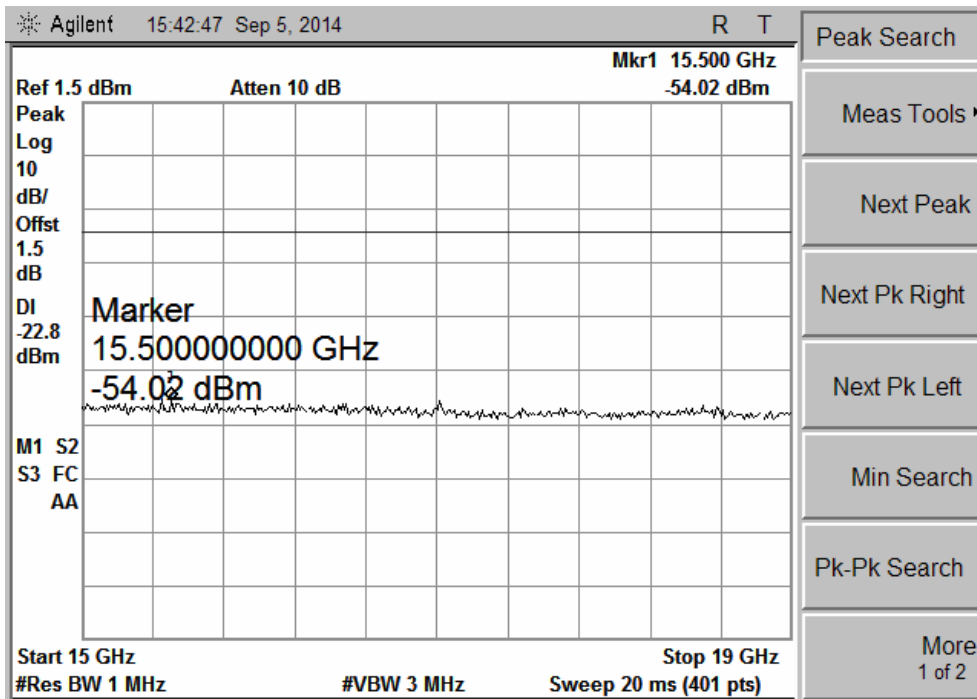

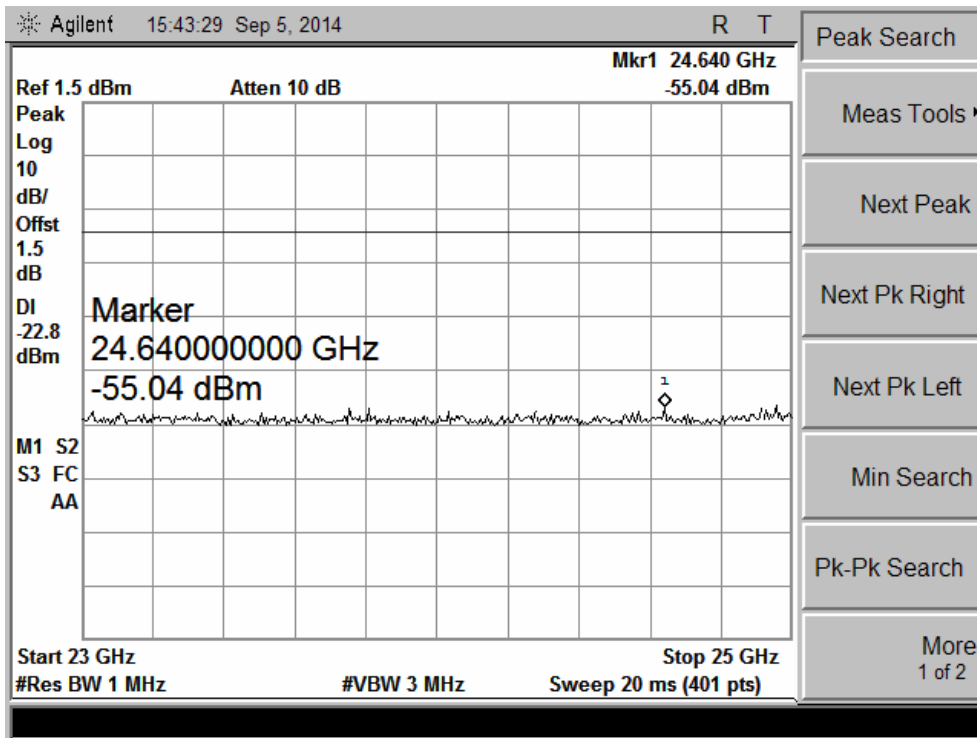

### 13. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Nov. 25, 2013	Nov. 24, 2014
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Nov. 28, 2013	Nov. 27, 2014
Positioning Controller	UC	UC 3000	N/A	0~360° , 1-4m	N/A	N/A
Color Monitor	SUNSP0	SP-140A	N/A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	32A	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	200A	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	200A	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Nov. 09, 2013	Nov. 08, 2014
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Nov. 09, 2013	Nov. 08, 2014
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Nov. 09, 2013	Nov. 08, 2014
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	15GHz~26.5GHz	Oct.24, 2013	Oct.23, 2014
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Nov. 07, 2013	Nov. 06, 2014
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Oct.11, 2013	Oct.10, 2014
Spectrum Analyzer	Agilent	E4408B	MY414407D	9KHz~26.5GHz	Nov. 05, 2013	Nov. 04, 2014
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Nov. 05, 2013	Nov. 04, 2014
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Nov. 09, 2013	Nov. 08, 2014

---End of report---