

FCC TEST REPORT

For

Shenzhen L&Y Aduio Co., LTD

Bluetooth Speaker 4.0

Test Model: SURVIVOR

Prepared for : Shenzhen L&Y Aduio Co., LTD
Address : No.2 Bldg, No.2 Industrial Zone, Tong Fu YuIndustrial,Tang Xia Yong, Songgang,Bao'an District, Shenzhen, Guangdong, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : November 07, 2015
Number of tested samples : 1
Sample number : Prototype
Date of Test : November 07, 2015 - December 04, 2015
Date of Report : December 04, 2015

FCC TEST REPORT

FCC CFR 47 PART 15 C(15.247): 2014

Report Reference No. : **LCS1511262272E**

Date of Issue : December 04, 2015

Testing Laboratory Name : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards
 Partial application of Harmonised standards
 Other standard testing method

Applicant's Name..... : **Shenzhen L&Y Aduio Co., LTD**

Address : No.2 Bldg, No.2 Industrial Zone, Tong Fu YuIndustrial,Tang Xia Yong, Songgang,Bao'an District, Shenzhen, Guangdong, China

Test Specification

Standard : FCC CFR 47 PART 15 C(15.247): 2014 / ANSI C63.10: 2013

Test Report Form No...... : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : **Bluetooth Speaker 4.0**

Trade Mark : DREAMWAVE

Test Model..... : SURVIVOR

Ratings : DC 11.1 V by LiPo Battery(12000mAh)
 Power Supply: Input: 100-240v, 50/60Hz, 1.2A
 Output: DC 15V, 2.4A

Result : **Positive**


Compiled by:



Supervised by:



Approved by:



Ada Liang/ File administrators

Glin Lu/ Technique principal

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS1511262272E	<u>December 04, 2015</u> Date of issue
---	---

Test Model.....	: SURVIVOR
EUT.....	: Bluetooth Speaker 4.0
Applicant..... : Shenzhen L&Y Aduio Co., LTD	
Address.....	: No.2 Bldg, No.2 Industrial Zone, Tong Fu YuIndustrial,Tang Xia Yong, Songgang,Bao'an District, Shenzhen, Guangdong, China
Telephone.....	: /
Fax.....	: /
Manufacturer..... : Shenzhen L&Y Aduio Co., LTD	
Address.....	: No.2 Bldg, No.2 Industrial Zone, Tong Fu YuIndustrial,Tang Xia Yong, Songgang,Bao'an District, Shenzhen, Guangdong, China
Telephone.....	: /
Fax.....	: /
Factory..... : Shenzhen L&Y Aduio Co., LTD	
Address.....	: No.2 Bldg, No.2 Industrial Zone, Tong Fu YuIndustrial,Tang Xia Yong, Songgang,Bao'an District, Shenzhen, Guangdong, China
Telephone.....	: /
Fax.....	: /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1. DESCRIPTION OF DEVICE (EUT)	5
1.2. SUPPORT EQUIPMENT LIST	6
1.3. EXTERNAL I/O	6
1.4. DESCRIPTION OF TEST FACILITY	6
1.5. LIST OF MEASURING EQUIPMENTS	7
1.6. STATEMENT OF THE MEASUREMENT UNCERTAINTY	7
1.7. MEASUREMENT UNCERTAINTY	8
1.8. DESCRIPTION OF TEST MODES	8
2. TEST METHODOLOGY	9
2.1. EUT CONFIGURATION	9
2.2. EUT EXERCISE	9
2.3. GENERAL TEST PROCEDURES	9
3. SYSTEM TEST CONFIGURATION	10
3.1. JUSTIFICATION	10
3.2. EUT EXERCISE SOFTWARE	10
3.3. SPECIAL ACCESSORIES	10
3.4. BLOCK DIAGRAM/SCHEMATICS	10
3.5. EQUIPMENT MODIFICATIONS	10
3.6. TEST SETUP	10
4. SUMMARY OF TEST RESULTS.....	11
5. TEST RESULT	12
5.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	12
5.2. POWER SPECTRAL DENSITY MEASUREMENT	13
5.3. 6 DB SPECTRUM BANDWIDTH MEASUREMENT	16
5.4. RADIATED EMISSIONS MEASUREMENT	19
5.5. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST	30
5.6. POWER LINE CONDUCTED EMISSIONS	34
5.7. ANTENNA REQUIREMENTS	37

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: Bluetooth Speaker 4.0
Test Model	: SURVIVOR
Hardware Version	: LB-288-C
Software Version	: LB-288
Power Supply	: DC 11.1 V by LiPo Battery(12000mAh) Power Supply: Input: 100-240v, 50/60Hz, 1.2A Output: DC 15V, 2.4A
Frequency Range	: 2402.00-2480.00MHz
Channel Spacing	: 1MHz for Bluetooth V3.0 (DSS) 2MHz for Bluetooth V4.0 (DTS)
Channel Number	: 79 channels for Bluetooth V3.0 (DSS) 40 channels for Bluetooth V4.0 (DTS)
Modulation Type	: GFSK, Pi/4-DQPSK, 8-DPSK for Bluetooth V3.0 (DSS) GFSK for Bluetooth V4.0 (DTS)
Bluetooth Version	: This report is only for V4.0 BLE part only. For V3.0 part, please see another separate report.
Antenna Description	: PCB Antenna, 1.84dBi(Max.)

1.2. Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
SURVIVOR	Power Supply	BI36-150240-I	--	--

1.3. External I/O

I/O Port Description	Quantity	Cable
DC OUT Port	2	N/A
CHARGE Interface	1	N/A
LINE IN	1	1.0m

1.4. Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

VCCI Registration Number. is C-4260 and R-3804.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

1.5. List Of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	June 18,2015	June 17,2016
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz~40GHz	July 16,2015	July 15,2016
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 18,2015	June 17,2016
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 18,2015	June 17,2016
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 18,2015	June 17,2016
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 18,2015	June 17,2016
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-1GHz 3m	June 18,2015	June 17,2016
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	June 18,2015	June 17,2016
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16,2015	July 15,2016
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16,2015	July 15,2016
Spectrum Analyzer	Agilent	E4407B	MY41440292	9k-26.5GHz	July 16,2015	July 15,2016
MAX Signal Analyzer	Agilent	N9020A	MY50510140	20Hz~26.5GHz	Oct. 27, 2015	Oct. 26, 2016
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18,2015	June 17,2016
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	June 10,2015	June 09,2016
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 10,2015	June 09,2016
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	June 10,2015	June 09,2016
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18,2015	June 17,2016
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18,2015	June 17,2016
Spectrum Meter	R&S	FSP 30	100023	9kHz-30GHz	July 16,2015	July 15,2016
Power Meter	R&S	NRVS	100444	DC-40GHz	June 18,2015	June 17,2016
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 18,2015	June 17,2016
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 18,2015	June 17,2016
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18,2015	June 17,2016
RF CABLE-2m	JYE Bao	RG142	CB035-2m	20MHz-1GHz	June 18,2015	June 17,2016
EMI Test Software	AUDIX	E3	/	/	June 18,2015	June 17,2016

Note: All equipment through GRGTEST calibration

1.6. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.7. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.8. Description Of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. The EUT was set to transmit at 100% duty cycle. The following operating modes were applied for the related test items. All test modes were tested, only the result of the worst case was recorded in the report.

Mode of Operations	Frequency Range (MHz)	Data Rate (Mbps)
GFSK	2402	1
	2440	1
	2480	1
For Conducted Emission		
Test Mode		TX Mode
For Radiated Emission		
Test Mode		TX Mode

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, that was determined to be TX-Low Channel(2402MHz, GFSK).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX-Low Channel(2402MHz, GFSK).

***Note: Using a temporary antenna connector for the EUT when the conducted measurements are performed.

For pre-testing, when performed with LiPo Battery Charger, the input Voltage/Frequency AC 120V/60Hz and AC 240V/60Hz were used. Only recorded the worst case in this report.

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB558074 D01 DTS Meas Guidance v03r03 is required to be used for this kind of FCC 15.247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmit condition.

3.2. EUT Exercise Software

N/A

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.209, §15.247(d)	Radiated and Conducted Spurious Emissions	Compliant
§15.205	Emissions at Restricted Band	Compliant
§15.207(a)	Line Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant

5. TEST RESULT

5.1. Maximum Conducted Output Power Measurement


5.1.1. Standard Applicable

According to § 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt.

5.1.2. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

5.1.3. Test Setup Layout

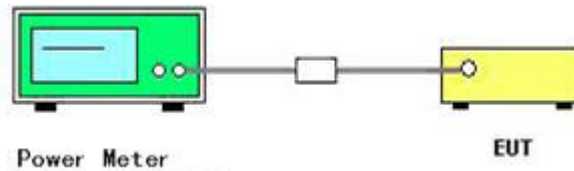

5.1.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.5. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Output Power (dBm, Average)	Output Power (mW)	Limit (mW)	Result
GFSK	2402	1.73	1.49	1000	Pass
	2440	1.51	1.42	1000	Pass
	2480	1.43	1.39	1000	Pass

5.2. Power Spectral Density Measurement


5.2.1. Standard Applicable

According to §15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2.2. Test Procedures

- 1) The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
- 2) The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
- 3) Set the RBW = 3 kHz.
- 4) Set the VBW $\geq 3 \times$ RBW
- 5) Set the span to 1.5 times the DTS channel bandwidth.
- 6) Detector = peak.
- 7) Sweep time = auto couple.
- 8) Trace mode = max hold.
- 9) Allow trace to fully stabilize.
- 10) Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

5.2.3. Test Setup Layout

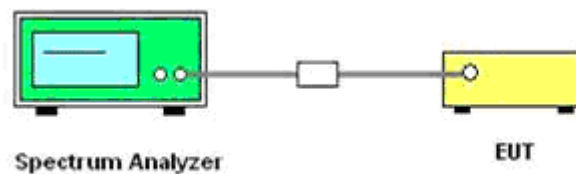

5.2.4. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

5.2.5. Test Result of Power Spectral Density

Modulation	Frequency (MHz)	Reading Level (dBm/3KHz)	Max. Limit (dBm/3KHz)	Result
GFSK	2402	-7.373	8	Pass
	2440	-6.958	8	Pass
	2480	-7.003	8	Pass

The test data refer to the following page.


Low Channel, 2402MHz

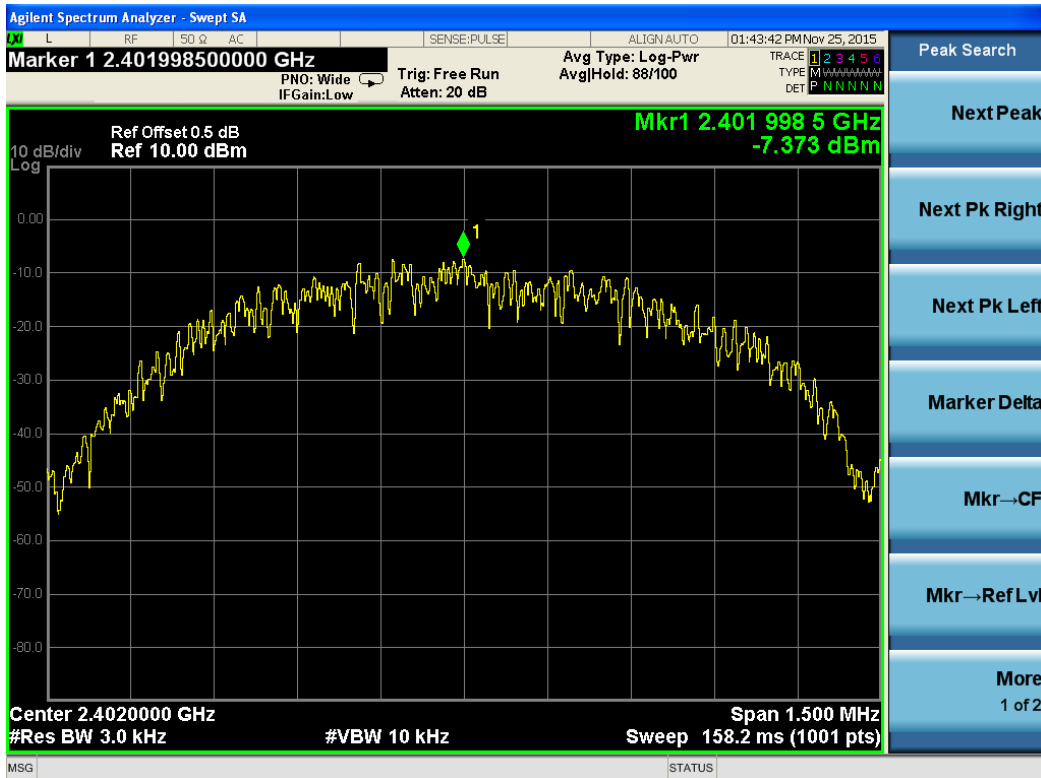

Middle Channel, 2440MHz



High Channel, 2480MHz

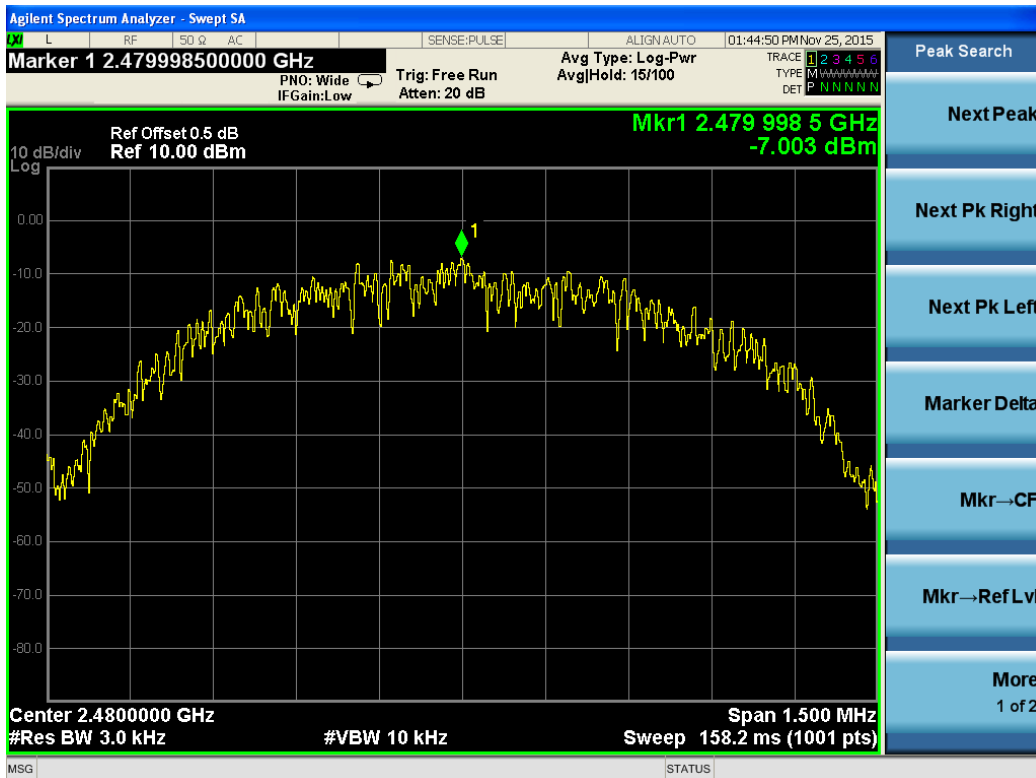

5.3. 6 dB Spectrum Bandwidth Measurement

5.3.1. Standard Applicable

According to §15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.3.2. Instruments Setting

The following table is the setting of the Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	100ms

5.3.3. Test Procedures

1) The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.


2) Set RBW/VBW = 100KHz/300KHz (for 6dB bandwidth measurement)

Set RBW = 1%~5% OBW; $VBW \geq 3 * RBW$ (for occupied bandwidth measurement)

3) Measured the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

4) Measured the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.

5.3.4. Test Setup Layout

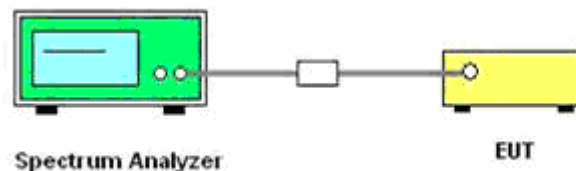

5.3.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

5.3.6. Test Result of Spectrum Bandwidth


Modulation	Frequency (MHz)	6dB Bandwidth (KHz)	Min. Limit (KHz)	Result
GFSK	2402	696.3	500	Complies
	2440	698.0	500	Complies
	2480	690.9	500	Complies

Test Plots For 6dB Bandwidth:


Low Channel, 2402MHz

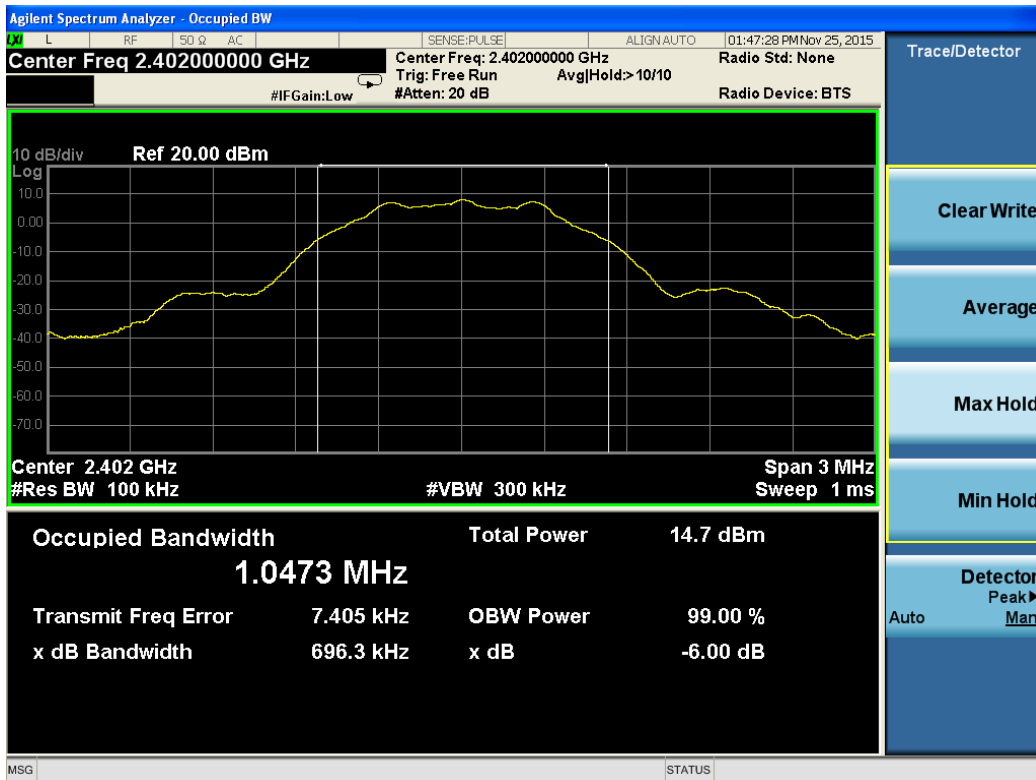

Middle Channel, 2440MHz

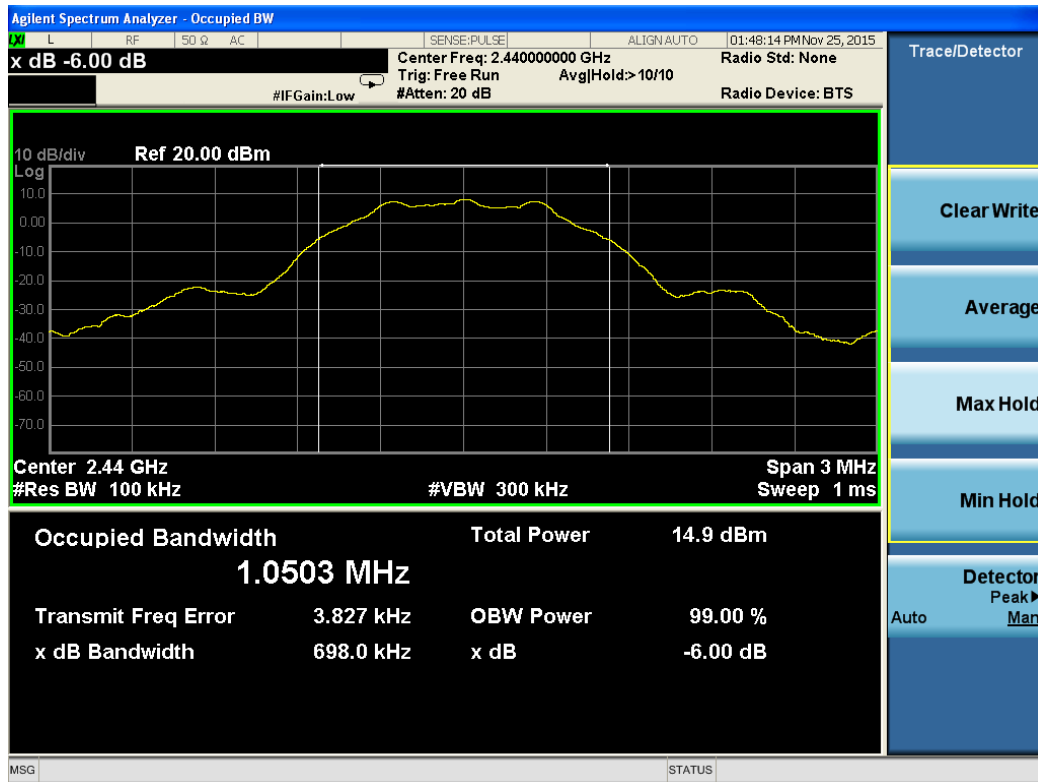

High Channel, 2480MHz

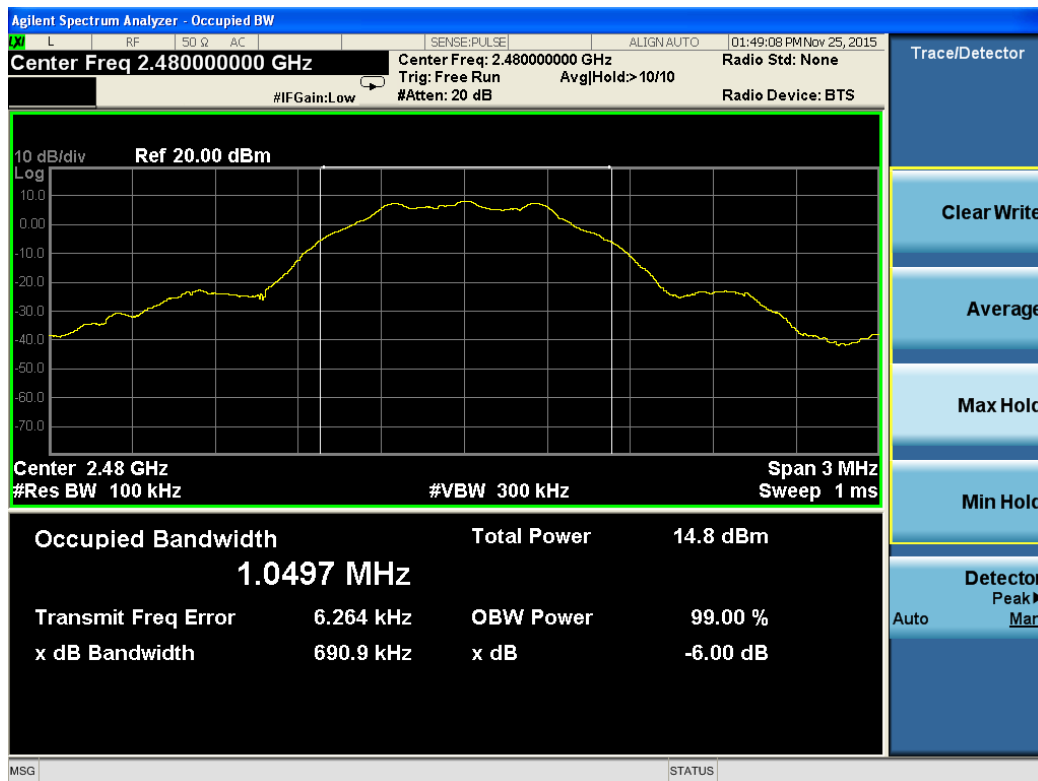

5.4. Radiated Emissions Measurement

5.4.1. Standard Applicable

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies(MHz)	Field Strength(microvolts/meter)	Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

5.4.2. Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

5.4.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0 ° to 360 °) and by rotating the elevation axes (0 ° to 360 °).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarisations of the antenna.


Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


5.4.4. Test Setup Layout

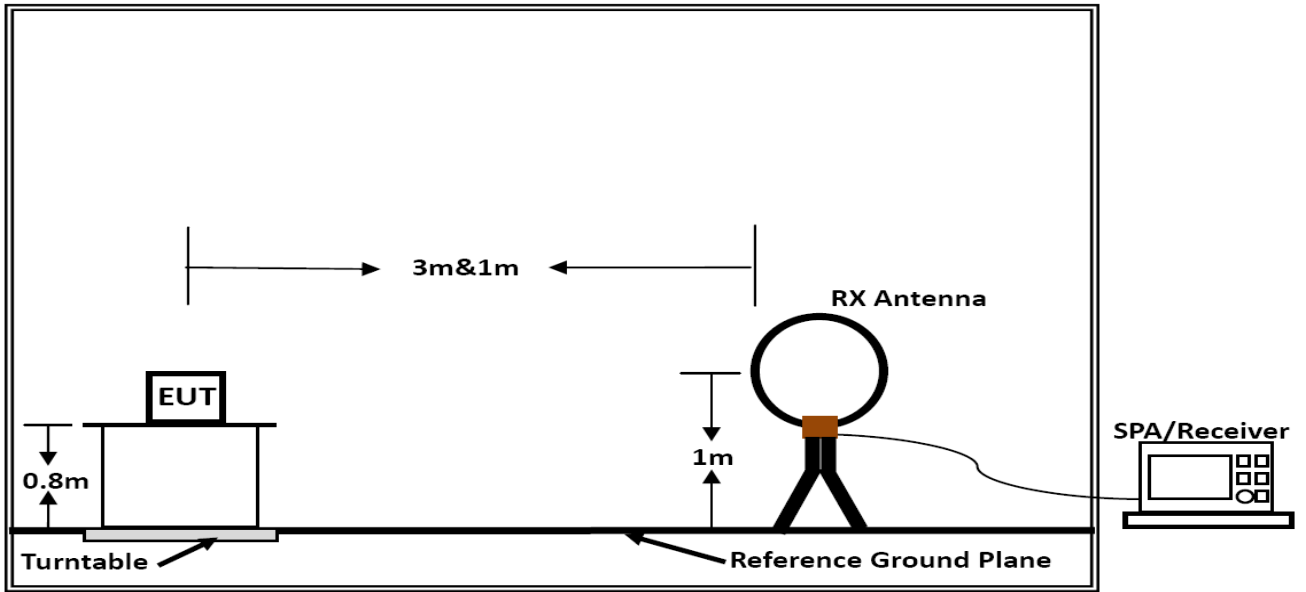

Below 30MHz

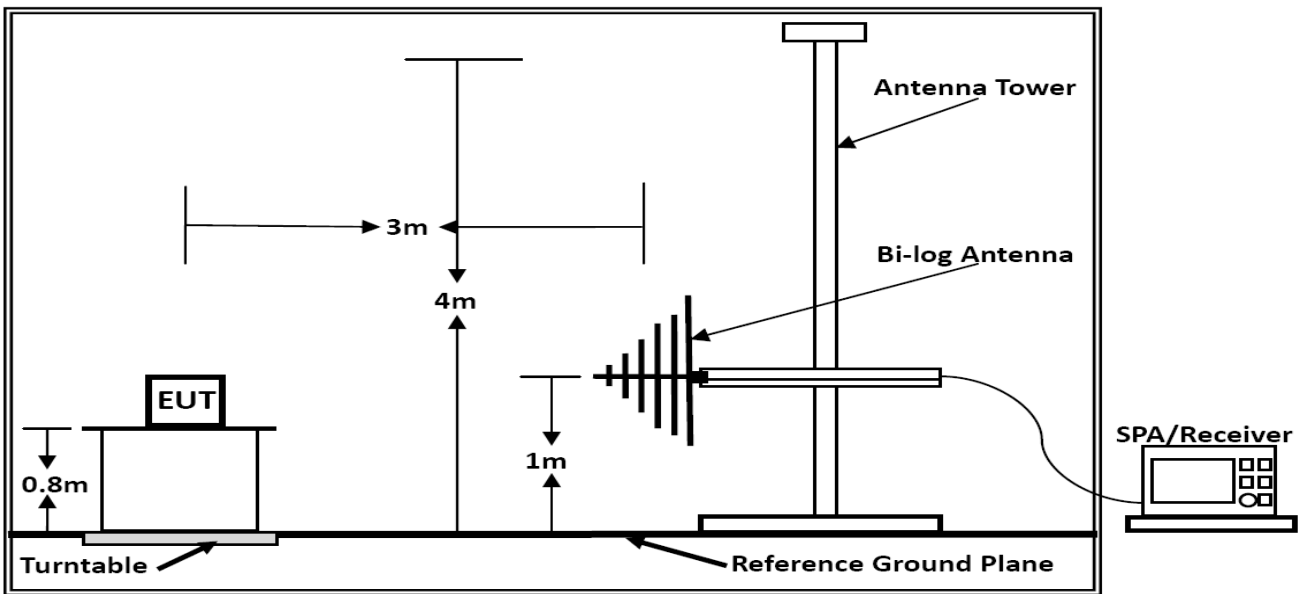

Below 1GHz

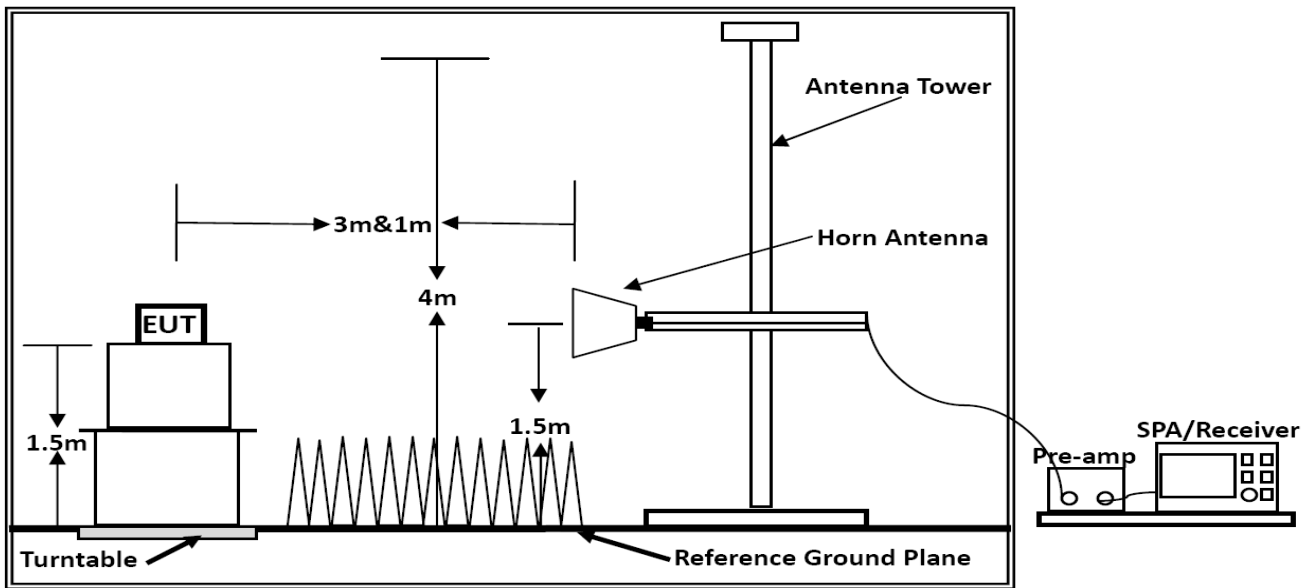

Above 1GHz

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	60%
Test Engineer	Aking	Configurations	BLE V4.0

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:


The radiated emissions from 9kHz to 30MHz are at least 20dB below the official limit and no need to report.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.4.7. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	60%
Test Engineer	Aking	Configurations	TX-Low Channel

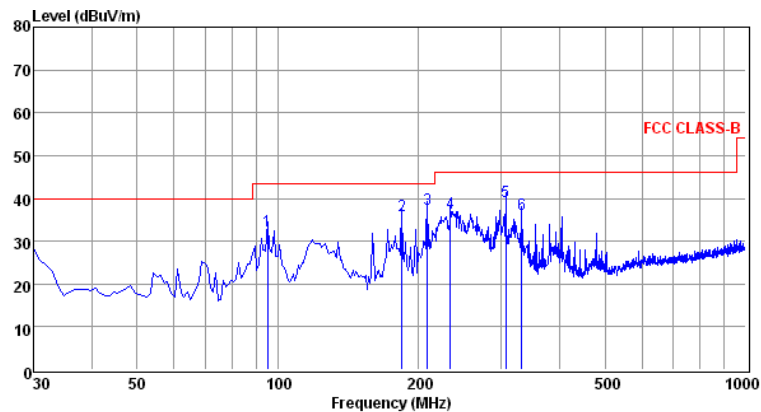

Env./Ins: 24°C/56%
 EUT: Bluetooth Speaker 4.0
 M/N: SURVIVOR
 Power Rating: AC 120V/60Hz
 Test Mode: TX-Low Channel (GFSK)
 Operator: AKING
 Memo: BLE
 pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	94.99	18.95	0.58	12.84	32.37	43.50	-11.13	QP
2	184.23	25.14	0.70	10.05	35.89	43.50	-7.61	QP
3	208.48	25.67	0.86	10.84	37.37	43.50	-6.13	QP
4	233.70	23.82	0.87	11.81	36.50	46.00	-9.50	QP
5	307.42	25.04	1.05	13.16	39.25	46.00	-6.75	QP
6	331.67	21.27	1.11	13.79	36.17	46.00	-9.83	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

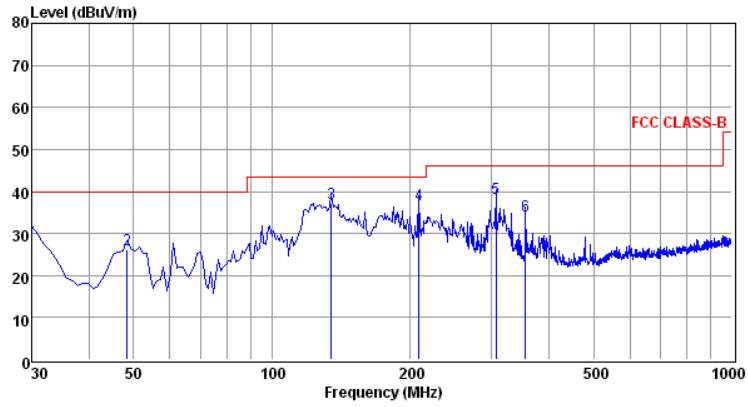

Env./Ins: 24°C/56%
 EUT: Bluetooth Speaker 4.0
 M/N: SURVIVOR
 Power Rating: AC 120V/60Hz
 Test Mode: TX-Low Channel (GFSK)
 Operator: AKING
 Memo: BLE
 pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	30.00	17.12	0.39	12.33	29.84	40.00	-10.16	QP
2	48.43	12.46	0.35	13.34	26.15	40.00	-13.85	QP
3	134.76	27.97	0.74	8.58	37.29	43.50	-6.21	QP
4	208.48	25.23	0.86	10.84	36.93	43.50	-6.57	QP
5	307.42	24.23	1.05	13.16	38.44	46.00	-7.56	QP
6	355.92	18.70	1.18	14.37	34.25	46.00	-11.75	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

Note:

Pre-scan all mode and recorded the worst case results in this report (TX-Low Channel(2402MHz)).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

5.4.8. Results for Radiated Emissions (Above 1GHz)

TX Mode

Channel 1

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4804.14	45.30	33.06	35.04	3.94	47.26	74	-26.74	Peak	Horizontal
4804.17	34.55	33.06	35.04	3.94	36.51	54	-17.49	Average	Horizontal
4804.14	47.03	33.06	35.04	3.94	48.99	74	-25.01	Peak	Vertical
4804.17	35.77	33.06	35.04	3.94	37.73	54	-16.27	Average	Vertical

Channel 20

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4880.22	44.02	33.16	35.15	3.96	45.99	74	-28.01	Peak	Horizontal
4880.25	34.23	33.16	35.15	3.96	36.20	54	-17.80	Average	Horizontal
4880.22	44.19	33.16	35.15	3.96	46.16	74	-27.84	Peak	Vertical
4880.25	37.32	33.16	35.15	3.96	39.29	54	-14.71	Average	Vertical

Channel 40

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.31	43.72	33.26	35.14	3.98	45.82	74	-28.18	Peak	Horizontal
4960.34	33.28	33.26	35.14	3.98	35.38	54	-18.62	Average	Horizontal
4960.31	45.16	33.26	35.14	3.98	47.26	74	-26.74	Peak	Vertical
4960.34	36.45	33.26	35.14	3.98	38.55	54	-15.45	Average	Vertical

Notes:

1. Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.4.9. Results of Band Edges Test (Radiated)

TX Mode

Tx-2402

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2378.37	43.14	32.89	35.16	3.51	44.38	74	-29.62	Peak	Horizontal
2378.40	33.13	32.90	35.16	3.51	34.38	54	-19.62	Average	Horizontal
2390.00	46.82	32.92	35.16	3.54	48.12	74	-25.88	Peak	Horizontal
2389.97	36.76	32.92	35.16	3.54	38.06	54	-15.94	Average	Horizontal
2378.37	42.86	32.89	35.16	3.51	44.10	74	-29.90	Peak	Vertical
2378.40	31.64	32.90	35.16	3.51	32.89	54	-21.11	Average	Vertical
2390.00	46.60	32.92	35.16	3.54	47.90	74	-26.10	Peak	Vertical
2389.97	37.55	32.92	35.16	3.54	38.85	54	-15.15	Average	Vertical

Tx-2480

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	43.03	33.06	35.18	3.60	44.51	74	-29.49	Peak	Horizontal
2483.51	33.79	33.08	35.18	3.60	35.29	54	-18.71	Average	Horizontal
2488.73	42.57	33.08	35.18	3.62	44.09	74	-29.91	Peak	Horizontal
2488.76	31.54	33.08	35.18	3.62	33.06	54	-20.94	Average	Horizontal
2483.50	46.13	33.06	35.18	3.60	47.61	74	-26.39	Peak	Vertical
2483.51	35.30	33.08	35.18	3.60	36.80	54	-17.20	Average	Vertical
2488.73	43.44	33.08	35.18	3.62	44.96	74	-29.04	Peak	Vertical
2488.76	34.55	33.08	35.18	3.62	36.07	54	-17.93	Average	Vertical

5.5. Conducted Spurious Emissions and Band Edges Test

5.5.1. Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.5.2. Instruments Setting

The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

5.5.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9kHz to 26.5GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

5.5.4. Test Setup Layout


This test setup layout is the same as that shown in section 5.3.4.

5.5.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

5.5.6. Test Results of Conducted Spurious Emissions


Test Result of Low Channel:

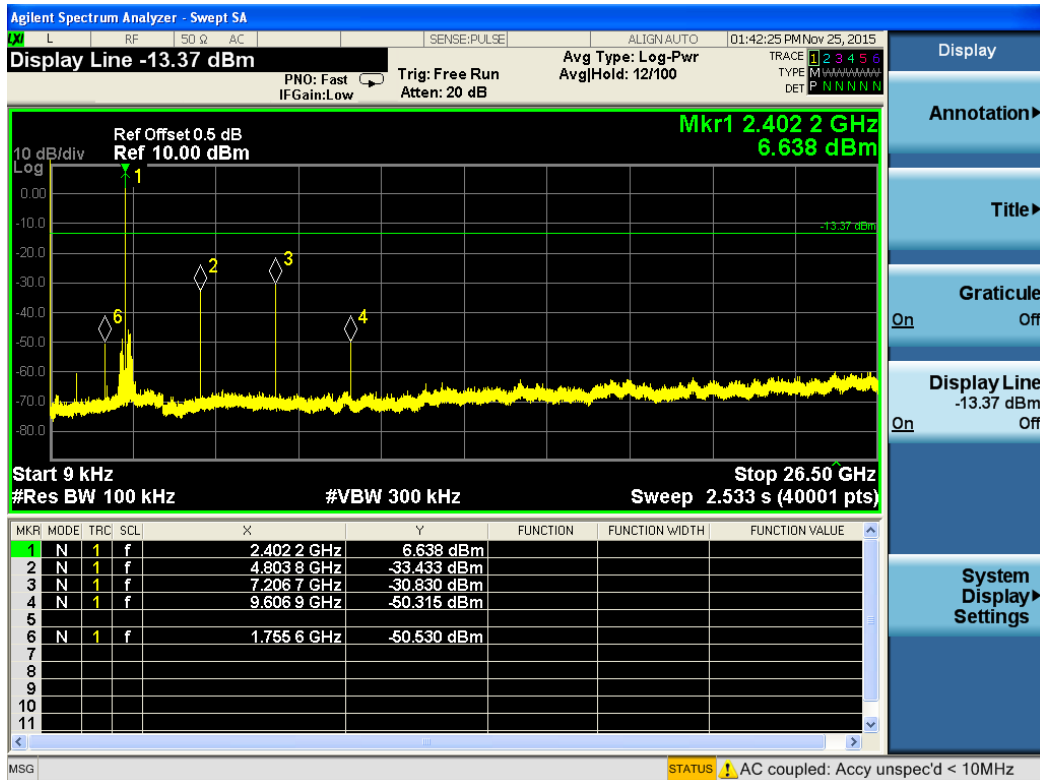


Test Result of Middle Channel:

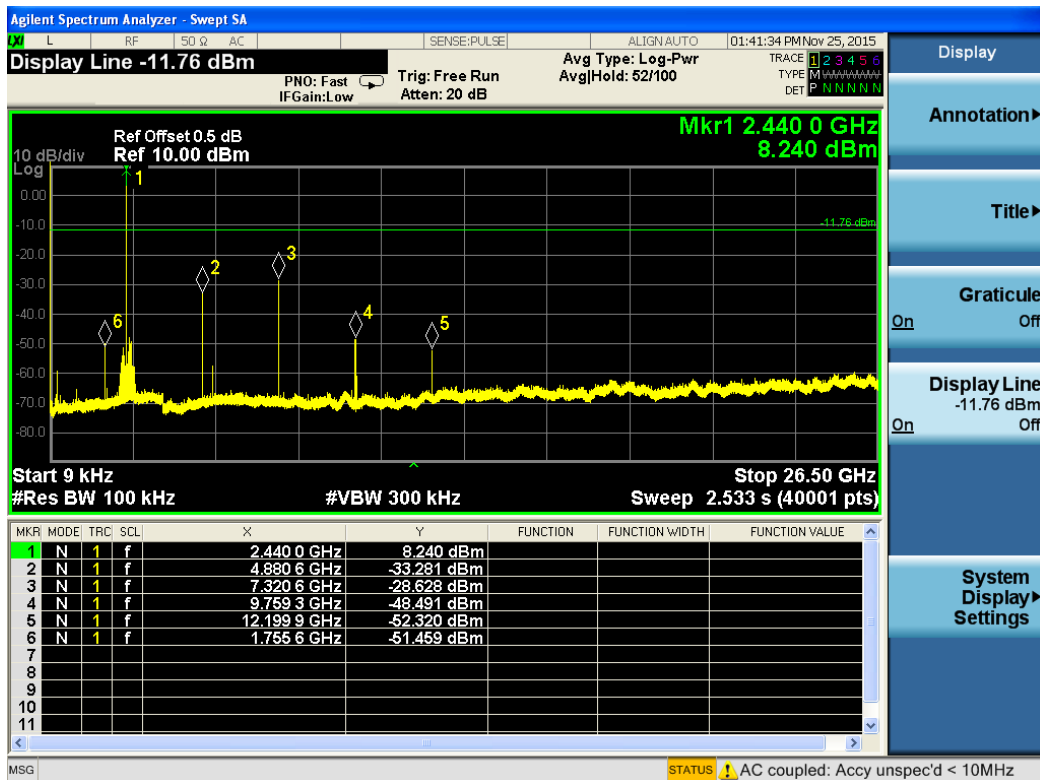

Test Result of High Channel:

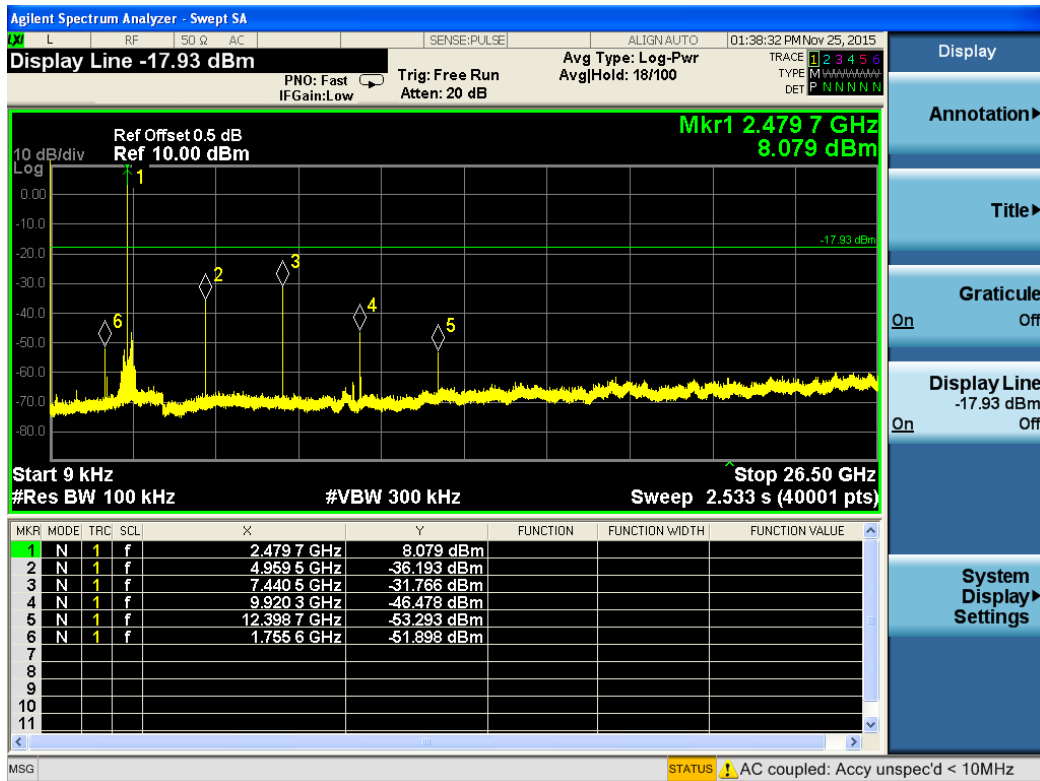

5.5.7. Test Results of Band Edges Test

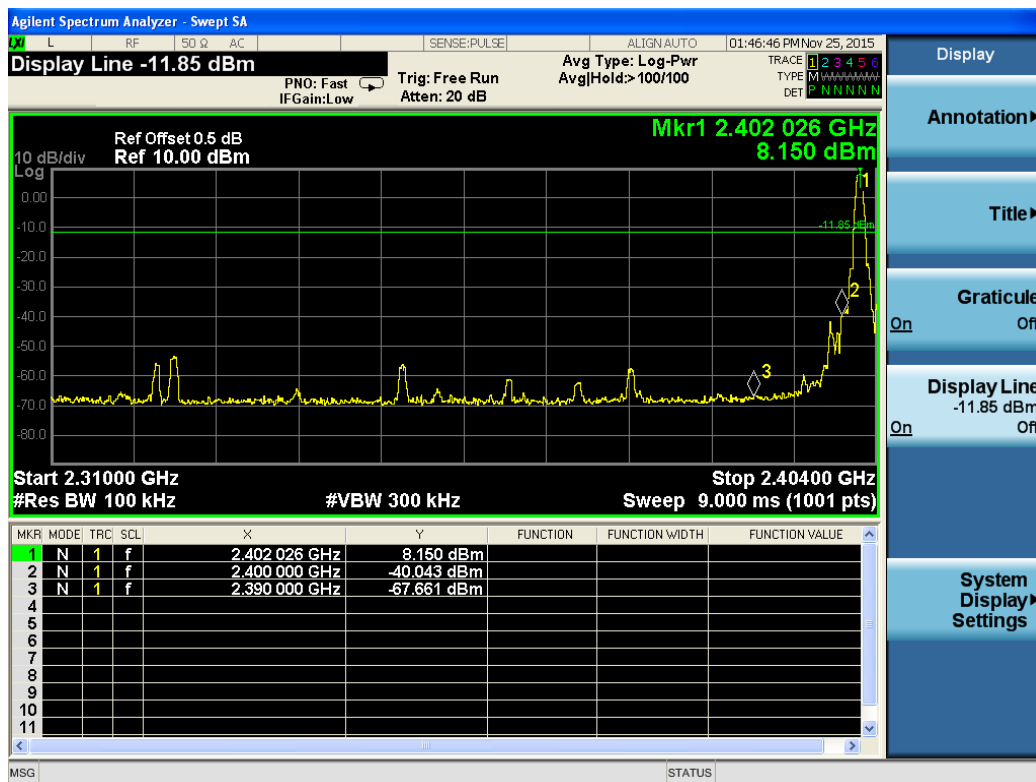


5.6. Power line conducted emissions

5.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


5.6.2 Block Diagram of Test Setup

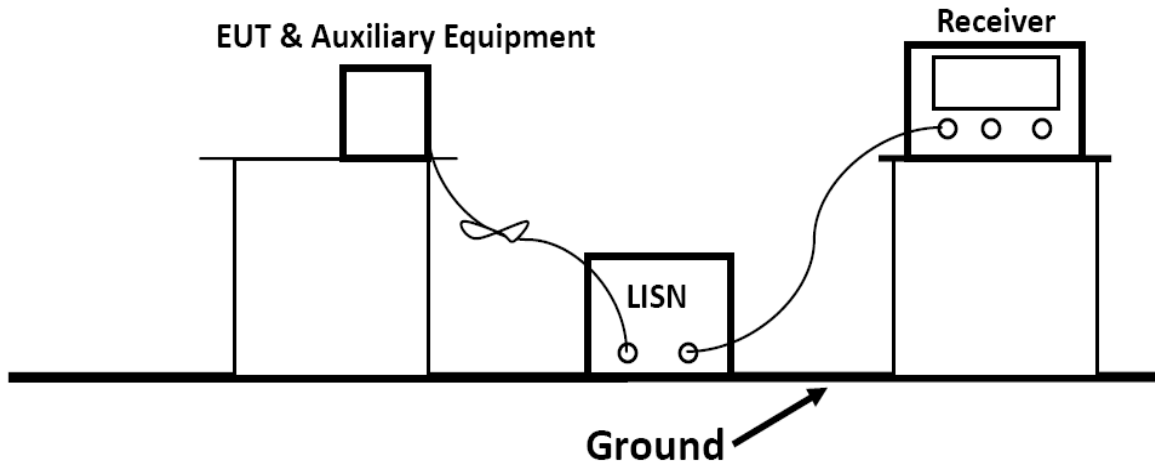

5.6.3 Test Results

PASS.


The test data please refer to following page.

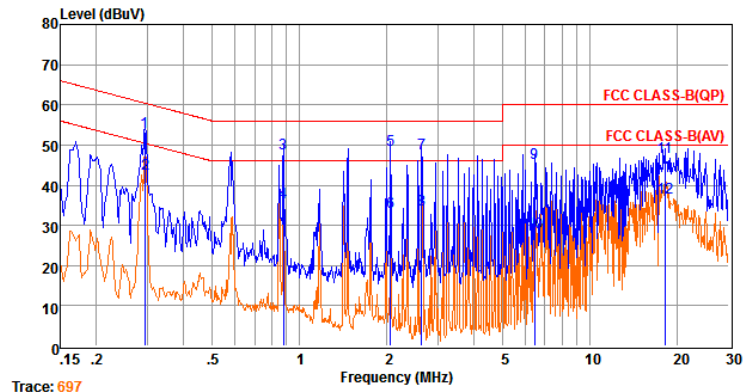

Trace: 697
 Env. Ins: 24*/56%
 EUT: Bluetooth Speaker 4.0
 M/N: SURVIVOR
 Power Rating: AC 240V/60Hz
 Test Mode: TX-Low Channel (GFSK)
 Operator: AKING
 Memo: BLE
 Pol: LINE

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.29398	33.61	9.63	0.03	10.00	53.27	60.41	-7.14	QP
2 0.29408	23.16	9.63	0.03	10.00	42.82	50.41	-7.59	Average
3 0.88031	28.33	9.63	0.04	10.00	48.00	56.00	-8.00	QP
4 0.88041	16.00	9.63	0.04	10.00	35.67	46.00	-10.33	Average
5 2.05495	29.06	9.64	0.05	10.00	48.75	56.00	-7.25	QP
6 2.05595	13.71	9.64	0.05	10.00	33.40	46.00	-12.60	Average
7 2.63602	28.29	9.64	0.05	10.00	47.98	56.00	-8.02	QP
8 2.63702	14.08	9.64	0.05	10.00	33.77	46.00	-12.23	Average
9 6.45391	25.91	9.67	0.07	10.00	45.65	60.00	-14.35	QP
10 6.45491	8.50	9.67	0.07	10.00	28.24	50.00	-21.76	Average
1118.13524	27.23	9.74	0.11	10.00	47.08	60.00	-12.92	QP
1218.13624	16.90	9.74	0.11	10.00	36.75	50.00	-13.25	Average


Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

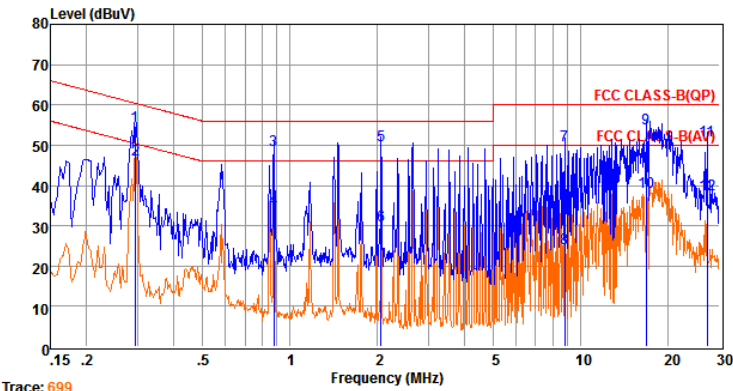

Trace: 699
 Env. Ins: 24*/56%
 EUT: Bluetooth Speaker 4.0
 M/N: SURVIVOR
 Power Rating: AC 240V/60Hz
 Test Mode: TX-Low Channel (GFSK)
 Operator: AKING
 Memo: BLE
 Pol: NEUTRAL

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.29398	35.17	9.60	0.03	10.00	54.80	60.41	-5.61	QP
2 0.29408	26.77	9.60	0.03	10.00	46.40	50.41	-4.01	Average
3 0.88031	29.16	9.63	0.04	10.00	48.83	56.00	-7.17	QP
4 0.88041	14.39	9.63	0.04	10.00	34.06	46.00	-11.94	Average
5 2.05495	30.29	9.63	0.05	10.00	49.97	56.00	-6.03	QP
6 2.05595	10.49	9.63	0.05	10.00	30.17	46.00	-15.83	Average
7 8.82233	30.08	9.71	0.08	10.00	49.87	60.00	-10.13	QP
8 8.82333	4.45	9.71	0.08	10.00	24.24	50.00	-25.76	Average
916.74973	34.12	9.76	0.11	10.00	53.99	60.00	-6.01	QP
1016.75073	18.36	9.76	0.11	10.00	38.23	50.00	-11.77	Average
1127.27110	31.19	9.83	0.13	10.00	51.15	60.00	-8.85	QP
1227.27310	17.68	9.83	0.13	10.00	37.64	50.00	-12.36	Average


Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

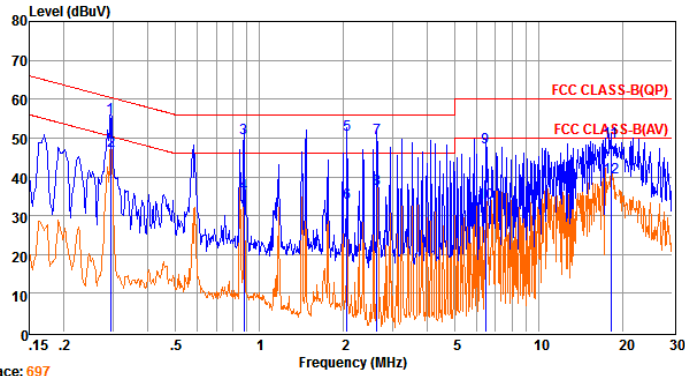

Trace: 697
 Env. Ins: 24*/56%
 EUI: Bluetooth Speaker 4.0
 M/N: SURVIVOR
 Power Rating: AC 120V/60Hz
 Test Mode: TX-Low Channel (GFSK)
 Operator: AKING
 Memo: BLE
 Pol: LINE

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.29398	35.61	9.63	0.03	10.00	55.27	60.41	-5.14	QP
2 0.29408	27.16	9.63	0.03	10.00	46.82	50.41	-3.59	Average
3 0.88031	30.33	9.63	0.04	10.00	50.00	56.00	-6.00	QP
4 0.88041	16.00	9.63	0.04	10.00	35.67	46.00	-10.33	Average
5 2.05495	31.06	9.64	0.05	10.00	50.75	56.00	-5.25	QP
6 2.05595	13.71	9.64	0.05	10.00	33.40	46.00	-12.60	Average
7 2.63602	30.29	9.64	0.05	10.00	49.98	56.00	-6.02	QP
8 2.63702	17.08	9.64	0.05	10.00	36.77	46.00	-9.23	Average
9 6.45391	27.91	9.67	0.07	10.00	47.65	60.00	-12.35	QP
10 6.45491	13.50	9.67	0.07	10.00	33.24	50.00	-16.76	Average
1118.13524	29.23	9.74	0.11	10.00	49.08	60.00	-10.92	QP
1218.13624	19.90	9.74	0.11	10.00	39.75	50.00	-10.25	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

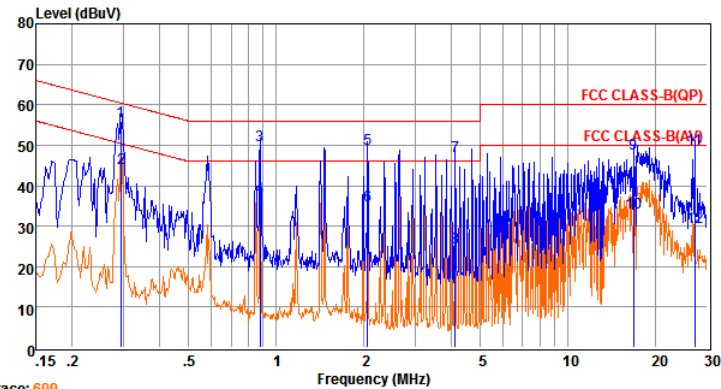

Trace: 699
 Env. Ins: 24*/56%
 EUI: Bluetooth Speaker 4.0
 M/N: SURVIVOR
 Power Rating: AC 120V/60Hz
 Test Mode: TX-Low Channel (GFSK)
 Operator: AKING
 Memo: BLE
 Pol: NEUTRAL

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.29398	36.17	9.60	0.03	10.00	55.80	60.41	-4.61	QP
2 0.29408	24.77	9.60	0.03	10.00	44.40	50.41	-6.01	Average
3 0.88031	30.16	9.63	0.04	10.00	49.83	56.00	-6.17	QP
4 0.88041	17.39	9.63	0.04	10.00	37.06	46.00	-8.94	Average
5 2.05495	29.29	9.63	0.05	10.00	48.97	56.00	-7.03	QP
6 2.05595	15.49	9.63	0.05	10.00	35.17	46.00	-10.83	Average
7 4.11372	27.55	9.65	0.06	10.00	47.26	56.00	-8.74	QP
8 4.11472	4.99	9.65	0.06	10.00	24.70	46.00	-21.30	Average
916.74973	28.12	9.76	0.11	10.00	47.99	60.00	-12.01	QP
1016.75073	13.35	9.76	0.11	10.00	33.22	50.00	-16.78	Average
1127.27110	29.19	9.83	0.13	10.00	49.15	60.00	-10.85	QP
1227.27210	9.68	9.83	0.13	10.00	29.64	50.00	-20.36	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

***Note: Pre-scan all mode and recorded the worst case results in this report.

5.7. Antenna Requirements

5.7.1. Standard Applicable

According to § 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.7.2. Antenna Connector Construction

The antenna used for transmitting is permanently attached and no consideration of replacement. Please see EUT photo for details.

5.7.3. Antenna Gain

Parameter Setting	
Detector:	Peak
Sweep Time:	Auto
Resolution bandwidth:	3MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For Bluetooth devices, the GFSK mode is used.

Test Result				
T _{nom}	V _{nom}	Lowest Channel 2402 MHz	Middle Channel 2440 MHz	Highest Channel 2480 MHz
Conducted power [dBm] Measured with GFSK modulation		1.80	1.59	1.53
Radiated power [dBm] Measured with GFSK modulation		3.64	3.42	3.33
Gain [dBi] Calculated		1.84	1.83	1.80
Measurement uncertainty			± 1.6 dB (cond.) / ± 3.8 dB (rad.)	

5.7.4. Results: Compliance.

-----THE END OF REPORT-----