

FCC Report

Application Purpose : Original grant
Applicant Name: : METEC ELECTRONICS CO.,LIMITED
FCC ID : 2AD38SP-3540BK
Equipment Type : multimedia speaker
Model Name : ARG-SP-3540BK, EM-3185
Report Number : FCC16063743
Standard(S) : FCC Part 15 Subpart C
Date Of Receipt : June 21, 2016
Date Of Issue : August 31, 2016

Test By : Neil Ma
(Neil Ma)

Reviewed By : Robie Chen
(Robie Chen)

Authorized by : Michal Ling
(Michal Ling)

Prepared by : **QTC Certification & Testing Co., Ltd.**
2nd Floor,B1 Buiding,Fengyeyuan Industrial Plant,,Liuxian
2st.Road,Xin'an Street,Bao'an District,,Shenzhen,
518000China.

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	July 18, 2016	Valid	Original Report
V2.0	/	August 24, 2016	Valid	Modified Report
V3.0	/	August 31, 2016	Valid	Modified Report

Table of Contents	Page
1. GENERAL INFORMATION	5
2. TEST DESCRIPTION	7
2.1 MEASUREMENT UNCERTAINTY	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	9
2.4 CONFIGURATION OF SYSTEM UNDER TEST	9
2.5 PERIPHERALS EQUIPMENT LIST	9
2.6 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	10
3. SUMMARY OF TEST RESULTS	11
4. MEASUREMENT INSTRUMENTS	12
5. EMC EMISSION TEST	13
5.1 CONDUCTED EMISSION MEASUREMENT	13
5.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
5.1.2 TEST PROCEDURE	14
5.1.3 DEVIATION FROM TEST STANDARD	14
5.1.4 TEST SETUP	14
5.1.5 EUT OPERATING CONDITIONS	14
5.1.6 TEST RESULTS	15
5.2 RADIATED EMISSION MEASUREMENT	17
5.2.1 RADIATED EMISSION LIMITS	17
5.2.2 TEST PROCEDURE	17
5.2.3 DEVIATION FROM TEST STANDARD	18
5.2.4 TEST SETUP	19
5.2.5 EUT OPERATING CONDITIONS	20
5.2.5.1 RESULTS (BELOW 30 MHZ)	21
5.2.5.2 TEST RESULTS (BETWEEN 30M – 1000 MHZ)	22
5.2.5.3 TEST RESULTS(1GHZ TO 25GHZ)	24
6. NUMBER OF HOPPING CHANNEL	
6.1 APPLIED PROCEDURES / LIMIT	34
6.2 TEST PROCEDURE	34
6.3 DEVIATION FROM STANDARD	34
6.4 TEST SETUP	34
6.5 EUT OPERATION CONDITIONS	34
6.6 TEST RESULTS	35
7. AVERAGE TIME OF OCCUPANCY	

Table of Contents	Page
7.1 APPLIED PROCEDURES / LIMIT	36
7.2 TEST PROCEDURE	36
7.3 DEVIATION FROM STANDARD	36
7.4 TEST SETUP	37
7.5 EUT OPERATION CONDITIONS	37
7.6 TEST RESULTS	38
8. HOPPING CHANNEL SEPARATION MEASUREMENT	
8.1 APPLIED PROCEDURES / LIMIT	40
8.2 TEST PROCEDURE	40
8.3 DEVIATION FROM STANDARD	40
8.4 TEST SETUP	40
8.5 EUT OPERATION CONDITIONS	40
8.6 TEST RESULTS	41
9. BANDWIDTH TEST	
9.1 APPLIED PROCEDURES / LIMIT	47
9.2 TEST PROCEDURE	47
9.3 DEVIATION FROM STANDARD	47
9.4 TEST SETUP	47
9.5 EUT OPERATION CONDITIONS	47
9.6 TEST RESULTS	48
10. PEAK OUTPUT POWER TEST	
10.1 APPLIED PROCEDURES / LIMIT	54
10.2 TEST PROCEDURE	54
10.3 DEVIATION FROM STANDARD	54
10.4 TEST SETUP	54
10.5 EUT OPERATION CONDITIONS	54
10.6 TEST RESULTS	55
11. 100KHZ BAND EDGES MEASUREMENT	
11.1 APPLIED PROCEDURES / LIMIT	56
12. ANTENNA APPLICATION	68
13. EUT TEST PHOTO	69
14. PHOTOGRAPHS OF EUT	71

1. GENERAL INFORMATION

GENERAL DESCRIPTION OF EUT

Test Model	ARG-SP-3540BK
Derivative Model Name	EM-3185
Model difference	Model name is different
Applicant	METEC ELECTRONICS CO.,LIMITED
Address	Building D, No. 4 Industrial Zone of Shasan Village, Shajing Town, Bao'an District, Shenzhen, China
Manufacturer	SHENZHEN BEYEAR APPLIANCE CO., LTD.
Address	Building D, No. 4 Industrial Zone of Shasan Village, Shajing Town, Bao'an District, Shenzhen, China
Equipment Type	multimedia speaker
Brand Name	N/A
Hardware version:	N/A
Software version:	N/A
Extreme Temp. Tolerance	-10°C to +50°C
Operating Voltage	Input: AC 220V-240V 50/60Hz 1A
Operating Frequency	2402-2480MHz
Channels	79
Channel Spacing	1MHz
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Version	3.0+EDR
Antenna Type:	PCB Antenna
Antenna gain:	1.0dBi
Data of receipt	June 21, 2016
Date of test	June 21, 2016 to August 31, 2016
Deviation	None
Condition of Test Sample	Normal

We hereby certify that:

The above equipment was tested by QTC Certification & Testing Co., Ltd.

Registration Number: 588523

The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.10:2013. The sample tested as described in this report is in compliance with the FCC Rules Part15 Subpart C.

ALL the testing were referenced KDB NO.453039

The test results of this report relate only to the tested sample identified in this report.

2. TEST DESCRIPTION

2.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.7\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78
Mode 4	Normal Hopping

For Conducted Emission	
Final Test Mode	Description
Mode 4	Normal Hopping

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.**
- (2) The data rate was set in 1Mbps, 2 Mbps, 3 Mbps for radiated emission due to the highest RF output power.**
- (3) Record the worst case of each test item in this report.**

2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test software Version	N/A		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	DEF	DEF	DEF
Parameters(2Mbps)	DEF	DEF	DEF
Parameters(3Mbps)	DEF	DEF	DEF

2.4 CONFIGURATION OF SYSTEM UNDER TEST



(EUT: MULTIMEDIA SPEAKER)

2.5 PERIPHERALS EQUIPMENT LIST

Item	Equipment	Model No.	ID or Specification	Remark
1	N/A	N/A	N/A	N/A

2.6 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	/	/	/	/	/

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.
- (4) The adapter supply by the applicant.

3. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(c)	Radiated Spurious Emission	PASS	
15.247(a)(iii)	Number of Hopping Frequency	PASS	
15.247(a)(iii)	Dwell Time	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

4. MEASUREMENT INSTRUMENTS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibrated	Calibrated until
ESPI Test Receiver	R&S	ESPI	100379	2016-08-19	2017-08-18
EMI Test Receiver	R&S	ESCI	100005	2016-08-19	2017-08-18
LISN	Mestec	AN3016	04/10040	2016-08-19	2017-08-18
Coaxial cable	Megalon	LMR400	C001	2016-08-19	2017-08-18
System Controller	CT	SC100	011208	2016-08-19	2017-08-18
Bi-log Antenna	Chase	CBL6111C	2576	2016-08-19	2017-08-18
Spectrum analyzer	R&S	FSU26	200409	2016-08-19	2017-08-18
Horn Antenna	SCHWARZBECK	9120D	1141	2016-08-19	2017-08-18
Bi-log Antenna	Schwarebeck	VULB9163	9163/340	2016-08-19	2017-08-18
Loop Antenna	EMCO	6502	00042960	2016-08-19	2017-08-18
Pre Amplifier	H.P.	HP8447E	2945A02715	2016-08-19	2017-08-18
Pre-Amplifier	CDSI	PAP-1G18-38	7621	2016-08-19	2017-08-18
8*4*3 Anechoic	SAEMC	L×W×H 8×4×3	A001	2016-08-19	2017-08-18
9*6*6 Anechoic	SAEMC	L×W×H 9×6×6	A002	2016-08-19	2017-08-18
Power meter	Anritsu	ML2487A	6K00003613	2016-08-19	2017-08-18
H & T Chamber	Guangzhou gongwen	GDJS-500-40	0329	2016-08-19	2017-08-18
MXA Signal Analyzer	Aglient	N9020A	54123254	2016-08-19	2017-08-18
Power sensor	Anritsu	MX248XD	95327410	2016-08-19	2017-08-18
RF cable	H+S	SUCOFLEX 102	R002	2016-08-19	2017-08-18
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	2016-08-19	2017-08-18

5. EMC EMISSION TEST

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


5.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.1.3 DEVIATION FROM TEST STANDARD

No deviation

5.1.4 TEST SETUP

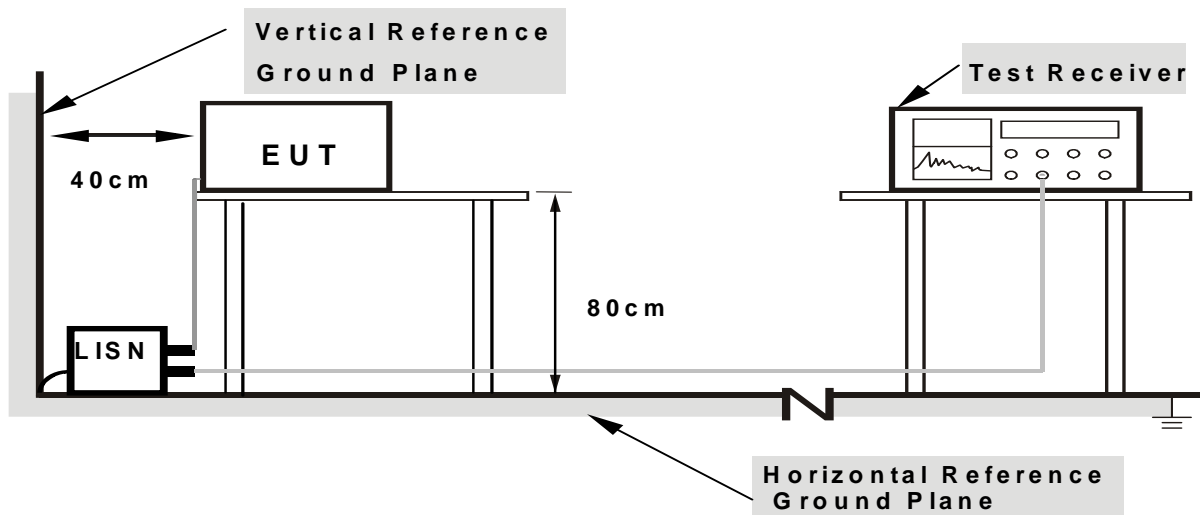


- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

5.1.6 TEST RESULTS


EUT	multimedia speaker	Model Name	EM-3185
Temperature	24 °C	Relative Humidity	54%
Pressure	1010hPa	Phase	L
Test Date	June 25, 2016	Test Mode	Mode 4
Test Voltage	AC120V/60Hz:		

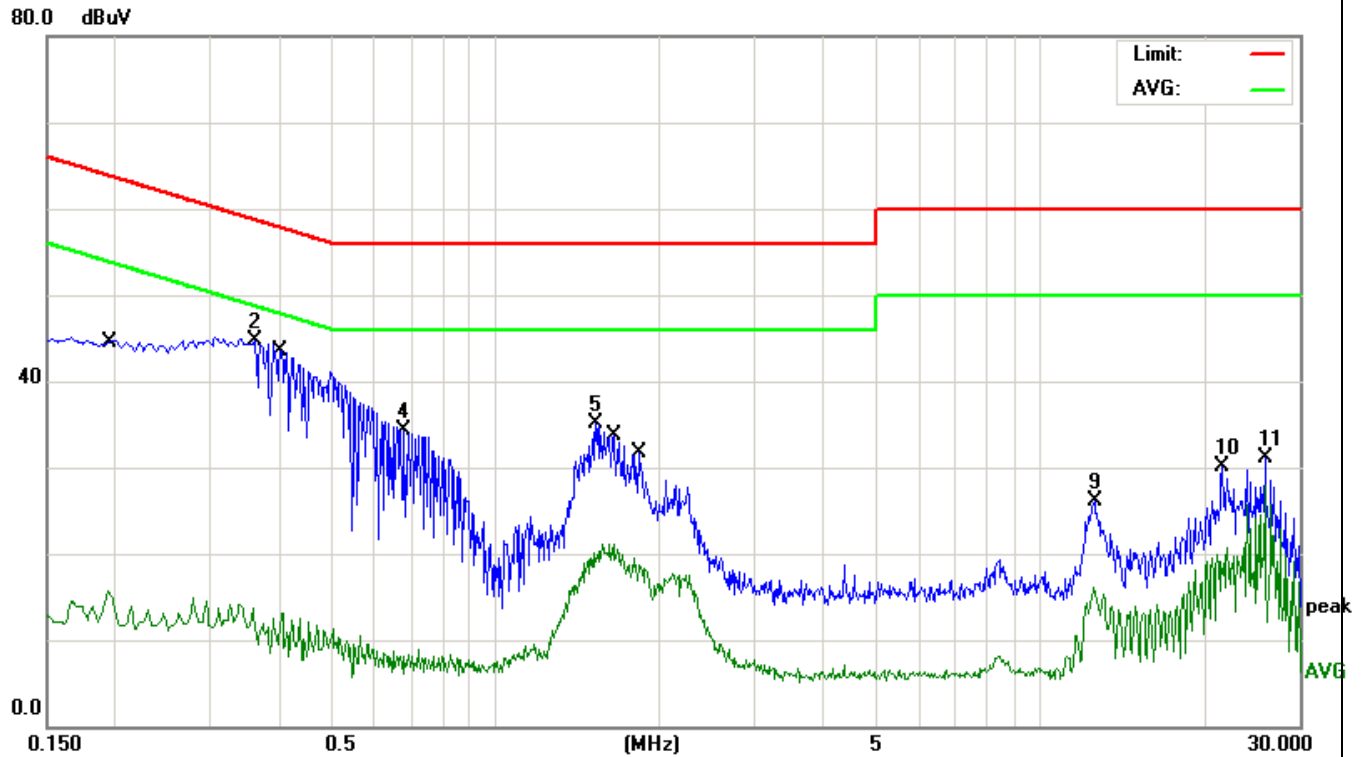

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1940	5.43	10.32	15.75	53.86	-38.11	AVG
2	*	0.3620	34.06	10.56	44.62	58.68	-14.06	peak
3		0.4060	2.69	10.49	13.18	47.73	-34.55	AVG
4		0.6820	23.44	10.86	34.30	56.00	-21.70	peak
5		1.5300	24.28	10.73	35.01	56.00	-20.99	peak
6		1.6500	10.36	10.73	21.09	46.00	-24.91	AVG
7		1.8540	7.87	10.72	18.59	46.00	-27.41	AVG
8		12.5820	5.62	10.43	16.05	50.00	-33.95	AVG
9		12.6300	15.60	10.43	26.03	60.00	-33.97	peak
10		21.6460	19.55	10.52	30.07	60.00	-29.93	peak
11		25.9820	20.50	10.56	31.06	60.00	-28.94	peak
12		25.9820	17.42	10.56	27.98	50.00	-22.02	AVG

Remark: All the modes have been investigated, and only worst mode is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	24 °C	Relative Humidity	54%
Pressure	1010hPa	Phase	N
Test Date	June 25, 2016	Test Mode	Mode 4
Test Voltage	AC120V/60Hz:		

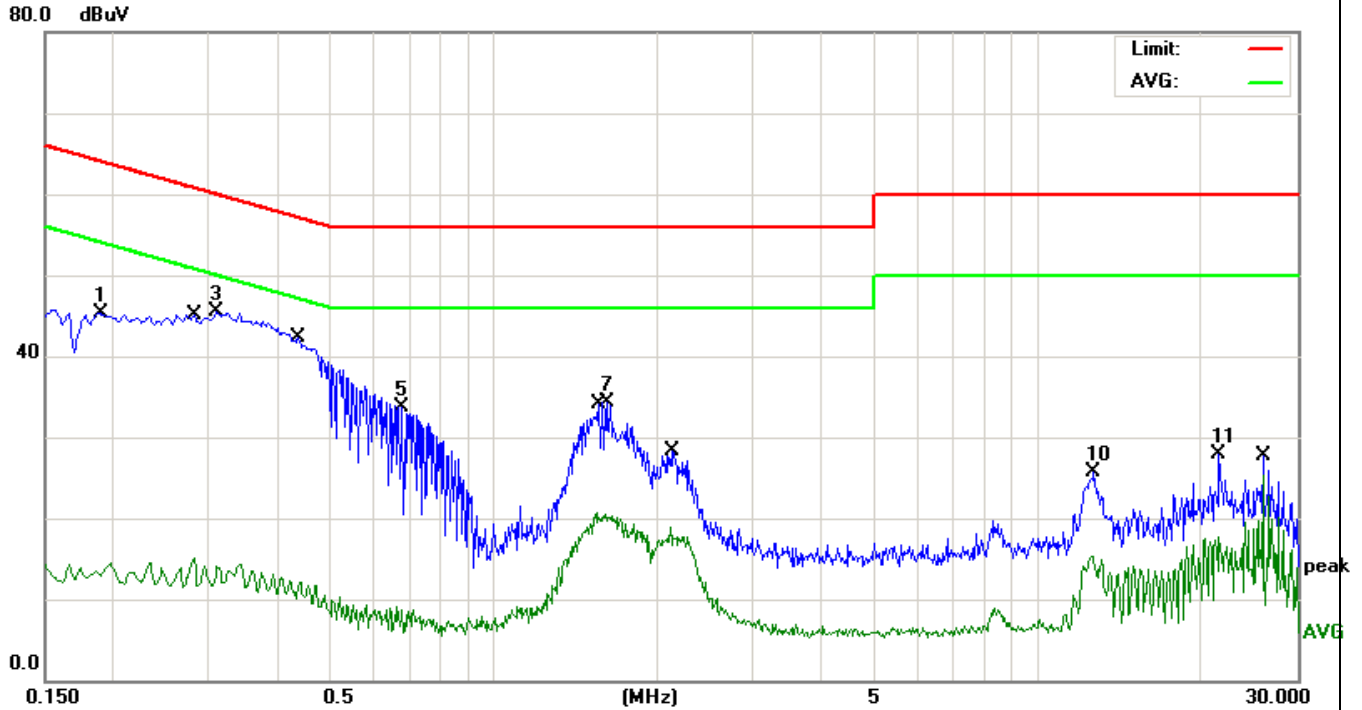

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1900	34.94	10.33	45.27	64.03	-18.76	peak
2		0.2819	4.47	10.59	15.06	50.76	-35.70	AVG
3	*	0.3100	34.85	10.63	45.48	59.97	-14.49	peak
4		0.4420	1.68	10.46	12.14	47.02	-34.88	AVG
5		0.6820	22.80	10.86	33.66	56.00	-22.34	peak
6		1.5580	9.94	10.73	20.67	46.00	-25.33	AVG
7		1.6140	23.60	10.73	34.33	56.00	-21.67	peak
8		2.1180	8.18	10.71	18.89	46.00	-27.11	AVG
9		12.5860	4.96	10.43	15.39	50.00	-34.61	AVG
10		12.6780	15.20	10.43	25.63	60.00	-34.37	peak
11		21.5500	17.33	10.52	27.85	60.00	-32.15	peak
12		25.9700	14.71	10.56	25.27	50.00	-24.73	AVG

Remark: All the modes have been investigated, and only worst mode is presented in this report.

5.2 RADIATED EMISSION MEASUREMENT

5.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

5.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.

- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


***Both horizontal and vertical antenna polarities were tested.
The worst case emissions were reported***

5.2.3 DEVIATION FROM TEST STANDARD


No deviation

5.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

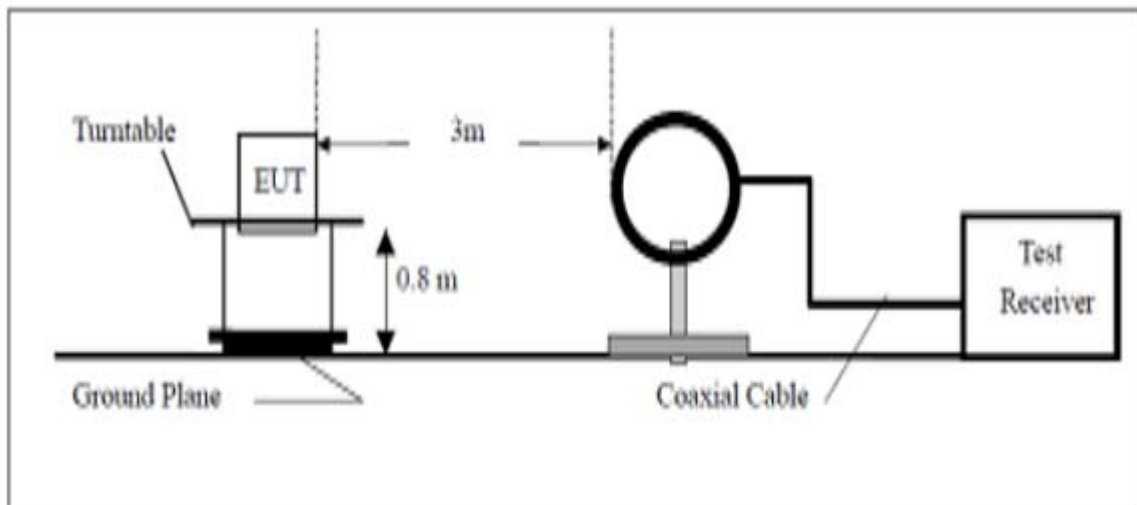

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

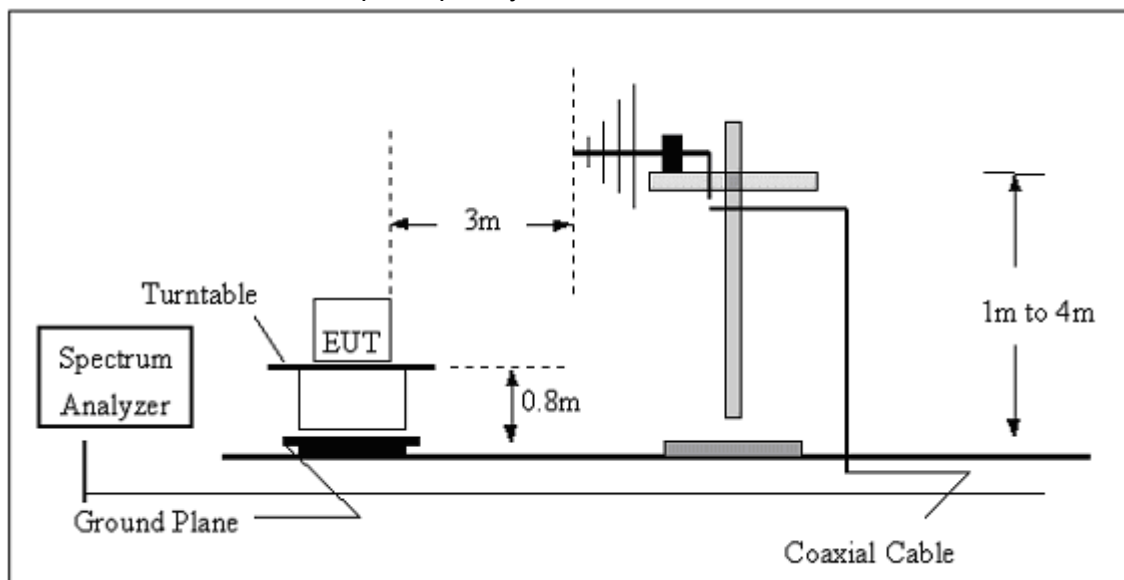

(C) Radiated Emission Test-Up Frequency Above 1GHz

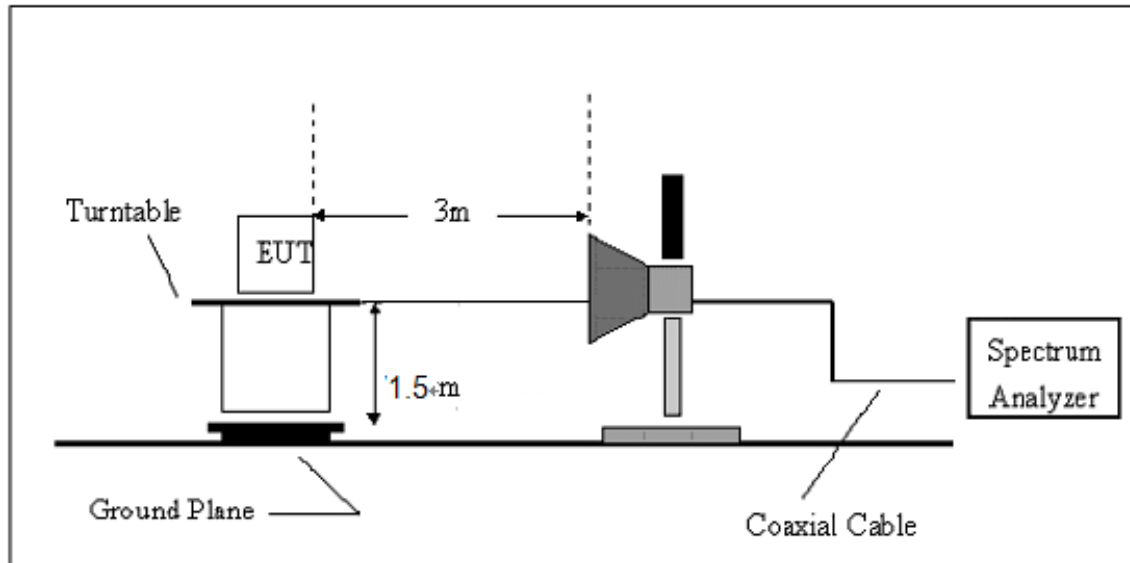**5.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.2.5.1 RESULTS (BELOW 30 MHZ)

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	---
Test Mode	Mode 1/ Mode 2/ Mode 3	Test Date	June 25, 2016

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

NOTE:

No result in this part for margin above 20dB.


Distance extrapolation factor = $20 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

Only worst case is presented in this report.

5.2.5.2 TEST RESULTS (BETWEEN 30M – 1000 MHZ)


EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization :	Horizontal
Test Mode	Mode 1 with GFSK modulation	Test Date	June 25, 2016

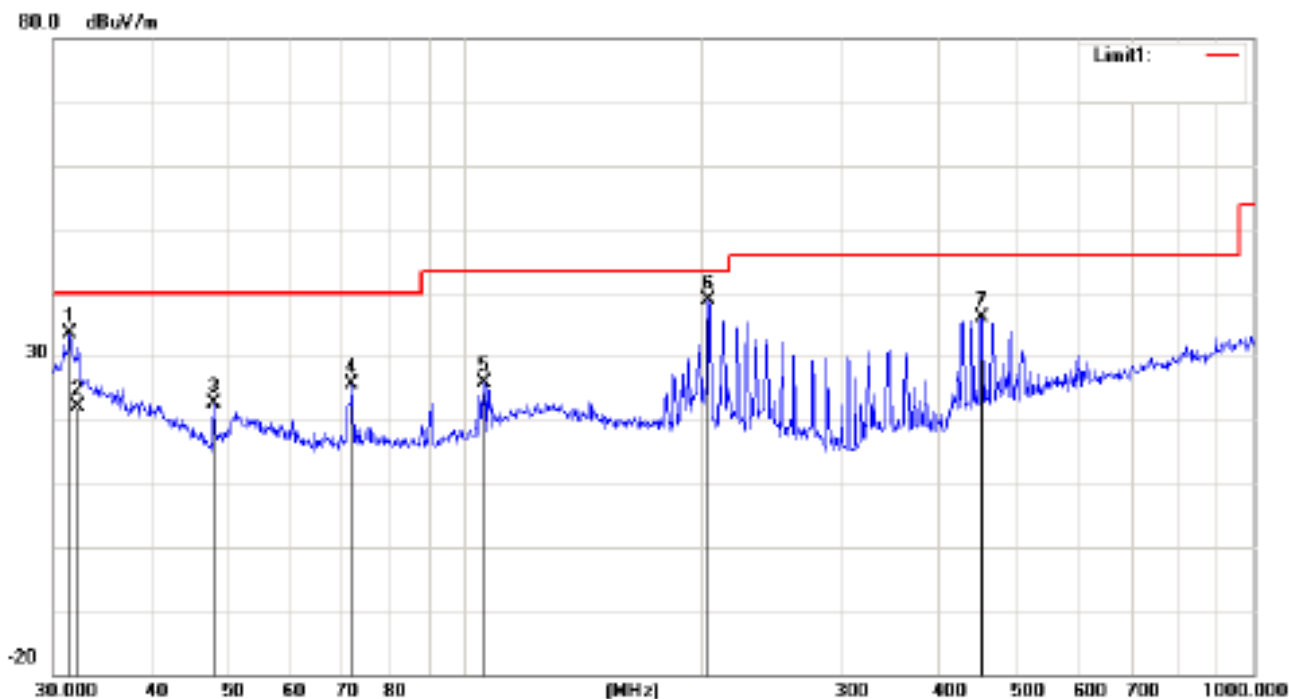

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		31.5094	31.06	2.47	33.53	40.00	-6.47	QP
2		32.3308	20.19	1.92	22.11	40.00	-17.89	QP
3		47.9939	30.74	-8.18	22.56	40.00	-17.44	QP
4		71.8319	33.41	-7.71	25.70	40.00	-14.30	QP
5		105.6414	30.65	-4.78	25.87	43.50	-17.63	QP
6	*	203.5227	43.86	-4.95	38.91	43.50	-4.59	QP
7		452.7196	38.00	-1.98	36.02	46.00	-9.98	QP

Remark: All the modes have been investigated, and only worst mode is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization :	Vertical
Test Mode	Mode 1 with GFSK modulation	Test Date	June 25, 2016

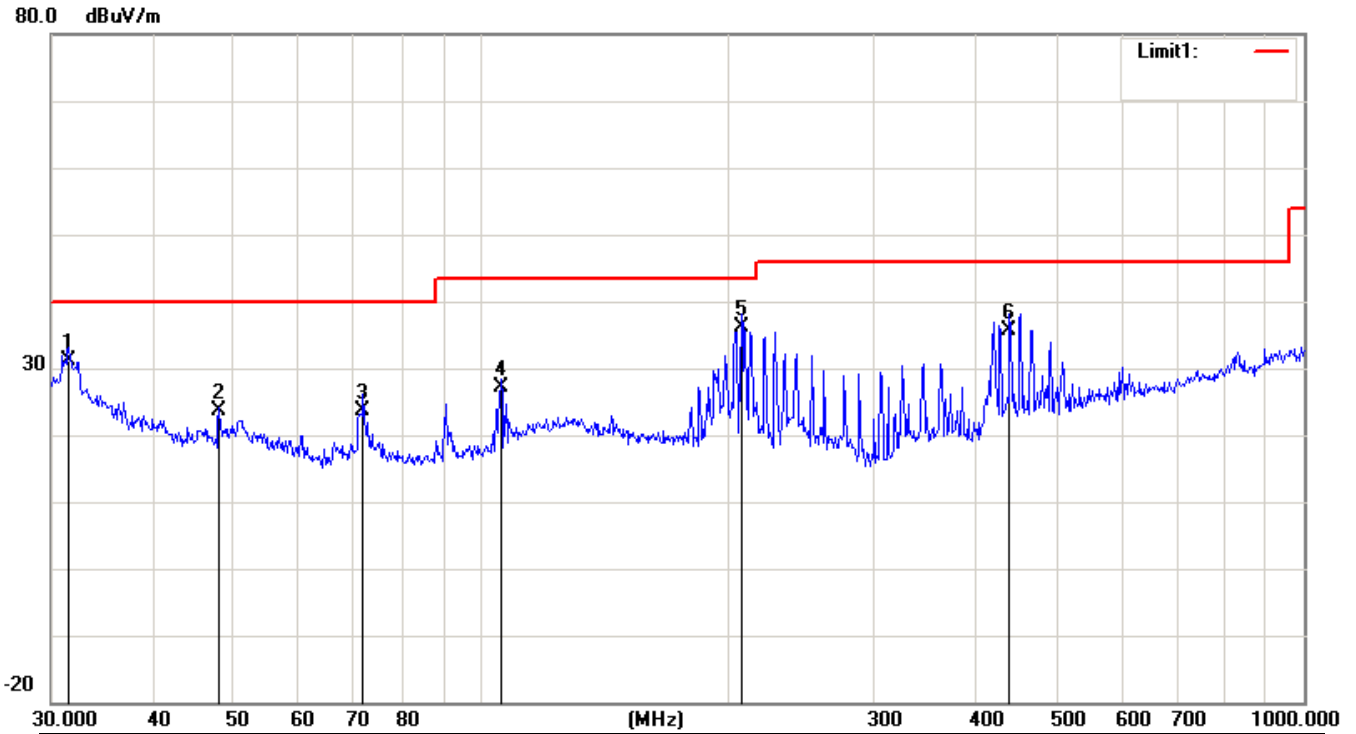

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		31.5093	28.56	2.47	31.03	40.00	-8.97	QP
2		47.9938	31.69	-8.18	23.51	40.00	-16.49	QP
3		71.8319	31.37	-7.71	23.66	40.00	-16.34	QP
4		105.6414	31.90	-4.78	27.12	43.50	-16.38	QP
5	*	207.1226	41.09	-5.08	36.01	43.50	-7.49	QP
6		438.6553	37.96	-2.32	35.64	46.00	-10.36	QP

Remark: All the modes have been investigated, and only worst mode is presented in this report.

5.2.5.3 TEST RESULTS(1GHZ TO 25GHZ)

Note: *The worst case is 1Mbps(GFSK)mode as result in this part.*

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 1 TX(1Mbps)
Test Date	June 25, 2016		

Freq. (MHz)	Ant. Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4804	V	59.03	40.54	74	54	-14.97	-13.46
7206	V	58.07	40.62	74	54	-15.93	-13.38
4804	H	59.26	39.92	74	54	-14.74	-14.08
7206	H	59.07	40.07	74	54	-14.93	-13.93

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.
Only worst case is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 2 TX(1Mbps)
Test Date	June 25, 2016		

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	58.51	39.50	74	54	-15.49	-14.50
7323	V	59.60	40.05	74	54	-14.40	-13.95
4882	H	59.64	39.18	74	54	-14.36	-14.82
7323	H	59.74	40.74	74	54	-14.26	-13.26

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.
Only worst case is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 3 TX(1Mbps)
Test Date	June 25, 2016		

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	60.16	41.41	74	54	-13.84	-12.59
7440	V	59.36	39.12	74	54	-14.64	-14.88
4960	H	59.35	40.22	74	54	-14.65	-13.78
7440	H	58.10	39.10	74	54	-15.90	-14.90

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.
Only worst case is presented in this report.

5.2.5.4 TEST RESULTS (Restricted Bands Requirements)

Test result for 1Mbps Mode:

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25, 2016
Test Mode	TX /Mode1-1Mbps	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2382	62.81	-8.77	54.04	74	19.96	peak
2382	54.70	-8.77	45.93	54	8.07	AVG
2390	59.49	-8.73	50.76	74	23.24	peak
2390	54.23	-8.73	45.50	54	8.50	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Only worst case is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25, 2016
Test Mode	TX /2402MHz-1Mbps	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2376	62.40	-8.77	53.63	74	20.37	peak
2376	55.86	-8.77	47.09	54	6.91	AVG
2390	63.84	-8.73	55.11	74	18.89	peak
2390	56.99	-8.73	48.26	54	5.74	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Only worst case is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25, 2016
Test Mode	TX /2480MHz-1Mbps	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	60.12	-8.17	51.95	74	22.05	peak
2483.5	53.14	-8.17	44.97	54	9.03	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Only worst case is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25, 2016
Test Mode	TX /2480MHz-1Mbps	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	62.04	-8.17	53.87	74	20.13	peak
2483.5	53.76	-8.17	45.59	54	8.41	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Only worst case is presented in this report.

Test result for 2Mbps Mode:

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25, 2016
Test Mode	TX /Mode1-2Mbps	Polarization	Vertical

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2382	64.60	-8.76	55.84	74	18.16	peak
2382	56.68	-8.76	47.92	54	6.08	AVG
2390	60.78	-8.73	52.05	74	21.95	peak
2390	55.83	-8.73	47.10	54	6.90	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Only worst case is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25, 2016
Test Mode	TX /2402MHz-2Mbps	Polarization	Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2376	60.07	-8.76	51.31	74	22.69	peak
2376	55.68	-8.76	46.92	54	7.08	AVG
2390	60.27	-8.73	51.54	74	22.46	peak
2390	55.47	-8.73	46.74	54	7.26	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Only worst case is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25, 2016
Test Mode	TX /2480MHz-2Mbps	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	63.13	-8.17	54.96	74	19.04	peak
2483.5	54.04	-8.17	45.87	54	8.13	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Only worst case is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25, 2016
Test Mode	TX /2480MHz-2Mbps	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	61.91	-8.17	53.74	74	20.26	peak
2483.5	53.61	-8.17	45.44	54	8.56	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Only worst case is presented in this report.

Test result for 3Mbps Mode:

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25, 2016
Test Mode	TX /2402MHz-3Mbps	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2387	64.44	-8.77	55.67	74	18.33	peak
2387	56.90	-8.77	48.13	54	5.87	AVG
2390	60.89	-8.73	52.16	74	21.84	peak
2390	54.37	-8.73	45.64	54	8.36	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Only worst case is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25, 2016
Test Mode	TX /2402MHz-3Mbps	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2384	63.46	-8.77	54.69	74	19.31	peak
2384	56.08	-8.77	47.31	54	6.69	AVG
2390	59.97	-8.73	51.24	74	22.76	peak
2390	55.01	-8.73	46.28	54	7.72	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Only worst case is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25,2016
Test Mode	TX /2480MHz-3Mbps	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	63.78	-8.17	55.61	74	18.39	peak
2483.5	54.28	-8.17	46.11	54	7.89	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Only worst case is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25,2016
Test Mode	TX /2480MHz-3Mbps	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	62.77	-8.17	54.60	74	19.40	peak
2483.5	53.66	-8.17	45.49	54	8.51	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Only worst case is presented in this report.

Test result for hopping mode:

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25,2016
Test Mode	hopping mode	Polarization	Vertical

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2381	60.21	-8.76	51.45	74	22.55	peak
2381	53.51	-8.76	44.75	54	9.25	AVG
2390	59.18	-8.73	50.45	74	23.55	peak
2390	54.16	-8.73	45.43	54	8.57	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Only worst case is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25,2016
Test Mode	Hopping mode	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2378	60.58	-8.77	51.81	74	22.19	peak
2378	56.66	-8.77	47.89	54	6.11	AVG
2390	62.64	-8.73	53.91	74	20.09	peak
2390	57.50	-8.73	48.77	54	5.23	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Only worst case is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25,2016
Test Mode	Hopping mode	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	62.77	-8.17	54.60	74	19.40	peak
2483.5	53.66	-8.17	45.49	54	8.51	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Only worst case is presented in this report.

EUT	multimedia speaker	Model Name	EM-3185
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Date	June 25,2016
Test Mode	Hopping mode	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	61.01	-8.17	52.84	74	21.16	peak
2483.5	53.23	-8.17	45.06	54	8.94	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Only worst case is presented in this report.

6. NUMBER OF HOPPING CHANNEL

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.2 TEST PROCEDURE

- a. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- b. Spectrum Setting: RBW= 1MHz, VBW=3MHz, Sweep time = Auto.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP




6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

EUT	multimedia speaker	Model Name	EM-3185
Temperature	25 °C	Relative Humidity	60%
Pressure	1015 hPa	Test Date	June 25,2016
Test Mode	Hopping Mode	Number of Hopping Channel	79

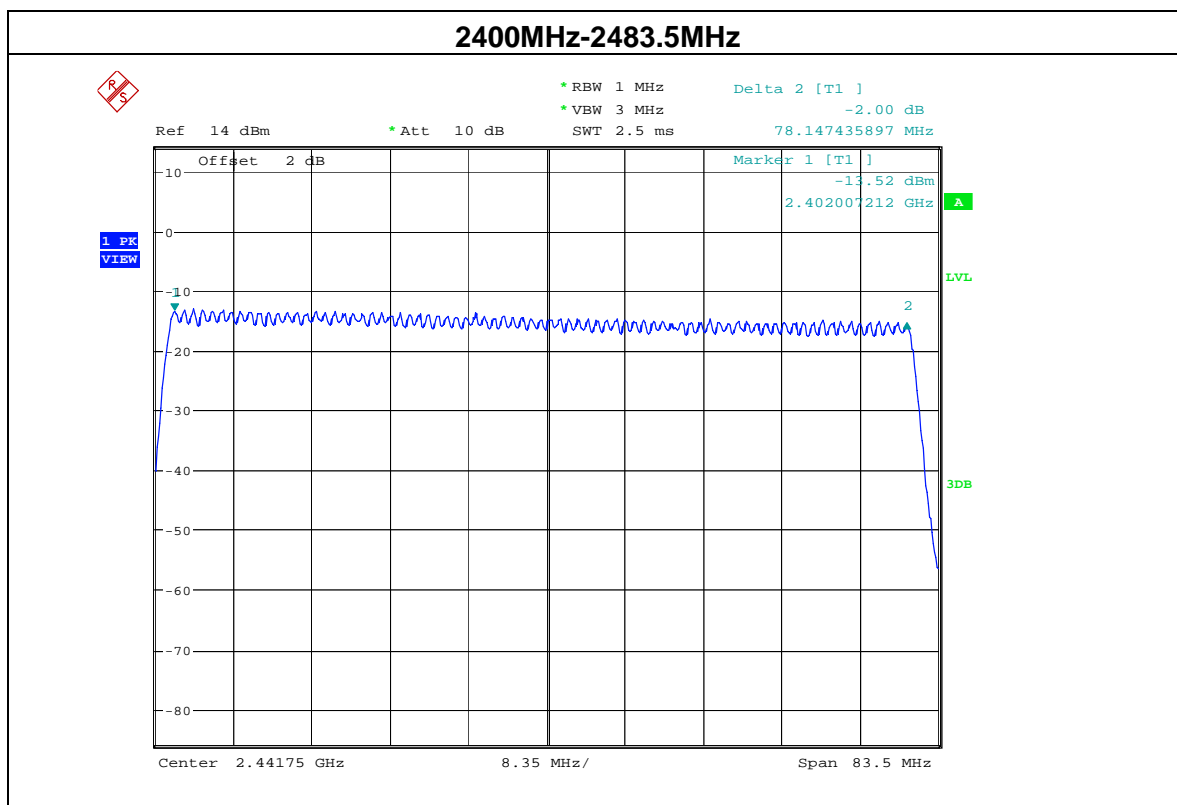

7. AVERAGE TIME OF OCCUPANCY**7.1 APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

7.2 TEST PROCEDURE

- a. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH1 Dwell time = Pulse time*(1600/2/79)*31.6S
DH3 Dwell time = Pulse time*(1600/4/79)*31.6S
DH5 Dwell time = Pulse time*(1600/6/79)*31.6S

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULTS

Note: *the worst case is DH-3Mbps as result in this part.*

EUT	multimedia speaker	Model Name	EM-3185
Temperature	25 °C	Relative Humidity	60%
Pressure	1012 hPa	Test Date	June 25,2016
Test Mode	DH5-3Mbps		

Data Packet	Frequency	Pulse time(ms)	Dwell Time(S)	Limits (S)
DH5	2402MHz	3.0128	0.331	0.4
DH5	2441MHz	3.0128	0.322	0.4
DH5	2480MHz	3.0128	0.323	0.4

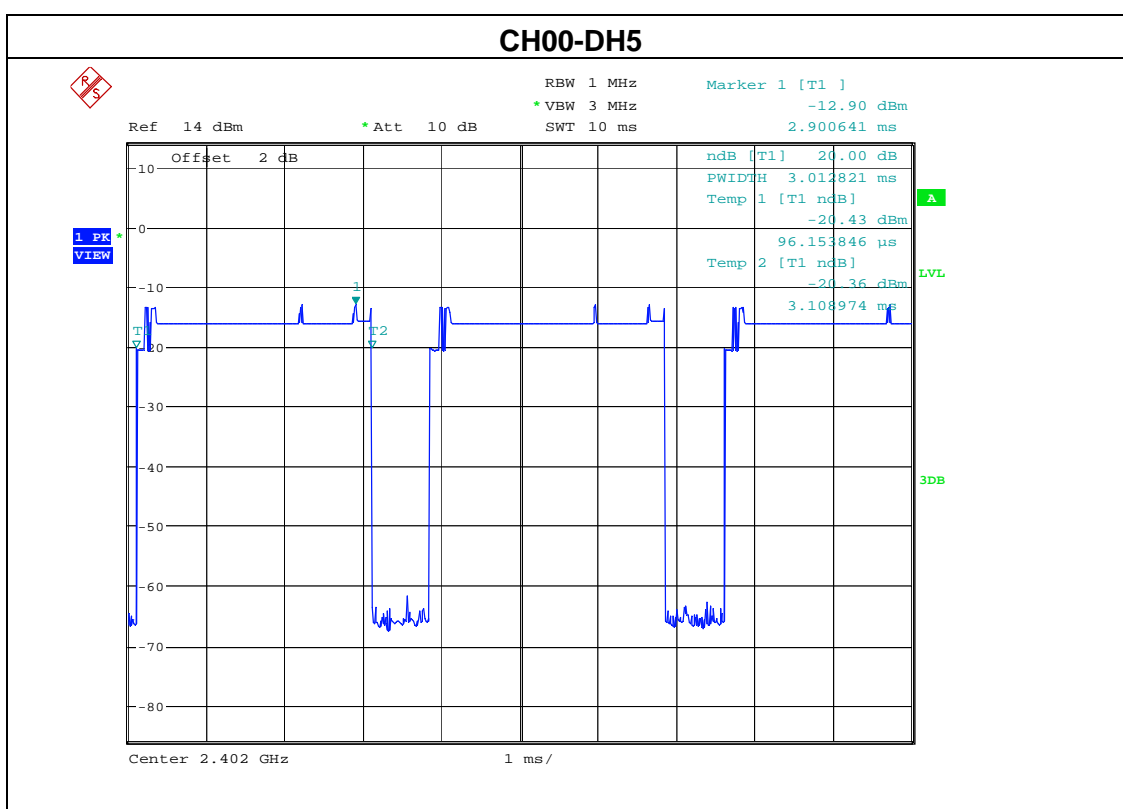

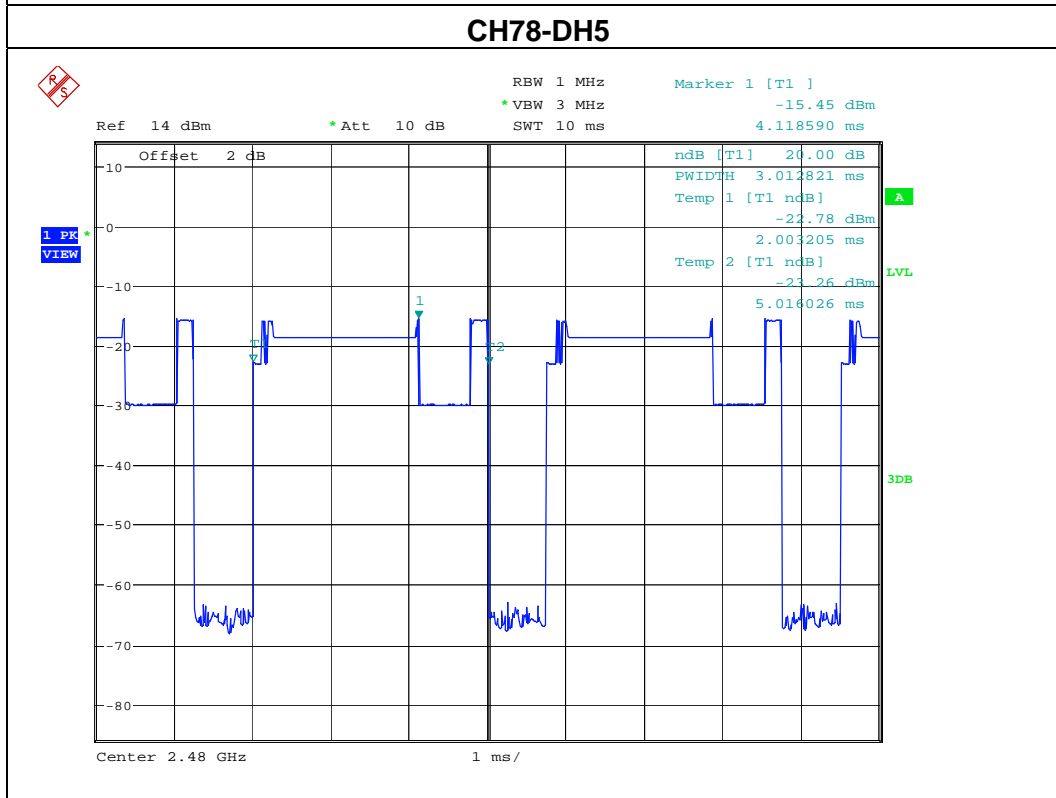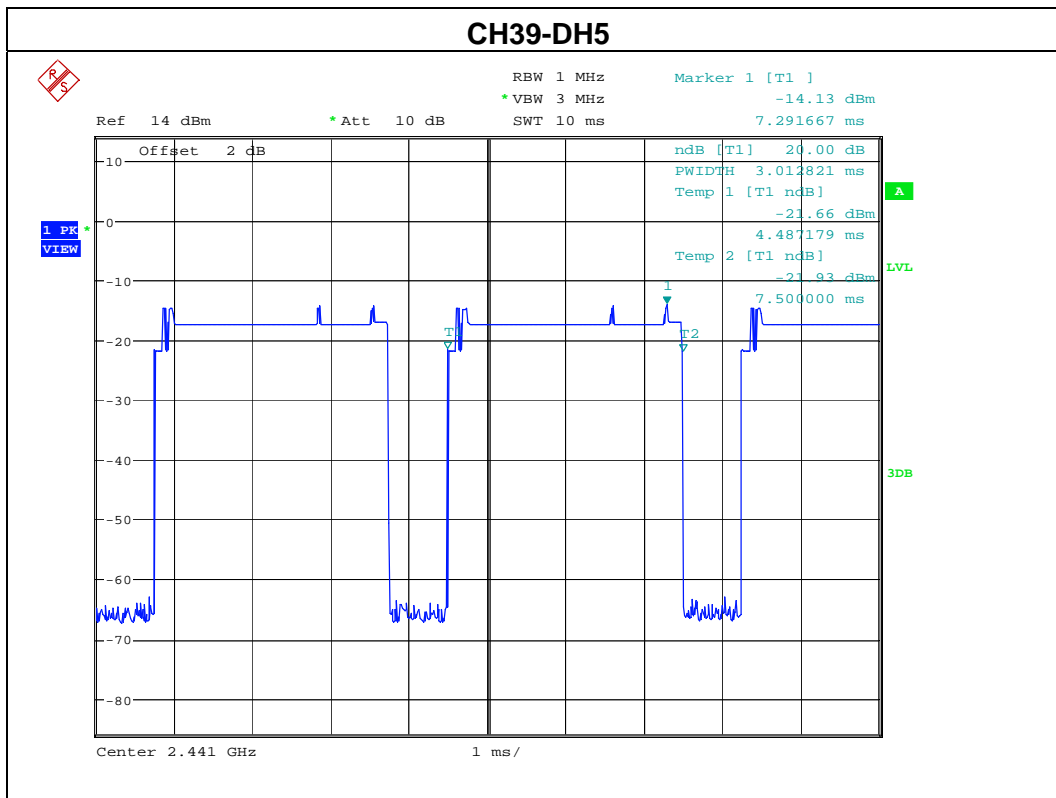

8. HOPPING CHANNEL SEPARATION MEASUREMENT

8.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
VB	Video (or Average) Bandwidth (VBW) \geq RBW
Detector	Peak
Trace	Max hold
Sweep Time	Auto

8.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
4. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
5. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
6. Repeat above procedures until all frequencies measured were complete.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS


The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS


EUT	multimedia speaker	Model Name	EM-3185
Temperature	25 °C	Relative Humidity	60%
Pressure	1012 hPa	Test Result	Pass
Test Mode	CH00 / CH39 /CH78 (1Mbps Mode)	Test Date	June 25,2016

Channel number	Channel frequency (MHz)	Separation Read value (KHz)	Separation limit 2/3 20db down BW(KHz)
00	2402	1000	>468.27
39	2441	1005	>470.07
78	2480	1005	>470.07


Note: 20db bandwidth refer to section 6.1.5

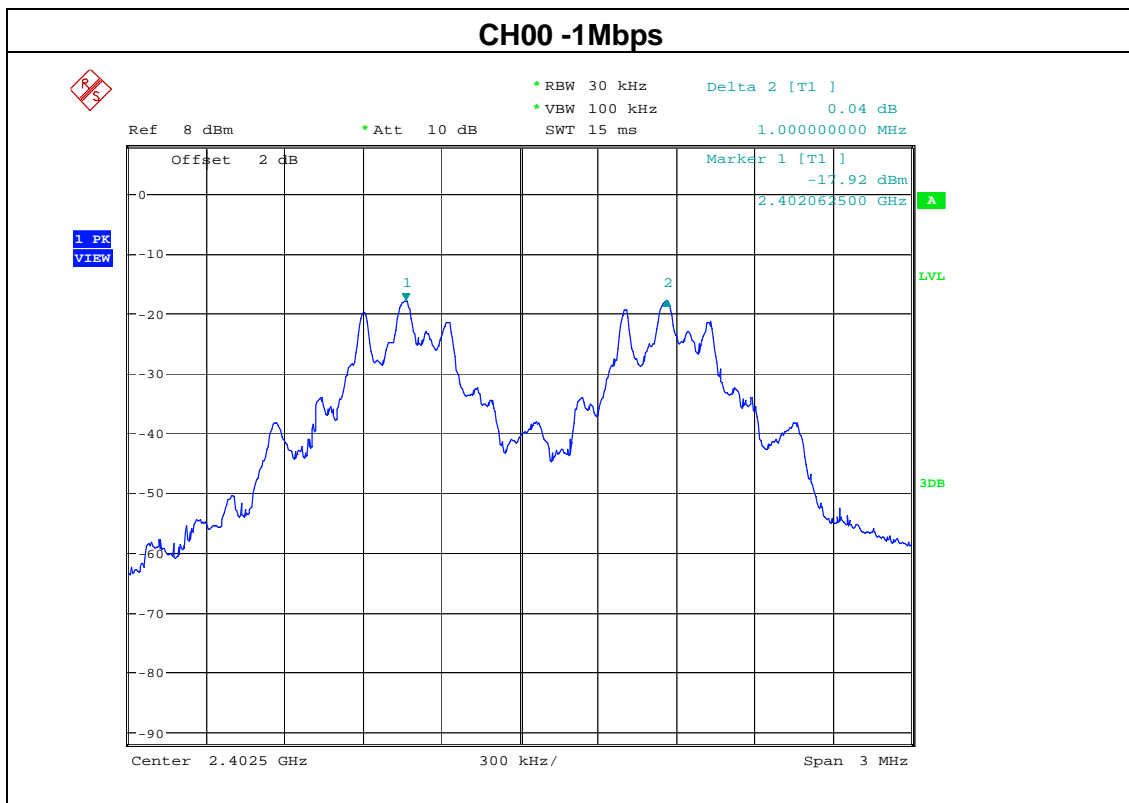

CH39 -1Mbps

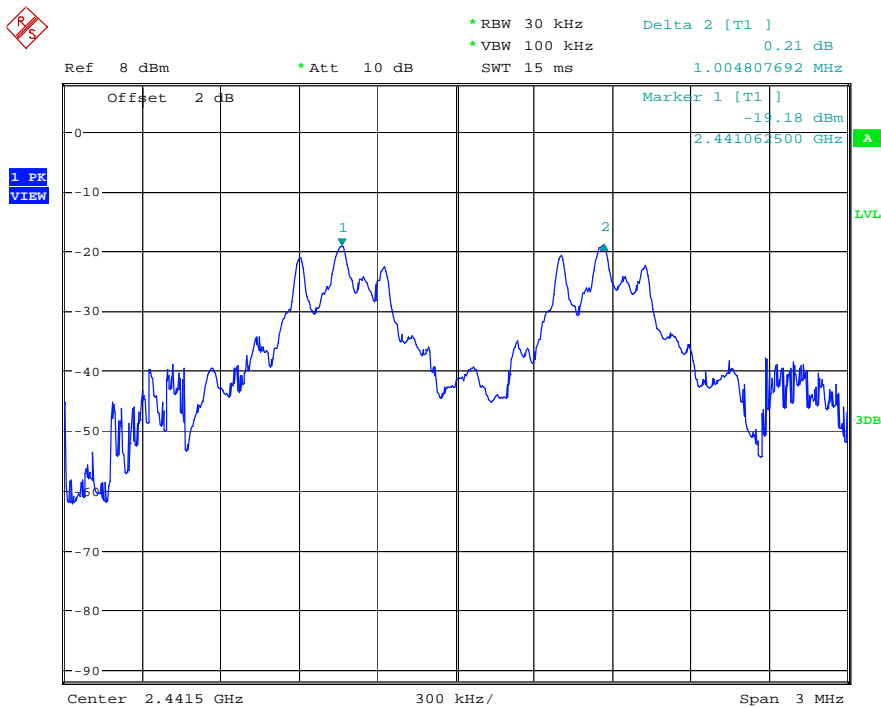


CH78 -1Mbps


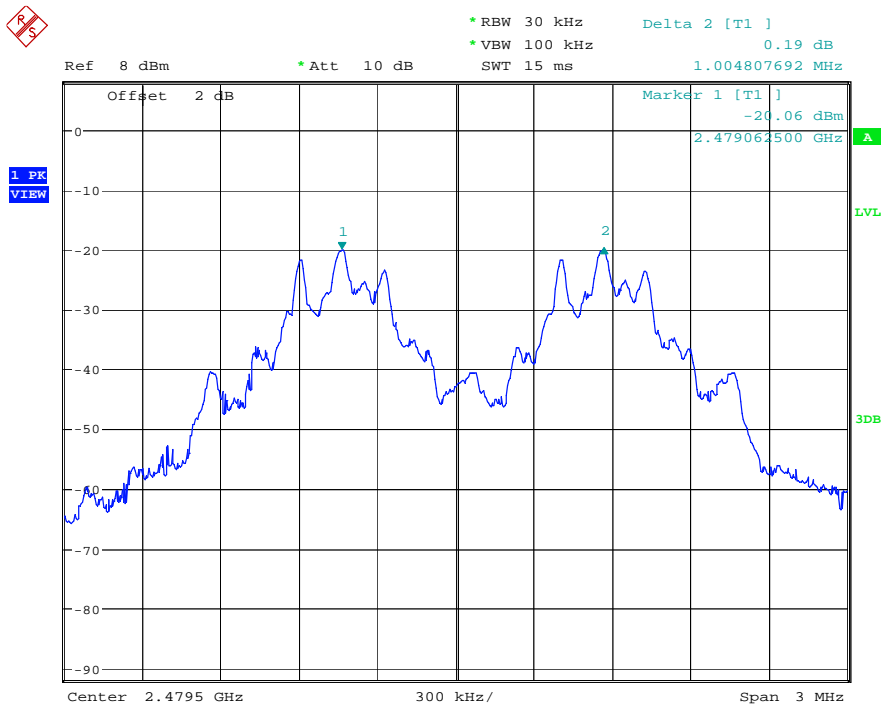


EUT	multimedia speaker	Model Name	EM-3185
Temperature	25 °C	Relative Humidity	60%
Pressure	1012 hPa	Test Result	Pass
Test Mode	CH00 / CH39 /CH78 (2Mbps Mode)	Test Date	June 25,2016

Channel number	Channel frequency (MHz)	Separation Read value (KHz)	Separation limit 2/3 20db down BW(KHz)
00	2402	1000	>730.67
39	2441	995.2	>730.67
78	2480	1000	>726.67

Note: 20db bandwidth refer to section 6.1.5

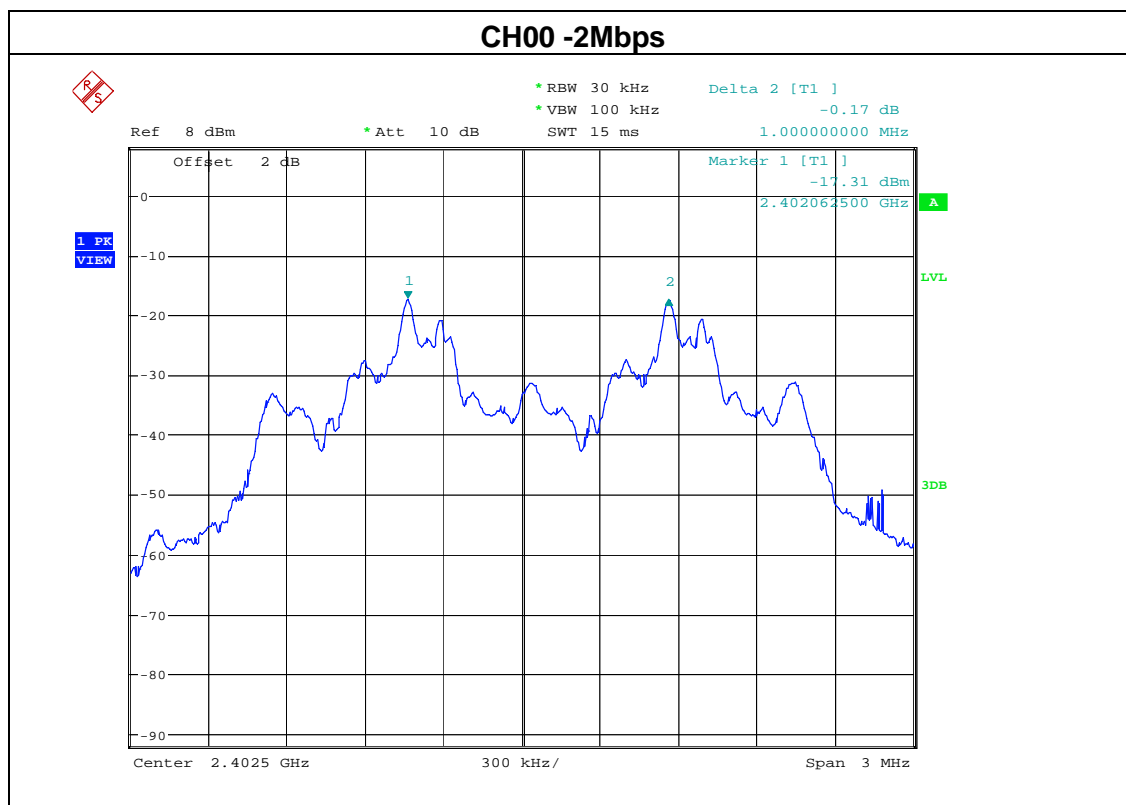


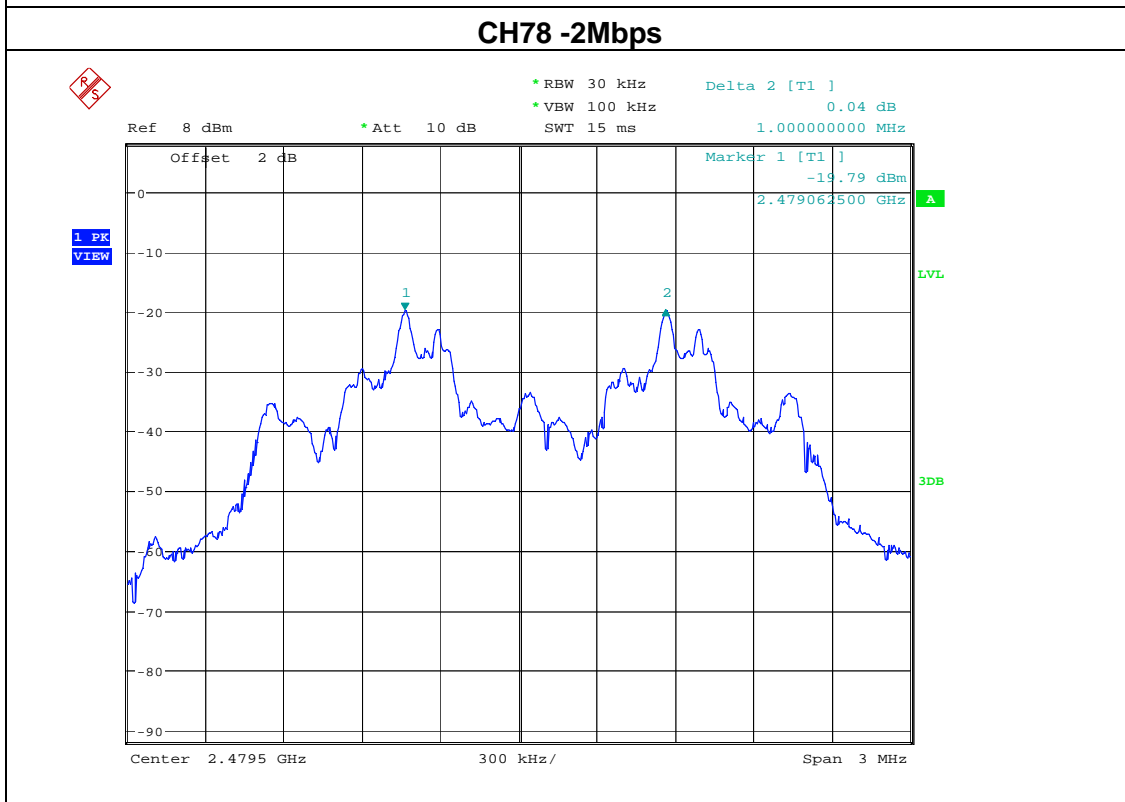
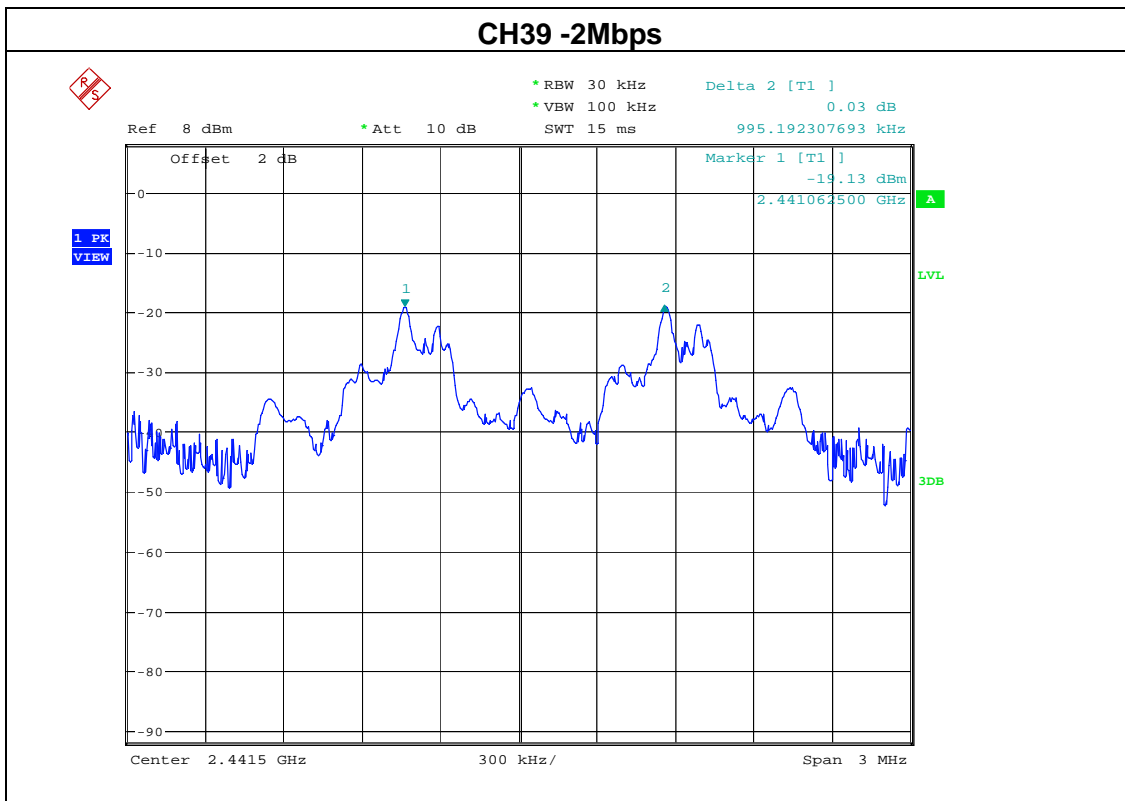


EUT	multimedia speaker	Model Name	EM-3185
Temperature	25 °C	Relative Humidity	60%
Pressure	1012 hPa	Test Result	Pass
Test Mode	CH00 / CH39 /CH78 (3Mbps Mode)	Test Date	June 25,2016

Channel number	Channel frequency (MHz)	Separation Read value (KHz)	Separation limit 2/3 20db down BW(KHz)
00	2402	1010	>746.00
39	2441	1005	>743.33
78	2480	1005	>767.33

Note: 20db bandwidth refer to section 6.1.5

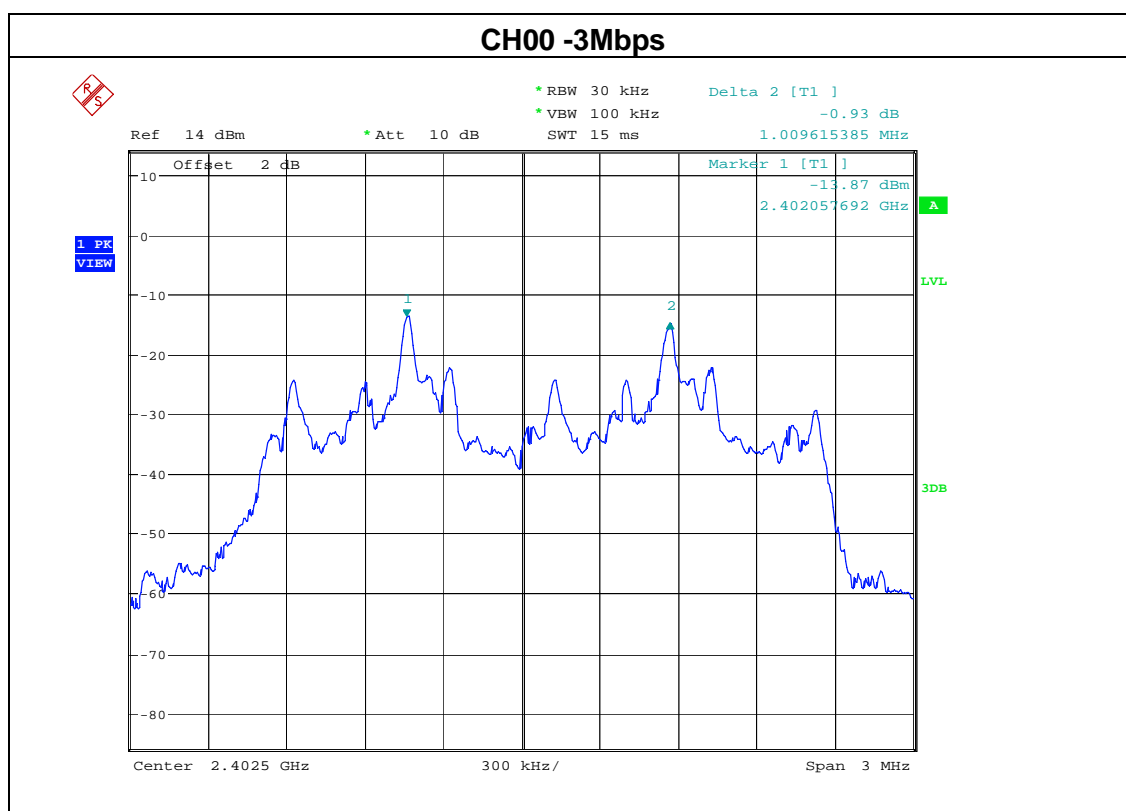

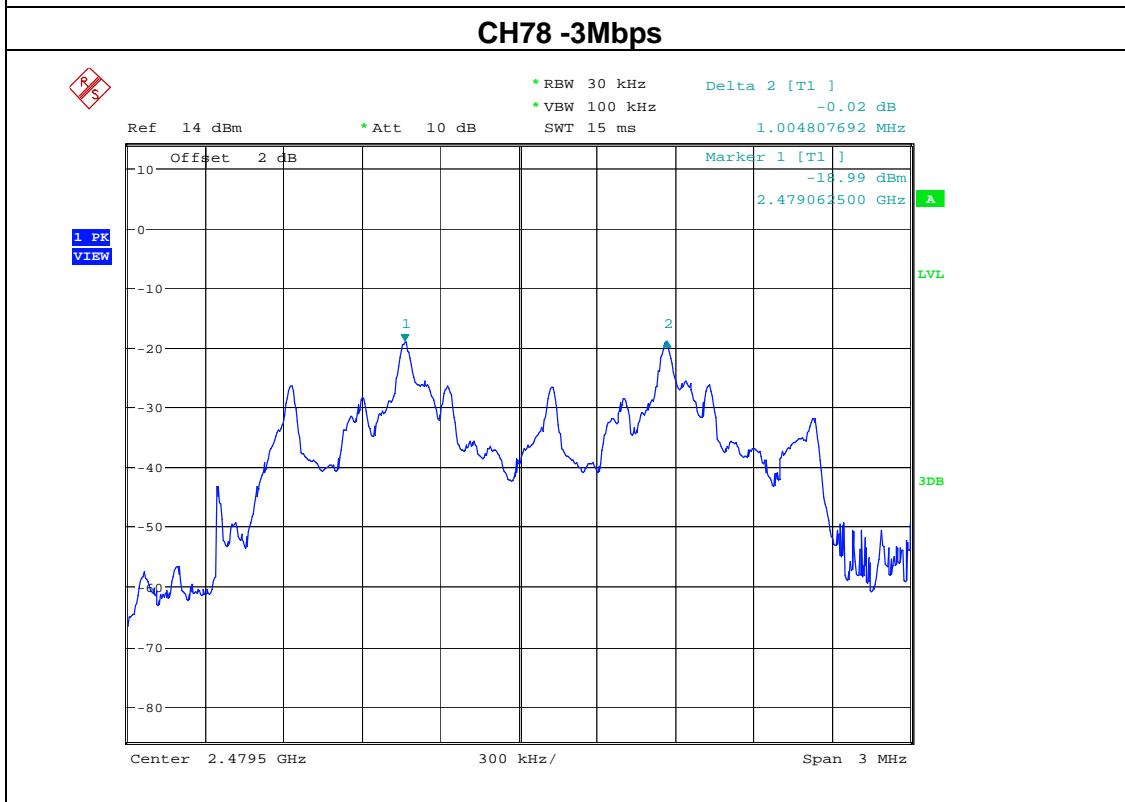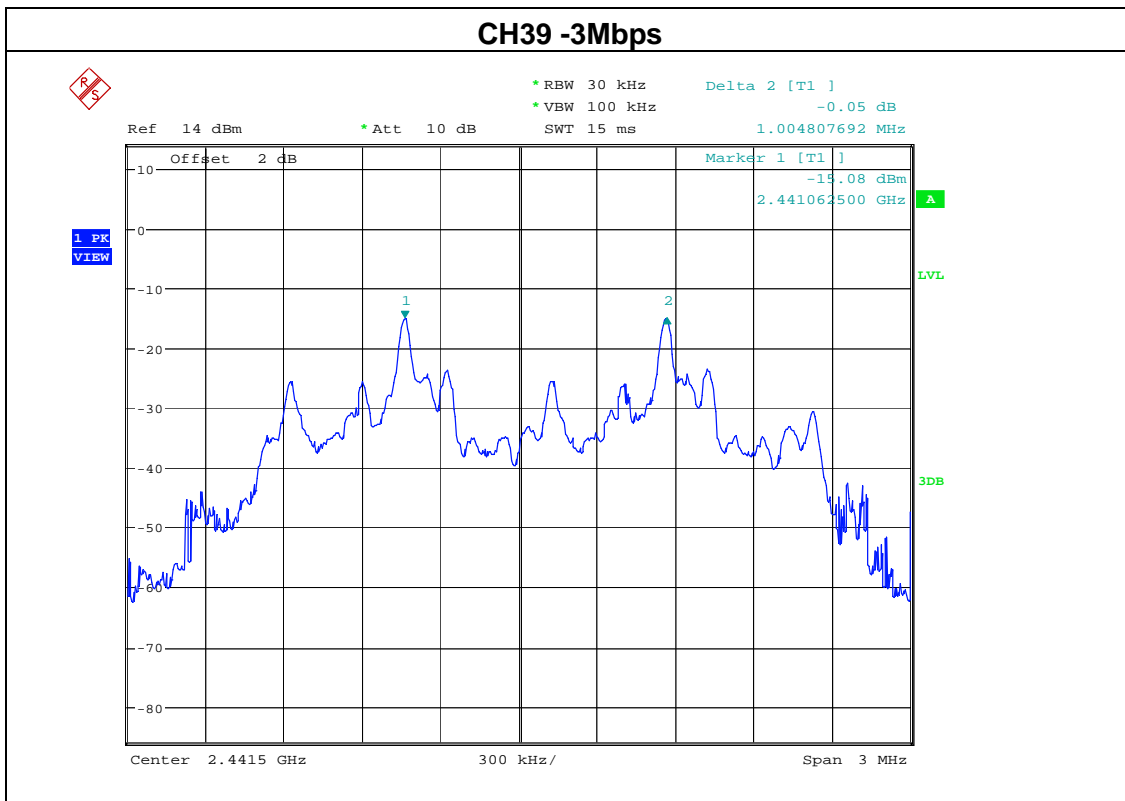

9. BANDWIDTH TEST**9.1 APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	100kHz
VB	300 kHz
Detector	Peak
Trace	Max hold
Sweep Time	Auto

9.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as follows: VBW =100kHz, RBW=300kHz, Sweep = auto
Detector function = peak ,Trace = max hold
4. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
5. Repeat above procedures until all frequencies measured were complete.

9.3 DEVIATION FROM STANDARD

No deviation.


9.4 TEST SETUP**9.5 EUT OPERATION CONDITIONS**



The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

EUT	MULTIMEDIA SPEAKER	Model Name	EM-3185
Temperature	25 °C	Relative Humidity	60%
Pressure	1012 hPa	Test Mode	CH00/CH39/C78(1Mbps)
Test Date	June 25,2016		


Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	702.4	PASS
2441 MHz	705.1	PASS
2480 MHz	705.1	PASS


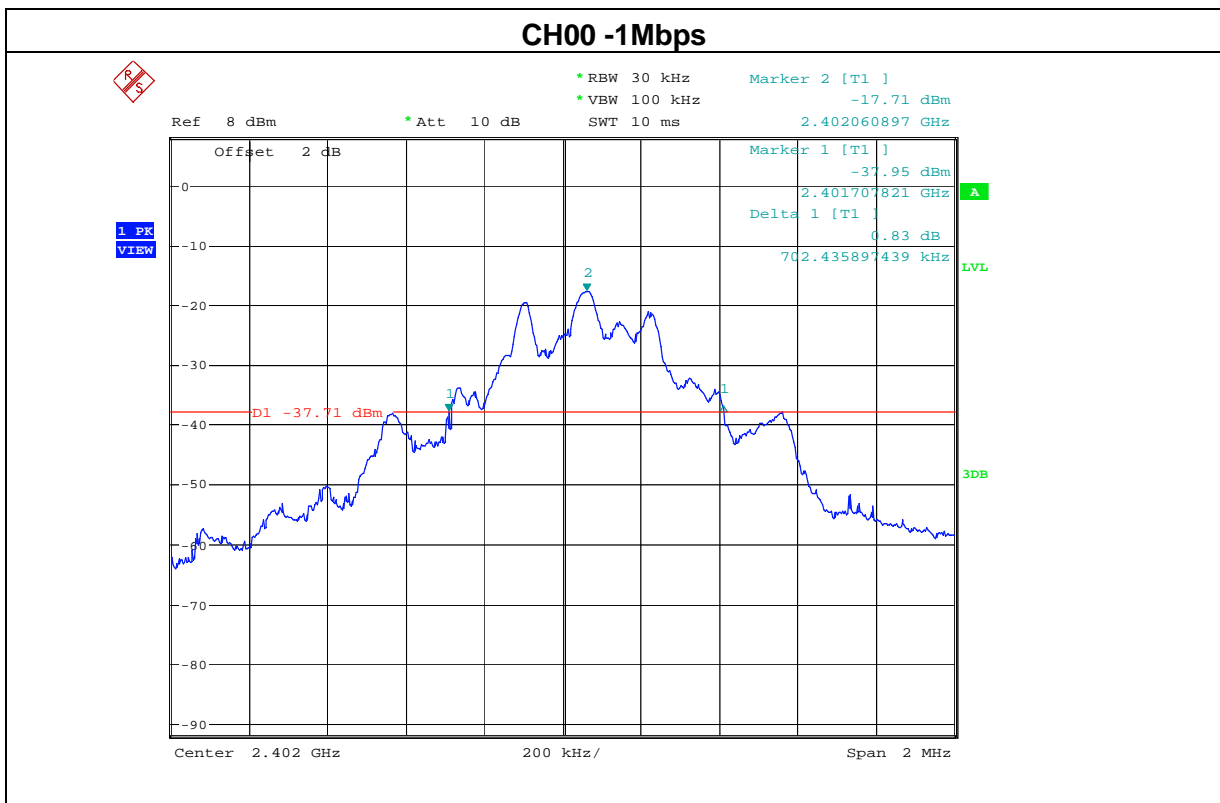


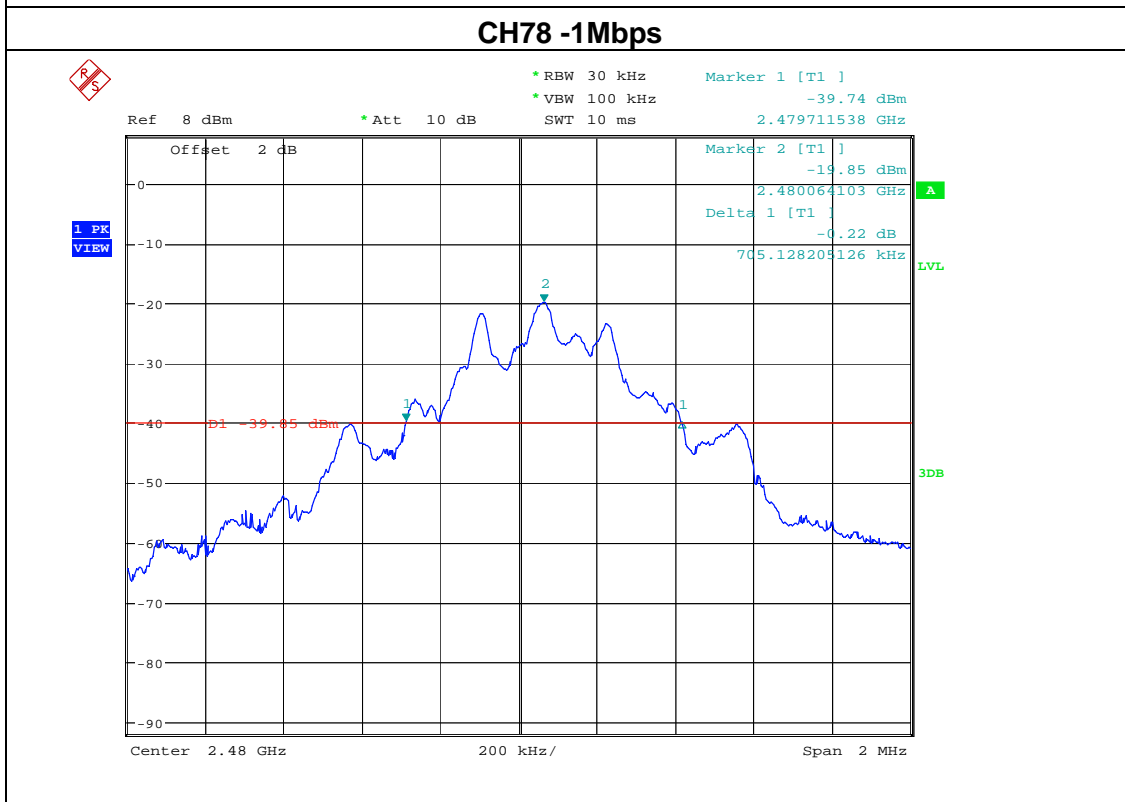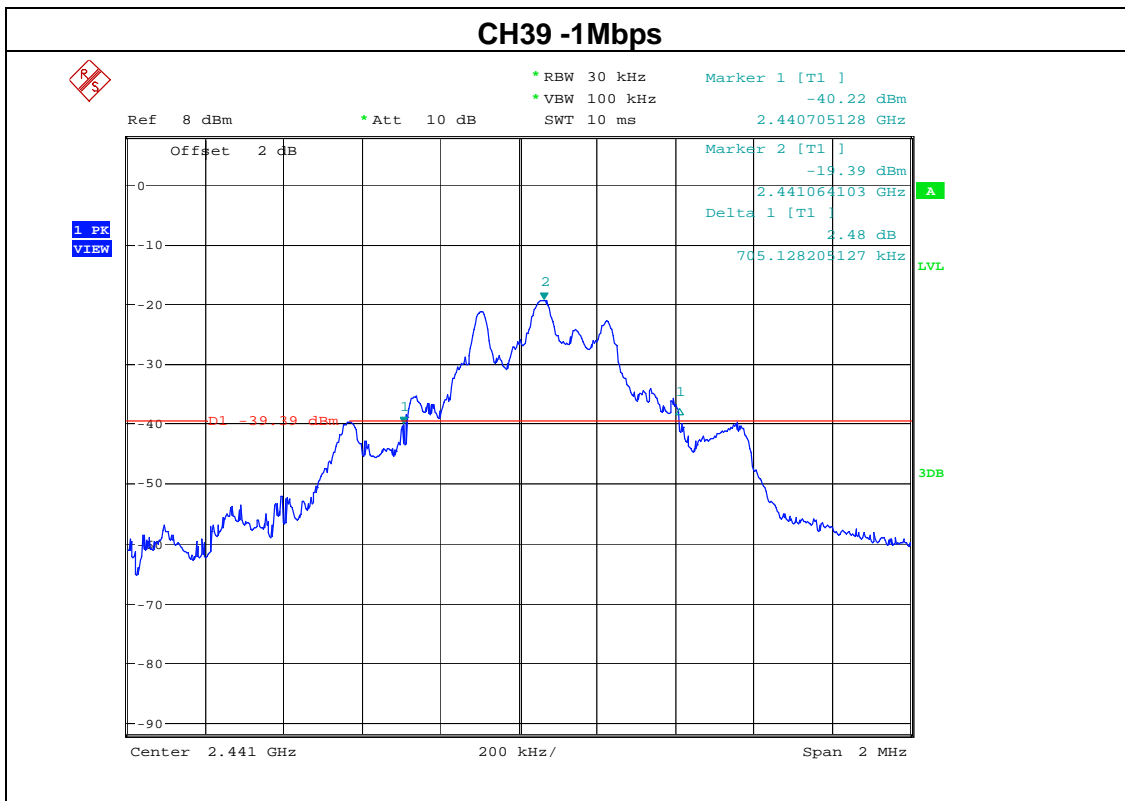

EUT	multimedia speaker	Model Name	EM-3185
Temperature	25 °C	Relative Humidity	60%
Pressure	1012 hPa	Test Mode	CH00/CH39/C78(2Mbps)
Test Date	June 25,2016		


Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	1096	PASS
2441 MHz	1096	PASS
2480 MHz	1090	PASS


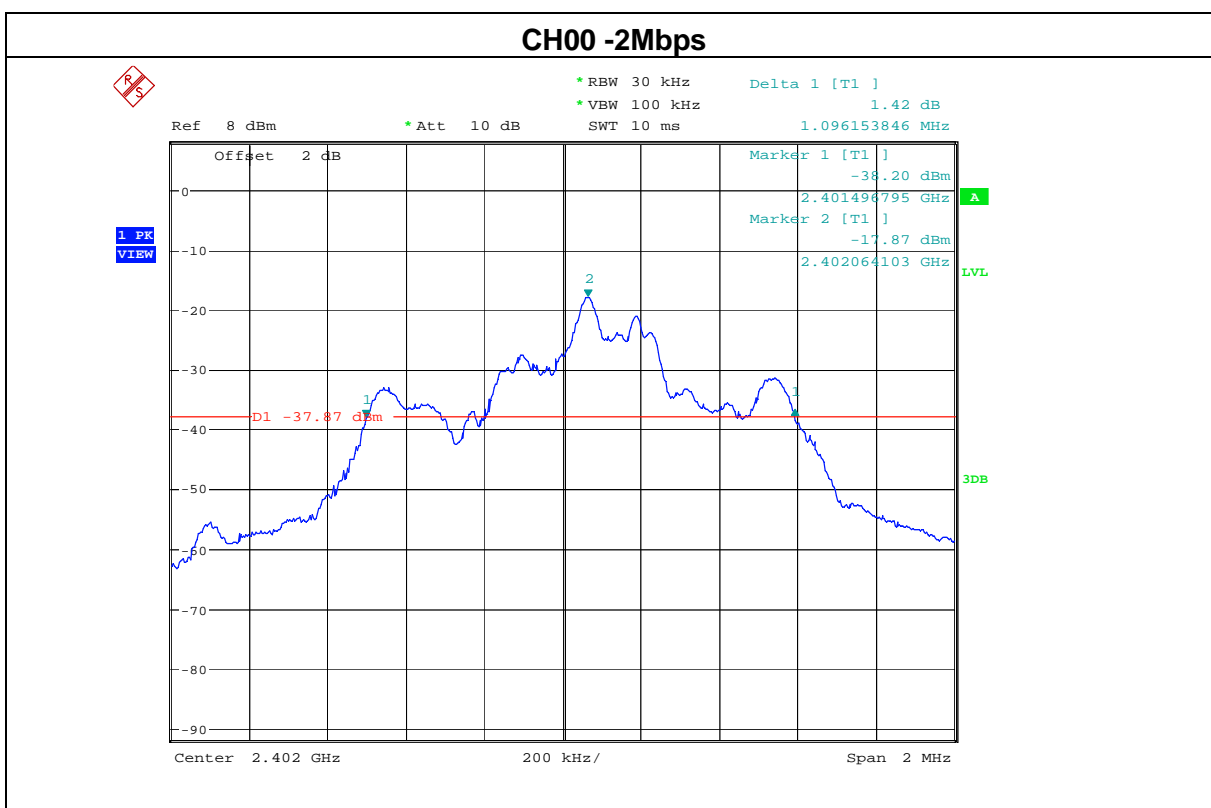


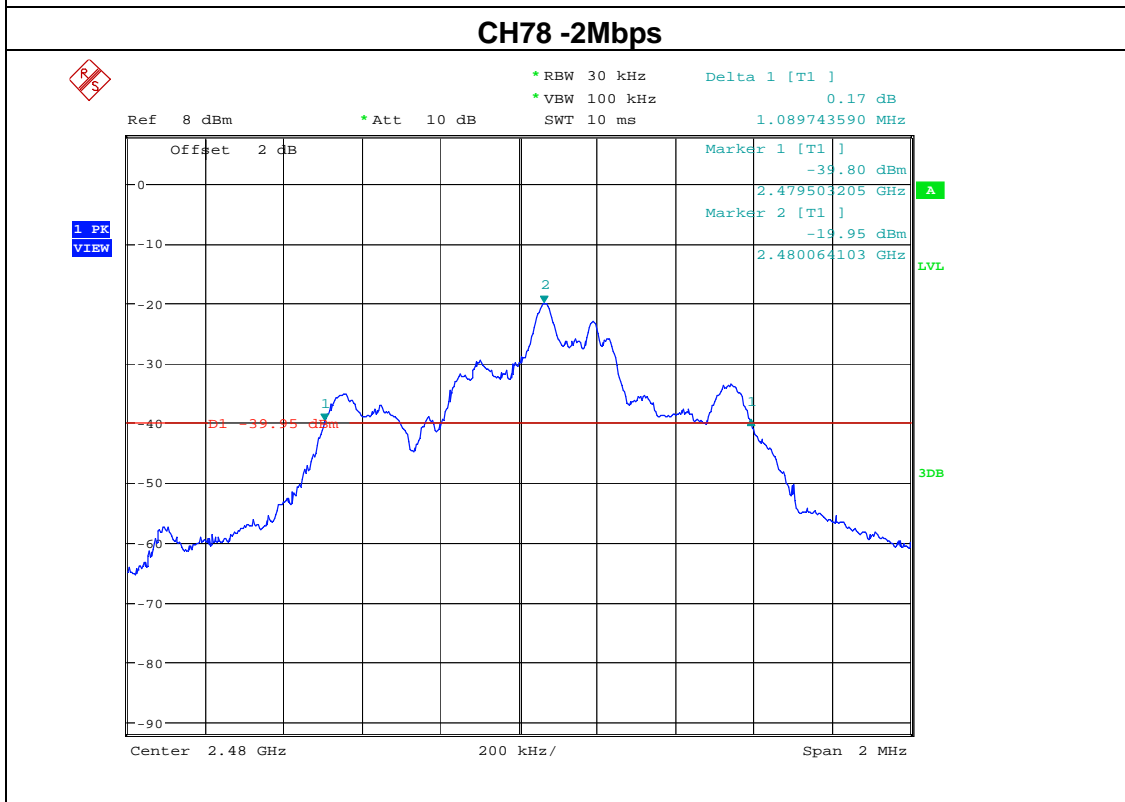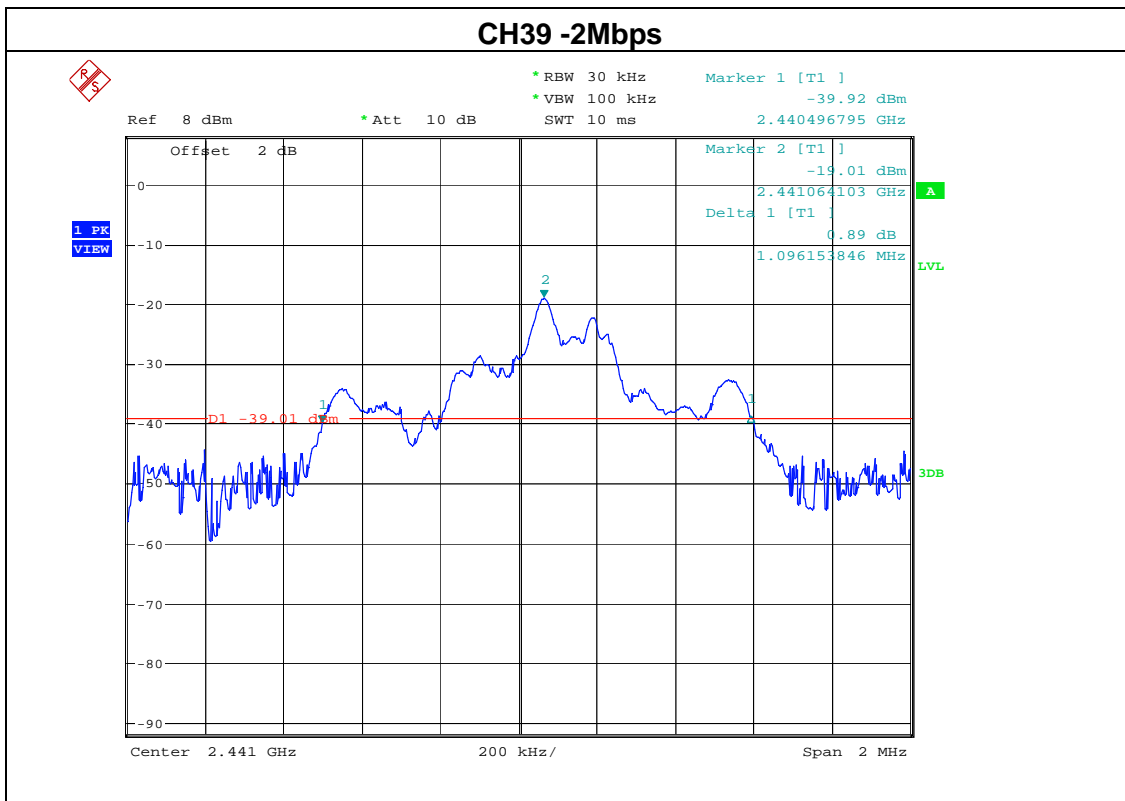

EUT	multimedia speaker	Model Name	EM-3185
Temperature	25 °C	Relative Humidity	60%
Pressure	1012 hPa	Test Mode	CH00/CH39/C78(3Mbps)
Test Date	June 25,2016		

Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	1119	PASS
2441 MHz	1115	PASS
2480 MHz	1151	PASS

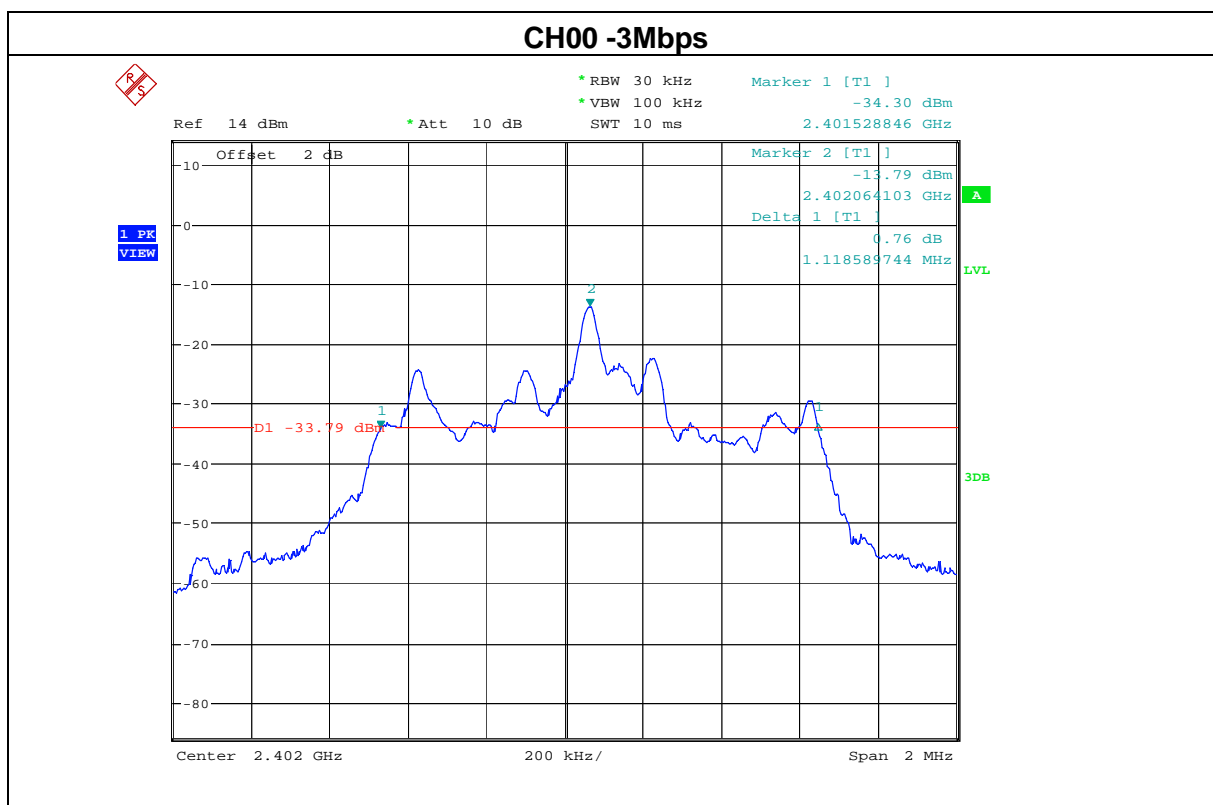

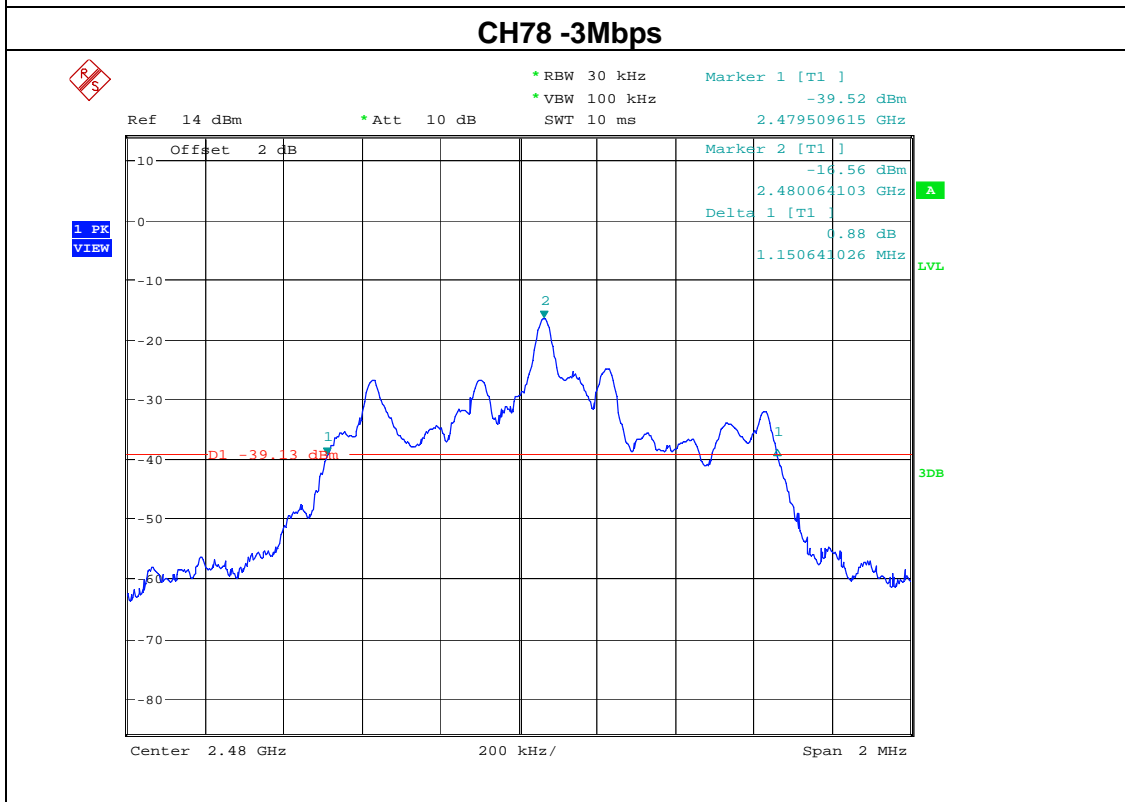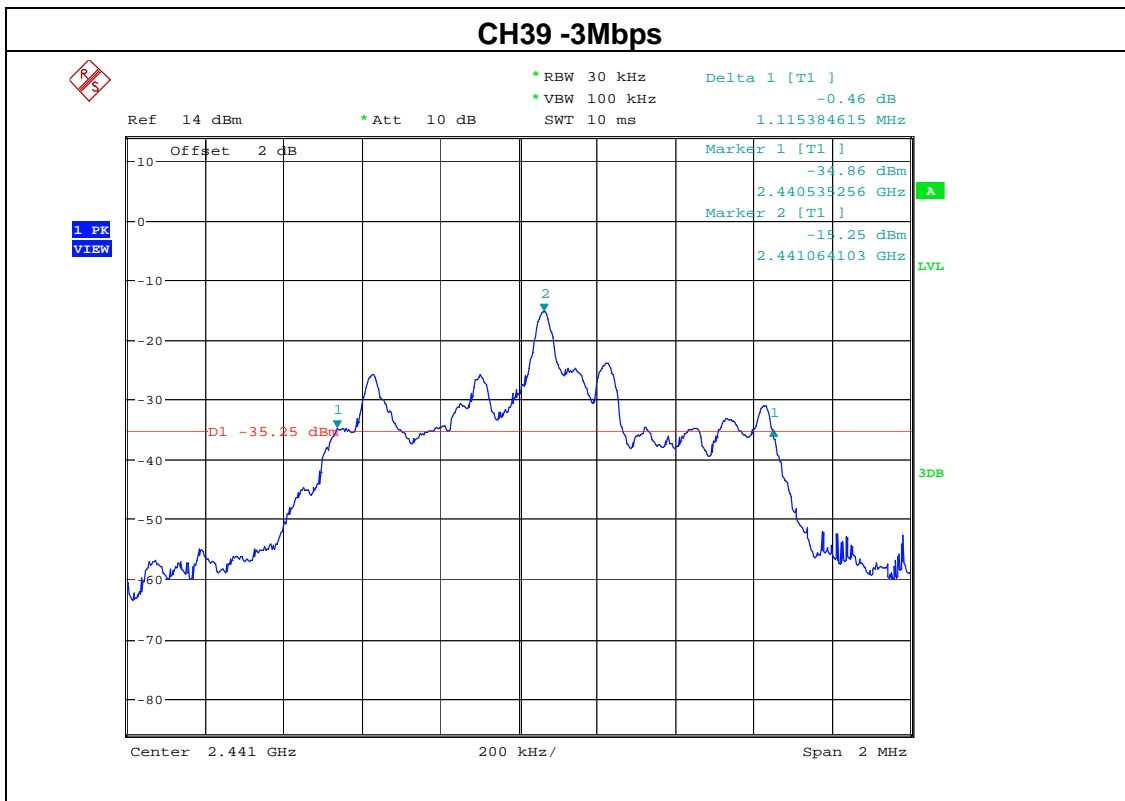

10. PEAK OUTPUT POWER TEST**10.1 APPLIED PROCEDURES / LIMIT**


FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(i)	Peak Output Power	1W for 1Mbps 0.125W for 2/3Mbps	2400-2483.5	PASS

10.2 TEST PROCEDURE

- a. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter through a power sensor and antenna output port as show in the block diagram below,
- b. Record the result

10.3 DEVIATION FROM STANDARD

No deviation.

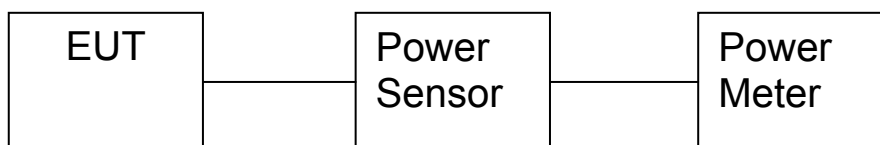10.4 TEST SETUP**10.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

10.6 TEST RESULTS

EUT	multimedia speaker	Model Name	EM-3185
Temperature	25 °C	Relative Humidity	60%
Pressure	1012 hPa	Test Mode	CH00/ CH39 /CH78 (1M/2M/3Mbps Mode)
Test Date	June 25,2016		

1Mbps				
Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT(dBm)	Result
CH00	2402	2.70	30	Pass
CH39	2441	2.62	30	Pass
CH78	2480	2.51	30	Pass
2Mbps				
CH00	2402	1.82	20.96	Pass
CH39	2441	1.81	20.96	Pass
CH78	2480	2.00	20.96	Pass
3Mbps				
CH00	2402	1.83	20.96	Pass
CH39	2441	1.82	20.96	Pass
CH78	2480	1.78	20.96	Pass


11. 100KHZ BAND EDGES MEASUREMENT

11.1 APPLIED PROCEDURES / LIMIT


FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (d)	Band Edges Measurement	(20dB bandwidth)	2400-2483.5	PASS

1Mbps

Channel: Low

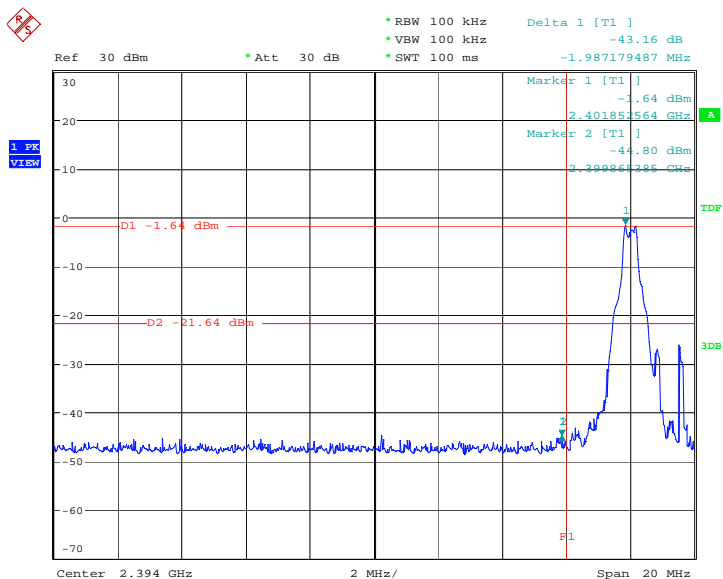


Date: 31.AUG.2016 10:43:02

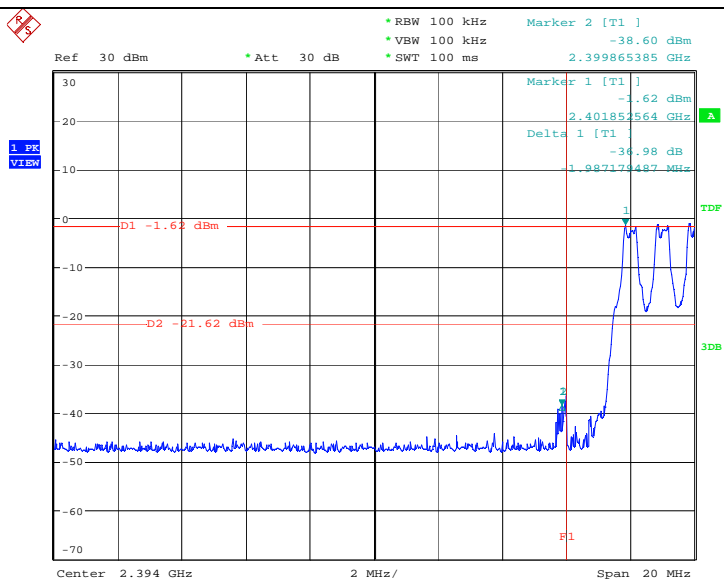


Date: 31.AUG.2016 10:45:37

Channel: High

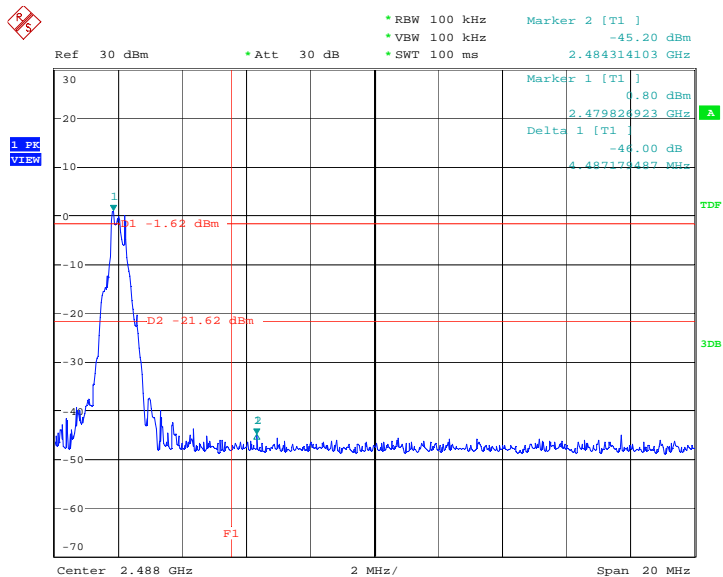


Date: 31.AUG.2016 10:47:44

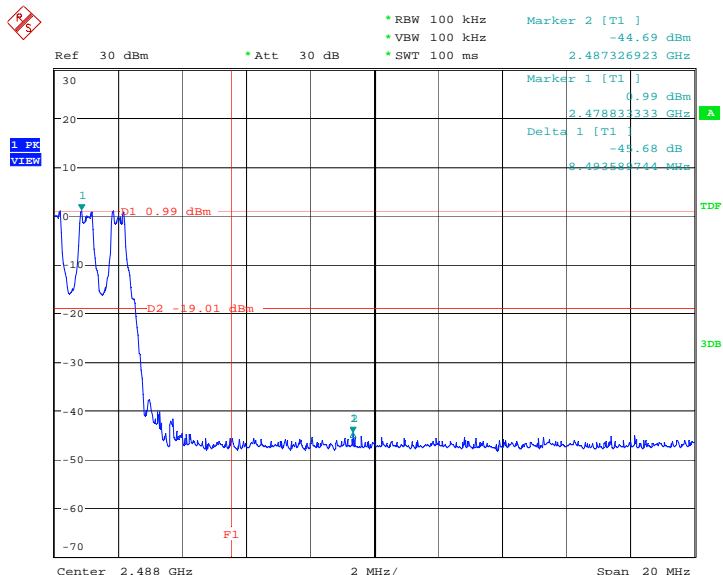


Date: 31.AUG.2016 10:51:41

2Mbps

Channel: Low

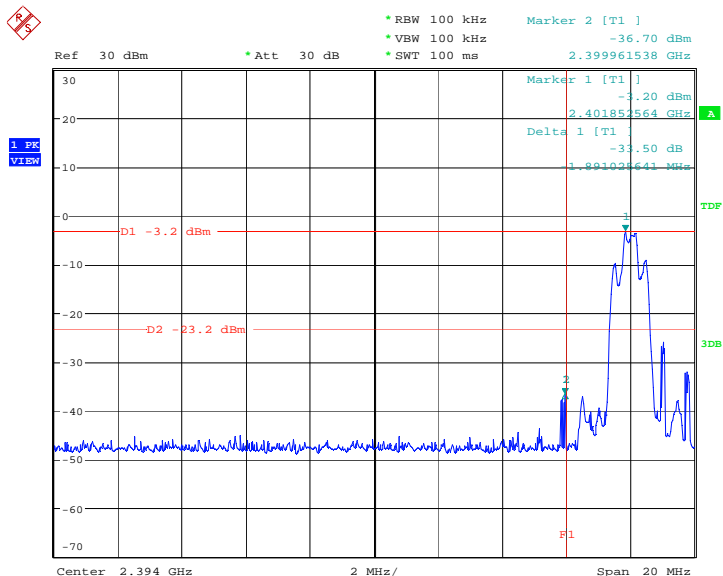


Date: 31.AUG.2016 10:56:47

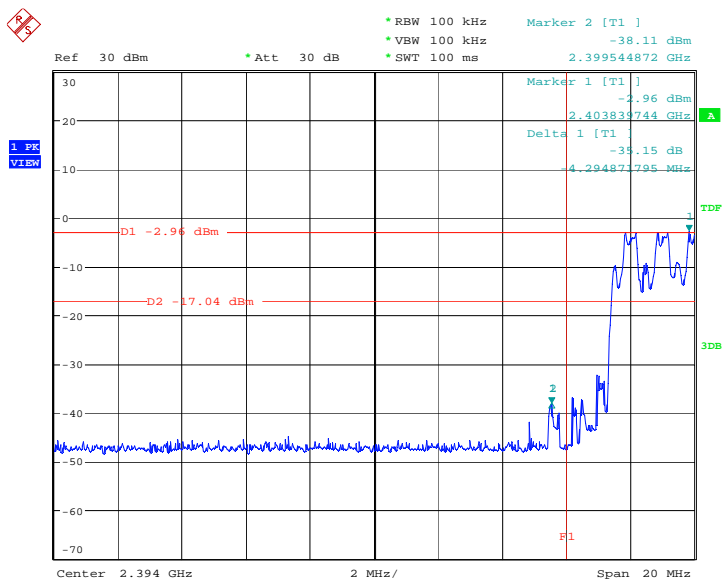


Date: 31.AUG.2016 10:58:21

Channel: High

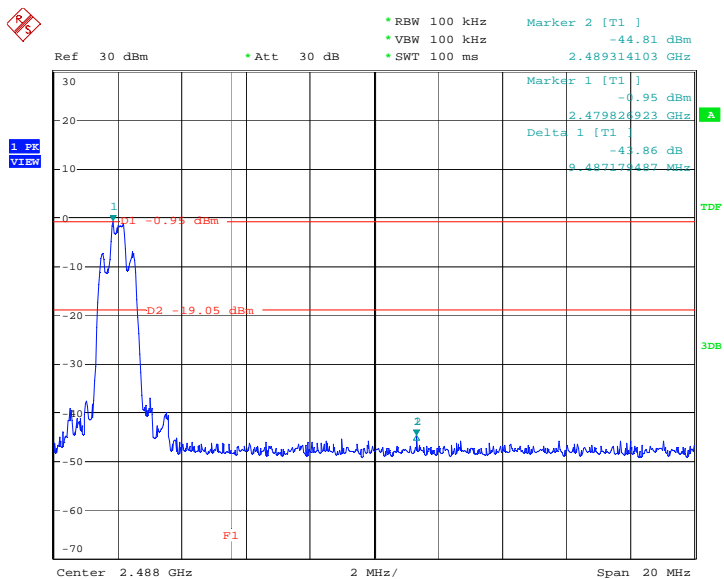


Date: 31.AUG.2016 11:00:14

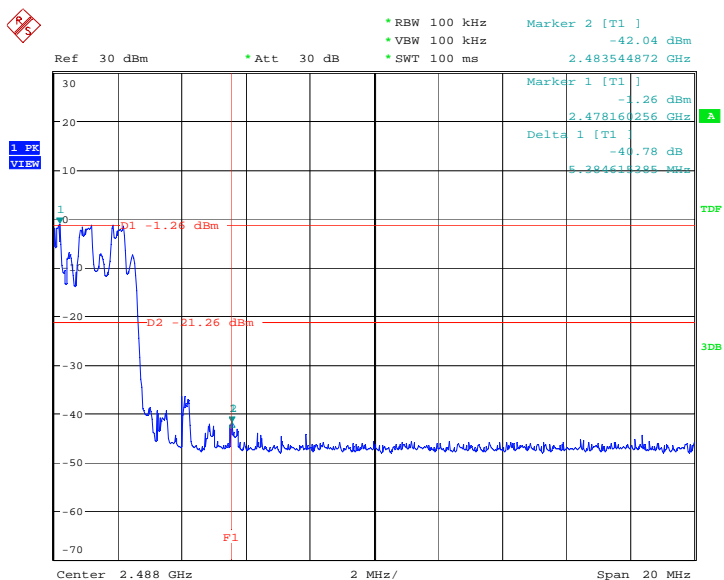


Date: 31.AUG.2016 11:01:57

Channel: High

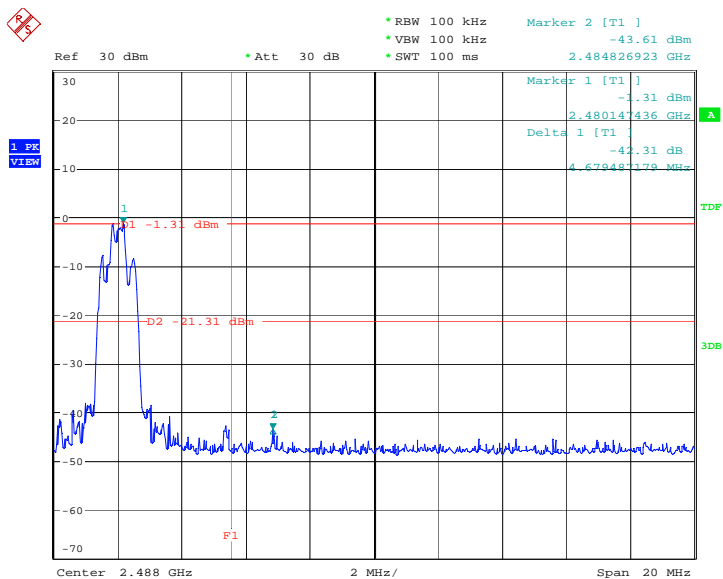


Date: 31.AUG.2016 11:07:31

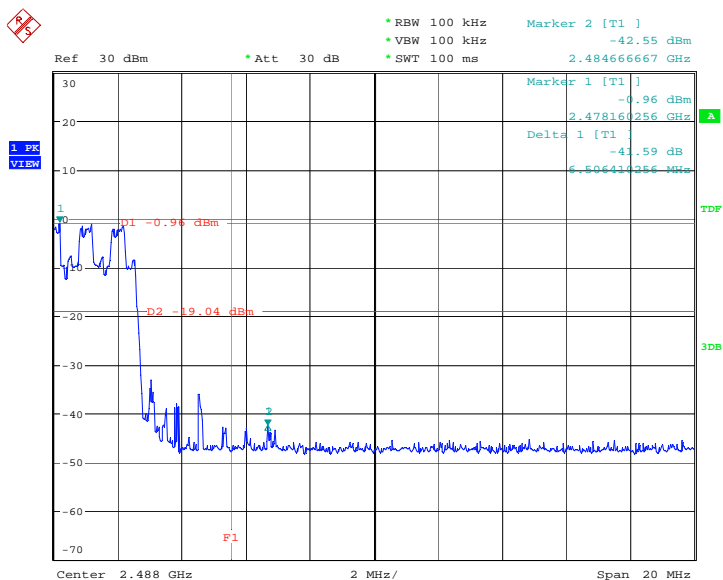


Date: 31.AUG.2016 11:09:04

Conducted Spurious Emission:

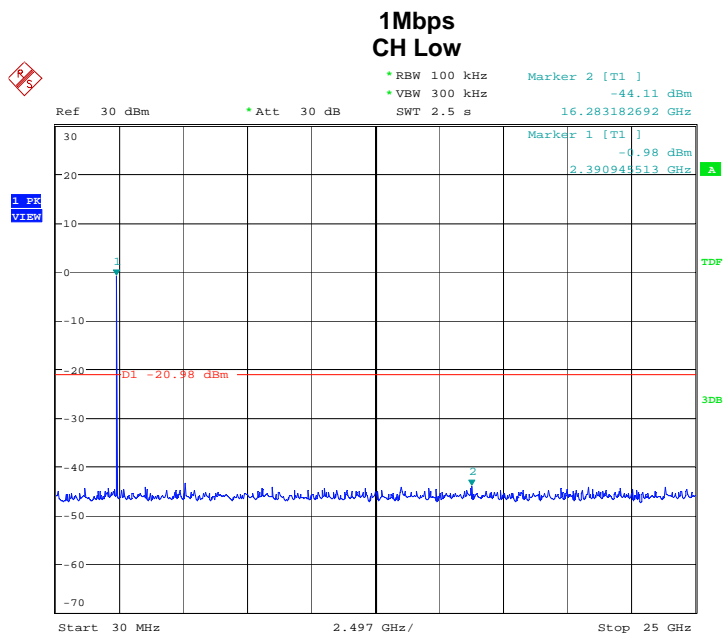


Date: 31.AUG.2016 11:44:11

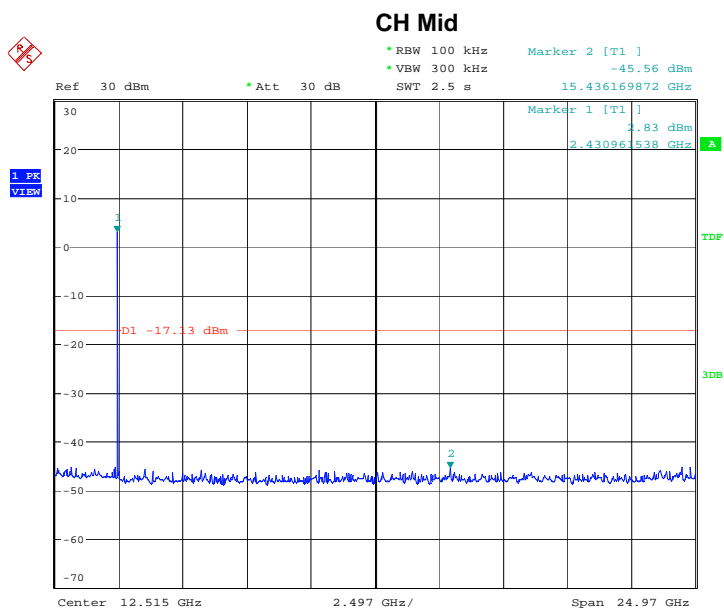


Date: 31.AUG.2016 10:07:55

CH High

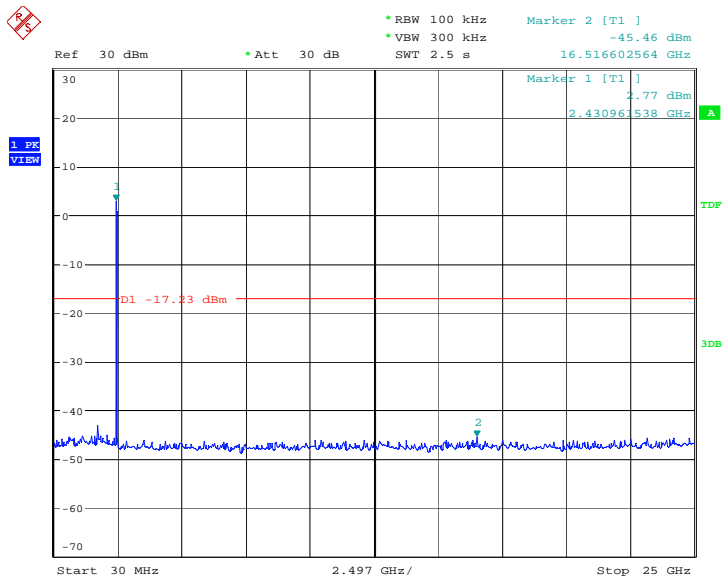


Date: 31.AUG.2016 10:09:52

2Mbps CH Low

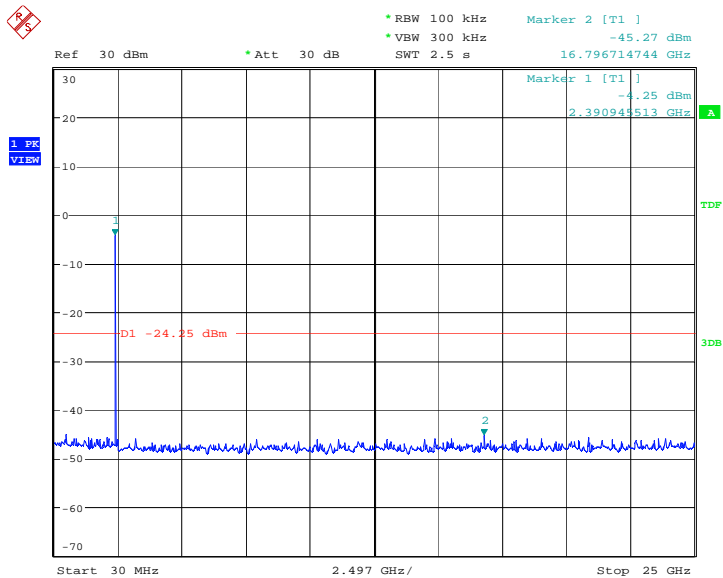


Date: 31.AUG.2016 10:11:22

CH Mid

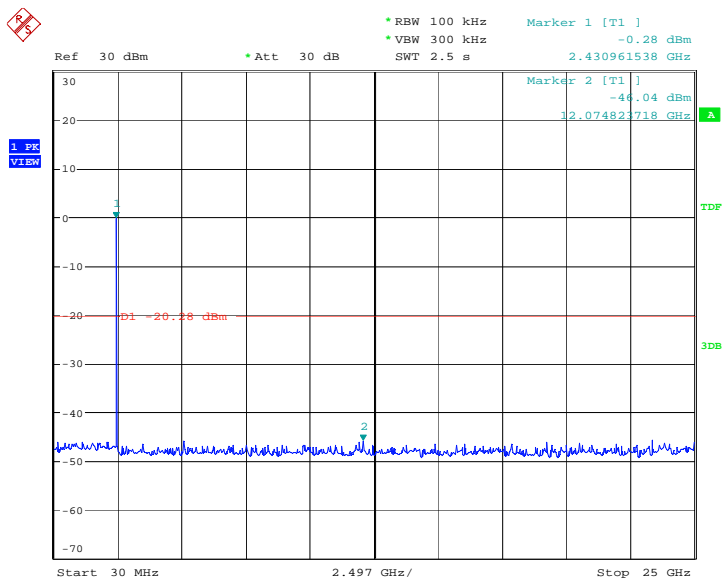


Date: 31.AUG.2016 10:12:27

CH High

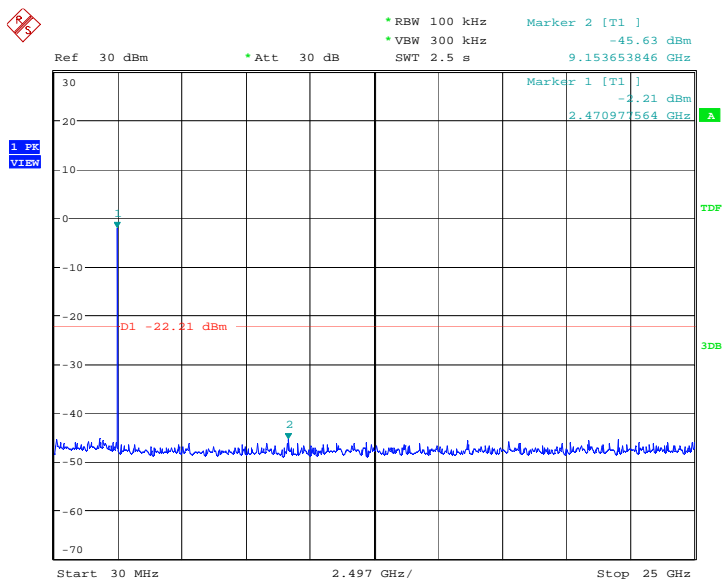


Date: 31.AUG.2016 10:14:43

3Mbps CH Low

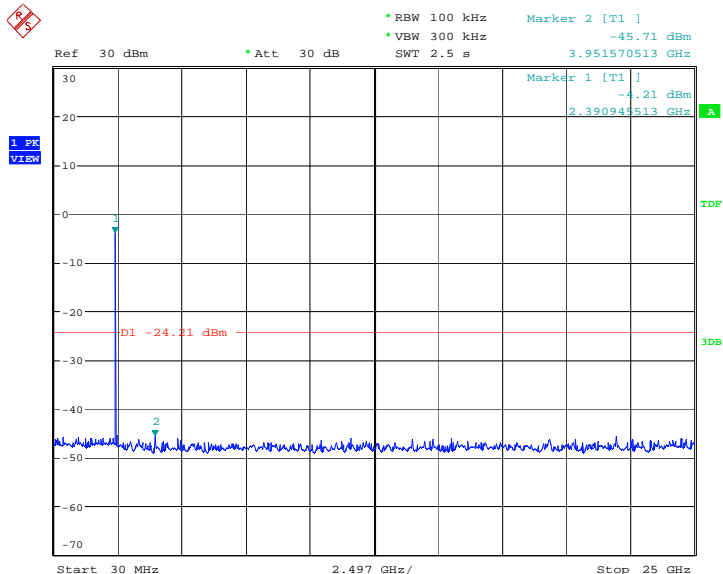


Date: 31.AUG.2016 10:16:14

CH Mid

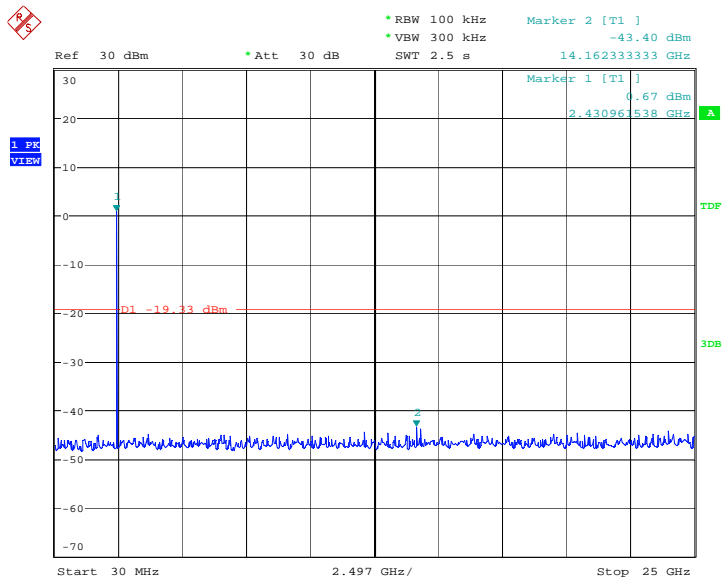

Date: 31.AUG.2016 11:45:54

CH High

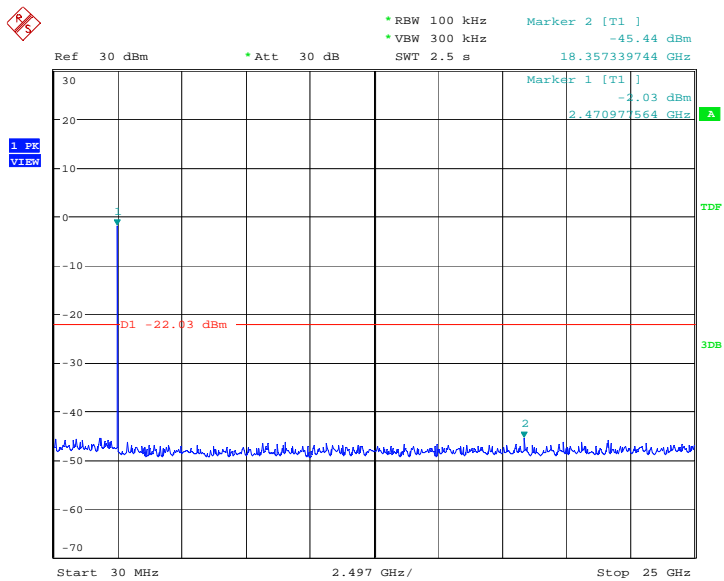

Date: 31.AUG.2016 10:18:43

12. ANTENNA APPLICATION

12.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247

12.2 Result


The EUT's antenna integrated on PCB, The antenna's gain is 1.0dBi and meets the requirement.

13. EUT TEST PHOTO


CONDUCTED EMISSION TEST




RADIATED EMISSION TEST

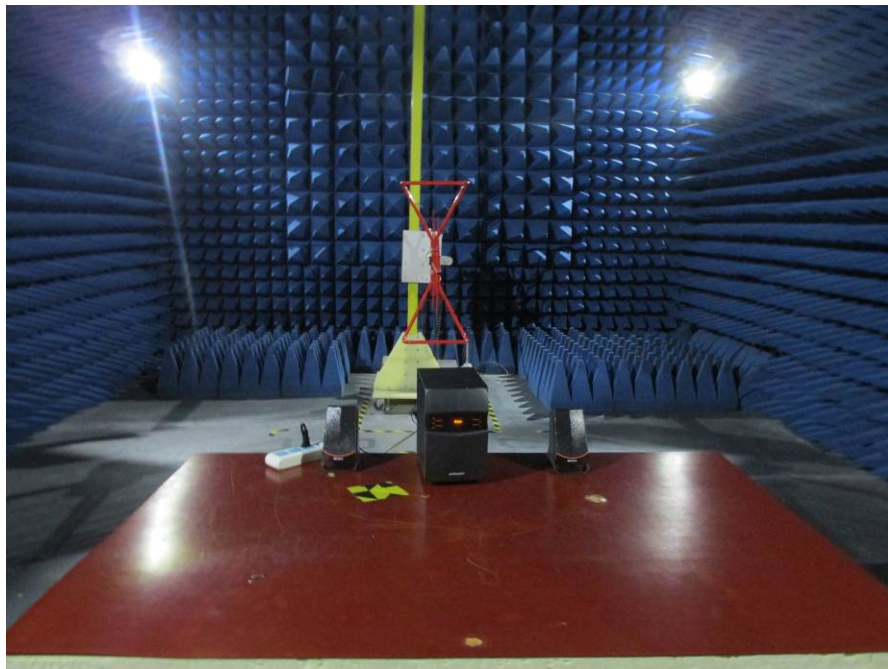

RADIATED EMISSION TEST

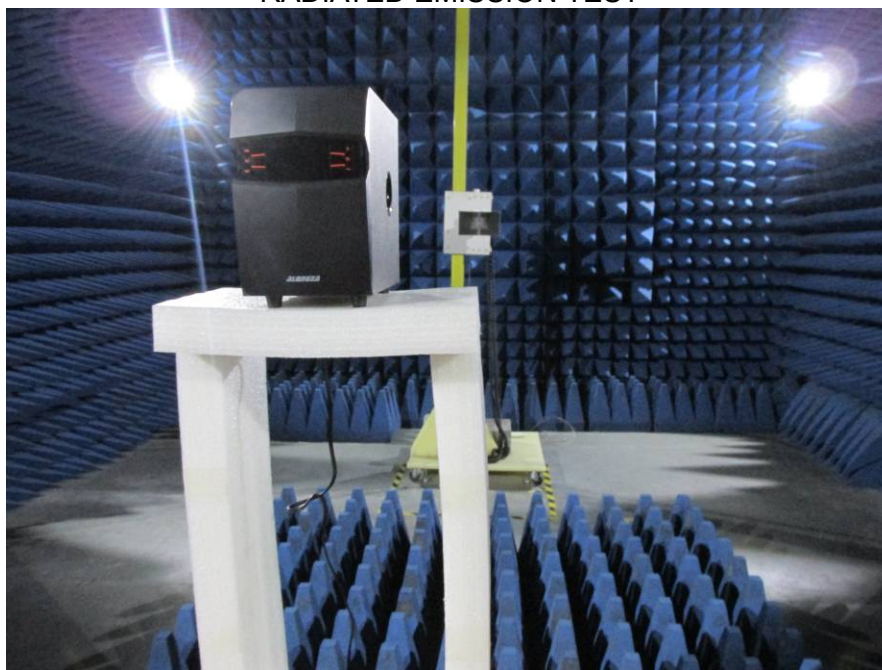

RF TEST

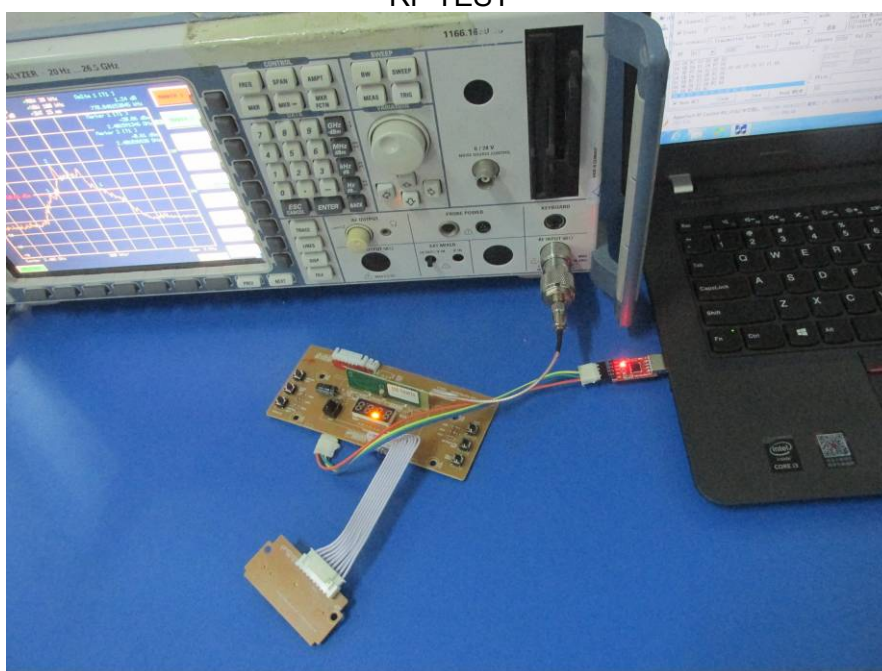


14. PHOTOGRAPHS OF EUT

Appearance photograph of EUT



Appearance photograph of EUT

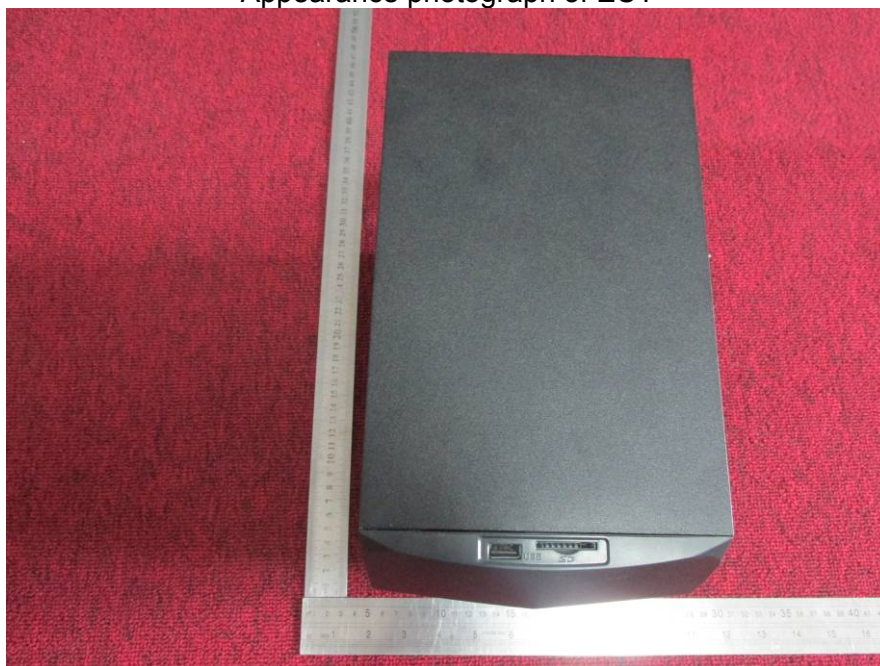

Appearance photograph of EUT



Appearance photograph of EUT



Appearance photograph of EUT




Appearance photograph of EUT




Appearance photograph of EUT



Internal photograph of EUT

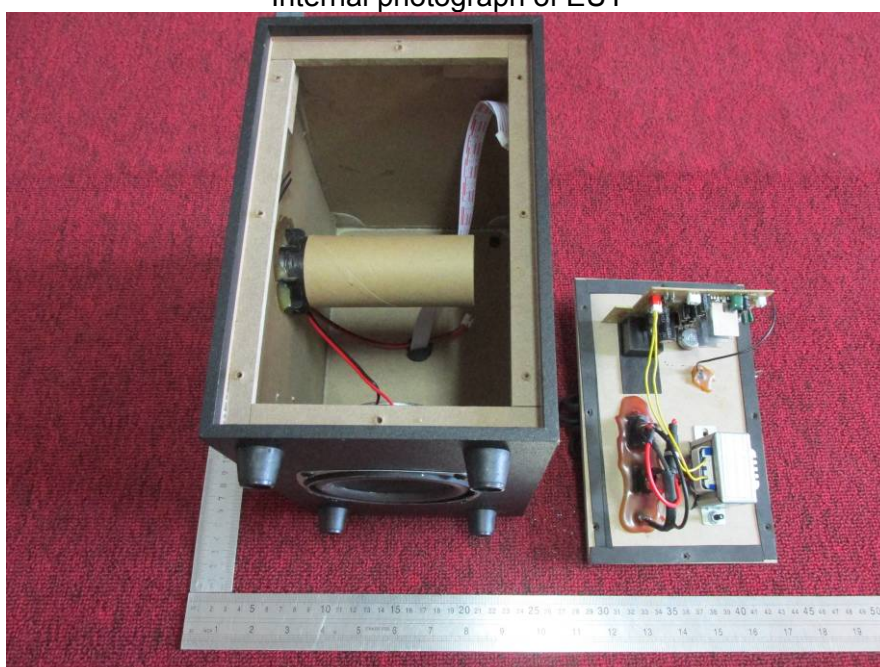

Internal photograph of EUT

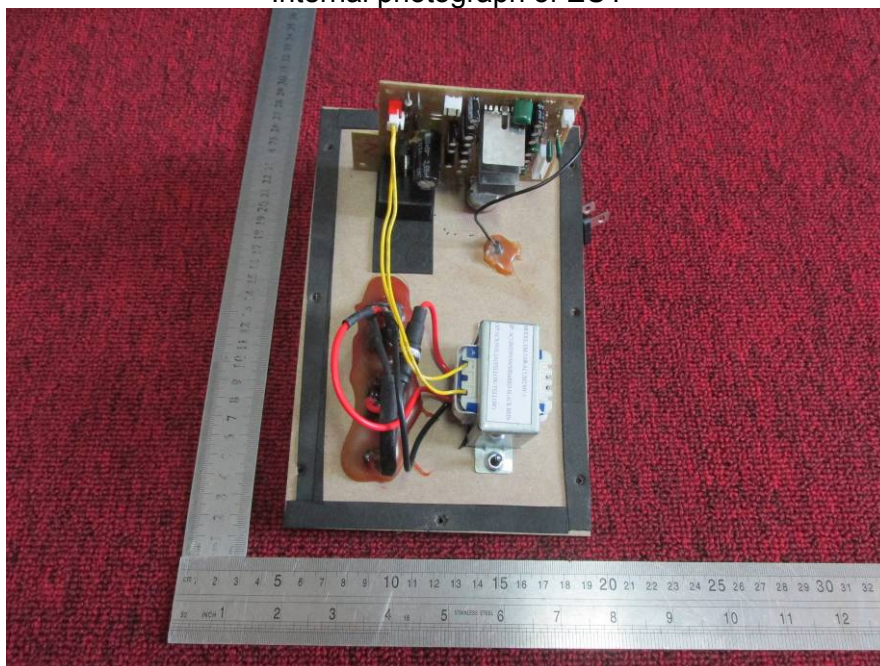

PCB photograph of EUT




PCB photograph of EUT




PCB photograph of EUT




PCB photograph of EUT

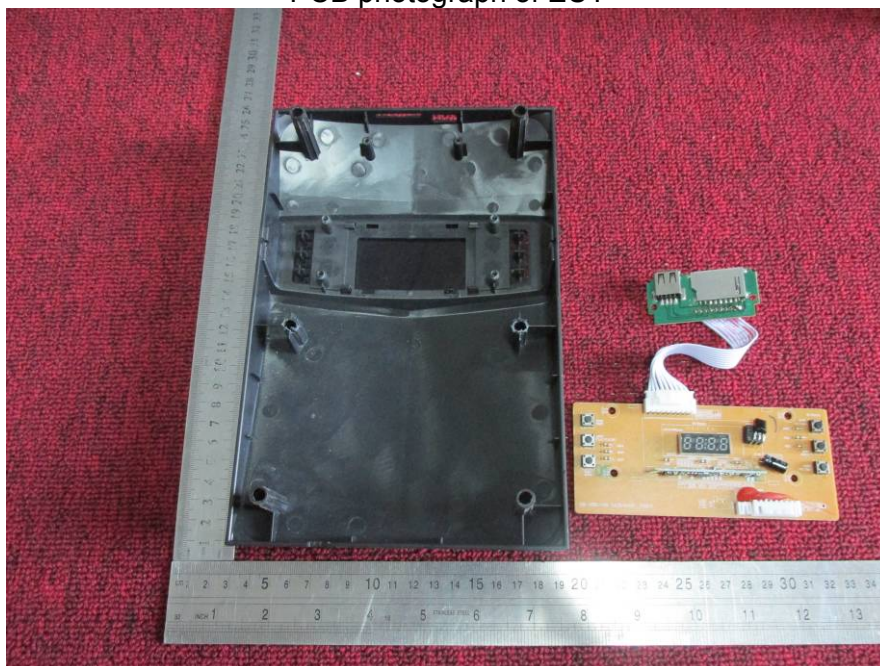


PCB photograph of EUT

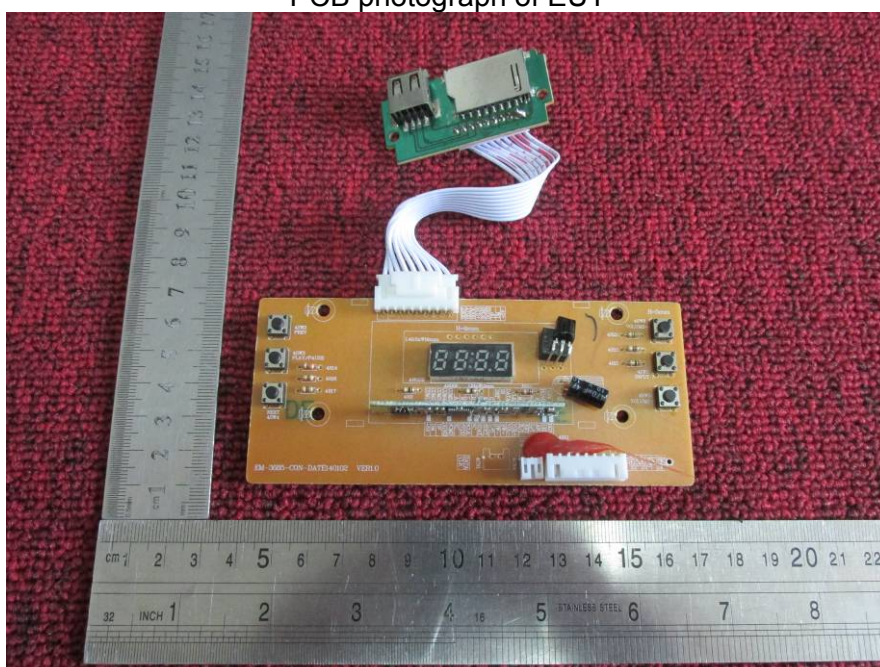


PCB photograph of EUT

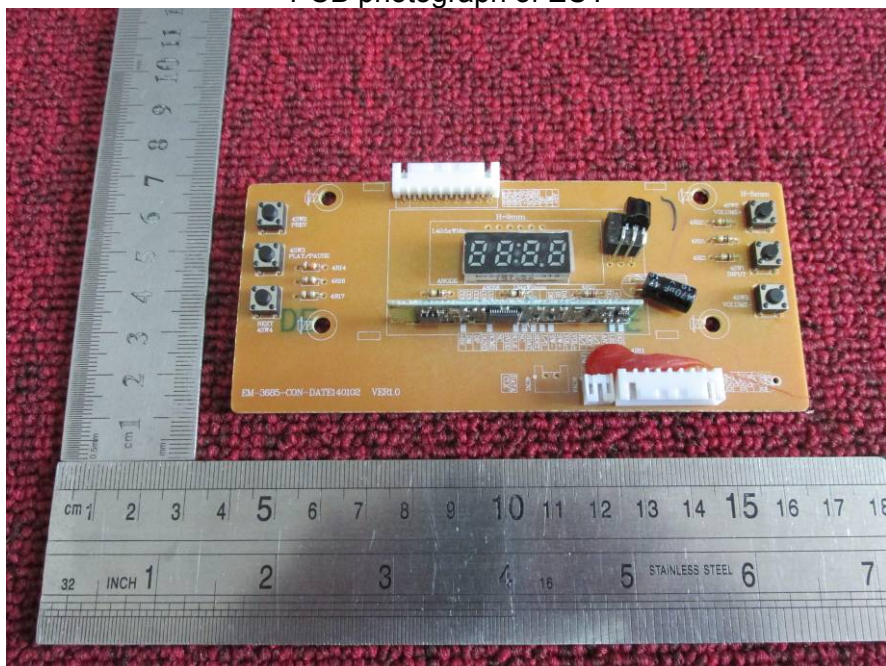

PCB photograph of EUT

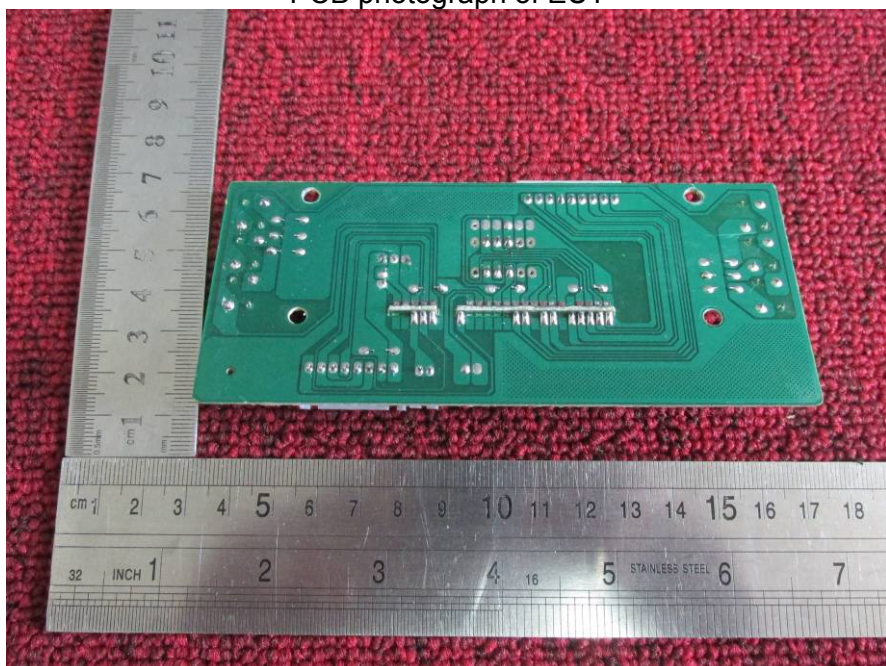


Appearance photograph of Adapter

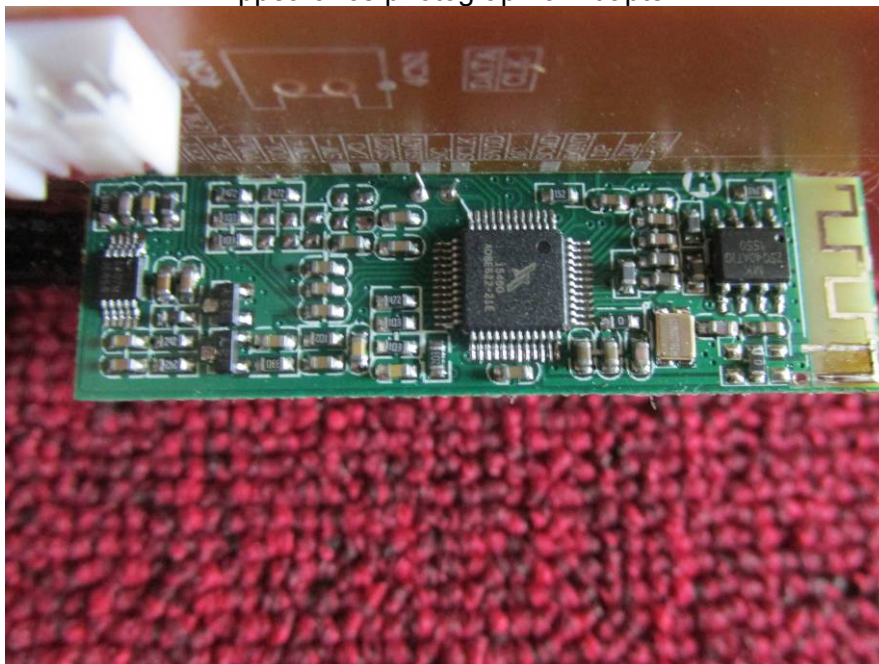


Label photograph of Adapter



Label photograph of Adapter

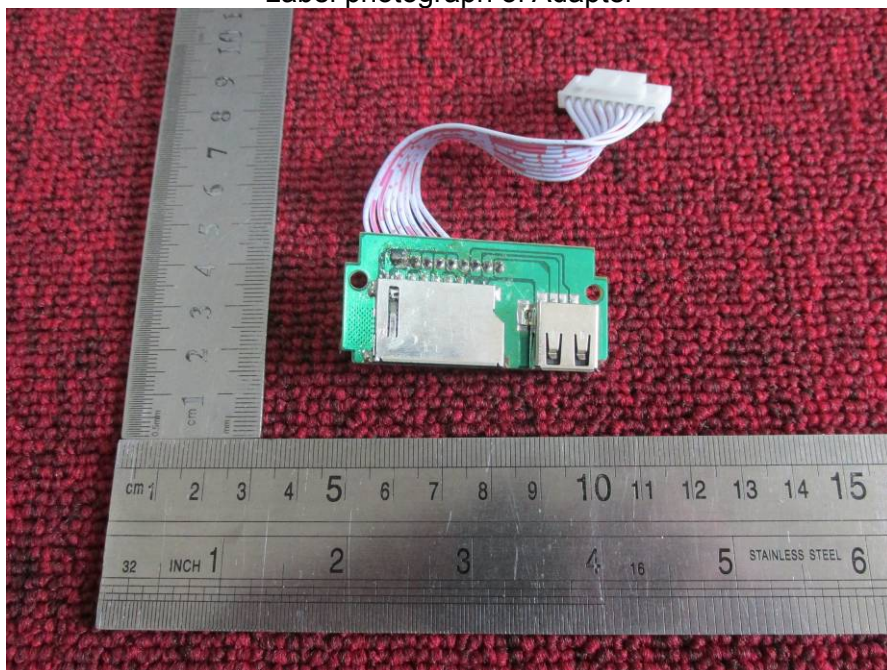

Label photograph of Adapter

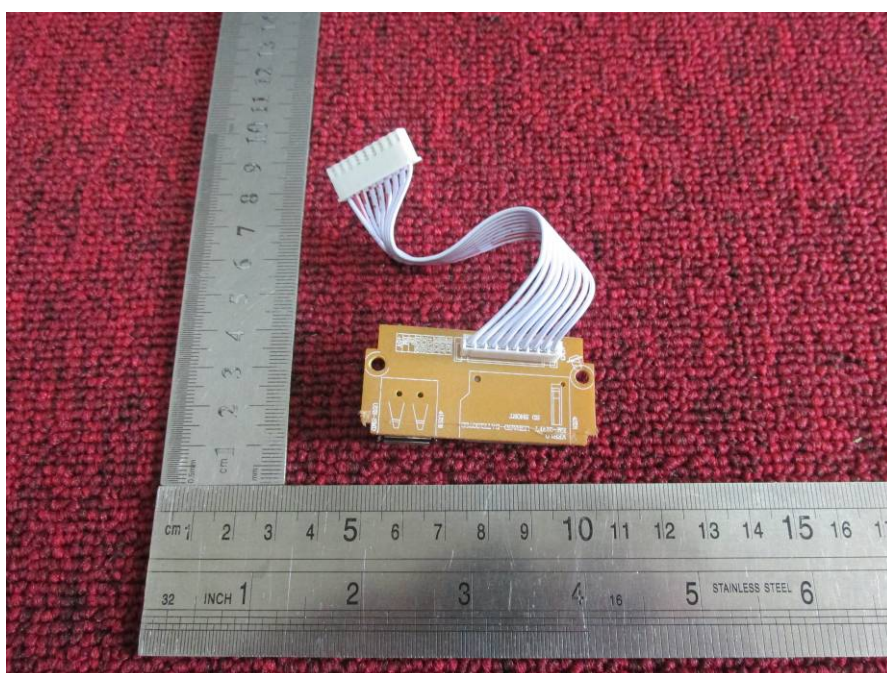

—END OF REPORT—