


Appendix 1

Test Results


20dB Bandwidth

Tx frequency: 2405MHz

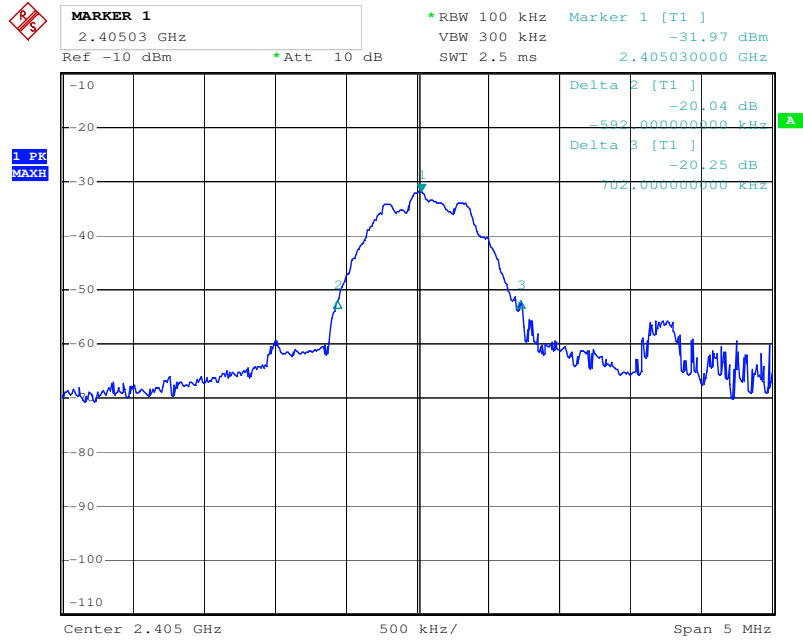


Comment: test print
Date: 9.MAR.2015 10:10:59

Tx frequency: 2443MHz

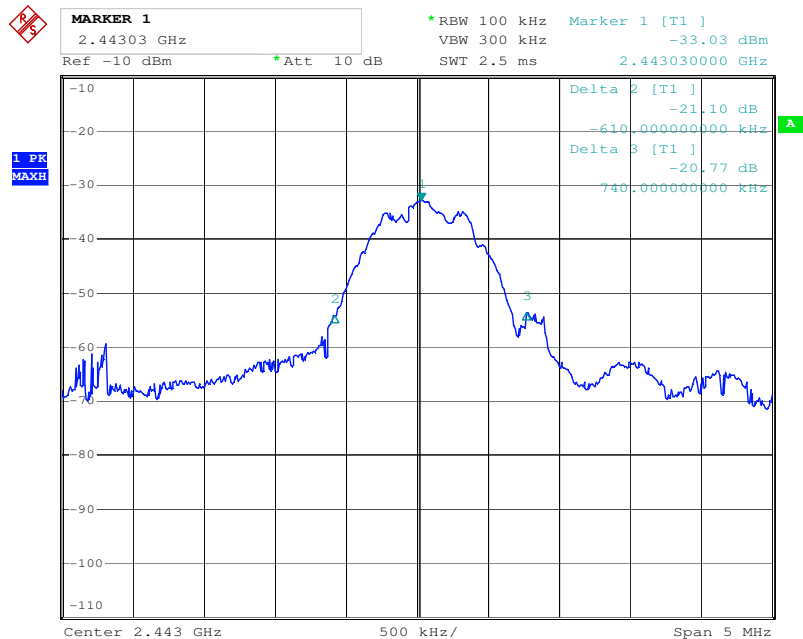

Comment: test print
Date: 9.MAR.2015 10:13:30


Tx frequency: 2475MHz

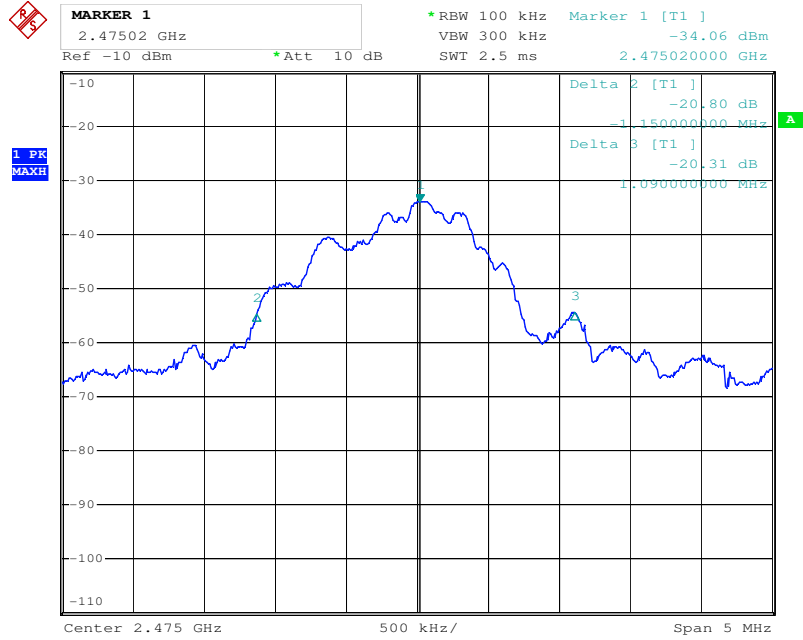

Comment: test print
Date: 9.MAR.2015 10:15:34

Band Edge Compliance


Tx frequency: 2405MHz (radiated measurement)

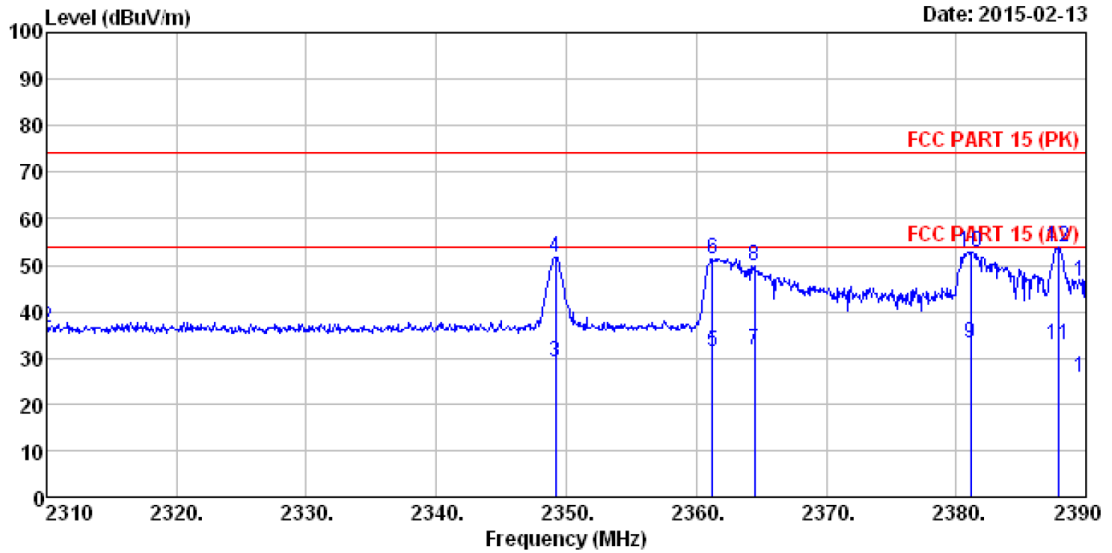

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120D (>1G)-2013 VERTICAL
 : ANSI C63.4:2009
 EUT : RC Toy(2.4GHz)
 Model No. : H802
 Sample No. : TBA
 TUV Order No: 144046442
 Test Mode : TX on 2405MHz

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	Loss	Factor	dB	dBuV/m	dB	
1	2310.000	27.32	27.03	5.30	34.11	25.54	54.00	-28.46	Average
2	2310.000	38.27	27.03	5.30	34.11	36.49	74.00	-37.51	Peak
3	2349.200	30.93	27.13	5.34	34.07	29.33	54.00	-24.67	Average
4	2349.200	53.15	27.13	5.34	34.07	51.55	74.00	-22.45	Peak
5	2361.280	32.69	27.19	5.35	34.05	31.18	54.00	-22.82	Average
6	2361.280	52.97	27.19	5.35	34.05	51.46	74.00	-22.54	Peak
7	2364.480	33.32	27.19	5.36	34.05	31.82	54.00	-22.18	Average
8	2364.480	51.30	27.19	5.36	34.05	49.80	74.00	-24.20	Peak
9	2381.120	34.50	27.24	5.37	34.03	33.08	54.00	-20.92	Average
10	2381.120	54.33	27.24	5.37	34.03	52.91	74.00	-21.09	Peak
11	2387.840	34.12	27.29	5.38	34.01	32.78	54.00	-21.22	Average
12	2387.840	55.04	27.29	5.38	34.01	53.70	74.00	-20.30	Peak
13	2390.000	27.19	27.29	5.38	34.01	25.85	54.00	-28.15	Average
14	2390.000	47.77	27.29	5.38	34.01	46.43	74.00	-27.57	Peak

Vertical polarization

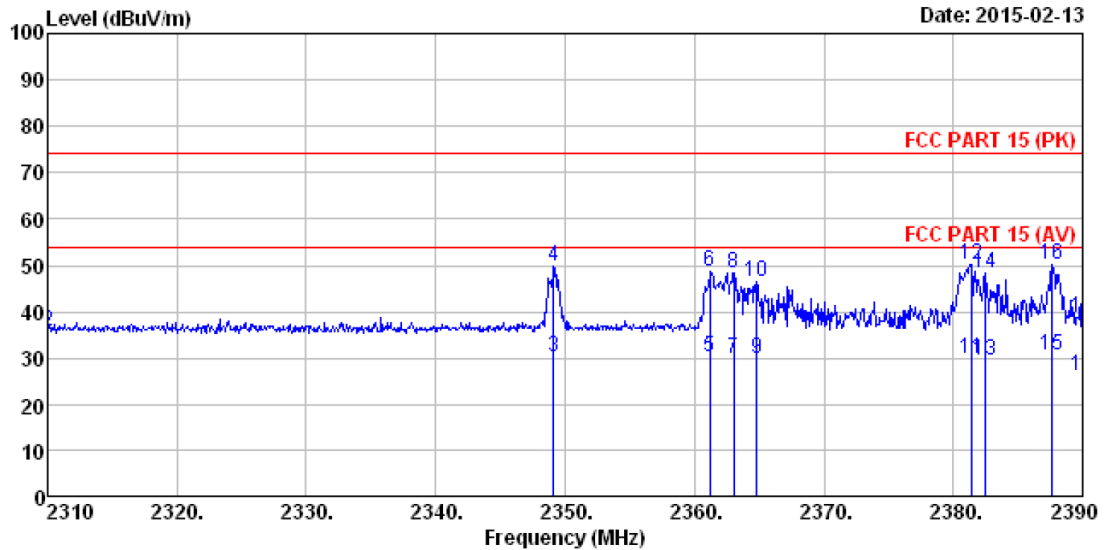


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120D(>1G)-2013 HORIZONTAL
 : ANSI C63.4:2009
 EUT : RC Toy(2.4GHz)
 Model No. : H802
 Sample No. : TBA
 TUV Order No: 144046442
 Test Mode : TX on 2405MHz

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	28.40	27.03	5.30	34.11	26.62	54.00	-27.38	Average
2	2310.000	37.62	27.03	5.30	34.11	35.84	74.00	-38.16	Peak
3	2349.120	31.82	27.13	5.34	34.07	30.22	54.00	-23.78	Average
4	2349.120	51.31	27.13	5.34	34.07	49.71	74.00	-24.29	Peak
5	2361.200	31.81	27.19	5.35	34.05	30.30	54.00	-23.70	Average
6	2361.200	50.29	27.19	5.35	34.05	48.78	74.00	-25.22	Peak
7	2363.040	31.39	27.19	5.36	34.05	29.89	54.00	-24.11	Average
8	2363.040	50.02	27.19	5.36	34.05	48.52	74.00	-25.48	Peak
9	2364.800	31.39	27.19	5.36	34.05	29.89	54.00	-24.11	Average
10	2364.800	47.86	27.19	5.36	34.05	46.36	74.00	-27.64	Peak
11	2381.360	31.47	27.24	5.37	34.03	30.05	54.00	-23.95	Average
12	2381.360	51.55	27.24	5.37	34.03	50.13	74.00	-23.87	Peak
13	2382.480	30.77	27.24	5.37	34.03	29.35	54.00	-24.65	Average
14	2382.480	49.76	27.24	5.37	34.03	48.34	74.00	-25.66	Peak
15	2387.680	32.04	27.29	5.38	34.01	30.70	54.00	-23.30	Average
16	2387.680	51.35	27.29	5.38	34.01	50.01	74.00	-23.99	Peak
17	2390.000	27.39	27.29	5.38	34.01	26.05	54.00	-27.95	Average
18	2390.000	40.13	27.29	5.38	34.01	38.79	74.00	-35.21	Peak

Horizontal polarization


Tx frequency: 2475MHz (radiated measurement)

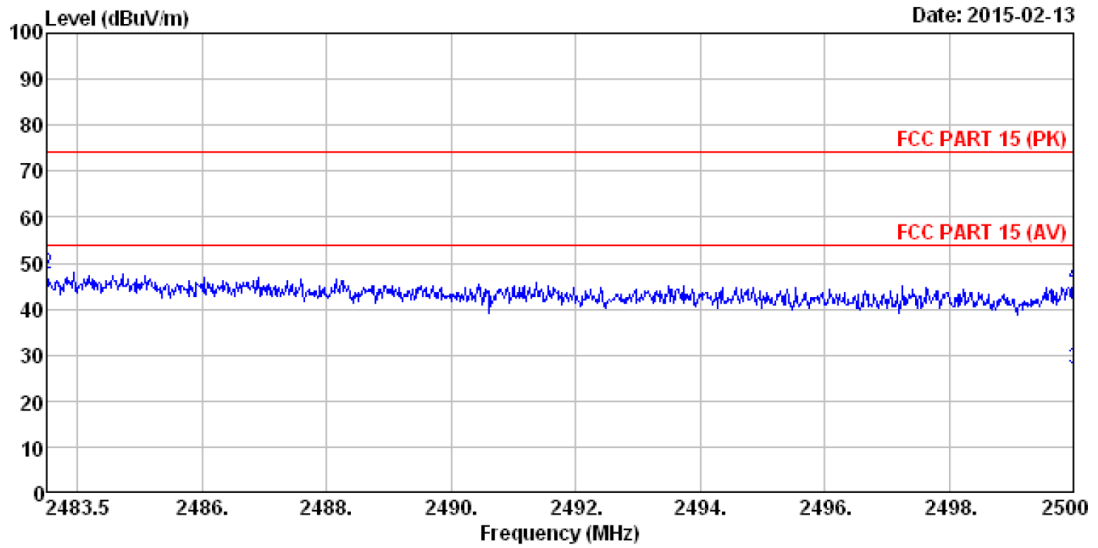

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120D (>1G)-2013 VERTICAL
 : ANSI C63.4:2009
 EUT : RC Toy(2.4GHz)
 Model No. : H802
 Sample No. : TBA
 TUV Order No: 144046442
 Test Mode : TX on 2475MHz

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	29.11	27.55	5.47	33.92	28.21	54.00	-25.79	Average
2	2483.500	48.61	27.55	5.47	33.92	47.71	74.00	-26.29	Peak
3	2500.000	27.80	27.60	5.49	33.90	26.99	54.00	-27.01	Average
4	2500.000	45.77	27.60	5.49	33.90	44.96	74.00	-29.04	Peak

Vertical polarization

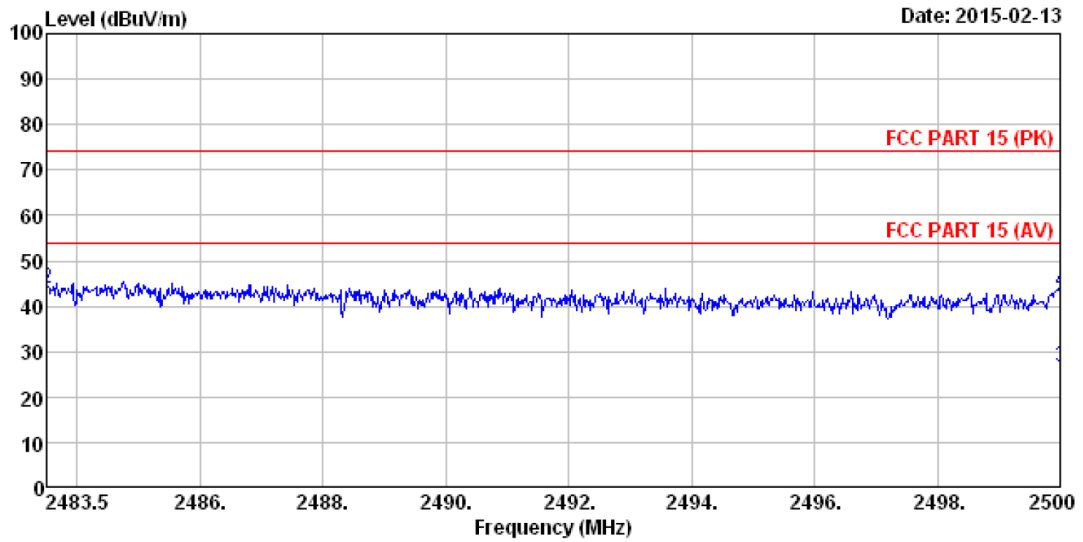

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120D (>1G)-2013 HORIZONTAL
 : ANSI C63.4:2009
 EUT : RC Toy(2.4GHz)
 Model No. : H802
 Sample No. : TBA
 TUV Order No: 144046442
 Test Mode : TX on 2475MHz

	Read	Antenna	Cable	Preamp	Level	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	28.47	27.55	5.47	33.92	27.57	54.00	-26.43 Average
2	2483.500	44.93	27.55	5.47	33.92	44.03	74.00	-29.97 Peak
3	2500.000	27.20	27.60	5.49	33.90	26.39	54.00	-27.61 Average
4	2500.000	44.12	27.60	5.49	33.90	43.31	74.00	-30.69 Peak

Horizontal polarization