

FCC AND IC CERTIFICATION TEST REPORT

FOR

Applicant	:	LOUD Audio, LLC
Address	:	16220 Wood-Red Road NE WOODINVILLE WA98072 USA
Equipment under Test	:	IEEE 802.11 b/g/n WiFi Router
Model No.	:	WP25M1200
Trade Mark	:	N/A
FCC ID	:	2AD4X-WP25M1200
IC	:	12714A-WP25M1200
Manufacturer	:	HUIZHOU GAOSHENGDA TECHNOLOGY CO., LTD
Address	:	HUA YU RD., NO. 75, ZHONGKAI HIGH-TECH DEVELOPMENT AREA, HUIZHOU, CHINA

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City,
Guangdong Province, China, 523808

Tel: +86-0769-89201699, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

TABLE OF CONTENTS

	Test report declares.....	4
1.	Summary of test results.....	6
2.	General test information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT	7
2.3.	Assistant equipment used for test.....	7
2.4.	Block diagram of EUT configuration for test	8
2.5.	Deviations of test standard	8
2.6.	Test environment conditions.....	8
2.7.	Test laboratory.....	8
2.8.	Measurement uncertainty	9
3.	Equipment used during test.....	10
4.	6dB Bandwidth and 99% Bandwidth.....	11
4.1.	Block diagram of test setup	11
4.2.	Limits	11
4.3.	Test Procedure	11
4.4.	Test Result	12
4.5.	original test data	13
5.	Conducted peak Output Power.....	26
5.1.	Block diagram of test setup	26
5.2.	Limits	26
5.3.	Test Procedure	26
5.4.	Test Result	26
6.	Power Spectral Density	27
6.1.	Block diagram of test setup	27
6.2.	Limits	27
6.3.	Test Procedure	27
6.4.	Test Result	27
6.5.	original test data	28
7.	Band Edge and Spurious Emissions (Conducted).....	35
7.1.	Block diagram of test setup	35
7.2.	Limits	35
7.3.	Test Procedure	35
7.4.	Test Result	36
7.5.	original test data	36
8.	Radiated Spurious Emissions.....	53
8.1.	Block diagram of test setup	53
8.2.	Limit.....	54

8.3. Test Procedure55

8.4. Test result.....56

9. Radiated Band Edge Compliance.....61

9.1. Block diagram of test setup61

9.2. Limit.....61

9.3. Test Procedure61

9.4. Test result.....61

10. Power Line Conducted Emission.....78

10.1. Block diagram of test setup78

10.2. Power Line Conducted Emission Limits(Class B).....78

10.3. Test Procedure78

10.4. Test Result79

11. Antenna Requirements80

11.1. Limit.....80

11.2. Result80

TEST REPORT DECLARE

Applicant	:	LOUD Audio, LLC
Address	:	16220 Wood-Red Road NE WOODINVILLE WA98072 USA
Equipment under Test	:	IEEE 802.11 b/g/n WiFi Router
Model No	:	WP25M1200
Trade Mark	:	N/A
Manufacturer	:	HUIZHOU GAOSHENGDA TECHNOLOGY CO., LTD
Address	:	HUA YU RD., NO. 75, ZHONGKAI HIGH-TECH DEVELOPMENT AREA, HUIZHOU, CHINA

Test Standard Used: FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test procedure used: ANSI C63.10:2013, RSS-Gen Issue 4, Nov. 2014, KDB558074 D01 DTS Meas Guidance V03r02

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&IC standards.

Report No:	DDT-R18011701-1E1		
Date of Receipt:	Jan. 22, 2018	Date of Test:	Jan. 22, 2018 ~ Mar. 02, 2018

Prepared By:

Sam Li

Sam Li/Engineer

Approved By:



Kevin Feng/EMS Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision history

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Mar. 02, 2018	

1. Summary of test results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
6dB Bandwidth and 99% Bandwidth	FCC 15.247 (a) (2) RSS-247 Clause 5.2 (a)	PASS
Conducted Output Power	FCC 15.247 (b) (3) RSS-247 Clause 5.4 (d)	PASS
Power Spectral Density	FCC 15.247 (e) RSS-247 Clause 5.2 (b)	PASS
Band-edge and Spurious Emissions (Conducted)	FCC 15.247 (d) RSS-247 Clause 5.5	PASS
Radiated Spurious Emissions	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-GEN ISSUE 4 8.9 8.10	PASS
Radiated Band Edge Compliance	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN ISSUE 4 8.9 8.10	PASS
Power Line Conducted Emission	FCC 15.207 RSS-GEN Clause 8.8	N/A
Antenna requirement	FCC 15.203 RSS-GEN Clause 8.3	PASS

2. General test information

2.1. Description of EUT

EUT* Name	: IEEE 802.11 b/g/n WiFi Router
Model Number	: WP25M1200
EUT function description	: Please reference user manual of this device
Power supply	: DC 3.3V
Radio Technology	: IEEE802.11b/g/n
FCC Operation frequency	: IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz
Modulation	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Transmitter rate	: IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20, HT40: up to 150 Mbps
Antenna Type	: External antenna 1: 2.4G band maximum PK gain 2.86dBi External antenna 2: 2.4G band maximum PK gain 3.0dBi
Note	: External antenna is with reversed polarity Non standard antenna port

Note: EUT is the ab. of equipment under test.

Channel information							
CH	Frequency	CH	Frequency	CH	Frequency	CH	Frequency
1	2412	5	2432	9	2452	/	/
2	2417	6	2437	10	2457	/	/
3	2422	7	2442	11	2462	/	/
4	2427	8	2447	/	/	/	/


2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Serial No.	Other
N/A	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Notebook	DELL	Latitude D610	FCC DOC	00045-534-136-300
Network Cable	N/A	N/A	N/A	Length: 1.5m
USB Cable	N/A	N/A	N/A	Length: 1m

2.4. Block diagram of EUT configuration for test

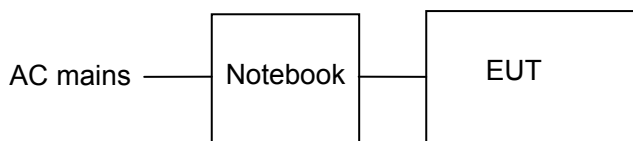

EUT was connected to control to provided by manufacturer which has a standard LAN PORT connector to connect to Notebook, and the Notebook will run a special test software “SecureCRT. EXE” and “QATool_Dbg.EXE”. provided by manufacturer to control EUT work in Continuous Tx mode (>98% duty cycle), and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information				
Mode	Setting Tx Power	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11b	/	11	LCH :CH1	2412
	/	11	MCH: CH6	2437
	/	11	HCH: CH11	2462
IEEE 802.11g	/	54	LCH :CH1	2412
	/	54	MCH: CH6	2437
	/	54	HCH: CH11	2462
IEEE 802.11n HT20	/	MCS 7	LCH :CH1	2412
	/	MCS 7	MCH: CH6	2437
	/	MCS 7	HCH: CH11	2462
IEEE 802.11n HT40	/	MCS 7	LCH :CH3	2422
	/	MCS 7	MCH: CH6	2437
	/	MCS 7	HCH: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No Deviation

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel: +86-0769-89201699, <http://www.dgddt.com>, Email: ddt@dgddt.com

CNAS Accreditation No. L6451; A2LA Accreditation No. 3870.01

Designation Number: CN1182; Test Firm Registration Number: 540522

Industry Canada site registration number: 10288A-1

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power(Conducted)(Spectrum analyzer)	0.86dB (10 MHz ≤ f < 3.6GHz);
	1.38dB (3.6GHz ≤ f < 8GHz)
Peak Output Power(Conducted)(Power Sensor)	0.74dB
Power Spectral Density	0.74dB (10 MHz ≤ f < 3.6GHz);
	1.38dB (3.6GHz ≤ f < 8GHz)
Frequencies Stability	6.7 x 10 ⁻⁸ (Antenna couple method)
	5.5 x 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86dB (10 MHz ≤ f < 3.6GHz);
	1.40dB (3.6GHz ≤ f < 8GHz)
	1.66dB (8GHz ≤ f < 22GHz)
Uncertainty for radio frequency (RBW<20kHz)	3×10 ⁻⁸
Temperature	0.4℃
Humidity	2%
Uncertainty for Radiation Emission test (30MHz-1GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1GHz-40GHz)	4.10dB (1-6GHz)
	4.40dB (6GHz-18GHz)
	3.54dB (18GHz-26GHz)
	4.30dB (26GHz-40GHz)
Uncertainty for Power line conduction emission test	3.32dB (150kHz-30MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment used during test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test (Tonscend RF Measurement System)					
Spectrum analyzer	R&S	FSU26	200071	Oct. 23, 2017	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 16, 2017	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Oct. 23, 2017	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun. 16, 2017	1 Year
Power Sensor	Agilent	U2021XA	MY55150010	Oct. 21, 2017	1 Year
Power Sensor	Agilent	U2021XA	MY55150011	Oct. 23, 2017	1 Year
DC Power Source	MATRIS	MPS-3005L-3	D813058W	Aug. 18, 2017	1 Year
Attenuator	Mini-Circuits	BW-S10W2	101109	Aug. 18, 2017	1 Year
RF Cable	Micable	C10-01-01-1	100309	Oct. 21, 2017	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Oct. 21, 2017	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
Radiated Emission Test Chamber 1#					
EMI Test Receiver	R&S	ESU8	100316	Oct. 21, 2017	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 16, 2017	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 09, 2017	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Oct. 17, 2017	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Oct. 17, 2017	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Nov. 09, 2017	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Oct. 21, 2017	1 Year
Pre-amplifier	TERA-MW	TRLA-0040 G35	101303	Oct. 21, 2017	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Oct. 21, 2017	1 Year
RF Cable	N/A	SMAJ-SMAJ -1M+ 11M	17070133+17070131	Nov. 08, 2017	1 Year
MI Cable	HUBSER	C10-01-01-1 M	1091629	Oct. 21, 2017	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
Power Line Conducted Emissions Test					
Test Receiver	R&S	ESU8	100316	Oct. 21, 2017	1 Year
LISN 1	R&S	ENV216	101109	Oct. 21, 2017	1 Year
LISN 2	R&S	ESH2-Z5	100309	Oct. 21, 2017	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Oct. 21, 2017	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Oct. 21, 2017	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. 6dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

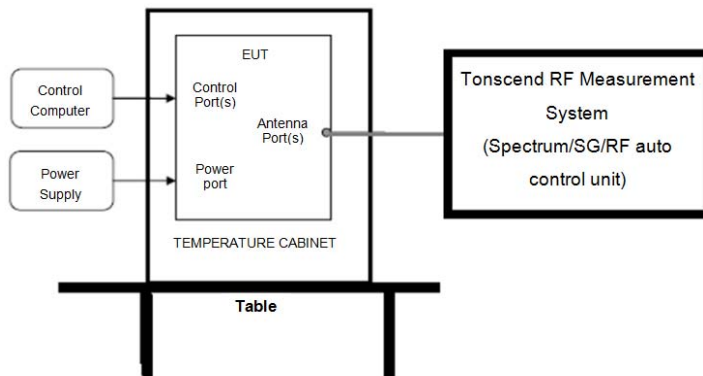

4.2. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz

4.3. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:


RBW:	100kHz
VBW:	300kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


4.4. Test Result

Test Mode	Test	6dB Bandwidth [MHz]	Limit	Verdict
11B	2412	8.680	0.5	PASS
11B	2437	9.400	0.5	PASS
11B	2462	7.240	0.5	PASS
11G	2412	15.160	0.5	PASS
11G	2437	15.200	0.5	PASS
11G	2462	15.120	0.5	PASS
11N20SISO	2412	15.200	0.5	PASS
11N20SISO	2437	15.200	0.5	PASS
11N20SISO	2462	15.040	0.5	PASS
11N40SISO	2422	35.200	0.5	PASS
11N40SISO	2437	35.280	0.5	PASS
11N40SISO	2452	35.200	0.5	PASS


Test Mode	Test Channel	99% OBW [MHz]	Limit[MHz]	Verdict
11B	2412	13.840	---	PASS
11B	2437	14.120	---	PASS
11B	2462	13.800	---	PASS
11G	2412	16.320	---	PASS
11G	2437	16.320	---	PASS
11G	2462	16.320	---	PASS
11N20SISO	2412	17.400	---	PASS
11N20SISO	2437	17.520	---	PASS
11N20SISO	2462	17.440	---	PASS
11N40SISO	2422	35.680	---	PASS
11N40SISO	2437	35.840	---	PASS
11N40SISO	2452	35.680	---	PASS

4.5. original test data

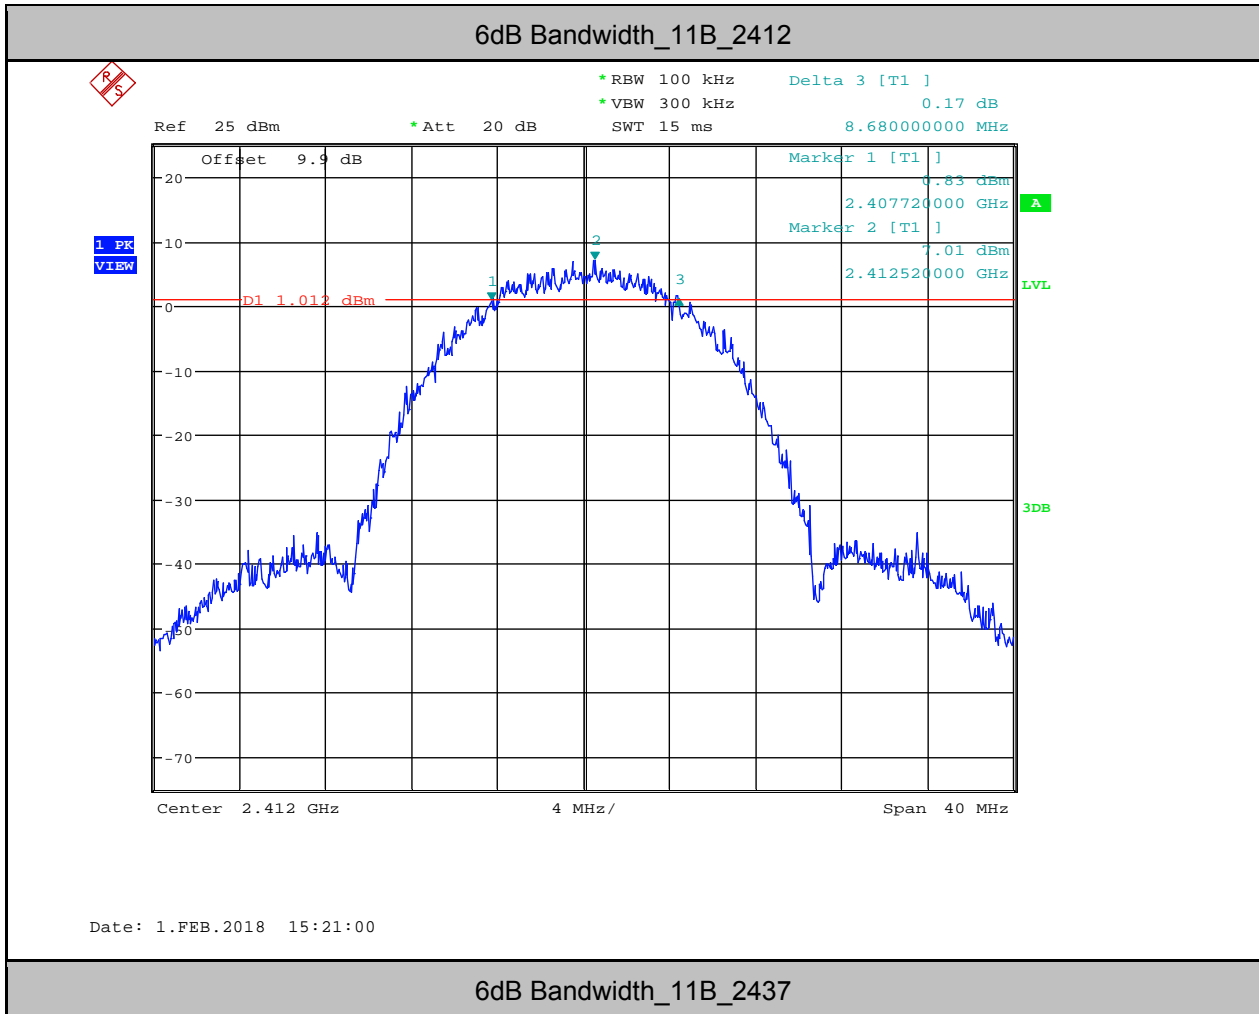


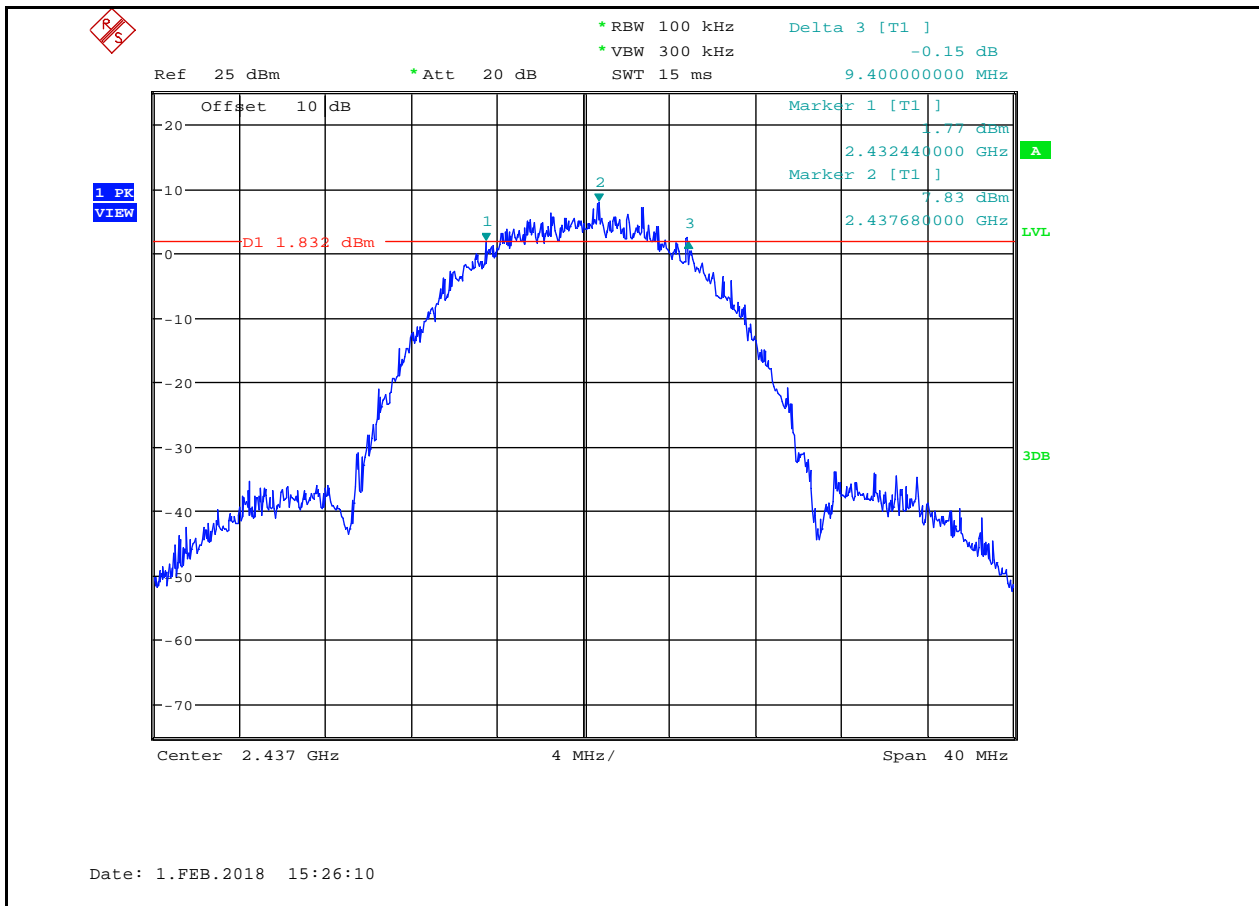


6dB Bandwidth_11B_2462

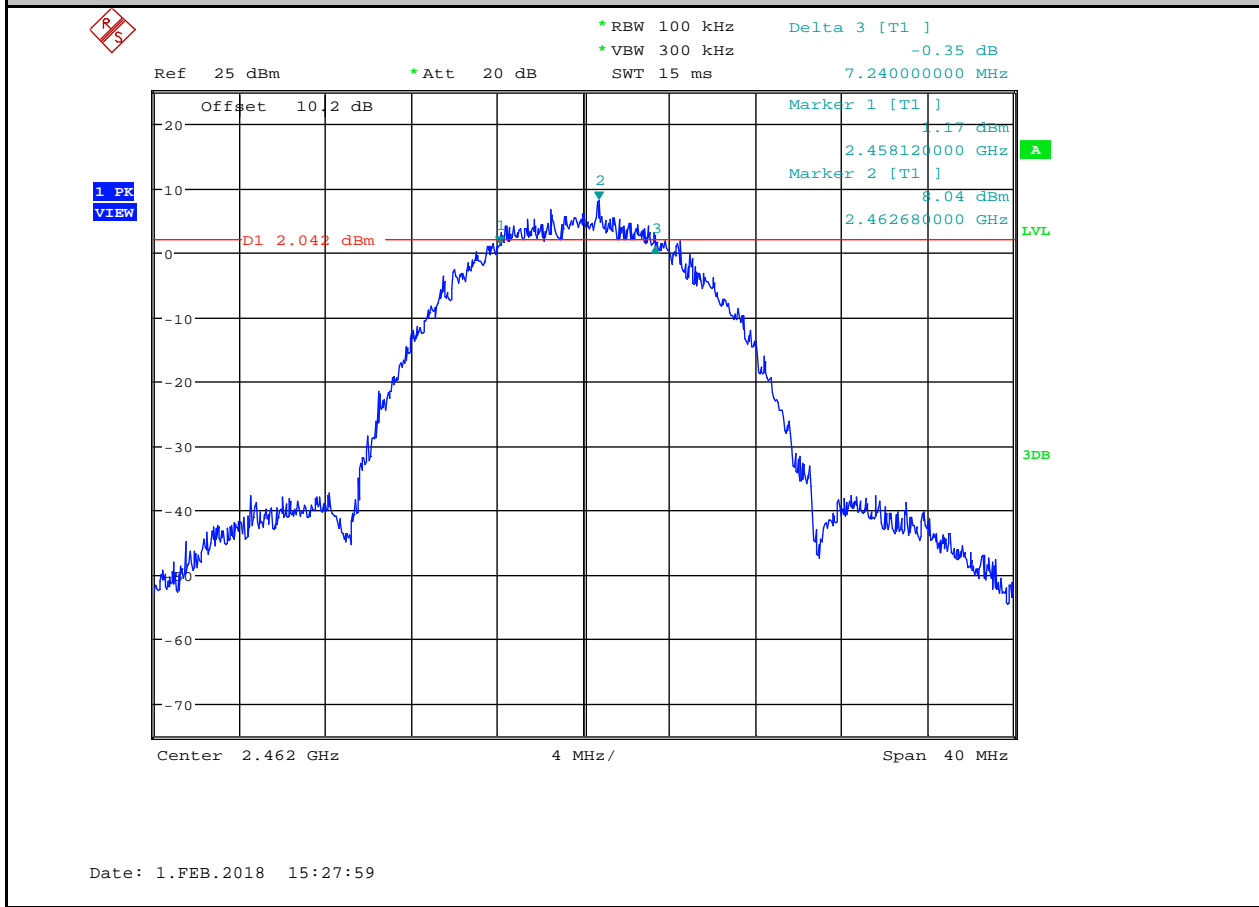


6dB Bandwidth_11G_2412

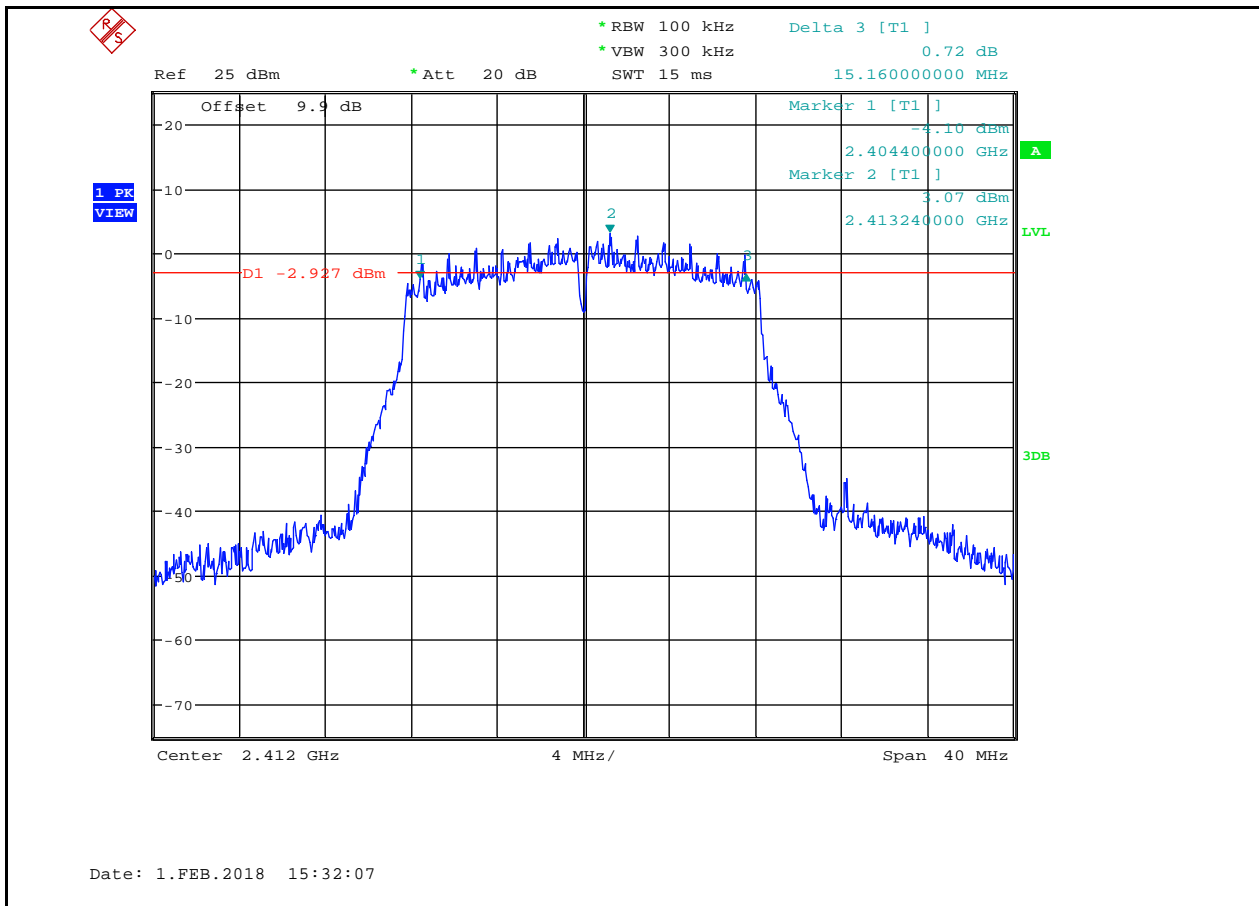


6dB Bandwidth_11G_2437

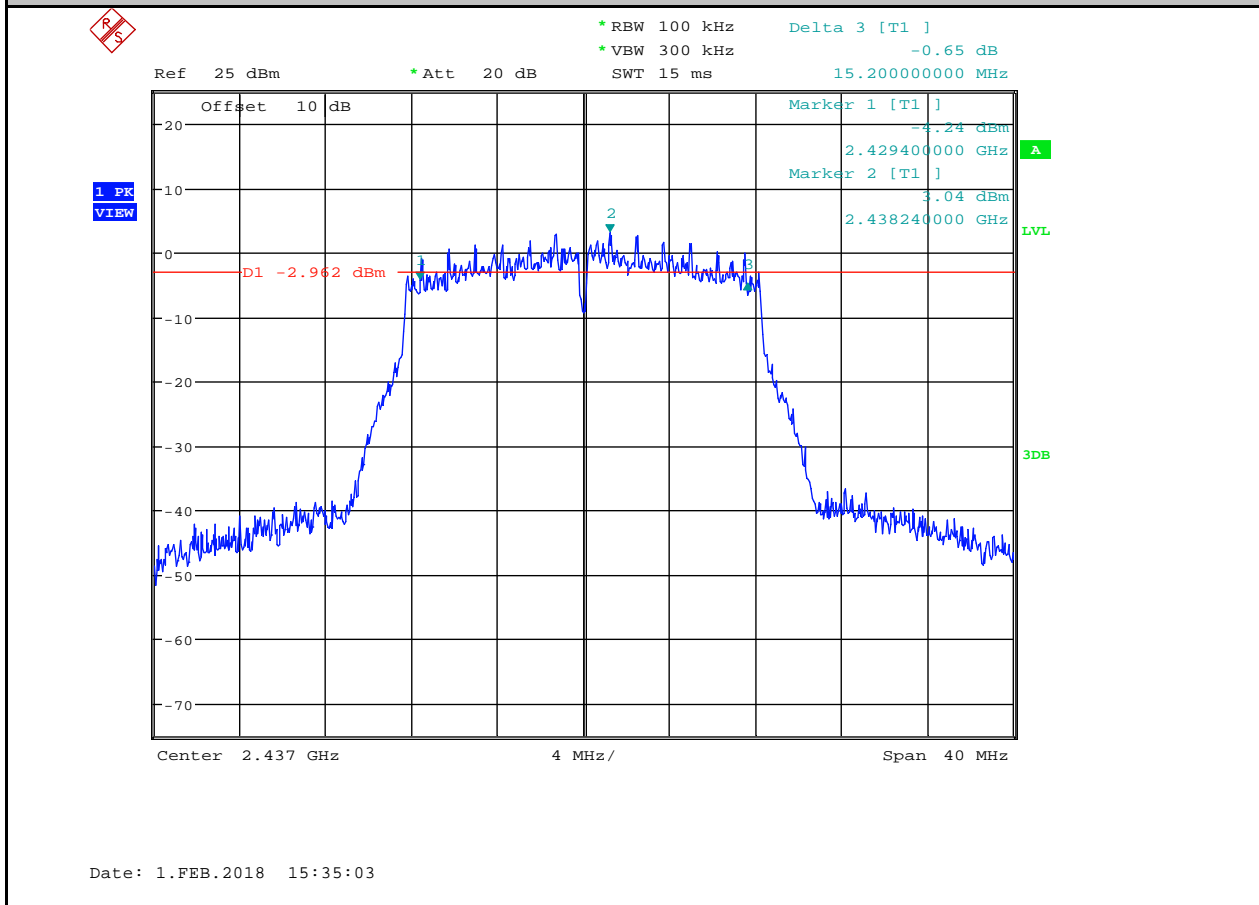


6dB Bandwidth_11G_2462

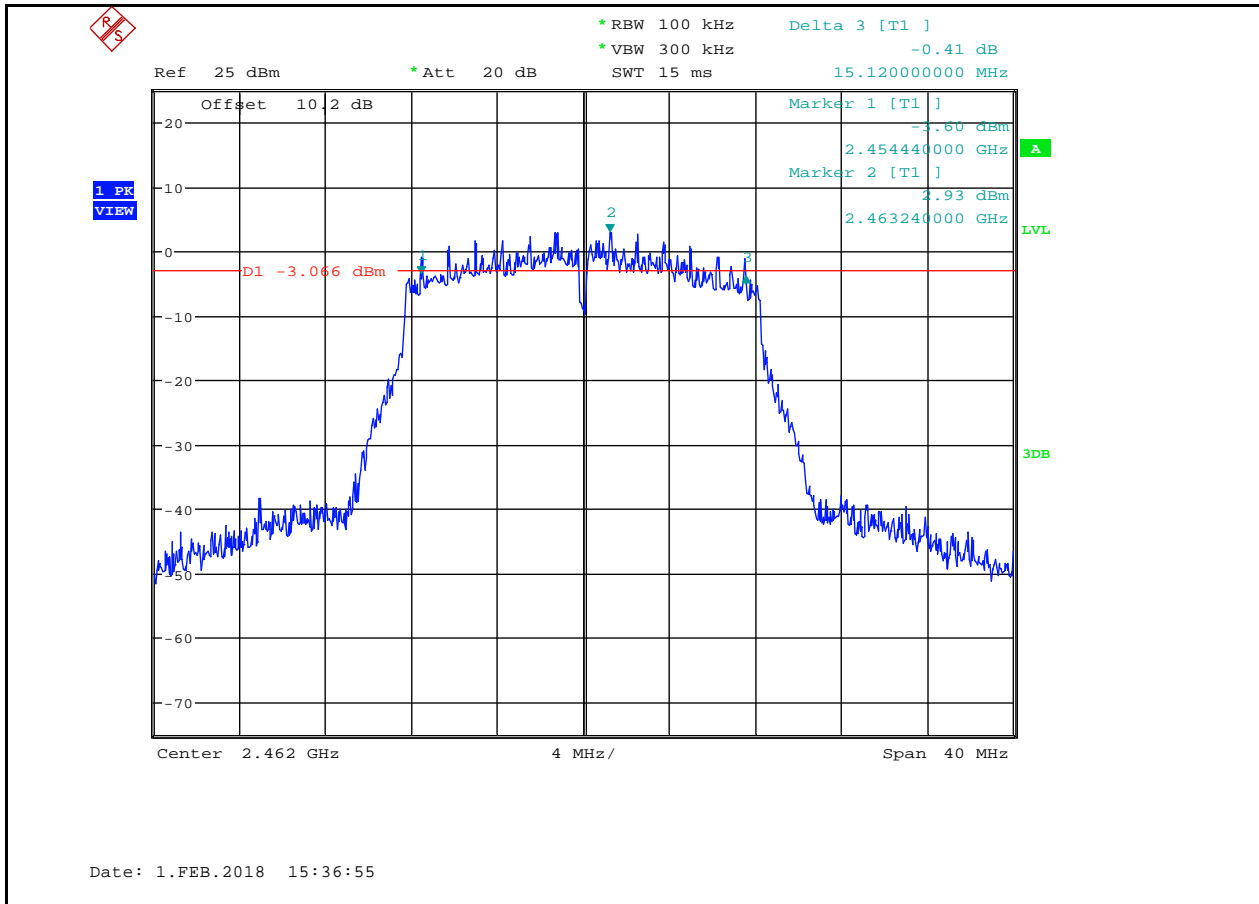


6dB Bandwidth_11N20SISO_2412

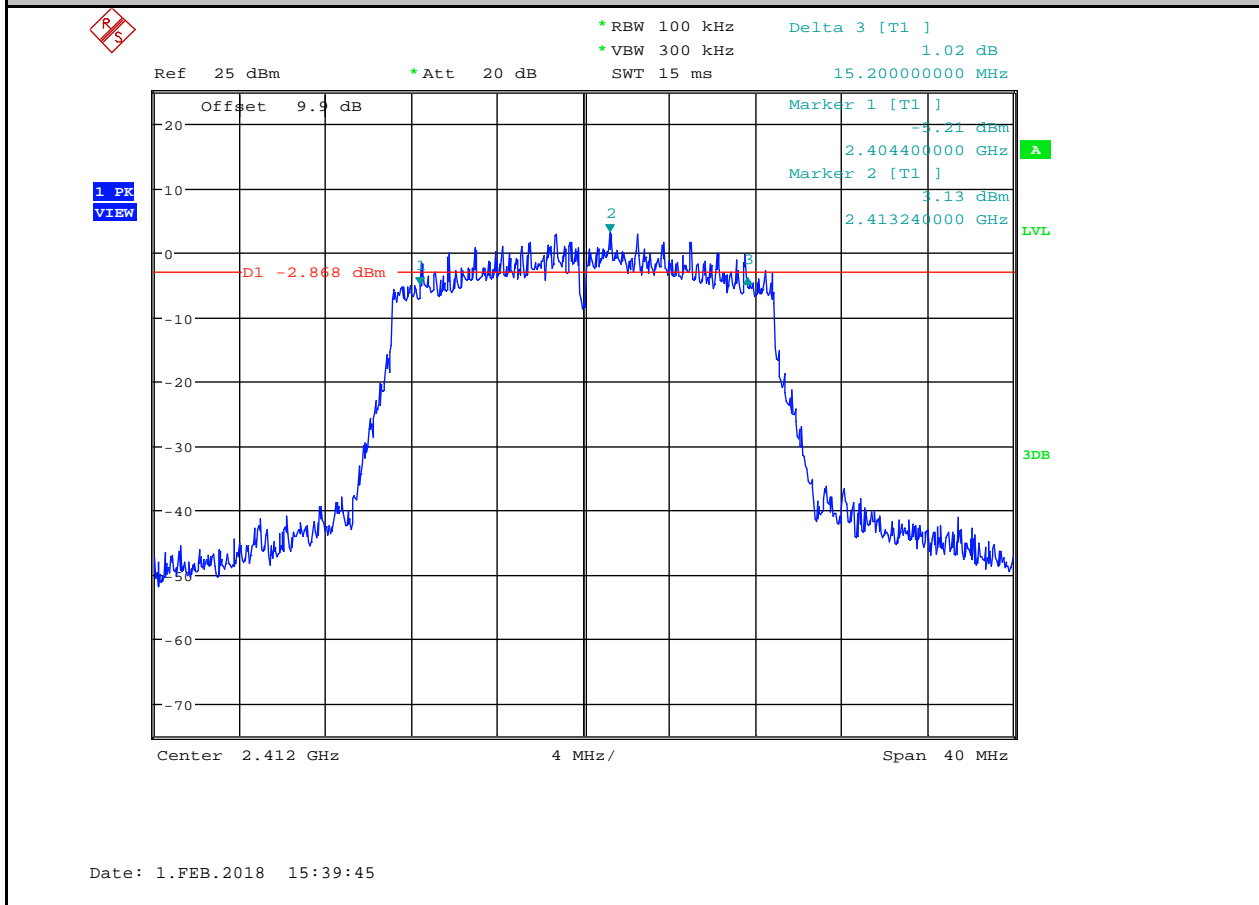


6dB Bandwidth_11N20SISO_2437

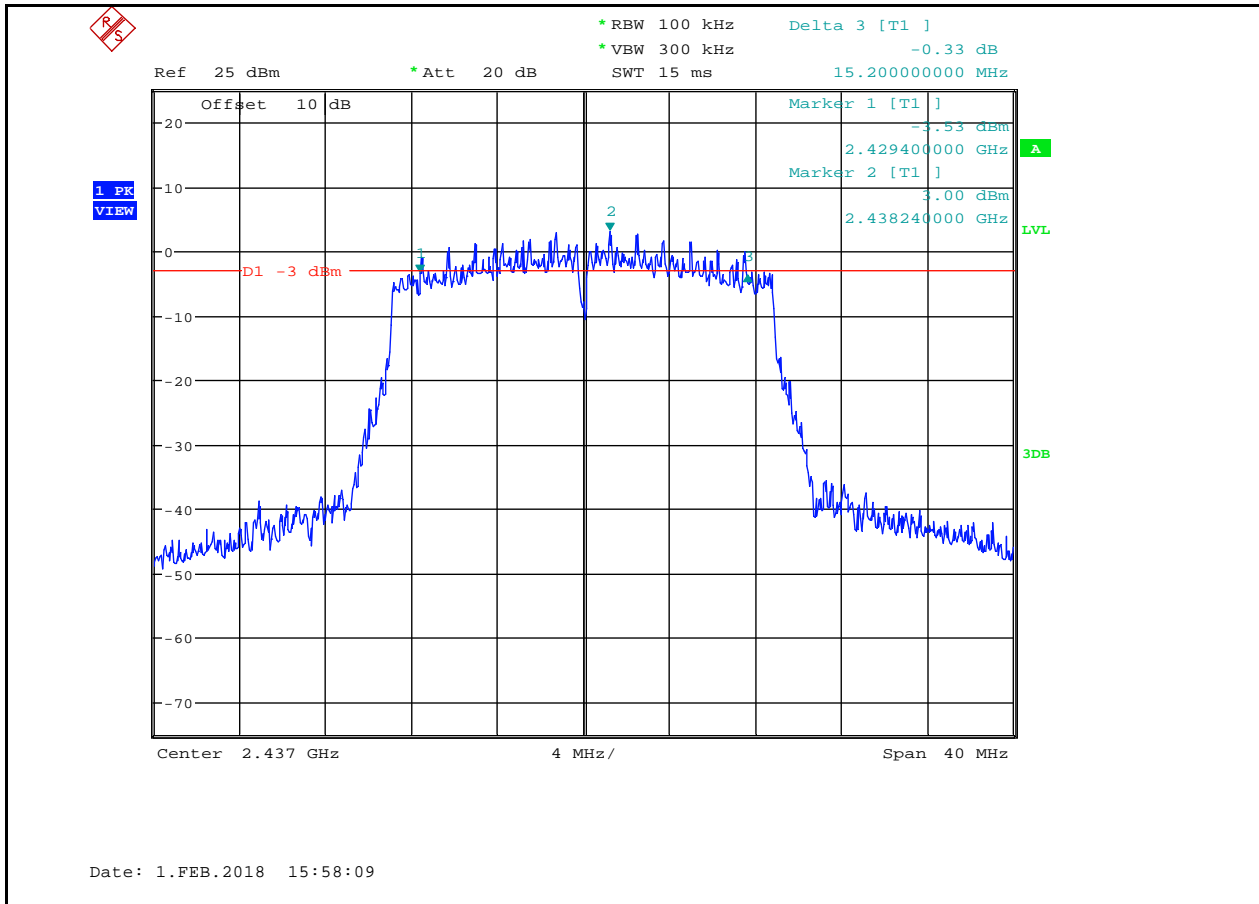


6dB Bandwidth_11N20SISO_2462

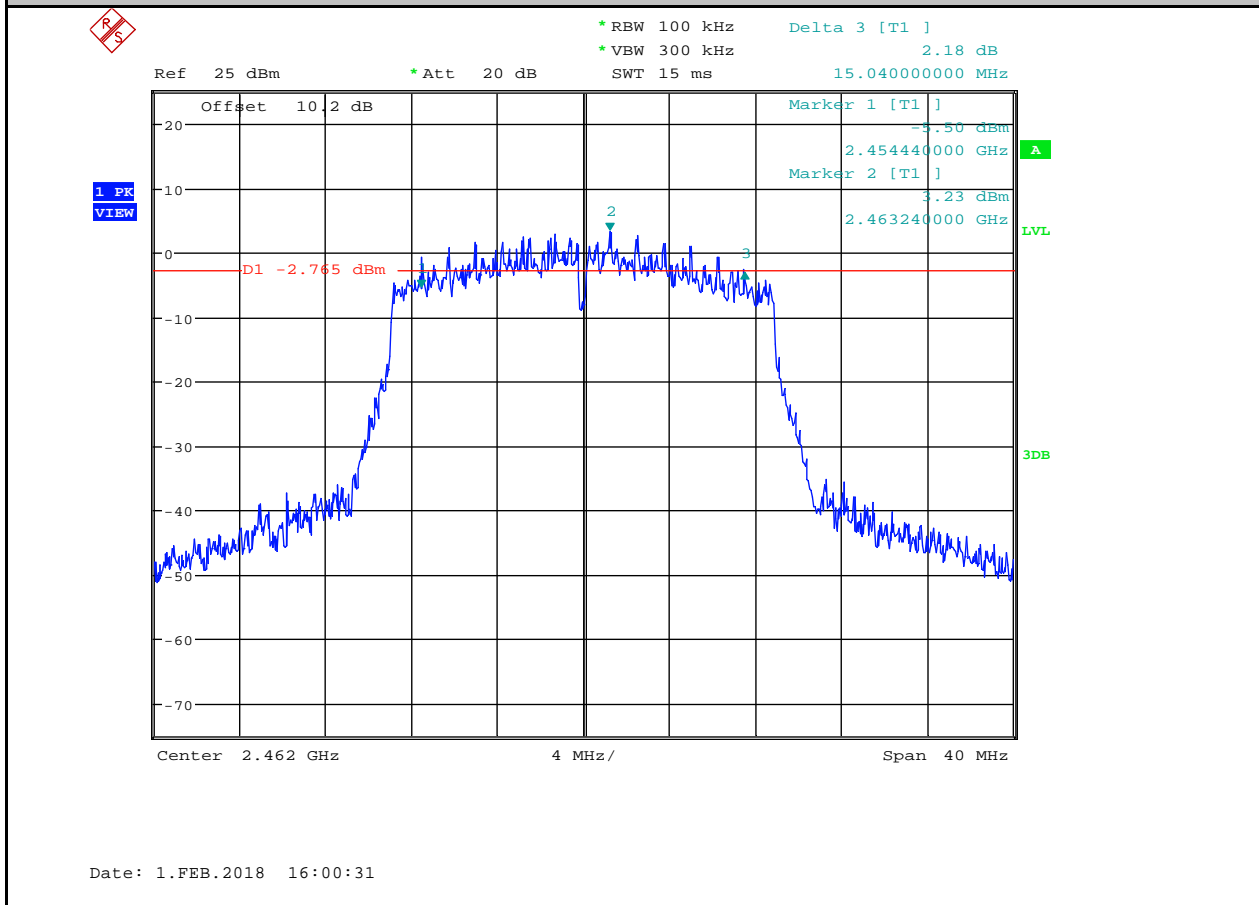


6dB Bandwidth_11N40SISO_2422

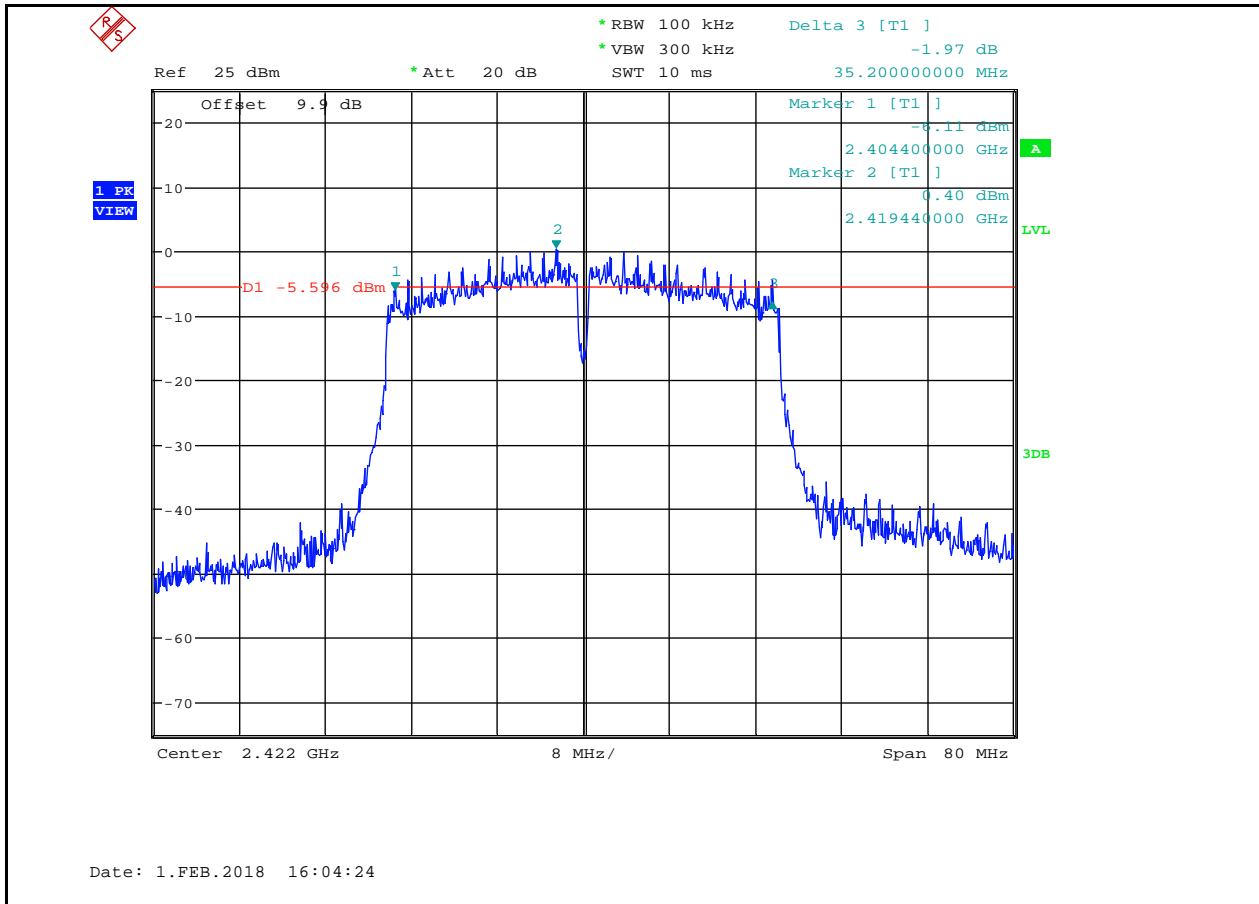


6dB Bandwidth_11N40SISO_2437

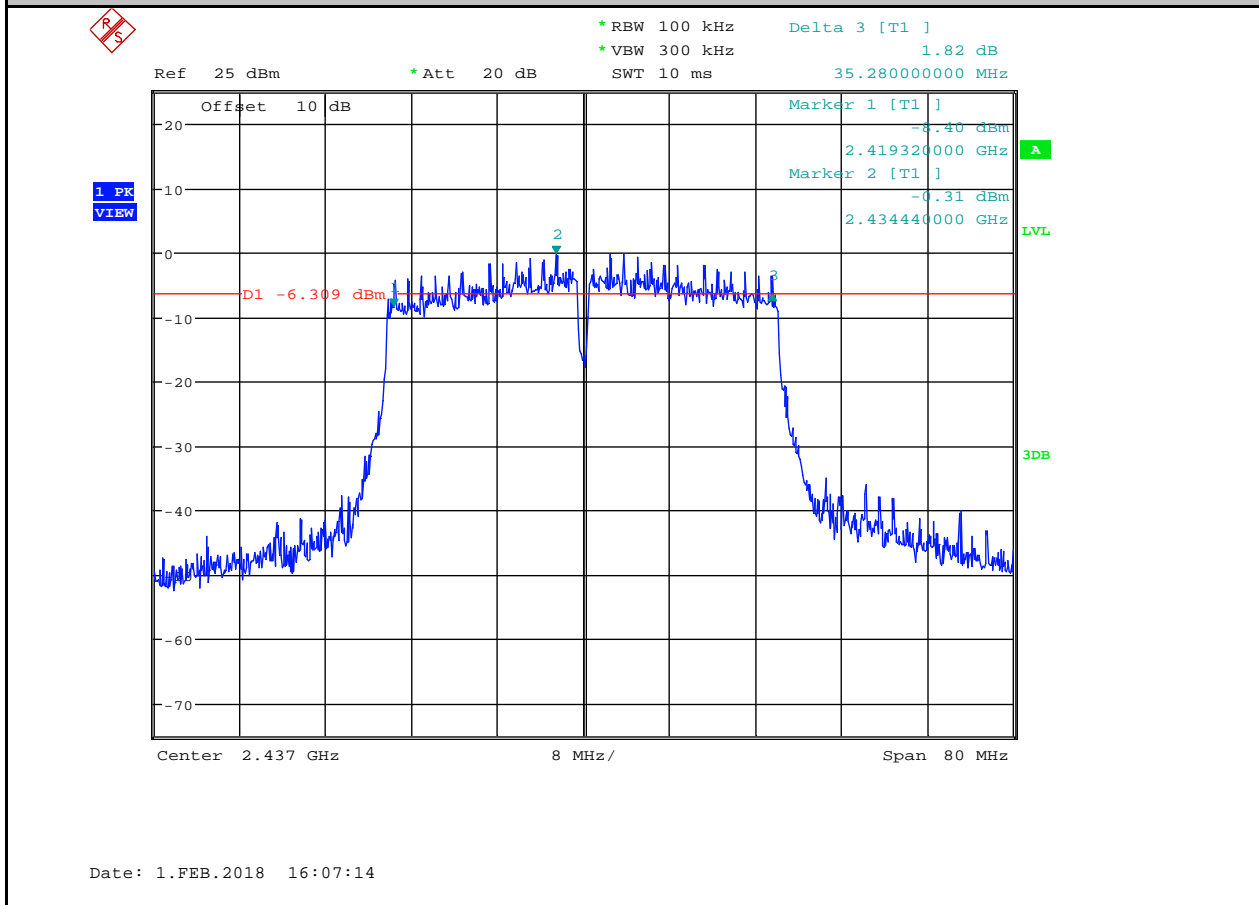


6dB Bandwidth_11N40SISO_2452

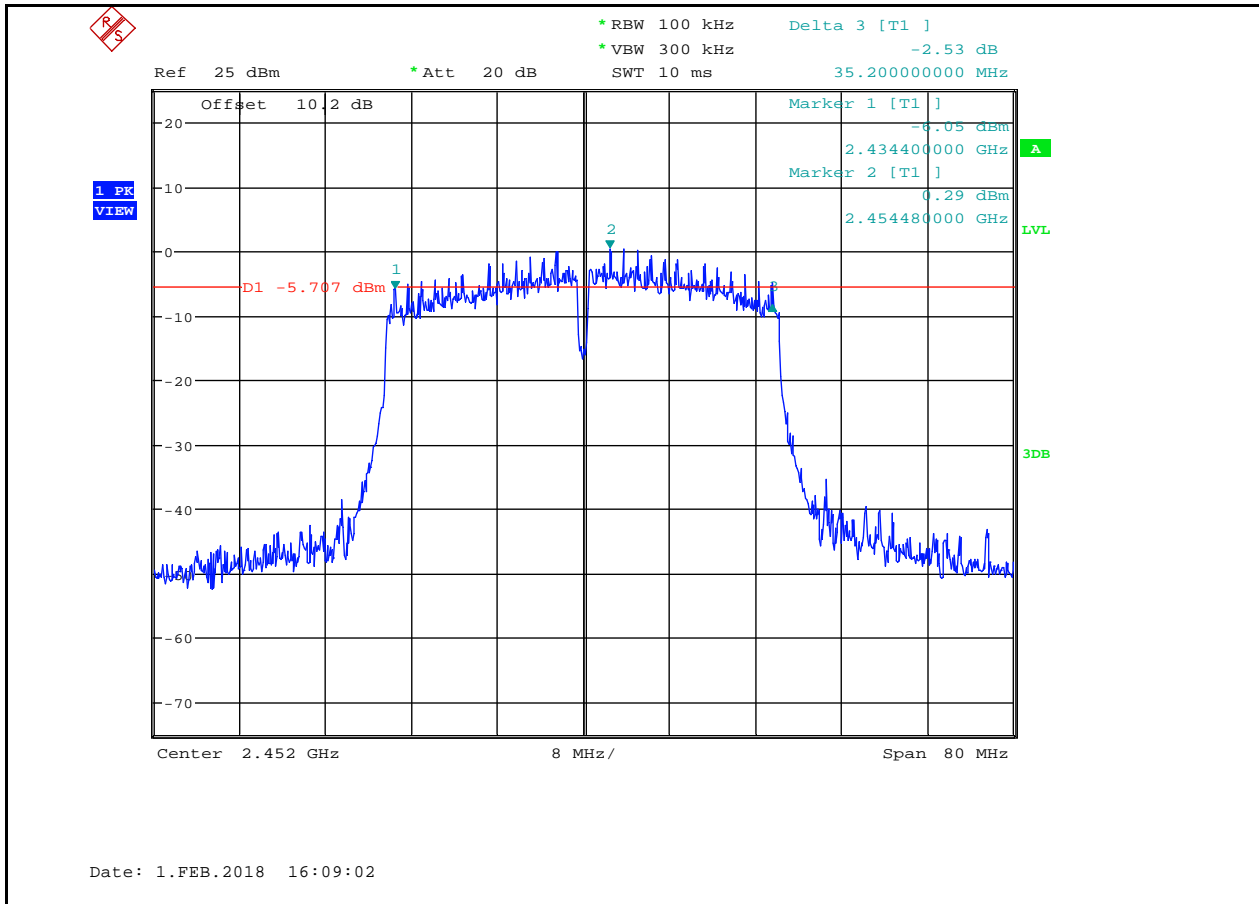


Occupied Bandwidth_11B_2412

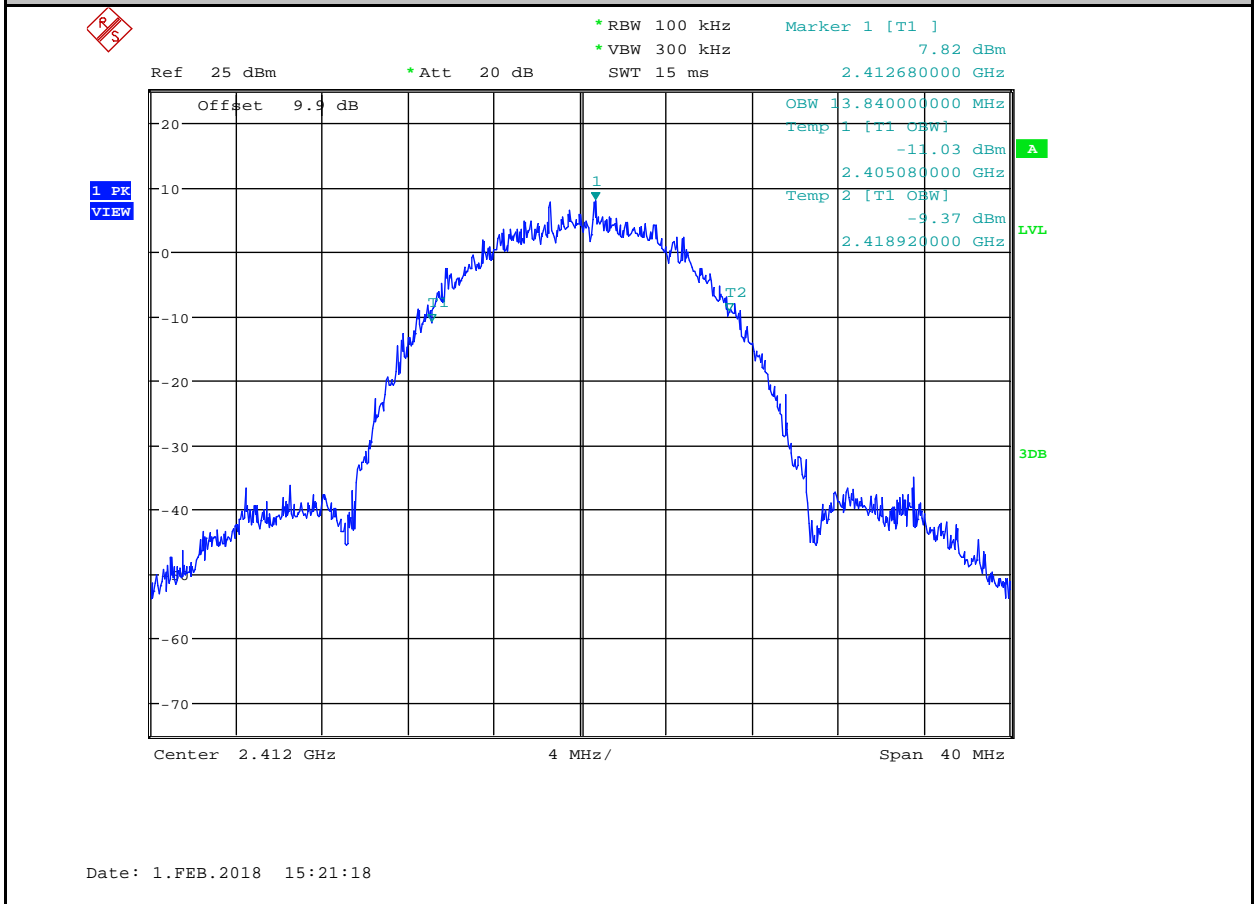


Occupied Bandwidth_11B_2437

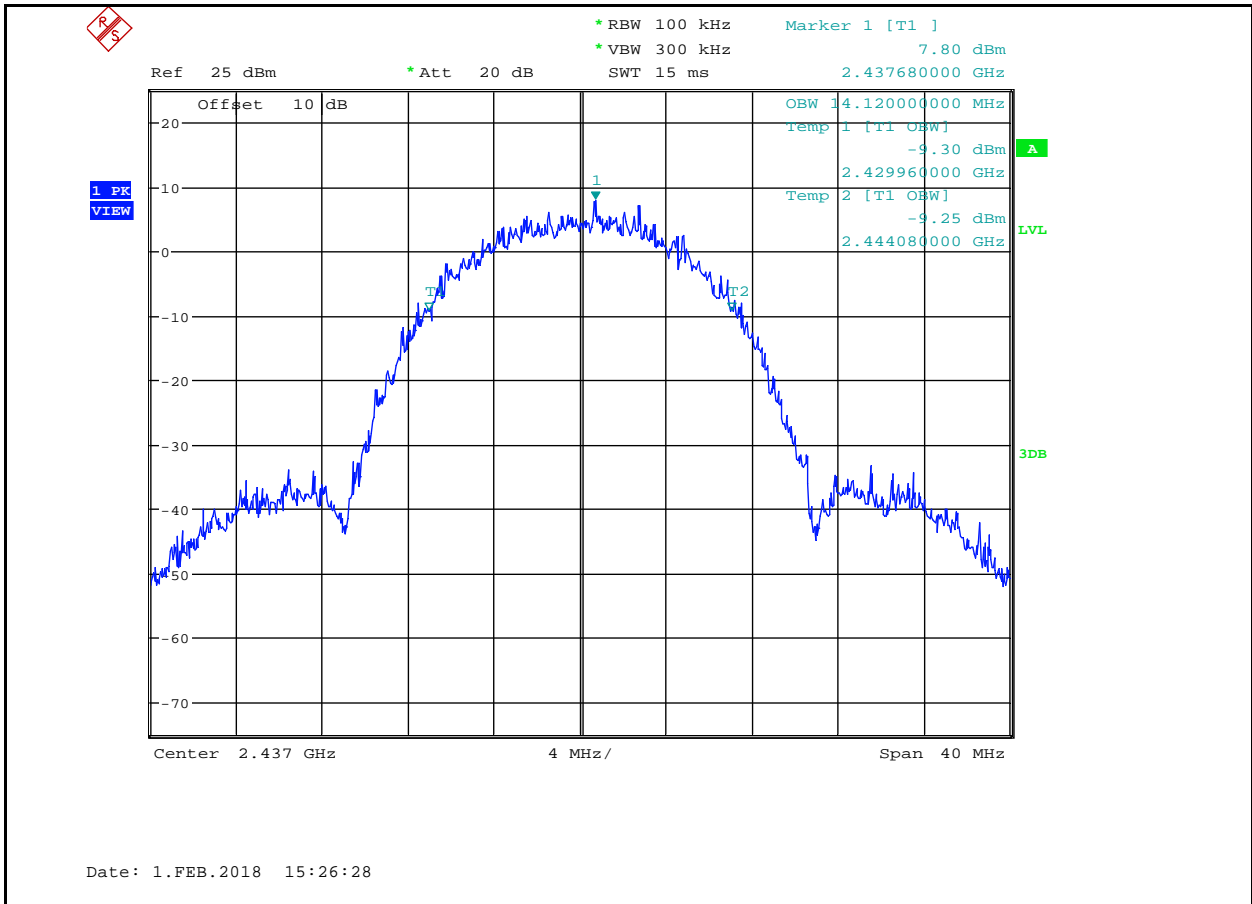


Occupied Bandwidth_11B_2462

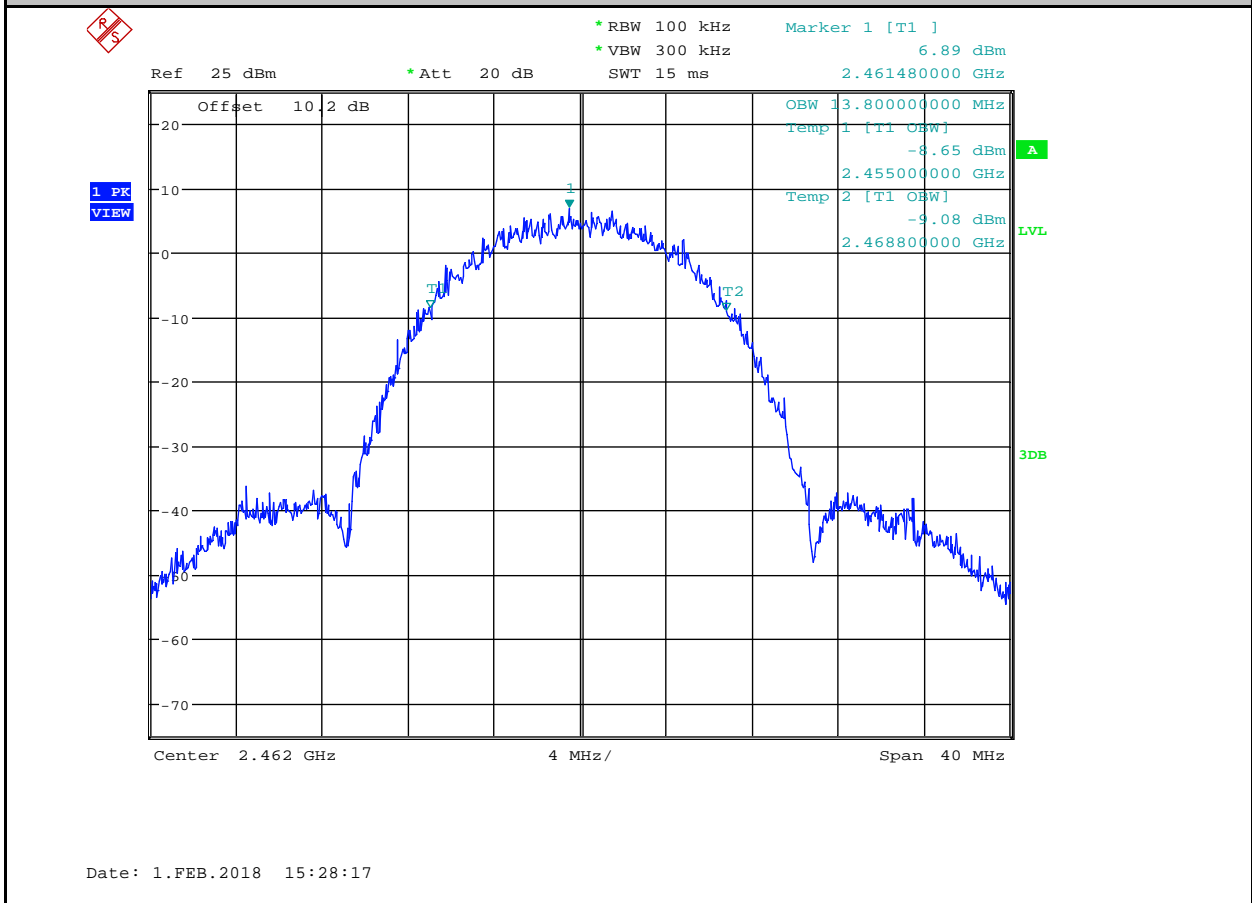


Occupied Bandwidth_11G_2412

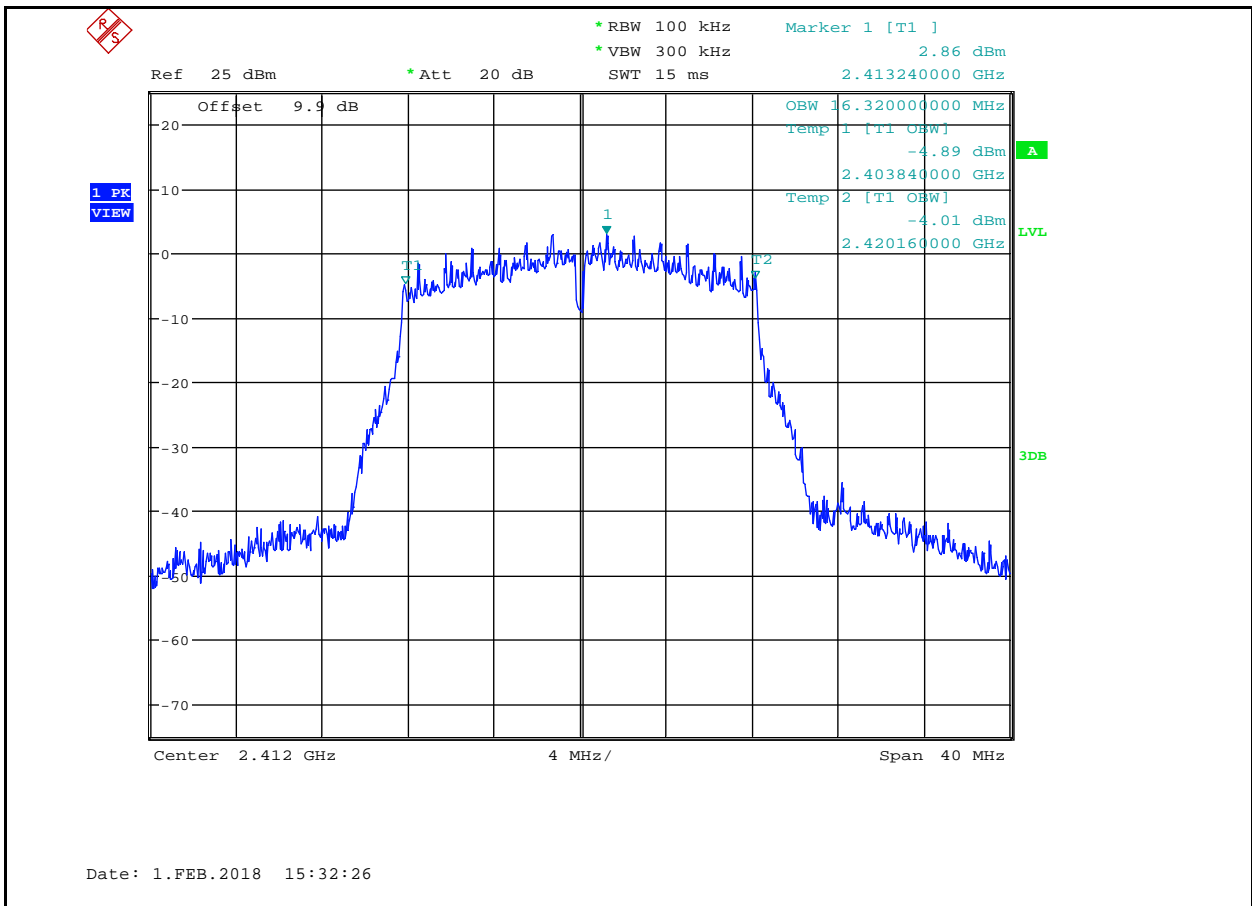


Occupied Bandwidth_11G_2437

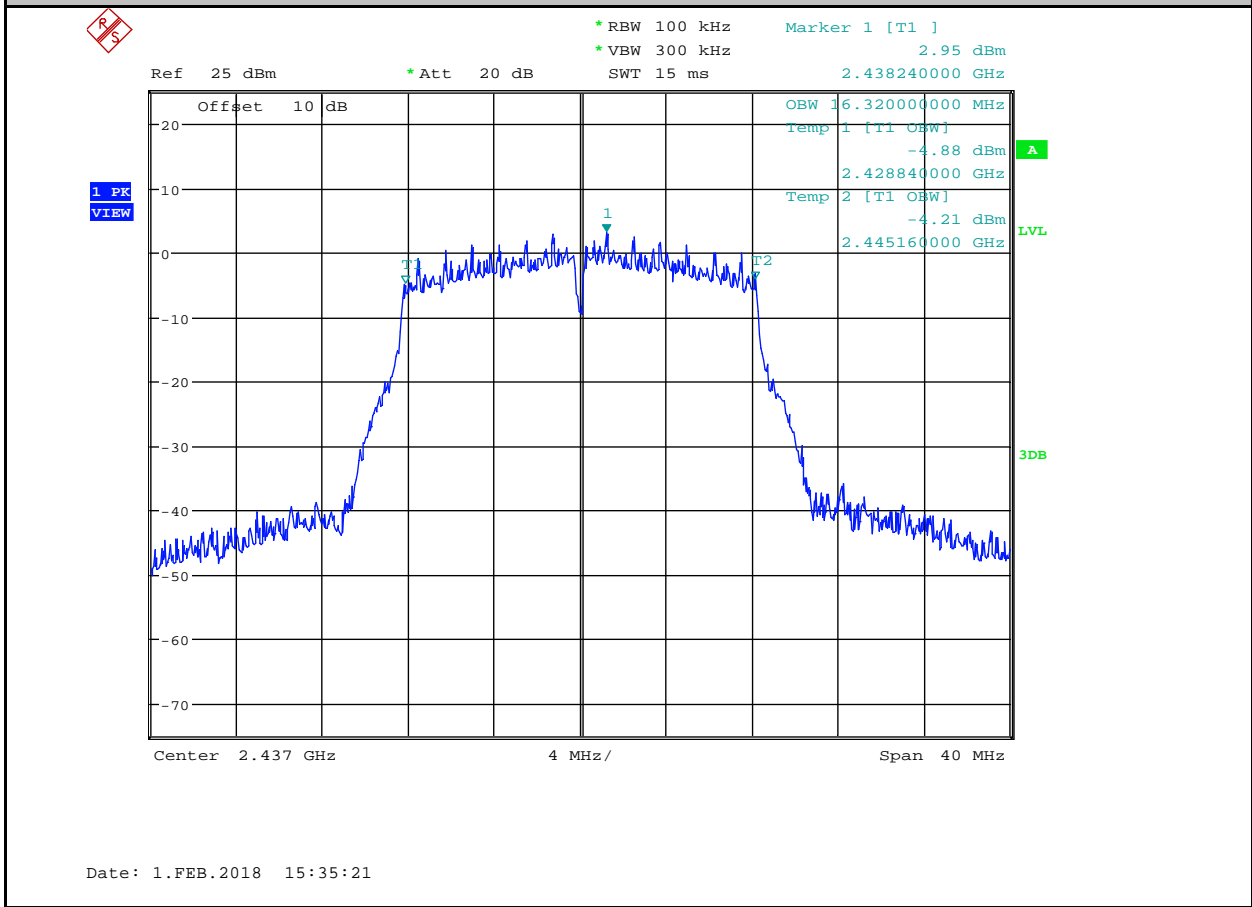


Occupied Bandwidth_11G_2462

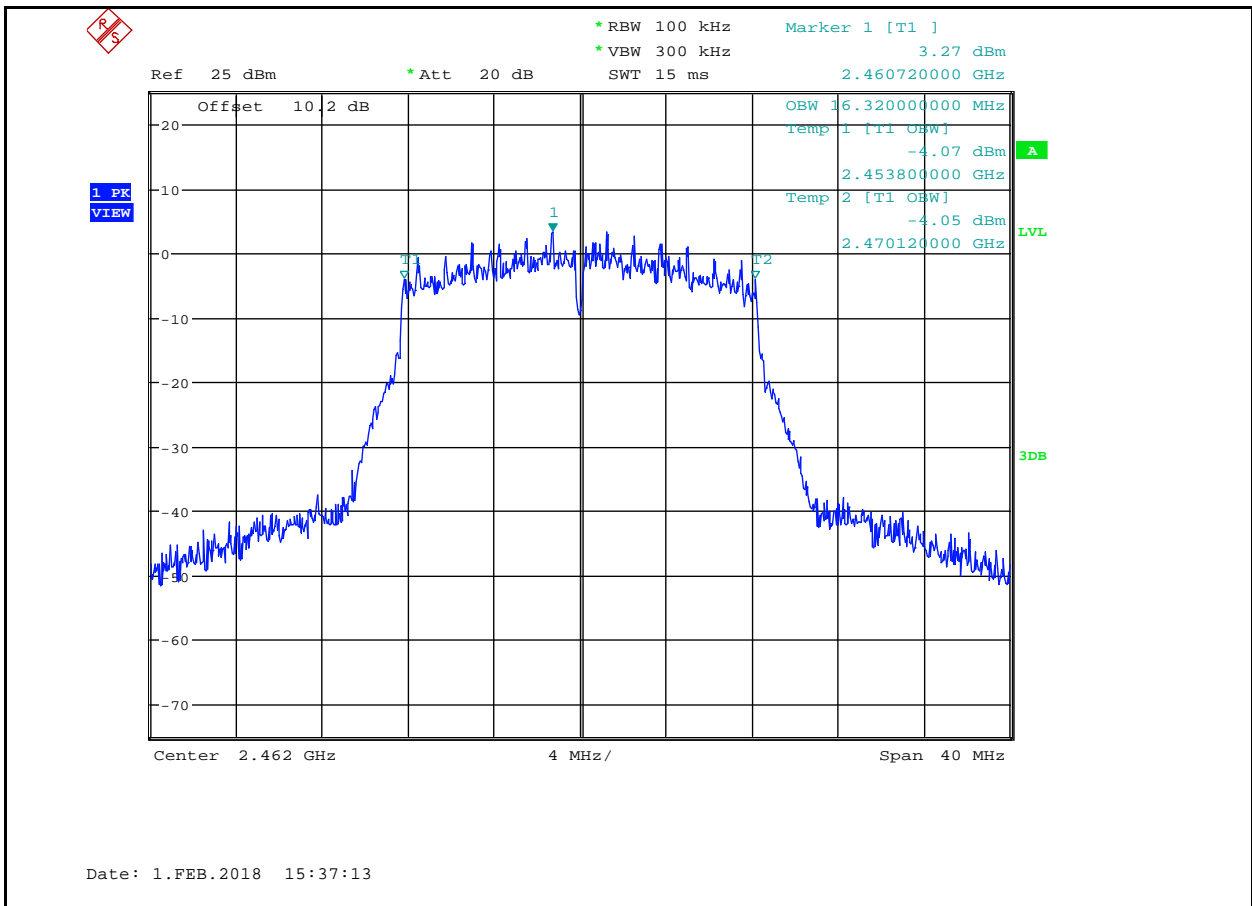


Occupied Bandwidth_11N20SISO_2412

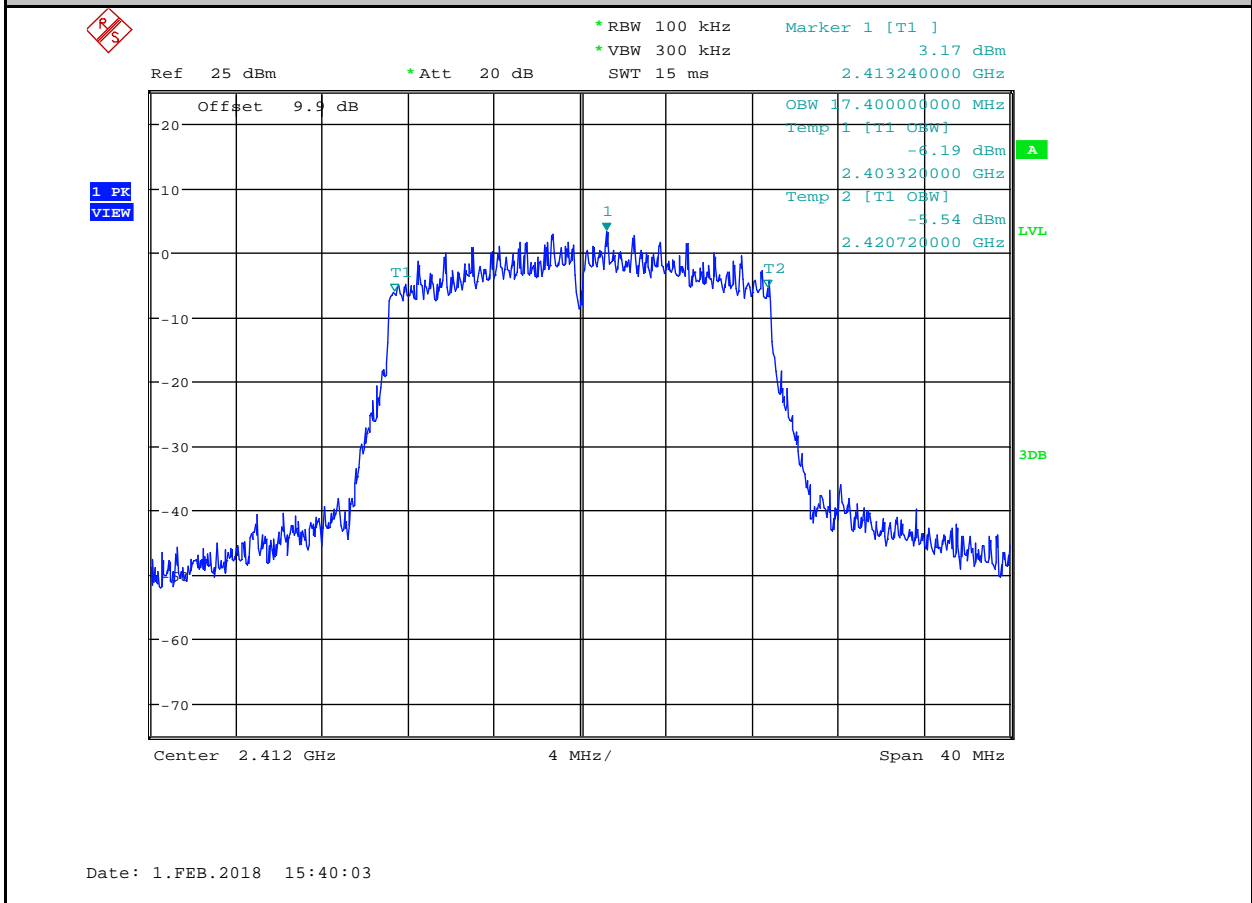


Occupied Bandwidth_11N20SISO_2437

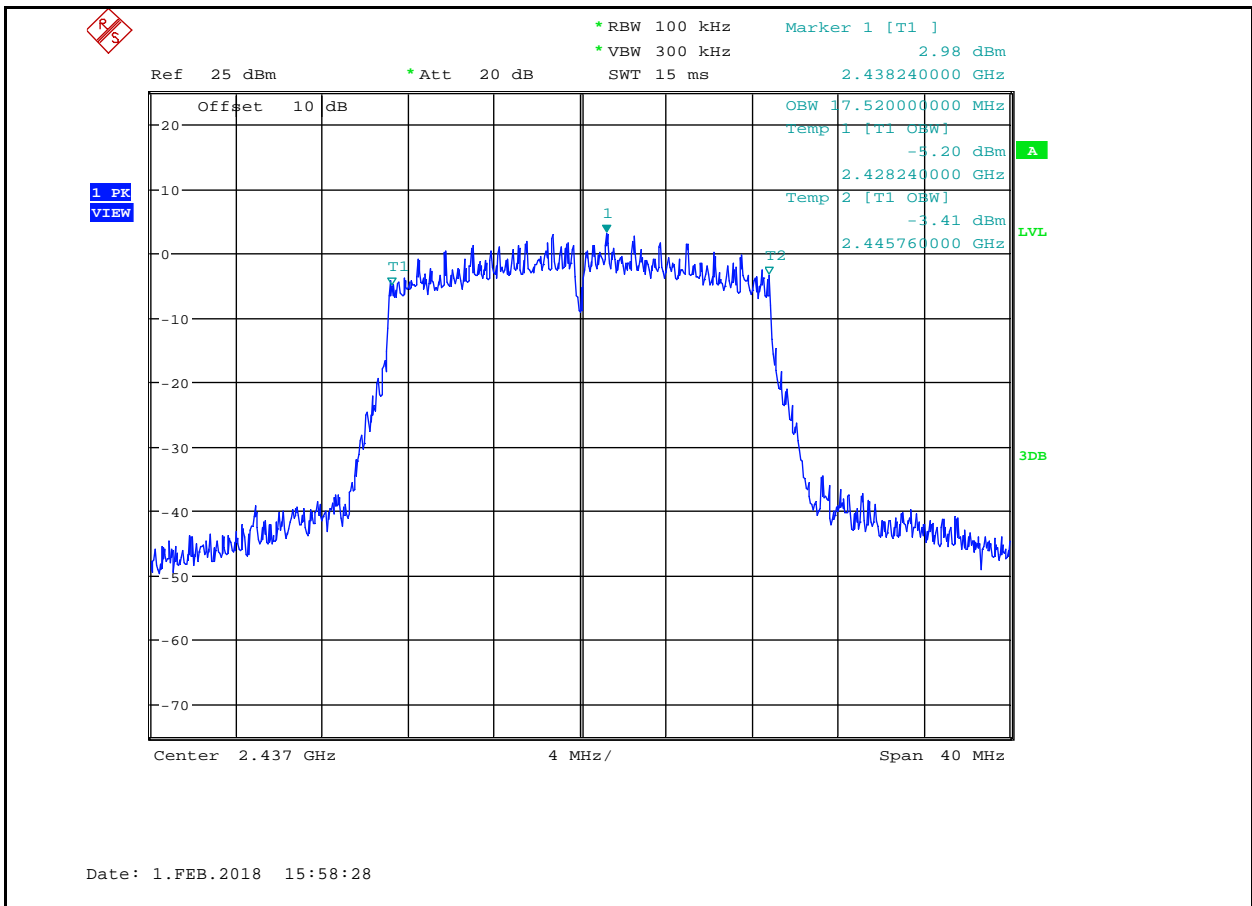


Occupied Bandwidth_11N20SISO_2462

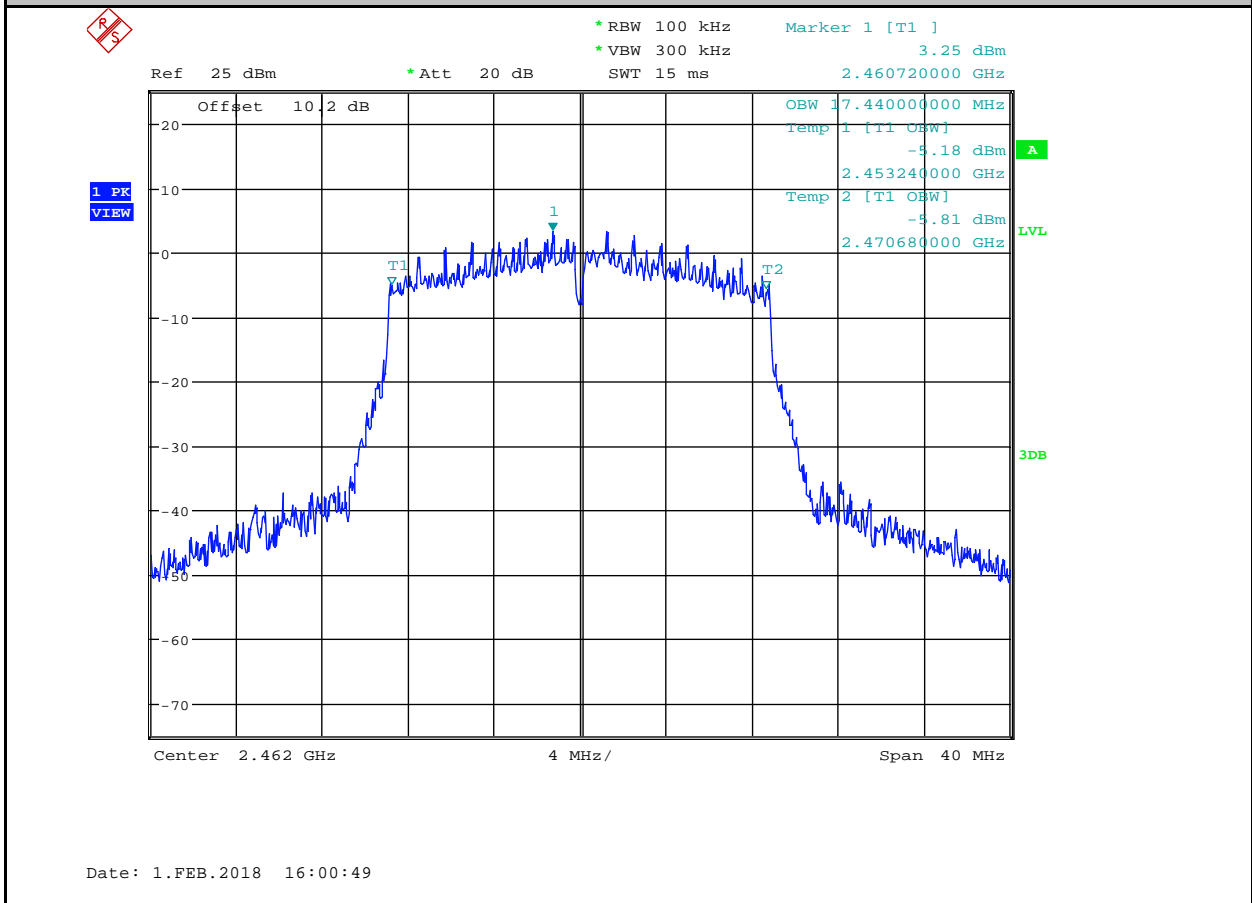


Occupied Bandwidth_11N40SISO_2422

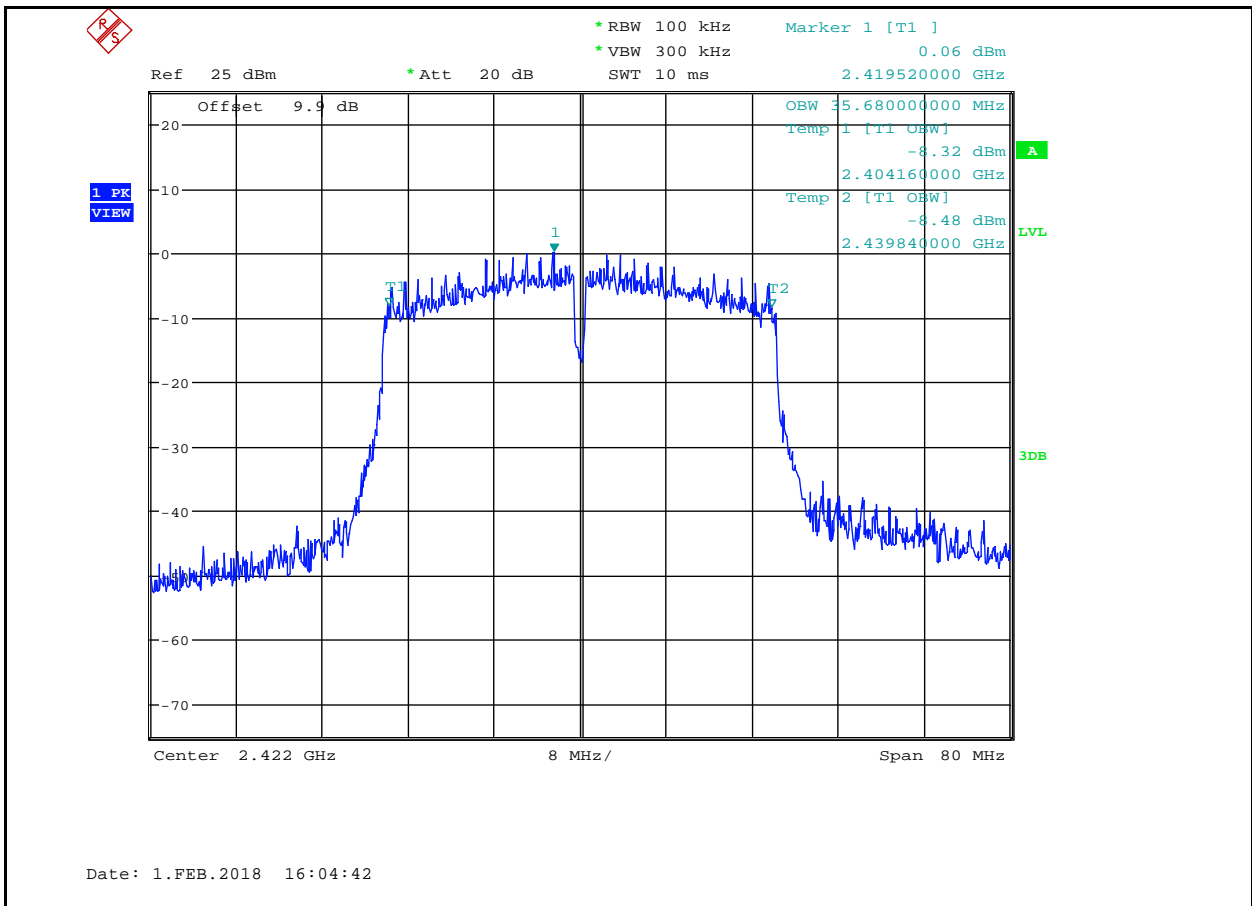

Occupied Bandwidth_11N40SISO_2437

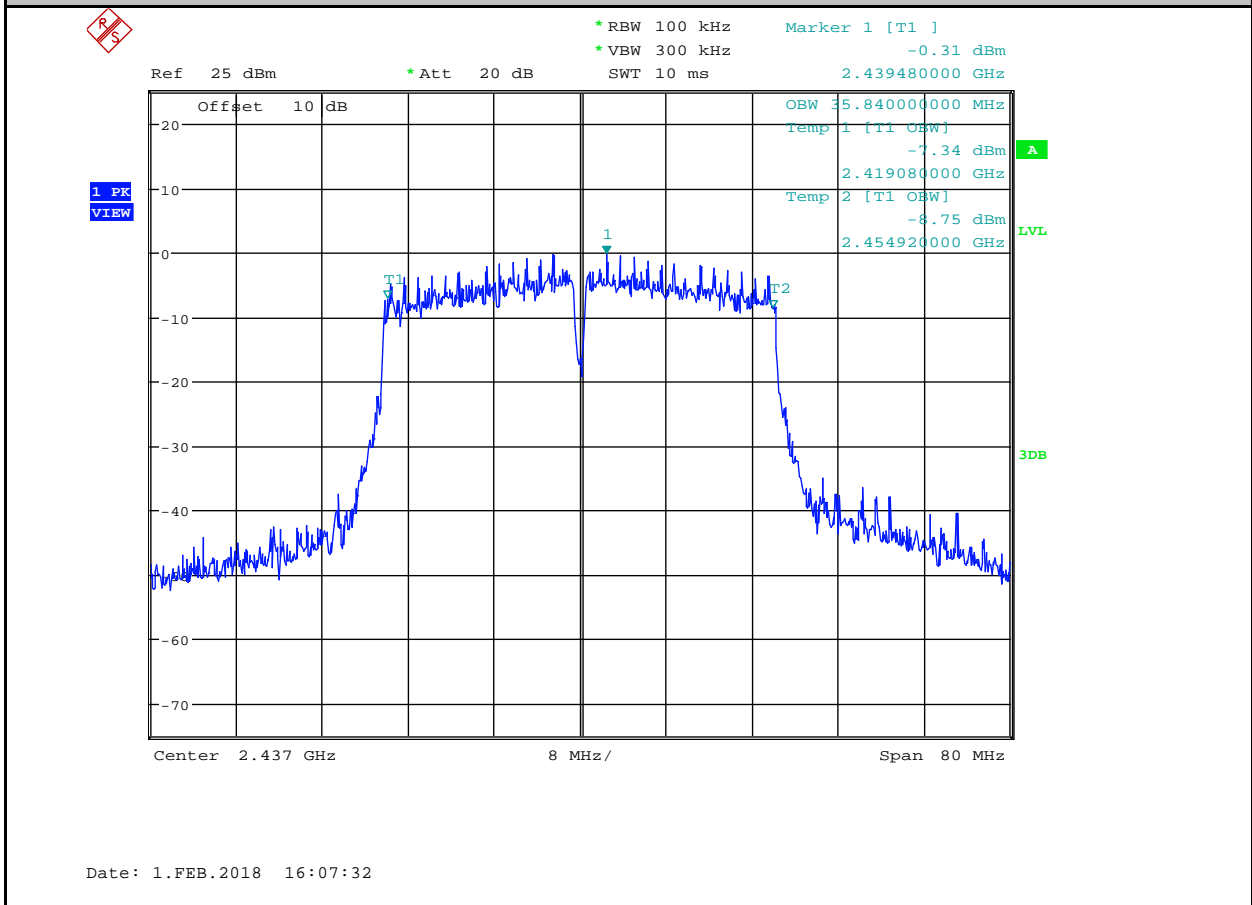

Occupied Bandwidth_11N40SISO_2452

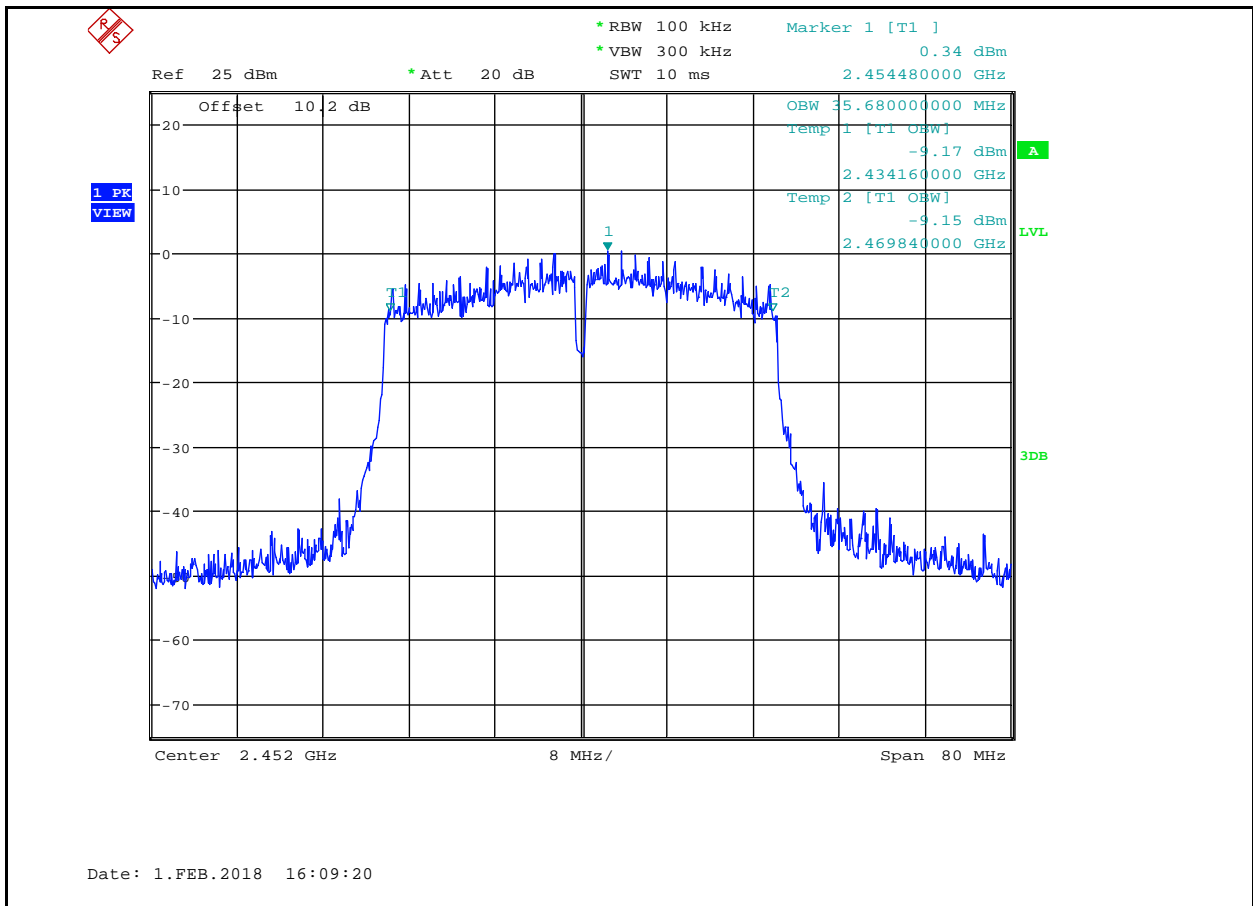

5. Conducted peak Output Power

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test Procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the PK output power of each antenna port by power sensor.

5.4. Test Result

Test Mode	Test	Power[dBm]	Limit[dBm]	Verdict
11B	2412	21.86	30	PASS
11B	2437	21.84	30	PASS
11B	2462	21.50	30	PASS
11G	2412	21.20	30	PASS
11G	2437	21.29	30	PASS
11G	2462	21.37	30	PASS
11N20SISO	2412	21.14	30	PASS
11N20SISO	2437	21.19	30	PASS
11N20SISO	2462	21.34	30	PASS
11N40SISO	2422	21.17	30	PASS
11N40SISO	2437	20.95	30	PASS
11N40SISO	2452	21.18	30	PASS

6. Power Spectral Density

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5times the DTS bandwidth
Detector Mode:	PEAK
Sweep time:	auto
Trace mode	Max hold


(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.


(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.4. Test Result


Test Mode	Test	PSD[dBm]	Limit[dBm/kHz]	Verdict
11B	2412	-7.21	8.00	PASS
11B	2437	-7.30	8.00	PASS
11B	2462	-6.88	8.00	PASS
11G	2412	-12.74	8.00	PASS
11G	2437	-13.03	8.00	PASS
11G	2462	-12.90	8.00	PASS
11N20SISO	2412	-11.53	8.00	PASS
11N20SISO	2437	-11.39	8.00	PASS
11N20SISO	2462	-11.99	8.00	PASS
11N40SISO	2422	-14.86	8.00	PASS
11N40SISO	2437	-15.28	8.00	PASS
11N40SISO	2452	-15.25	8.00	PASS

6.5. original test data

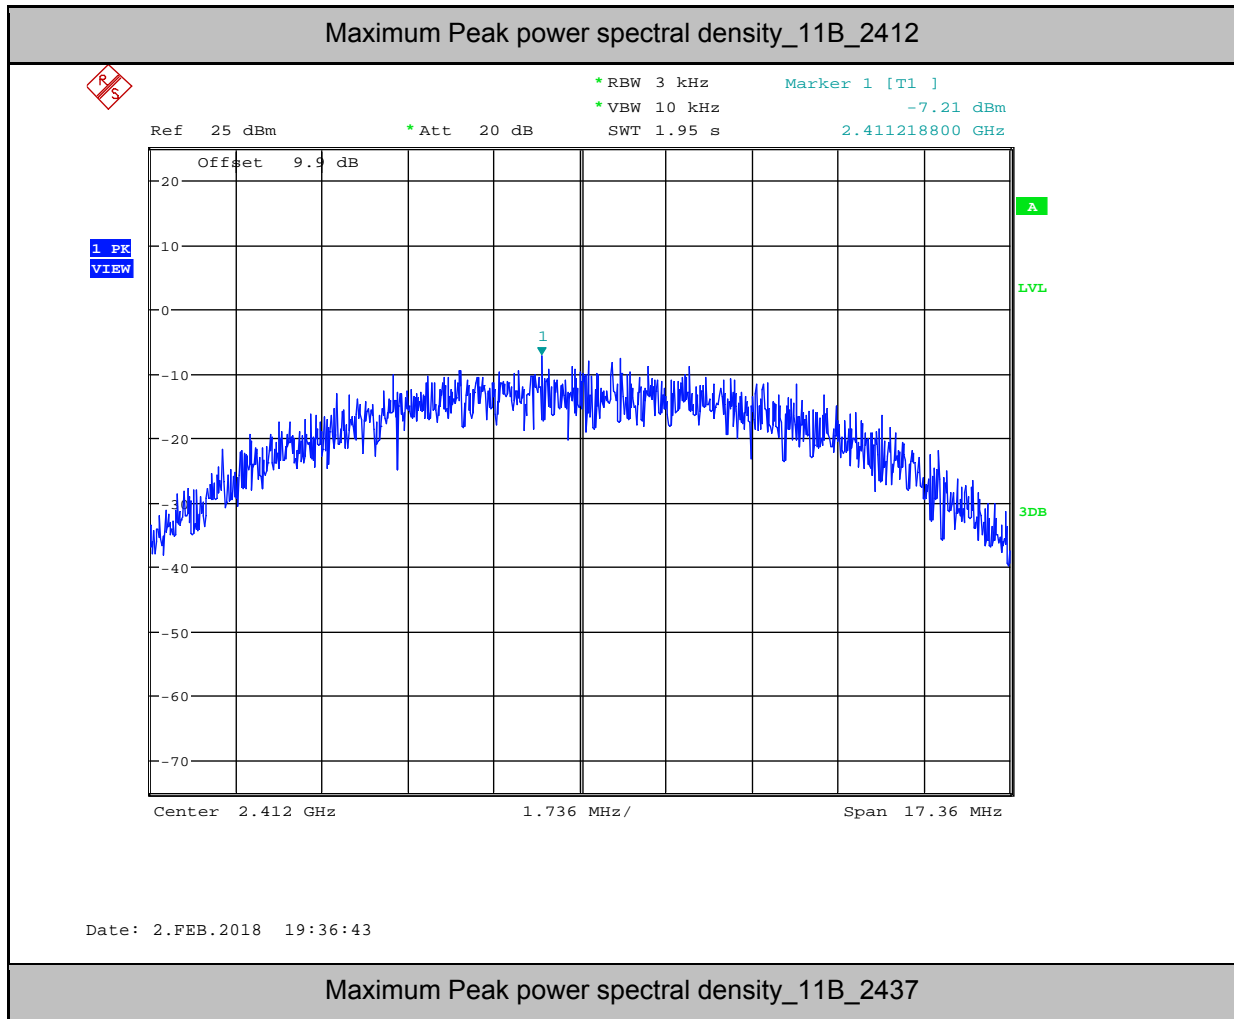


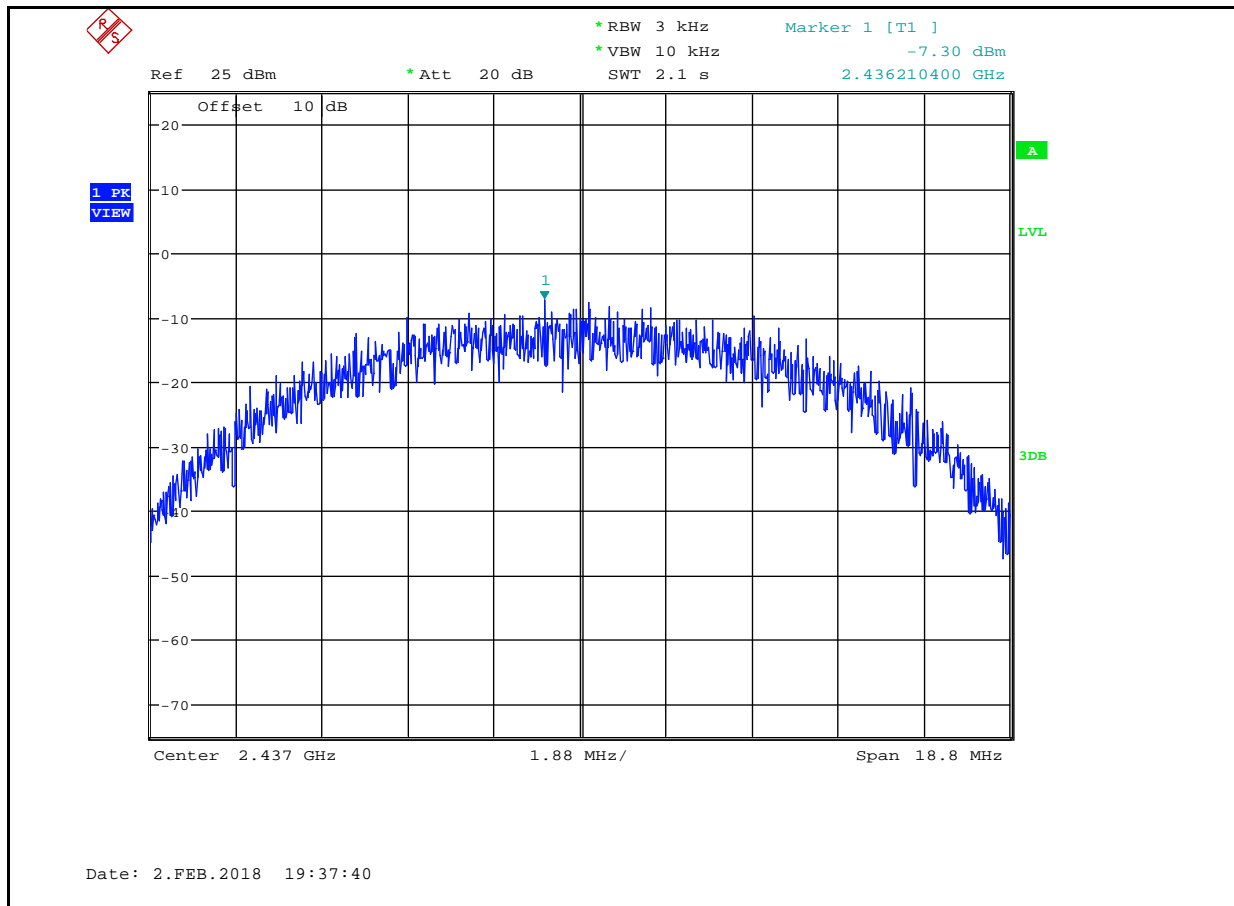


Maximum Peak power spectral density_11B_2462

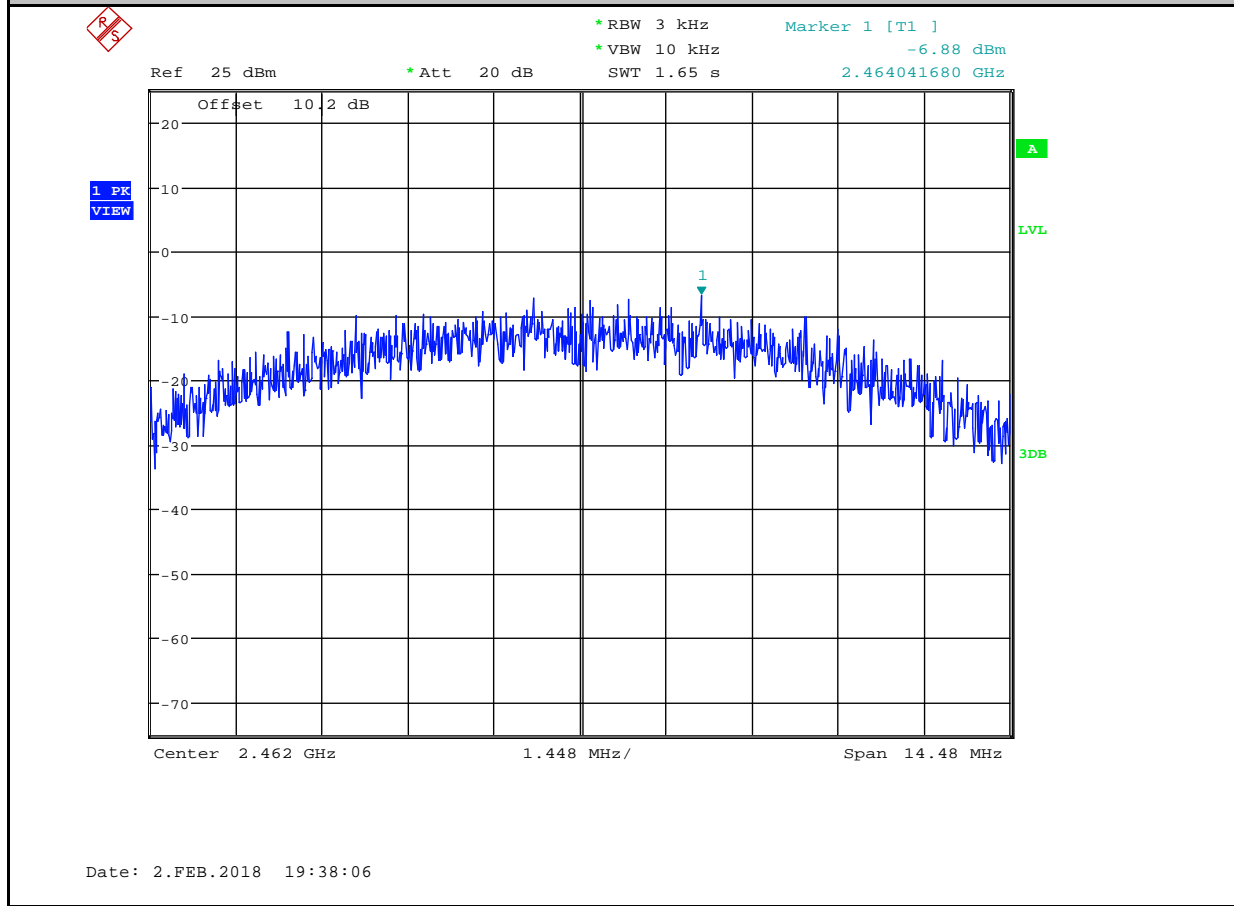


Maximum Peak power spectral density_11G_2412

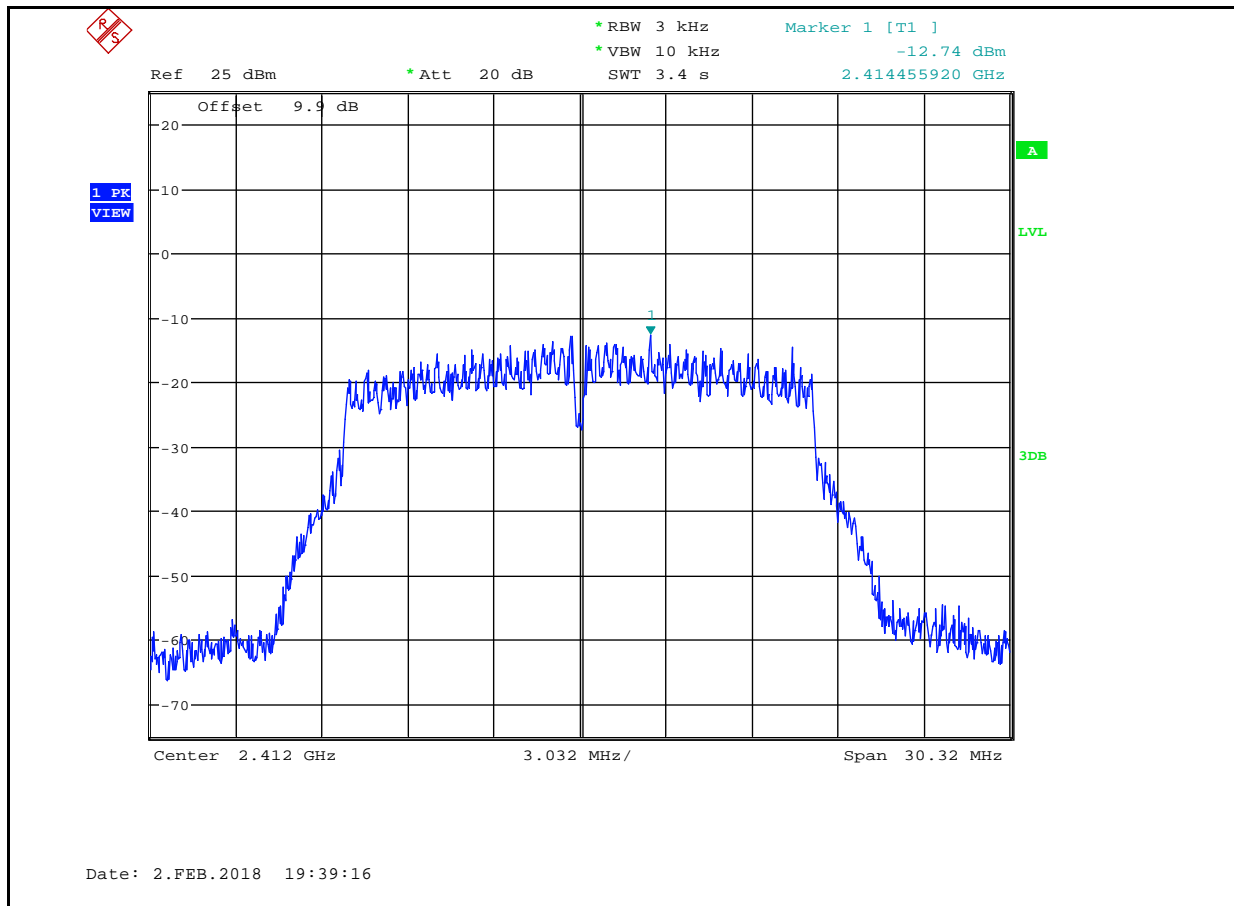


Maximum Peak power spectral density_11G_2437

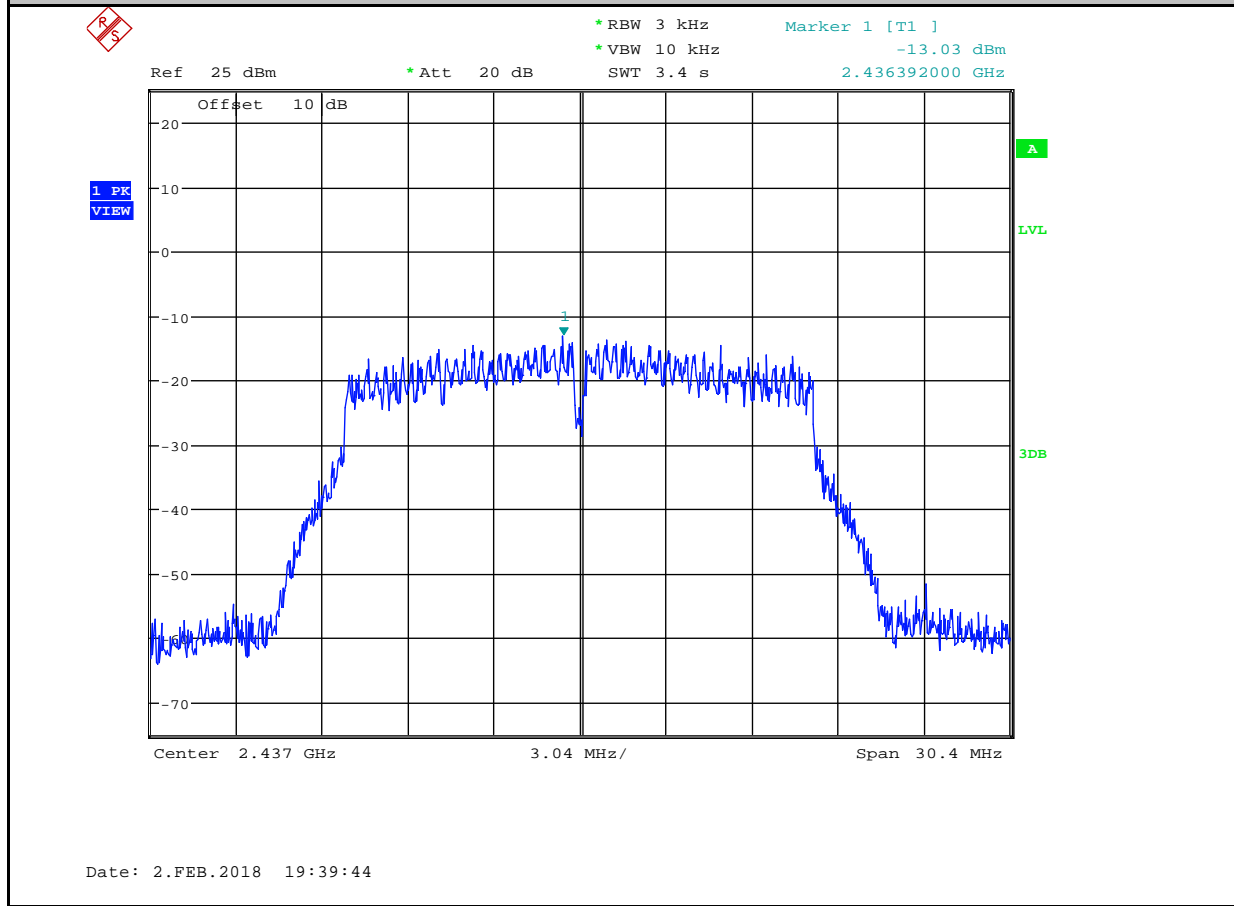


Maximum Peak power spectral density_11G_2462

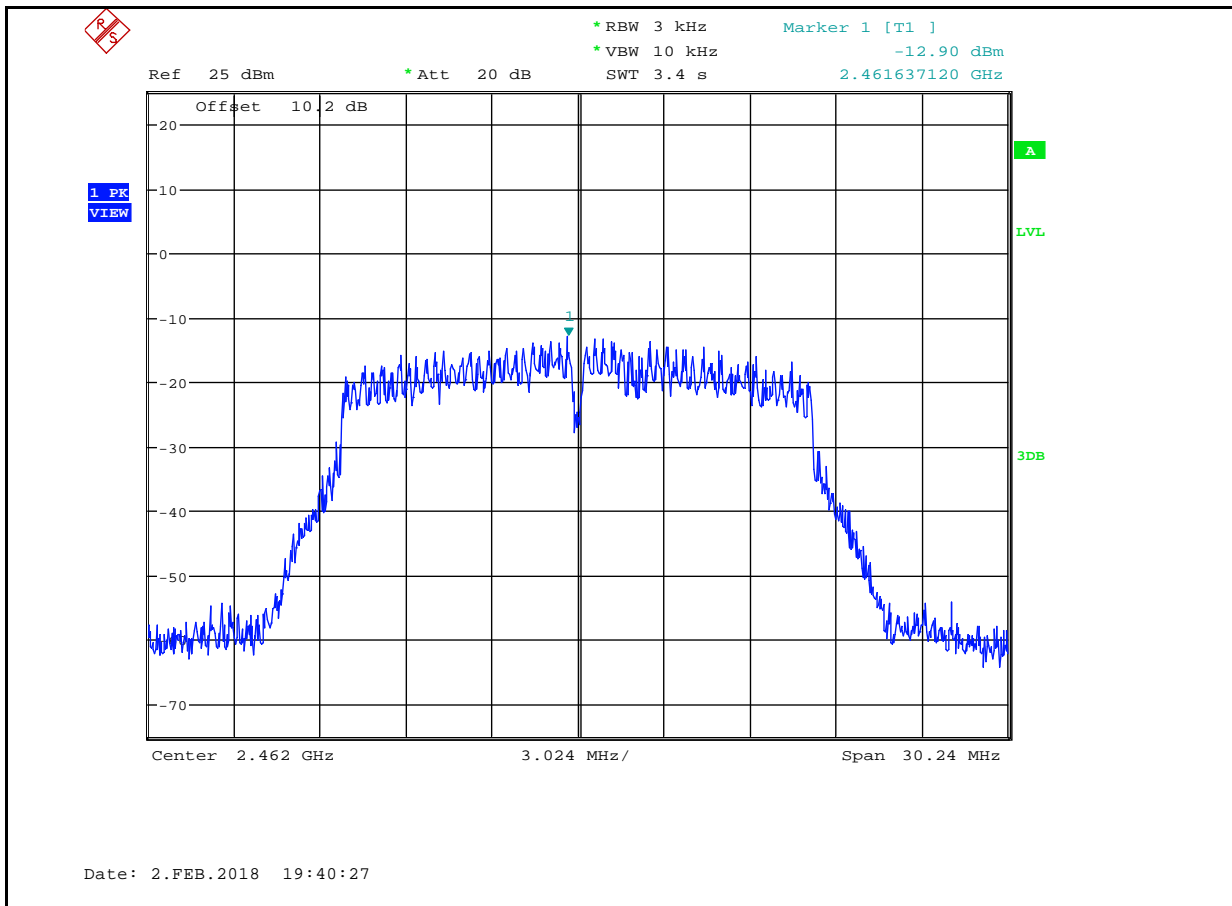


Maximum Peak power spectral density_11N20SISO_2412

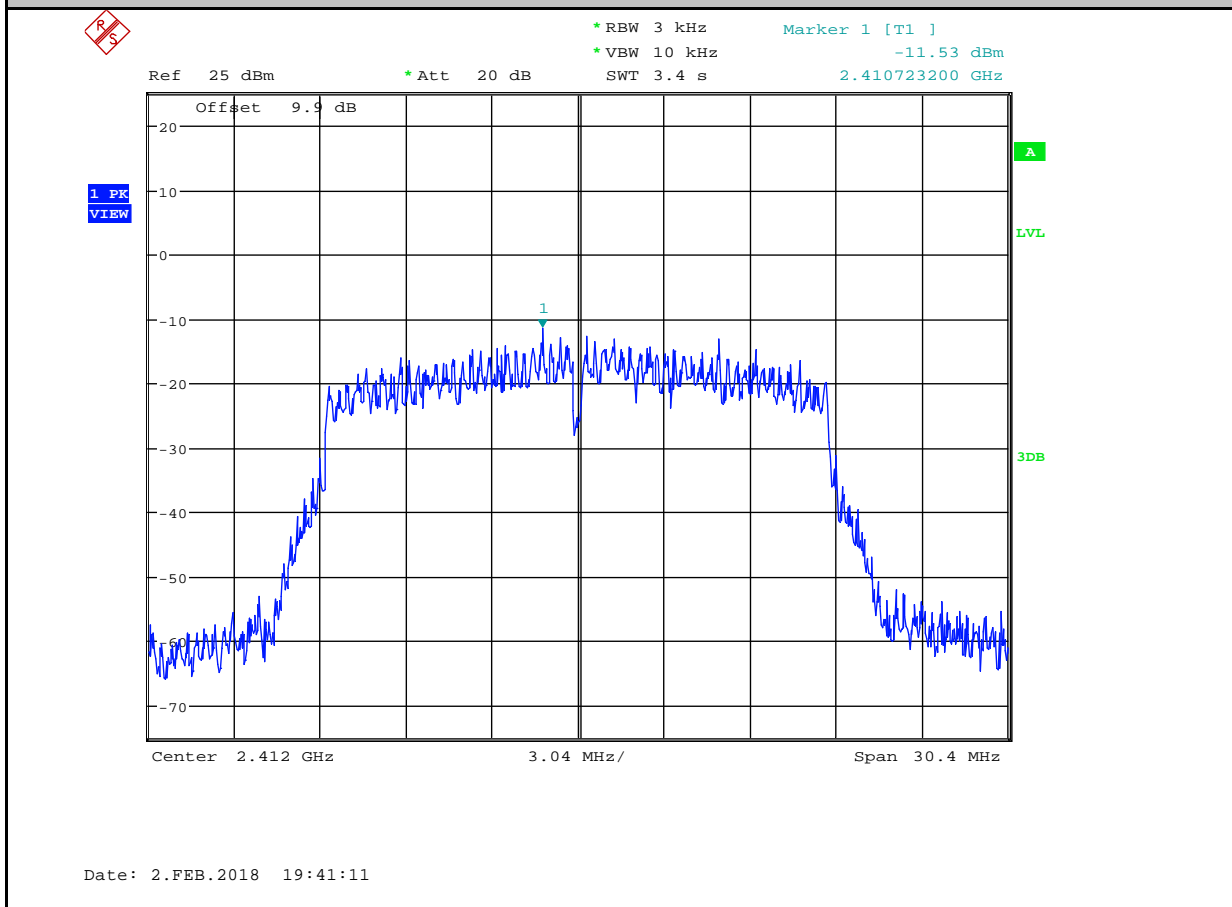


Maximum Peak power spectral density_11N20SISO_2437

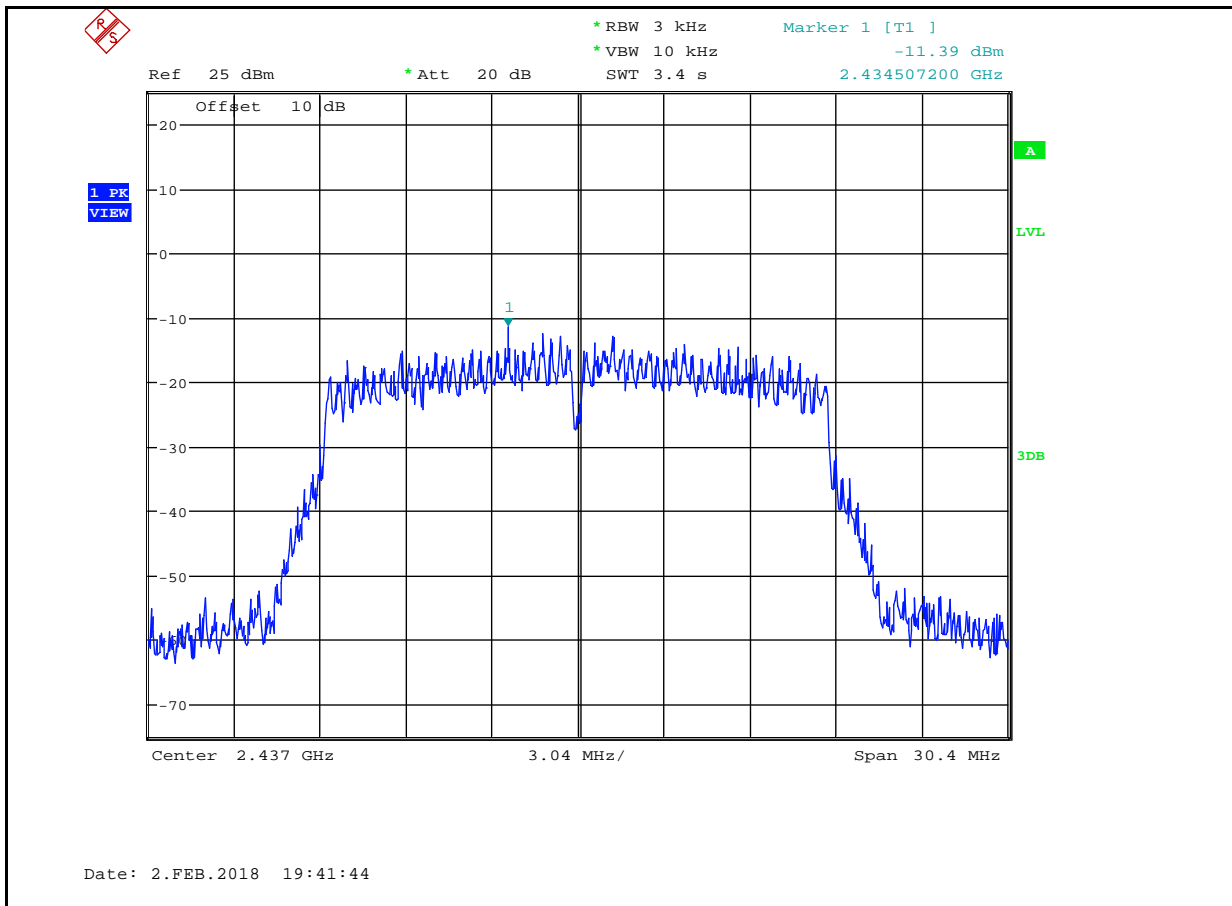


Maximum Peak power spectral density_11N20SISO_2462

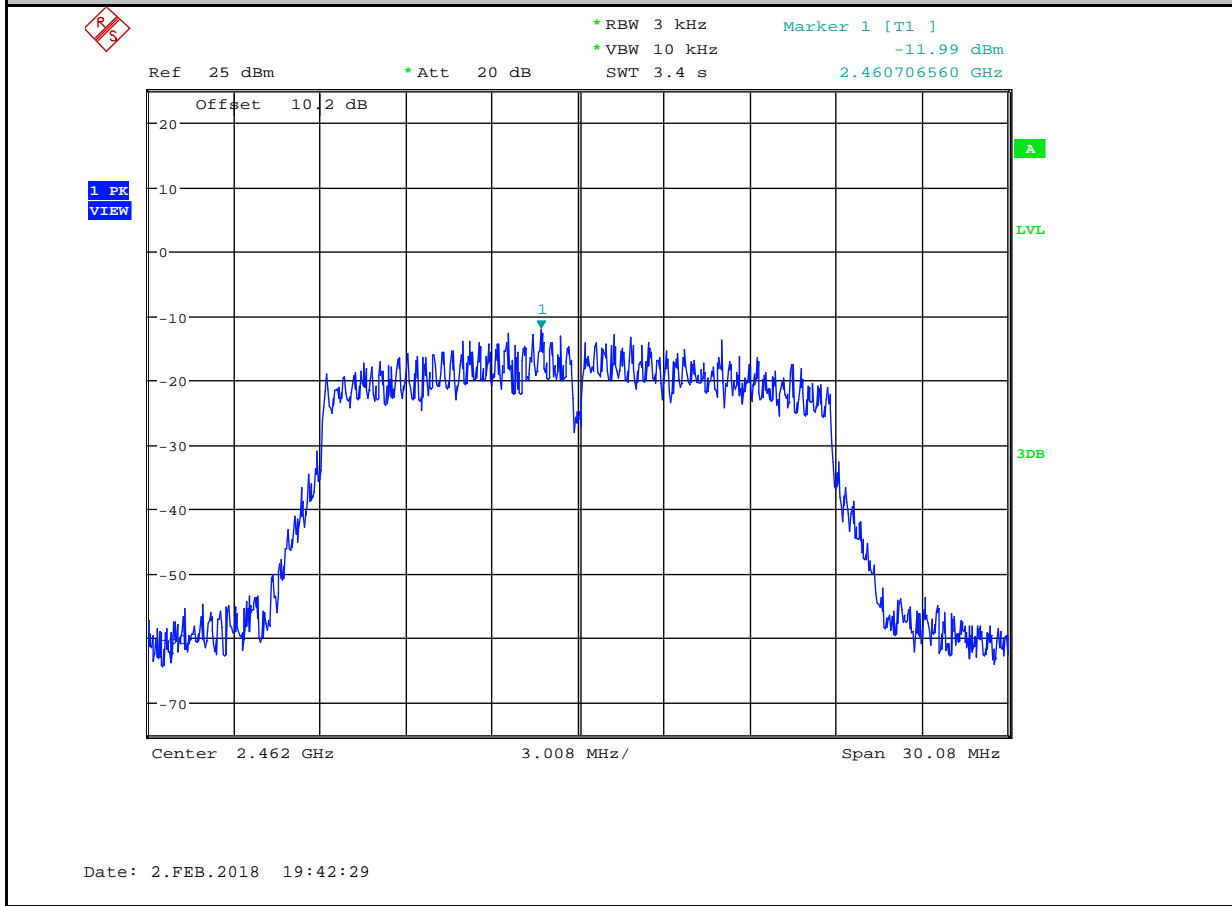


Maximum Peak power spectral density_11N40SISO_2422

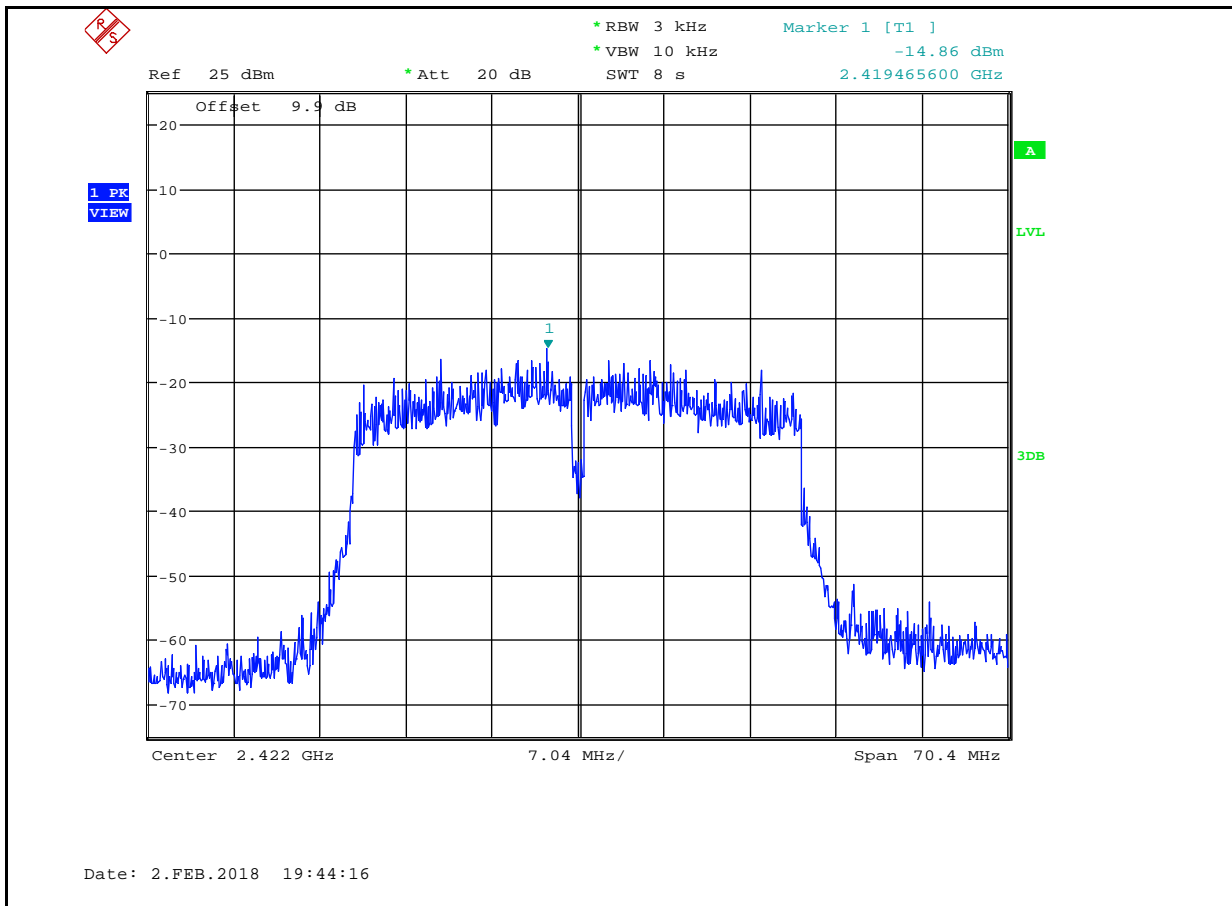

Maximum Peak power spectral density_11N40SISO_2437

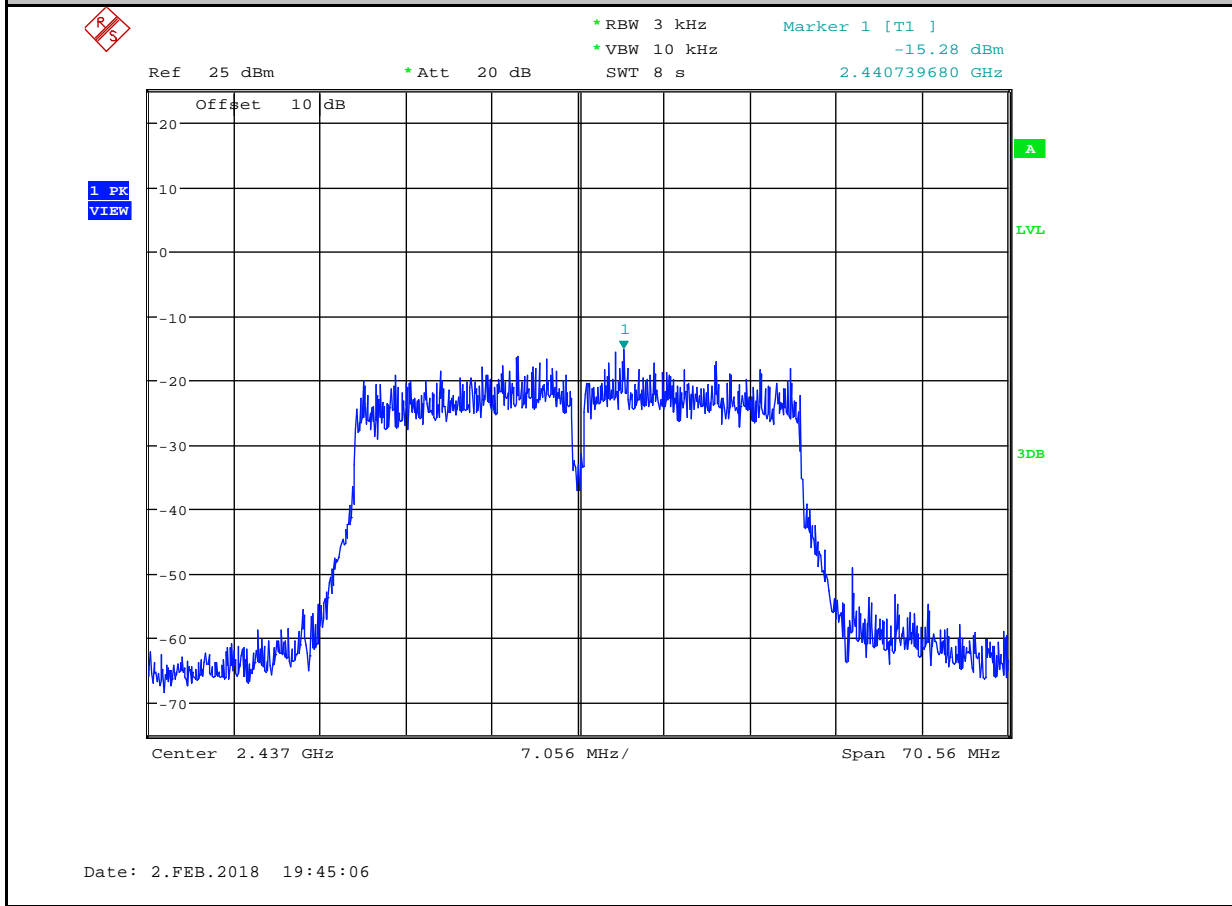

Maximum Peak power spectral density_11N40SISO_2452

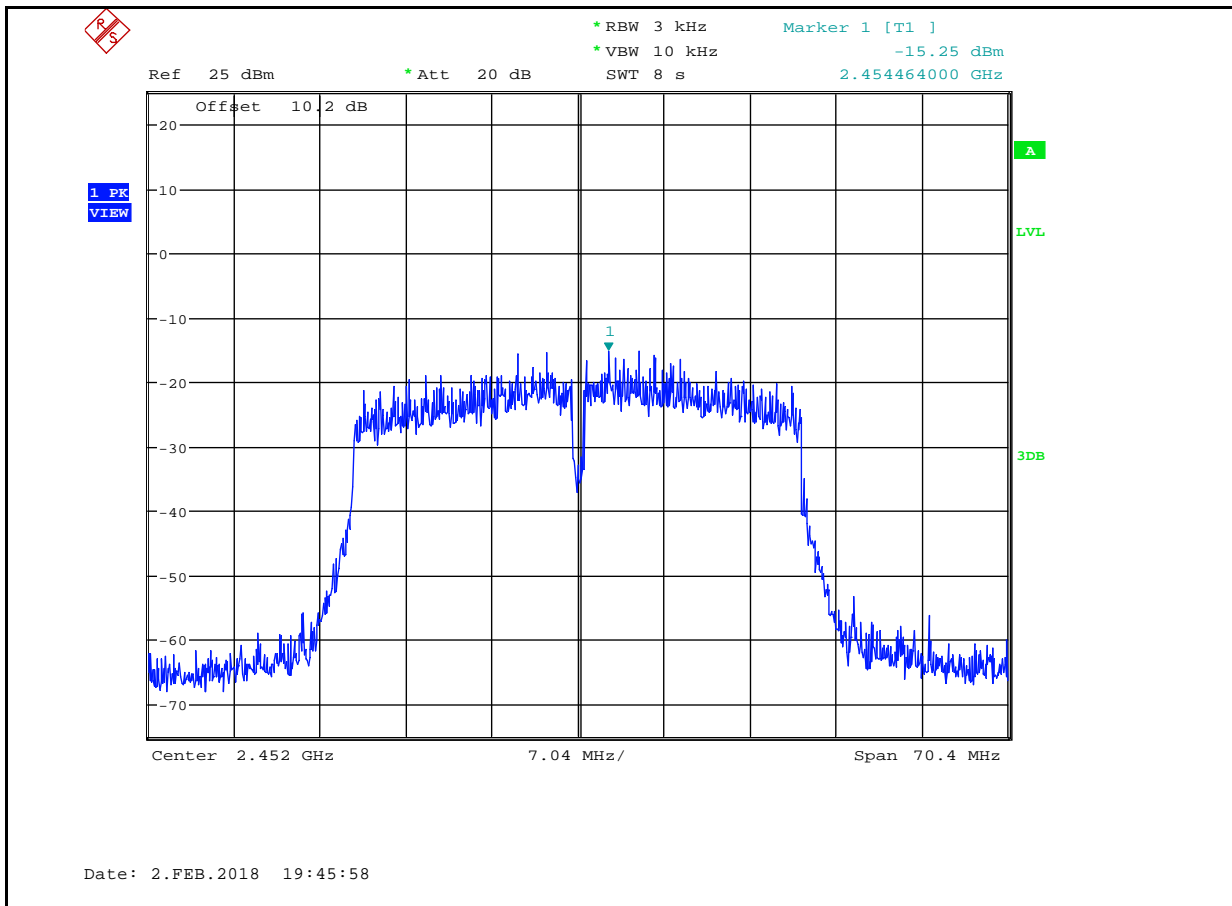

7. Band Edge and Spurious Emissions (Conducted)

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

7.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100kHz
VBW:	300kHz
Span	1.5times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100kHz
VBW:	300kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


7.4. Test Result

EUT Set Mode	CH or Frequency	Ant1 Result (dBm)	EUT Set Mode	CH or Frequency	Ant1 Result (dBm)
11b	CH1	PASS	11n HT 20	CH1	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH11	PASS
11g	CH1	PASS	11n HT 40	CH3	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH9	PASS


7.5. original test data

Band Edge

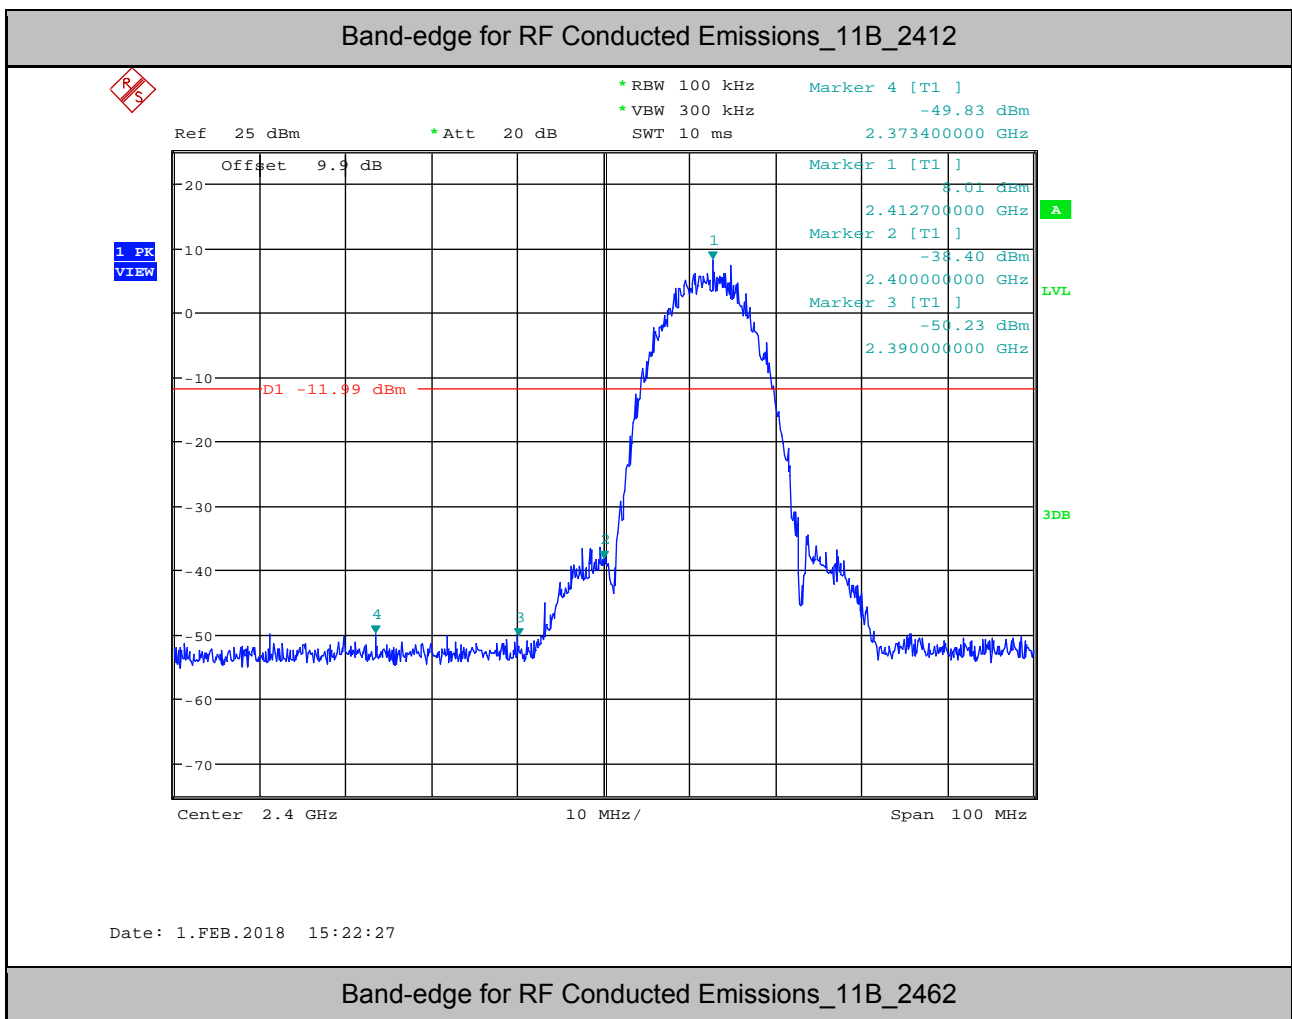


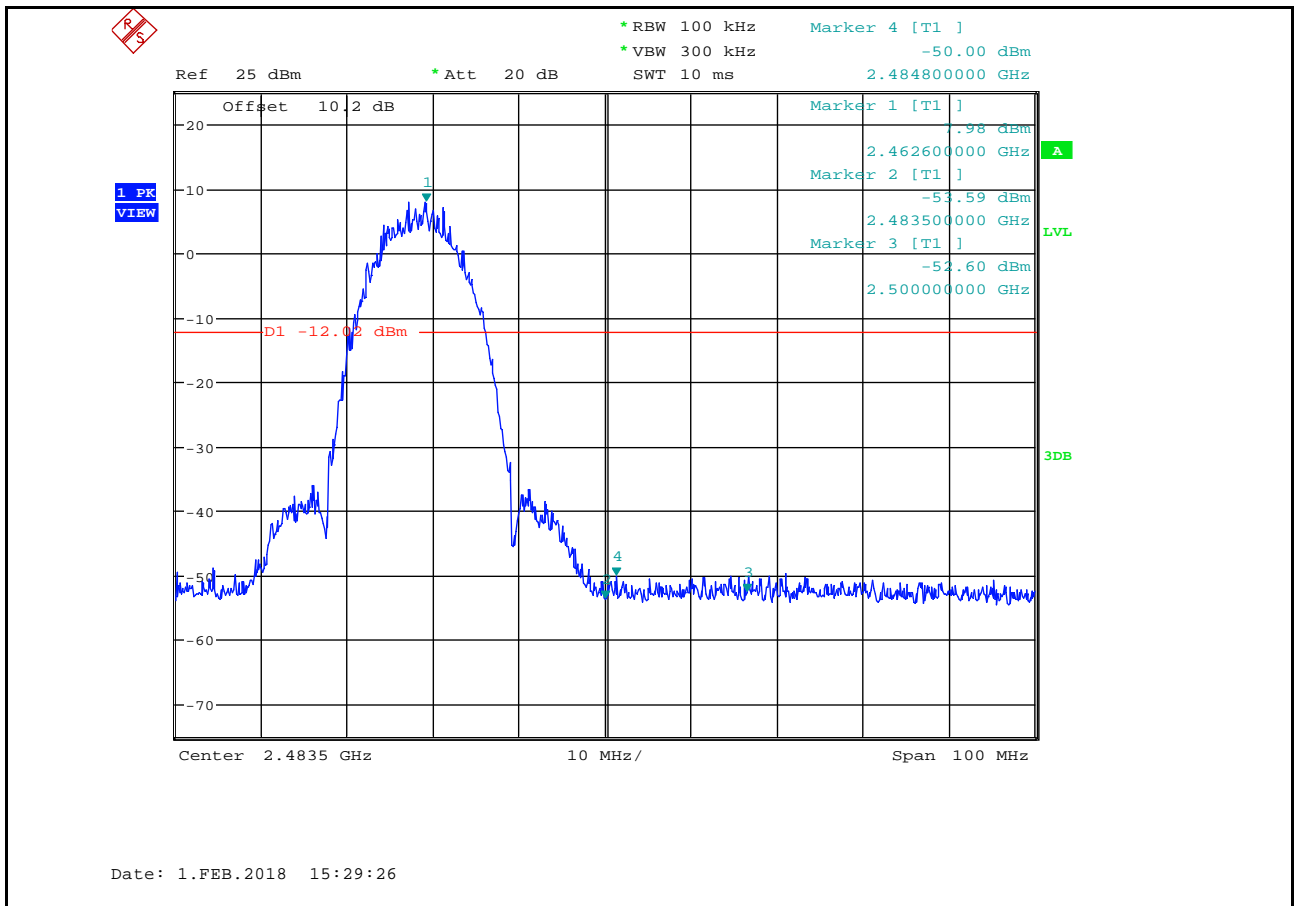


Band-edge for RF Conducted Emissions_11G_2412

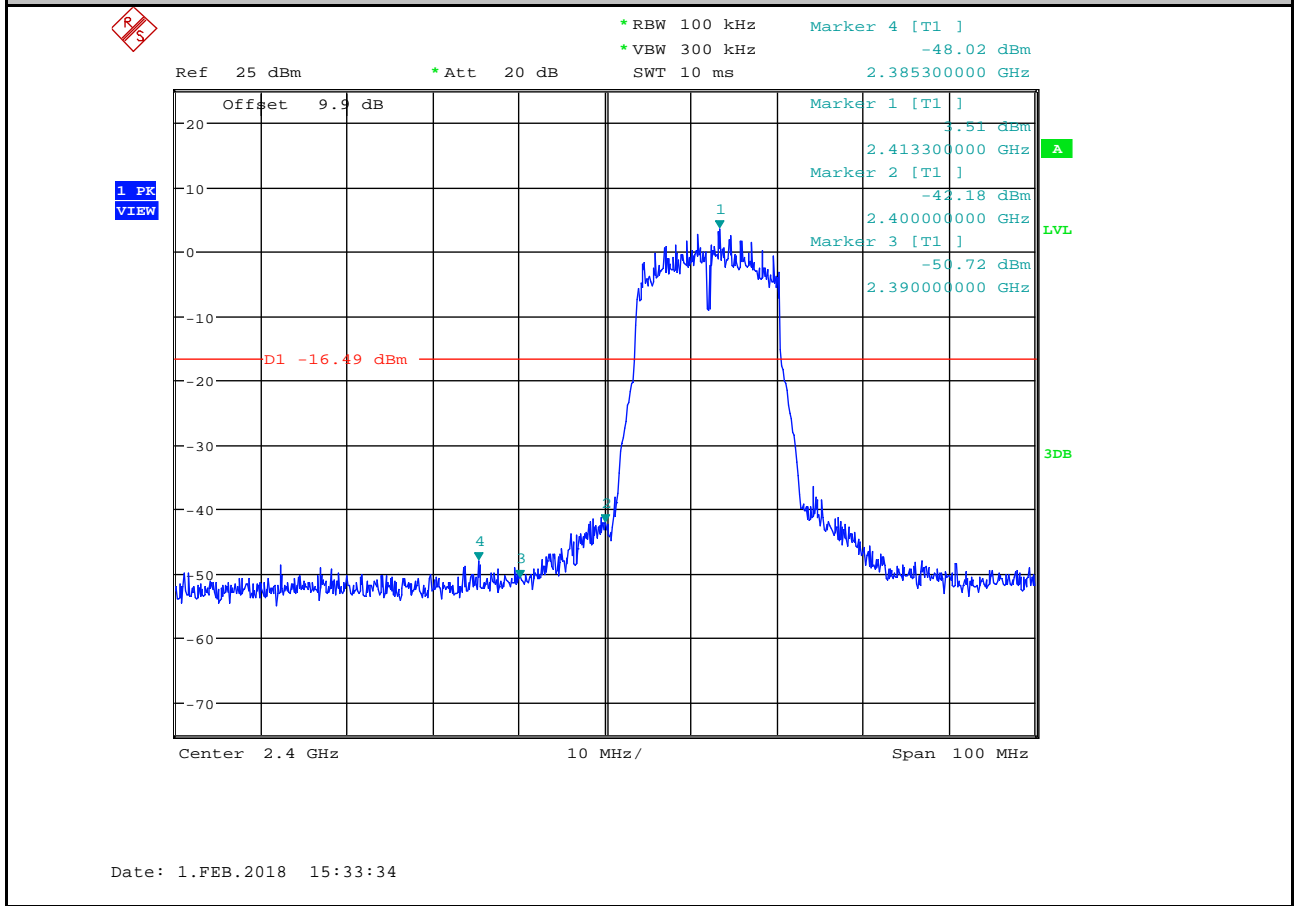

Band-edge for RF Conducted Emissions_11G_2462

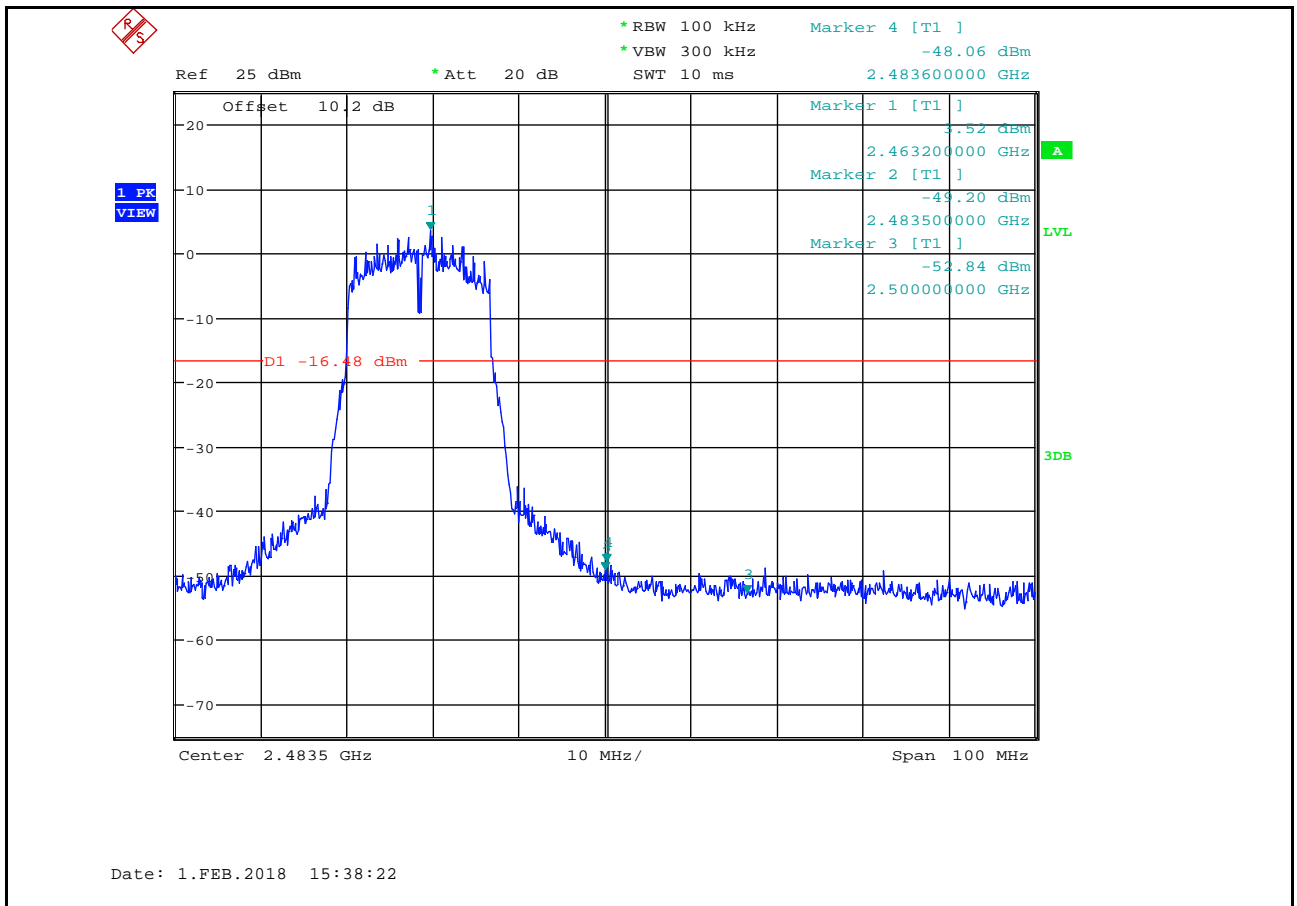


Band-edge for RF Conducted Emissions_11N20SISO_2412

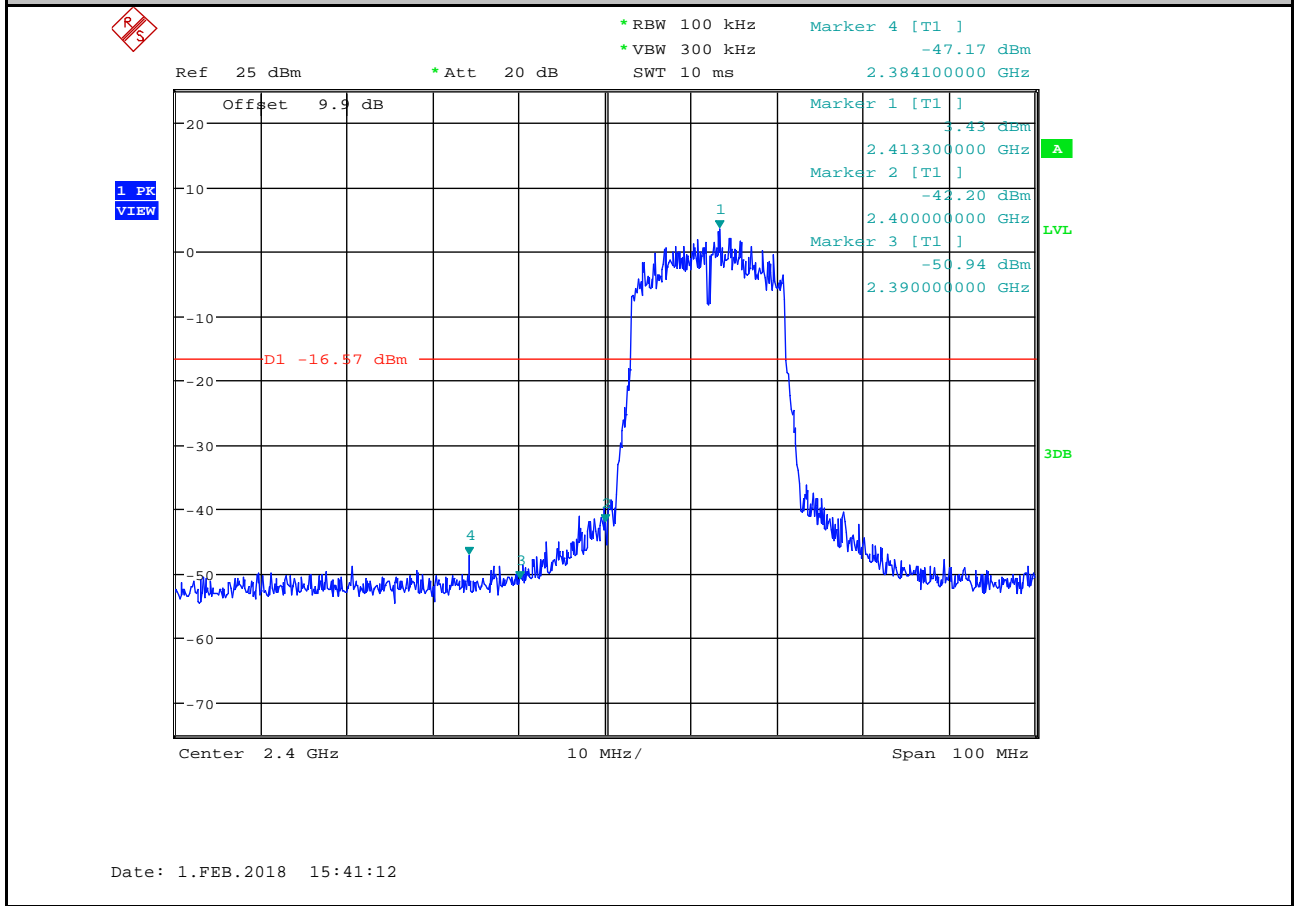

Band-edge for RF Conducted Emissions_11N20SISO_2462



Ref 25 dBm * Att 20 dB * RBW 100 kHz Marker 4 [T1] -48.25 dBm 2.483800000 GHz
* VBW 300 kHz
SWT 10 ms

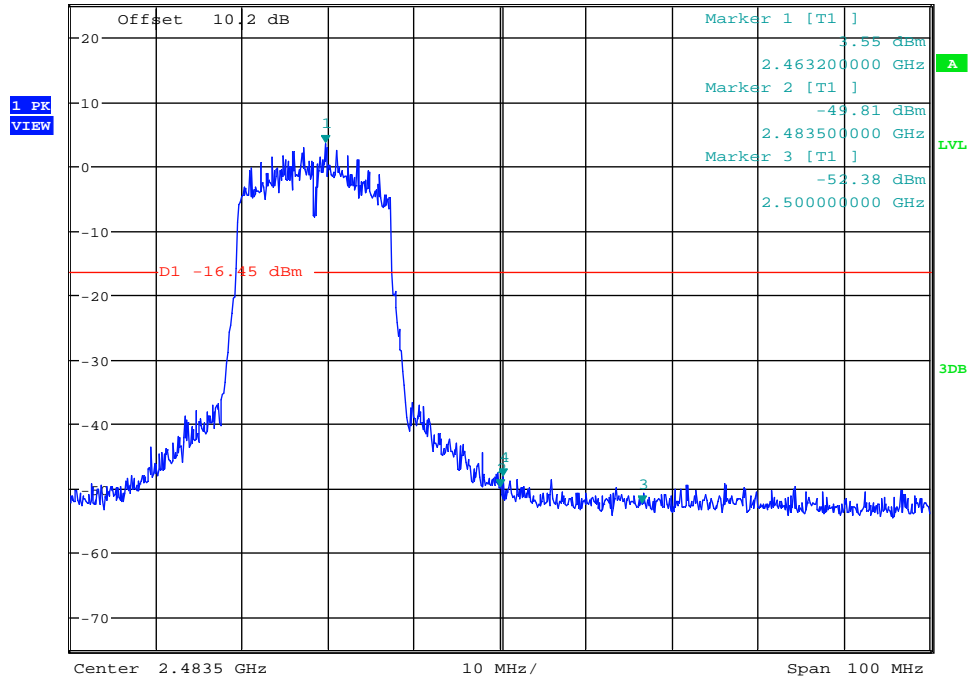


Date: 1.FEB.2018 16:01:58

Band-edge for RF Conducted Emissions_11N40SISO_2422




Ref 25 dBm * Att 20 dB * RBW 100 kHz Marker 4 [T1] -45.48 dBm 2.386900000 GHz
* VBW 300 kHz
SWT 10 ms

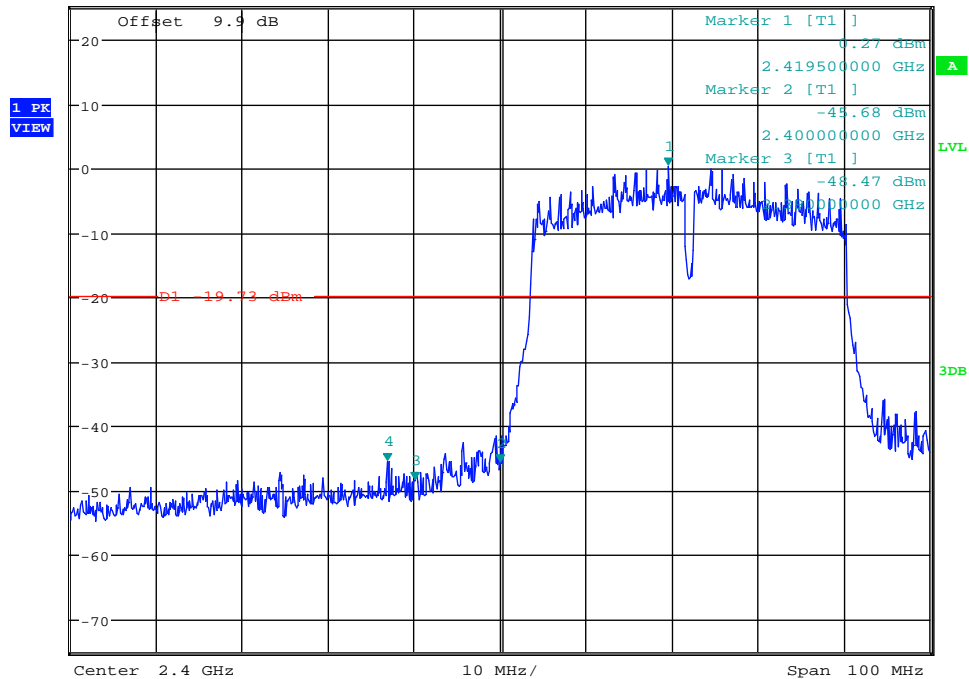




Date: 1.FEB.2018 16:05:51

Band-edge for RF Conducted Emissions_11N40SISO_2452

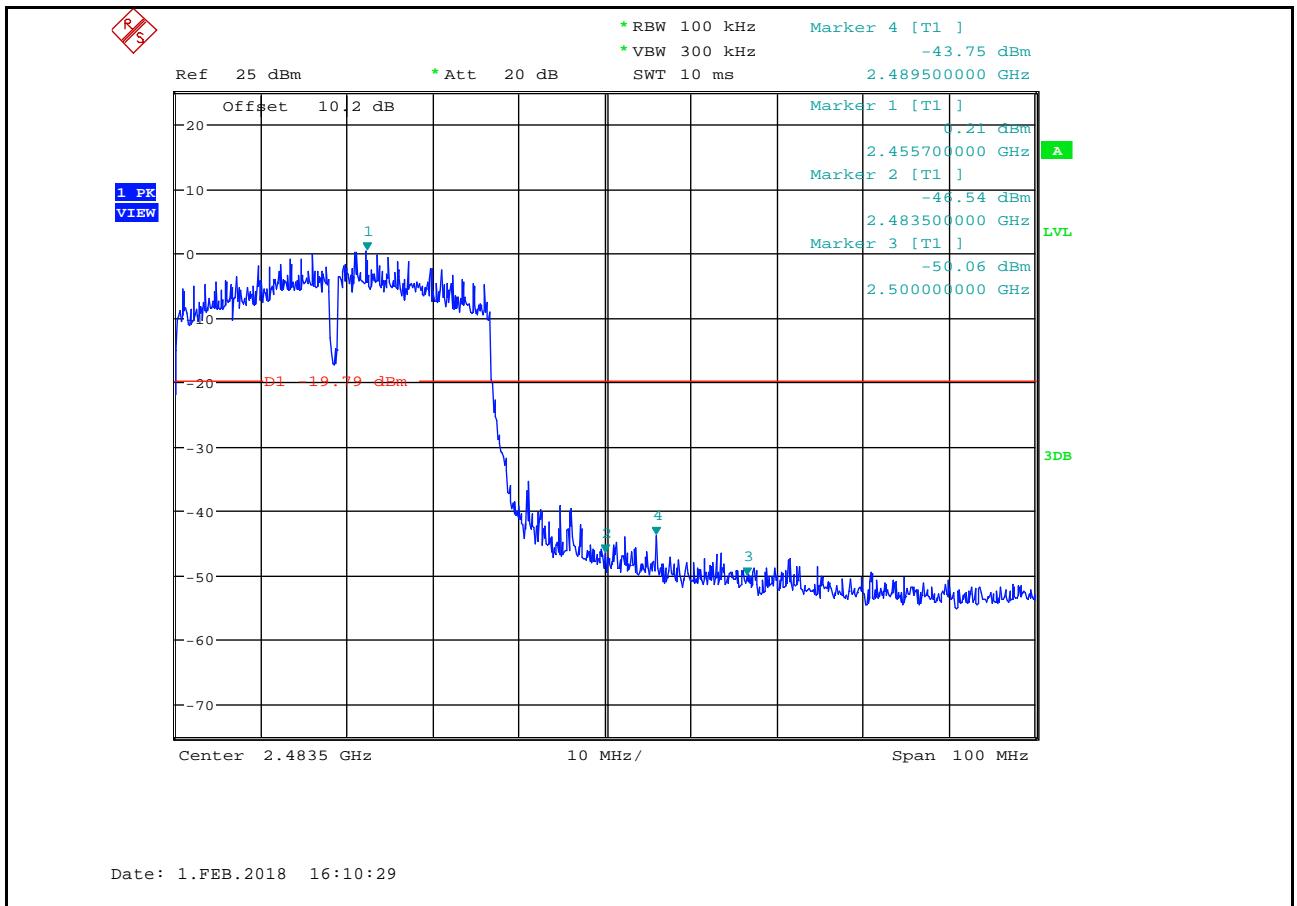


Spurious Emissions

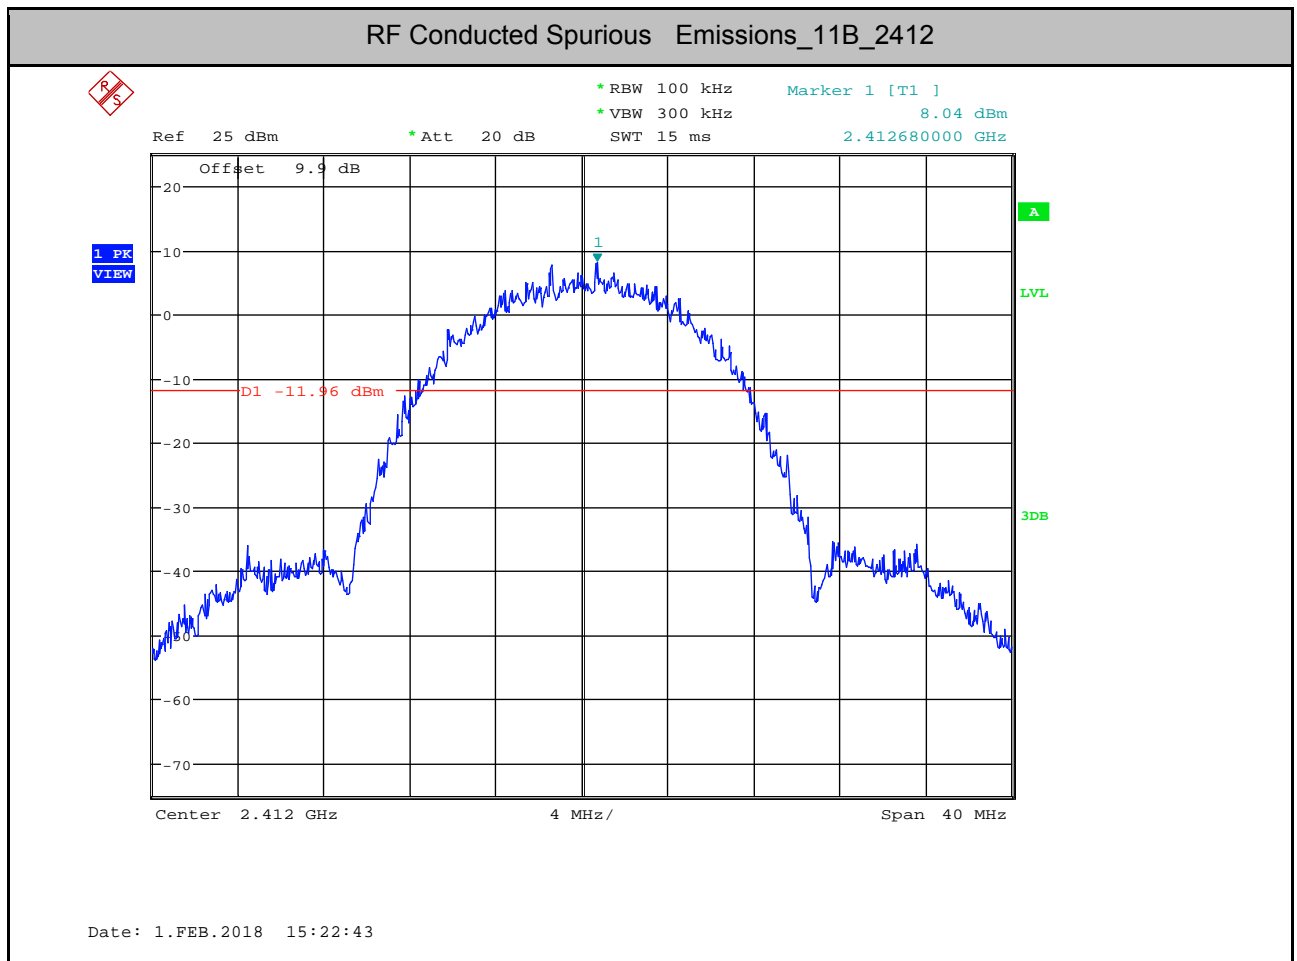


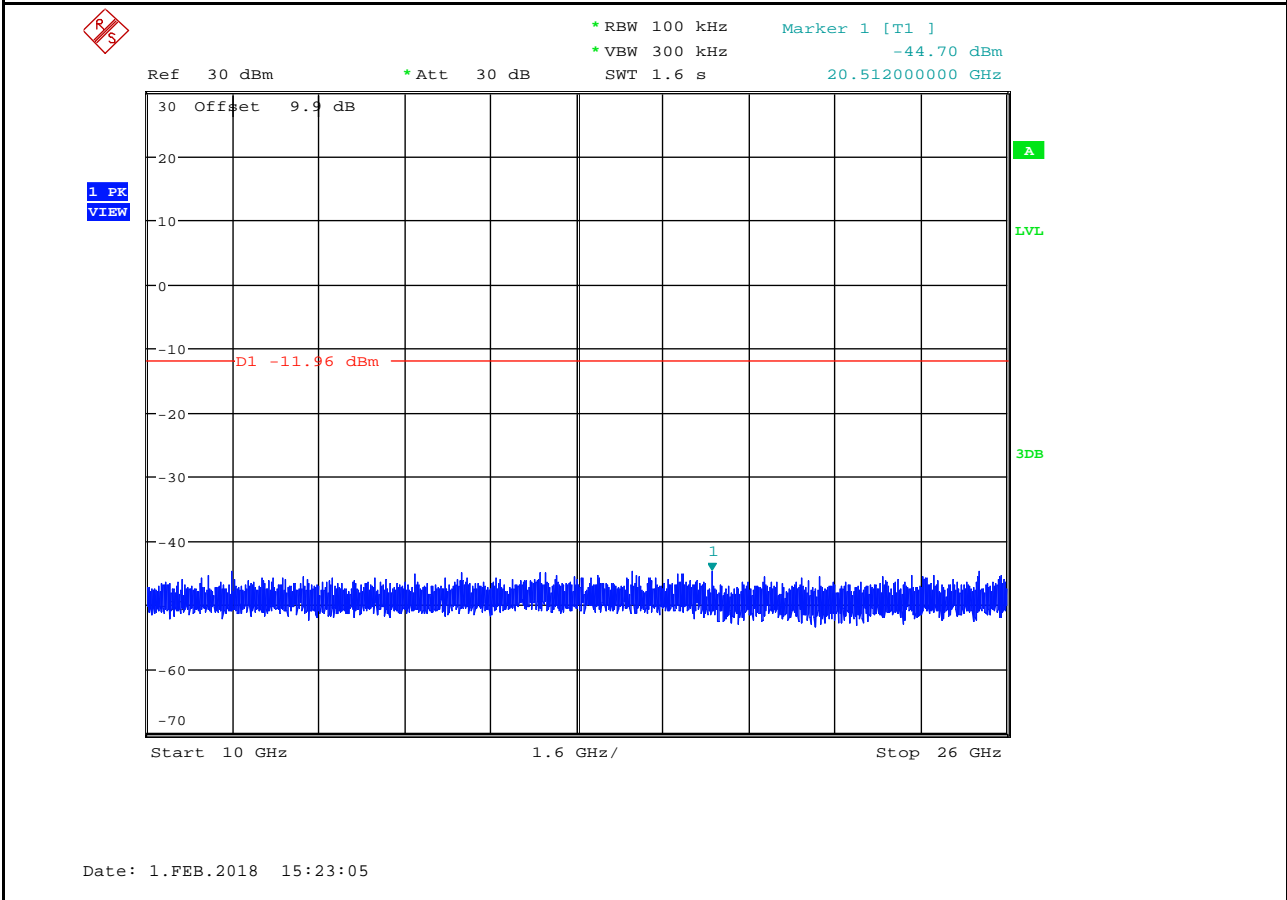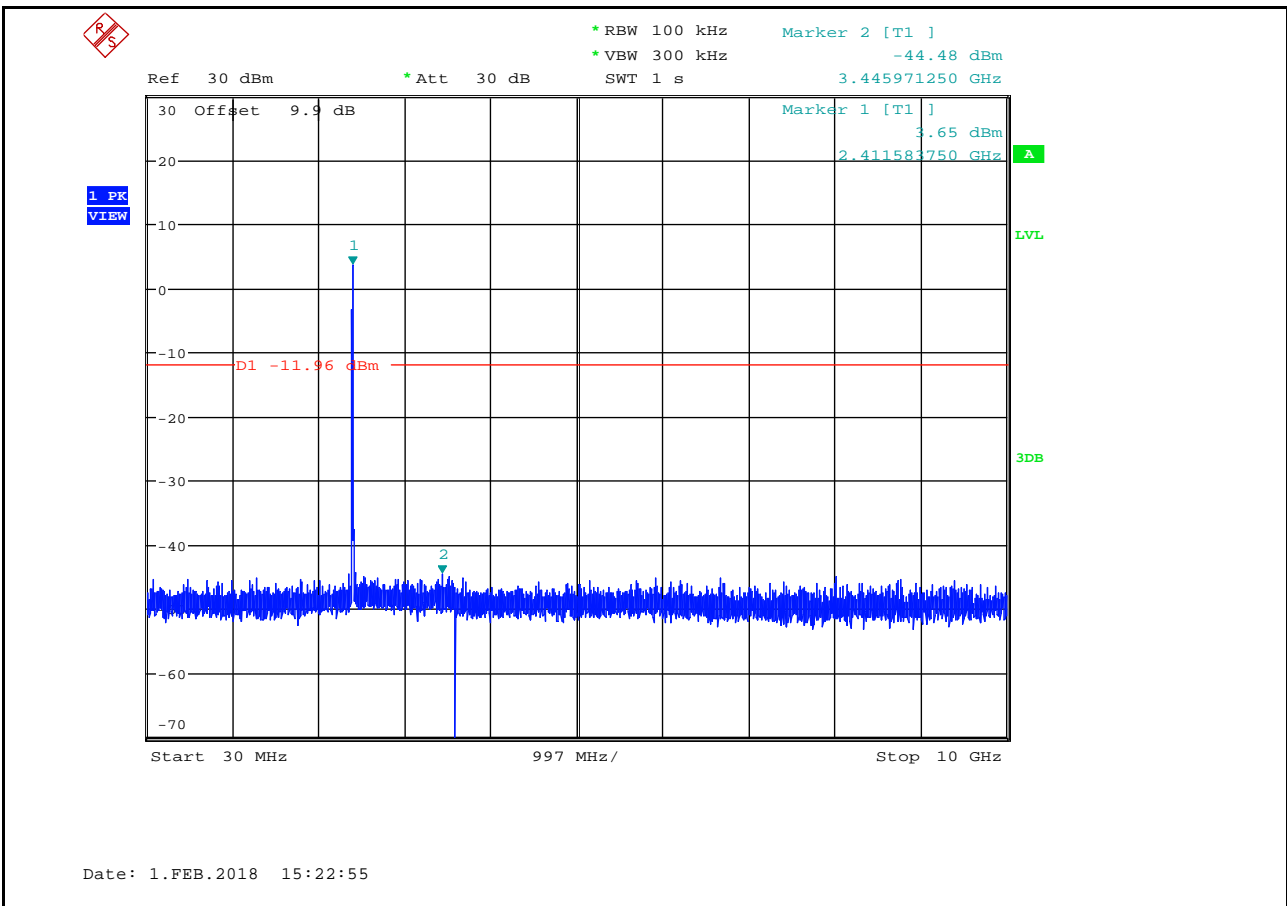


RF Conducted Spurious Emissions_11B_2462

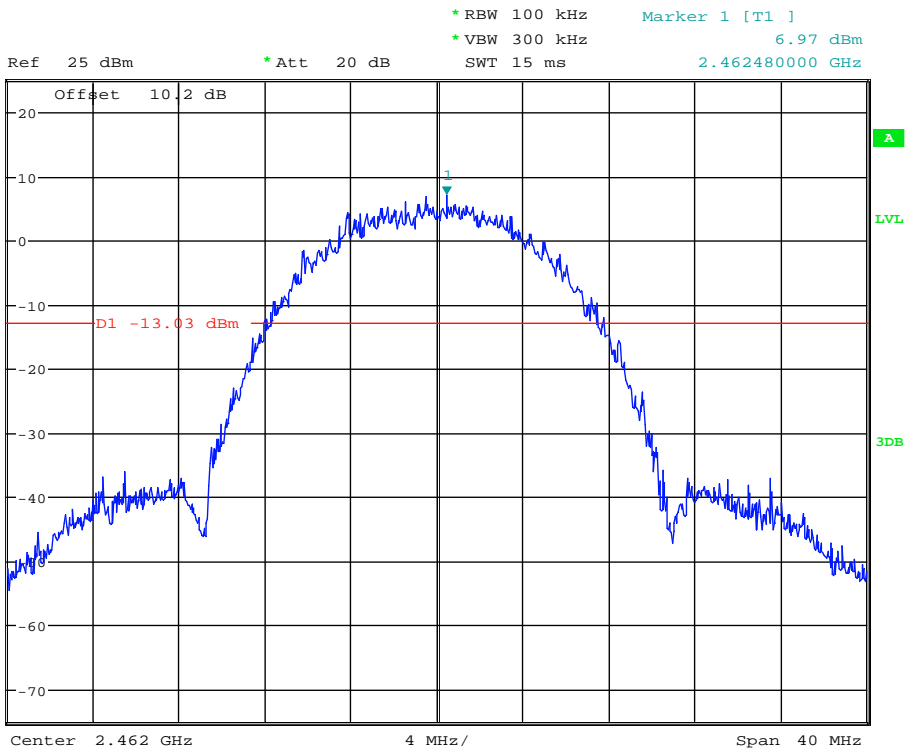


Date: 1.FEB.2018 15:29:49

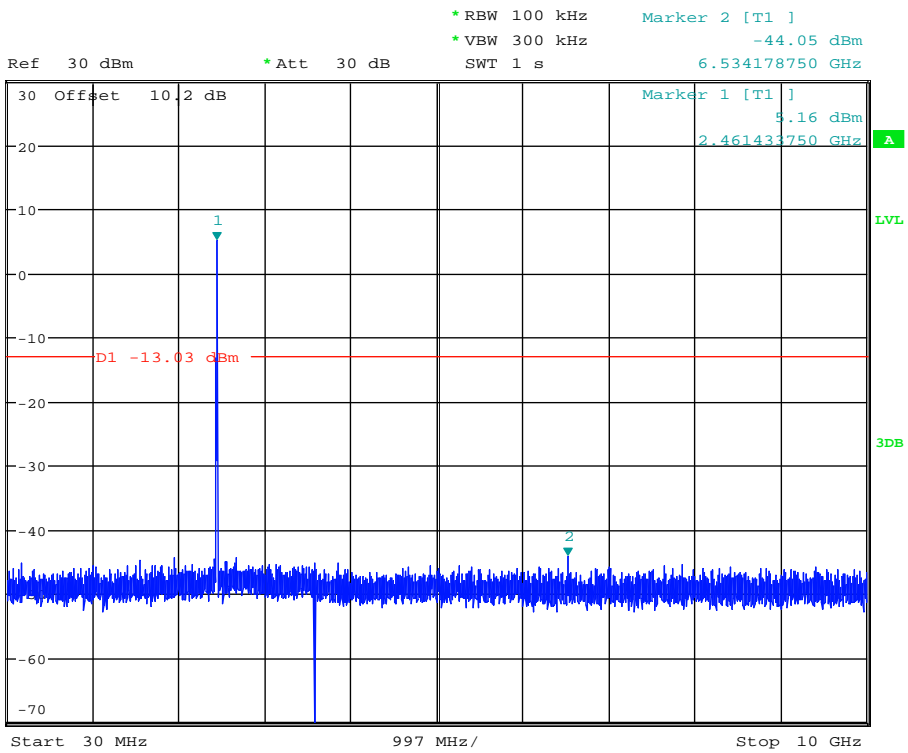


Date: 1.FEB.2018 15:30:05

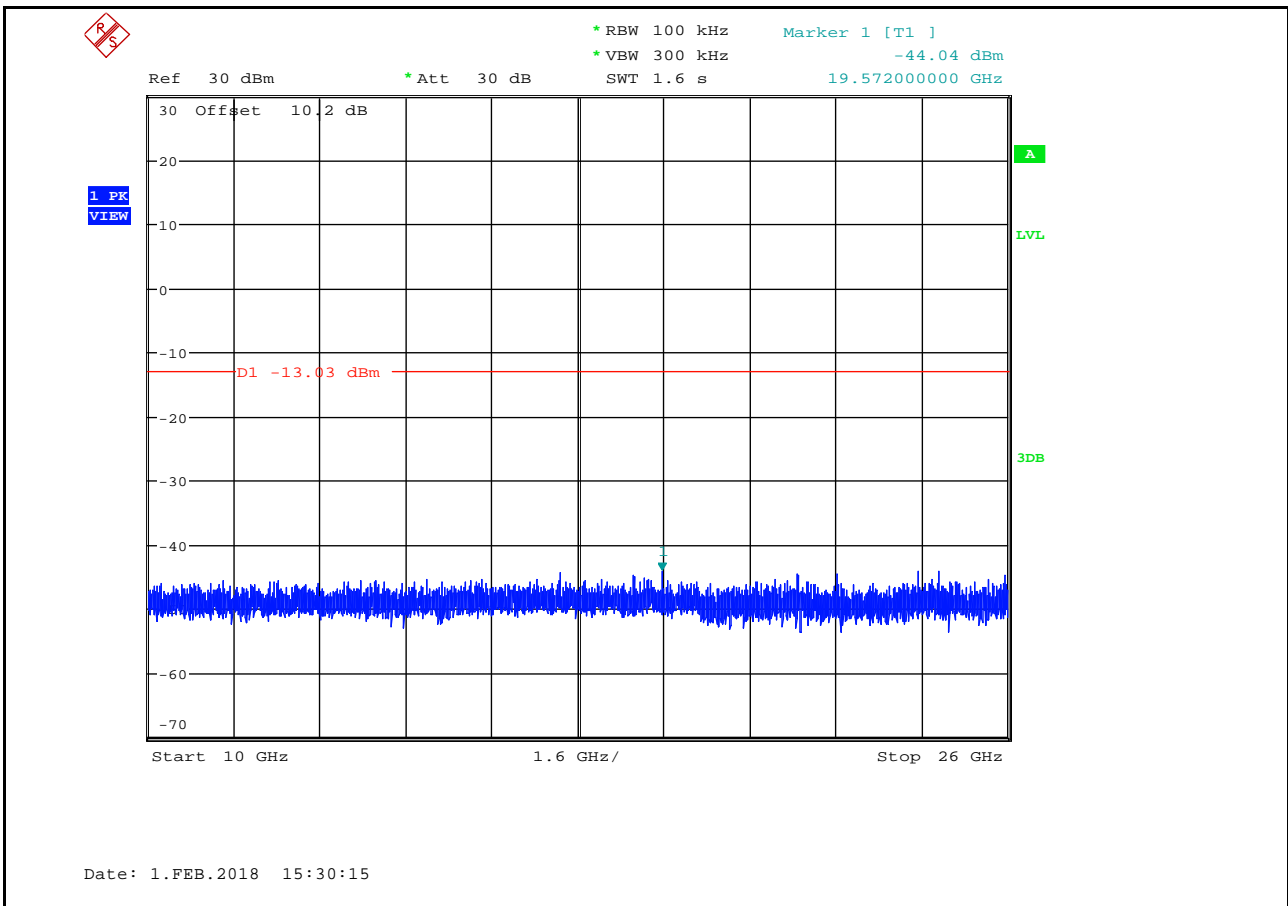


RF Conducted Spurious Emissions_11G_2412

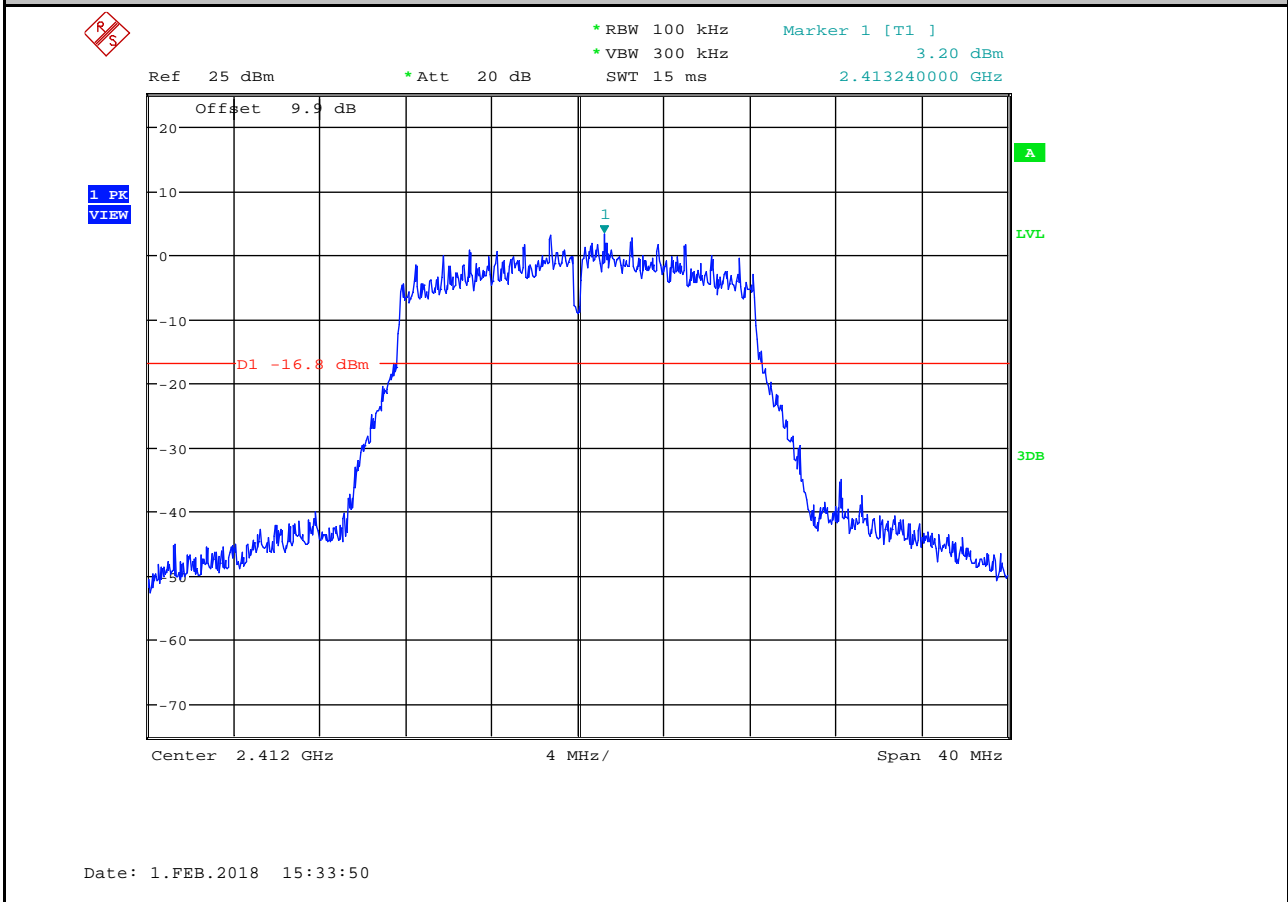

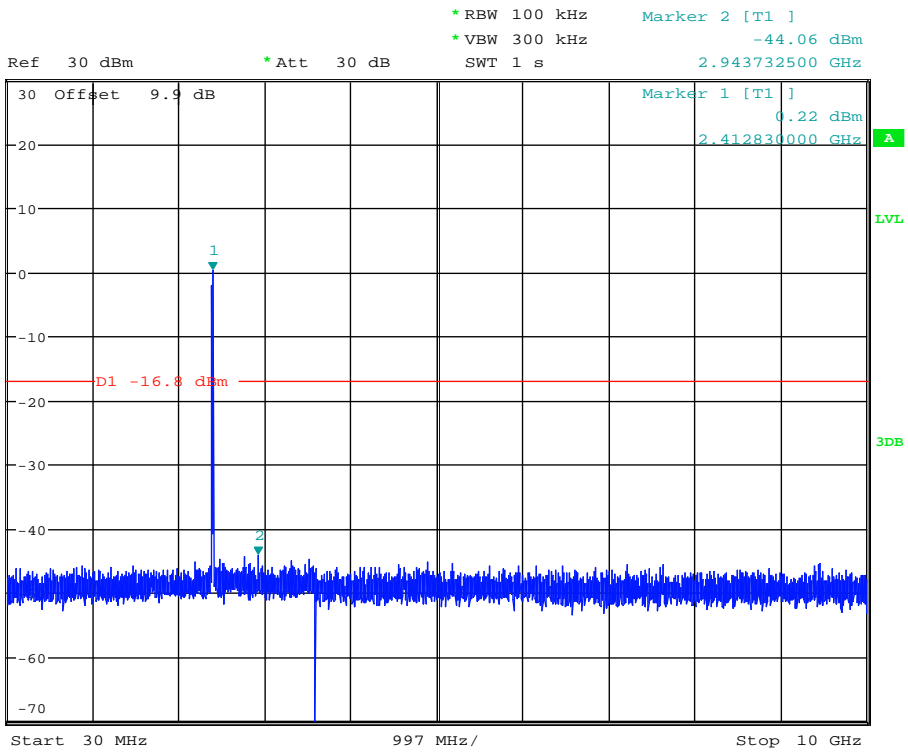


Date: 1.FEB.2018 15:34:02

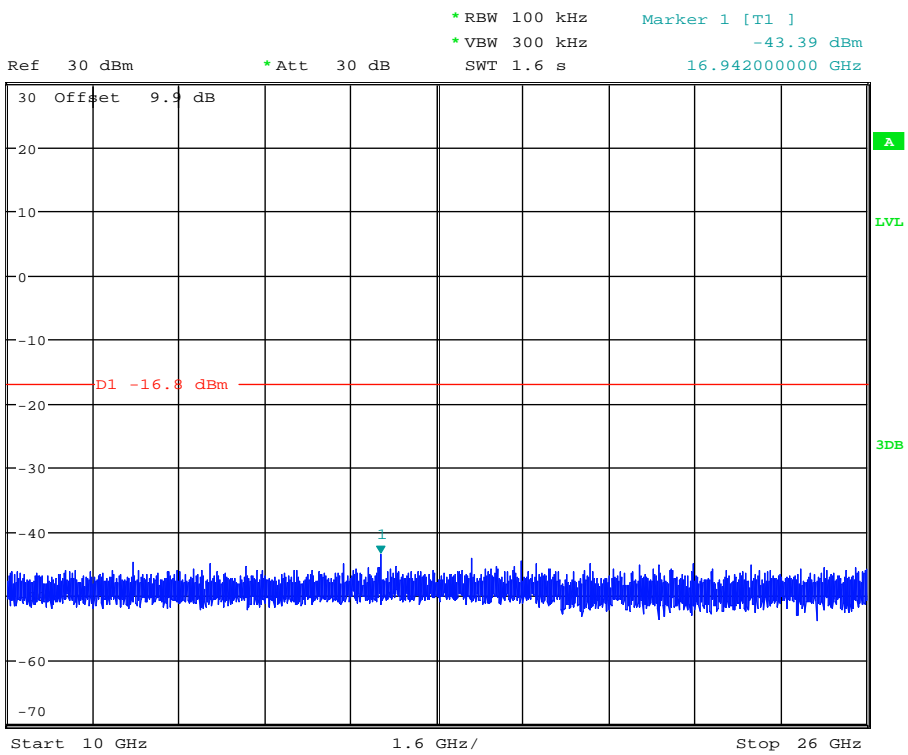


Date: 1.FEB.2018 15:34:12


RF Conducted Spurious Emissions_11G_2462

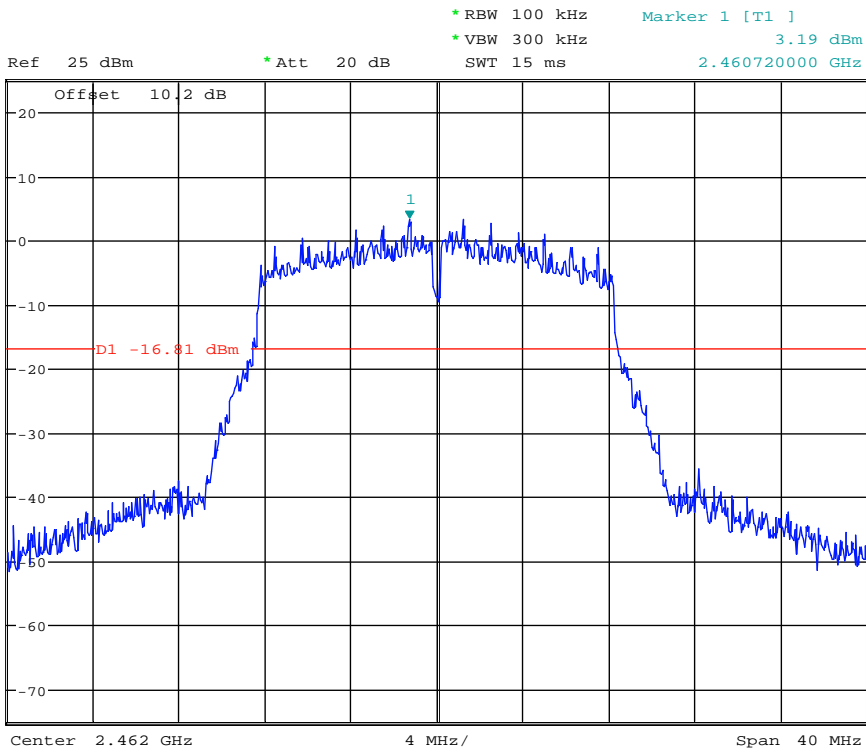


Date: 1.FEB.2018 15:38:38


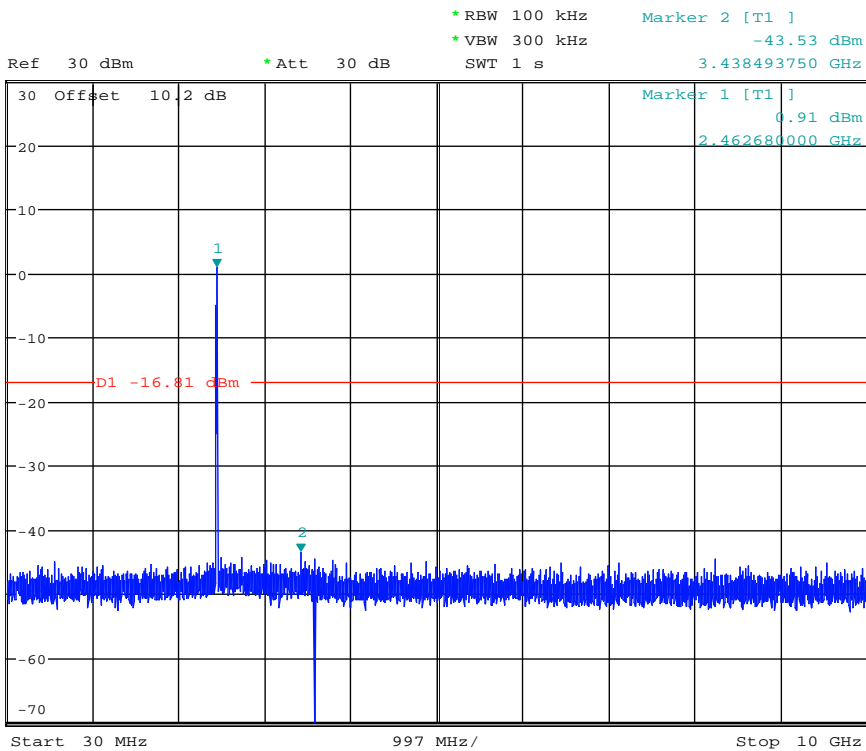


Date: 1.FEB.2018 15:38:49

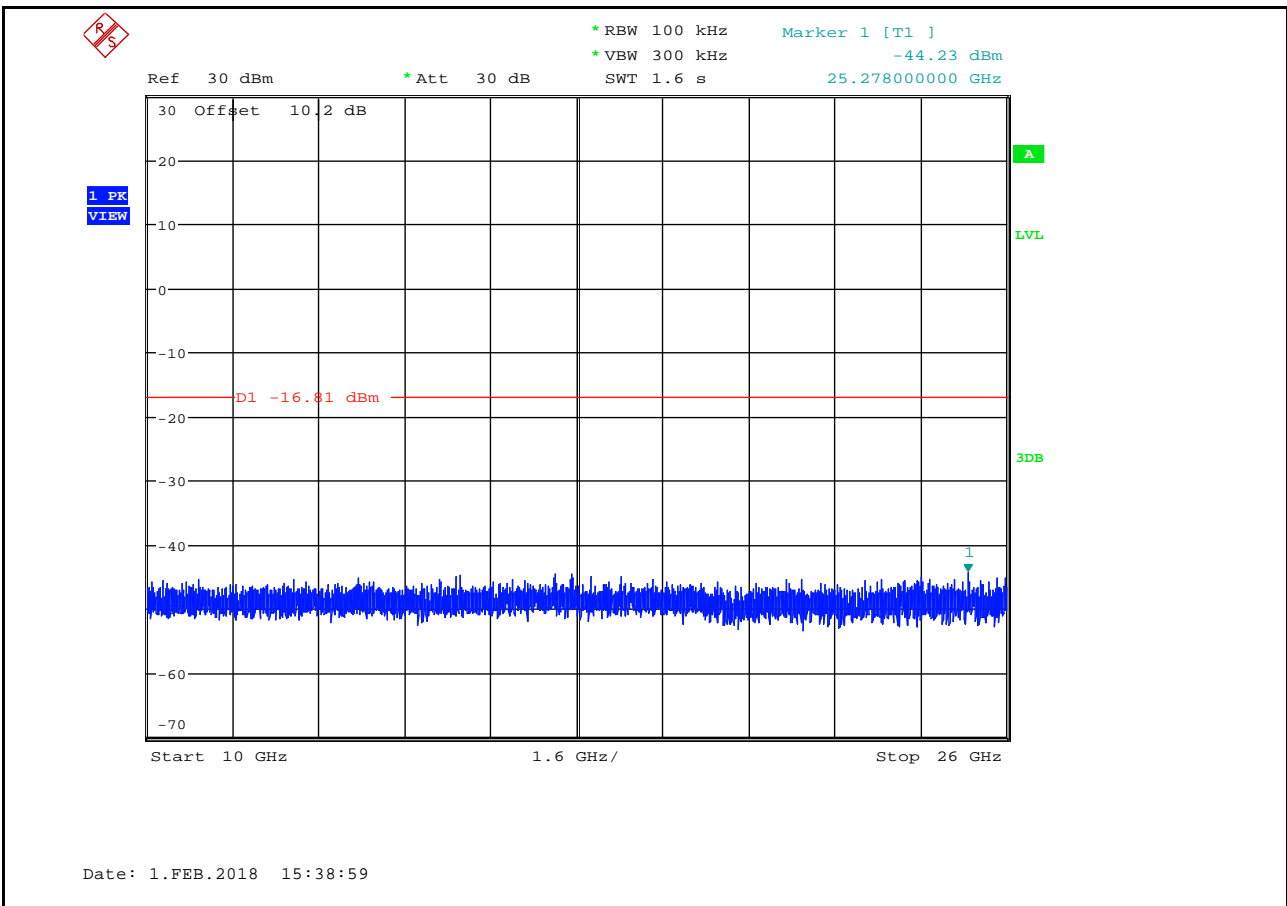

RF Conducted Spurious Emissions_11N20SISO_2412

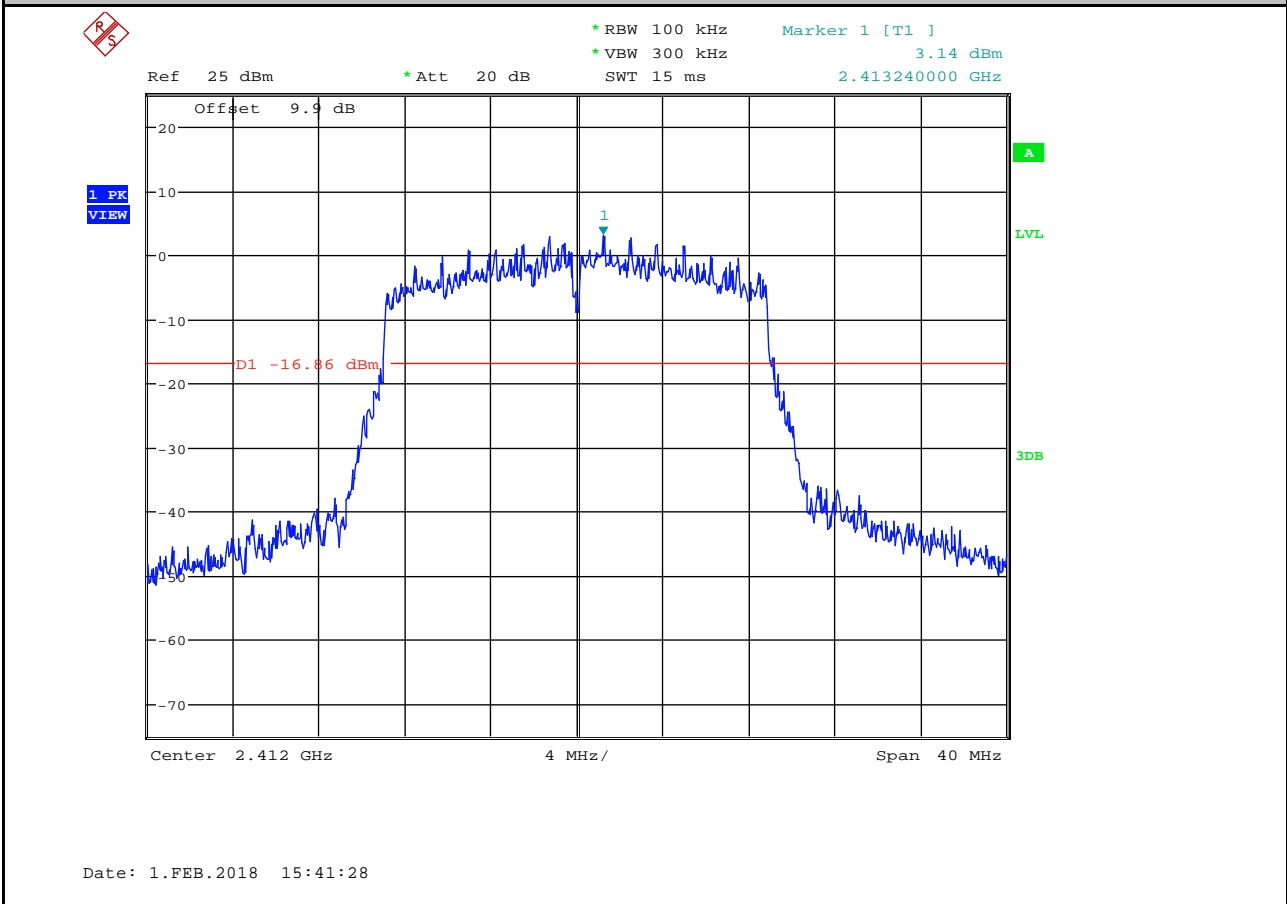


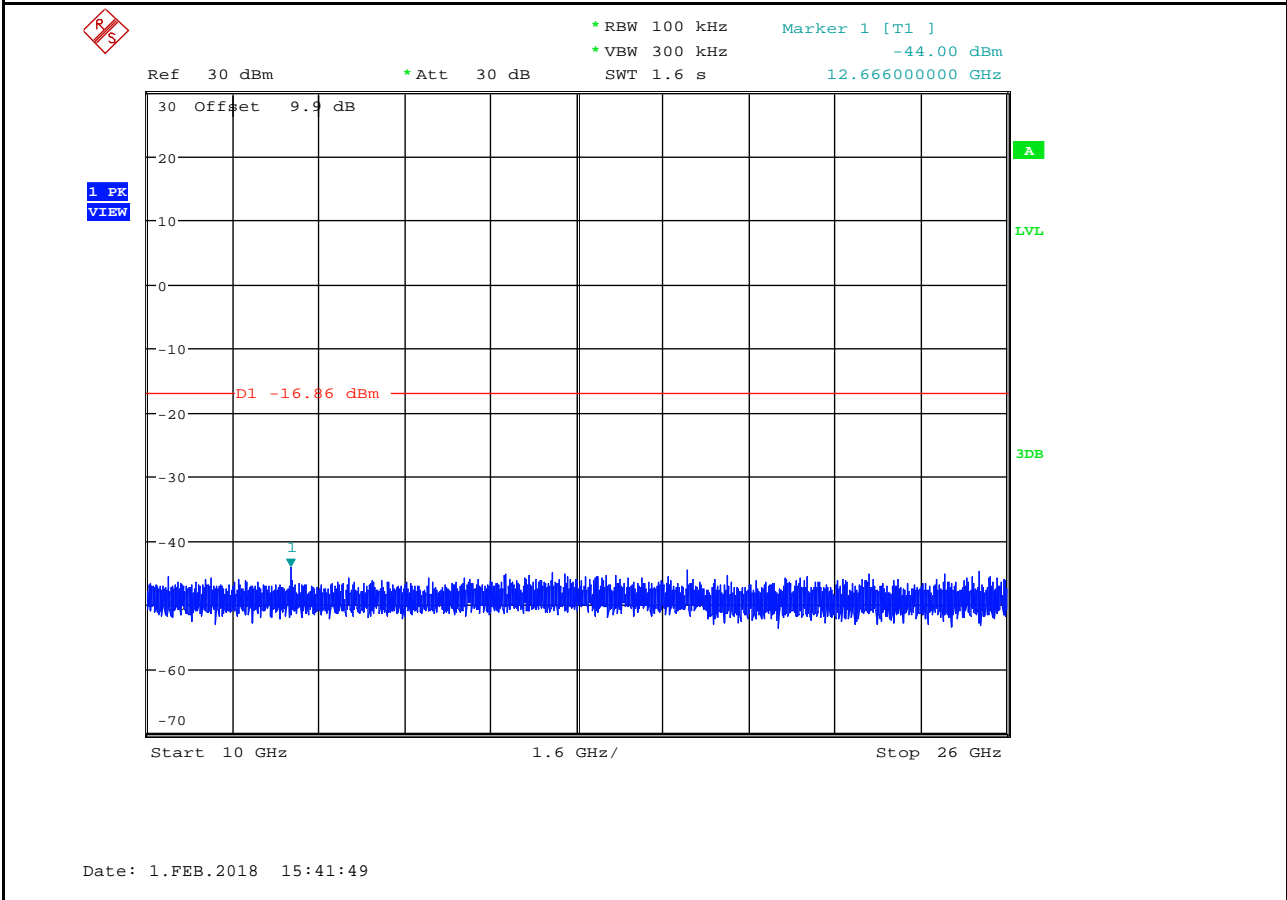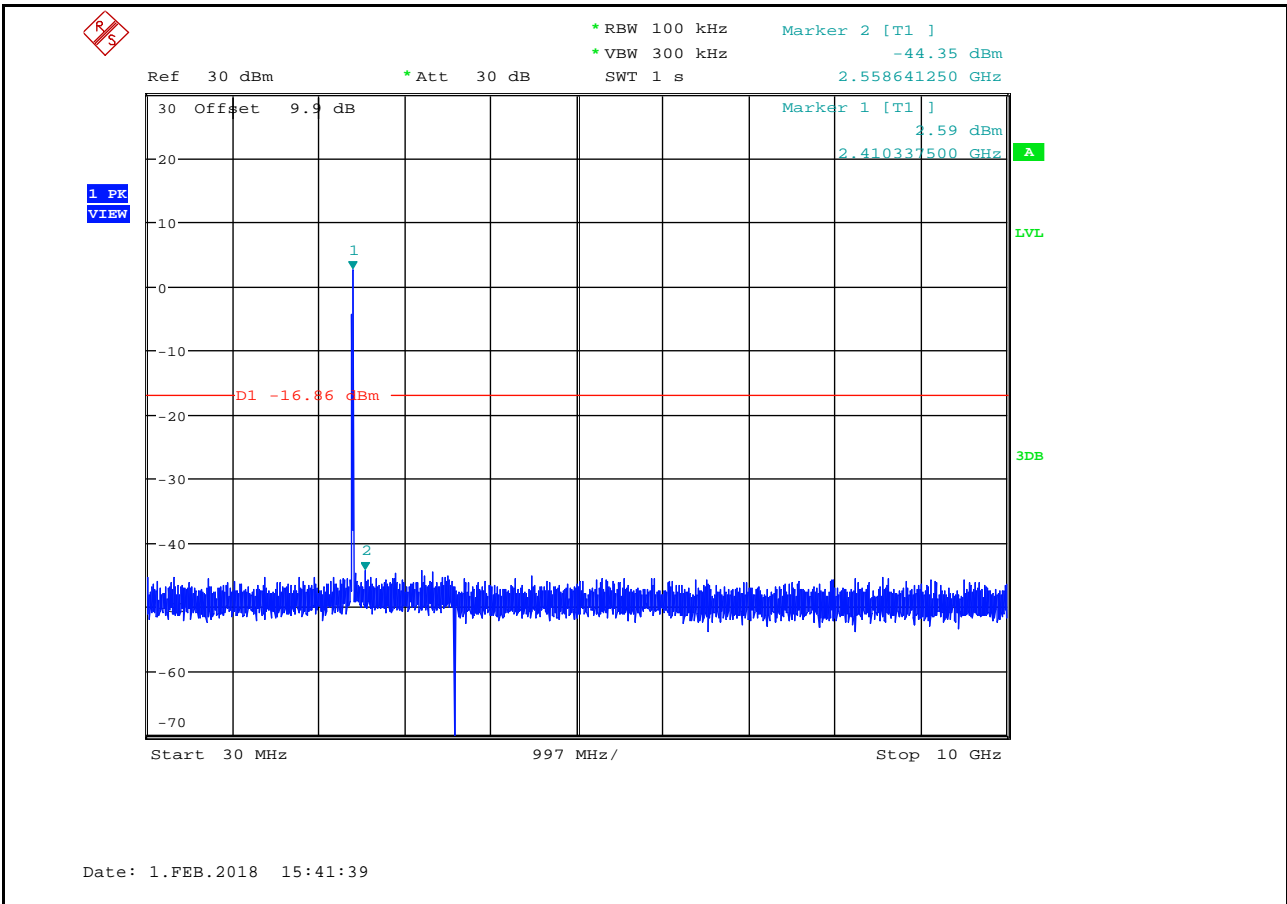

RF Conducted Spurious Emissions_11N20SISO_2462




1 PK
VIEW

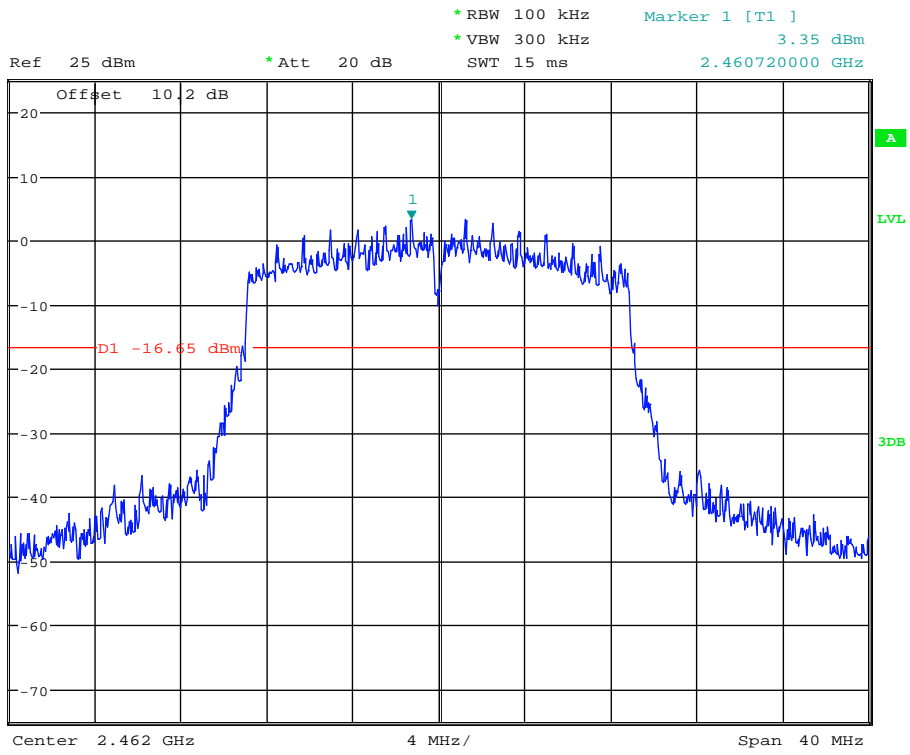


Date: 1.FEB.2018 16:02:14




1 PK
VIEW

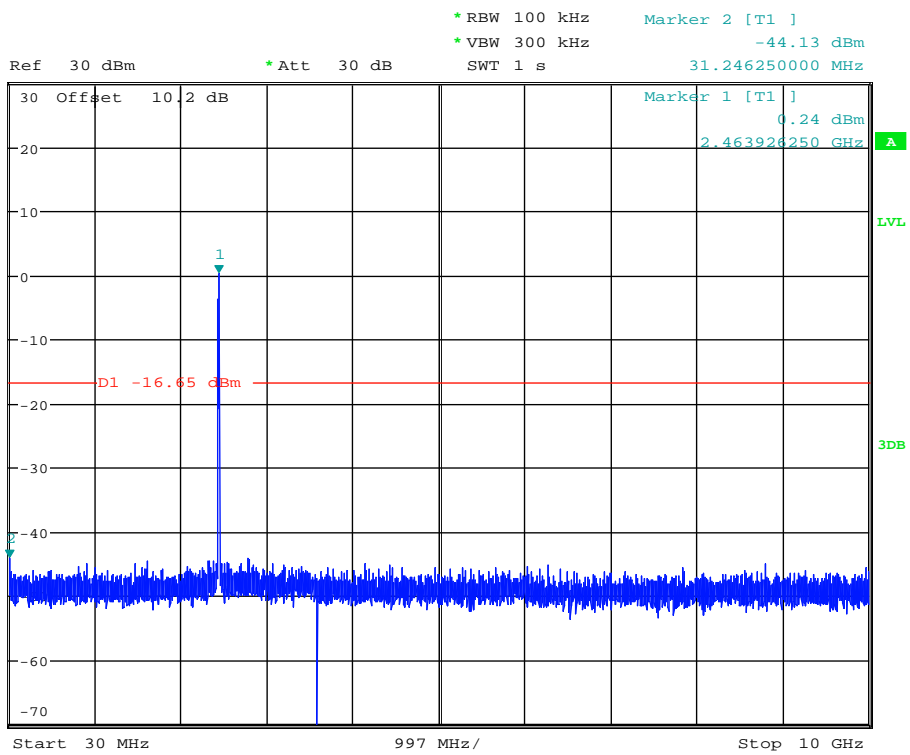


Date: 1.FEB.2018 16:02:25

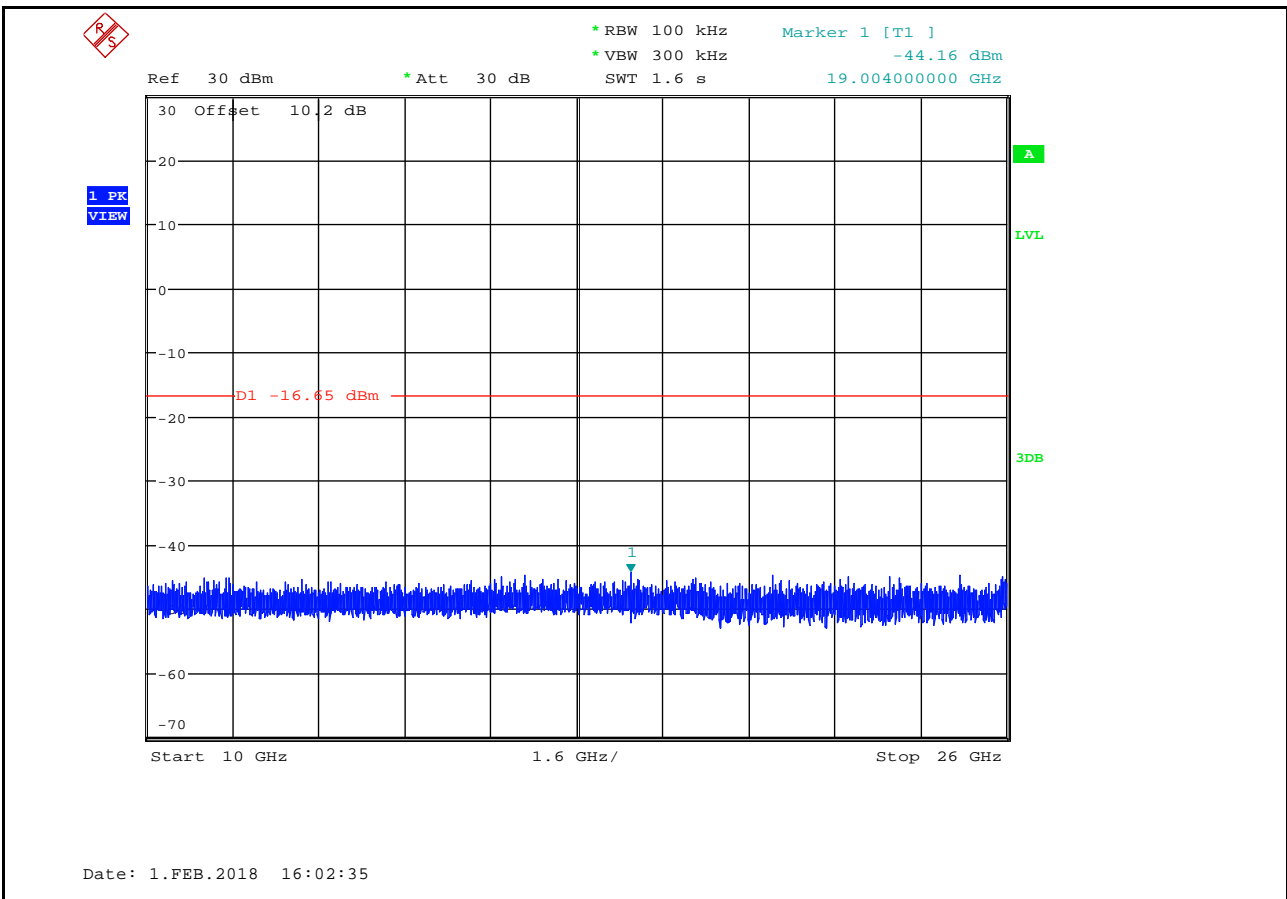


RF Conducted Spurious Emissions_11N40SISO_2422

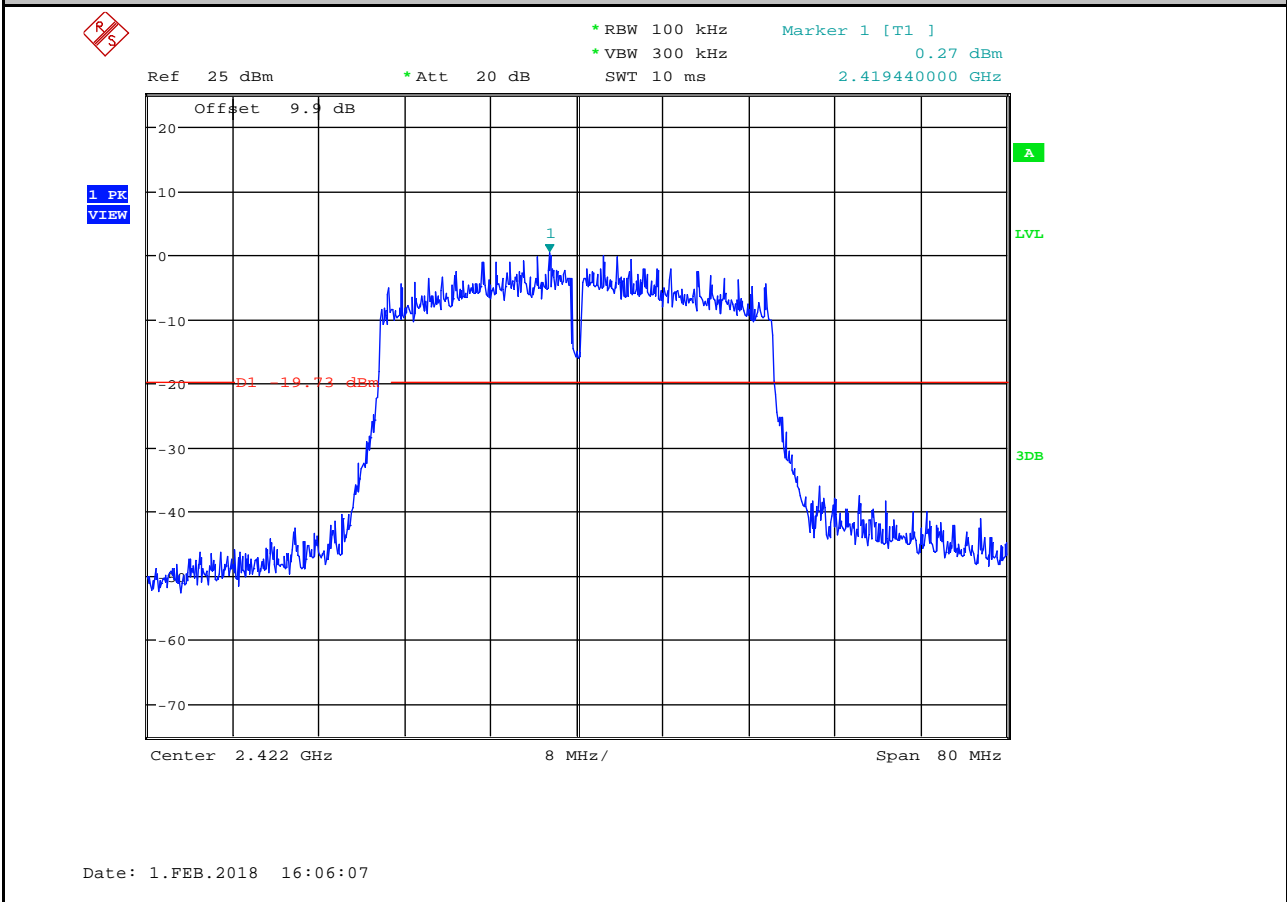

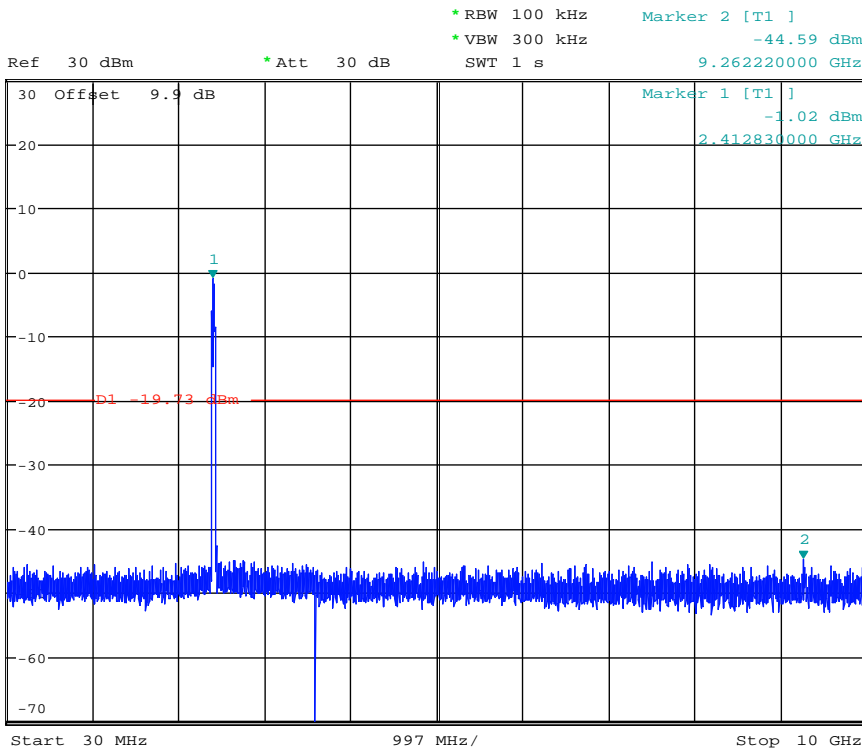


Date: 1.FEB.2018 16:06:19

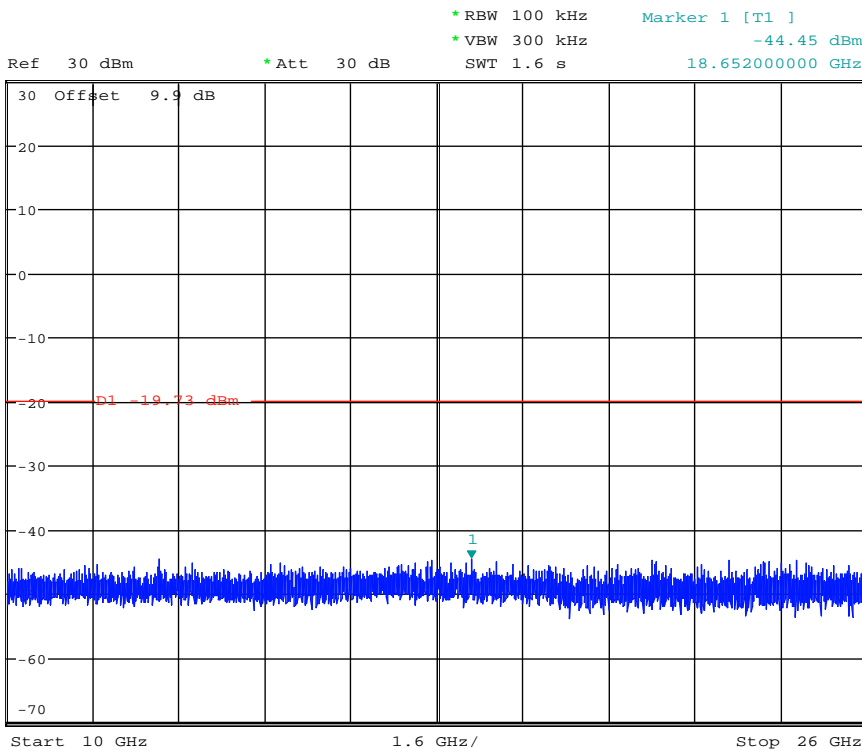


Date: 1.FEB.2018 16:06:29


RF Conducted Spurious Emissions_11N40SISO_2452

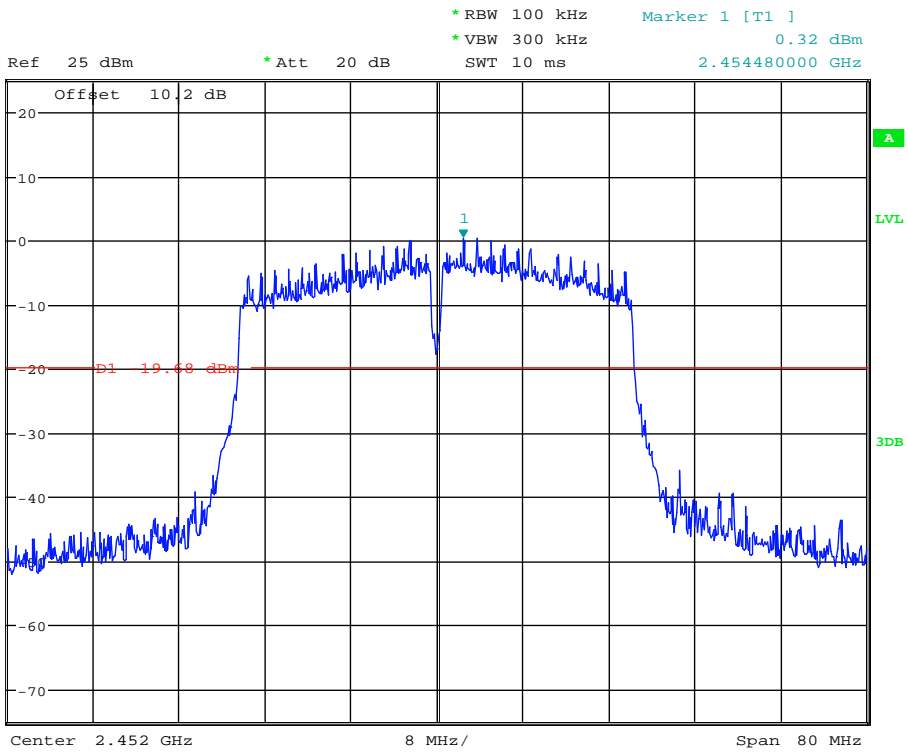

Date: 1.FEB.2018 16:10:45

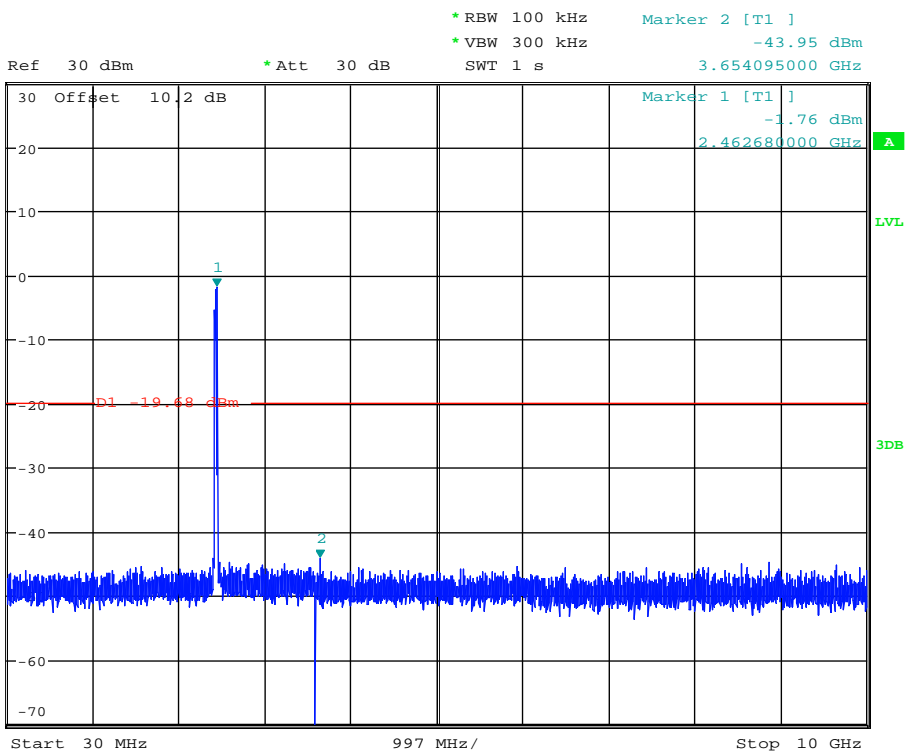

Date: 1.FEB.2018 16:10:56

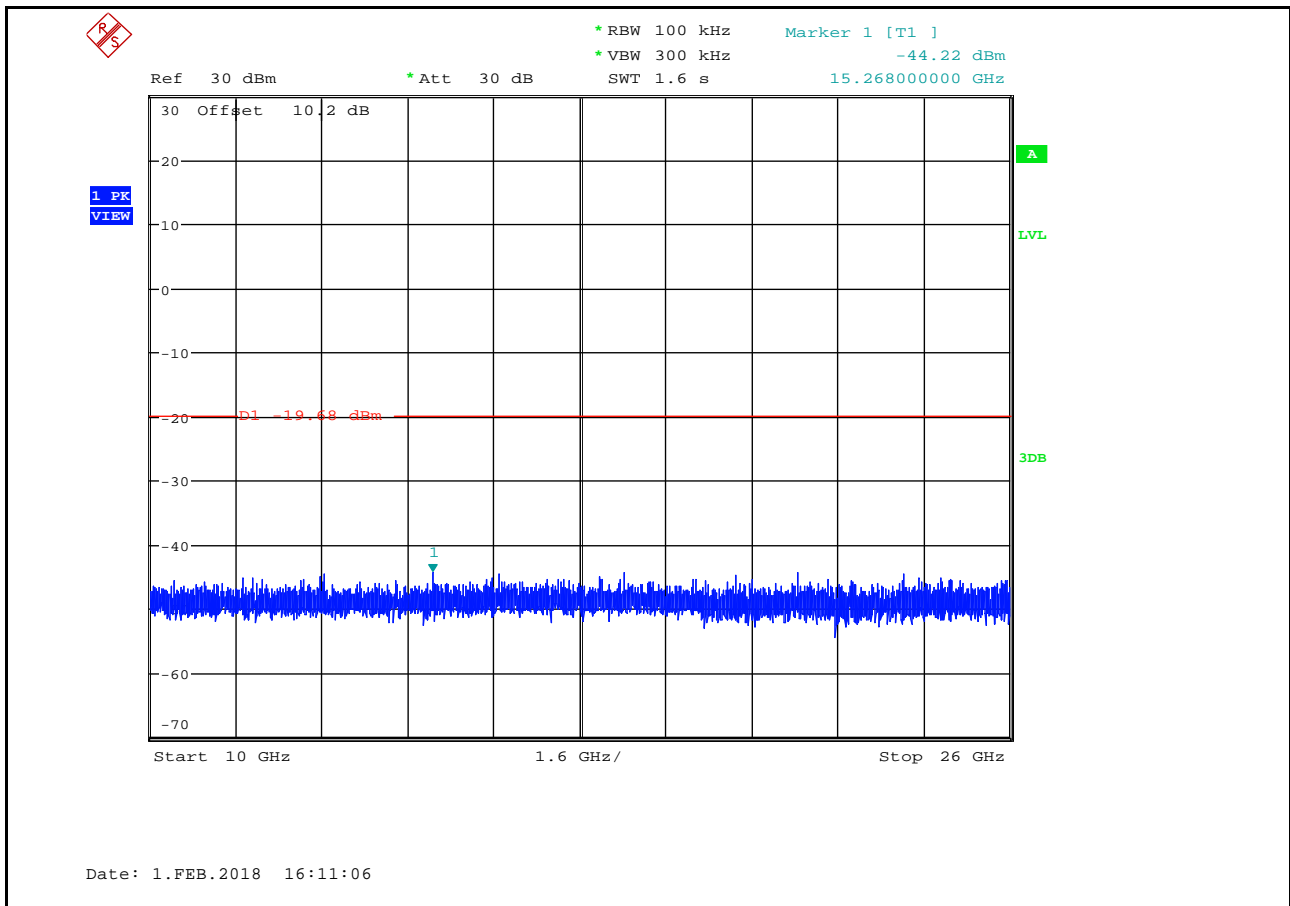


Note: All modulations and all 3 channels have been tested , only worse case low channel and high channel is reported


8. Radiated Spurious Emissions

8.1. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9kHz-30MHz

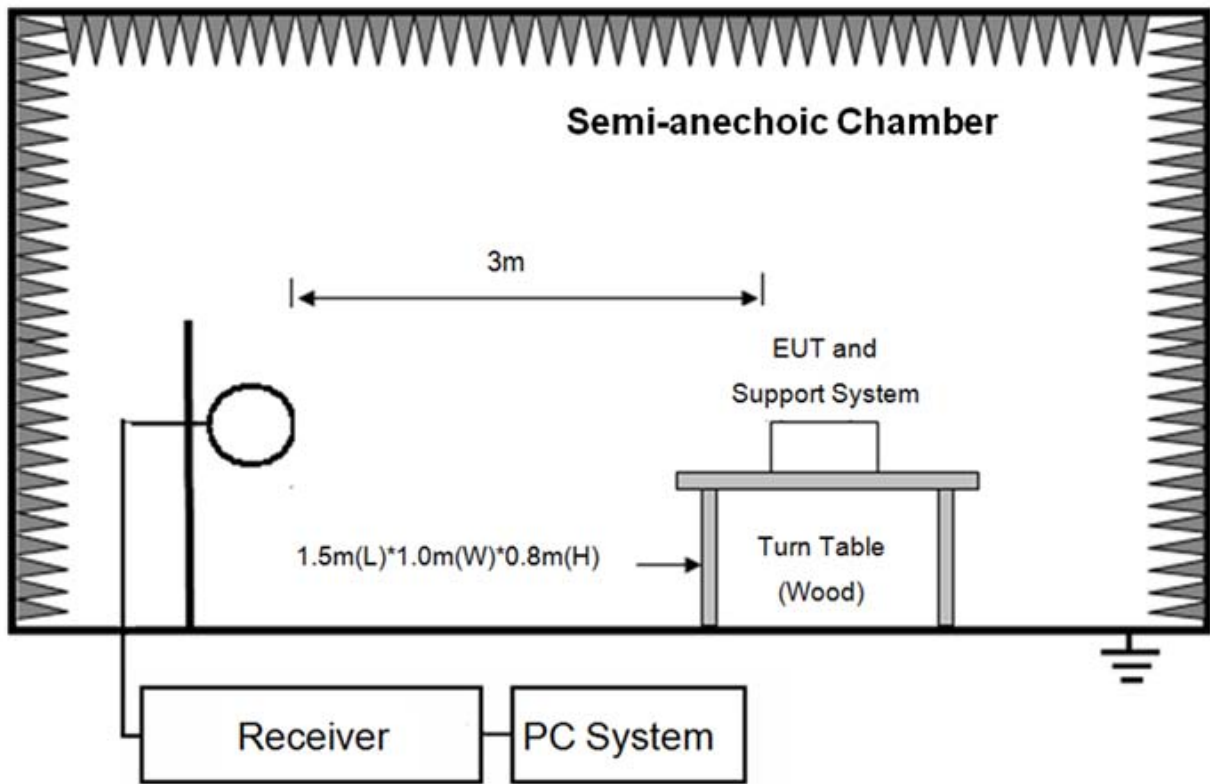

In 3m Anechoic Chamber Test Setup Diagram for 30MHz-1GHz

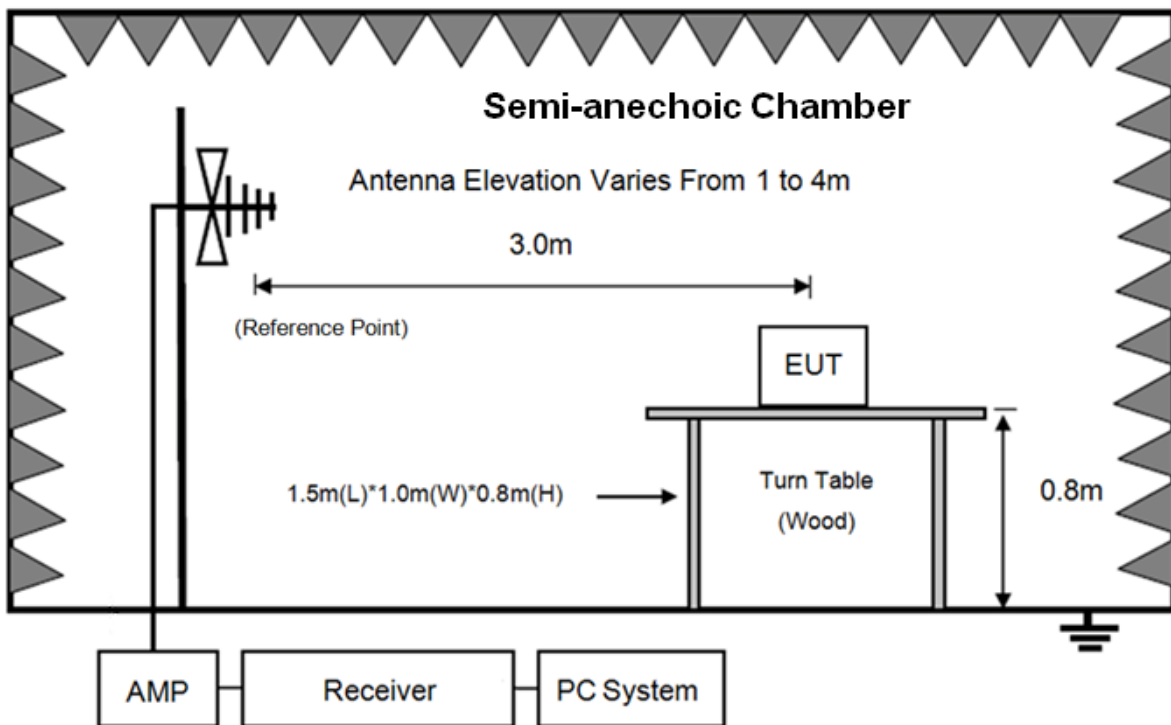

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

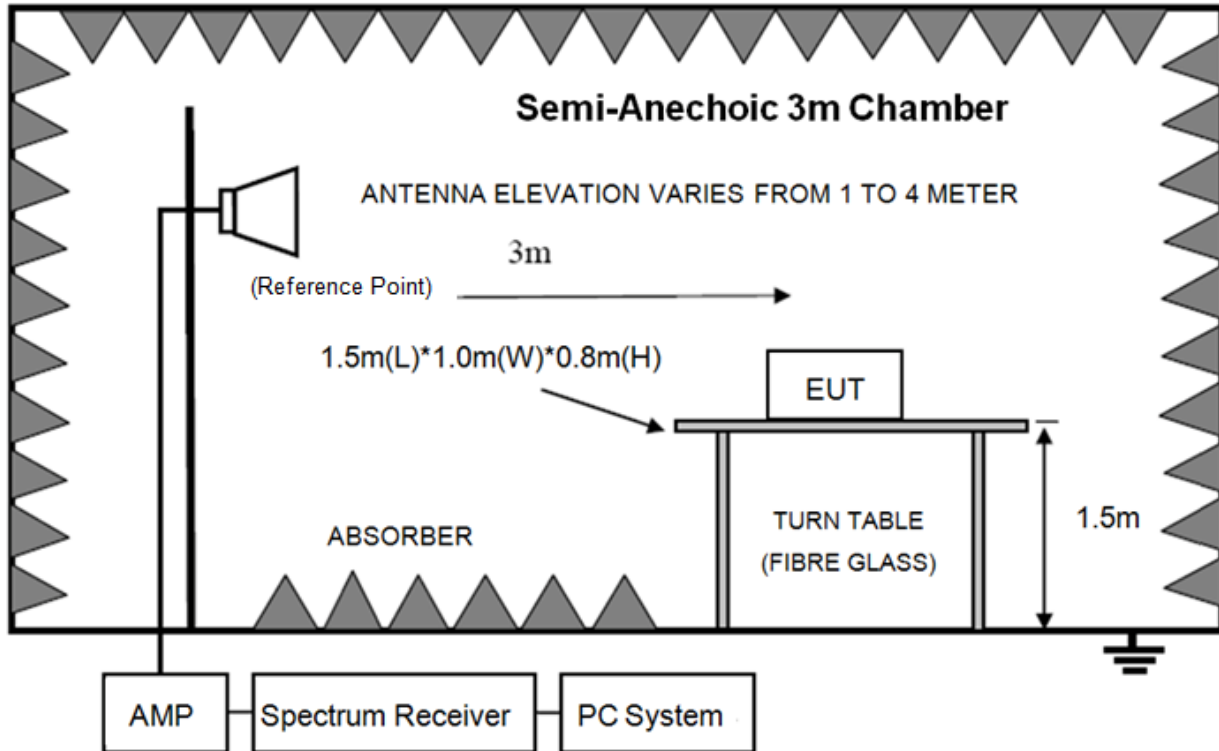

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.2. Limit

8.2.1 FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.2675-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.G
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

8.2.2 FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

8.2.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

8.3. Test Procedure

(1) EUT height should be 0.8m for below 1GHz at a semi - anechoic chamber while EUT height should be 1.5m for above 1GHz at full chamber or semi - anechoic chamber ground with absorbers.

(2) The antenna used as below table.

Test frequency range	Test antenna used	Measuring distance
9kHz-30MHz	Active Loop antenna	3 m
30MHz-1GHz	Trilog Broadband Antenna	3 m
1GHz-18GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18GHz-40GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9kHz to 25GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m(Except loop antenna, it's fixed 1m above ground).

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9kHz to 25GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9kHz to 18GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.

(5) The emissions from 9kHz to 1GHz were measured based on CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz, for emissions from 9kHz-90kHz, 110kHz-490kHz and above 1GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9kHz to 1GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9kHz-150kHz	200Hz
150kHz-30MHz	9kHz
30MHz-1GHz	120kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RMS detector RBW 1MHz VBW 3MHz for Average measure(according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

8.4. Test result

PASS. (See below detailed test result)

Antenna type 1 and Antenna type 2 all have been tested , only worse case Antenna type 2 is reported All the emissions except fundamental emission from 9kHz to 25GHz were comply with 15.209 limit. Note1: According exploratory test no any obvious emission were detected from 9kHz to 30MHz and 18GHz to 25GHz, so the final test was performed with frequency range from 30MHz to 18GHz and recorded in below.


Note2: For emissions below 1GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1GHz, the final test was only performed with EUT working in ANT2, 11b, Tx CH6 mode.

Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2018 RE1# Report Data\Q18011701-1E WP25M1200\RF.EM6
Test Date : 2018-02-08 **Tested By** : Sunny
EUT : IEEE 802.11 b/g/n WIFI Router **Model Number** : WP25M1200
Power Supply : DC 3.3V **Test Mode** : Tx mode
Condition : Temp:24.5'C,Humi:55%, **Antenna/Distance** : 2017 VULB 9163 1#/3m/HORIZONTAL
Press:100.1kPa
Memo :

Data: 26

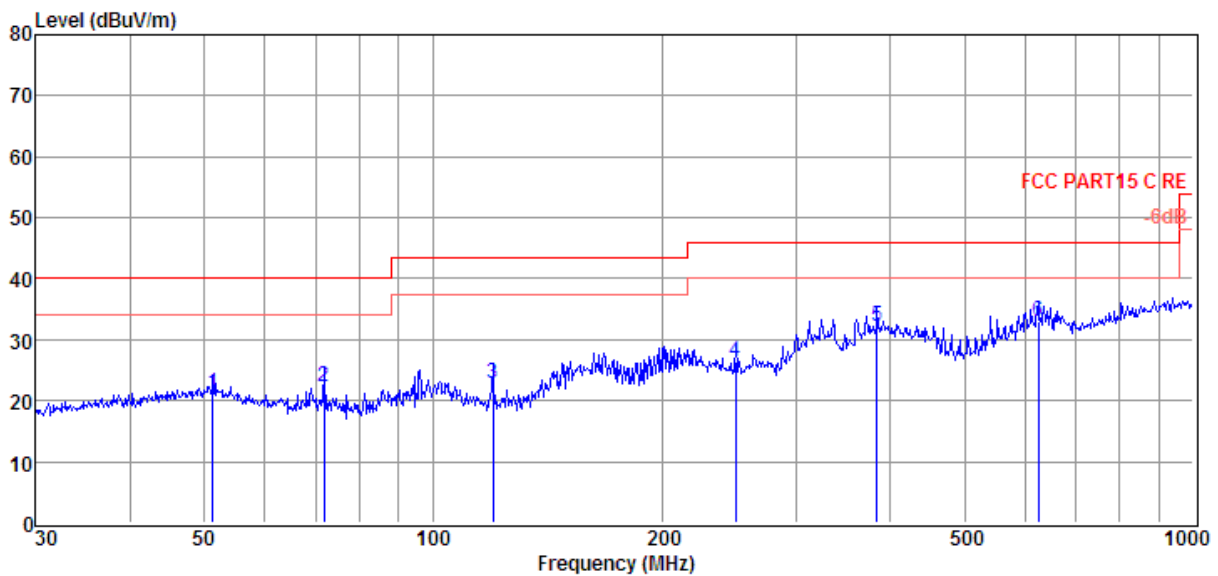


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	51.30	3.73	13.46	4.01	21.20	40.00	-18.80	QP	HORIZONTAL
2	71.83	9.25	8.89	4.19	22.33	40.00	-17.67	QP	HORIZONTAL
3	119.86	8.93	9.22	4.57	22.72	43.50	-20.78	QP	HORIZONTAL
4	250.30	8.55	12.50	5.30	26.35	46.00	-19.65	QP	HORIZONTAL
5	383.93	11.48	14.93	5.89	32.30	46.00	-13.70	QP	HORIZONTAL
6	625.08	6.76	19.48	6.76	33.00	46.00	-13.00	QP	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2018 RE1# Report Data\Q18011701-1E WP25M1200\RF.EM6
Test Date : 2018-02-08 **Tested By** : Sunny
EUT : IEEE 802.11 b/g/n WIFI Router **Model Number** : WP25M1200
Power Supply : DC 3.3V **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,
Press:100.1kPa **Antenna/Distance** : 2017 VULB 9163 1#/3m/VERTICAL
Memo :

Data: 25

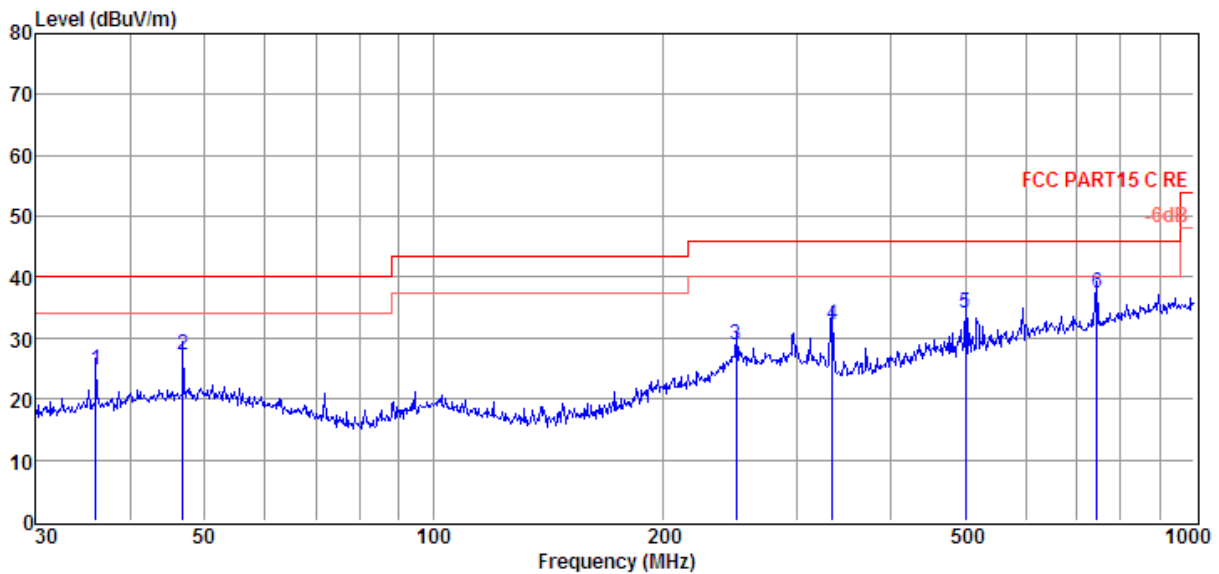

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	36.00	9.05	11.79	3.84	24.68	40.00	-15.32	QP	VERTICAL
2	46.83	9.87	13.45	3.96	27.28	40.00	-12.72	QP	VERTICAL
3	250.30	11.15	12.50	5.30	28.95	46.00	-17.05	QP	VERTICAL
4	334.86	12.58	14.03	5.68	32.29	46.00	-13.71	QP	VERTICAL
5	501.18	11.36	17.52	5.34	34.22	46.00	-11.78	QP	VERTICAL
6	744.87	9.70	20.44	7.15	37.29	46.00	-8.71	QP	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1GHz)

Freq (MHz)	Read level (dB μ V)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector type	Polarization
11b CH1									
4825.00	39.99	34.72	29.32	7.40	52.79	74.00	-21.21	Peak	HORIZONTAL
6151.00	35.06	35.70	29.31	8.23	49.68	74.00	-24.32	Peak	HORIZONTAL
7800.00	35.52	37.12	31.04	9.05	50.65	74.00	-23.35	Peak	HORIZONTAL
9925.00	34.91	38.12	32.89	10.85	50.99	74.00	-23.01	Peak	HORIZONTAL
11336.00	35.23	38.67	34.38	11.03	50.55	74.00	-23.45	Peak	HORIZONTAL
13444.00	35.88	39.74	35.28	11.80	52.14	74.00	-21.86	Peak	HORIZONTAL
6100.00	35.06	35.70	29.27	8.22	49.71	74.00	-24.29	Peak	VERTICAL
7324.00	36.42	36.93	30.59	8.62	51.38	74.00	-22.62	Peak	VERTICAL
8514.00	35.43	37.31	31.78	9.82	50.78	74.00	-23.22	Peak	VERTICAL
9415.00	35.01	37.67	32.57	10.59	50.70	74.00	-23.30	Peak	VERTICAL
10469.00	34.92	38.48	33.25	10.97	51.12	74.00	-22.88	Peak	VERTICAL
12951.00	35.56	39.25	35.70	11.33	50.44	74.00	-23.56	Peak	VERTICAL
11b CH6									
6066.00	35.05	35.70	29.24	8.22	49.73	74.00	-24.27	Peak	HORIZONTAL
7375.00	35.49	36.95	30.65	8.67	50.46	74.00	-23.54	Peak	HORIZONTAL
7749.00	35.98	37.10	31.00	9.00	51.08	74.00	-22.92	Peak	HORIZONTAL
10180.00	35.04	38.31	33.03	10.92	51.24	74.00	-22.76	Peak	HORIZONTAL
10775.00	34.46	38.67	33.59	11.02	50.56	74.00	-23.44	Peak	HORIZONTAL
13104.00	36.34	39.40	35.64	11.46	51.56	74.00	-22.44	Peak	HORIZONTAL
5896.00	34.88	35.66	29.20	8.14	49.48	74.00	-24.52	Peak	VERTICAL
8140.00	35.92	37.23	31.24	9.39	51.30	74.00	-22.70	Peak	VERTICAL
9585.00	35.25	37.78	32.71	10.67	50.99	74.00	-23.01	Peak	VERTICAL
10146.00	34.75	38.29	33.01	10.91	50.94	74.00	-23.06	Peak	VERTICAL
11319.00	34.25	38.67	34.38	11.03	49.57	74.00	-24.43	Peak	VERTICAL
13206.00	35.07	39.51	35.54	11.56	50.60	74.00	-23.40	Peak	VERTICAL
11b CH11									
6440.00	35.71	35.70	29.74	8.26	49.93	74.00	-24.07	Peak	HORIZONTAL
8021.00	35.14	37.20	31.17	9.25	50.42	74.00	-23.58	Peak	HORIZONTAL
9364.00	34.99	37.65	32.52	10.56	50.68	74.00	-23.32	Peak	HORIZONTAL
10928.00	33.65	38.76	33.80	11.05	49.66	74.00	-24.34	Peak	HORIZONTAL
11880.00	34.57	38.83	34.73	10.98	49.65	74.00	-24.35	Peak	HORIZONTAL
13410.00	35.40	39.71	35.38	11.76	51.49	74.00	-22.51	Peak	HORIZONTAL
5845.00	35.52	35.64	29.20	8.11	50.07	74.00	-23.93	Peak	VERTICAL
7800.00	35.35	37.12	31.04	9.05	50.48	74.00	-23.52	Peak	VERTICAL
9364.00	34.57	37.65	32.52	10.56	50.26	74.00	-23.74	Peak	VERTICAL
10571.00	34.22	38.54	33.33	10.99	50.42	74.00	-23.58	Peak	VERTICAL
12016.00	35.01	38.90	34.80	10.98	50.09	74.00	-23.91	Peak	VERTICAL
13716.00	34.77	39.89	34.95	12.07	51.78	74.00	-22.22	Peak	VERTICAL

Note: 1.30MHz~25GHz: (Scan with 11b mode ANT 1 and ANT 2, 11g mode ANT 1 and ANT 2, 11n HT20 mode ANT 1 and ANT 2, 11n HT40 mode ANT 1 and ANT 2, the worst case is 11b ANT 2 mode)


2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4: For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

9. Radiated Band Edge Compliance

9.1. Block diagram of test setup

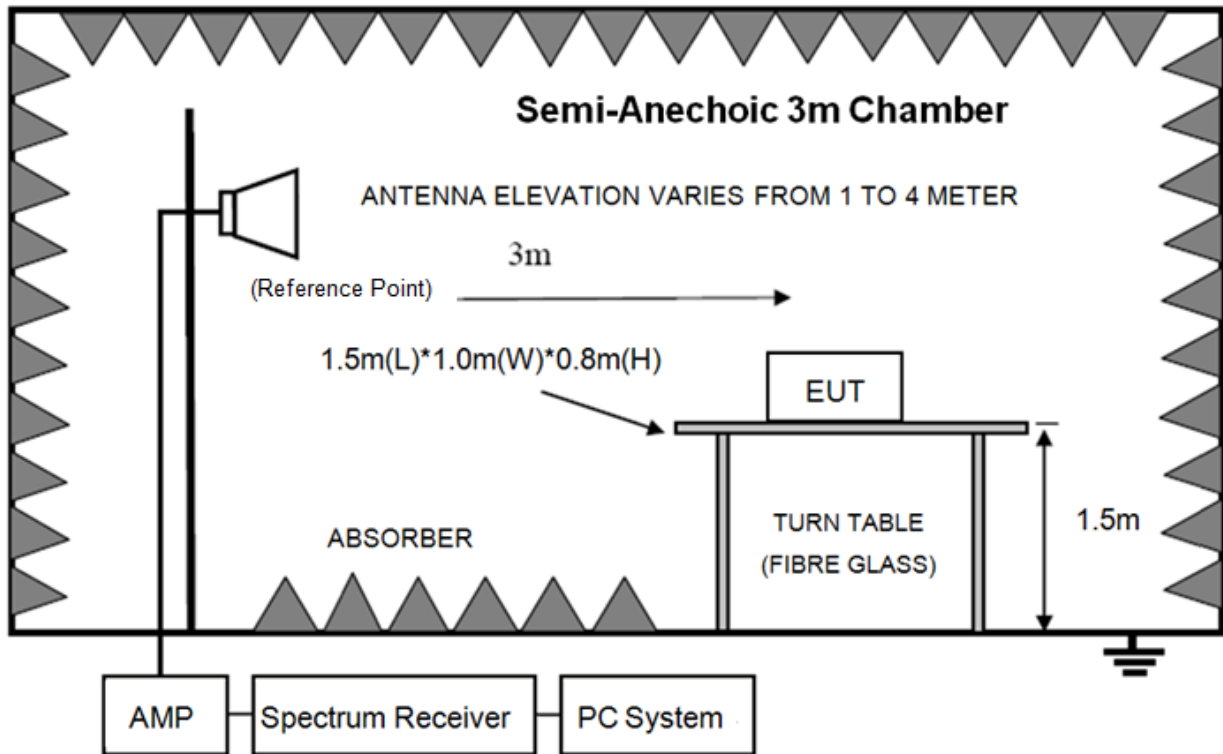

9.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with RSS-Gen Issue 3 clause 7.2.5 (Same as FCC 15.209) limits.

9.3. Test Procedure

Same with clause 8.3 except change investigated frequency range from 2100MHz to 2450MHz and 2450MHz to 2500MHz.

Remark: All restriction band have been tested, and only the worse case is shown in report.

9.4. Test result


PASS. (See below detailed test result)

Note: 11b, 11g, n20, n40 mode ANT 1 and ANT 2 mode all have been tested, only Ant 2 mode is worse case and reported.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2018 RE1# Report Data\Q18011701-1E
WP25M1200\RF.EM6
Test Date : 2018-02-09 **Tested By** : Sunny
EUT : IEEE 802.11 b/g/n WIFI Router **Model Number** : WP25M1200
Power Supply : DC 3.3V **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,
Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/HORIZONTAL
Memo : 11b 2412MHz

Data: 28

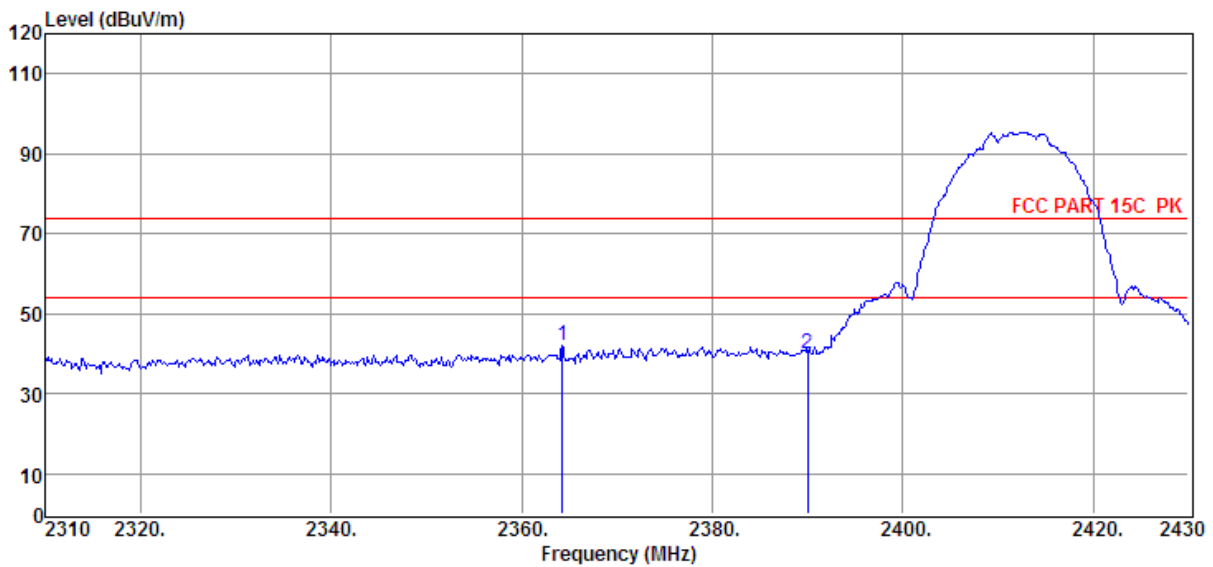


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2364.24	39.37	26.91	29.35	5.08	42.01	74.00	-31.99	Peak	HORIZONTAL
2	2390.00	37.33	27.00	29.42	5.11	40.02	74.00	-33.98	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2018 RE1# Report Data\Q18011701-1E
WP25M1200\RF.EM6
Test Date : 2018-02-09 **Tested By** : Sunny
EUT : IEEE 802.11 b/g/n WIFI Router **Model Number** : WP25M1200
Power Supply : DC 3.3V **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,
Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/VERTICAL
Memo : 11b 2412MHz

Data: 27

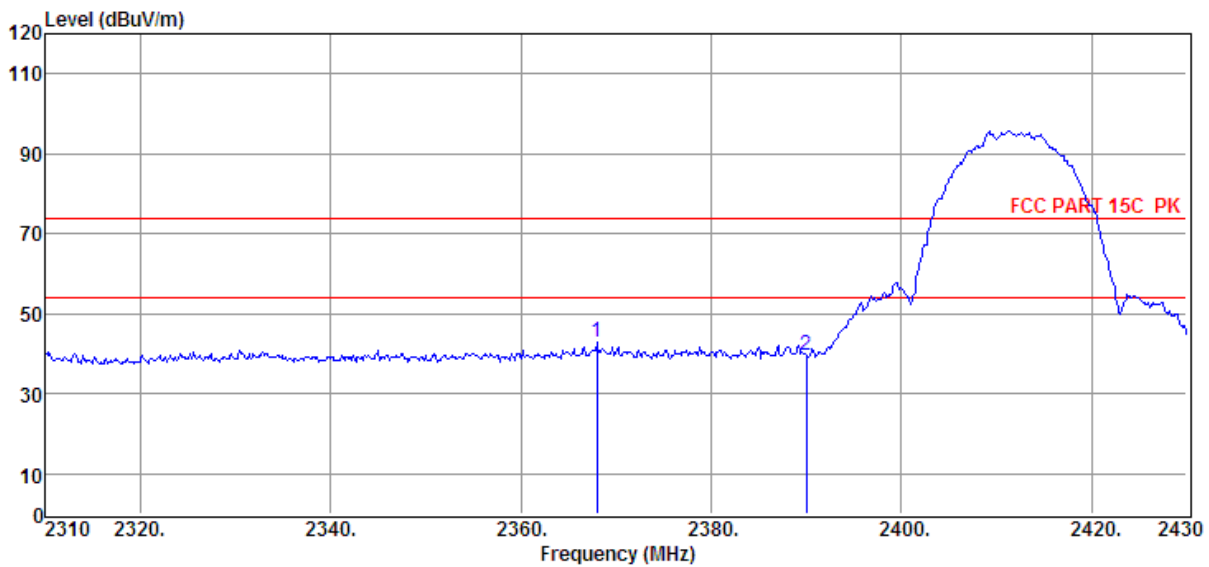

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2367.96	40.34	26.92	29.37	5.08	42.97	74.00	-31.03	Peak	VERTICAL
2	2390.00	37.10	27.00	29.42	5.11	39.79	74.00	-34.21	Peak	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-02-09
EUT : IEEE 802.11 b/g/n WIFI Router
Power Supply : DC 3.3V
Condition : Temp:24.5°C,Humi:55%, Press:100.1kPa
Memo : 11b 2462MHz

D:\2018 RE1# Report Data\Q18011701-1E WP25M1200\RF.EM6
Tested By : Sunny
Model Number : WP25M1200
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/HORIZONTAL

Data: 36

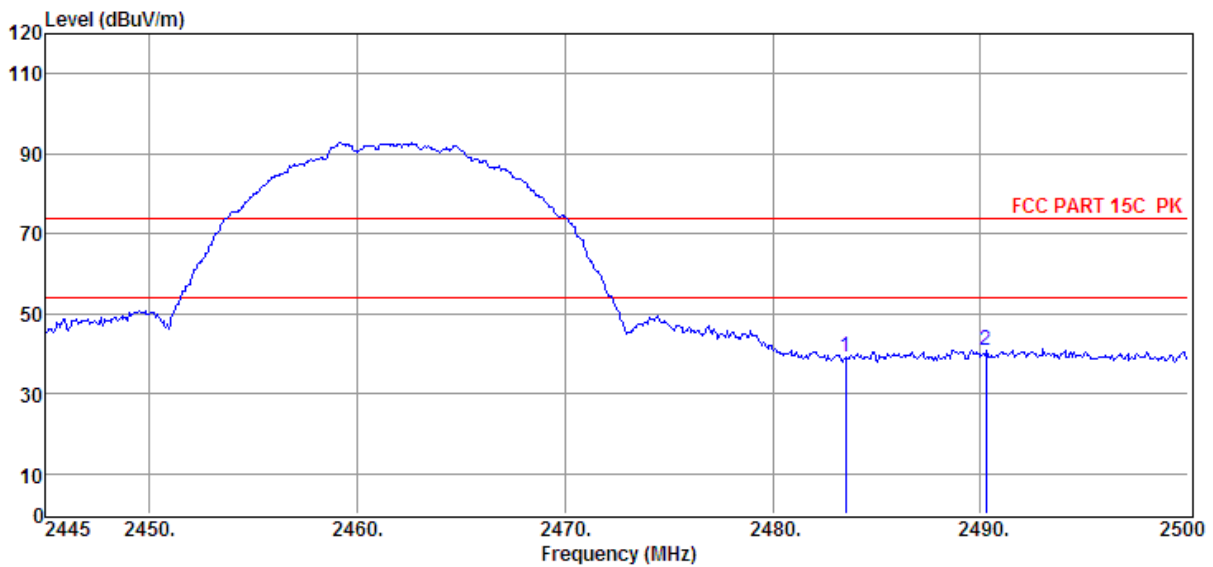


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	36.48	27.34	29.71	5.21	39.32	74.00	-34.68	Peak	HORIZONTAL
2	2490.27	37.83	27.36	29.71	5.22	40.70	74.00	-33.30	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18011701-1E WP25M1200\RF.EM6
Test Date	: 2018-02-09	Tested By : Sunny
EUT	: IEEE 802.11 b/g/n WIFI Router	Model Number : WP25M1200
Power Supply	: DC 3.3V	Test Mode : Tx mode
Condition	: Temp:24.5°C,Humi:55%, Press:100.1kPa	Antenna/Distance : 2017 HF907/3m/VERTICAL
Memo	: 11b 2462MHz	

Data: 35

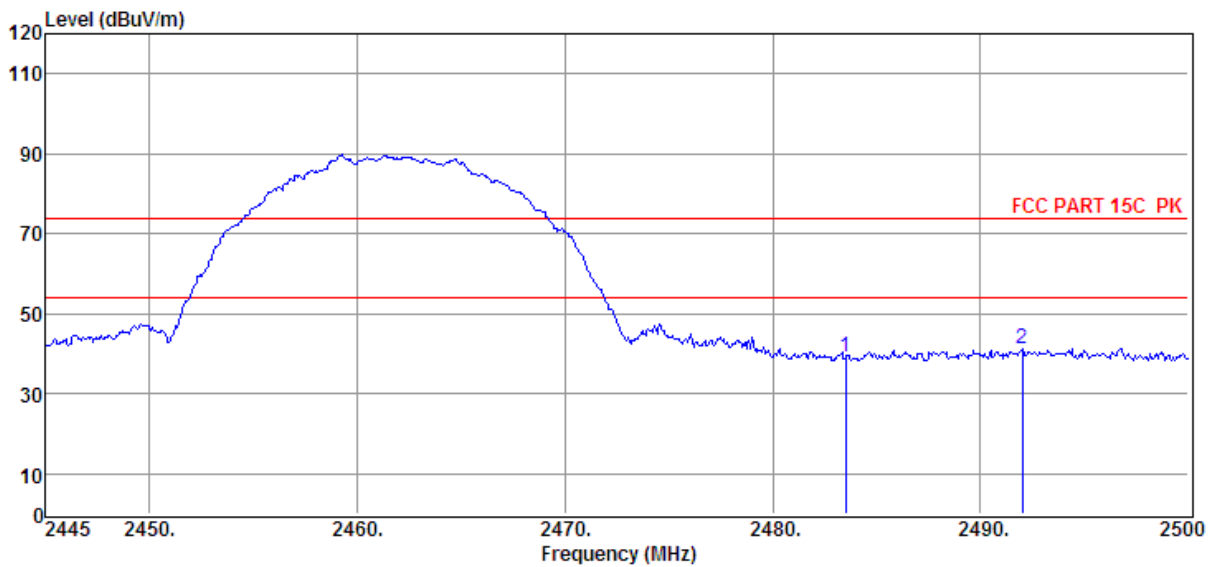


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	36.22	27.34	29.71	5.21	39.06	74.00	-34.94	Peak	VERTICAL
2	2492.03	38.36	27.37	29.73	5.22	41.22	74.00	-32.78	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2018 RE1# Report Data\Q18011701-1E
WP25M1200\RF.EM6
Test Date : 2018-02-09 **Tested By** : Sunny
EUT : IEEE 802.11 b/g/n WIFI Router **Model Number** : WP25M1200
Power Supply : DC 3.3V **Test Mode** : Tx mode
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/HORIZONTAL
Memo : 11g 2412MHz

Data: 37

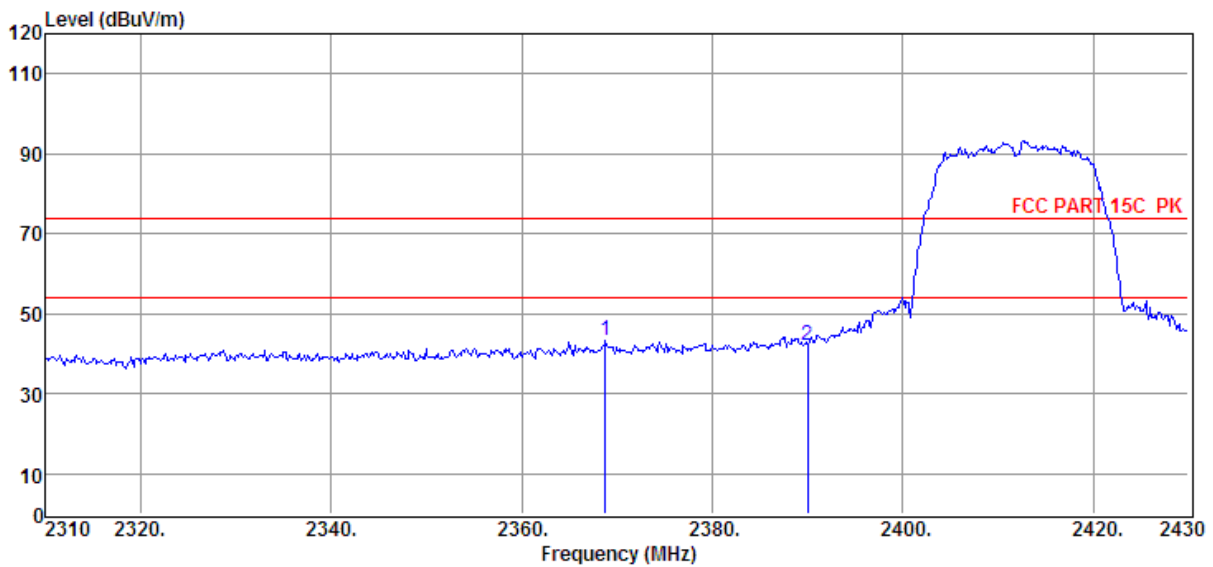


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2368.80	40.52	26.93	29.37	5.09	43.17	74.00	-30.83	Peak	HORIZONTAL
2	2390.00	39.18	27.00	29.42	5.11	41.87	74.00	-32.13	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2018 RE1# Report Data\Q18011701-1E
WP25M1200\RF.EM6
Test Date : 2018-02-09 **Tested By** : Sunny
EUT : IEEE 802.11 b/g/n WIFI Router **Model Number** : WP25M1200
Power Supply : DC 3.3V **Test Mode** : Tx mode
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/VERTICAL
Memo : 11g 2412MHz

Data: 38

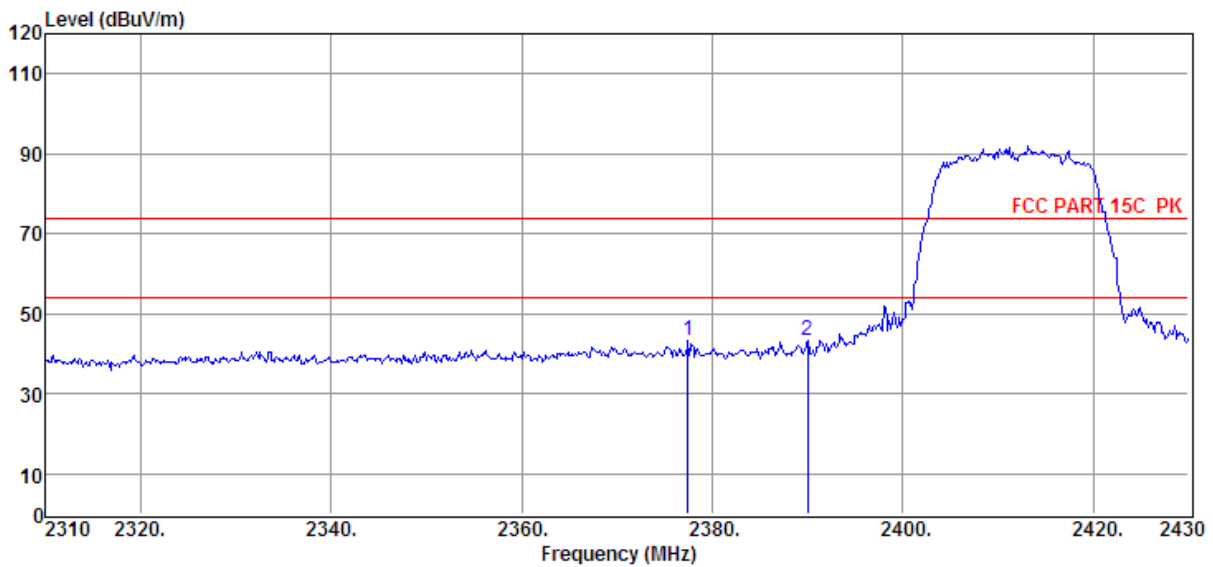


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2377.44	40.80	26.96	29.39	5.10	43.47	74.00	-30.53	Peak	VERTICAL
2	2390.00	40.42	27.00	29.42	5.11	43.11	74.00	-30.89	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18011701-1E WP25M1200\RF.EM6
Test Date	: 2018-02-09	Tested By : Sunny
EUT	: IEEE 802.11 b/g/n WIFI Router	Model Number : WP25M1200
Power Supply	: DC 3.3V	Test Mode : Tx mode
Condition	: Temp:24.5°C,Humi:55%, Press:100.1kPa	Antenna/Distance : 2017 HF907/3m/HORIZONTAL
Memo	: 11G 2462MHz	

Data: 39

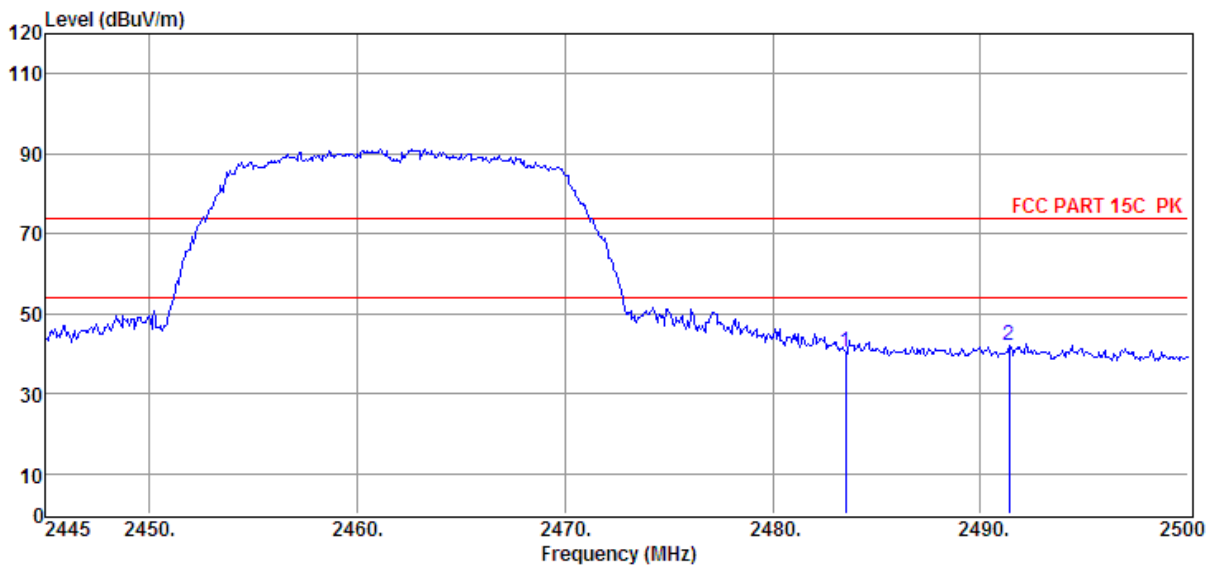


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	37.38	27.34	29.71	5.21	40.22	74.00	-33.78	Peak	HORIZONTAL
2	2491.37	39.25	27.37	29.73	5.22	42.11	74.00	-31.89	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18011701-1E WP25M1200\RF.EM6
Test Date	: 2018-02-09	Tested By : Sunny
EUT	: IEEE 802.11 b/g/n WIFI Router	Model Number : WP25M1200
Power Supply	: DC 3.3V	Test Mode : Tx mode
Condition	: Temp:24.5°C,Humi:55%, Press:100.1kPa	Antenna/Distance : 2017 HF907/3m/VERTICAL
Memo	: 11G 2462MHz	

Data: 40

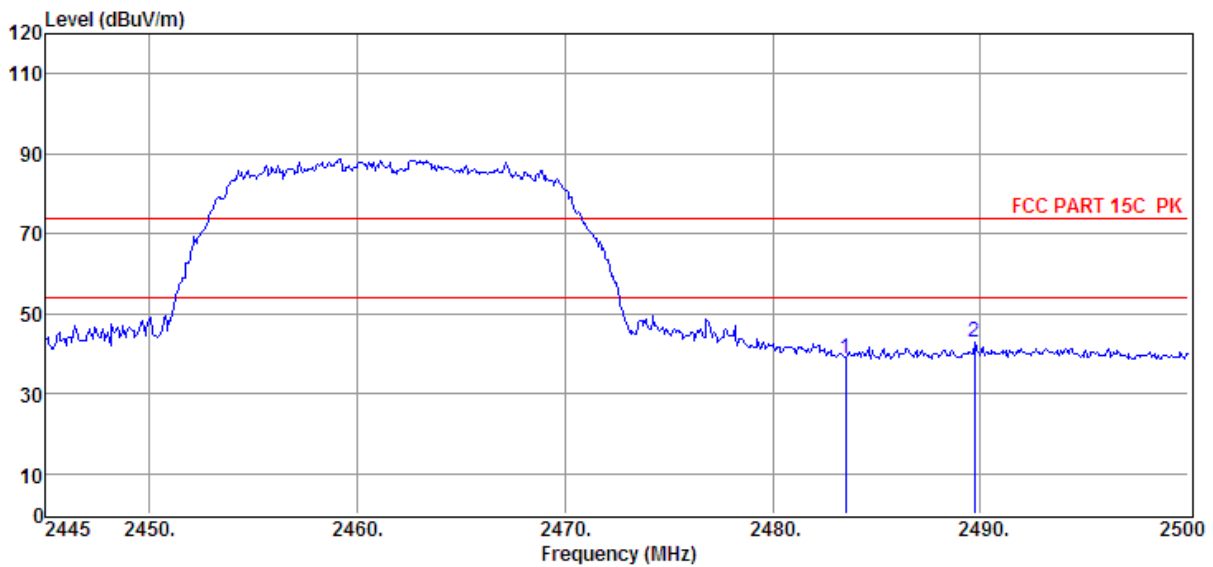


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	36.04	27.34	29.71	5.21	38.88	74.00	-35.12	Peak	VERTICAL
2	2489.72	40.00	27.36	29.71	5.22	42.87	74.00	-31.13	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2018 RE1# Report Data\Q18011701-1E
WP25M1200\RF.EM6
Test Date : 2018-02-09 **Tested By** : Sunny
EUT : IEEE 802.11 b/g/n WIFI Router **Model Number** : WP25M1200
Power Supply : DC 3.3V **Test Mode** : Tx mode
Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/HORIZONTAL
Memo : 11N20 2412MHz

Data: 41

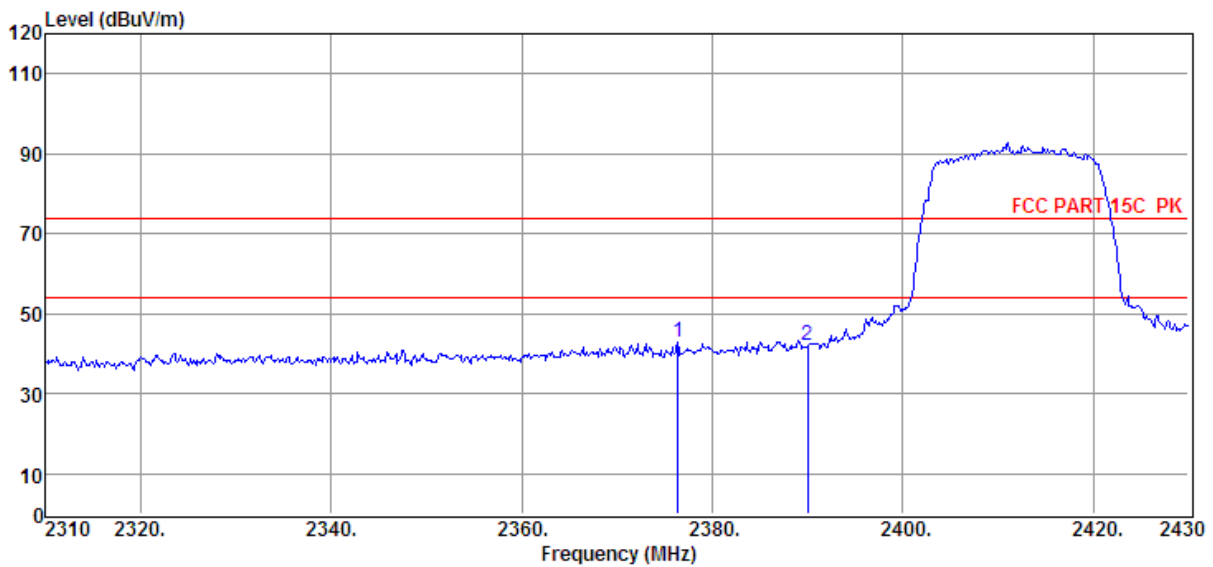


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2376.36	40.41	26.95	29.39	5.09	43.06	74.00	-30.94	Peak	HORIZONTAL
2	2390.00	39.36	27.00	29.42	5.11	42.05	74.00	-31.95	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18011701-1E WP25M1200\RF.EM6
Test Date	: 2018-02-09	Tested By : Sunny
EUT	: IEEE 802.11 b/g/n WIFI Router	Model Number : WP25M1200
Power Supply	: DC 3.3V	Test Mode : Tx mode
Condition	: Temp:24.5°C,Humi:55%, Press:100.1kPa	Antenna/Distance : 2017 HF907/3m/VERTICAL
Memo	: 11N20 2412MHz	

Data: 42

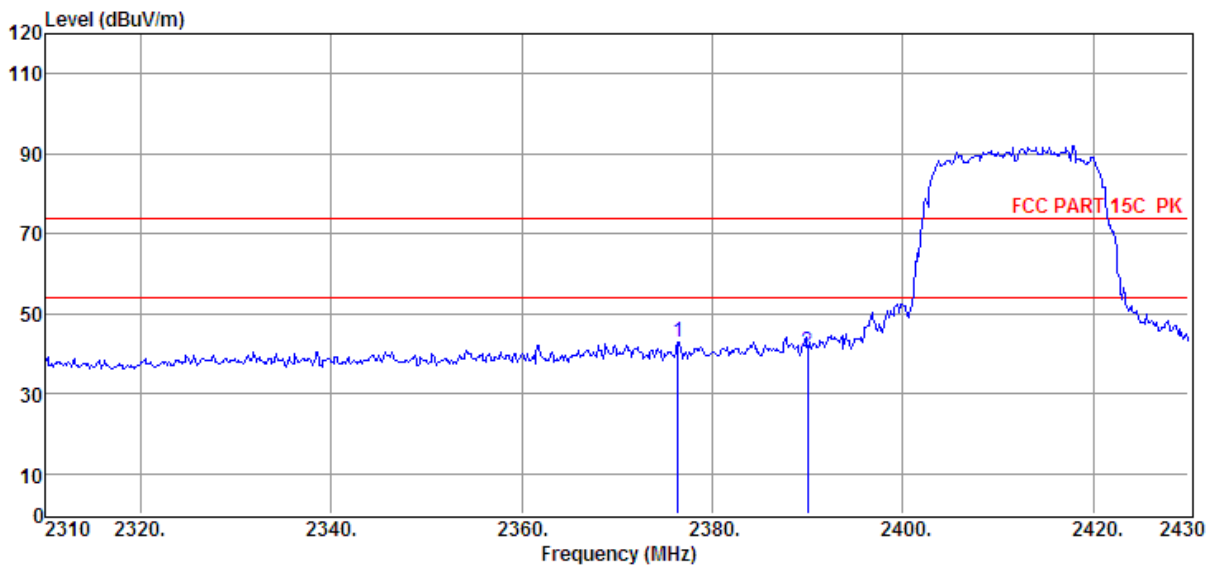


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2376.36	40.30	26.95	29.39	5.09	42.95	74.00	-31.05	Peak	VERTICAL
2	2390.00	37.61	27.00	29.42	5.11	40.30	74.00	-33.70	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18011701-1E WP25M1200\RF.EM6
Test Date	: 2018-02-09	Tested By : Sunny
EUT	: IEEE 802.11 b/g/n WIFI Router	Model Number : WP25M1200
Power Supply	: DC 3.3V	Test Mode : Tx mode
Condition	: Temp:24.5'C,Humi:55%, Press:100.1kPa	Antenna/Distance : 2017 HF907/3m/HORIZONTAL
Memo	: 11N20 2462MHz	

Data: 44

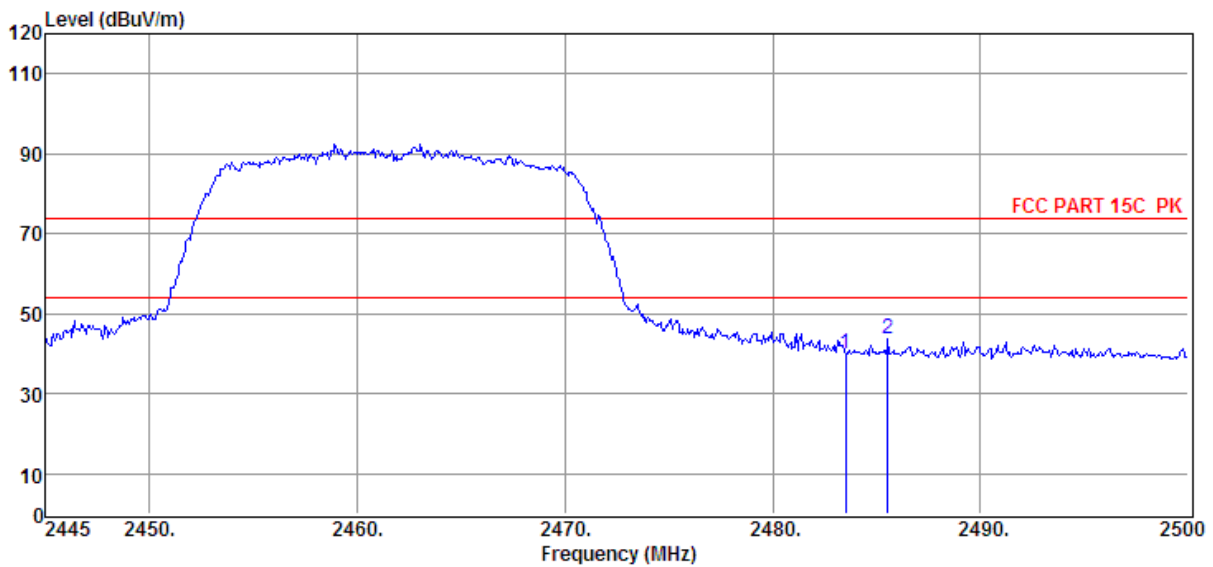


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	37.02	27.34	29.71	5.21	39.86	74.00	-34.14	Peak	HORIZONTAL
2	2485.54	40.76	27.35	29.71	5.21	43.61	74.00	-30.39	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18011701-1E WP25M1200\RF.EM6
Test Date	: 2018-02-09	Tested By : Sunny
EUT	: IEEE 802.11 b/g/n WIFI Router	Model Number : WP25M1200
Power Supply	: DC 3.3V	Test Mode : Tx mode
Condition	: Temp:24.5°C,Humi:55%, Press:100.1kPa	Antenna/Distance : 2017 HF907/3m/VERTICAL
Memo	: 11N20 2462MHz	

Data: 43

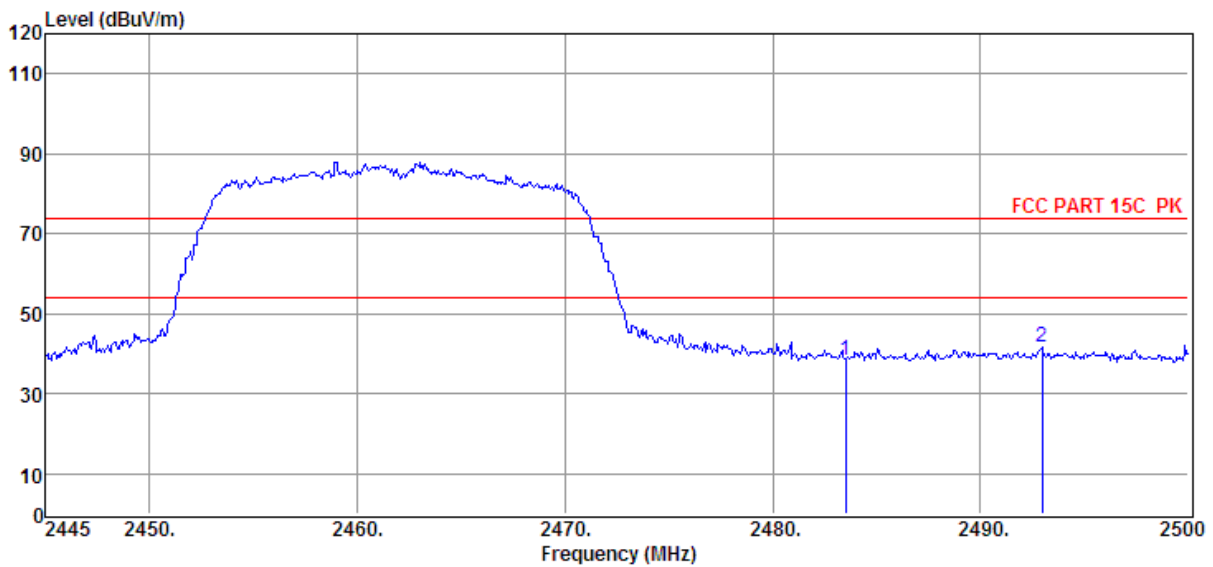


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	35.62	27.34	29.71	5.21	38.46	74.00	-35.54	Peak	VERTICAL
2	2492.96	38.61	27.37	29.73	5.22	41.47	74.00	-32.53	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2018 RE1# Report Data\Q18011701-1E
WP25M1200\RF.EM6
Test Date : 2018-02-09 **Tested By** : Sunny
EUT : IEEE 802.11 b/g/n WIFI Router **Model Number** : WP25M1200
Power Supply : DC 3.3V **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,
Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/HORIZONTAL
Memo : 11N40 2422MHz

Data: 45

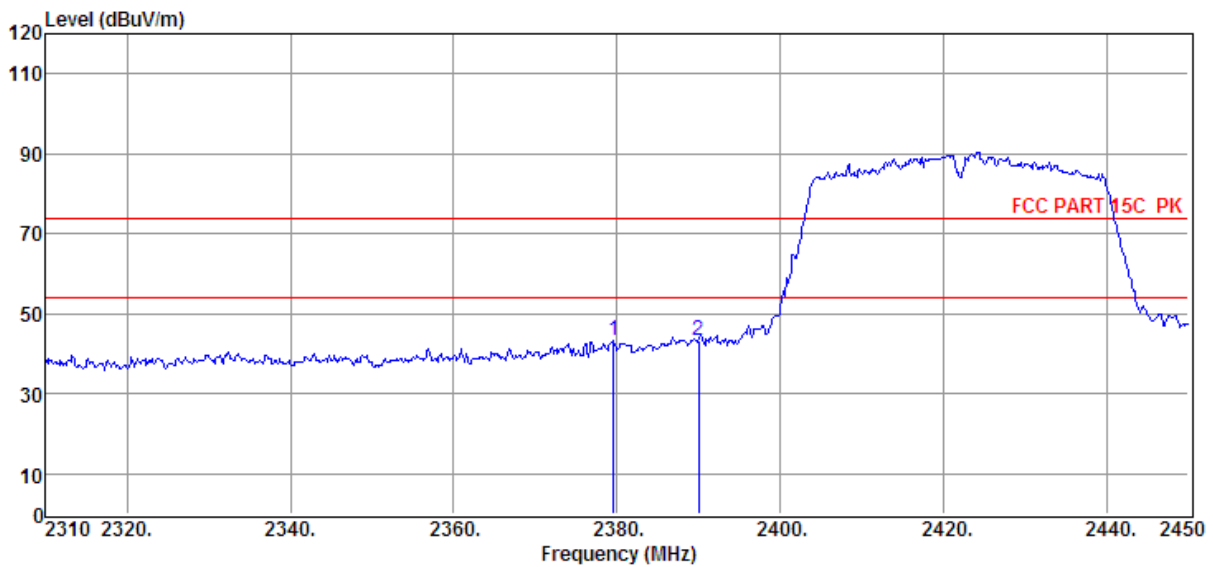


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/ m)	Over Limit (dB)	Detector	Polarization
1	2379.58	40.47	26.97	29.39	5.10	43.15	74.00	-30.85	Peak	HORIZONTAL
2	2390.00	40.57	27.00	29.42	5.11	43.26	74.00	-30.74	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2018 RE1# Report Data\Q18011701-1E
WP25M1200\RF.EM6
Test Date : 2018-02-09 **Tested By** : Sunny
EUT : IEEE 802.11 b/g/n WIFI Router **Model Number** : WP25M1200
Power Supply : DC 3.3V **Test Mode** : Tx mode
Condition : Temp:24.5°C,Humi:55%,
Press:100.1kPa **Antenna/Distance** : 2017 HF907/3m/VERTICAL
Memo : 11N40 2422MHz

Data: 46

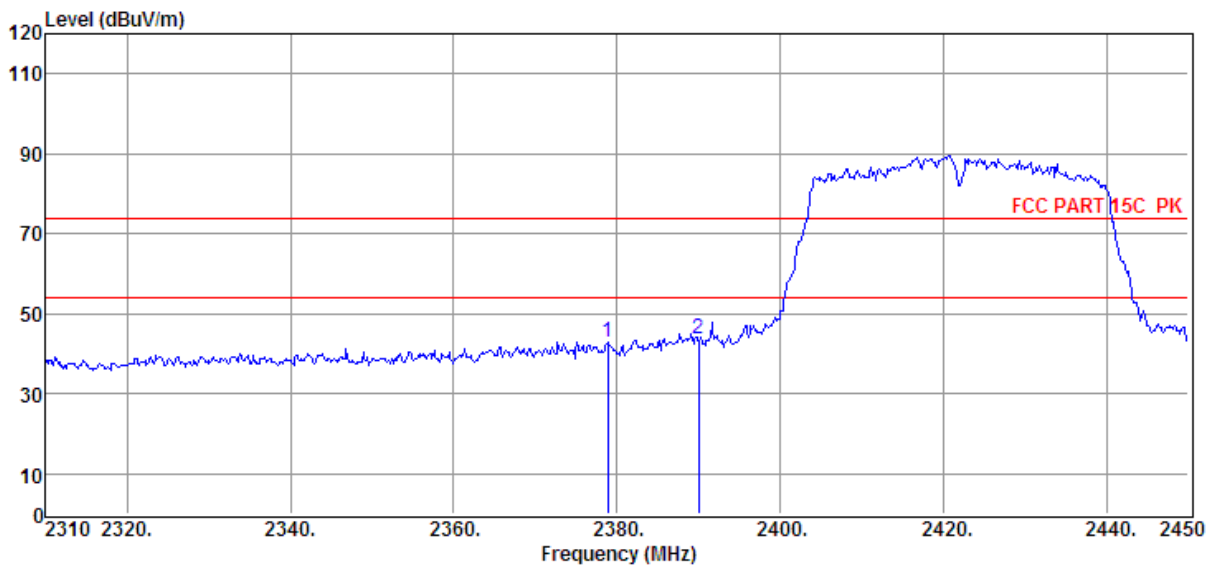

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2378.88	40.34	26.96	29.39	5.10	43.01	74.00	-30.99	Peak	VERTICAL
2	2390.00	40.82	27.00	29.42	5.11	43.51	74.00	-30.49	Peak	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2018-02-09
EUT : IEEE 802.11 b/g/n WIFI Router
Power Supply : DC 3.3V
Condition : Temp:24.5'C,Humi:55%, Press:100.1kPa
Memo : 11N40 2452MHz

D:\2018 RE1# Report Data\Q18011701-1E WP25M1200\RF.EM6
Tested By : Sunny
Model Number : WP25M1200
Test Mode : Tx mode
Antenna/Distance : 2017 HF907/3m/HORIZONTAL

Data: 47

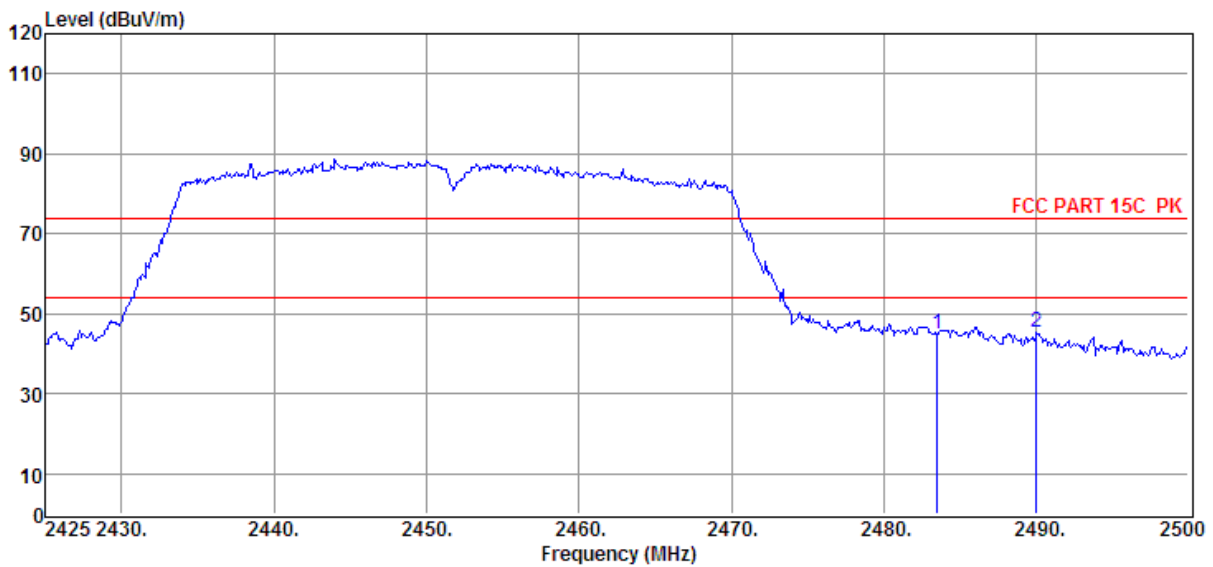


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	42.04	27.34	29.71	5.21	44.88	74.00	-29.12	Peak	HORIZONTAL
2	2490.03	42.30	27.36	29.71	5.22	45.17	74.00	-28.83	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 1#	D:\2018 RE1# Report Data\Q18011701-1E WP25M1200\RF.EM6
Test Date	: 2018-02-09	Tested By : Sunny
EUT	: IEEE 802.11 b/g/n WIFI Router	Model Number : WP25M1200
Power Supply	: DC 3.3V	Test Mode : Tx mode
Condition	: Temp:24.5°C,Humi:55%, Press:100.1kPa	Antenna/Distance : 2017 HF907/3m/VERTICAL
Memo	: 11N40 2452MHz	

Data: 48

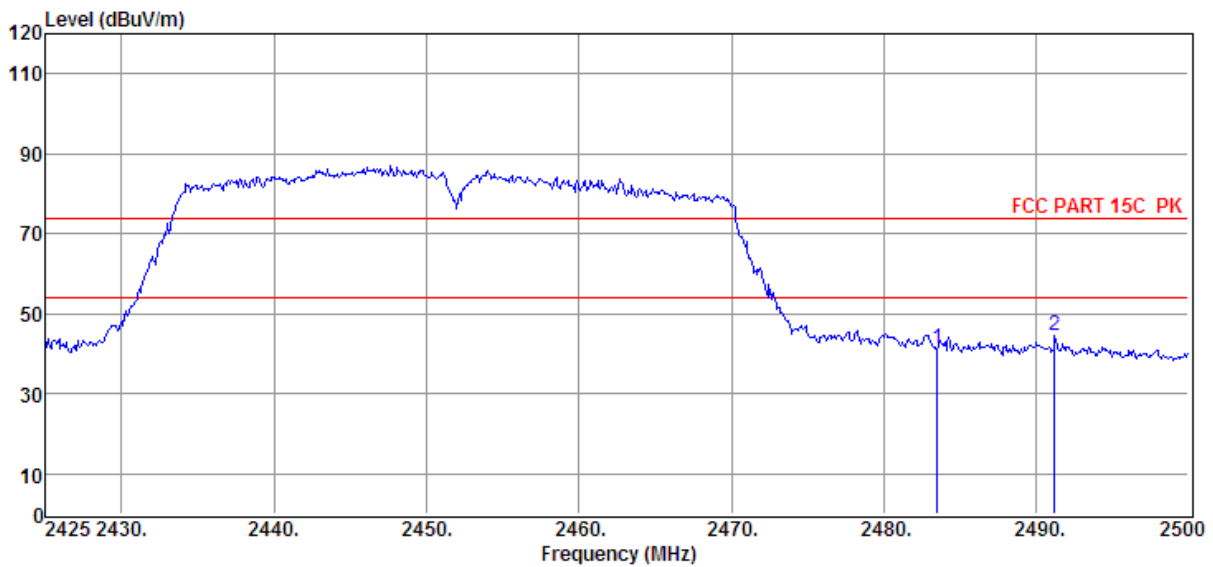


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	38.26	27.34	29.71	5.21	41.10	74.00	-32.90	Peak	VERTICAL
2	2491.23	41.66	27.37	29.73	5.22	44.52	74.00	-29.48	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

10. Power Line Conducted Emission

10.1. Block diagram of test setup

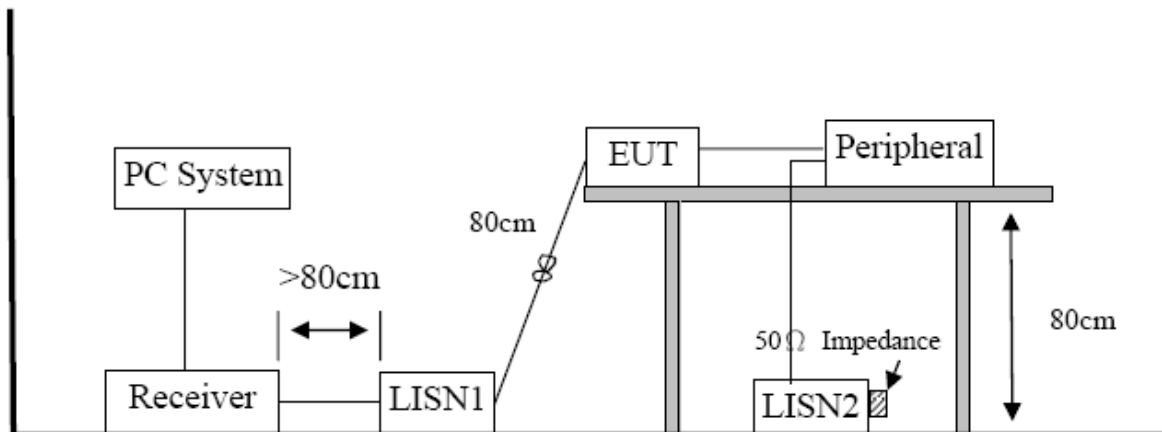

10.2. Power Line Conducted Emission Limits(Class B)

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

10.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

10.4. Test Result

Not Applicable.

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result

See 2.1

END OF REPORT