

# FCC Part 15C&RSS-247 TEST REPORT

## FCC ID: 2AD4XCR3BBT

## IC: 12714A-CR3BBT

Product : CREATIVE REFERENCE MONITORS  
WITH BLUETOOTH  
Model Name : CR4.5BT, CR3.5BT  
Brand :   
Report No. : NCT24023129

Prepared for

**LOUD AUDIO, LLC**

**19820 North Creek Parkway, #201, Bothell, Washington 98011-8227, United States**

Prepared by

**Shenzhen NCT Testing Technology Co., Ltd.**

**A101&2F B2, Fugiao 6th Area, Xintian Community, Fuhai Street, Baoan District,  
Shenzhen, People's Republic of China**

**TEL: 400-8868-419**

**FAX: 86-755-27790922**

## 1 TEST RESULT CERTIFICATION

Applicant's name : LOUD AUDIO, LLC  
Address : 19820 North Creek Parkway, #201, Bothell, Washington 98011-8227, United States  
Manufacture's name : LOUD AUDIO, LLC  
Address : 19820 North Creek Parkway, #201, Bothell, Washington 98011-8227, United States  
Product name : CREATIVE REFERENCE MONITORS WITH BLUETOOTH  
Model name : CR4.5BT, CR3.5BT  
Additional model : N/A  
Standards : FCC CFR47 Part 15 Section 15.247  
RSS-247 Issue 3: August 2023  
Test procedure : ANSI C63.10:2013  
RSS-GEN, Issue 5: March 2019  
Test Date : May 22, 2024 to Jun. 09, 2024  
Date of Issue : Jun. 13, 2024  
Test Result : Pass

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:

*Keven Wu*

Keven Wu / Engineer

Technical Manager:

*Henry Wang*

Henry Wang / Manager



## Contents

	Page
<b>1 TEST RESULT CERTIFICATION .....</b>	<b>2</b>
<b>2 TEST SUMMARY .....</b>	<b>5</b>
<b>3 TEST FACILITY .....</b>	<b>6</b>
<b>4 GENERAL INFORMATION .....</b>	<b>7</b>
4.1 GENERAL DESCRIPTION OF E.U.T. ....	7
4.2 CHANNEL LIST .....	8
4.3 TEST SETUP CONFIGURATION .....	9
4.4 TEST MODE .....	9
<b>5 EQUIPMENT DURING TEST .....</b>	<b>10</b>
5.1 EQUIPMENTS LIST .....	10
5.2 MEASUREMENT UNCERTAINTY .....	12
5.3 DESCRIPTION OF SUPPORT UNITS .....	12
<b>6 CONDUCTED EMISSION .....</b>	<b>13</b>
6.1 E.U.T. OPERATION .....	13
6.2 EUT SETUP .....	13
6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	14
6.4 MEASUREMENT PROCEDURE: .....	14
6.5 CONDUCTED EMISSION LIMIT .....	14
6.6 MEASUREMENT DESCRIPTION .....	14
6.7 CONDUCTED EMISSION TEST RESULT .....	14
<b>7 RADIATED SPURIOUS EMISSIONS .....</b>	<b>19</b>
7.1 EUT OPERATION .....	19
7.2 TEST SETUP .....	20
7.3 SPECTRUM ANALYZER SETUP .....	21
7.4 TEST PROCEDURE .....	22
7.5 SUMMARY OF TEST RESULTS .....	23
<b>8 MAXIMUM PEAK OUTPUT POWER TEST .....</b>	<b>32</b>
8.1 TEST STANDARD AND LIMIT .....	32
8.2 TEST SETUP .....	32

8.3 TEST PROCEDURE .....	32
8.4 TEST DATA .....	32
<b>9 20DB OCCUPY BANDWIDTH &amp; 99% OCB TEST .....</b>	<b>36</b>
9.1 TEST STANDARD .....	36
9.2 TEST SETUP .....	36
9.3 TEST PROCEDURE .....	36
9.4 TEST DATA .....	36
<b>10 CARRIER FREQUENCY SEPARATION TEST .....</b>	<b>40</b>
10.1 TEST STANDARD AND LIMIT .....	40
10.2 TEST SETUP .....	40
10.3 TEST PROCEDURE .....	40
10.4 TEST DATA .....	40
<b>11 NUMBER OF HOPPING CHANNEL TEST .....</b>	<b>42</b>
11.1 TEST STANDARD AND LIMIT .....	42
11.2 TEST SETUP .....	42
11.3 TEST PROCEDURE .....	42
11.4 TEST DATA .....	43
<b>12 DWELL TIME TEST .....</b>	<b>45</b>
12.1 TEST STANDARD AND LIMIT .....	45
12.2 TEST SETUP .....	45
12.3 TEST PROCEDURE .....	45
12.4 TEST DATA .....	46
<b>13 100KHZ BANDWIDTH OF FREQUENCY BAND EDGE REQUIREMENT .....</b>	<b>50</b>
13.1 TEST STANDARD AND LIMIT .....	50
13.2 TEST SETUP .....	50
13.3 TEST PROCEDURE .....	50
13.4 TEST DATA .....	51
<b>14 ANTENNA REQUIREMENT .....</b>	<b>56</b>
14.1 TEST STANDARD AND REQUIREMENT .....	56
14.2 ANTENNA CONNECTED CONSTRUCTION .....	56
<b>15 APPENDIX I -- TEST SETUP PHOTOGRAPH .....</b>	<b>57</b>
<b>16 APPENDIX II -- EUT PHOTOGRAPH .....</b>	<b>58</b>

## 2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions and Restricted Bandedge	15.205(a) 15.209 15.247(d) RSS-Gen.6.13 RSS-Gen.8.10	PASS
Conducted Unwanted emissions and Band edge	15.247(d) 15.205(a) RSS-247 5.5	PASS
Conduct Emission	15.207 RSS-Gen 8.8	PASS
20dB Bandwidth & 99% OCB	15.247(a)(1) RSS-247.5.1(2) RSS-Gen.6.7	PASS
Maximum Peak Output Power	15.247(b)(1) RSS-247.5.4(4)	PASS
Frequency Separation	15.247(a)(1) RSS-247.5.1(4)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)RSS-247.5.1(4)	PASS
Dwell time	15.247(a)(1)(iii)RSS-247.5.1(5)	PASS
Antenna Requirement	15.203 RSS-Gen 6.8	PASS

Remark:

1. "N/A" denotes test is not applicable in this Test Report.

## 3 TEST FACILITY

### Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

## 4 General Information

### 4.1 General Description of E.U.T.

Product Name	:	CREATIVE REFERENCE MONITORS WITH BLUETOOTH
Model Name	:	CR4.5BT, CR3.5BT
Sample ID	:	240607024, 240607030
Sample(s) Status:	:	Engineer sample
Additional model	:	N/A
Model difference	:	The only difference between models is that the size of the outer box is different, and the electronic part is completely the same.
Operating frequency	:	2402-2480MHz
Numbers of Channel	:	79 channels
Antenna Type	:	PCB Antenna
Antenna Gain	:	0.11dBi
Type of Modulation	:	GFSK, $\pi/4$ DQPSK, 8DPSK
Power supply	:	100V~240V 50-60Hz 60W
Hardware Version	:	A00
Software Version	:	V11
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		

## 4.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK,  $\pi/4$ DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-



Channel	Frequency(MHz)
0	2402
39	2441
78	2480

### 4.3 Test Setup Configuration

Conducted Emission

AC Line



Radiated Emission

AC Line



Conducted Spurious

AC Line



### 4.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	FCC_Test_Tools V2.24.exe
Power level setup	≤ 10dBm

## 5 Equipment During Test

### 5.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2023/6/21	2024/6/20
LISN	ENV 216	102796	Rohde & Schwarz	2023/6/21	2024/6/20
LISN	VN1-13S	004023	CRANAGE	2023/6/21	2024/6/20
Cable	RG223-1500MM	NA	RG	2023/6/21	2024/6/20

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2023/6/21	2024/6/20
Spectrum Analyze (10Hz-26.5GHz)	N9020A	MY50510202	Agilent	2023/6/21	2024/6/20
Amplifi (30MHz-1GHz)	BBV 9743 B	00374	SCHNARZBECK	2023/6/21	2024/6/20
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNARZBECK	2023/3/19	2025/3/18
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNARZBECK	2023/3/19	2025/3/18
Pream plifier (1GHz-18GHz)	BBV 9718D	0024	SCHNARZBECK	2023/6/21	2024/6/20
Spectrum Analyze (1GHz-40GHz)	FSV 40	100952	Rohde & Schwarz	2023/6/21	2024/6/20
Pream plifier (15GHz-40GHz)	BBV 9718D	0024	SCHNARZBECK	2023/6/21	2024/6/20
Broadband Antenna (15GHz-40GHz)	SAS-574	588	A.H.System	2023/3/19	2025/3/18
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHNARZBECK	2023/6/21	2024/6/20

Amplifier (9KHz-30MHz)	CVP 9222 C	00109	SCHNARZBECK	2023/6/21	2024/6/20
MXG Signal Analyzer	N9020A	101178	RS	2023/6/21	2024/6/20
MXG Vector Signal Generator	N5182A	MY50510202	Agilent	2023/6/21	2024/6/20
MXG Analog Signal Generator	N5181A	00374	SCHWARZBECK	2023/6/21	2024/6/20
Power Sensor	TR1029-2	00473	SCHNARZBECK	2023/6/21	2024/6/20
RF Swith	TR1029-1	02622	SCHNARZBECK	2023/6/21	2024/6/20
Cable	DA800- 4000MM	NA	DA	2023/6/21	2024/6/20
Cable	DA800- 11000MM	NA	DA	2023/6/21	2024/6/20

Other


Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	AUDIX	e3	6.120718
2	EMC radiation test system	AUDIX	e3	6.120718
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

## 5.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 <sup>-6</sup>
Bandwidth	± 1.5 x 10 <sup>-6</sup>
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

## 5.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	CREATIVE REFERENCE MONITORS WITH BLUETOOTH		CR4.5BT, CR3.5BT	N/A	EUT
E-2	Notebook	lenovo	B40-80	MP07F6JD	Auxiliary

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 6 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207& RSS-Gen [8.8]  
Test Method: : ANSI C63.10:2013  
Test Result: : PASS  
Frequency Range: : 150kHz to 30MHz  
Class/Severity: : Class B  
Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


### 6.1 E.U.T. Operation

Operating Environment :

Temperature: : 23.2°C  
Humidity: : 51 % RH  
Atmospheric Pressure: : 101.12 kPa  
Test Voltage : AC 120V/60Hz


### 6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013

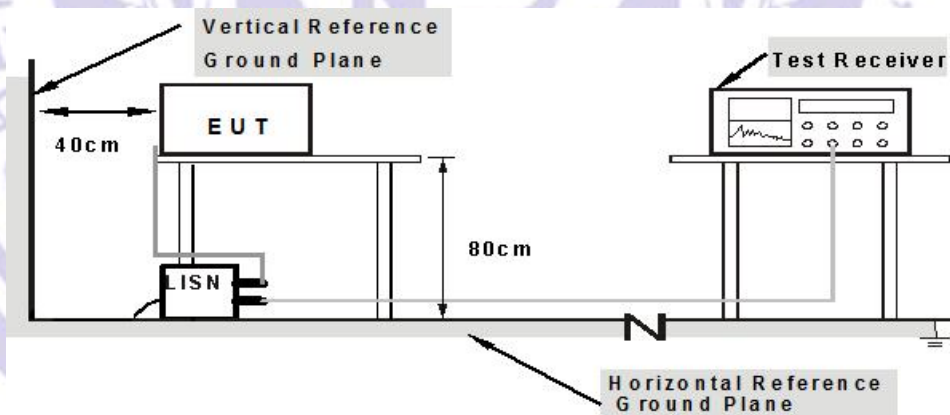

**Note: 1.Support units were connected to second LISN.  
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

## 6.3 Test SET-UP (Block Diagram of Configuration)

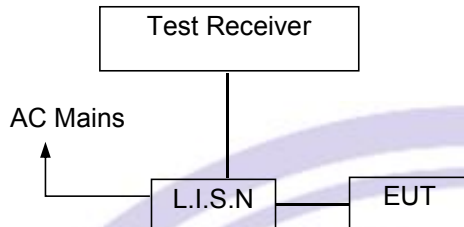

## 6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

## 6.5 Conducted Emission Limit

### Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

### Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

## 6.6 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

## 6.7 Conducted Emission Test Result

Pass


Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode ( $\pi/4$ DQPSK) are recorded in the following pages and the others modulation methods do not exceed the limits.

Channel:	High	Phase :	L
Model:	CR4.5BT		

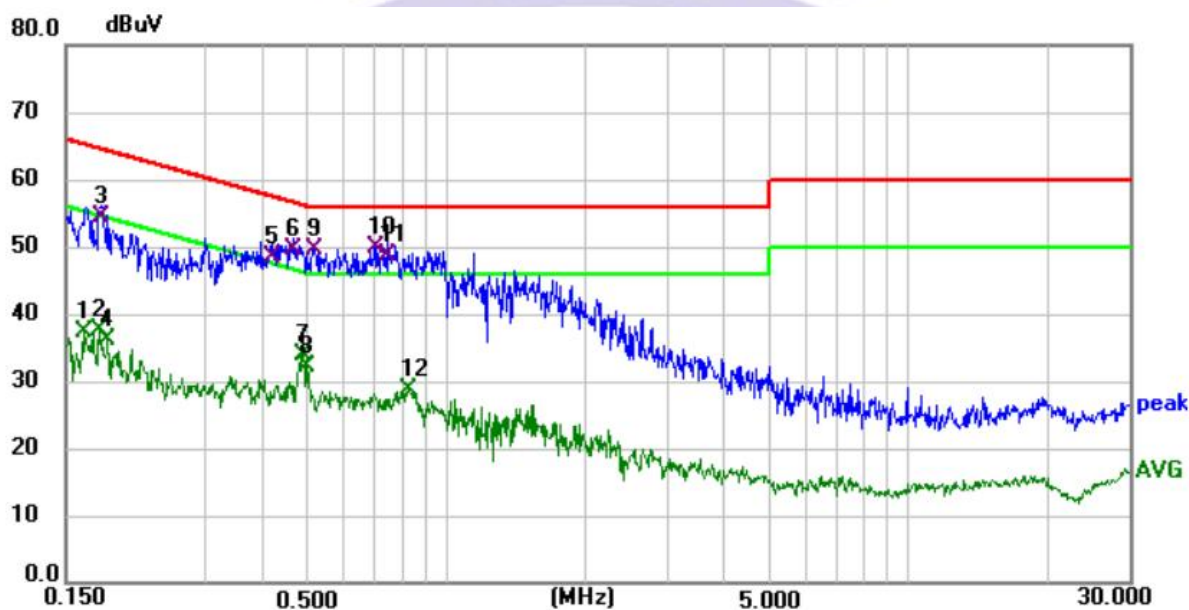

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.165	27.44	9.94	37.38	55.21	-17.83	AVG	P
2	0.178	27.65	9.95	37.60	54.58	-16.98	AVG	P
3	0.180	44.36	9.96	54.32	64.49	-10.17	QP	P
4	0.184	26.09	9.98	36.07	54.30	-18.23	AVG	P
5	0.420	38.65	9.86	48.51	57.45	-8.94	QP	P
6	0.464	39.72	9.95	49.67	56.62	-6.95	QP	P
7	0.490	23.87	10.01	33.88	46.17	-12.29	AVG	P
8	0.502	22.12	10.03	32.15	46.00	-13.85	AVG	P
9	0.520	39.49	10.04	49.53	56.00	-6.47	QP	P
10 *	0.702	39.68	10.06	49.74	56.00	-6.26	QP	P
11	0.749	38.55	10.12	48.67	56.00	-7.33	QP	P
12	0.830	18.72	10.04	28.76	46.00	-17.24	AVG	P

Channel:	High	Phase :	N
Model:	CR4.5BT		

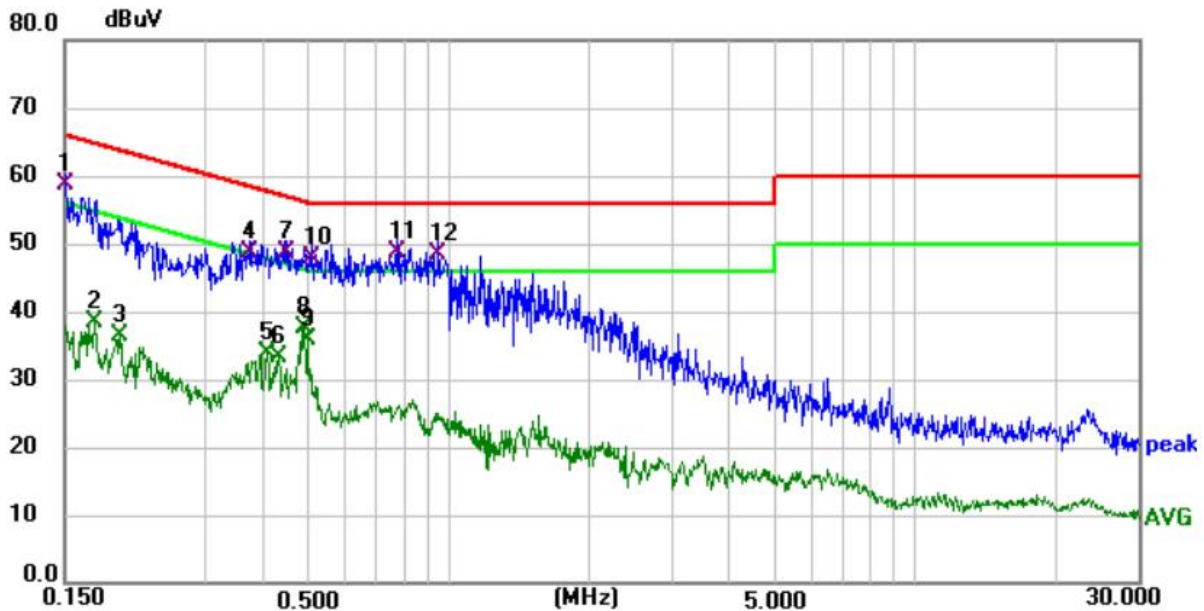


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1 *	0.151	48.58	10.05	58.63	65.94	-7.31	QP	P
2	0.174	28.56	9.98	38.54	54.77	-16.23	AVG	P
3	0.198	26.38	10.00	36.38	53.69	-17.31	AVG	P
4	0.377	38.76	9.93	48.69	58.35	-9.66	QP	P
5	0.408	24.01	9.95	33.96	47.69	-13.73	AVG	P
6	0.433	23.28	10.00	33.28	47.19	-13.91	AVG	P
7	0.448	38.77	10.02	48.79	56.91	-8.12	QP	P
8	0.490	27.54	10.09	37.63	46.17	-8.54	AVG	P
9	0.498	25.77	10.11	35.88	46.03	-10.15	AVG	P
10	0.511	37.91	10.08	47.99	56.00	-8.01	QP	P
11	0.777	38.47	10.12	48.59	56.00	-7.41	QP	P
12	0.953	38.38	9.96	48.34	56.00	-7.66	QP	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor




Channel:	High	Phase :	L
Model:	CR3.5BT		

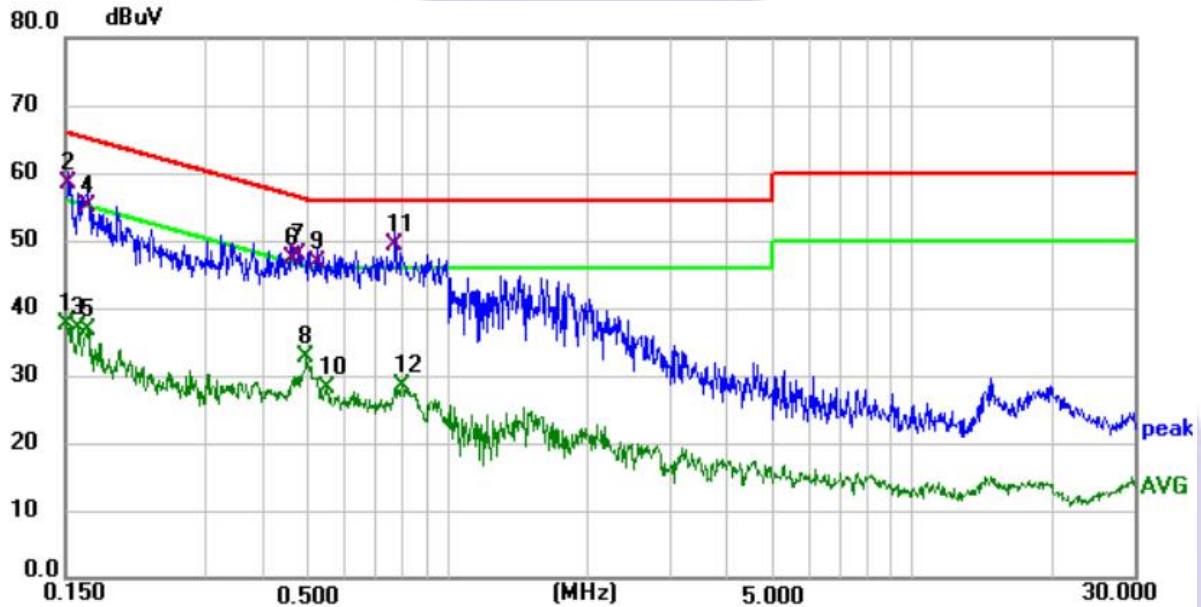

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.151	27.56	10.05	37.61	55.94	-18.33	AVG	P
2	0.153	48.28	10.04	58.32	65.84	-7.52	QP	P
3	0.160	26.98	9.98	36.96	55.46	-18.50	AVG	P
4	0.167	45.22	9.92	55.14	65.11	-9.97	QP	P
5	0.167	26.86	9.92	36.78	55.11	-18.33	AVG	P
6	0.463	37.37	9.95	47.32	56.64	-9.32	QP	P
7	0.476	37.95	9.98	47.93	56.41	-8.48	QP	P
8	0.495	22.56	10.02	32.58	46.08	-13.50	AVG	P
9	0.521	36.79	10.04	46.83	56.00	-9.17	QP	P
10	0.550	18.00	10.06	28.06	46.00	-17.94	AVG	P
11 *	0.770	39.18	10.15	49.33	56.00	-6.67	QP	P
12	0.800	18.17	10.19	28.36	46.00	-17.64	AVG	P

Channel:	High	Phase :	N
Model:	CR3.5BT		

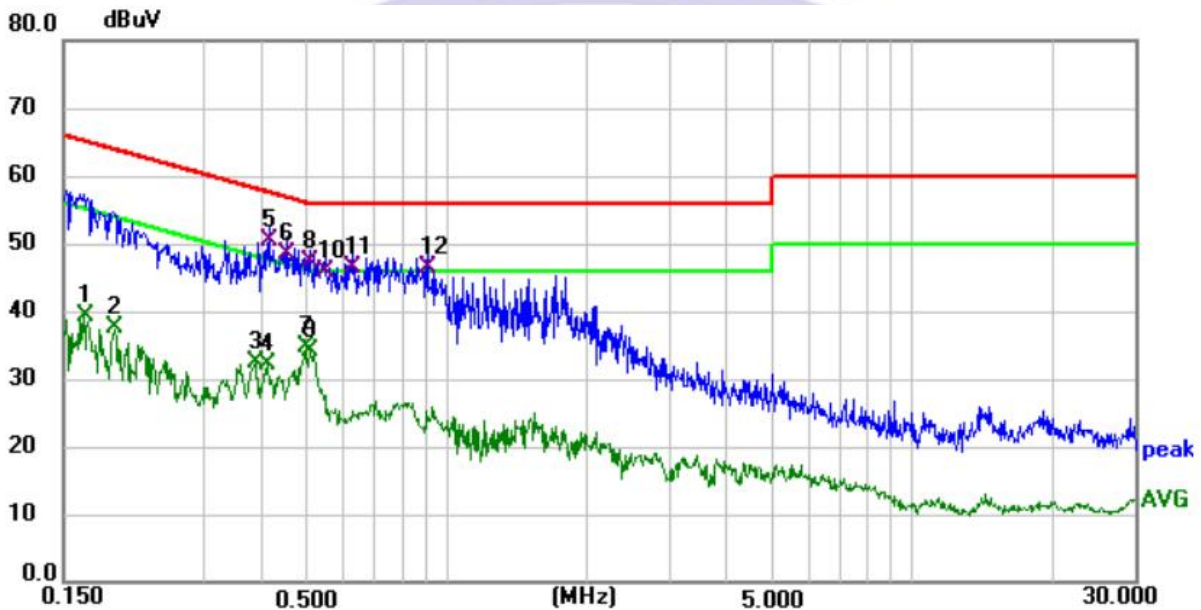

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.167	29.19	9.99	39.18	55.11	-15.93	AVG	P
2	0.193	27.44	9.99	37.43	53.91	-16.48	AVG	P
3	0.388	22.45	9.93	32.38	48.11	-15.73	AVG	P
4	0.411	22.08	9.96	32.04	47.63	-15.59	AVG	P
5 *	0.416	40.34	9.97	50.31	57.53	-7.22	QP	P
6	0.453	38.53	10.03	48.56	56.82	-8.26	QP	P
7	0.499	24.66	10.11	34.77	46.02	-11.25	AVG	P
8	0.509	37.24	10.08	47.32	56.00	-8.68	QP	P
9	0.509	24.18	10.08	34.26	46.00	-11.74	AVG	P
10	0.549	35.96	9.97	45.93	56.00	-10.07	QP	P
11	0.625	36.42	9.89	46.31	56.00	-9.69	QP	P
12	0.913	36.39	9.98	46.37	56.00	-9.63	QP	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

## 7 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247& RSS-247 [5.5]  
 Test Method : ANSI C63.10:2013  
 Test Result : PASS  
 Measurement Distance : 3m  
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log <sup>(2400/F(kHz))</sup> + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log <sup>(24000/F(kHz))</sup> + 40
1.705 ~ 30	30	30	100 * 30	20log <sup>(30)</sup> + 40
30 ~ 88	100	3	100	20log <sup>(100)</sup>
88 ~ 216	150	3	150	20log <sup>(150)</sup>
216 ~ 960	200	3	200	20log <sup>(200)</sup>
Above 960	500	3	500	20log <sup>(500)</sup>

### 7.1 EUT Operation


Operating Environment :

Temperature : 24.5 °C  
 Humidity : 55.5% RH  
 Atmospheric Pressure : 101.3kPa  
 Test Voltage : AC 120V60Hz


## 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

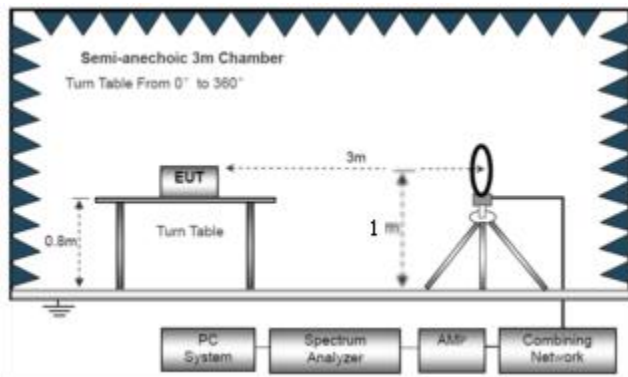

The test setup for emission measurement from 30 MHz to 1 GHz.

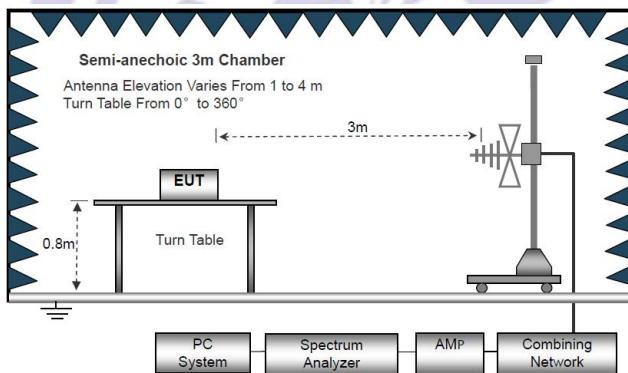

The test setup for emission measurement above 1 GHz.

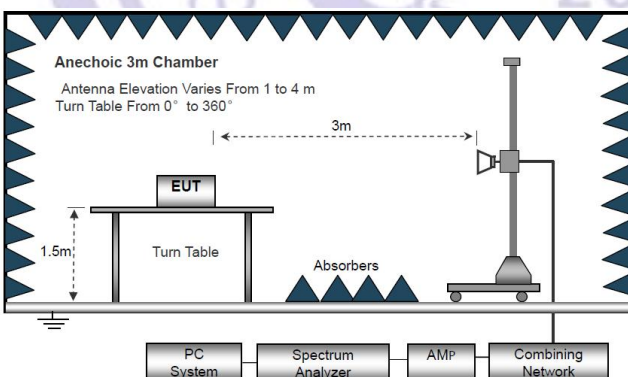

**7.3 Spectrum Analyzer Setup**

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

## 7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
  - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
  - 2) Change the antenna polarization and repeat 1) with vertical polarization.
  - 3) Make a hardcopy of the spectrum.
  - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
  - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
  - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
  - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
  - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

## 7.5 Summary of Test Results

### Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{Specific distance} / \text{test distance})$  (dB);  
Limit line = Specific limits (dBuV) + distance extrapolation factor.

### Test Frequency: 30MHz ~ 1GHz

Please refer to the following test plots, High Channel (2480MHz) Worst case  $\pi/4$ DQPSK for record:

Model:	CR4.5BT
--------	---------

Test plot for Horizontal

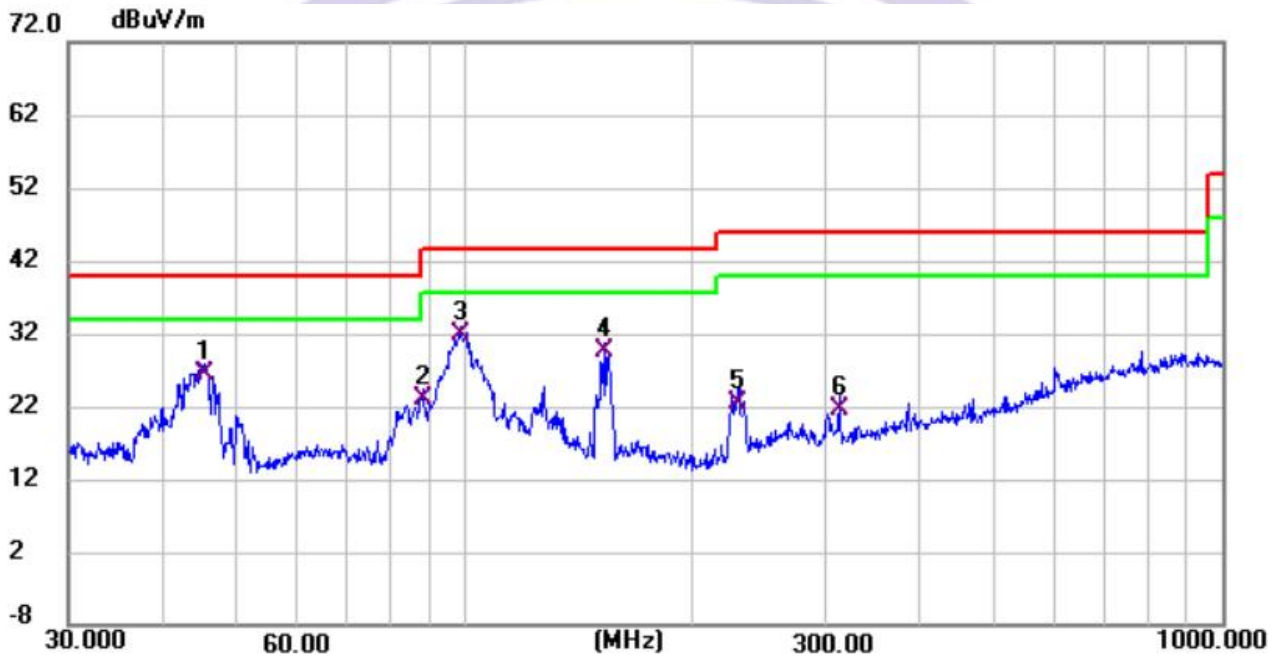


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	45.375	16.99	9.36	26.35	40.00	-13.65	QP
2	88.033	13.32	9.69	23.01	43.50	-20.49	QP
3 *	98.833	21.14	10.60	31.74	43.50	-11.76	QP
4	152.664	18.12	11.56	29.68	43.50	-13.82	QP
5	229.293	10.54	11.92	22.46	46.00	-23.54	QP
6	312.179	7.45	14.19	21.64	46.00	-24.36	QP

Remark: Emission Level = Reading + Factor



Model:	CR4.5BT
--------	---------

Test plot for Vertical

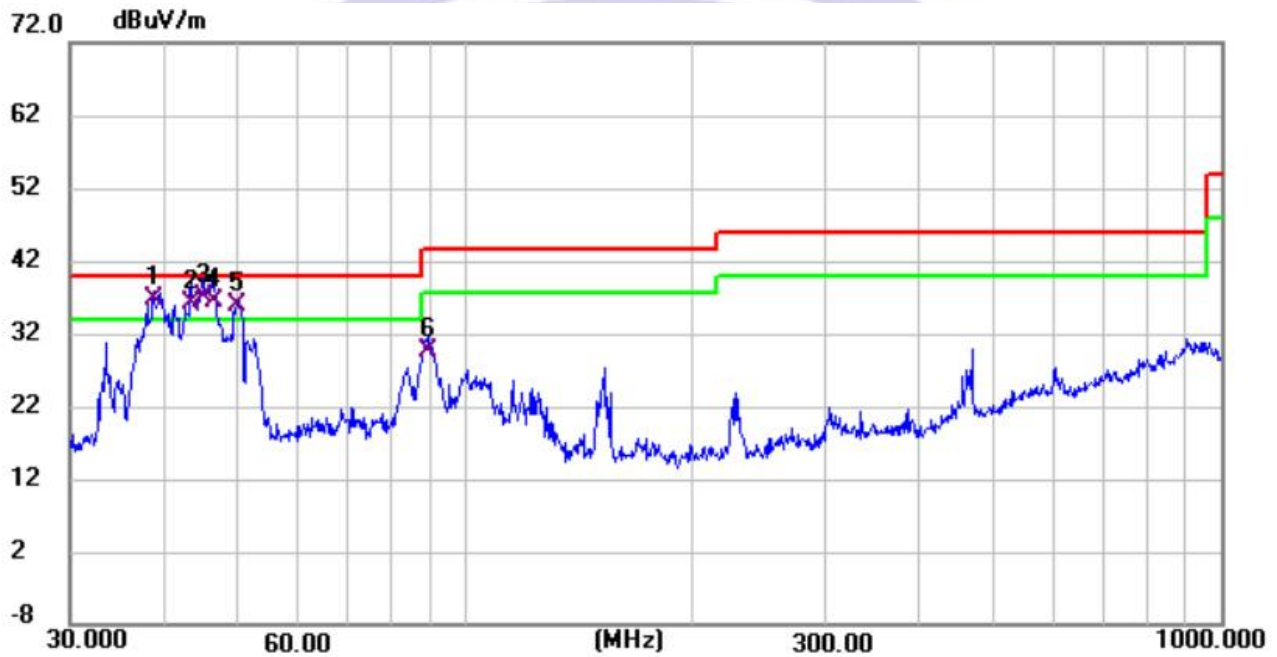

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	38.752	25.29	11.30	36.59	40.00	-3.41	QP
2 !	43.353	25.34	10.67	36.01	40.00	-3.99	QP
3 *	45.058	26.33	10.70	37.03	40.00	-2.97	QP
4 !	46.558	24.59	11.93	36.52	40.00	-3.48	QP
5 !	50.057	21.20	14.76	35.96	40.00	-4.04	QP
6	89.590	17.04	12.61	29.65	43.50	-13.85	QP

Remark: Emission Level = Reading + Factor

Model:	CR3.5BT
--------	---------

Test plot for Horizontal




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.600	16.39	9.24	25.63	40.00	-14.37	QP
2	43.202	15.36	9.27	24.63	40.00	-15.37	QP
3	98.832	12.94	10.60	23.54	43.50	-19.96	QP
4	101.289	14.06	10.79	24.85	43.50	-18.65	QP
5	106.385	12.76	10.93	23.69	43.50	-19.81	QP
6 *	150.011	21.02	11.52	32.54	43.50	-10.96	QP

Remark: Emission Level = Reading + Factor

Model:	CR3.5BT
--------	---------

Test plot for Vertical

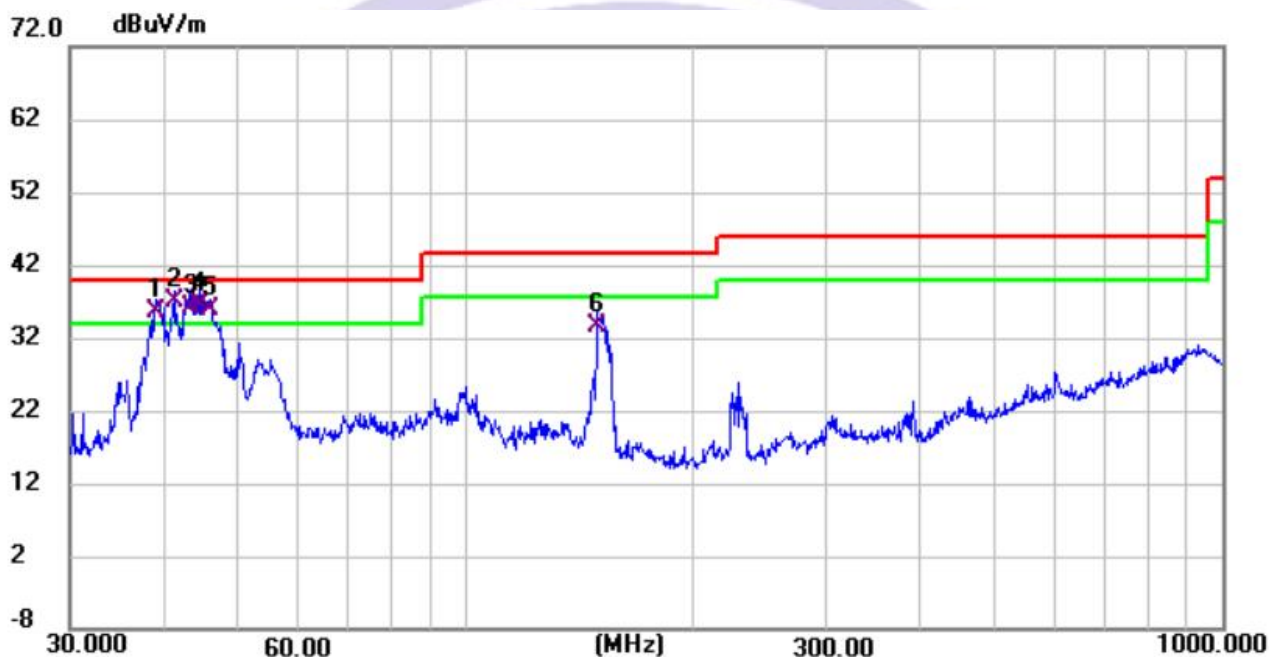

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	39.024	24.51	11.18	35.69	40.00	-4.31	QP
2 *	41.276	26.33	10.70	37.03	40.00	-2.97	QP
3 !	43.353	25.54	10.67	36.21	40.00	-3.79	QP
4 !	44.587	25.89	10.65	36.54	40.00	-3.46	QP
5 !	46.016	24.48	11.48	35.96	40.00	-4.04	QP
6	149.486	22.30	11.35	33.65	43.50	-9.85	QP

Remark: Emission Level = Reading + Factor

### Test Frequency 1GHz-25GHz

Bluetooth (GFSK,  $\pi/4$ DQPSK, 8DPSK) mode have been tested, and the worst result( $\pi/4$ DQPSK) was report as below

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	50.28	34.12	5.03	32.39	53.58	74	-20.42	Pk
V	4804.00	40.21	34.12	5.03	32.39	43.51	54	-10.49	AV
V	7206.00	43.69	32.54	6.29	35.86	53.30	74	-20.70	Pk
V	7206.00	32.63	32.54	6.29	35.86	42.24	54	-11.76	AV
V	9608.00	39.91	32.98	7.55	38.4	52.88	74	-21.12	Pk
V	9608.00	30.58	32.98	7.55	38.4	43.55	54	-10.45	AV
V	12010.00	38.16	32.09	8.93	39	54.00	74	-20.00	Pk
V	12010.00	29.18	32.09	8.93	39	45.02	54	-8.98	AV
H	4804.00	50.31	34.12	5.03	32.39	53.61	74	-20.39	Pk
H	4804.00	41.14	34.12	5.03	32.39	44.44	54	-9.56	AV
H	7206.00	42.27	32.54	6.29	35.86	51.88	74	-22.12	Pk
H	7206.00	33.56	32.54	6.29	35.86	43.17	54	-10.83	AV
H	9608.00	40.59	32.98	7.55	38.4	53.56	74	-20.44	Pk
H	9608.00	31.36	32.98	7.55	38.4	44.33	54	-9.67	AV
H	12010.00	39.33	32.09	8.93	39	55.17	74	-18.83	Pk
H	12010.00	30.04	32.09	8.93	39	45.88	54	-8.12	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882	50.86	34.07	5.09	32.59	54.47	74	-19.53	Pk
V	4882	40.59	34.07	5.09	32.59	44.20	54	-9.80	AV
V	7323	41.38	32.63	6.34	35.96	51.05	74	-22.95	Pk
V	7323	32.40	32.63	6.34	35.96	42.07	54	-11.93	AV
V	9764	41.98	32.92	7.59	38.4	55.05	74	-18.95	Pk
V	9764	33.45	32.92	7.59	38.4	46.52	54	-7.48	AV
V	12205	39.38	31.96	8.88	39.04	55.34	74	-18.66	Pk
V	12205	28.95	31.96	8.88	39.04	44.91	54	-9.09	AV
H	4882	49.86	34.07	5.09	32.59	53.47	74	-20.53	Pk
H	4882	41.02	34.07	5.09	32.59	44.63	54	-9.37	AV
H	7323	41.41	32.63	6.34	35.96	51.08	74	-22.92	Pk
H	7323	33.18	32.63	6.34	35.96	42.85	54	-11.15	AV
H	9764	41.68	32.92	7.59	38.4	54.75	74	-19.25	Pk
H	9764	31.91	32.92	7.59	38.4	44.98	54	-9.02	AV
H	12205	38.84	31.96	8.88	39.04	54.80	74	-19.20	Pk
H	12205	30.29	31.96	8.88	39.04	46.25	54	-7.75	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960	50.32	34.02	5.15	32.8	54.25	74	-19.75	Pk
V	4960	40.65	34.02	5.15	32.8	44.58	54	-9.42	AV
V	7440	42.37	32.71	6.4	36.05	52.11	74	-21.89	Pk
V	7440	32.11	32.71	6.4	36.05	41.85	54	-12.15	AV
V	9920	41.80	32.86	7.62	38.4	54.96	74	-19.04	Pk
V	9920	31.45	32.86	7.62	38.4	44.61	54	-9.39	AV
V	12400	39.31	31.82	8.84	39.08	55.41	74	-18.59	Pk
V	12400	29.40	31.82	8.84	39.08	45.50	54	-8.50	AV
H	4960	50.05	34.02	5.15	32.8	53.98	74	-20.02	Pk
H	4960	41.25	34.02	5.15	32.8	45.18	54	-8.82	AV
H	7440	44.31	32.71	6.4	36.05	54.05	74	-19.95	Pk
H	7440	34.53	32.71	6.4	36.05	44.27	54	-9.73	AV
H	9920	41.91	32.86	7.62	38.4	55.07	74	-18.93	Pk
H	9920	31.06	32.86	7.62	38.4	44.22	54	-9.78	AV
H	12400	40.08	31.82	8.84	39.08	56.18	74	-17.82	Pk
H	12400	28.64	31.82	8.84	39.08	44.74	54	-9.26	AV

Note: 1. The testing has been conformed to  $10 \times 2480\text{MHz} = 24800\text{MHz}$ .

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin = Emission Level - Limit

## Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (GFSK,  $\pi/4$ DQPSK, 8DPSK) mode have been tested, and the worst result ( $\pi/4$ DQPSK) was report as below

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Detector Type	Result
$\pi/4$ DQPSK	Low Channel: 2402MHz									
	H	2390.00	56.00	35.17	3.48	27.49	51.80	74.00	PK	PASS
	H	2390.00	45.52	35.17	3.48	27.49	41.32	54.00	AV	PASS
	H	2400.00	55.72	35.16	3.49	27.52	51.57	74.00	PK	PASS
	H	2400.00	45.57	35.16	3.49	27.52	41.42	54.00	AV	PASS
	V	2390.00	55.49	35.17	3.48	27.49	51.29	74.00	PK	PASS
	V	2390.00	47.55	35.17	3.48	27.49	43.35	54.00	AV	PASS
	V	2400.00	57.47	35.16	3.49	27.52	53.32	74.00	PK	PASS
	V	2400.00	47.05	35.16	3.49	27.52	42.90	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	55.47	35.11	3.56	27.75	51.67	74.00	PK	PASS
	H	2483.50	45.89	35.11	3.56	27.75	42.09	54.00	AV	PASS
	H	2500.00	55.98	35.1	3.57	27.8	52.25	74.00	PK	PASS
	H	2500.00	47.92	35.1	3.57	27.8	44.19	54.00	AV	PASS
	V	2483.50	56.58	35.11	3.56	27.75	52.78	74.00	PK	PASS
	V	2483.50	57.15	35.11	3.56	27.75	53.35	54.00	AV	PASS
V	2500.00	56.40	35.1	3.57	27.8	52.67	74.00	PK	PASS	
V	2500.00	46.16	35.1	3.57	27.8	42.43	54.00	AV	PASS	

**Remark:**


1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

## 8 Maximum Peak Output Power Test

### 8.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(1) & RSS-247.5.4(4)
Test Limit	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 8.2 Test Setup



### 8.3 Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
  - RBW > the 20 dB bandwidth of the emission being measured
  - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold


### 8.4 Test Data




Modulation	Packet Type	Channel	Peak Output Power (dBm)	Peak Output Power (mW)	Max. Avg. Power (dBm)	Limit (dBm)	Result
GFSK	DH1	0	9.118	8.162	None	30	PASS
		39	9.126	8.177	None		PASS
		78	9.240	8.395	None		PASS
$\pi/4$ DQPSK	2-DH1	0	9.124	8.173	None	20.97	PASS
		39	9.016	7.973	None		PASS
		78	9.251	8.416	None		PASS
8DPSK	3-DH1	0	9.203	8.323	None		PASS
		39	9.106	8.140	None		PASS
		78	9.198	8.314	None		PASS


Modulation	Packet Type	Channel	Peak Output Power (dBm)	Peak Power Limit (dBm)	ISED EIRP (dBm)	ISED EIRP Limit (dBm)	Max. Avg. Power (dBm)	Result
GFSK	DH1	0	9.118	30	9.228	36.02	None	PASS
		39	9.126	30	9.236	36.02	None	PASS
		78	9.240	30	9.350	36.02	None	PASS
$\pi/4$ DQPSK	2-DH1	0	9.124	20.97	9.234	36.02	None	PASS
		39	9.016	20.97	9.126	36.02	None	PASS
		78	9.251	20.97	9.361	36.02	None	PASS
8DPSK	3-DH1	0	9.203	20.97	9.313	36.02	None	PASS
		39	9.106	20.97	9.216	36.02	None	PASS
		78	9.198	20.97	9.308	36.02	None	PASS

## Test plots

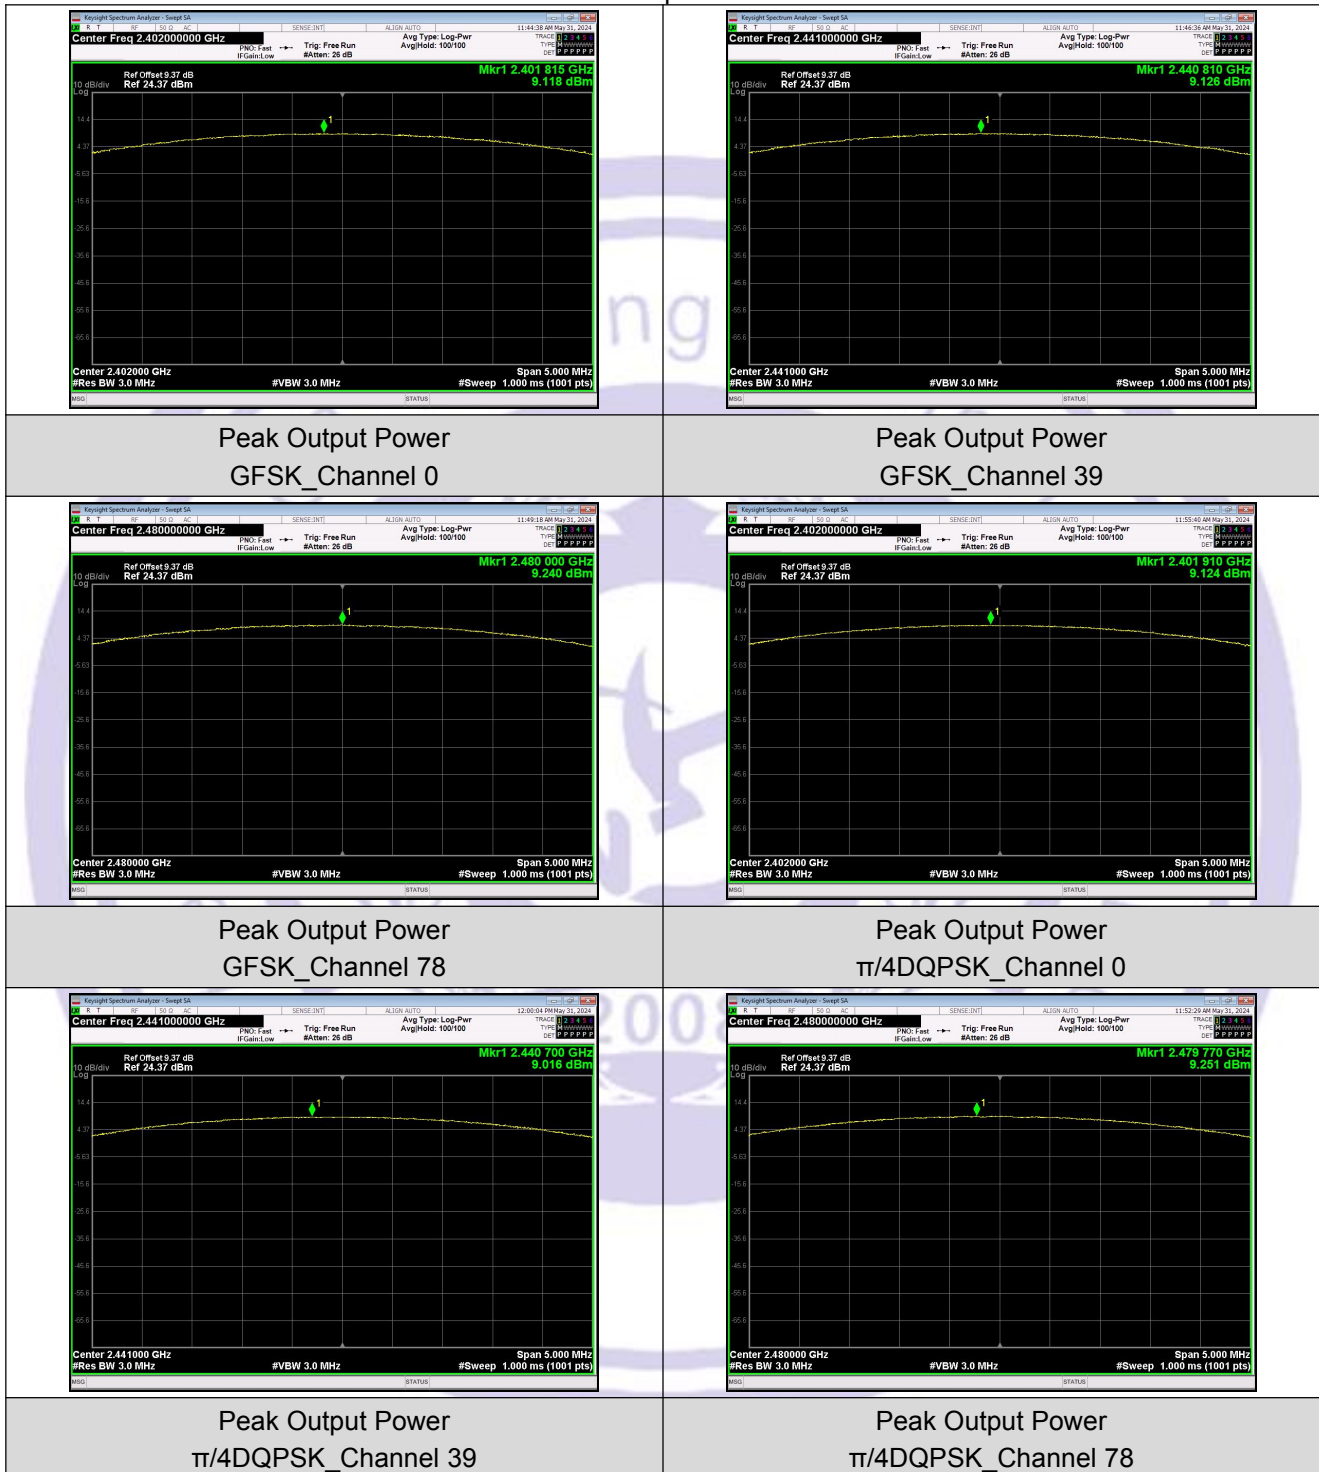


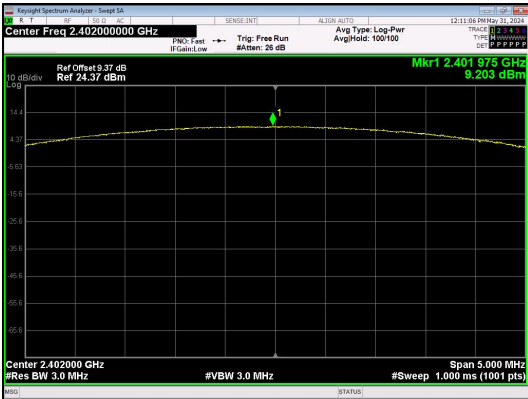

Peak Output Power  
8DPSK\_Channel 0

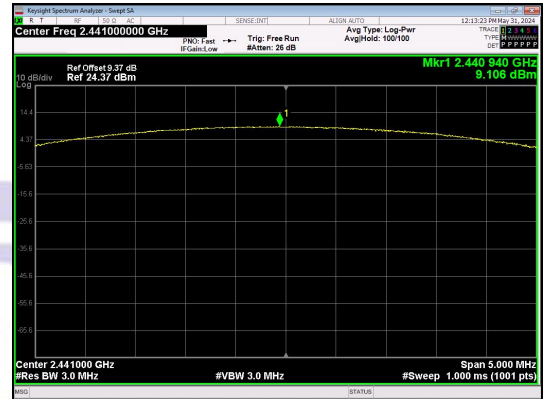

Peak Output Power  
8DPSK\_Channel 39

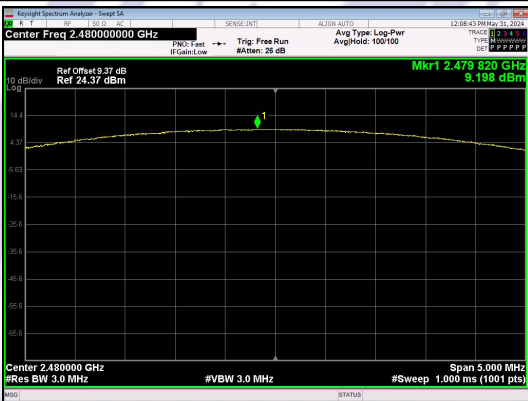


Peak Output Power  
8DPSK\_Channel 78

## 9 20DB Occupy Bandwidth & 99% OCB Test

### 9.1 Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1) & RSS-247.5.1(2) RSS-Gen 6.7
---------------	---

### 9.2 Test Setup



### 9.3 Test Procedure


Using the following spectrum analyzer settings:


1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 91 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 9.4 Test Data


Mode	Test channel	20dB Emission Bandwidth (MHz)	99% Bandwidth (MHz)	Result
GFSK	Lowest	0.9710	0.88123	Pass
	Middle	0.9642	0.87983	
	Highest	0.9337	0.87885	
$\pi$ /4DQPSK	Lowest	1.247	1.1593	Pass
	Middle	1.252	1.1738	
	Highest	1.254	1.1758	
8-DPSK	Lowest	1.227	1.1503	Pass
	Middle	1.227	1.1609	
	Highest	1.230	1.1499	

### Test plots 20dB Emission Bandwidth

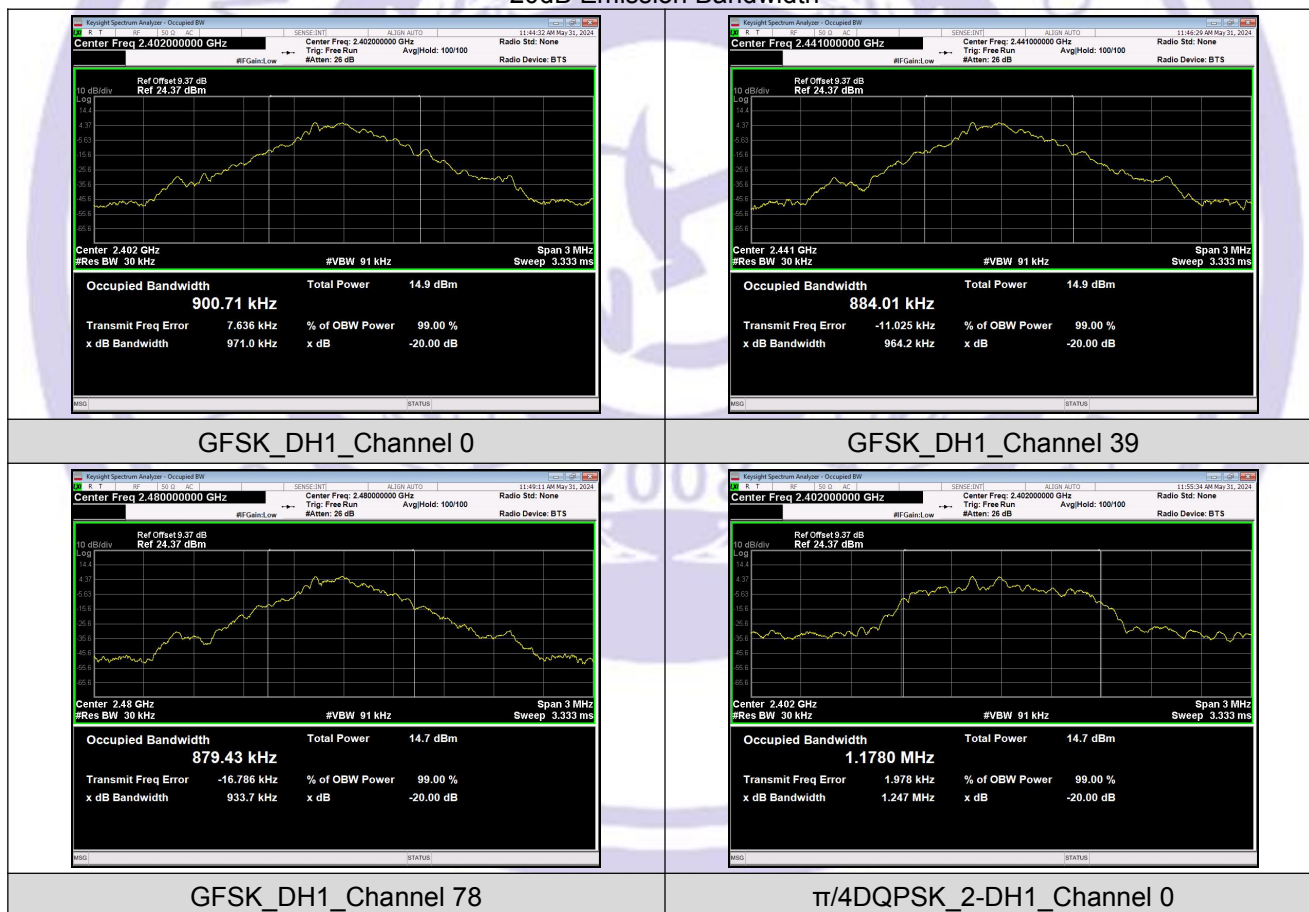


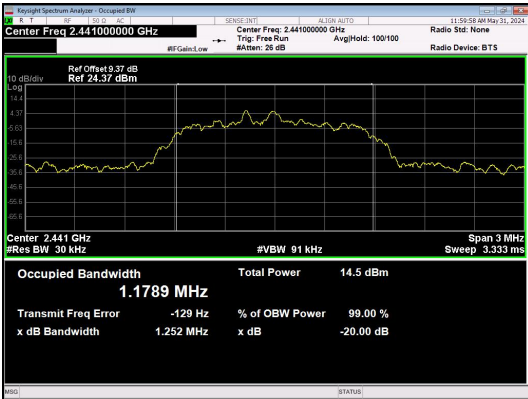


$\pi/4$ DQPSK\_2-DH1\_Channel 39

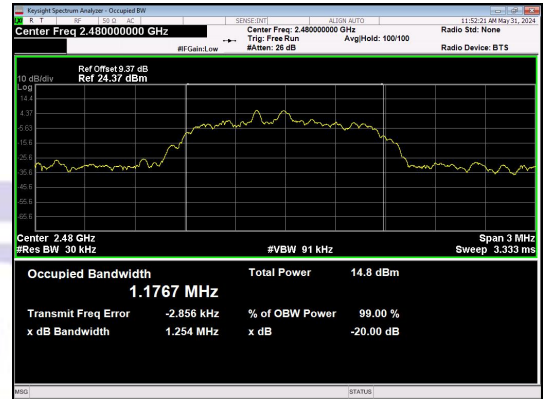


$\pi/4$ DQPSK\_2-DH1\_Channel 78

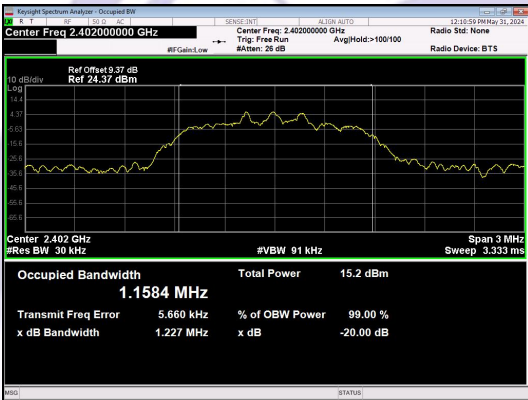

8DPSK\_3-DH1\_Channel 0

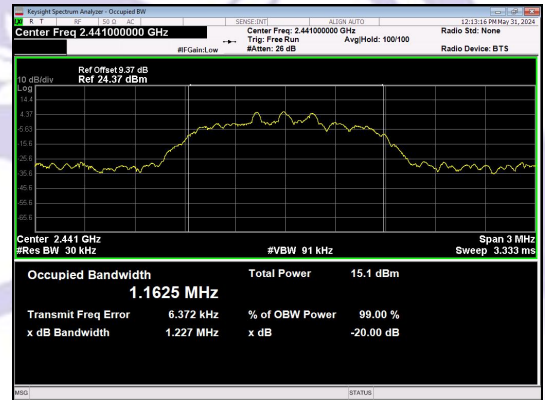


8DPSK\_3-DH1\_Channel 39

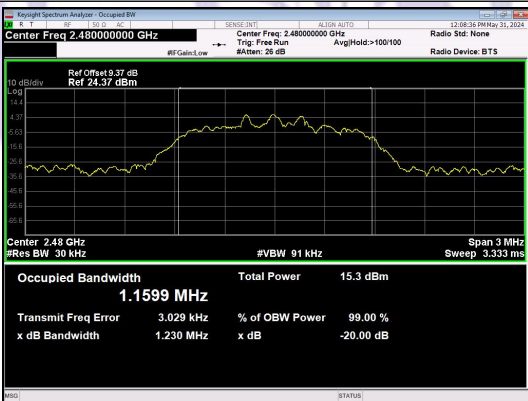

8DPSK\_3-DH1\_Channel 78

99% Bandwidth

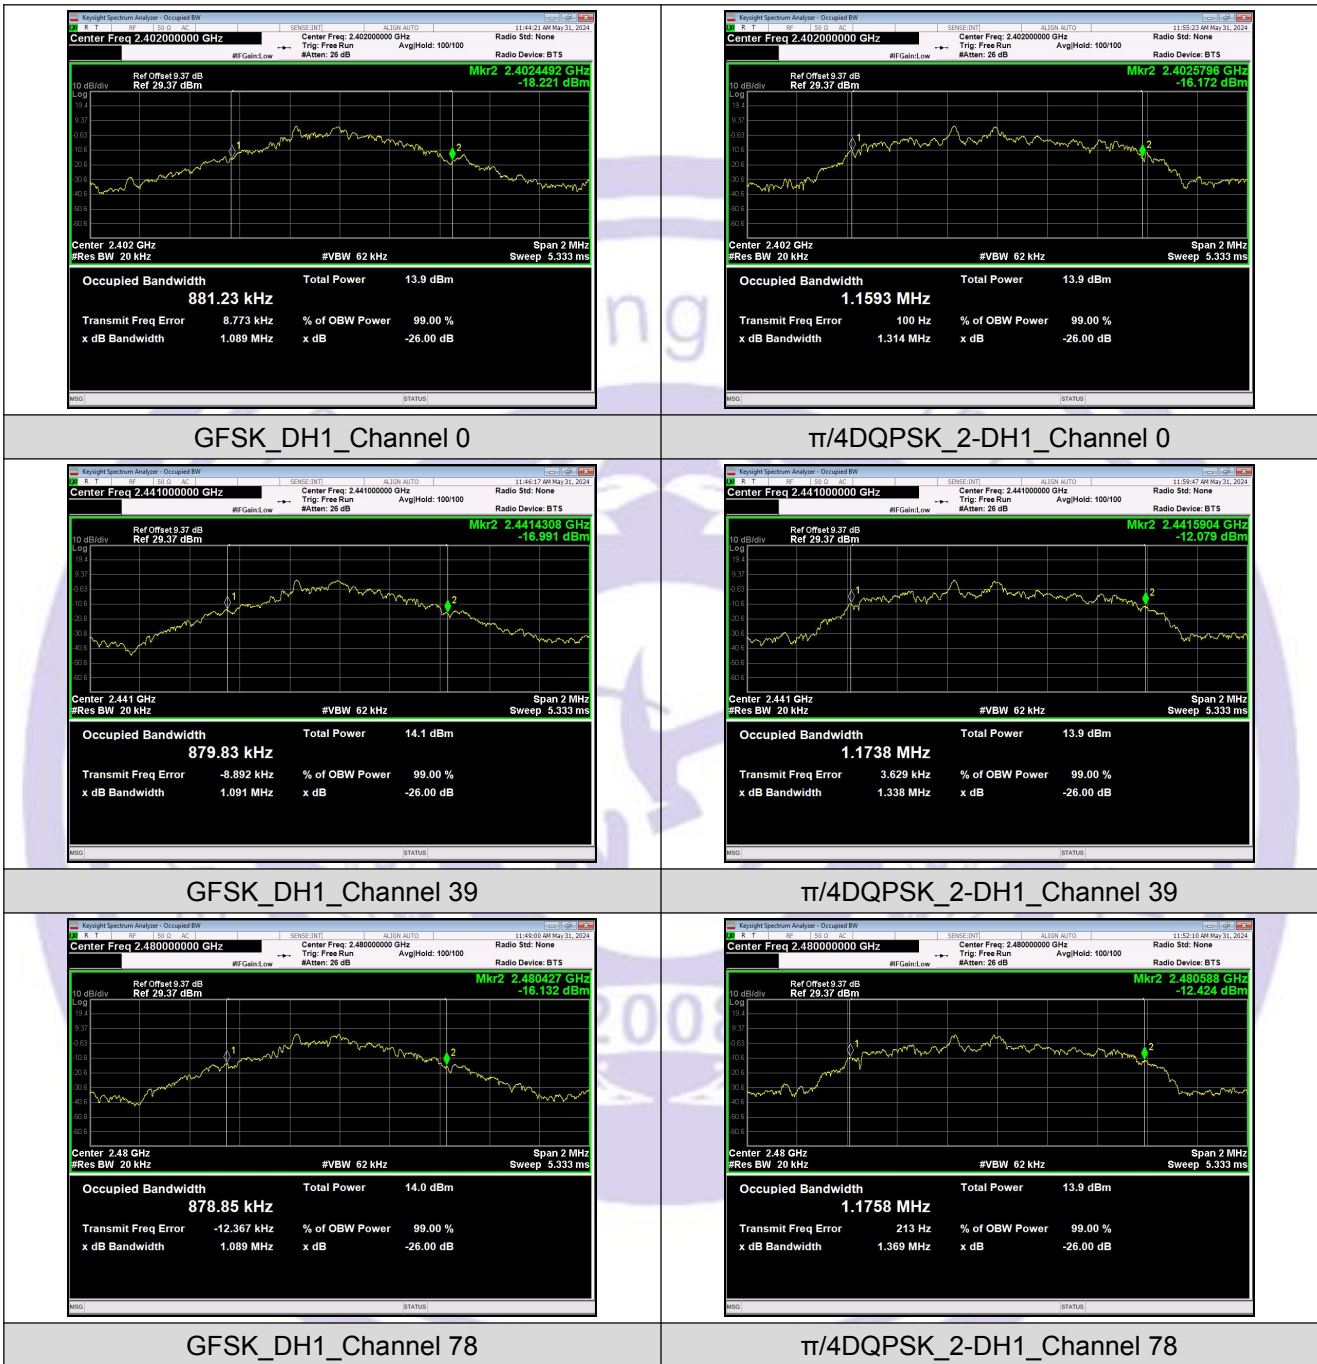


## 10 Carrier Frequency Separation Test

### 10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1) & RSS-247.5.1(4)
Test Limit	GFSK: 20dB bandwidth $\pi$ /4DQPSK & 8DPSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

### 10.2 Test Setup



### 10.3 Test Procedure


The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 100 kHz.
3. Set the VBW = 300 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 10.4 Test Data




Modulation	Separation (MHz)	Limit(MHz)	Result
GFSK	0.998	0.971	PASS
$\pi$ /4DQPSK	0.999	0.836	PASS
8-DPSK	0.996	0.820	PASS

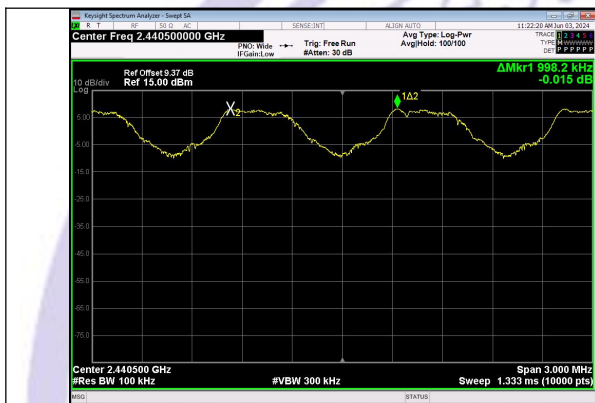

GFSK



$\pi$ /4DQPSK

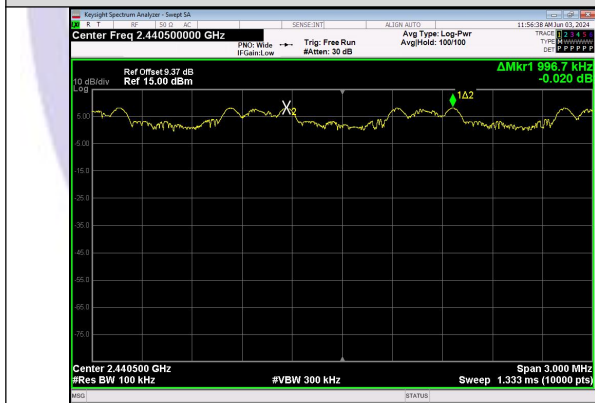

8DPSK


Void

## 11 Number of Hopping Channel Test

### 11.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1) & RSS-247.5.1(4)
Test Limit	≥15 channels

### 11.2 Test Setup




### 11.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:


1. Span= the frequency band of operation
2. Set the RBW = 100kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

## 11.4 Test Data


Mode	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
			ANT1	Limit	
GFSK	HOPP	DH1	79	>=15	Pass
Pi/4DQPSK	HOPP	2DH1	79	>=15	Pass
8DPSK	HOPP	3DH1	79	>=15	Pass

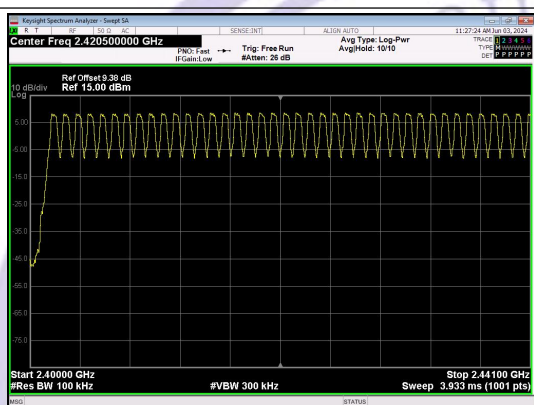


Low End Spectrum Channel Hopping Plot  
GFSK

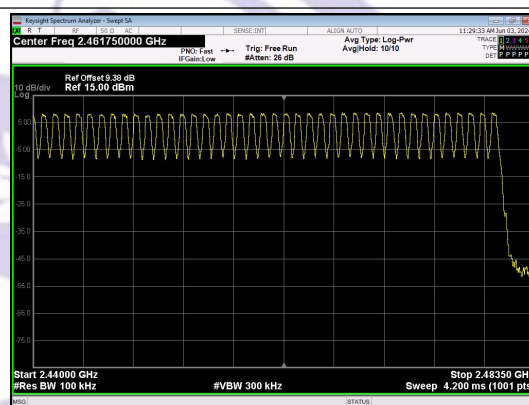


High End Spectrum Channel Hopping Plot  
GFSK

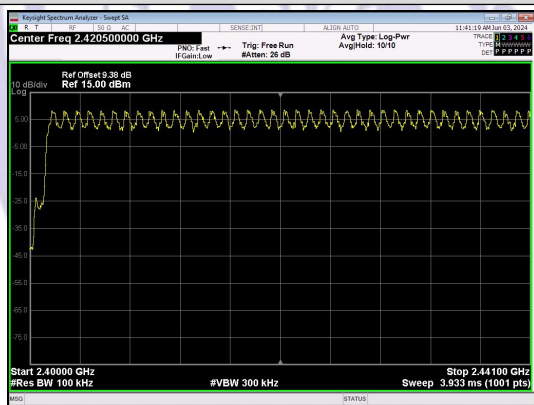

Low End Spectrum Channel Hopping Plot  
 $\pi/4$ DQPSK

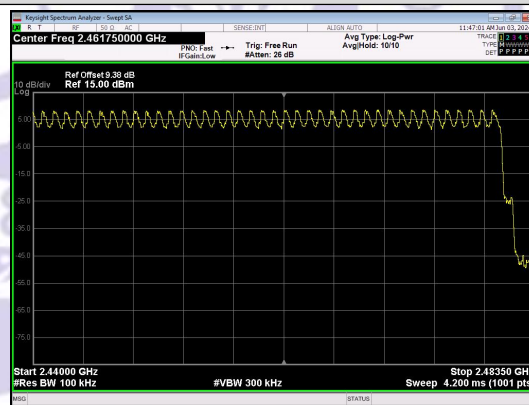

High End Spectrum Channel Hopping Plot  
 $\pi/4$ DQPSK

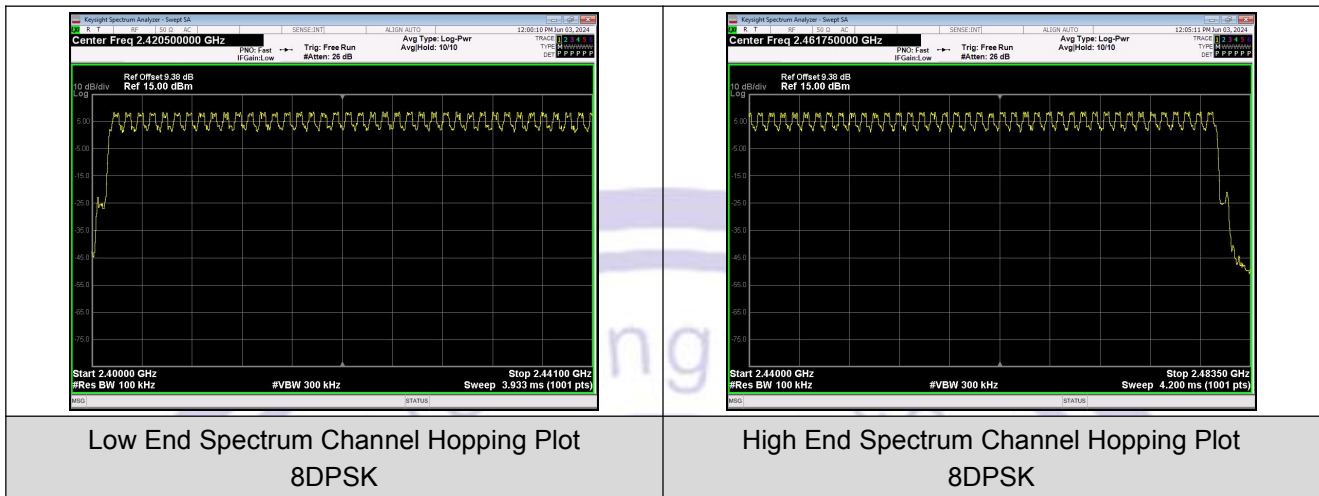


## 12 Dwell Time Test

### 12.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1) & RSS-247.5.1(4)
Test Limit	0.4 sec

### 12.2 Test Setup



### 12.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

## 12.4 Test Data

Modulation	Packet	Channel	Pulse Width (ms)	Number of Pulses in 31.6 seconds	Dwell Time (ms)	Limit (ms)	Result
GFSK	DH5	CH0 (2402MHz)	2.864	107	306.45	< 400	PASS
	DH5	CH39 (2441MHz)	2.864	106	303.58		PASS
	DH5	CH78 (2480MHz)	2.880	107	308.16		PASS
$\pi/4$ DQPSK	2-DH5	CH0 (2402MHz)	2.880	107	308.16		PASS
	2-DH5	CH39 (2441MHz)	2.880	106	305.28		PASS
	2-DH5	CH78 (2480MHz)	2.880	107	308.16		PASS
8DPSK	3-DH5	CH0 (2402MHz)	2.880	106	305.28		PASS
	3-DH5	CH39 (2441MHz)	2.880	107	308.16		PASS
	3-DH5	CH78 (2480MHz)	2.880	106	305.28		PASS

### Test Plots

