

FCC AND ISED CERTIFICATION TEST REPORT

FOR

Applicant	:	LOUD Audio, LLC
Address	:	19820 North Creek Parkway, Suite #201, Bothell, WA 98011-8227, USA
Equipment under Test	:	True Wireless Dual-Driver Earbuds with Active Noise Cancelling
Model No.	:	MP-20TWS
Trade Mark	:	
FCC ID	:	2AD4XMP20TWS
IC	:	12714A-MP20TWS
Manufacturer	:	LOUD Audio, LLC
Address	:	19820 North Creek Parkway, Suite #201, Bothell, WA 98011-8227, USA

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results	6
2.	General Test Information	7
2.1.	Description of EUT.....	7
2.2.	Accessories of EUT	8
2.3.	Assistant equipment used for test.....	8
2.4.	Block diagram of EUT configuration for test	8
2.5.	Deviations of test standard	8
2.6.	Test environment conditions	9
2.7.	Test laboratory.....	9
2.8.	Measurement uncertainty	10
3.	Equipment Used During Test.....	11
4.	Maximum Peak Output Power	12
4.1.	Block diagram of test setup	12
4.2.	Limits	12
4.3.	Test procedure.....	12
4.4.	Test result.....	13
4.5.	Original test data.....	15
5.	20 dB Bandwidth and 99% Bandwidth.....	21
5.1.	Block diagram of test setup	21
5.2.	Limits	21
5.3.	Test procedure.....	21
5.4.	Test result.....	21
5.5.	Original test data.....	22
6.	Carrier Frequency Separation.....	34
6.1.	Block diagram of test setup	34
6.2.	Limits	34
6.3.	Test procedure.....	34
6.4.	Test result.....	34
6.5.	Original test data.....	35
7.	Number of Hopping Channel	37
7.1.	Block diagram of test setup	37
7.2.	Limits	37
7.3.	Test procedure.....	37
7.4.	Test result.....	37
7.5.	Original test data.....	38
8.	Dwell Time	40

8.1.	Block diagram of test setup	40
8.2.	Limits	40
8.3.	Test procedure.....	40
8.4.	Test result.....	40
8.5.	Original test data.....	42
9.	Band Edge Compliance (Conducted Method).....	54
9.1.	Block diagram of test setup	54
9.2.	Limit.....	54
9.3.	Test procedure.....	54
9.4.	Test result.....	54
9.5.	Original test data.....	55
10.	Radiated Emission.....	63
10.1.	Block diagram of test setup	63
10.2.	Limit.....	64
10.3.	Test Procedure	66
10.4.	Test result.....	67
11.	RF Conducted Spurious Emissions	82
11.1.	Block diagram of test setup	82
11.2.	Limits	82
11.3.	Test procedure.....	82
11.4.	Test result.....	83
11.5.	Original test data.....	84
12.	Band Edge Compliance (Radiated Method)	102
12.1.	Block diagram of test setup	102
12.2.	Limit.....	102
12.3.	Test Procedure	102
12.4.	Test result.....	102
13.	Power Line Conducted Emission	115
13.1.	Block diagram of test setup	115
13.2.	Power line conducted emission limits	115
13.3.	Test procedure.....	115
13.4.	Test result.....	116
14.	Antenna Requirements.....	119
14.1.	Limit.....	119
14.2.	Result	119

Test Report Declare

Applicant	:	LOUD Audio, LLC
Address	:	19820 North Creek Parkway, Suite #201, Bothell, WA 98011-8227, USA
Equipment under Test	:	True Wireless Dual-Driver Earbuds with Active Noise Cancelling
Model No.	:	MP-20TWS
Trade Mark	:	
Manufacturer	:	LOUD Audio, LLC
Address	:	19820 North Creek Parkway, Suite #201, Bothell, WA 98011-8227, USA

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test Procedure Used:

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.

Report No.:	DDT-R22060723-2E01		
Date of Receipt:	Jun. 21, 2022	Date of Test:	Jun. 21, 2022 ~ Jul. 04, 2022

Prepared By:

Bobo Chen

Bobo Chen/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Jul. 04, 2022	

1. Summary of Test Results

Description of Test Item	Standard	Verdict
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10:2013 RSS-247 Issue 2	Pass
20 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.215 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10:2013 RSS-Gen Issue 5	Pass
Antenna Requirement	FCC Part 15: 15.203 RSS-Gen Issue 5	Pass

2. General Test Information

2.1. Description of EUT

EUT* Name	: True Wireless Dual-Driver Earbuds with Active Noise Cancelling
Model Number	: MP-20TWS
EUT Function Description	: Please reference user manual of this device
Power Supply	: CHARGING CASE: DC 5V from Type-C port EARBUDS: DC 5V from external charging case CHARGING CASE: DC 3.7V polymer Li-ion built-in battery EARBUDS: DC 3.6V polymer Li-ion built-in battery
Radio Specification	: Bluetooth V5.2
Operation Frequency	: 2402MHz-2480MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK
Data Rate	: 1Mbps, 2Mbps, 3Mbps
Antenna Gain	: Left side: 2 dBi Right side: 2 dBi
Sample Type	: Series production
Sample Number	: S22060723-07 for conductive S22060723-08 for radiation

Note: EUT is the ab. of equipment under test.

Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478

23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		


2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Serial No.	Other
Type-C cable	N/A	N/A	N/A	Length: 0.50m, unshielded

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Adapter	SUMSUNG	EP-TA200	Input: 100-240~, 50/60Hz, 0.5A; Output: 9V/1.67A or 5V/2A	N/A

2.4. Block diagram of EUT configuration for test



Test software: Airoha.Tool.Kit.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 1 dB (According to the manufacturer's claims)

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK hopping on Tx mode	/	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	/	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	/	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	/	CH0	2402
	/	CH39	2441
	/	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	/	CH0	2402
	/	CH39	2441
	/	CH78	2480
8DPSK hopping off Tx mode	/	CH0	2402
	/	CH39	2441
	/	CH78	2480

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 22 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.72 dB (9 kHz-150 kHz) 3.32 dB (150 kHz - 30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☑RF Connected Test (Tonscend RF Measurement System 4#)					
Signal & Spectrum analyzer	R&S	FSV3044	101173	Apr. 13, 2022	1 Year
Wideband Radio Communication tester	R&S	CMW500	120259	May 18, 2022	1 Year
MXG Vector Signal Generator	Agilent	N5182B	MY59100192	May 18, 2022	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Oct. 15, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	2118060485	Oct. 18, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	May 26, 2022	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.6.88.0346	N/A	N/A
☑Radiation 3#chamber					
EMI Test Receiver	R&S	ESU	100472	May 18, 2022	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	May 18, 2022	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 19, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Aug. 07, 2021	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02468	Nov. 29, 2021	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 06, 2022	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Sep. 02, 2021	1 Year
Pre-amplifier	COM-POWER	PAM-840A	461369	Apr. 11, 2022	1 Year
Test software	Audix	E3	V 6.1.1.1	N/A	N/A
☑Power Line Conducted Emissions Test 1#					
Test Receiver	R&S	ESCI	100551	Sep. 02, 2021	1 Year
LISN 1	R&S	ENV216	101109	Sep. 07, 2021	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 07, 2021	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 02, 2021	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 02, 2021	1 Year
LISN 3	SCHWARZBECK	NSLK 8163	00017	Sep. 02, 2021	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. Maximum Peak Output Power

4.1. Block diagram of test setup

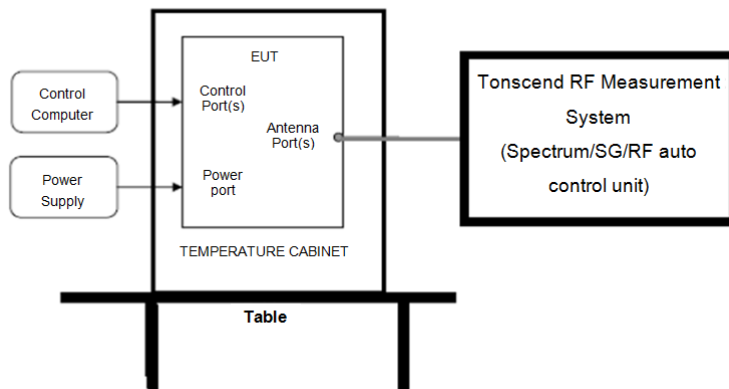

4.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

4.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Measure the maximum conducted output power of EUT by spectrum analyzer with PK detector and RBW=3 MHz (above 20 dB bandwidth of measured signal), VBW=10 MHz

Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.

4.4. Test result

Left side:

Mode	Antenna	Freq. (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Verdict
GFSK	ANT1	2402	5.82	21	Pass
	ANT1	2441	5.40	21	Pass
	ANT1	2480	6.13	21	Pass
$\pi/4$ -DQPSK	ANT1	2402	5.76	21	Pass
	ANT1	2441	5.38	21	Pass
	ANT1	2480	6.10	21	Pass
8DPSK	ANT1	2402	5.86	21	Pass
	ANT1	2441	5.42	21	Pass
	ANT1	2480	6.15	21	Pass

Mode	Antenna	Freq. (MHz)	EIRP (dBm)	Limit (dBm)	Verdict
GFSK	ANT1	2402	7.82	36	Pass
	ANT1	2441	7.40	36	Pass
	ANT1	2480	8.13	36	Pass
$\pi/4$ -DQPSK	ANT1	2402	7.76	36	Pass
	ANT1	2441	7.38	36	Pass
	ANT1	2480	8.10	36	Pass
8DPSK	ANT1	2402	7.86	36	Pass
	ANT1	2441	7.42	36	Pass
	ANT1	2480	8.15	36	Pass

Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)

Right side:


Mode	Antenna	Freq. (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Verdict
GFSK	ANT1	2402	5.22	21	Pass
	ANT1	2441	4.64	21	Pass
	ANT1	2480	5.26	21	Pass
$\pi/4$ -DQPSK	ANT1	2402	5.05	21	Pass
	ANT1	2441	4.52	21	Pass
	ANT1	2480	5.17	21	Pass
8DPSK	ANT1	2402	5.09	21	Pass
	ANT1	2441	4.63	21	Pass
	ANT1	2480	5.24	21	Pass


Mode	Antenna	Freq. (MHz)	EIRP (dBm)	Limit (dBm)	Verdict
GFSK	ANT1	2402	7.22	36	Pass
	ANT1	2441	6.64	36	Pass
	ANT1	2480	7.26	36	Pass
$\pi/4$ -DQPSK	ANT1	2402	7.05	36	Pass
	ANT1	2441	6.52	36	Pass
	ANT1	2480	7.17	36	Pass
8DPSK	ANT1	2402	7.09	36	Pass
	ANT1	2441	6.63	36	Pass
	ANT1	2480	7.24	36	Pass

Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)


4.5. Original test data

Left side:

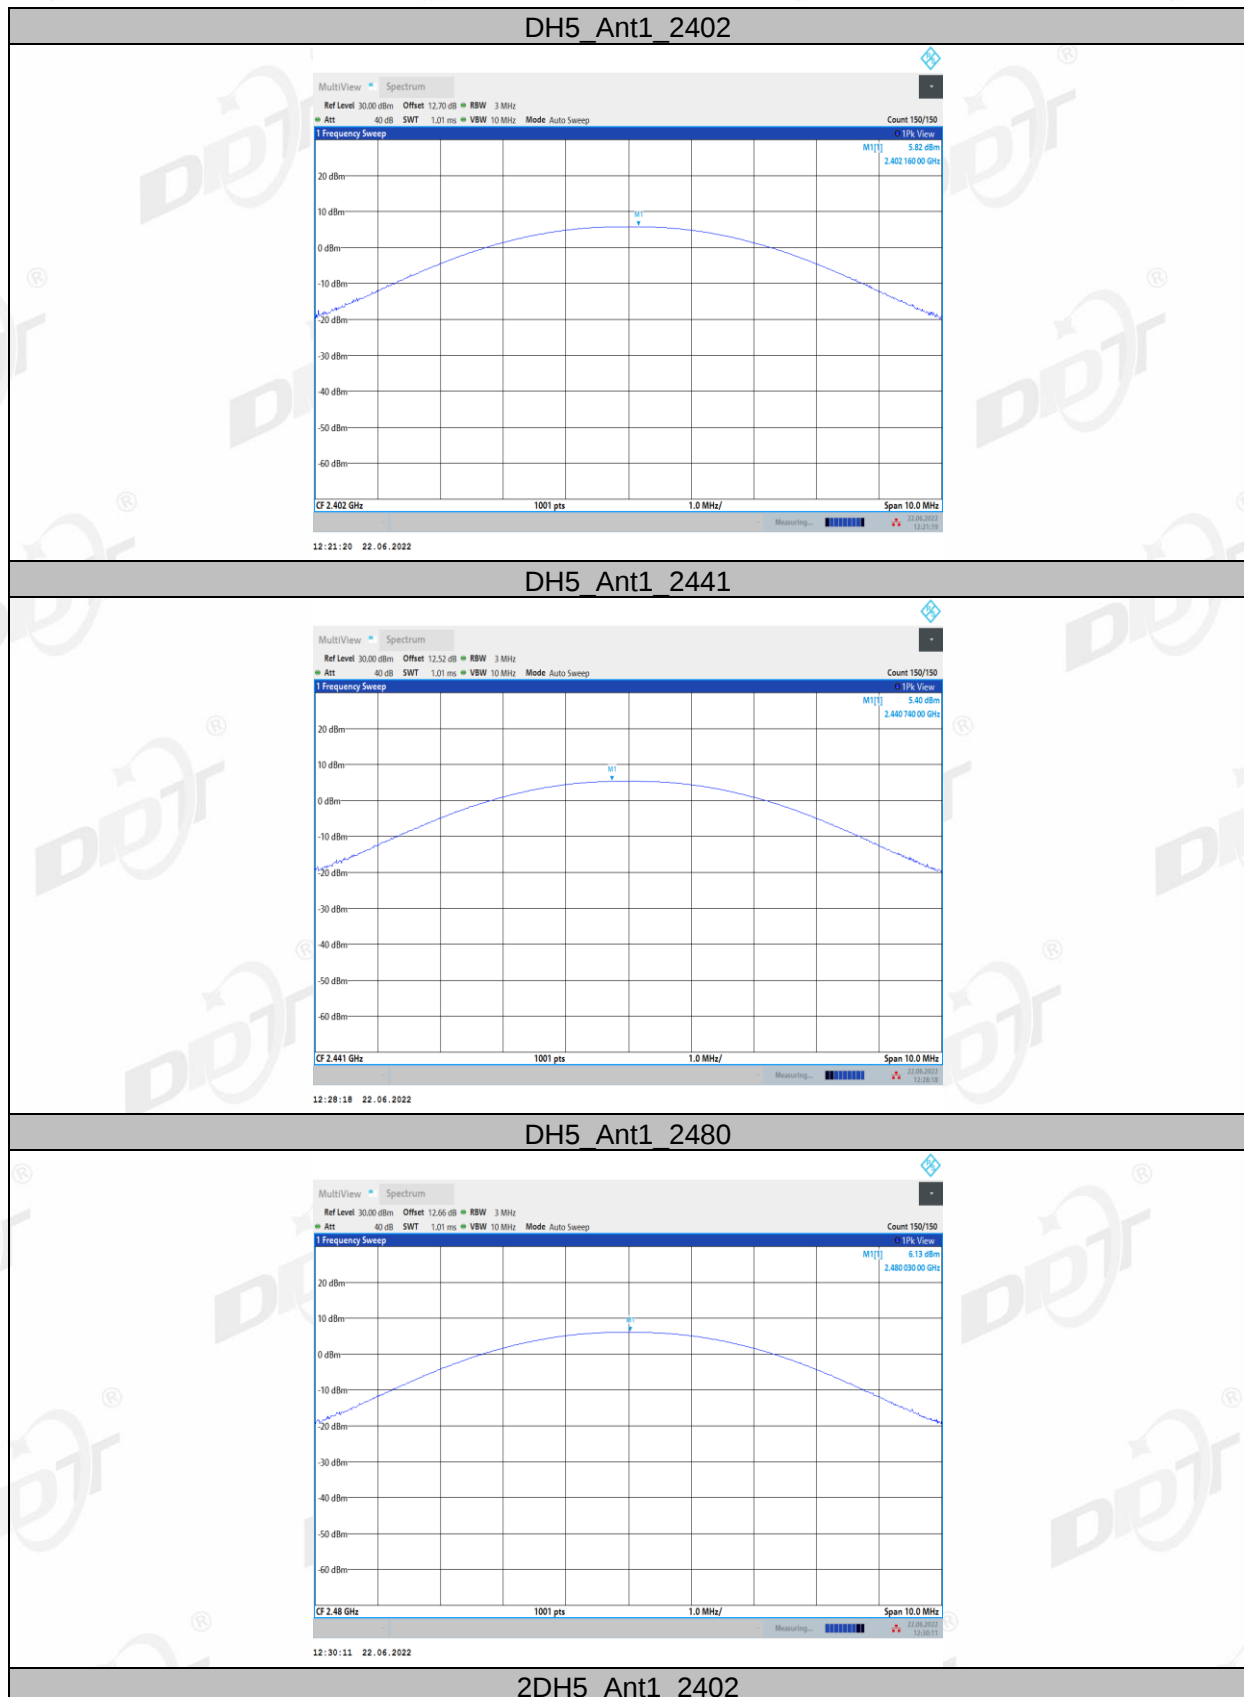


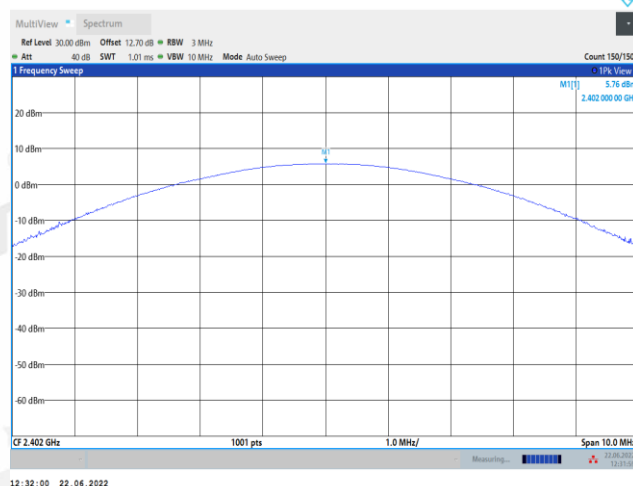


2DH5_Ant1_2441

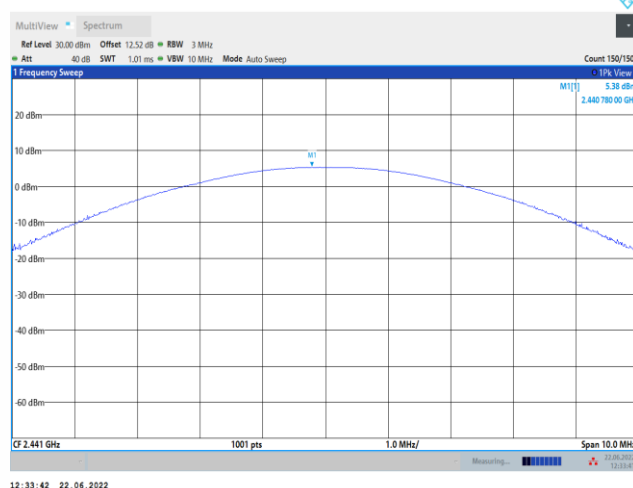


2DH5_Ant1_2480

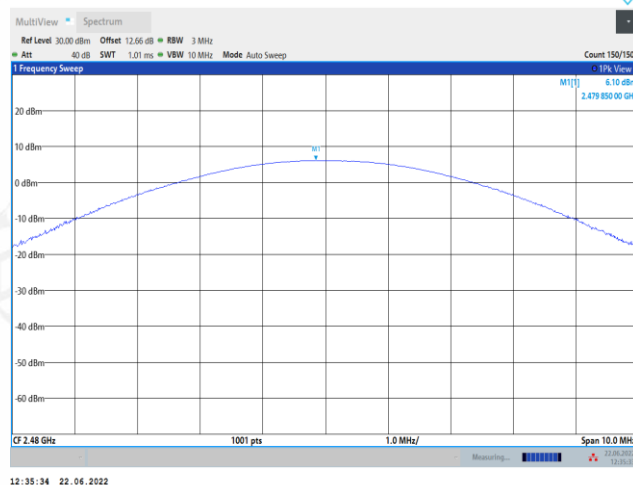


3DH5_Ant1_2402

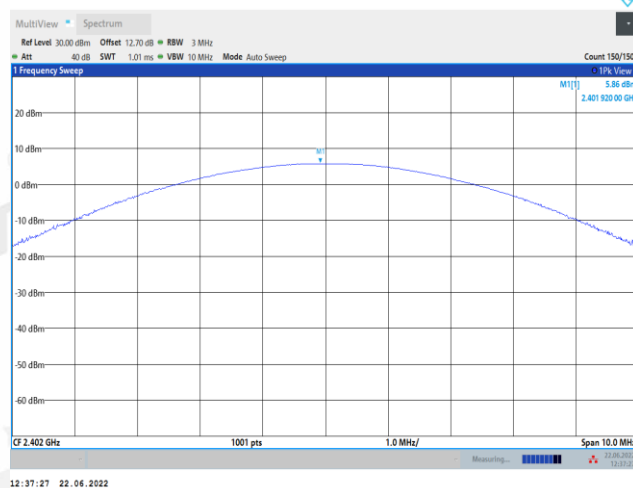

3DH5_Ant1_2441

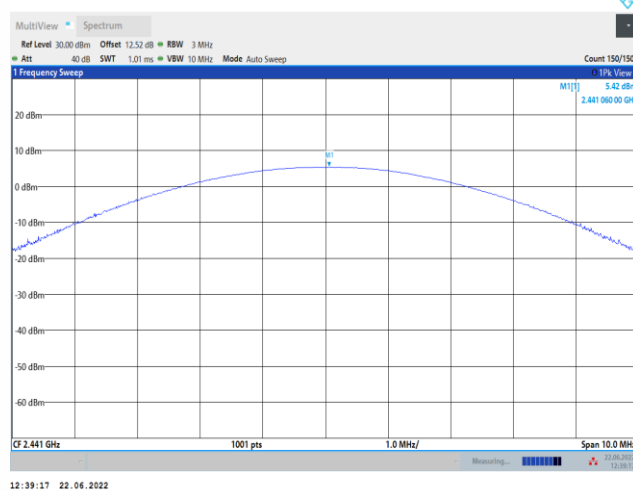


3DH5_Ant1_2480

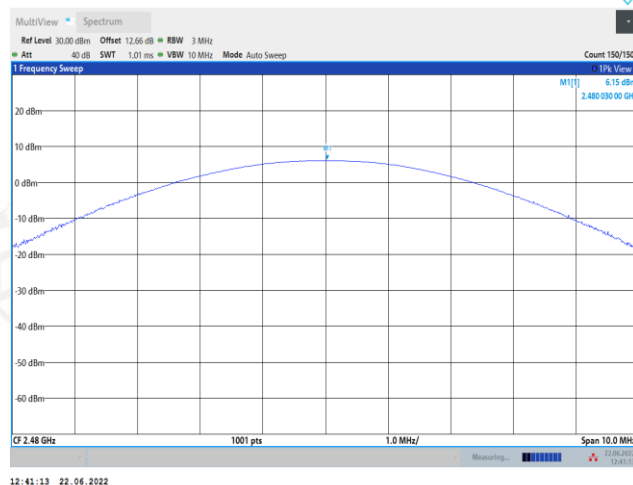


Right side:


DH5_Ant1_2402

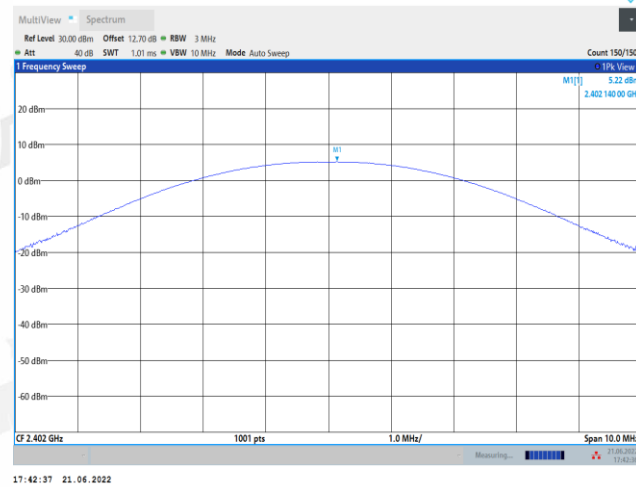


DH5_Ant1_2441

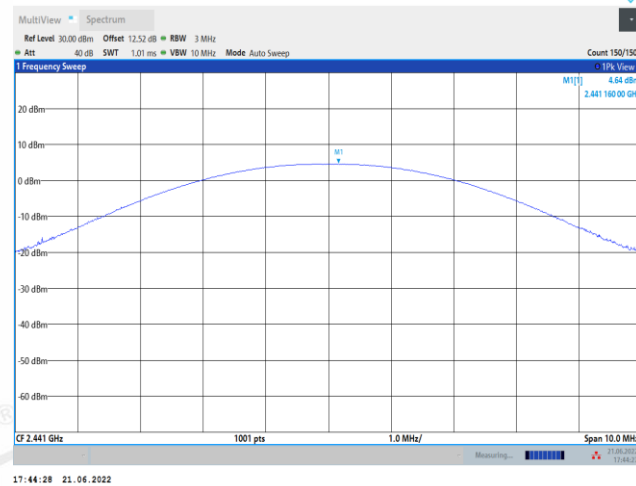


DH5_Ant1_2480

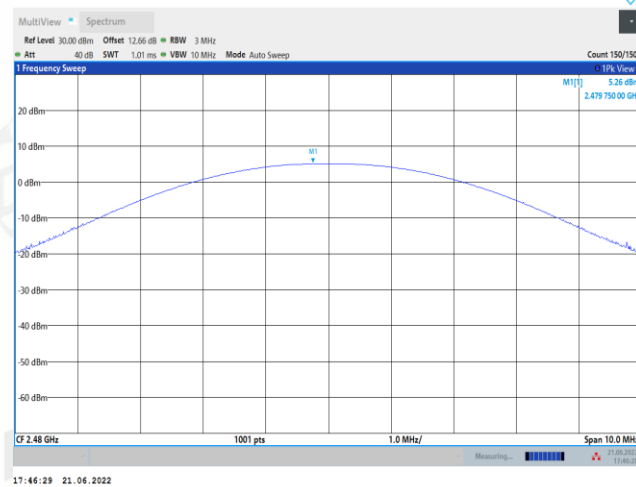


2DH5_Ant1_2402

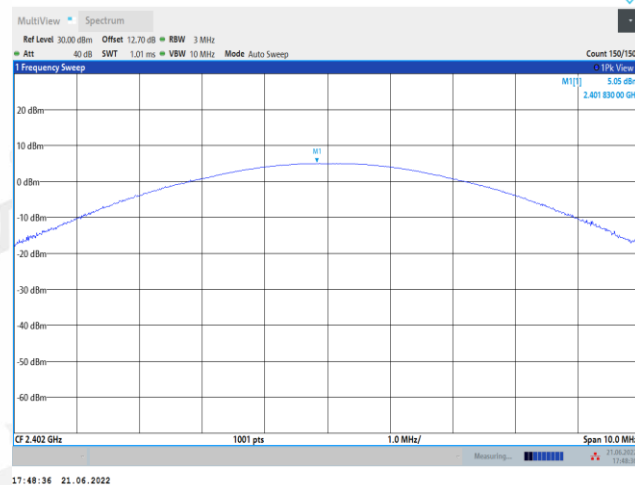


2DH5_Ant1_2441

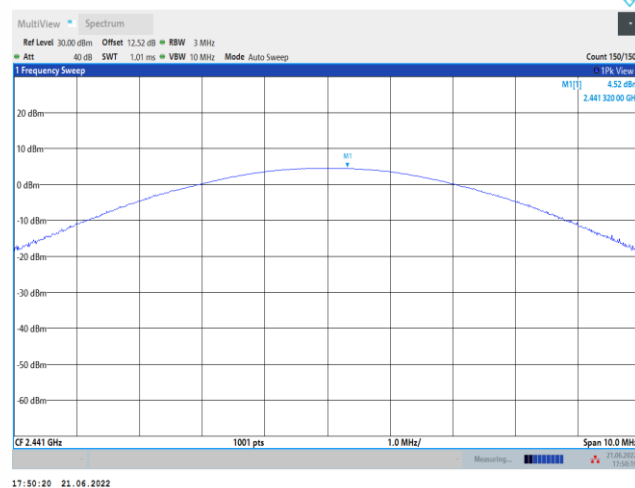


2DH5_Ant1_2480

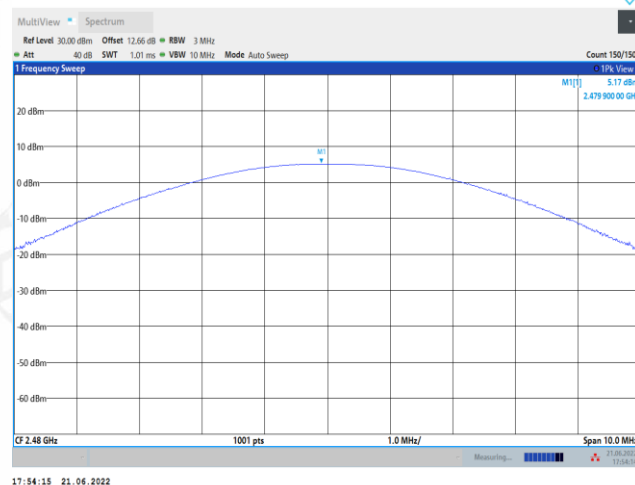


3DH5_Ant1_2402

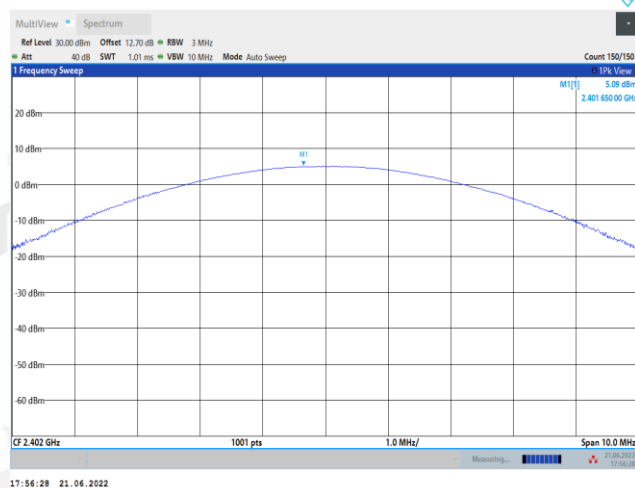

3DH5_Ant1_2441

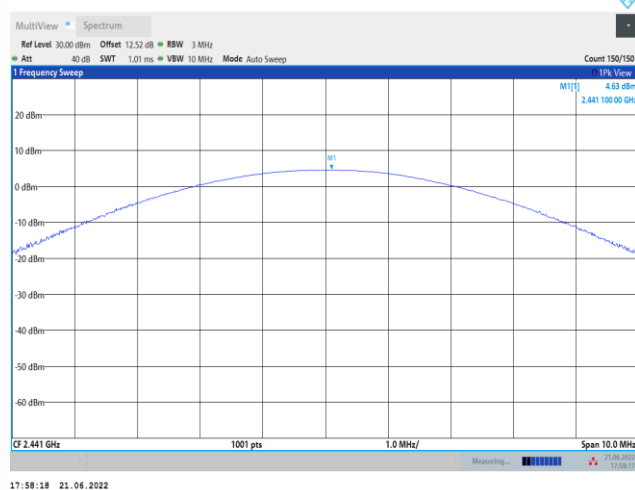

3DH5_Ant1_2480

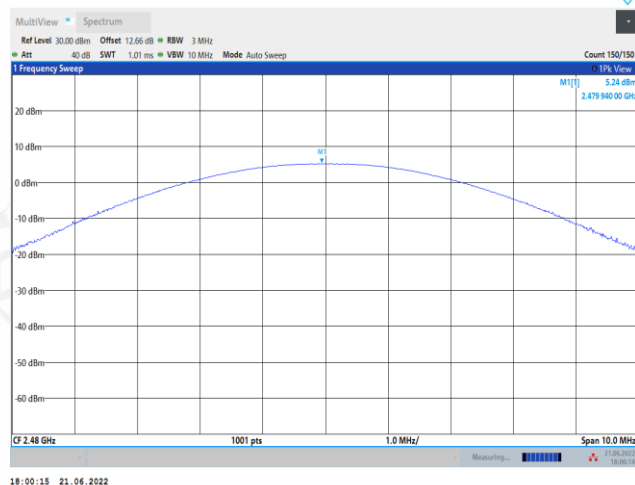

5. 20 dB Bandwidth and 99% Bandwidth

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 kHz RBW and 100 kHz VBW. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

5.4. Test result

Left side:

Mode	Freq. (MHz)	20 dB bandwidth Result (MHz)	99% bandwidth Result (MHz)	Verdict
GFSK	2402	0.963	0.897	Pass
	2441	0.981	0.899	Pass
	2480	0.960	0.897	Pass
$\pi/4$ -DQPSK	2402	1.353	1.307	Pass
	2441	1.350	1.274	Pass
	2480	1.323	1.239	Pass
8DPSK	2402	1.338	1.284	Pass
	2441	1.344	1.266	Pass
	2480	1.344	1.246	Pass

Right side:

Mode	Freq. (MHz)	20 dB bandwidth Result (MHz)	99% bandwidth Result (MHz)	Verdict
GFSK	2402	0.966	0.902	Pass
	2441	0.978	0.903	Pass
	2480	0.963	0.900	Pass
$\pi/4$ -DQPSK	2402	1.347	1.311	Pass
	2441	1.350	1.278	Pass
	2480	1.320	1.229	Pass
8DPSK	2402	1.338	1.276	Pass
	2441	1.338	1.264	Pass
	2480	1.332	1.234	Pass


5.5. Original test data

20dB bandwidth:

Left side:




2DH5_Ant1_2402

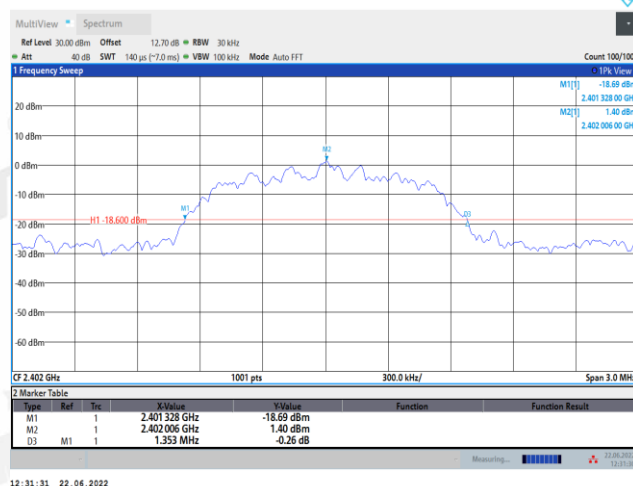

12:31:31 22.06.2022

2DH5_Ant1_2441

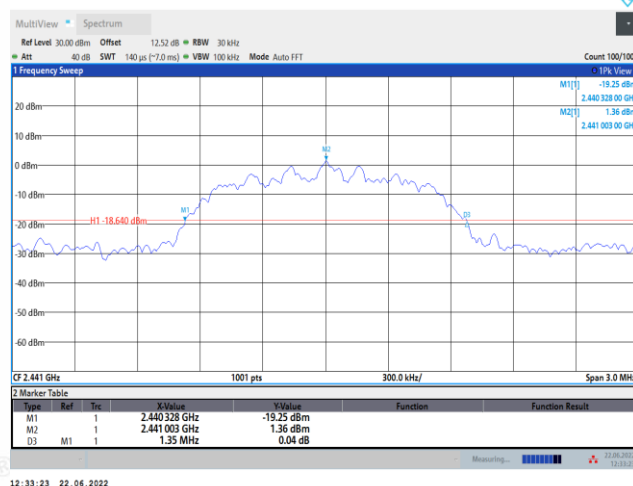


12:33:23 22.06.2022

2DH5_Ant1_2480




12:35:04 22.06.2022


3DH5_Ant1_2402

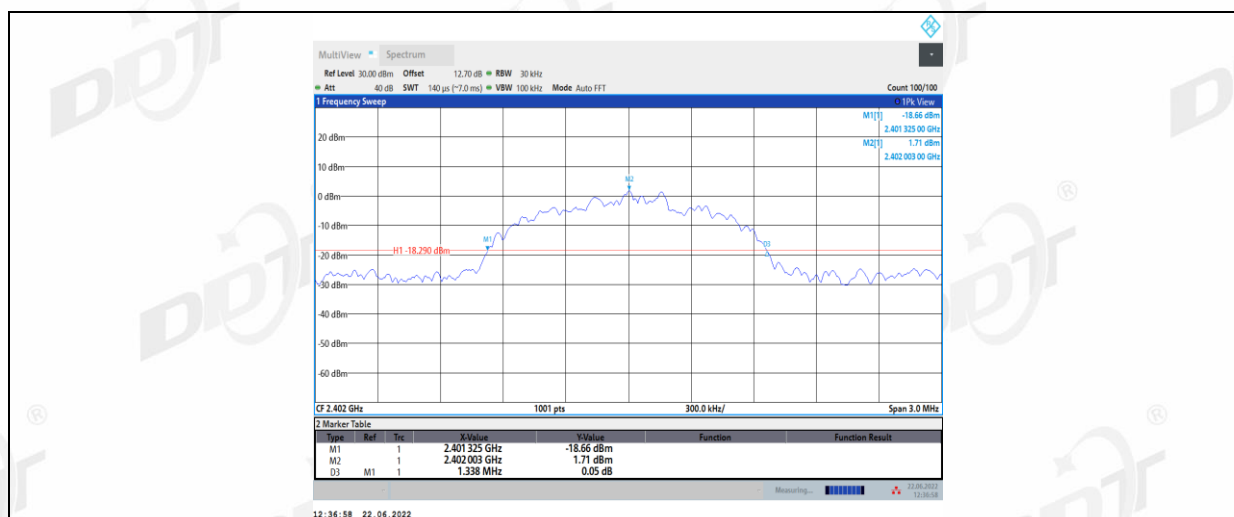

3DH5_Ant1_2441

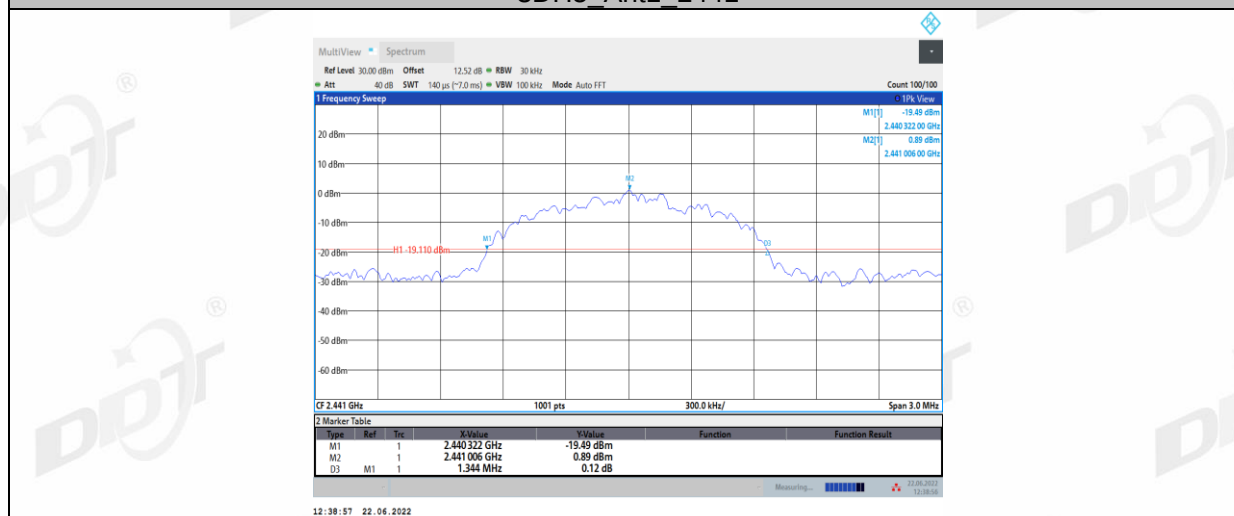


3DH5_Ant1_2480

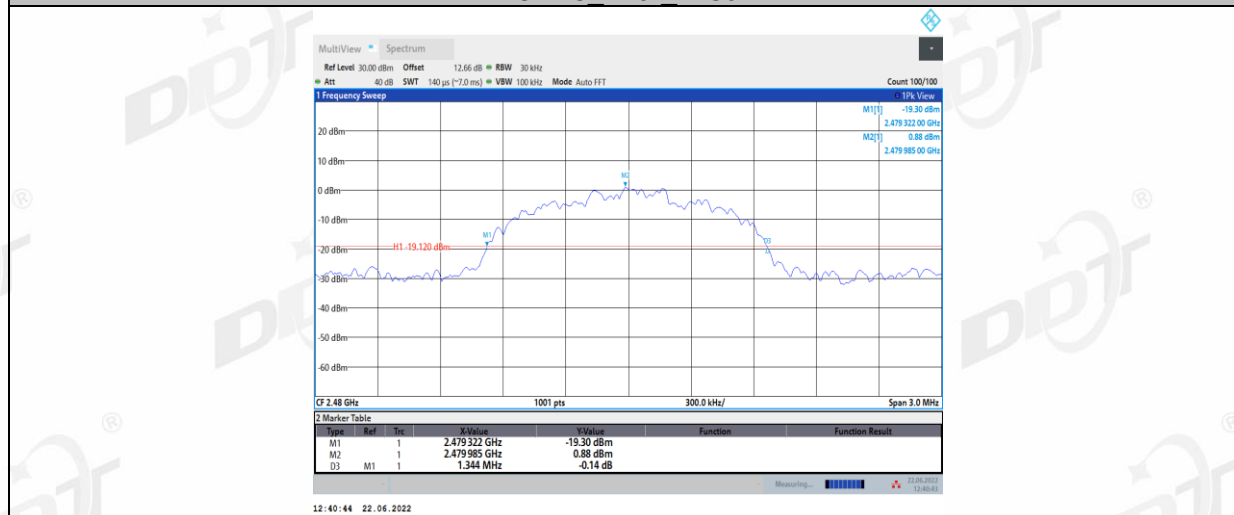


Right side:


DH5_Ant1_2402

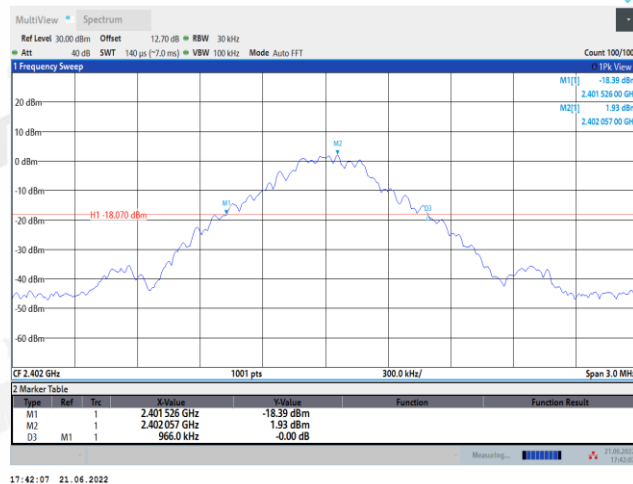


DH5_Ant1_2441

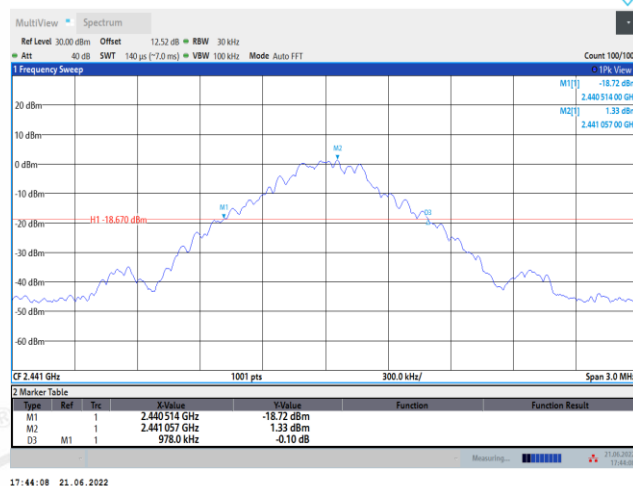

DH5_Ant1_2480

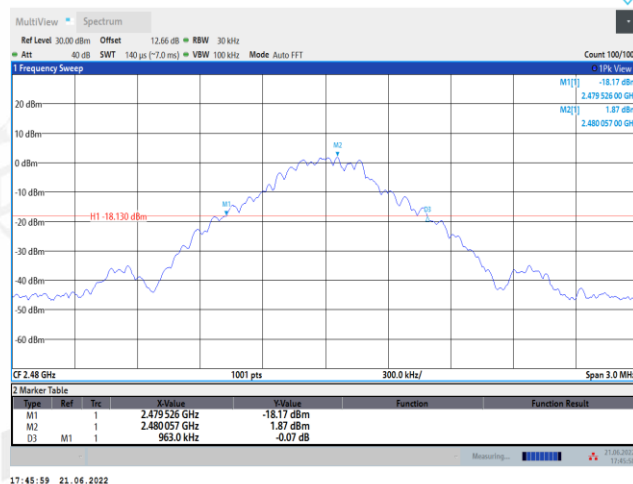


2DH5_Ant1_2402

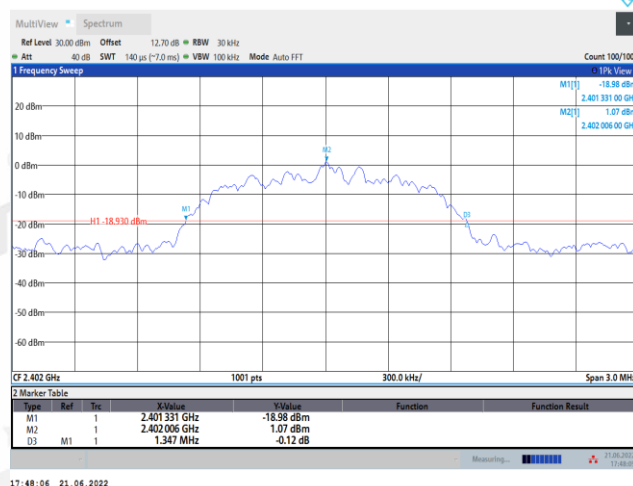


2DH5_Ant1_2441




2DH5_Ant1_2480

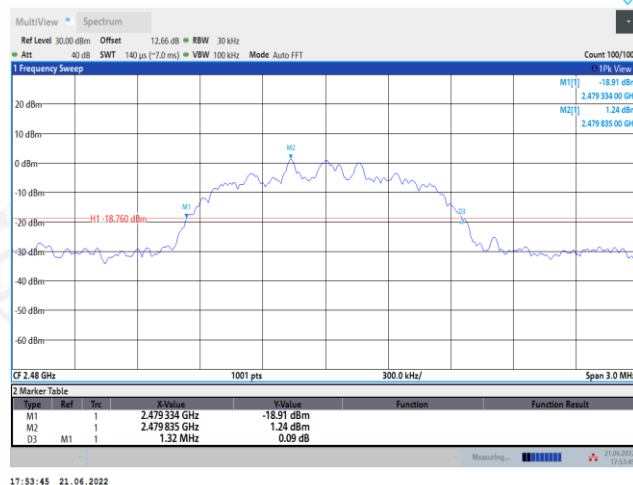

3DH5_Ant1_2402

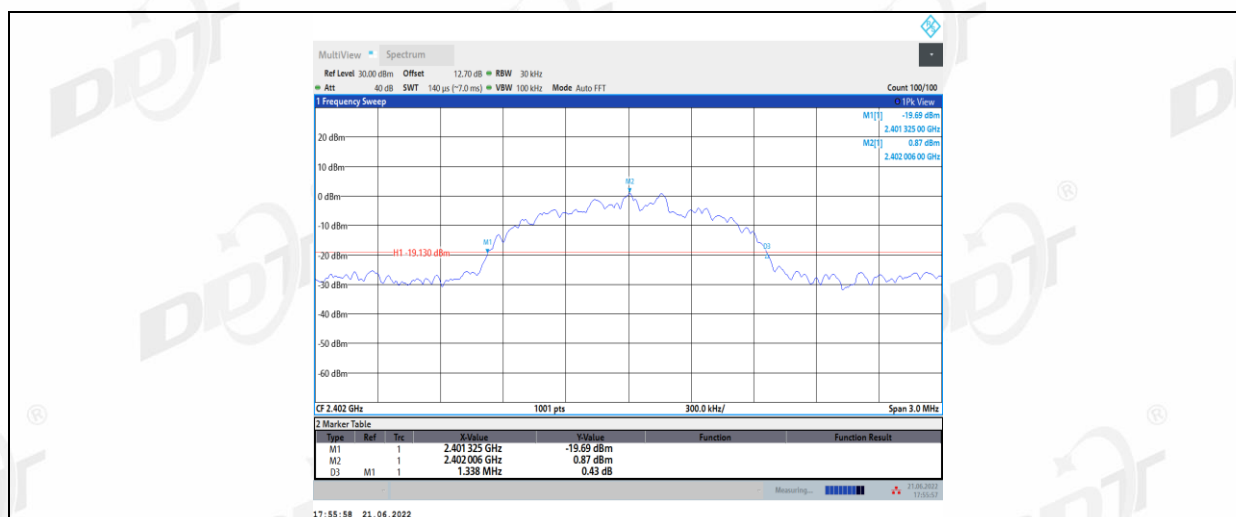

3DH5_Ant1_2441

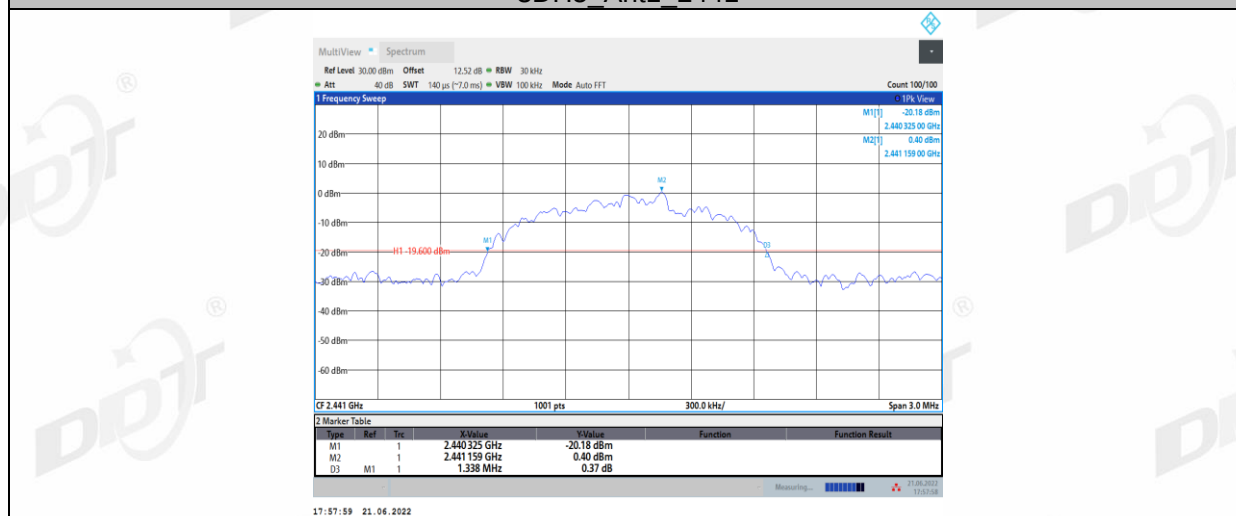


3DH5_Ant1_2480




99% bandwidth:
Left side:


DH5_Ant1_2402

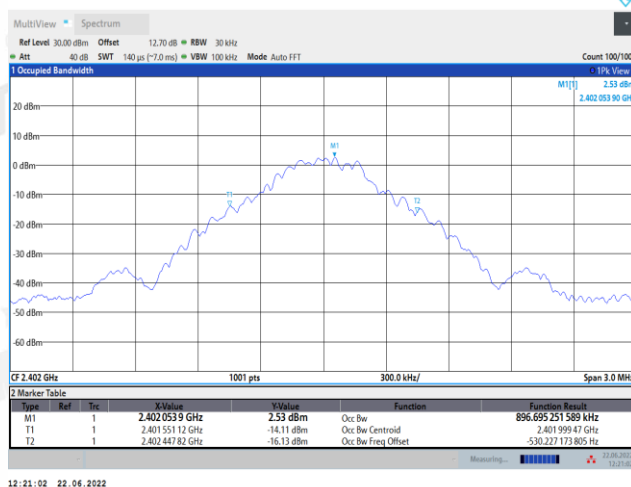


DH5_Ant1_2441

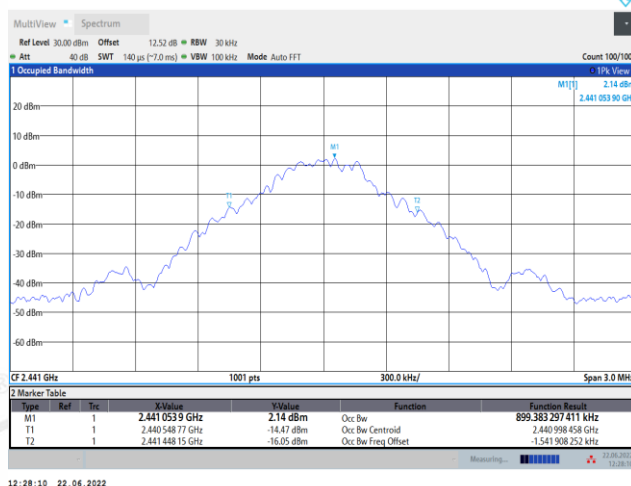


DH5_Ant1_2480

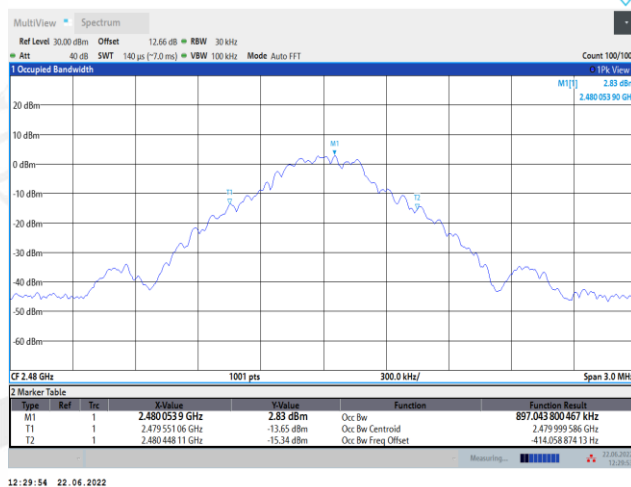


2DH5_Ant1_2402

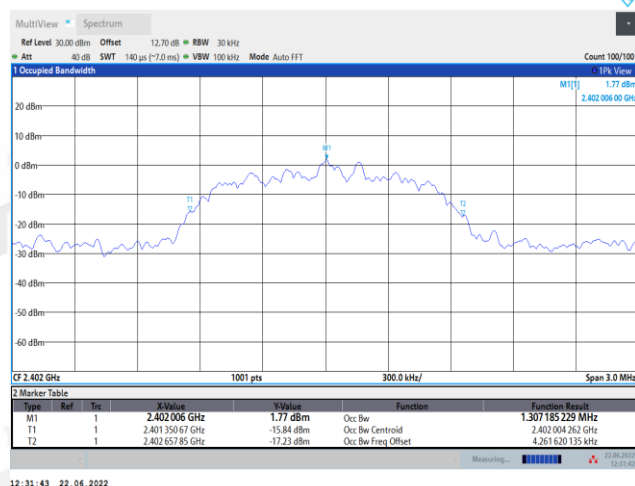


2DH5_Ant1_2441

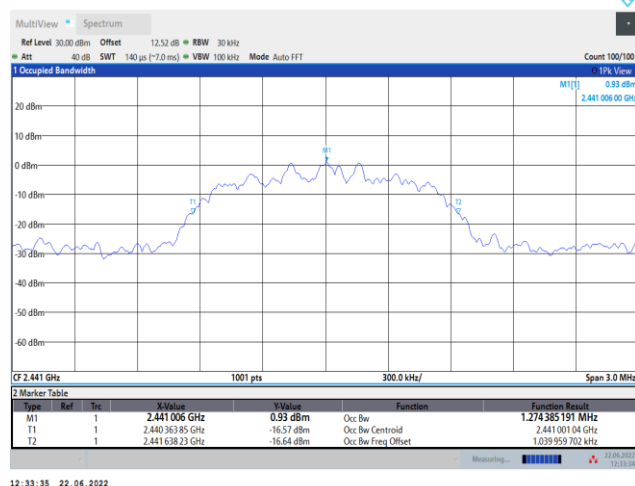


2DH5_Ant1_2480

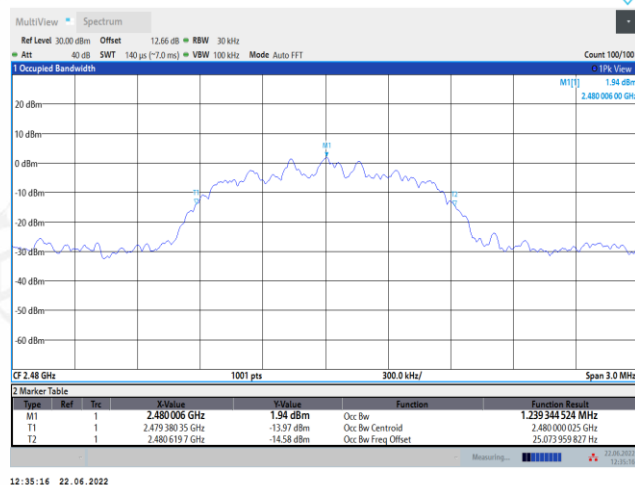


3DH5_Ant1_2402

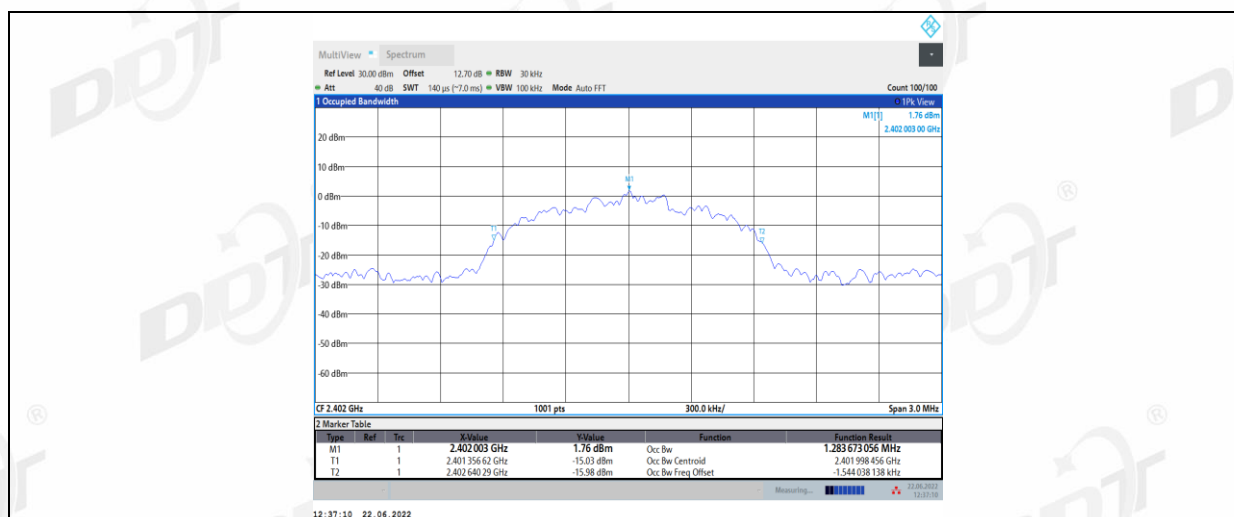

3DH5_Ant1_2441

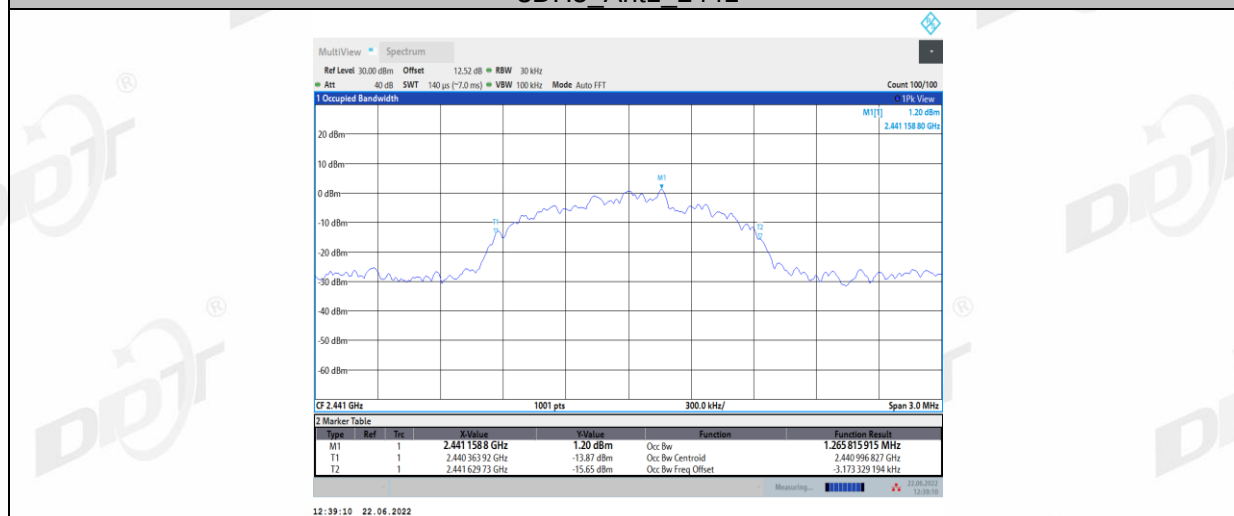


3DH5_Ant1_2480

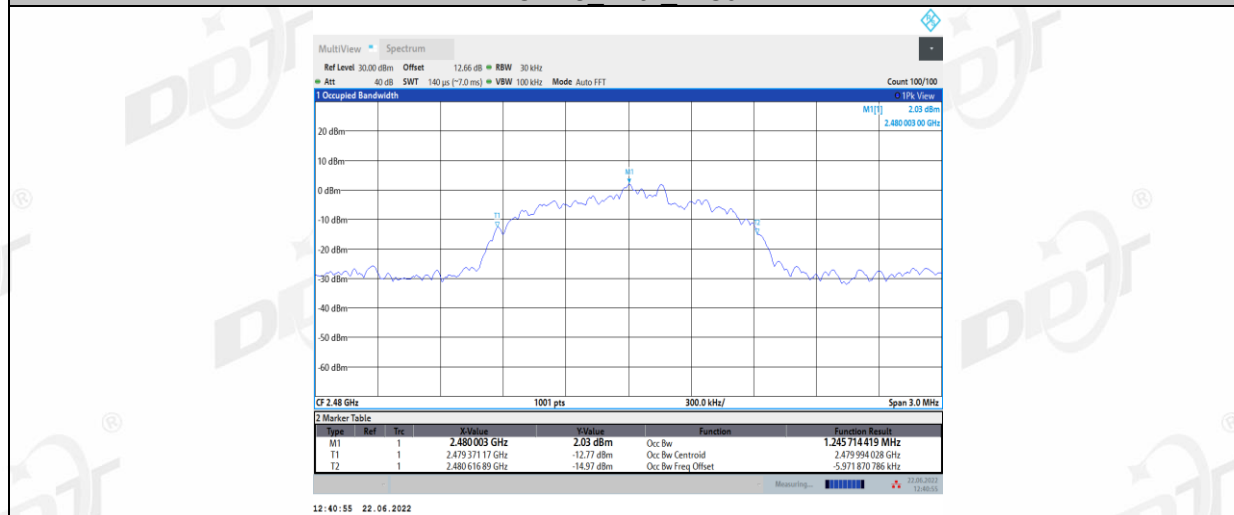


Right side:


DH5_Ant1_2402

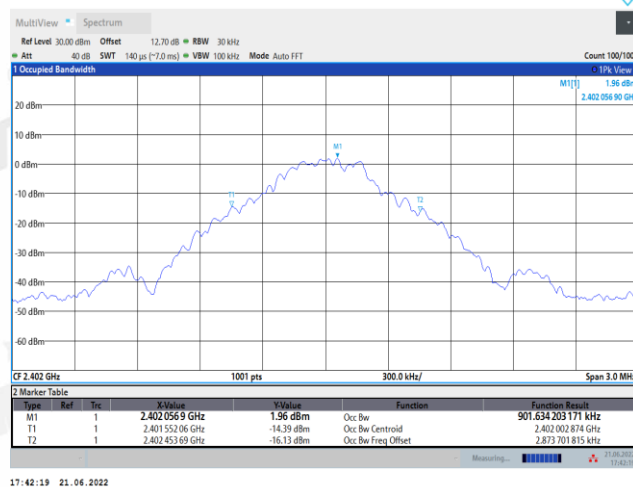


DH5_Ant1_2441

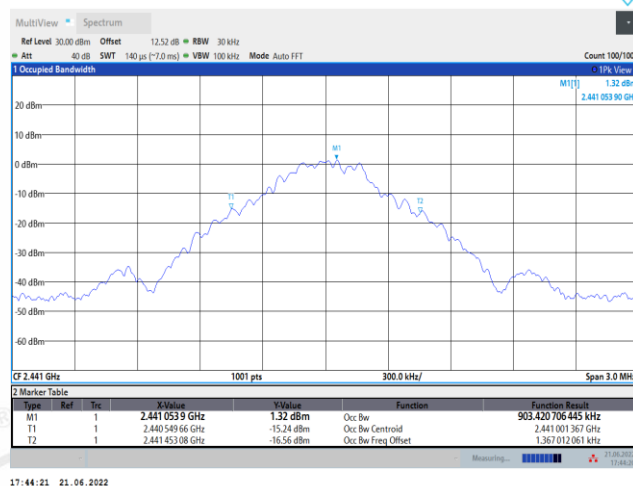


DH5_Ant1_2480

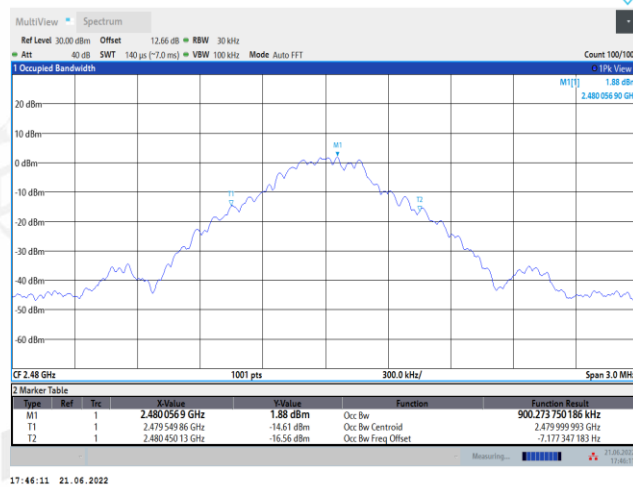


2DH5_Ant1_2402

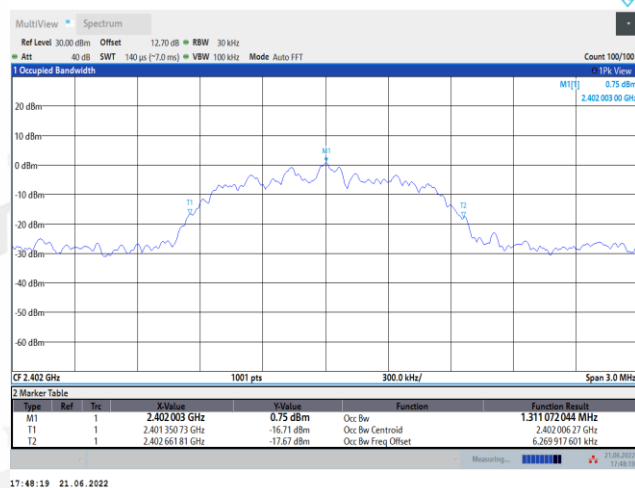


2DH5_Ant1_2441

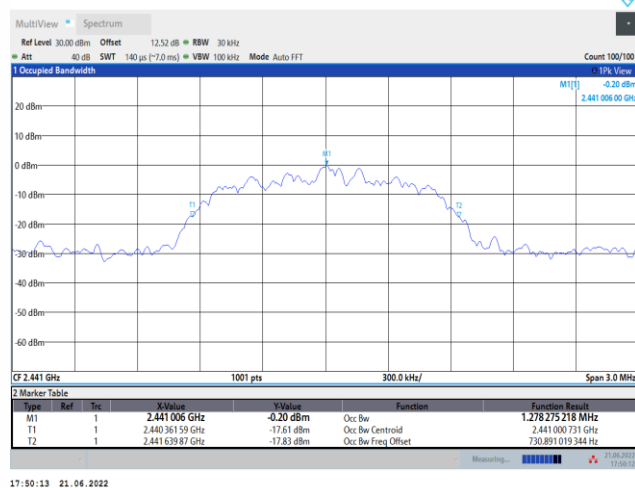


2DH5_Ant1_2480

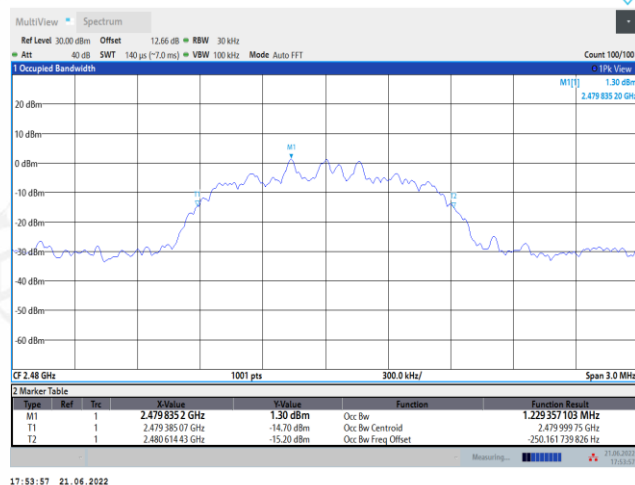


3DH5_Ant1_2402

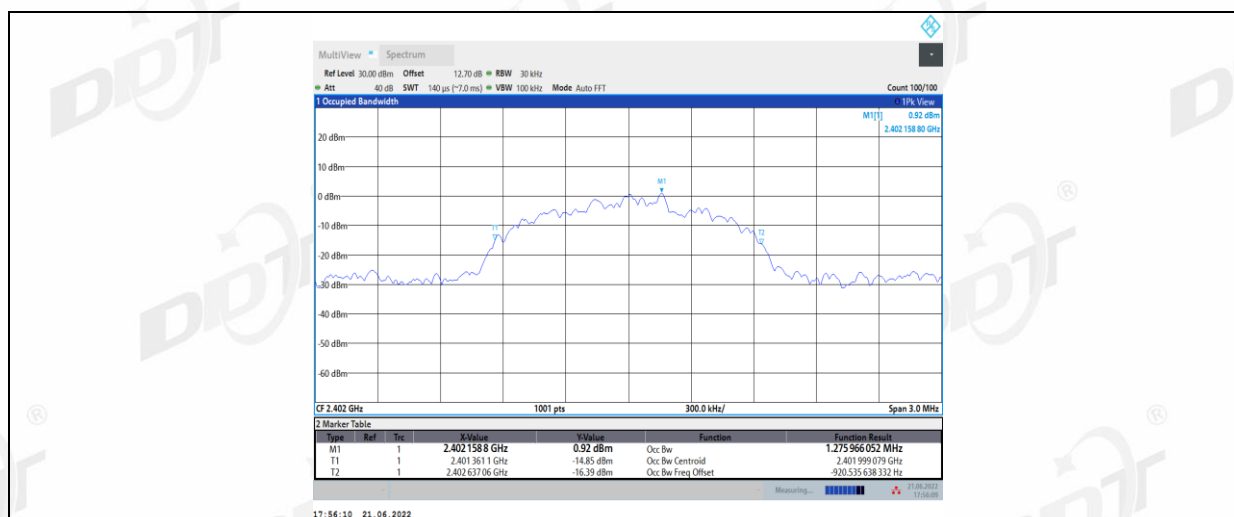

3DH5_Ant1_2441

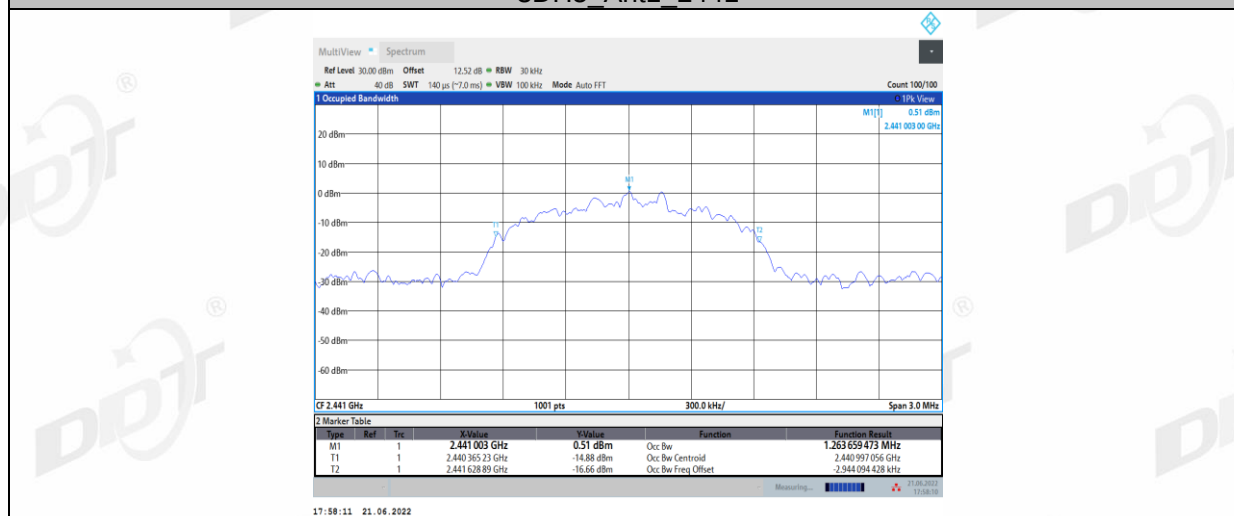

3DH5_Ant1_2480

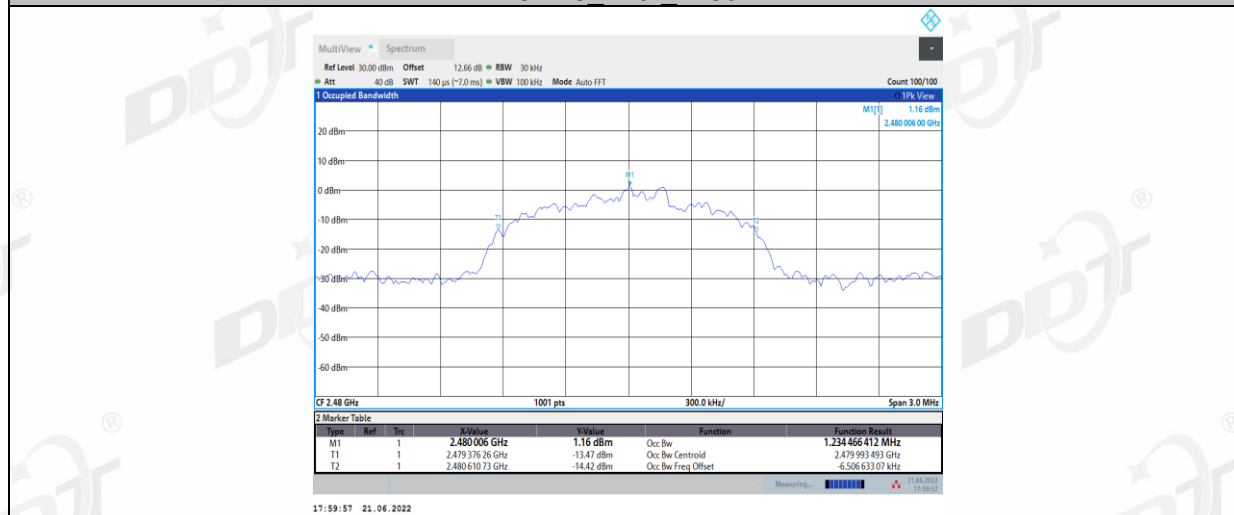

6. Carrier Frequency Separation

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The carrier frequency was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

6.4. Test result

Left side:


Mode	Channel separation (MHz)	20dB bandwidth (MHz) (worse case)	Limit (MHz) 2/3 of 20dB bandwidth	Verdict
GFSK	1.002	0.981	≥ 0.654	Pass
$\pi/4$ -DQPSK	1.000	1.353	≥ 0.902	Pass
8DPSK	1.002	1.344	≥ 0.896	Pass

Right side:

Mode	Channel separation (MHz)	20dB bandwidth (MHz) (worse case)	Limit (MHz) 2/3 of 20dB bandwidth	Verdict
GFSK	1.000	0.978	≥ 0.652	Pass
$\pi/4$ -DQPSK	0.996	1.350	≥ 0.900	Pass
8DPSK	1.002	1.338	≥ 0.892	Pass


6.5. Original test data

Left side:

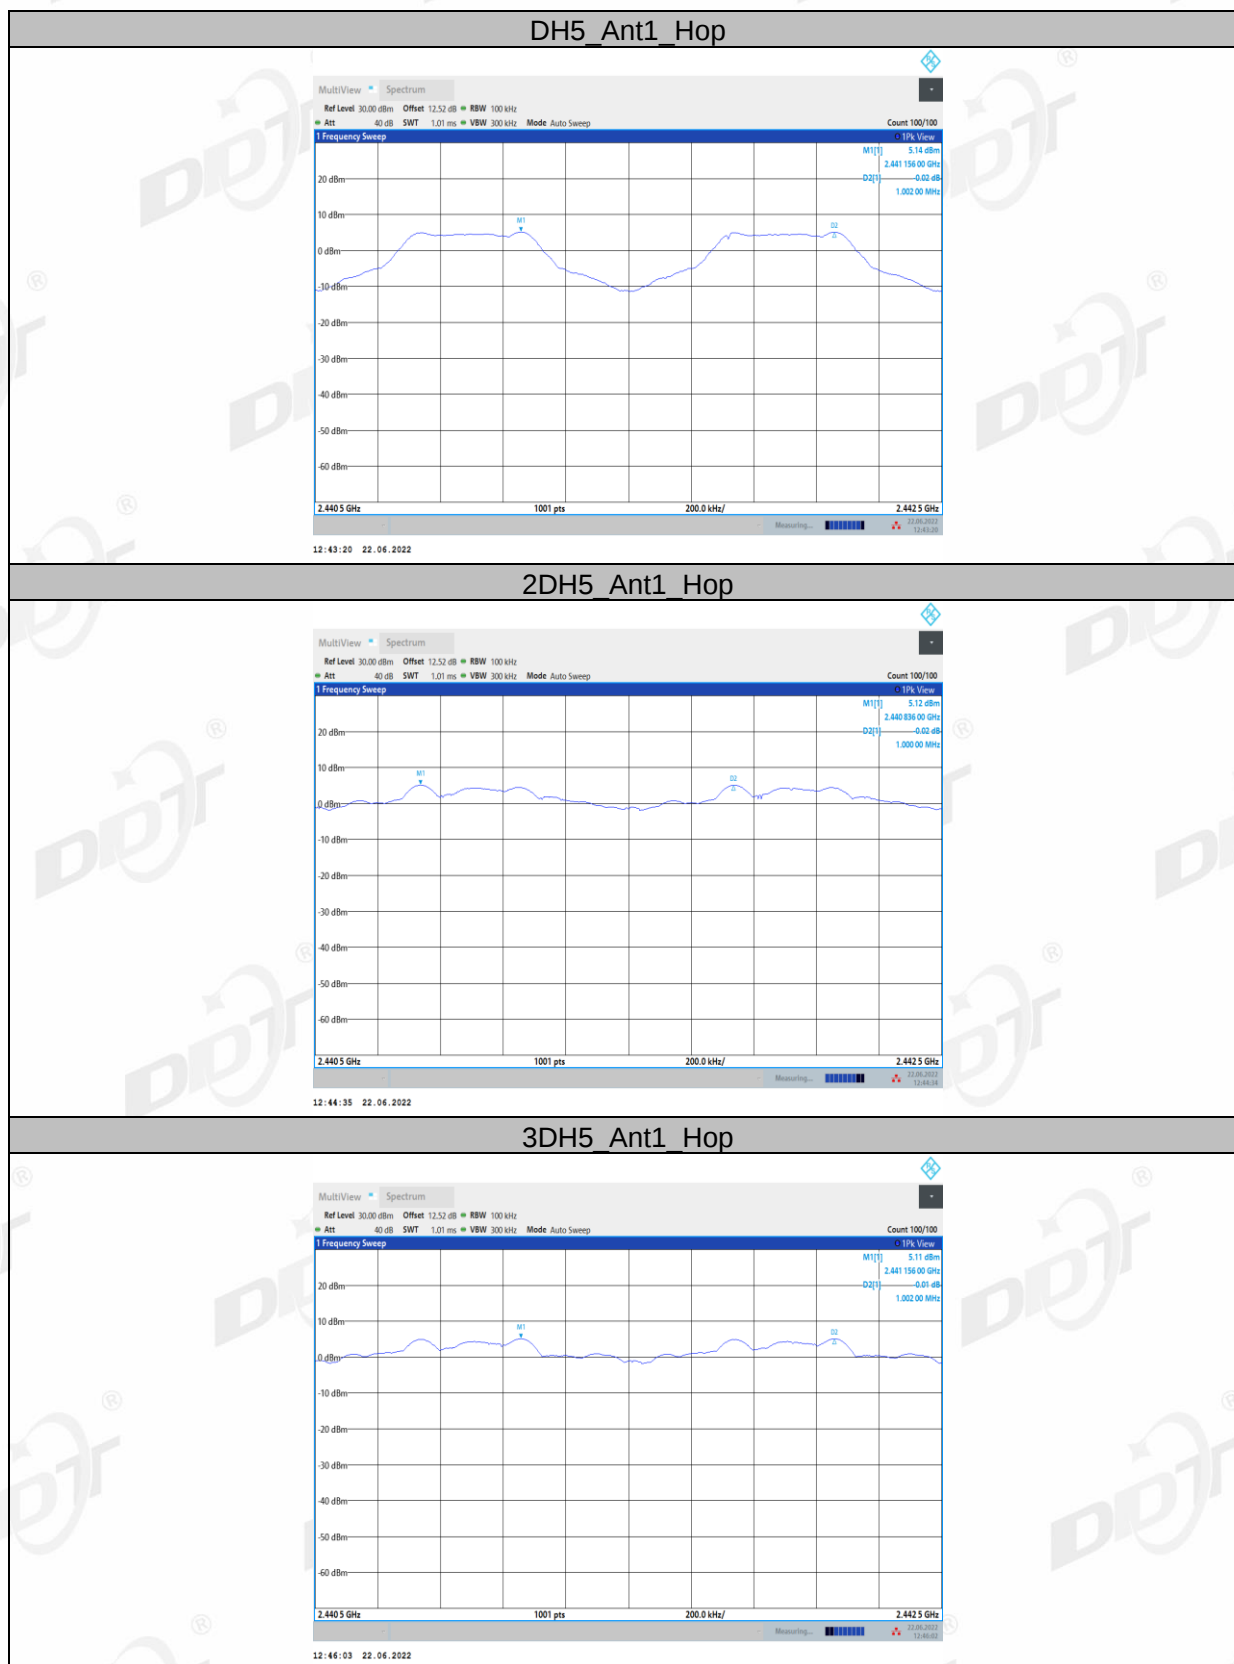


Right side:


DH5_Ant1_Hop

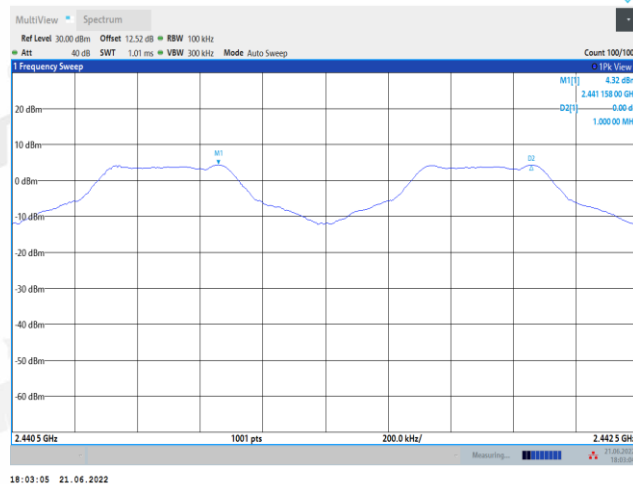

2DH5_Ant1_Hop

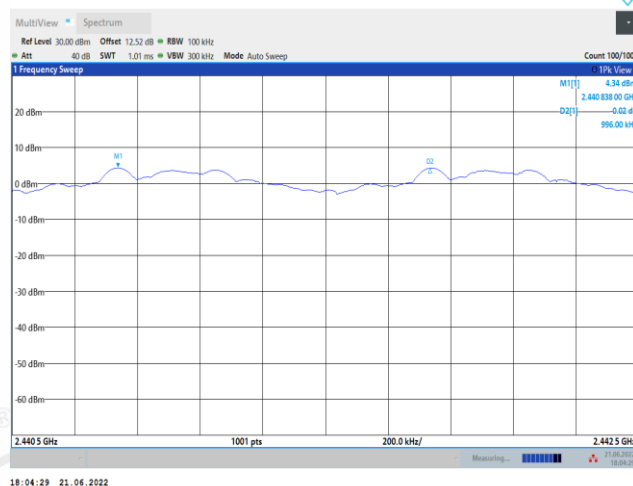

3DH5_Ant1_Hop

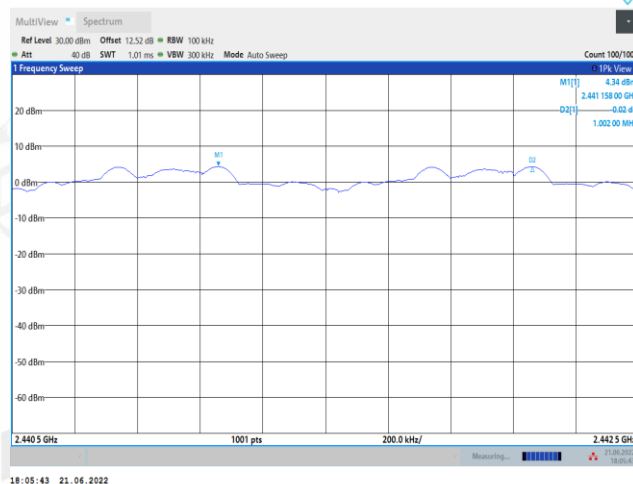

7. Number of Hopping Channel

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

7.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The number of hopping channels was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

7.4. Test result

Left side:

Mode	Number of hopping channels	Limit	Verdict
GFSK	79	>15	Pass
$\pi/4$ -DQPSK	79	>15	Pass
8DPSK	79	>15	Pass

Right side:

Mode	Number of hopping channels	Limit	Verdict
GFSK	79	>15	Pass
$\pi/4$ -DQPSK	79	>15	Pass
8DPSK	79	>15	Pass