



#### 11.2. TEST SETUP


## Radiated Emission Test-Setup Frequency Below 30MHz

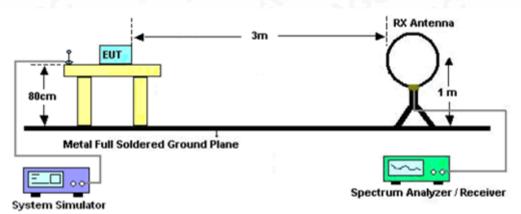

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

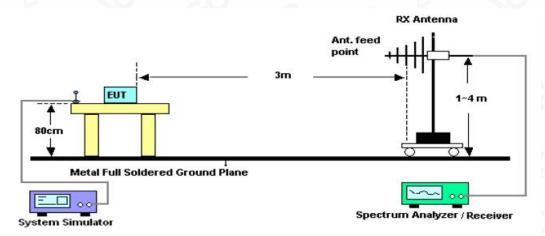

# RADIATED EMISSION TEST SETUP ABOVE 1000MHz

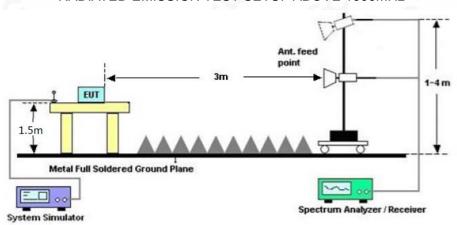

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient of stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC02472210904FE05

Page 53 of 84

### 11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)		
0.009~0.490	2400/F(kHz)	300		
0.490~1.705	24000/F(kHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	3		
216~960	200	3		
Above 960	500	3		

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

### 11.4. TEST RESULT


#### Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



### Radiated emission from 30MHz to 1000MHz


EUT	2.4GHz wireless LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

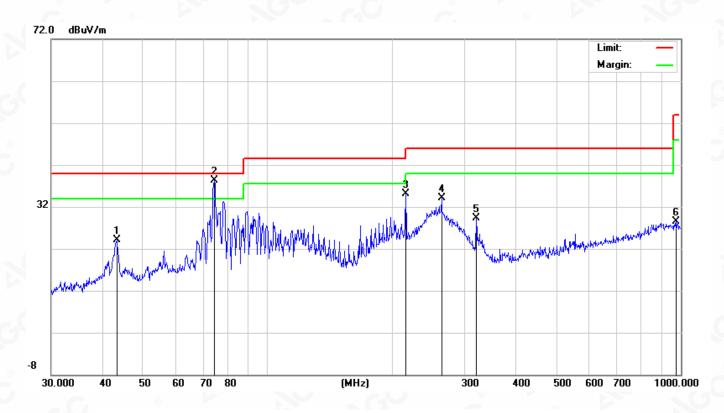

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		43.2017	14.46	9.65	24.11	40.00	-15.89	peak
2	*	74.3955	28.02	10.28	38.30	40.00	-1.70	peak
3		216.0240	27.51	7.60	35.11	46.00	-10.89	peak
4		263.8190	25.58	8.62	34.20	46.00	-11.80	peak
5		319.9370	17.74	11.55	29.29	46.00	-16.71	peak
6		975.7529	6.82	21.60	28.42	54.00	-25.58	peak


### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the confidence of the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





EUT	2.4GHz wireless LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

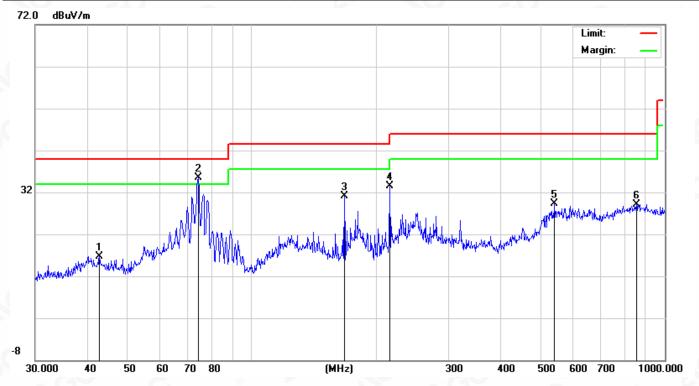


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		42.8998	7.04	9.59	16.63	40.00	-23.37	peak
2	*	74.3955	24.27	11.16	35.43	40.00	-4.57	peak
3		167.8243	19.50	11.56	31.06	43.50	-12.44	peak
4		216.0240	23.75	9.81	33.56	46.00	-12.44	peak
5		541.3725	11.06	18.21	29.27	46.00	-16.73	peak
6		854.0247	6.64	22.53	29.17	46.00	-16.83	peak

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the control of the report. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exphorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report.

Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





Radiated emission above 1GHz

EUT	2.4GHz wireless LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
54.63	0.08	54.71	74	-19.29	peak
45.18	0.08	45.26	54	-8.74	AVG
49.34	2.21	51.55	74	-22.45	peak
40.26	9 2.21	42.47	54	-11.53	AVG
0					GG
·		- 60		®	
	(dBµV) 54.63 45.18 49.34	(dBµV) (dB) 54.63 0.08 45.18 0.08 49.34 2.21	(dBμV)     (dB)     (dBμV/m)       54.63     0.08     54.71       45.18     0.08     45.26       49.34     2.21     51.55	(dBμV)     (dB)     (dBμV/m)     (dBμV/m)       54.63     0.08     54.71     74       45.18     0.08     45.26     54       49.34     2.21     51.55     74	(dBμV)     (dB)     (dBμV/m)     (dBμV/m)     (dBμV/m)       54.63     0.08     54.71     74     -19.29       45.18     0.08     45.26     54     -8.74       49.34     2.21     51.55     74     -22.45

EUT	2.4GHz wireless LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Meter Reading	Factor	Emission Level	Limits	NAS marina		
(dDu\A			LIIIIII	Margin	Value Type	
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
55.27	0.08	55.35	74	-18.65	peak	
45.35	0.08	45.43	9 54	-8.57	AVG	
51.06	2.21	53.27	74	-20.73	peak	
40.82	2.21	43.03	54	-10.97	AVG	
	7.0				-0	
		3 - 6	· ·			
-	45.35 51.06 40.82	45.35 0.08 51.06 2.21 40.82 2.21	45.35     0.08     45.43       51.06     2.21     53.27	45.35     0.08     45.43     54       51.06     2.21     53.27     74       40.82     2.21     43.03     54	45.35     0.08     45.43     54     -8.57       51.06     2.21     53.27     74     -20.73       40.82     2.21     43.03     54     -10.97	



Report No.: AGC02472210904FE05

Page 57 of 84

EUT	2.4GHz wireless LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	56.36	0.14	56.5	74	-17.5	peak
4874.000	45.98	0.14	46.12	54	-7.88	AVG
7311.000	51.04	2.36	53.4	74	-20.6	peak
7311.000	40.29	2.36	42.65	54	-11.35	AVG
	-0				7.0	
emark:			@			
	nna Factor + Cab	le Loss – Pre-	amplifier.	©		

Factor = I	Antenna Fa	actor +	Cable	Loss – F	Pre-amplifier	<u>.                                     </u>
	8		_			

EUT	2.4GHz wireless LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Limits (dBµV/m) 74 54	Margin (dB) -18.53	Value Type
74	-18.53	
		peak
E 1		
34	-7.69	AVG
74	-21.42	peak
54	-11.29	AVG
		(3)
	(%)	

Factor = Antenna Factor + Cable Loss - Pre-amplifier.





EUT	2.4GHz wireless LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	54.39	0.22	54.61	74	-19.39	peak
4924.000	43.26	0.22	43.48	54	-10.52	AVG
7386.000	49.24	2.64	51.88	74	-22.12	peak
7386.000	40.05	2.64	42.69	54	-11.31	AVG
					0	
		R				(2)
Remark:			®			
actor = Anter	nna Factor + Cable	Loss - Pre-	amplifier.			

EUT	2.4GHz wireless LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

	I M ( B II	- ·	[ ]	1		
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	$(dB\mu V/m)$	(dB)	value Type
4924.000	56.14	0.22	56.36	74	-17.64	peak
4924.000	45.13	0.22	45.35	54 💮	-8.65	AVG
7386.000	51.09	2.64	53.73	74	-20.27	peak
7386.000	42.38	2.64	45.02	54	-8.98	AVG
		<b>300</b>		®		5
emark:	•		- 69		(6)	
ctor = Anter	na Factor + Cab	le Loss – Pre-	amplifier.		C	(8)

#### Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.




### Test result for band edge emission at restricted bands

EUT	2.4GHz wireless LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal

#### Test Graph for Peak Measurement

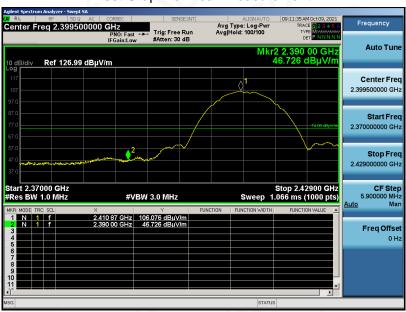

Test Graph for Average Measurement

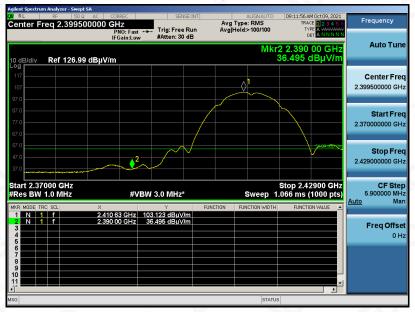

**RESULT: PASS** 




EUT	2.4GHz wireless  LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

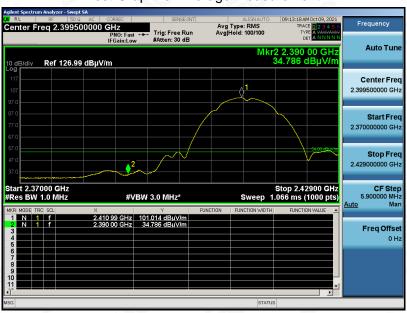



EUT	2.4GHz wireless LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	2.4GHz wireless  LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement






EUT	2.4GHz wireless  LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

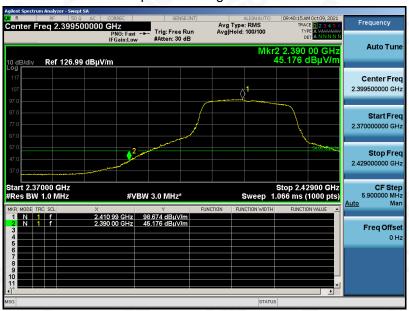




EUT	2.4GHz wireless  LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

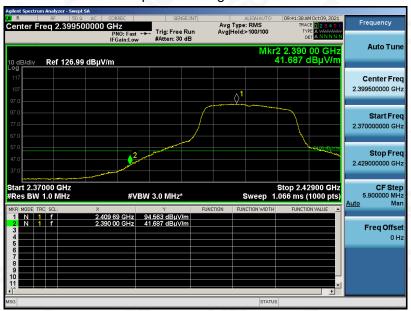



EUT	2.4GHz wireless  LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	2.4GHz wireless LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement






EUT	2.4GHz wireless  LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

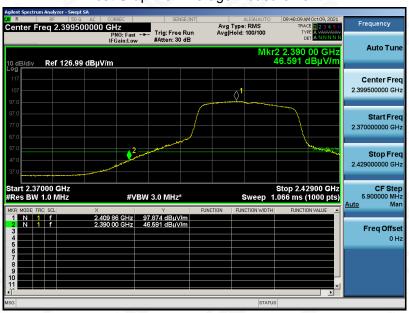




EUT	2.4GHz wireless  LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

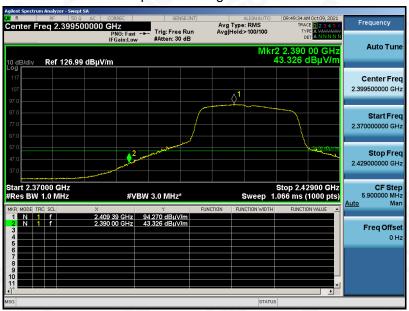




EUT	2.4GHz wireless  LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

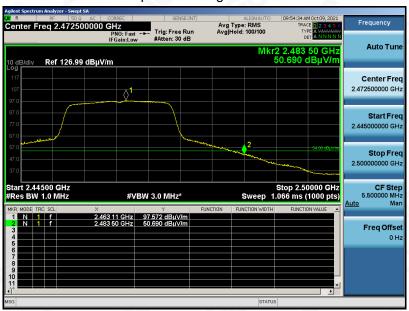




EUT	2.4GHz wireless  LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

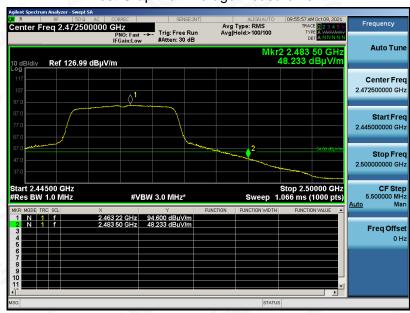




EUT	2.4GHz wireless  LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

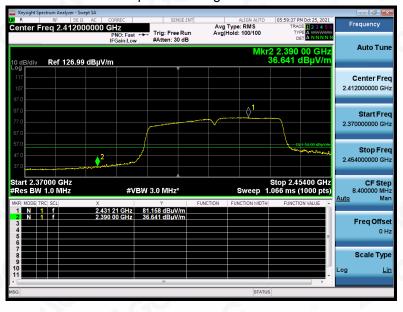




EUT	2.4GHz wireless  LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

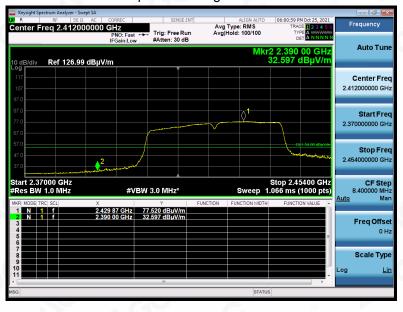




EUT	2.4GHz wireless  LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

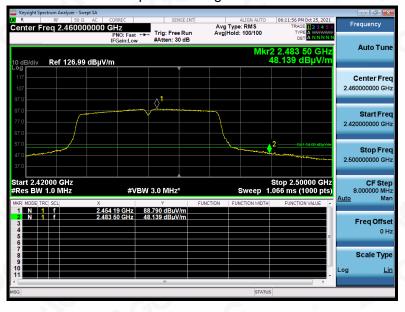





EUT	2.4GHz wireless LAN/Bluetooth module	Model Name	HLK-B35
Temperature	21.8°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

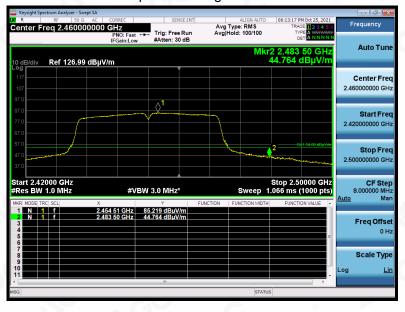





## 12. LINE CONDUCTED EMISSION TEST


### 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage		
Frequency	Q.P (dBµV)	Average (dBμV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	


### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

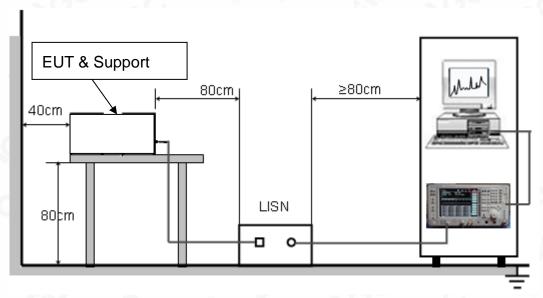

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the collicated result of Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test represented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report and of the





#### 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


### 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.



### 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

#### Line Conducted Emission Test Line 1-L

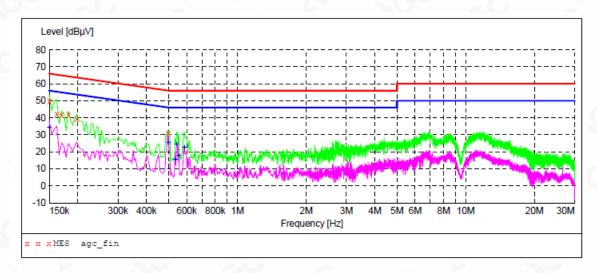

#### MEASUREMENT RESULT:

202	1/10/8 17:	22					
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
	0.150000	49.70	6.9	66	16.3	QP	L1
	0.162000	42.00	6.8	65	23.4	QP	L1
	0.170000	41.70	6.8	65	23.3	QP	L1
	0.182000	41.50	6.7	64	22.9	QP	L1
	0.198000	39.40	6.6	64	24.3	QP	L1
	0.498000	30.70	5.4	56	25.3	QP	L1

### MEASUREMENT RESULT: "agc fin2"


2021/10/8 17:22

2021/10/0 1/122							
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	
0.150000	34.30	6.9	56	21.7	AV	L1	
0.498000	25.10	5.4	46	20.9	AV	L1	
0.534000	15.40	5.4	46	30.6	AV	L1	
0.542000	24.10	5.4	46	21.9	AV	L1	
0.554000	17.90	5.4	46	28.1	AV	L1	
0.586000	22.20	5.4	46	23.8	AV	L1	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appresented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com. /Inspection he test results



### Line Conducted Emission Test Line 2-N

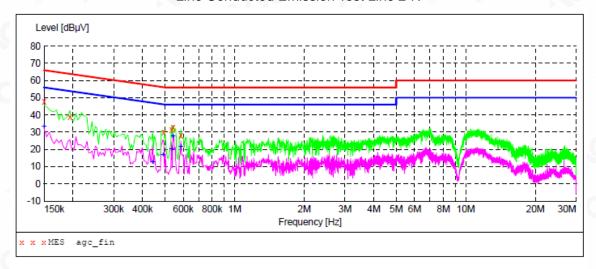

## MEASUREMENT RESULT: "agc\_fin"

2021/10/8 17:25

2021/10/6 1/:	23					
Frequency				_	Detector	Line
MHz	dBµ∇	dB	dΒμV	dB		
0.150000	47.90	6.9	66	18.1	QP	N
0.194000	38.90	6.6	64	25.0	QP	N
0.494000	29.70	5.4	56	26.4	QP	N
0.534000	31.20	5.4	56	24.8	QP	N
0.542000	32.90	5.4	56	23.1	QP	N
0.586000	28.10	5.4	56	27.9	QP	N

## MEASUREMENT RESULT: "agc fin2"

2021/10/8 17:25


227, 207, 0 27, 20								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line		
0.150000	33.10	6.9	56	22.9	AV	N		
0.442000	12.60	5.6	47	34.4	AV	N		
0.490000	16.70	5.4	46	29.5	AV	N		
0.534000	19.90	5.4	46	26.1	AV	N		
0.542000	27.40	5.4	46	18.6	AV	N		
0.586000	21.60	5.4	46	24.4	AV	N		

## **RESULT: PASS**



## **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

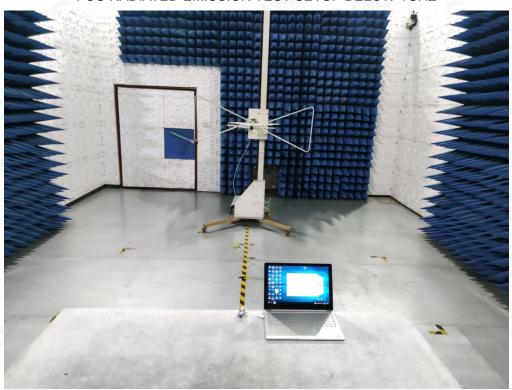

FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## CONDUCTED EMISSION TEST SETUP



## CONDUCTED TEST SETUP

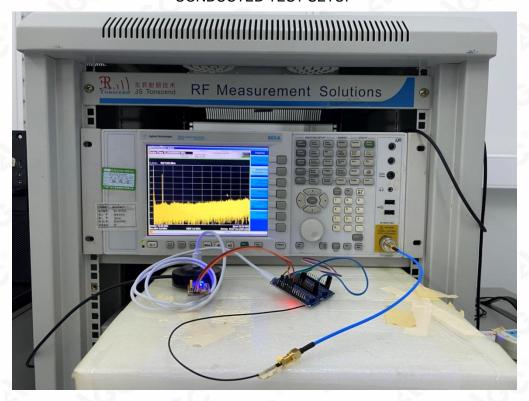


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




## **APPENDIX B: PHOTOGRAPHS OF EUT**

**EXTERNAL VIEW-1 OF EUT** 

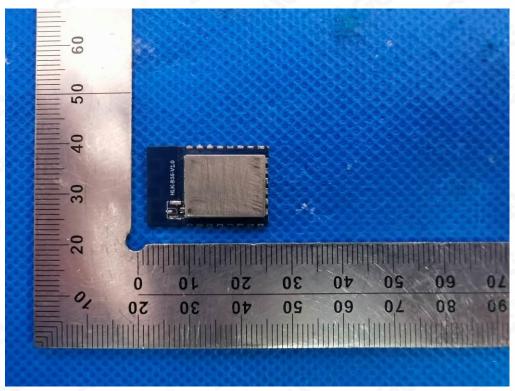


**EXTERNAL VIEW-2 OF EUT** 

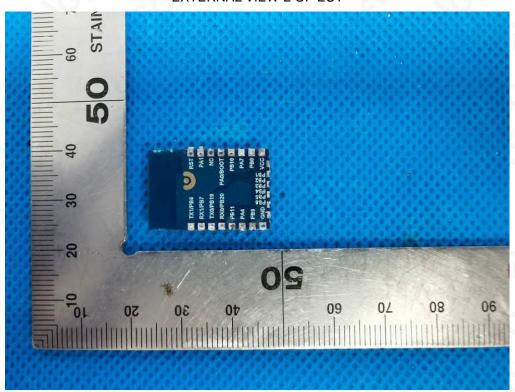


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



### **EXTERNAL VIEW-3 OF EUT**

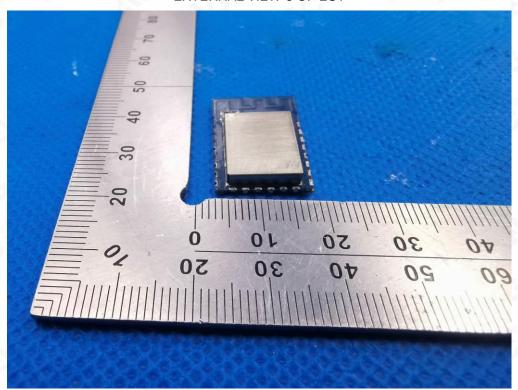


**EXTERNAL VIEW-4 OF EUT** 

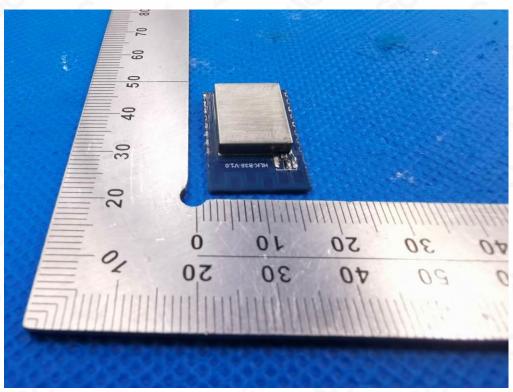


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Residual



### **EXTERNAL VIEW-5 OF EUT**

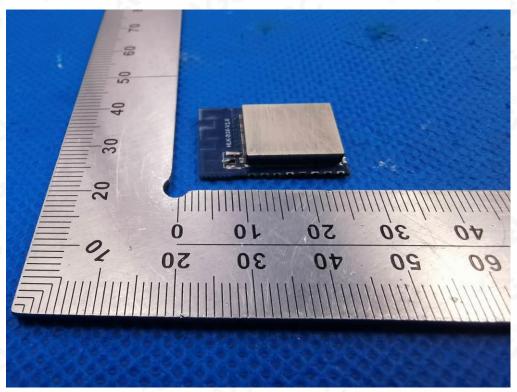


**EXTERNAL VIEW-6 OF EUT** 

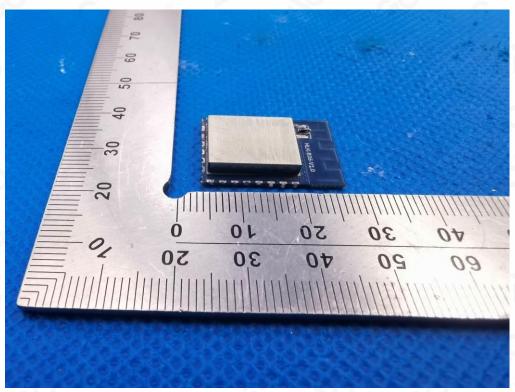

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Residual



## **INTERNAL VIEW-1 OF EUT**

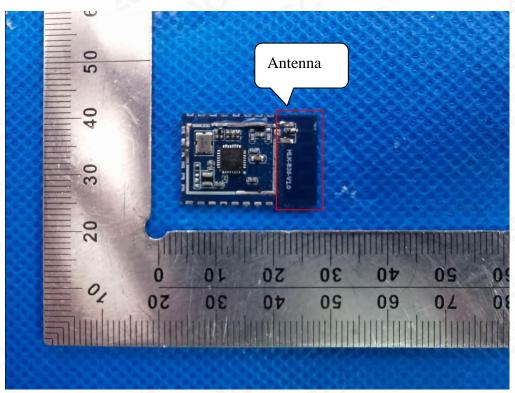

**INTERNAL VIEW-2 OF EUT** 



## ----END OF REPORT----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Residual



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.