

TESTING CERTIFICATE



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No. :
CTK-2015-01495
Page (1) / (29) Pages

1. Client

- Name : PARTRON CO.,LTD
- Address : 22,Samsung1-ro2-gil Hwaseong-si Gyeonggi-do, Korea
- Date of Receipt : 2015-11-06

2. Manufacturer

- Name : PARTRON CO.,LTD
- Address : 22,Samsung1-ro2-gil Hwaseong-si Gyeonggi-do, Korea

3. Use of Report : For FCC certification

4. Test Sample / Model: Bluetooth Headset / PBH-200

5. Date of Test : 2015-11-13

6. FCC ID : 2AD5K-PBH200

7. Test Standard(method) used : FCC Part 15 Subpart B

8. Testing Environment: refer to 10 pages to 16 pages

9. Test Results : refer to 11 pages to 16 pages

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Affirmation	Tested by	Approved by
	Kim Minkyu: (Signature) EMC Test Engineer	Lee Eunwon: (Signature) Technical Manager

2015-11-23

Republic of KOREA **CTK Co., Ltd.**



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (2) / (29) Pages

REPORT REVISION HISTORY

Date	Revision	Page No
2015-11-23	Issued (CTK-2015-01495)	All

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (3) / (29) Pages

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
1.0 General Product Description	4
1.1 Model Differences	4
1.2 Device Modifications	4
1.3 EUT Configuration(s)	5
1.4 Test Software	5
1.5 EUT Operating Mode(s)	5
1.6 Configuration	6
1.7 Calibration Details of Equipment Used for Measurement	7
1.8 Test Facility	7
1.9 Measurement Procedure	7
1.10 Laboratory Accreditations and Listings	8
1.11 Measurement Uncertainty	8
2.0 EMC Test Regulations/Standards	9
3.0 Results of Individual Test	10
3.1 Conducted Voltage Emissions of Mains ports	10
3.2 Radiated Electric Field Emissions (Below 1 GHz)	16
3.3 Radiated Electric Field Emissions (Above 1 GHz)	18
APPENDIX A - Test Setup Photos and Configuration	19
Conducted Voltage Emissions of Mains Ports	20
Radiated Electric Field Emissions (Below 1 GHz)	21
Radiated Electric Field Emissions (Above 1 GHz)	22
APPENDIX B - EUT Photographs	23
EUT External Photographs	24
EUT Internal Photographs	26
PCB	27



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9871
 Fax: +82-31-624-9501

Certificate No.:
 CTK-2015-01495
 Page (4) / (29) Pages

1.0 General Product Description

No.	ITEM	APPLICATION
1	Test Sample	Bluetooth Headset
2	Model	PBH-200
3	Variant Model	-
4	Dimensions (W x L x H)	180.0 mm × 155.0 mm × 30.0 mm
5	Mobility	<input checked="" type="checkbox"/> Table-top <input type="checkbox"/> Floor-standing <input type="checkbox"/> Built-in <input checked="" type="checkbox"/> Portable
6	Maximum Clock Frequency	26 MHz
7	Electrical Ratings	Input: DC 5 V(Notebook Computer USB Port)
		Output: -
		Battery: Li-ion Battery DC 3.7 V
8	Test Voltage / Frequency	Voltage: AC 120 V(AC/DC ADAPTOR)
		Frequency: 60 Hz

1.1 Model Differences

Not applicable

1.2 Device Modifications

The following modifications were necessary for compliance:

Not applicable



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (5) / (29) Pages

1.3 EUT Configuration(s)

See Appendix A for individual test set-up configuration(s). The following peripheral devices and/or interface cables were connected during the measurement:

Peripheral Devices

[Charging mode through Notebook Computer]

Device	Model No.	Serial No.	Manufacturer
Notebook Computer	NT-R480	Z07093FZ400685L	Samsung Electronics Co., Ltd.
AC/DC ADAPTOR	CPA09-002A	-	Chicony Power Technology Co., Ltd.

Cable Description

[Charging mode through Notebook Computer]

No.	From		To		Type of Cable		
	Device	I/O Port	Device	I/O Port	Length (m)	Shielded or Unshielded	Ferrite Core [Y/N]
1	EUT	USB	Notebook Computer	USB	0.8	S	N
2	Bluetooth Tester	DC IN	AC/DC ADAPTOR	DC OUT	1.2	U	Y
3	AC/DC ADAPTOR	AC Power	AC Mains	-	1.8	U	N

* Shielded or Unshielded : Unshielded=U, Shielded=S

1.4 Test Software

- EMC Test V 1.0
- Display Test Patterns - V1.5
- Ping.exe
- Not applicable


1.5 EUT Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:

Charging mode through Notebook Computer

1.6 Configuration

[Charging mode through Notebook Computer]

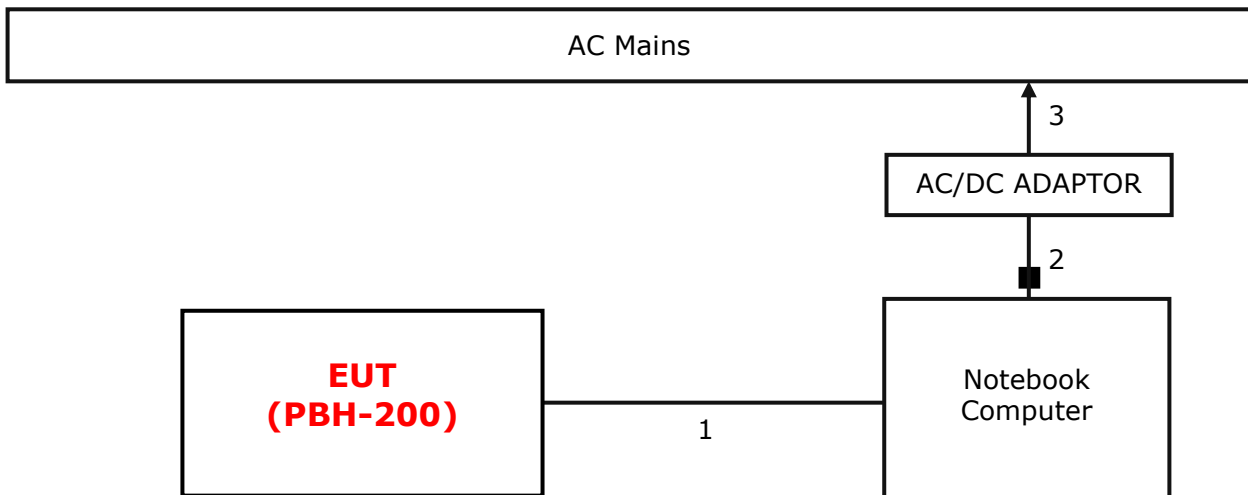



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (7) / (29) Pages

1.7 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.8 Test Facility

The measurement facility is located at (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yong-in-si, Gyeonggi-do, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.9 Measurement Procedure

Preliminary AC power line conducted emissions tests were performed shielded room. To find worst mode, several typical mode and typical cable position were tested.

Final AC power line conducted emissions test was performed shielded room. (location is same as Preliminary test)

Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

Preliminary radiated emissions test were performed Semi-Anechoic Chamber or anechoic chamber (Distance of antenna and EUT was 3 m). To find worst mode, several typical mode and typical cable position were tested and peak level and frequency were recorded.




Final radiated emissions test was performed Semi-Anechoic Chamber.

Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

* Measurement procedures was In accordance with ANSI C63.4-2009 7.3.3, 7.3.4, 8.3.1.1, 8.3.1.2, 8.3.2.1, 8.3.2.2

 CTK Co., Ltd. <small>The Prime Leader of Global Regulatory Certification</small>	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9871 Fax: +82-31-624-9501	Certificate No.: CTK-2015-01495 Page (8) / (29) Pages	
---	---	---	--

1.10 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Registration Number	Logo
USA	FCC	FCC Part 15 & 18 EMI (Electromagnetic Interference / Emission)	805871	
JAPAN	VCCI	VCCI V-3 EMI (Electromagnetic Interference / Emission)	C-986 T-1843 R-3627 G-387	
KOREA	MSIP	EMI (Electromagnetic Interference / Emission) EMS (Electromagnetic Susceptibility / Immunity)	KR0025	

1.11 Measurement Uncertainty

Compliance of the product is based on the measured value.

However, the measurement uncertainty is included for information purposes.

The measurement uncertainties given below are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Measurement Type	Frequency Range	Expanded Uncertainty
Conducted Emission	9 kHz to 150 kHz	2.78 dB (C.L.: Approx. 95 %, $k=2$)
Conducted Emission	150 kHz to 30 MHz	2.70 dB (C.L.: Approx. 95 %, $k=2$)
Disturbance Power	30 MHz to 300 MHz	3.74 dB (C.L.: Approx. 95 %, $k=2$)
Radiated Emission	30 MHz to 1000 MHz	3.66 dB (C.L.: Approx. 95 %, $k=2$)
Radiated Emission	1 GHz Above	4.16 dB (C.L.: Approx. 95 %, $k=2$)

 CTK Co., Ltd. <small>The Prime Leader of Global Regulatory Certification</small>	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9871 Fax: +82-31-624-9501	Certificate No.: CTK-2015-01495 Page (9) / (29) Pages	
---	---	---	--

2.0 EMC Test Regulations/Standards

The tests were performed according to following regulations:

Applied standard	Title	Applied	Test Result
FCC Part 15 Subpart B <input type="checkbox"/> Class A <input checked="" type="checkbox"/> Class B	Conducted Voltage Emissions	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> MET <input type="checkbox"/> NOT MET
	Radiated Electric Field Emissions	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> MET <input type="checkbox"/> NOT MET



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (10) / (29) Pages

3.0 Results of Individual Test

3.1 Conducted Voltage Emissions of Mains ports

Test Date

2015-11-13

Test Location

Shielded Room

Test Equipment

Name of Equipment	Model No.	Manufacturer	Serial No.	Due Date	Applied
EMI Test Receiver	ESCI3	Rohde & Schwarz	100032	2016-02-02	<input checked="" type="checkbox"/>
LISN	ENV216	Rohde & Schwarz	101235	2016-05-14	<input checked="" type="checkbox"/>
LISN	ENV216	Rohde & Schwarz	101236	2016-05-14	<input type="checkbox"/>
EMI Test Receiver	ESR7	Rohde & Schwarz	101088	2016-06-12	<input type="checkbox"/>
LISN	ENV216	Rohde & Schwarz	101151	2016-11-02	<input type="checkbox"/>
LISN	ESH3-Z5	Rohde & Schwarz	100207	2016-11-02	<input type="checkbox"/>
EMI Test Receiver	ESCI7	Rohde & Schwarz	100816	2016-11-02	<input type="checkbox"/>
LISN	ENV216	Rohde & Schwarz	101760	2016-02-02	<input type="checkbox"/>
LISN	NNLK 8121	SCHWARZBECK	8121-644	2016-05-15	<input type="checkbox"/>
Pulse Limiter	VTSD 9561-F	SCHWARZBECK	9561-F064	2016-05-15	<input type="checkbox"/>
LISN	ENV216	Rohde & Schwarz	101150	2016-02-02	<input type="checkbox"/>

Test Software

ESCI7, ESCI3 : EMC32 Ver. 8.50.0

ESR7 : EMC32 Ver. 8.53.0

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Setting

IF Band Width: 9 kHz

Climate Condition

Temperature: (23 ± 1) °C

Relative Humidity: (45 ± 1) %

Atmospheric Pressure: 100 kPa



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (11) / (29) Pages

Test Result

The requirements are: MET NOT MET

[Charging mode through Notebook Computer]

Frequency (MHz)	Measured Data (dB μ V)	Margin (dB)	Remark
0.186 000	46.1	8.1	CAverage

The Result is calculated by using the following formula;

- * Result = Limit - Margin (Result included the correction factor)
- * Correction factor = Cable Loss + Insertion loss of LISN



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (12) / (29) Pages

Test Data

[Charging mode through Notebook Computer] [Line: L1]

EMI Auto Test(1)

1 / 2

Test Report


Common Information

Test Model Name: PBH-200
Test Mode: Notebook Charging
Manufacturer: PARTRON CO., LTD.
Tester: Kim Minkyu

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1
Frequency Range: 150 kHz - 30 MHz
Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 23), SN 100032/003, FW 4.42
Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0
Correction Table: 3CE Cable Loss
LISN: ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_CISPR 22 Class B_L1

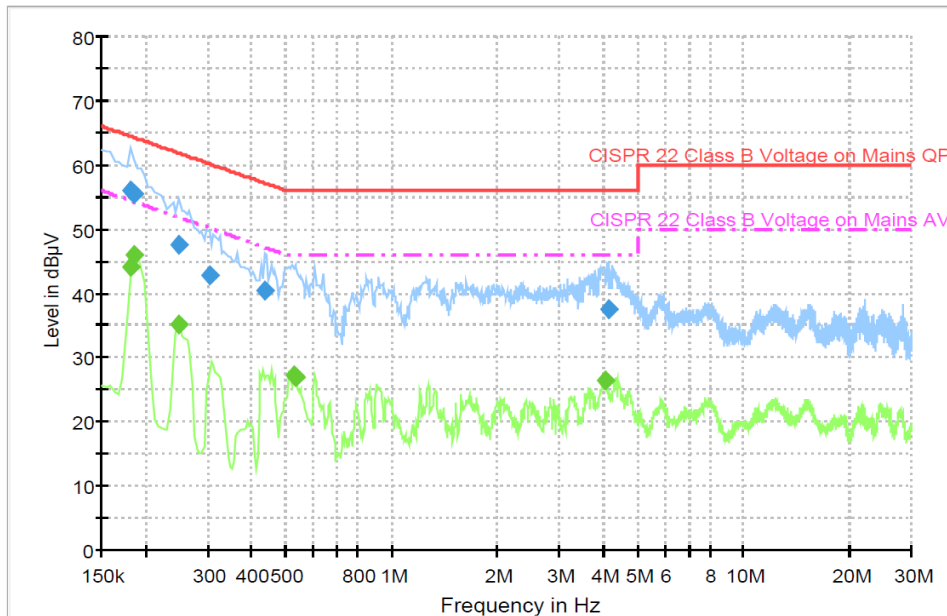

11/13/2015

3:26:26



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (13) / (29) Pages

EMI Auto Test(1)

2 / 2

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.181500	56.0	1000.0	9.000	On	L1	10.0	8.4	64.4
0.186000	55.5	1000.0	9.000	On	L1	10.0	8.7	64.2
0.249000	47.5	1000.0	9.000	On	L1	9.8	14.3	61.8
0.303000	42.6	1000.0	9.000	On	L1	10.0	17.5	60.2
0.438000	40.3	1000.0	9.000	On	L1	10.1	16.8	57.1
4.137000	37.5	1000.0	9.000	On	L1	9.9	18.5	56.0

Final Result 2

Frequency (MHz)	CAverage (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.181500	44.0	1000.0	9.000	On	L1	10.0	10.4	54.4
0.186000	46.1	1000.0	9.000	On	L1	10.0	8.1	54.2
0.249000	35.2	1000.0	9.000	On	L1	9.8	16.6	51.8
0.528000	27.1	1000.0	9.000	On	L1	10.1	18.9	46.0
0.537000	26.9	1000.0	9.000	On	L1	10.1	19.1	46.0
4.033500	26.5	1000.0	9.000	On	L1	9.9	19.5	46.0

11/13/2015

3:26:26



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (14) / (29) Pages

[Charging mode through Notebook Computer] [Line : Neutral]

EMI Auto Test(1)

1 / 2

Test Report


Common Information

Test Model Name: PBH-200
Test Mode: Notebook Charging
Manufacturer: PARTRON CO., LTD.
Tester: Kim Minkyu

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1
Frequency Range: 150 kHz - 30 MHz
Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 23), SN 100032/003, FW 4.42
Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0
Correction Table: 3CE Cable Loss
LISN: ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_CISPR 22 Class B_N

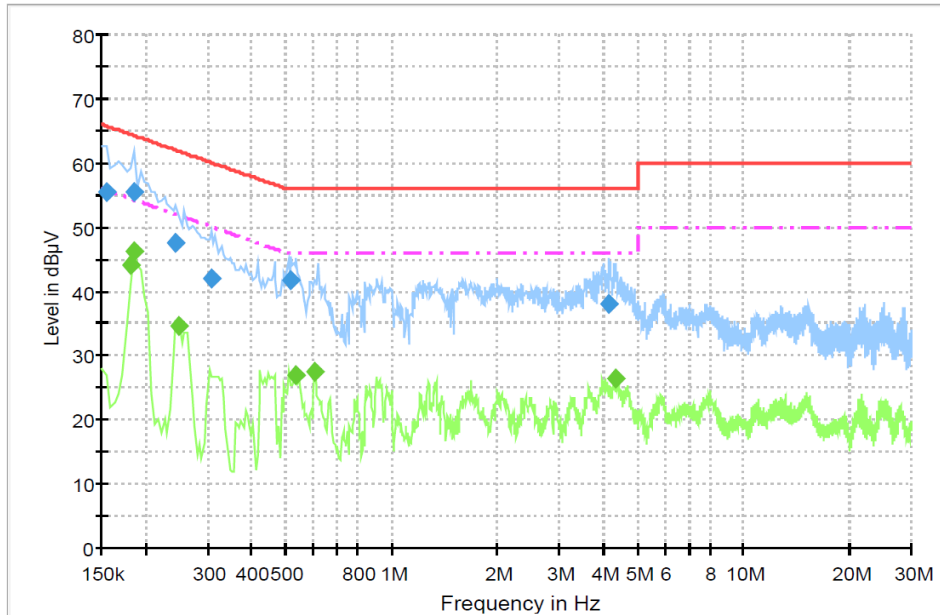

11/13/2015

3:37:47



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (15) / (29) Pages

EMI Auto Test(1)

2 / 2

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.154500	55.4	1000.0	9.000	On	N	9.8	10.3	65.8
0.186000	55.5	1000.0	9.000	On	N	9.9	8.7	64.2
0.244500	47.5	1000.0	9.000	On	N	9.7	14.4	61.9
0.307500	41.9	1000.0	9.000	On	N	9.8	18.1	60.0
0.519000	41.6	1000.0	9.000	On	N	10.0	14.4	56.0
4.159500	38.0	1000.0	9.000	On	N	9.8	18.0	56.0

Final Result 2

Frequency (MHz)	CAverage (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.181500	44.0	1000.0	9.000	On	N	9.9	10.4	54.4
0.186000	46.1	1000.0	9.000	On	N	9.9	8.1	54.2
0.249000	34.6	1000.0	9.000	On	N	9.7	17.2	51.8
0.532500	26.9	1000.0	9.000	On	N	10.0	19.1	46.0
0.604500	27.4	1000.0	9.000	On	N	10.0	18.6	46.0
4.335000	26.4	1000.0	9.000	On	N	9.8	19.6	46.0

11/13/2015

3:37:47



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (16) / (29) Pages

3.2 Radiated Electric Field Emissions (Below 1 GHz)

Test Date

2015-11-13

Test Location

10 m SAC (test distance : 10 m, 3 m)

Test Equipment

Name of Equipment	Model No.	Manufacturer	Serial No.	Due Date	Applied
EMI Test Receiver	ESCI7	Rohde & Schwarz	100814	2016-11-02	<input checked="" type="checkbox"/>
Bilog Antenna	CBL6111C	Schaffner	2551	2017-04-24	<input checked="" type="checkbox"/>
6dB Attenuator	DNF	Rohde & Schwarz	272.4110.50-2	2016-11-03	<input checked="" type="checkbox"/>
Amplifier	310	Sonoma Instrument Co.	291721	2016-02-02	<input checked="" type="checkbox"/>

Test Software

TOYO EMI software Ver. 5.1.0

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Setting

IF Band Width: 120 kHz

Climate Condition

Temperature: (23 ± 1) °C

Relative Humidity: (46 ± 1) %

Atmospheric Pressure: 100 kPa

Test Result

The requirements are: MET NOT MET

[Charging mode through Notebook Computer]

Frequency (MHz)	Measured Data (dB μ V/m)	Margin (dB)	Remark
269.590	37.2	8.8	Quasi-peak

The Result is calculated by using the following formula;

* Result = Reading + Correction factor

* Correction factor = Antenna Factor + Cable Loss + 6 dB attenuator - Amp Gain




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9871
 Fax: +82-31-624-9501

Certificate No.:
 CTK-2015-01495
 Page (17) / (29) Pages

Test Data

[Charging mode through Notebook Computer]

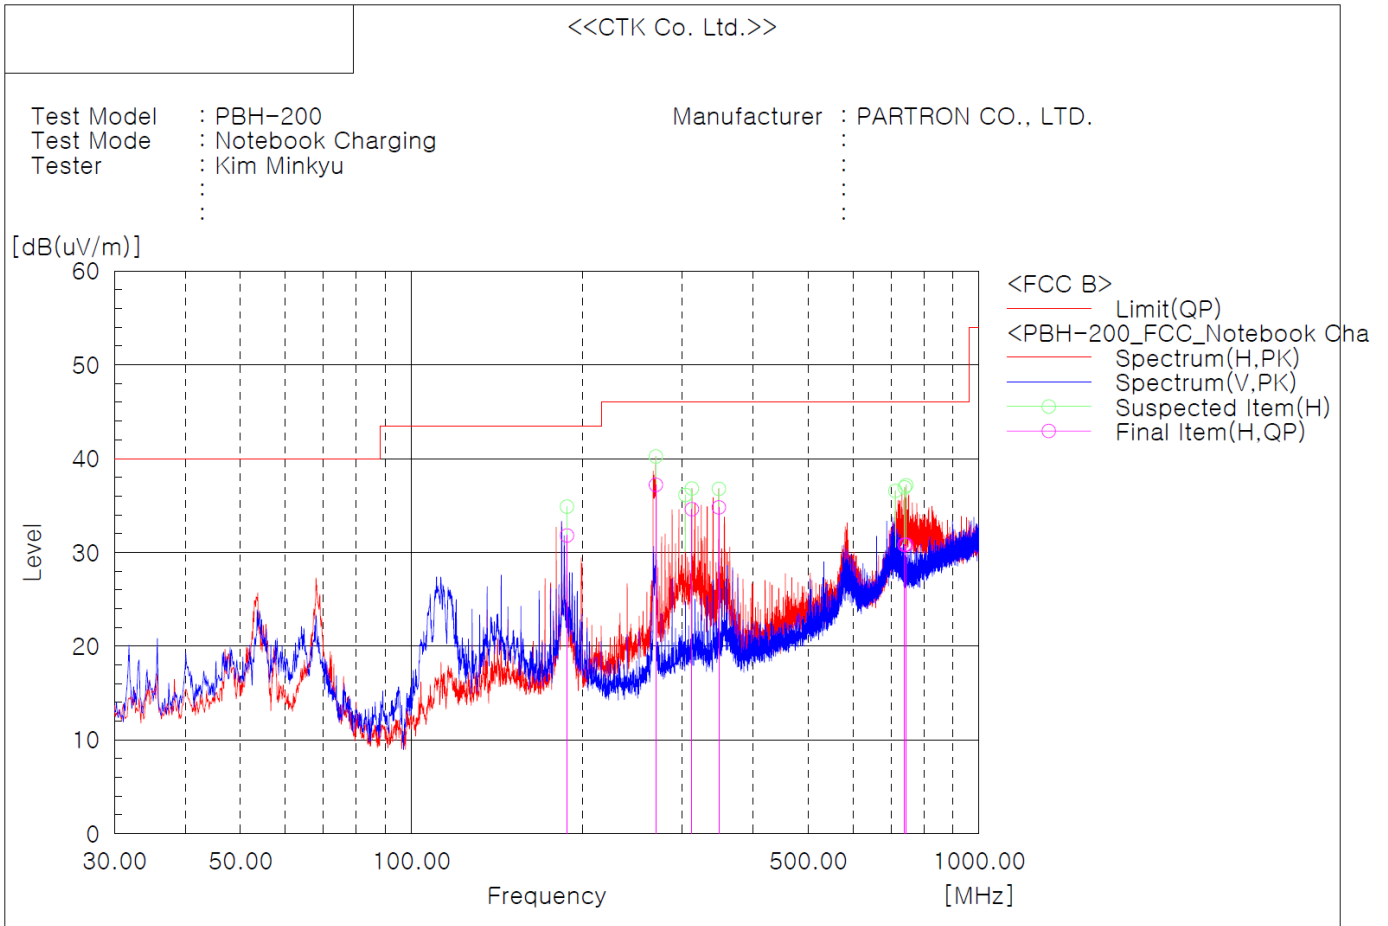

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	187.989	H	44.3	-12.5	31.8	43.5	11.7	100.0	126.0
2	269.590	H	46.5	-9.3	37.2	46.0	8.8	100.0	89.0
3	312.028	H	42.5	-7.9	34.6	46.0	11.4	100.0	52.0
4	348.039	H	41.6	-6.8	34.8	46.0	11.2	100.0	350.0
5	739.434	H	28.0	2.8	30.8	46.0	15.2	100.0	52.0
6	744.284	H	27.9	2.9	30.8	46.0	15.2	100.0	52.0

 CTK Co., Ltd. <small>The Prime Leader of Global Regulatory Certification</small>	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9871 Fax: +82-31-624-9501	Certificate No.: CTK-2015-01495 Page (18) / (29) Pages	
---	---	--	--

3.3 Radiated Electric Field Emissions (Above 1 GHz)

Test Date

Not applicable

Test Location

3 m SAC

Test Equipment

Name of Equipment	Model No.	Manufacturer	Serial No.	Due Date	Applied
EMI Test Receiver	ESCI7	Rohde & Schwarz	100816	2016-11-02	<input type="checkbox"/>
Double Ridged Guide Antenna	3117	ETS-Lindgren	00154525	2017-09-02	<input type="checkbox"/>
Preamplifier	8449B	Agilent Technologies	3008A02011	2015-12-26	<input type="checkbox"/>

Test Software

TOYO EMI software Ver. 5.1.0

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Setting

IF Band Width: 1 MHz

Climate Condition

Temperature:

Relative Humidity:

Atmospheric Pressure:

Test Result

The requirements are: MET NOT MET

Frequency (MHz)	Measured Data (dBµV/m)	Margin (dB)	Remark

The Result is calculated by using the following formula;

* Result = Reading + Correction factor

* Correction factor = Antenna Factor + Cable Loss- Amp Gain

Test Data



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9871

Fax: +82-31-624-9501

Certificate No.:

CTK-2015-01495

Page (19) / (29) Pages

APPENDIX A - Test Setup Photos and Configuration




CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (20) / (29) Pages

Conducted Voltage Emissions of Mains Ports

[Charging mode through Notebook Computer]

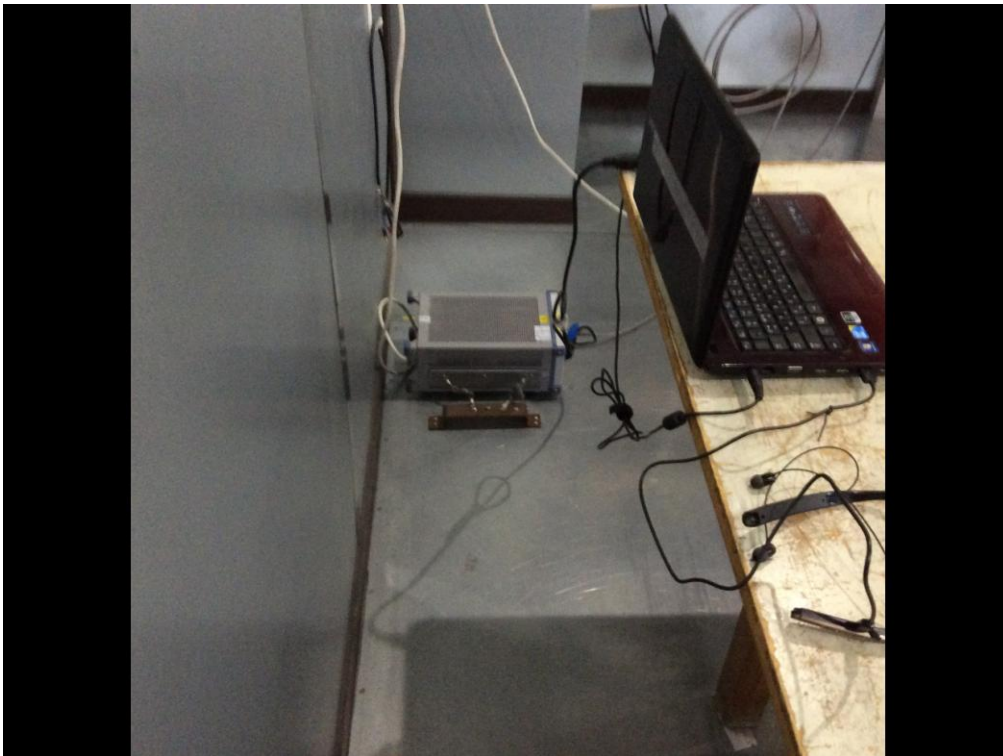





CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (21) / (29) Pages

Radiated Electric Field Emissions (Below 1 GHz)

[Charging mode through Notebook Computer]

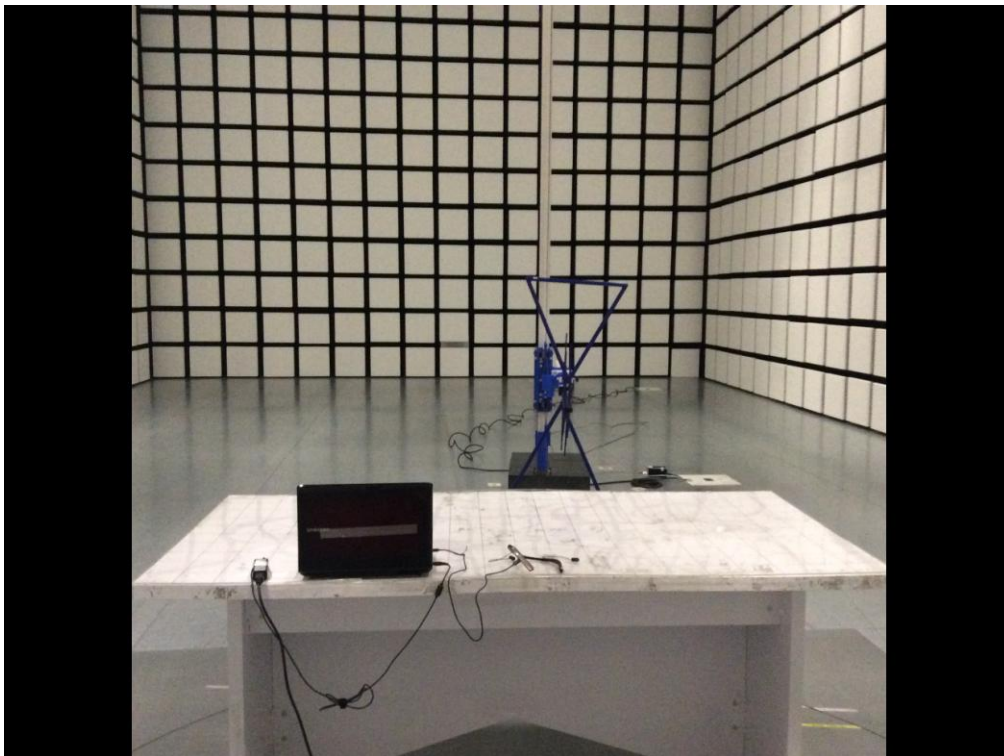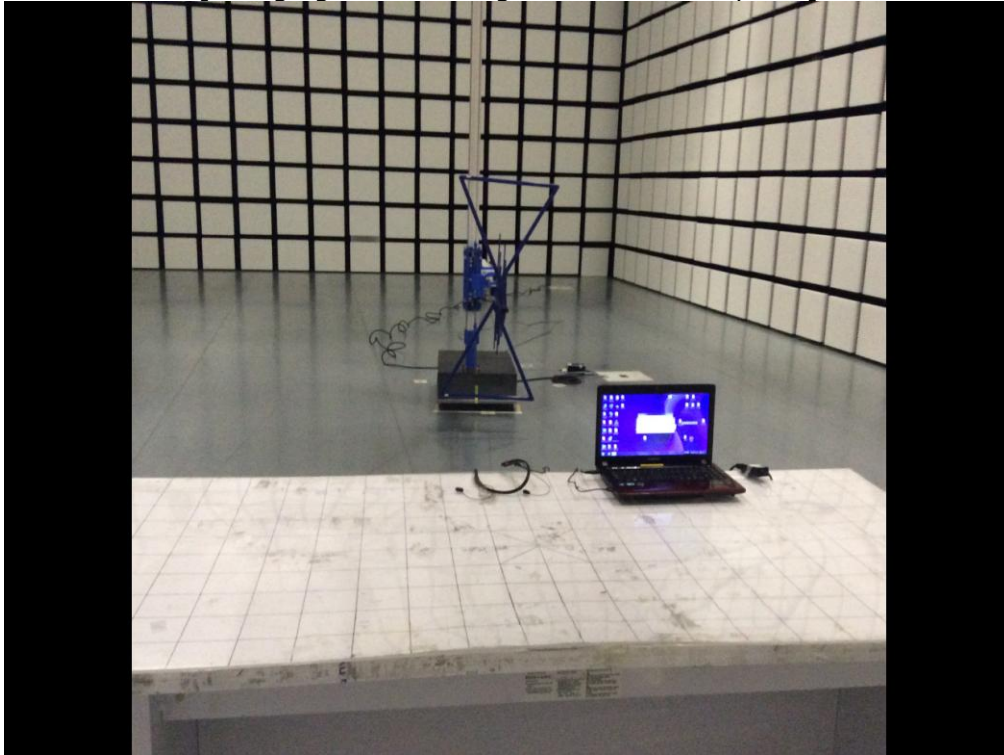



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9871

Fax: +82-31-624-9501

Certificate No.:

CTK-2015-01495

Page (22) / (29) Pages

Radiated Electric Field Emissions (Above 1 GHz)

Not Applicable



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (23) / (29) Pages

APPENDIX B – EUT Photographs



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (24) / (29) Pages

EUT External Photographs





CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (25) / (29) Pages





CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (26) / (29) Pages

EUT Internal Photographs







CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (27) / (29) Pages

PCB

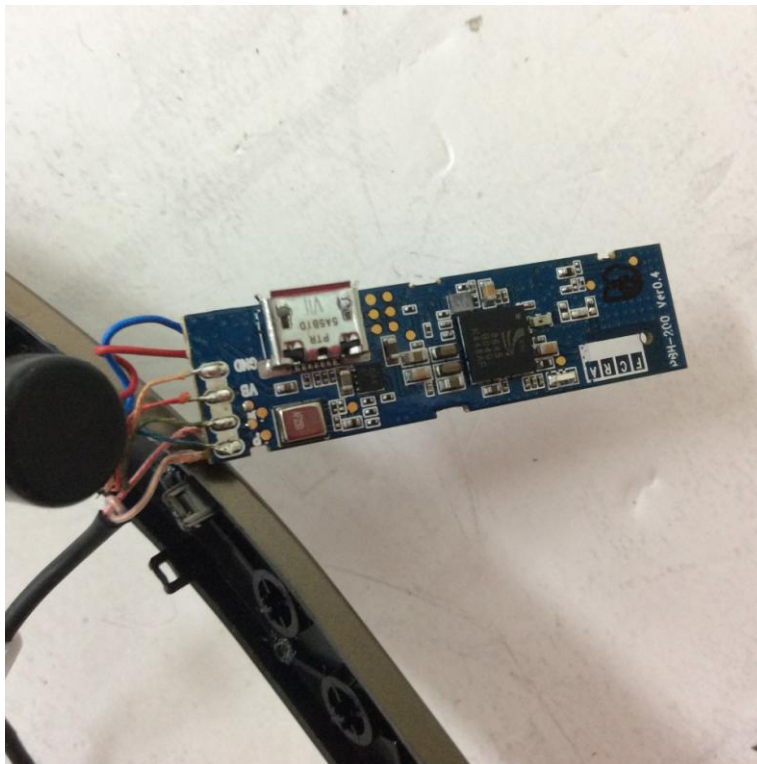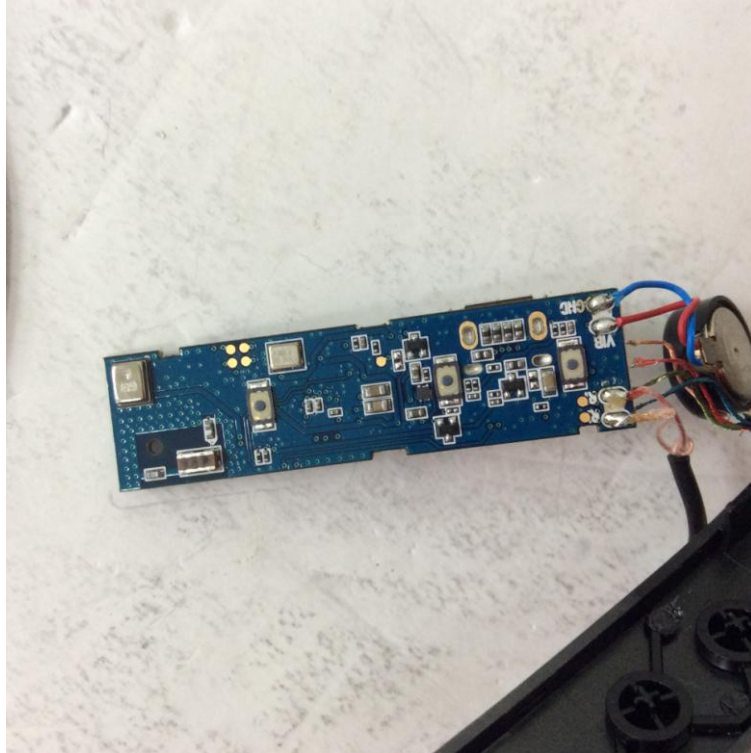



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (28) / (29) Pages





CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9871
Fax: +82-31-624-9501

Certificate No.:
CTK-2015-01495
Page (29) / (29) Pages

