



Test Report No.: RF190312N016



# TEST REPORT



Applicant	Shenzhen Orderly Electronics Co., Ltd
Address	4F, Building7, Asian Industrial Park,Bantian Street, Longgang District, Shenzhen, China

Manufacturer or Supplier	Shenzhen Orderly Electronics Co., Ltd
Address	4F, Building7, Asian Industrial Park,Bantian Street, Longgang District, Shenzhen, China
Product	Fast Wireless Charging Windshield/Dash Mount
Brand Name	blackweb, CRAIG, MAGNAVOX
Model	BWA19AV906
Additional Model & Model Difference	CCH3350, MCH3350, MMH3350, see items 3.1
Date of tests	Mar. 12, 2019 ~ Apr. 15, 2019

The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

**FCC Part 15, Subpart C**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Ryan Lu Project Engineer / EMC Department	Approved by Glyn He Supervisor / EMC Department
	  Date: Apr. 17, 2019

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>3</b>
<b>1 SUMMARY OF TEST RESULTS .....</b>	<b>4</b>
<b>2 MEASUREMENT UNCERTAINTY .....</b>	<b>4</b>
<b>3 GENERAL INFORMATION.....</b>	<b>5</b>
3.1 GENERAL DESCRIPTION OF EUT .....	5
3.2 DESCRIPTION OF TEST MODES .....	6
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	7
3.4 DESCRIPTION OF SUPPORT UNITS .....	7
<b>4 EMISSION TEST.....</b>	<b>8</b>
4.1 CONDUCTED EMISSION MEASUREMENT .....	8
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	8
4.1.2 TEST INSTRUMENTS.....	8
4.1.3 TEST PROCEDURE .....	9
4.1.4 DEVIATION FROM TEST STANDARD .....	9
4.1.5 TEST SETUP .....	10
4.1.6 EUT OPERATING CONDITIONS .....	10
4.1.7 TEST RESULTS .....	11
4.2 RADIATED EMISSION MEASUREMENT .....	13
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	13
4.2.2 TEST INSTRUMENTS.....	14
4.2.3 TEST PROCEDURE .....	15
4.2.4 DEVIATION FROM TEST STANDARD .....	15
4.2.5 TEST SETUP .....	16
4.2.6 EUT OPERATING CONDITIONS .....	16
4.2.7 TEST RESULTS .....	17
4.3 20dB BANDWIDTH MEASUREMENT .....	23
4.3.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT .....	23
4.3.2 TEST INSTRUMENTS.....	23
4.3.3 TEST PROCEDURE .....	24
4.3.4 DEVIATION FROM TEST STANDARD .....	24
4.3.5 TEST SETUP .....	24
4.3.6 EUT OPERATING CONDITION .....	25
4.3.7 TEST RESULTS .....	25
<b>5 PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>27</b>
<b>6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>28</b>



**BUREAU  
VERITAS**

Test Report No.: RF190312N016

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF190312N016	Original release	Apr. 17, 2019



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
§15.203	Antenna Requirement	PASS	Coil antenna is used.
§15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
§15.209	Radiated Emission	PASS	Meet the requirement of limit.
§15.215 (c)	20dB Bandwidth	PASS	Meet the requirement of limit.

# 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	4.04dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Fast Wireless Charging Windshield/Dash Mount
<b>MODEL NO.</b>	BWA19AV906
<b>ADDITIONAL MODELS</b>	CCH3350, MCH3350, MMH3350
<b>FCC ID</b>	2AD5YWCCH3350
<b>POWER SUPPLY</b>	Input: DC 5V or 9V
<b>MODULATION TYPE</b>	FSK
<b>OPERATING FREQUENCY</b>	110KHz ~ 205KHz
<b>ANTENNA TYPE</b>	Coil Antenna
<b>CABLE SUPPLIED</b>	Unshielded, Detachable 1.0m

#### NOTES:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 190312N016) for detailed product photo.
4. Additional models CCH3350, MCH3350, MMH3350 are identical with the test model BWA19AV906 except the model number and trade name for marketing purpose.



### 3.2 DESCRIPTION OF TEST MODES

The EUT was tested under the following modes the final worst mode was marked in boldface and recorded in this report.

#### CONDUCTED EMISSION TEST:

TEST FREQUENCY	TEST MODE
145KHz	DC 5V input charging
<b>145KHz</b>	<b>DC 9V input charging</b>
113KHz	DC 5V input Standby
113KHz	DC 9V input Standby

#### RADIATED EMISSION TEST (BELOW 1GHZ):

TEST FREQUENCY	TEST MODE
<b>145KHz</b>	<b>DC 5V input charging</b>
145KHz	DC 9V input charging
113KHz	DC 5V input Standby
113KHz	DC 9V input Standby

#### 20dB BANDWIDTH TEST:

TEST FREQUENCY	TEST MODE
<b>145KHz</b>	<b>DC 5V input charging</b>
<b>113KHz</b>	<b>DC 5V input Standby</b>



### **3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### **FCC Part 15, Subpart C ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

### **3.4 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

<b>NO.</b>	<b>PRODUCT</b>	<b>BRAND</b>	<b>MODEL NO.</b>	<b>SERIAL NO.</b>	<b>FCC ID</b>
1	Adapter	SAMSUNG	EP-TA20JBS	N/A	N/A
2	Adapter	APPLE	A1299	N/A	N/A
3	Mobile Phone	SAMSUNG	SM-G950FD	N/A	N/A

Remarks: worst case mode test result shown on the report.

<b>NO.</b>	<b>DESCRIPTION OF THE ABOVE SUPPORT UNITS</b>
1	N/A
2	N/A
3	N/A

Remarks: worst-case test result shown on the report only.



## 4 EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTES:**
- (1) The lower limit shall apply at the transition frequencies.
  - (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Mar. 12,19	Mar. 11,20
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 12,19	Mar. 11,20
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Mar. 13,19	Mar. 12,20
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 17,19	Jan. 16,20
Test software	ADT	ADT_Cond _V7.3.7	N/A	N/A	N/A

- NOTES:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in shielding room 553.





#### 4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

#### NOTES:


1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



#### 4.1.5 TEST SETUP

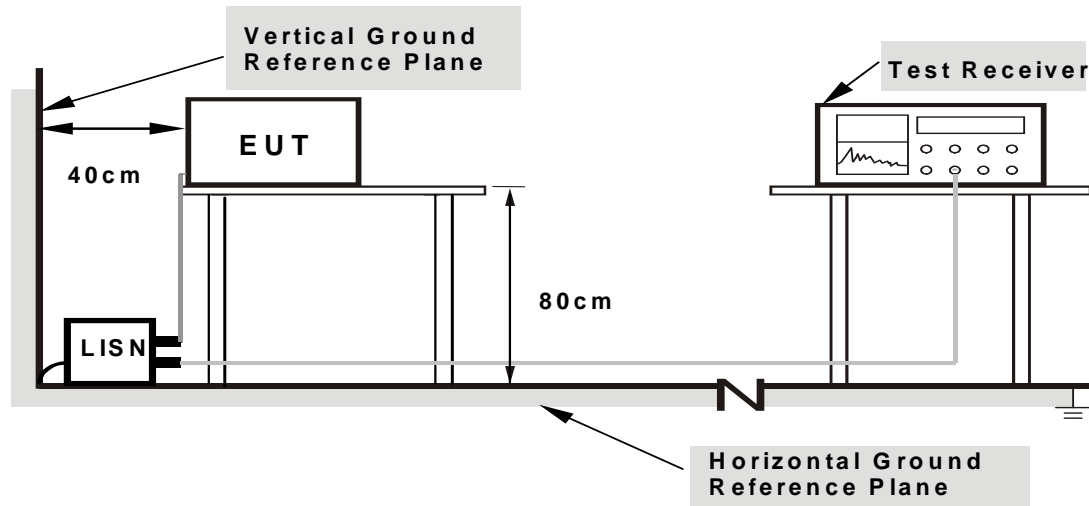

- Note:**
- 1.Support units were connected to second LISN.
  - 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power of all equipment.
- b. EUT was operated according to the type description in manufacturer's specifications or the User's Manual.




### 4.1.7 TEST RESULTS

<b>TEST MODE</b>	DC 9V input Charging	<b>6DB BANDWIDTH</b>	9 kHz
<b>TEST VOLTAGE</b>	DC 9V from adapter input AC 120V 60Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 52% RH	<b>TESTED BY</b>	Dragon

No.	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.94	27.04	1.04	36.98	10.98	66.00	56.00	-29.02	-45.02
2	0.65175	10.12	24.58	2.21	34.70	12.33	56.00	46.00	-21.30	-33.67
3	1.60048	10.26	21.32	-6.57	31.58	3.69	56.00	46.00	-24.42	-42.31
4	3.34725	9.71	15.64	-3.49	25.35	6.22	56.00	46.00	-30.65	-39.78
5	5.09325	10.17	14.27	3.98	24.44	14.15	60.00	50.00	-35.56	-35.85
6	16.59300	9.91	21.81	13.63	31.72	23.54	60.00	50.00	-28.28	-26.46


**REMARKS:** The emission levels of other frequencies were very low against the limit.

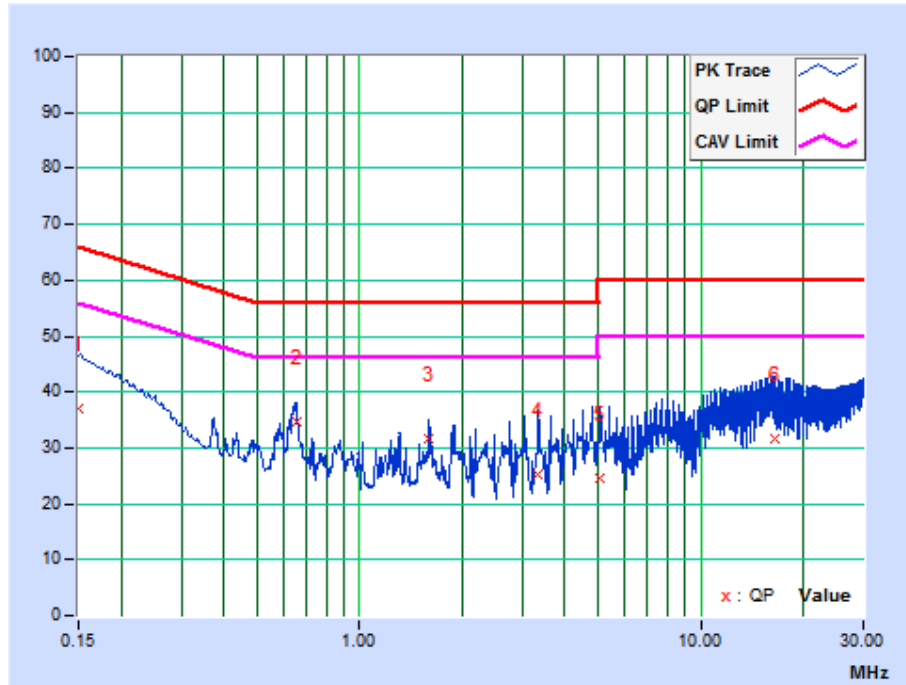

<b>TEST MODE</b>	DC 9V input Charging	<b>6DB BANDWIDTH</b>	9 kHz
<b>TEST VOLTAGE</b>	DC 9V from adapter input AC 120V 60Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 52% RH	<b>TESTED BY</b>	Dragon

No.	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15632	9.86	42.01	24.40	51.87	34.26	65.66	55.66	-13.78	-21.39
2	0.18756	10.00	38.89	20.75	48.89	30.75	64.14	54.14	-15.26	-23.40
3	0.21976	9.77	36.24	16.16	46.01	25.93	62.83	52.83	-16.82	-26.90
4	0.25144	9.79	33.28	13.59	43.07	23.38	61.71	51.71	-18.64	-28.33
5	0.44007	10.11	22.48	12.77	32.59	22.88	57.06	47.06	-24.47	-24.18
6	0.63019	9.87	24.89	17.32	34.76	27.19	56.00	46.00	-21.24	-18.81

**REMARKS:** The emission levels of other frequencies were very low against the limit.

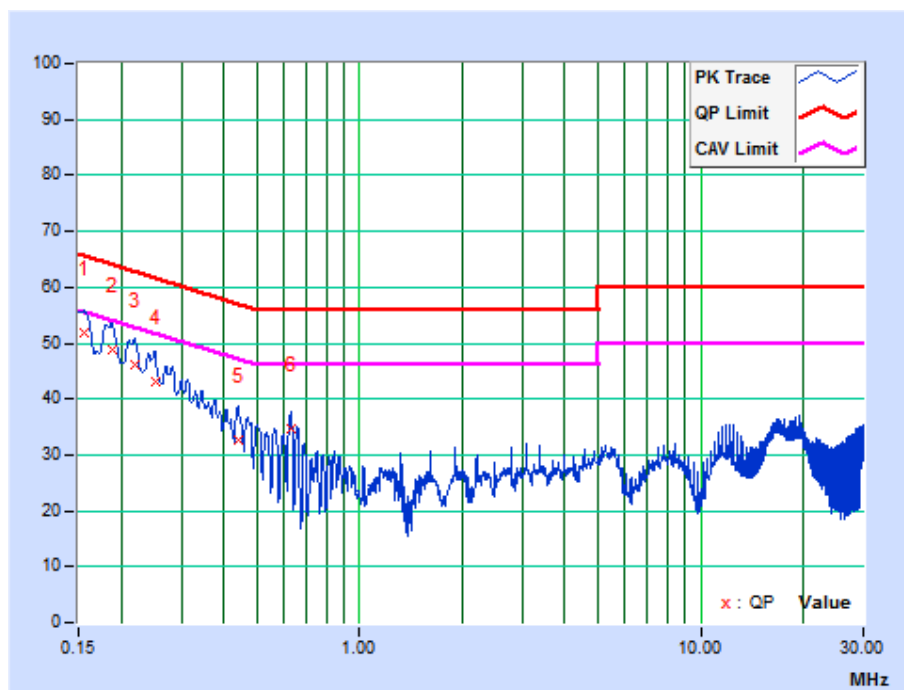



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart C, Section 15.209

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**NOTES:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$



### 4.2.2 TEST INSTRUMENTS

#### FREQUENCY 9KHz-30MHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101564	Mar. 12,19	Mar. 11,20
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	1519B-045	May 04,18	May 03,19
Amplifier	Burgeon	BPA-530	100210	Apr. 18,18	Apr. 18,19
Test Software	ADT	ADT_Radiated_V8.7.07	N/A	N/A	N/A

- NOTES:**
1. The test was performed in 10m Chamber.
  2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  3. The FCC Site Registration No. is 749762.

#### FREQUENCY 30MHz-1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU26	100005	Aug. 24,18	Aug. 23,19
EMI Test Receiver	Rohde&Schwarz	ESCI	101418	Mar. 12,19	Mar. 11,20
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-555	Nov. 10, 18	Nov. 09, 19
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-554	Dec. 10, 18	Dec. 09, 19
Preamplifier	EMCI	EMC1135	980378	Mar. 15,19	Mar. 14,20
Preamplifier	EMCI	EMC1135	980423	Mar. 15,19	Mar. 14,20
10m Semi-anechoic Chamber	CHANGLING	21.4m*12.1m*8.8m	NSEMC006	Feb. 10,18	Feb. 09,20
Test Software	ADT	ADT_Radiated_V8.7.07	N/A	N/A	N/A

- NOTES:**
1. The test was performed in 10m Chamber.
  2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  3. The FCC Site Registration No. is 749762.



### 4.2.3 TEST PROCEDURE

#### < Below 30MHz >

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meters Semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

#### <30MHz~1GHz >

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### NOTES:


1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
4. Margin value = Emission level – Limit value.

### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

## 4.2.5 TEST SETUP

### Below 30MHz test setup

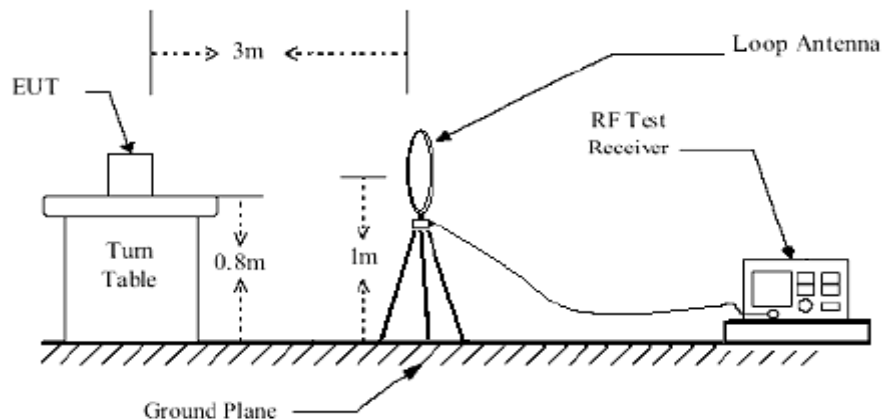

### Below 1GHz test setup

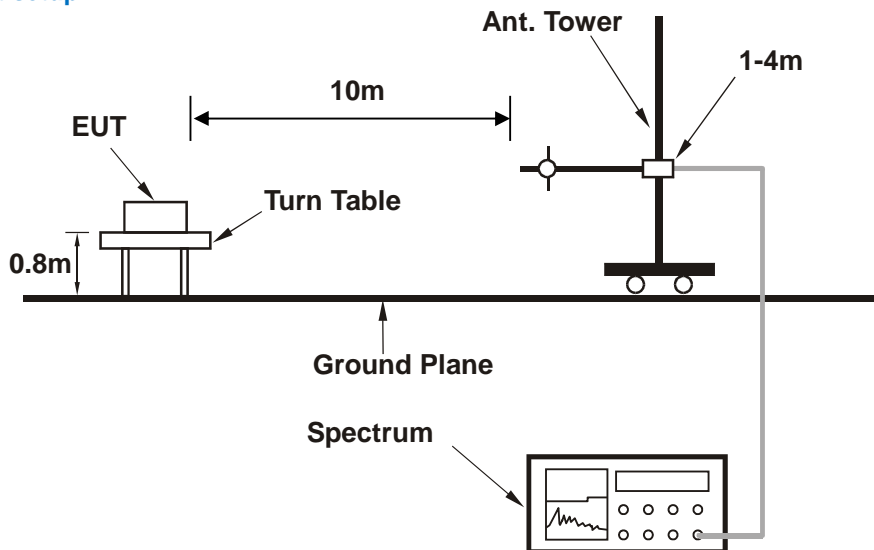

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 4.2.6 EUT OPERATING CONDITIONS

- a. Turn on the power supply of the EUT.
- b. EUT was operated according to the type description in manufacturer's specifications or the User's Manual.






### 4.2.7 TEST RESULTS

<b>TEST MODE</b>	DC 5V input Charging	<b>FREQUENCY RANGE</b>	9 -150KHz
<b>TEST VOLTAGE</b>	DC 5V from adapter input AC 120V 60Hz	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 200Hz
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 54% RH	<b>TESTED BY:</b> Vincent	

ANTENNA POLARITY & TEST DISTANCE: PARALLEL AT 3M								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.03520	-11.08	52.78	41.70	116.67	-74.97	100	35
2	0.06050	-11.41	42.85	31.44	111.97	-80.53	100	72
3	0.06480	-11.40	47.76	36.36	111.37	-75.01	100	122
4	0.08420	-11.37	40.13	28.76	109.10	-80.34	100	72
5	0.10010	-11.33	53.21	41.88	107.59	-65.71	100	127
6	0.14610	-11.20	90.17	78.97	104.31	-25.34	100	36


- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 0.009-0.15MHz.
  4. Only emissions significantly above equipment noise floor are reported.

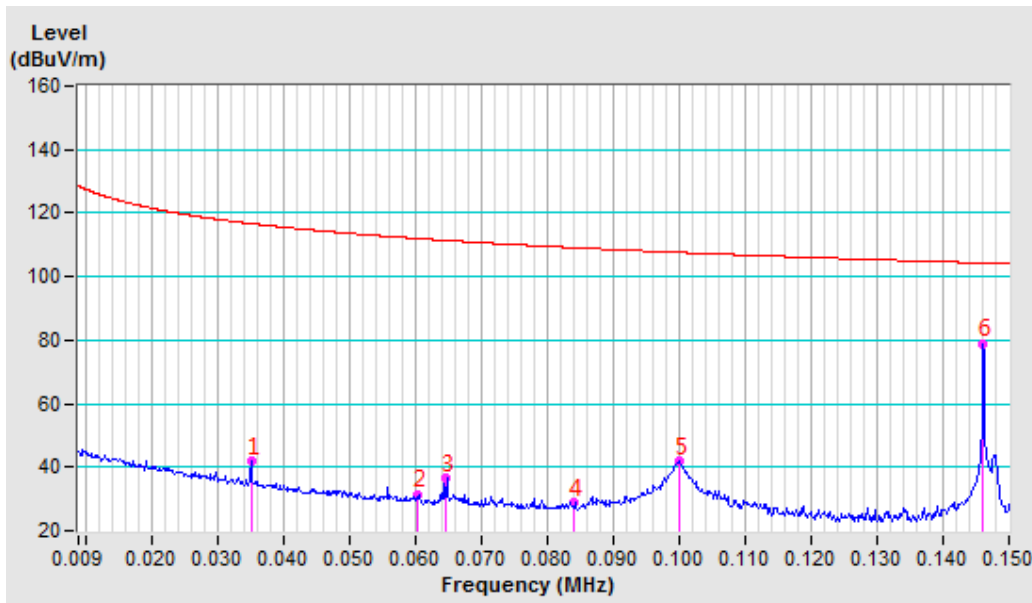

<b>TEST MODE</b>	DC 5V input Charging	<b>FREQUENCY RANGE</b>	150KHz-30MHz
<b>TEST VOLTAGE</b>	DC 5V from adapter input AC 120V 60Hz	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 200Hz
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 54% RH	<b>TESTED BY:</b> Vincent	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: PARALLEL AT 3M</b>								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.15000	-11.19	81.66	70.47	104.08	-33.61	100	325
2	0.43810	-11.28	65.76	54.48	94.77	-40.29	100	172
3	0.73060	-10.86	56.57	45.71	70.65	-24.94	100	73
4	1.02170	-10.92	50.98	40.06	68.01	-27.95	100	128
5	1.60680	-10.95	43.23	32.28	64.44	-32.16	100	267
6	1.89930	-10.96	41.02	30.06	69.54	-39.48	100	207


- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 0.15-30MHz.
  4. Only emissions significantly above equipment noise floor are reported.

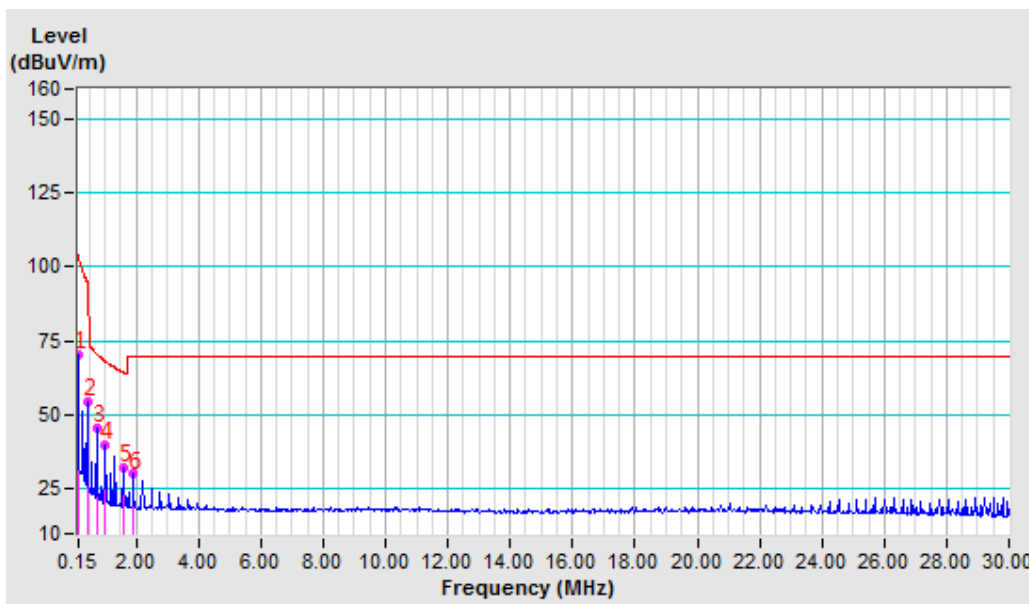

<b>TEST MODE</b>	DC 5V input Charging	<b>FREQUENCY RANGE</b>	9 -150KHz
<b>TEST VOLTAGE</b>	DC 5V from adapter input AC 120V 60Hz	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 200Hz
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 54% RH	<b>TESTED BY:</b> Ming Bai	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: PERPENDICYLARL AT 3M</b>								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.03520	-11.08	52.94	41.86	116.67	-74.81	100	325
2	0.05590	-11.42	46.35	34.93	112.65	-77.72	100	42
3	0.06430	-11.40	45.37	33.97	111.44	-77.47	100	38
4	0.08290	-11.38	42.79	31.41	109.23	-77.82	100	63
5	0.10030	-11.33	58.43	47.10	107.58	-60.48	100	95
6	0.14610	-11.20	95.77	84.57	104.31	-19.74	100	125


- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 0.009-0.15MHz.
  4. Only emissions significantly above equipment noise floor are reported.

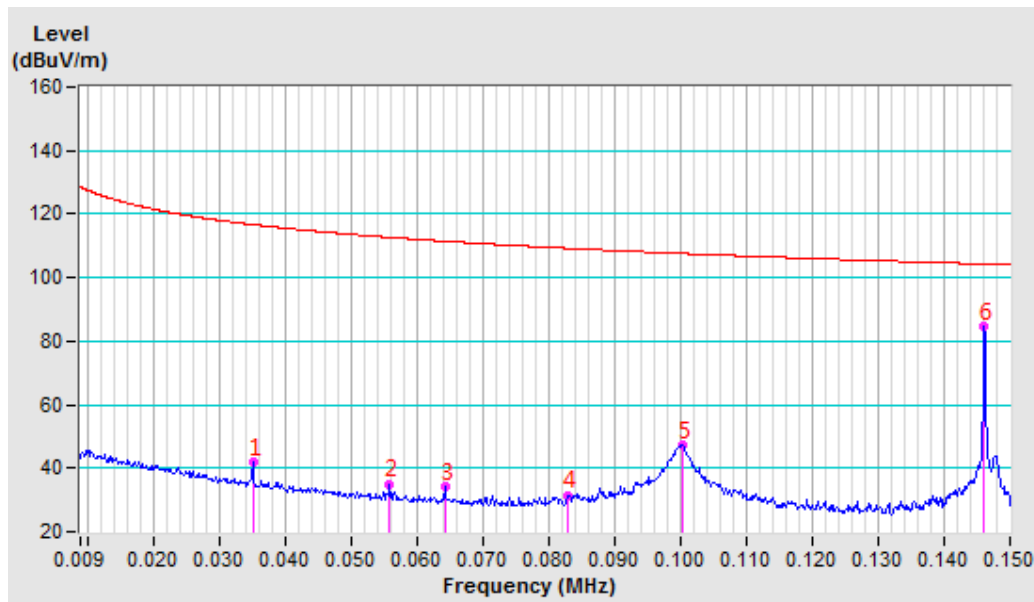

<b>TEST MODE</b>	DC 5V input Charging	<b>FREQUENCY RANGE</b>	150KHz-30MHz
<b>TEST VOLTAGE</b>	DC 5V from adapter input AC 120V 60Hz	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 200Hz
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 54% RH	<b>TESTED BY:</b> Vincent	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: PERPENDICYLARL AT 3M</b>								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.15000	-11.19	86.62	75.43	104.08	-28.65	100	325
2	0.27980	-11.14	77.74	66.60	98.67	-32.07	100	25
3	0.40960	-11.26	71.39	60.13	95.36	-35.23	100	72
4	0.71240	-10.91	62.27	51.36	70.85	-19.49	100	35
5	1.01520	-10.92	56.35	45.43	68.06	-22.63	100	135
6	1.27480	-10.93	52.16	41.23	66.26	-25.03	100	83


- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 0.15-30MHz
  4. Only emissions significantly above equipment noise floor are reported.

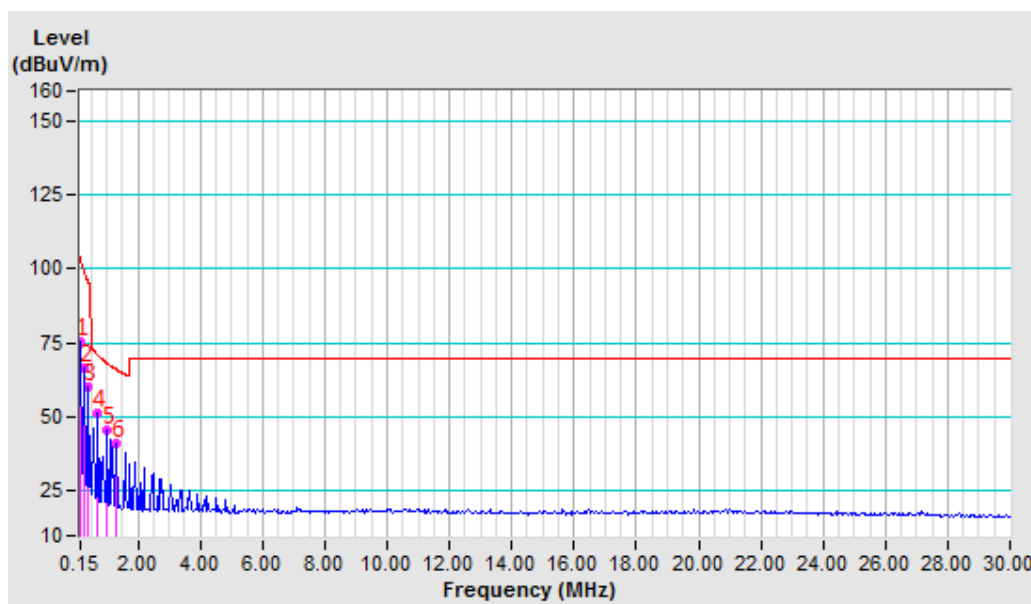

<b>TEST MODE</b>	DC 5V input Charging	<b>FREQUENCY RANGE</b>	30-1000MHz
<b>TEST VOLTAGE</b>	DC 5V from adapter input AC 120V 60Hz	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 55% RH	<b>TESTED BY:</b> Ming Bai	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 10M</b>								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	67.951	-19.46	38.04	18.58	30.00	-11.42	200	40
2	94.141	-20.84	40.45	19.61	30.00	-10.39	400	225
3	146.885	-17.39	39.30	21.91	30.00	-8.09	400	14
4	213.936	-18.52	45.49	26.97	30.00	-3.03	400	286
5	292.021	-15.51	39.15	23.64	37.00	-13.36	400	298
6	347.190	-14.64	34.77	20.13	37.00	-16.87	400	324

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 30MHz to 1000MHz.
  4. Only emissions significantly above equipment noise floor are reported.

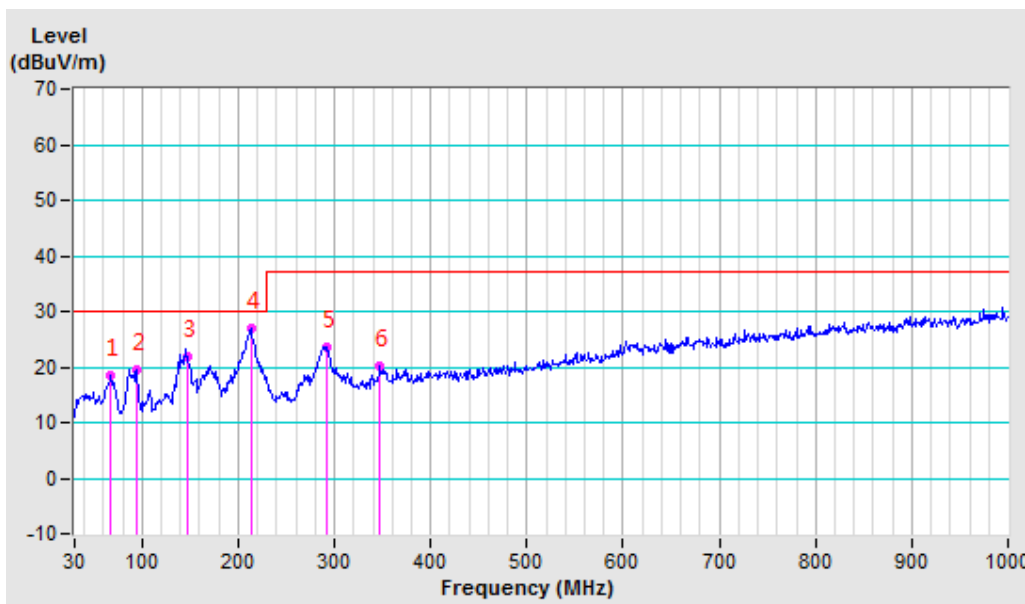




<b>TEST MODE</b>	DC 5V input Charging	<b>FREQUENCY RANGE</b>	30-1000MHz
<b>TEST VOLTAGE</b>	DC 5V from adapter input AC 120V 60Hz	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 55% RH	<b>TESTED BY:</b> Ming Bai	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	35.280	-17.83	43.33	25.50	30.00	-4.50	100	32
2	70.890	-19.73	46.33	26.60	30.00	-3.40	100	325
<b>3</b>	<b>93.470</b>	<b>-20.96</b>	<b>48.46</b>	<b>27.50</b>	<b>30.00</b>	<b>-2.50</b>	<b>100</b>	<b>25</b>
4	170.170	-16.28	42.18	25.90	30.00	-4.10	100	224
5	214.988	-18.47	45.04	26.57	30.00	-3.43	100	358
6	289.828	-15.00	37.88	22.88	37.00	-14.12	100	351

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 30MHz to 1000MHz.
  4. Only emissions significantly above equipment noise floor are reported.

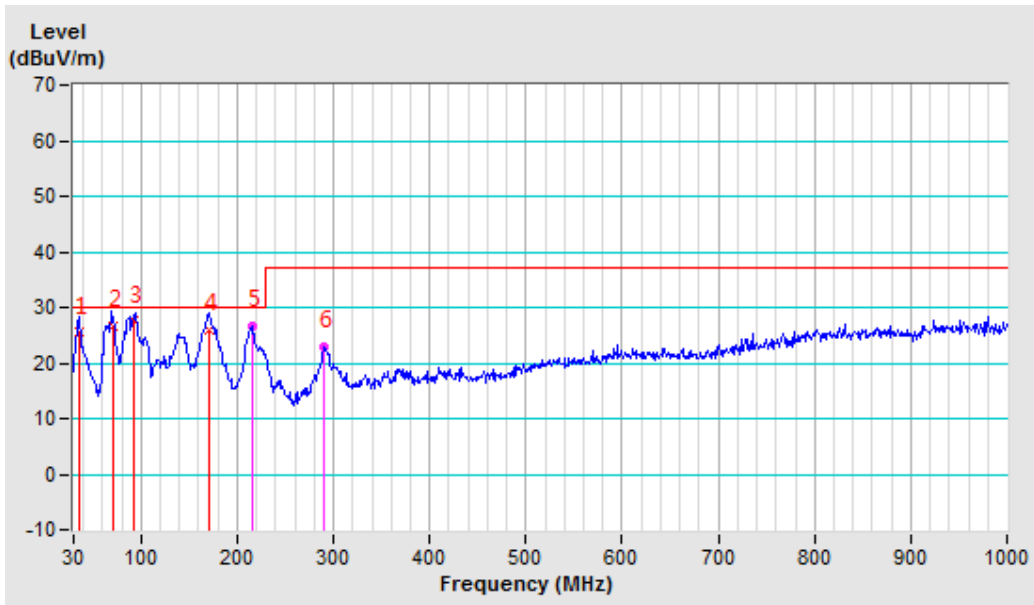



### 4.3. 20dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT

The field strength of any emissions appearing between the band edges and out of band shall be attenuated at least 20 dB below the level of the unmodulated carrier or to the general limits in Section 15.209.

#### 4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Jun. 13,18	Jun. 12,19
Power Sensor	Keysight	U2021XA	MY55060018	Jun. 13,18	Jun. 12,19
Power Meter	Anritsu	ML2495A	1139001	Mar. 12,19	Mar. 11,20
Power Sensor	Anritsu	MA2411B	1531155	Mar. 12,19	Mar. 11,20
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 17, 18	Oct.16, 19
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Nov.15,18	Nov. 14,19
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 09,18	Nov. 08,19
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Aug. 02,18	Aug. 01,19
Signal Generator	Agilent	N5183A	MY50140980	Dec. 07,18	Dec. 06,19
Agile Signal Generator	Agilent	8645A	Agilent	Oct.27, 18	Oct.26, 19
Spectrum Analyzer	Keysight	N9020A	MY55400499	Mar. 12,19	Mar. 11,20
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Dec. 07, 18	Dec. 06, 19
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

**NOTES:**

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.


### 4.3.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.3.5 TEST SETUP

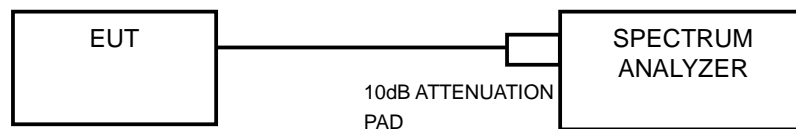



### 4.3.6 EUT OPERATING CONDITION


- Turn on the EUT.
- The EUT tested in charging mode and standby mode respectively.

### 4.3.7 TEST RESULTS

TEST MODE	CHANNEL FREQUENCY (KHz)	20dB BANDWIDTH (Hz)
DC 5V input Standby	113	820.5

Lower & Upper Test Frequency Point (MHz)	Test Frequency (KHz)	P/F
Lower	113.3537	PASS
Upper	114.1742	PASS

**Test Data:**

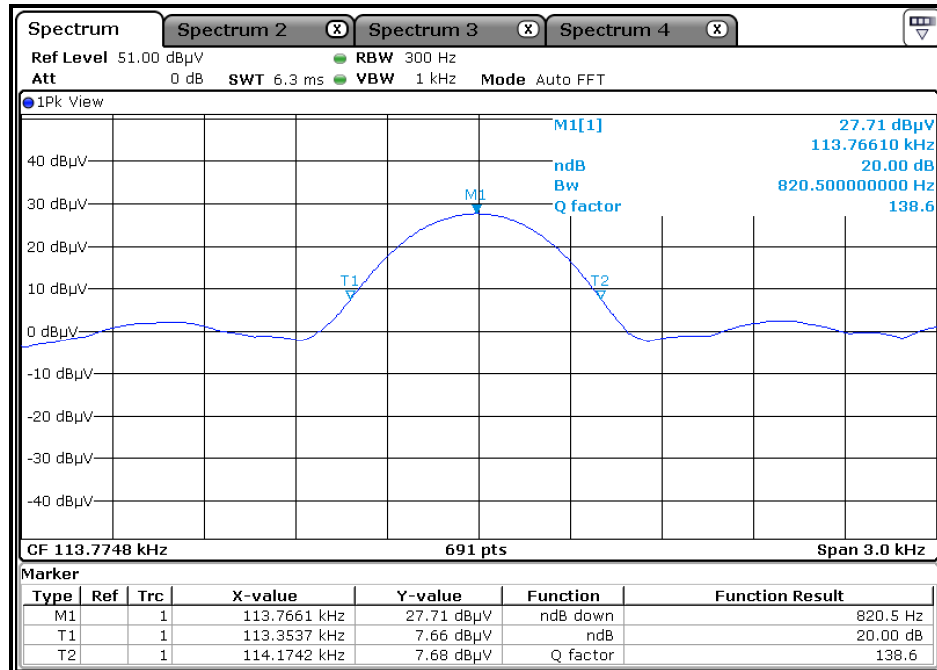




Test Report No.: RF190312N016

TEST MODE	CHANNEL FREQUENCY (KHz)	20dB BANDWIDTH (Hz)
DC 5V input Charging	145	1.3198

Lower & Upper Test Frequency Point (MHz)	Test Frequency (KHz)	P/F
Lower	145.2499	PASS
Upper	146.5697	PASS

Test Data:

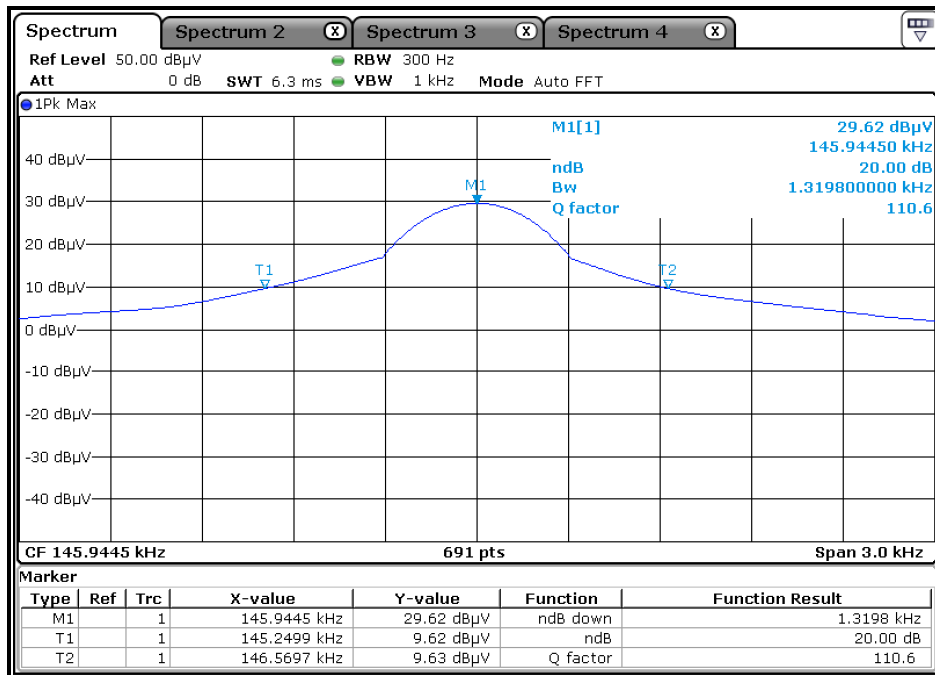



**BUREAU**  
**VERITAS**

Test Report No.: RF190312N016

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU  
VERITAS**

Test Report No.: RF190312N016

## **6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications were made to the EUT by the lab during the test.

**---END---**