



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan
District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM150300138103
Page: 1 of 32

FCC REPORT

Application No. : SZEM1503001381CR
Applicant: Guangdong Cheerson Hobby Technology Co., Ltd.
Product Name: UFO&X-Spy
Model No.(EUT): CX-30C
Add Model No.: CX-30,CX-30C,CX-30C-HD,CX-30S,CX-40,CX-40A,CX-40B,CX-40C,CX-40C-HD,CX-40S
FCC ID: 2AD6LGC032430
Standards: 47 CFR Part 15, Subpart C (2014)
Date of Receipt: 2015-03-31
Date of Test: 2015-04-08 to 2015-04-13
Date of Issue: 2015-07-17

Test Result:	PASS *
---------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2015-07-17		Original

Authorized for issue by:			
Tested By		 (Eric Fu) /Project Engineer	2015-04-13
			Date
Prepared By		 (Hedy Wen) /Clerk	2015-07-17
			Date
Checked By		 (Owen Zhou) /Reviewer	2015-07-17
			Date



3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.249 (a)	ANSI C63.10 (2009)	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.249 (a)/15.209	ANSI C63.10 (2009)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.249(a)/15.205	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215 (c)	ANSI C63.10 (2009)	PASS

Remark:

Model No.: CX-30, CX-30C

Only the model CX-30C was tested, since the circuitry design, PCB layout, electrical components used, internal wiring and functions were identical for all model , just different is CX-30C can connect a external camera .

Model No.: CX-30C,CX-30C-HD,CX-30S,CX-40,CX-40A,CX-40B,CX-40C,CX-40C-HD,CX-40S

Only the model CX-30C was tested, since the circuitry design, PCB layout, electrical components used, internal wiring and functions were identical for all model, just different is model No..



4 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST ENVIRONMENT AND MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS	6
5.5 TEST LOCATION	6
5.6 TEST FACILITY	7
5.7 DEVIATION FROM STANDARDS	7
5.8 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
5.10 EQUIPMENT LIST	8
6 TEST RESULTS AND MEASUREMENT DATA	10
6.1 ANTENNA REQUIREMENT	10
6.2 SPURIOUS EMISSIONS	11
6.2.1 Duty Cycle	11
6.2.2 Spurious Emissions	13
6.3 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	21
6.4 20dB BANDWIDTH	27
7 PHOTOGRAPHS	31
7.1 RADIATED EMISSION TEST SETUP	31
7.2 EUT CONSTRUCTIONAL DETAILS	32



5 General Information

5.1 Client Information

Applicant:	Guangdong Cheerson Hobby Technology Co., Ltd.
Address of Applicant:	FENGXIN NO.2 ROAD&LAIMEI ROAD FENGXIN INDUSTRIAL ZONE CHENGHAI SHANTOU GUANGDONG PROVINCE CHINA

5.2 General Description of EUT

Product Name:	UFO&X-Spy
Model No.:	CX-30C
Test Frequencies:	2402MHz, 2433MHz, 2475MHz
Modulation Type:	GFSK
Number of Channels:	3 (declared by the client)
Sample Type:	Portable production
Test Power Grade:	N/A
Test Software of EUT:	N/A
Antenna Type:	Integral
Antenna Gain:	2.4G Control Module:0dBi
EUT Power Supply:	DC 3.7V 700mAh Internal rechargeable battery charged by USB
USB Cable:	Unshielded 50cm



5.3 Test Environment and Mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	1015 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of data rate.

5.4 Description of Support Units

The EUT has been tested independently.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.





5.10 Equipment List

RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
13	Band filter	Amindeon	82346	SEL0094	2015-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
16	Humidity/ Temperature Indicator	Shanghai Qixiang	ZJ1-2B	SEL0103	2015-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

Report No.: SZEM150300138103


Page : 9 of 32

RF connected test					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R & S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24

Note: The calibration interval is one year, all the instruments are valid.


6 Test results and Measurement Data

6.1 Antenna Requirement

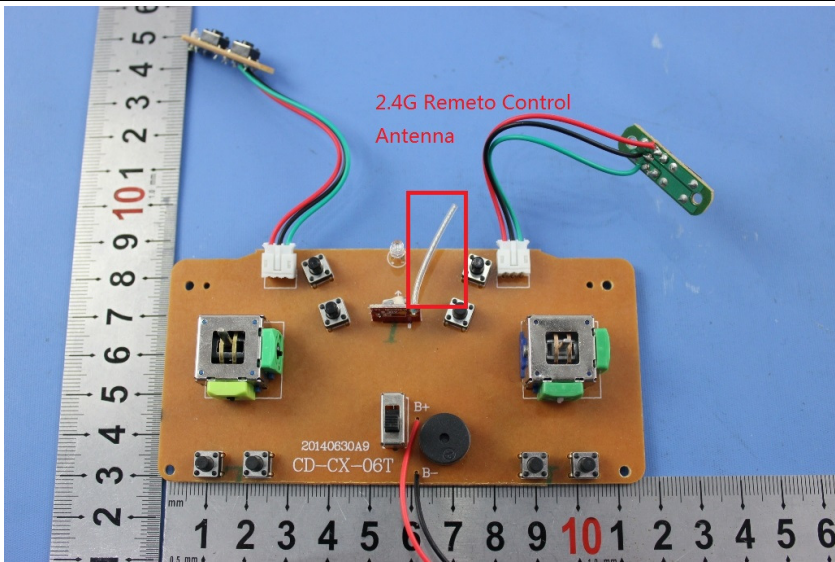Standard requirement:	47 CFR Part 15C Section 15.203
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
EUT Antenna:	
<p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.</p>	

6.2 Spurious Emissions

6.2.1 Duty Cycle

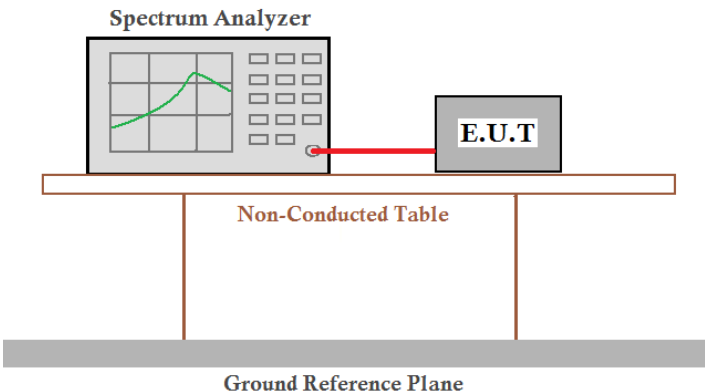Test Requirement:	47 CFR Part 15C Section 15.35 (c)
Test Method:	ANSI C63.10:2009
Test Setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.</p>
Instruments Used:	Refer to section 5.10 for details
Limit:	N/A
Test Mode:	Transmitting mode
Test Results:	Pass



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM150300138103

Page : 12 of 32


Test plot as follows:

Model No.: CX-30C

Duty cycle numbers

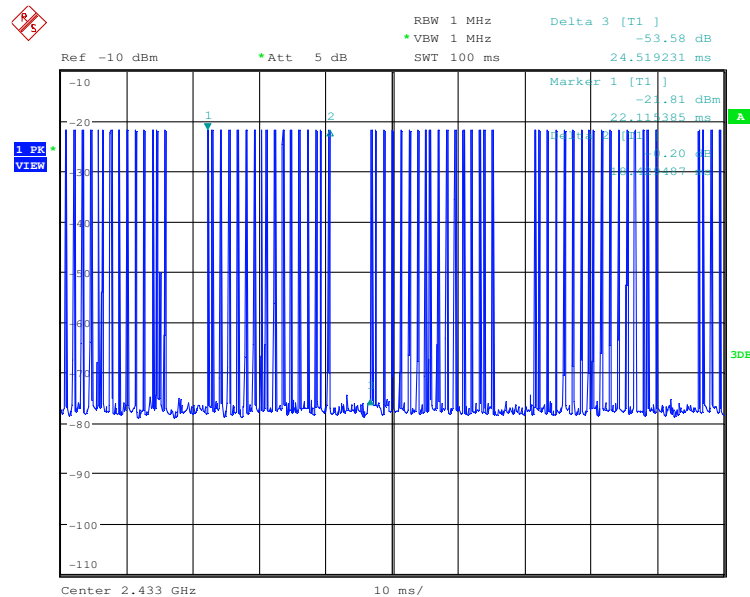

Time slot:

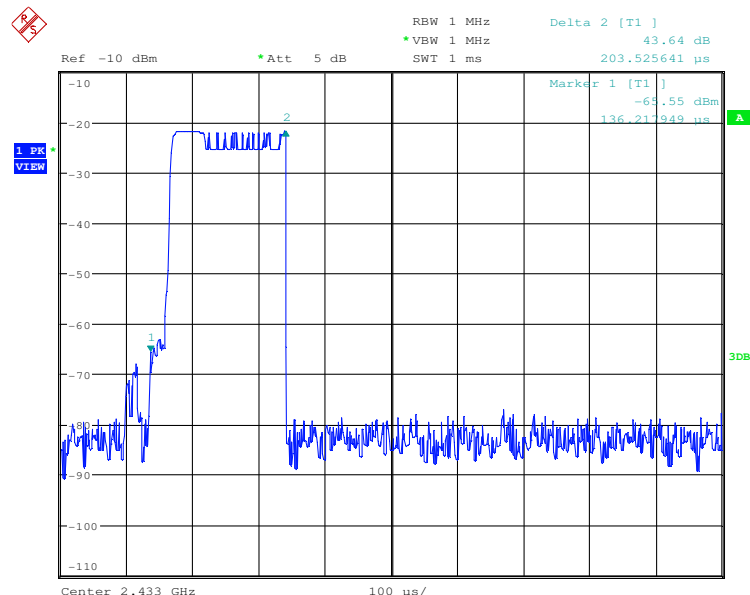

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM150300138103

Page : 13 of 32

6.2.2 Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.249 and 15.209				
Test Method:	ANSI C63.10: 2009				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Spurious Emissions)	Frequency	Field strength (microvolt/ meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.0		Average Value	
		114.0		Peak Value	

Test Setup:

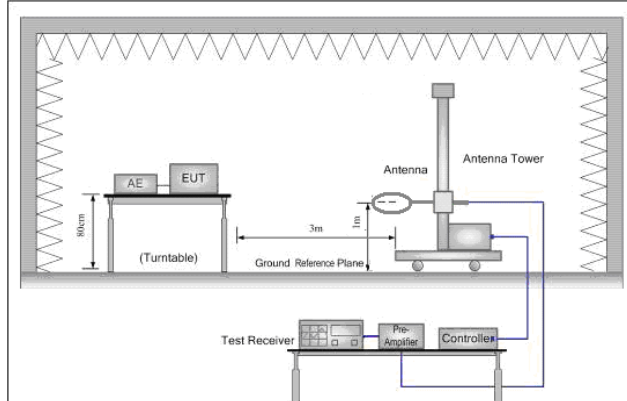


Figure 1. Below 30MHz

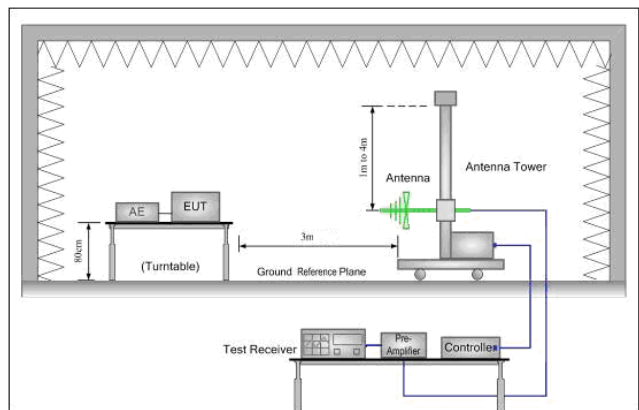


Figure 2. 30MHz to 1GHz

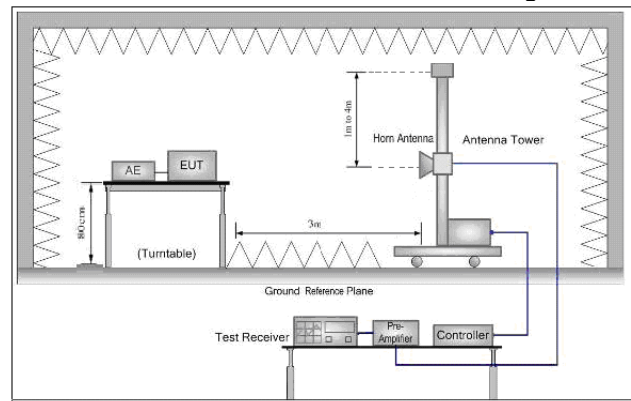


Figure 3. Above 1 GHz

Test Procedure:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

Report No.: SZEM150300138103

Page : 15 of 32

	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Instruments Used:	Refer to section 5.10 for details
Test Mode:	Transmitting mode For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Test Results:	Pass

Average value:	
Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	PDCF (For model CX-30C) =-15.08



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

Report No.: SZEM150300138103

Page : 16 of 32

Measurement Data

6.2.2.1 Field Strength Of The Fundamental Signal

Model No.: CX-30C

Peak value:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
2402	4.92	32.41	38.46	92.28	91.15	114	-22.85
2433	4.96	32.42	38.46	92.08	91.00	114	-23.00
2475	5.02	32.44	38.46	92.59	91.59	114	-22.41


Average value= Peak value+PDCF:

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
2402	76.07	94	-17.93
2433	75.92	94	-18.08
2475	76.51	94	-17.49



6.2.2.2 Spurious Emissions

30MHz~1GHz			
Model No.: CX-30C			
Test mode:	Transmitting	Remark:	Vertical

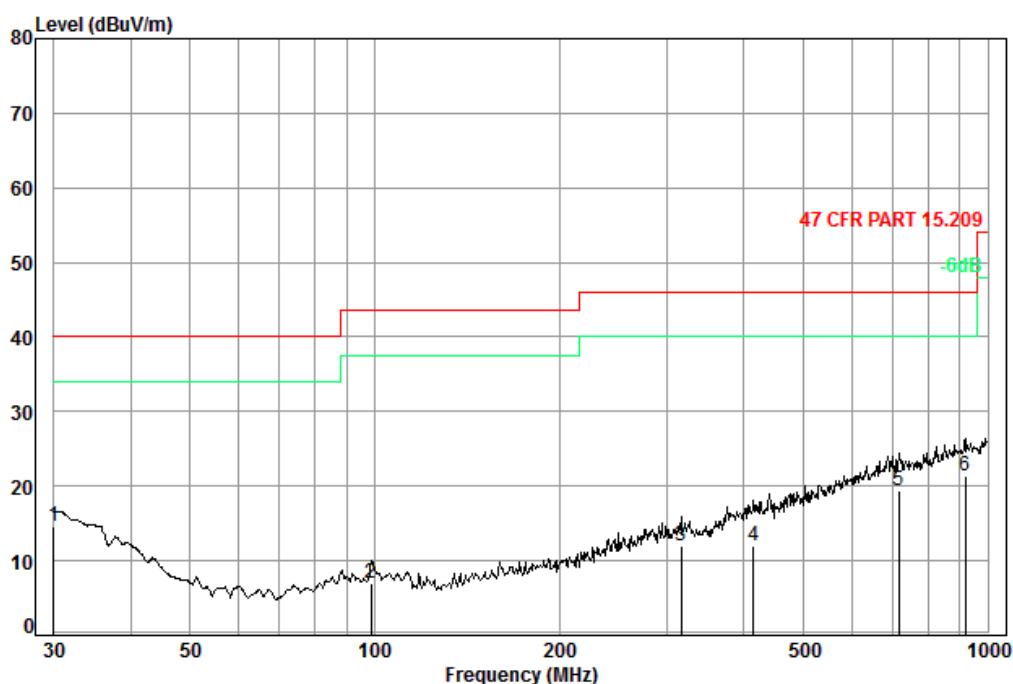

Condition: 47 CFR PART 15.209 3m 3142C Vertical

Job No. : 1381CR

Test Mode: TX mode

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.00	0.60	18.70	27.36	22.64	14.58	40.00	-25.42
2	98.83	1.19	9.05	27.20	24.03	7.07	43.50	-36.43
3	316.59	1.95	14.50	26.52	22.06	11.99	46.00	-34.01
4	414.72	2.26	16.36	27.23	20.70	12.09	46.00	-33.91
5	716.68	2.96	21.60	27.39	22.18	19.35	46.00	-26.65
6	919.29	3.62	23.28	26.68	21.08	21.30	46.00	-24.70






SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM150300138103

Page : 18 of 32

Test mode:	Transmitting	Remark:	Horizontal
------------	--------------	---------	------------

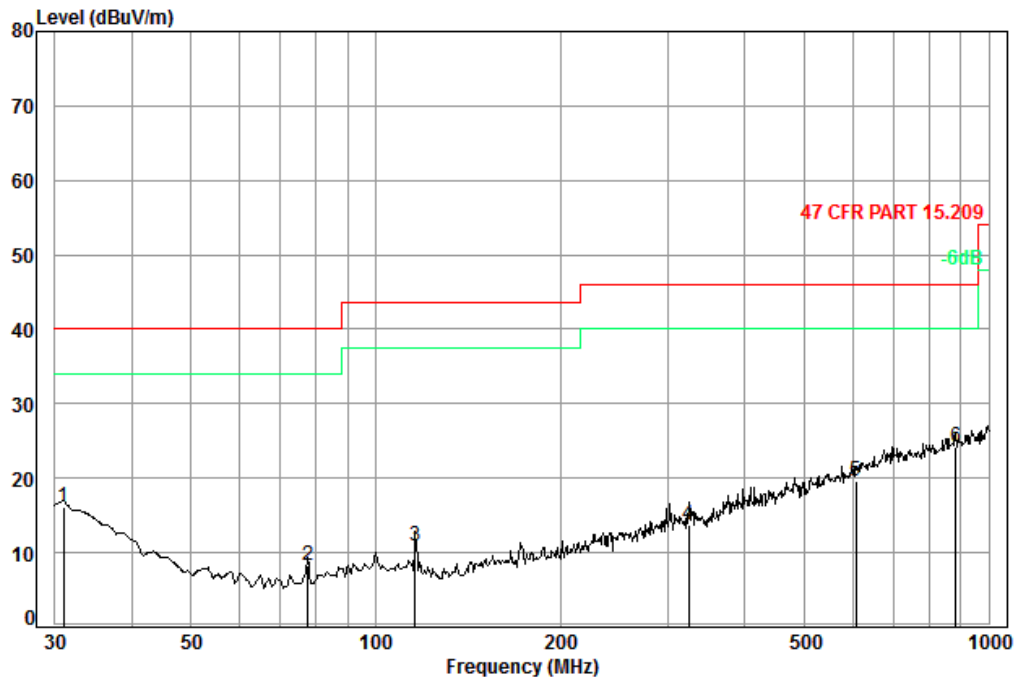

Condition: 47 CFR PART 15.209 3m 3142C Horizontal

Job No. : 1381CR

Test Mode: TX mode

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.96	0.60	18.16	27.35	24.65	16.06	40.00	-23.94
2	77.59	1.03	7.51	27.23	27.07	8.38	40.00	-31.62
3	116.13	1.24	8.17	27.09	28.57	10.89	43.50	-32.61
4	324.46	1.98	14.78	26.58	23.58	13.76	46.00	-32.24
5	607.79	2.72	20.02	27.53	24.35	19.56	46.00	-26.44
6	884.50	3.54	23.08	26.85	24.47	24.24	46.00	-21.76



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM150300138103

Page : 19 of 32

Above 1GHz								
Model No.: CX-30C								
Test mode:		Transmitting		Test channel:		Lowest		Remark:
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3653.463	5.81	33.04	38.81	46.07	46.11	74	-27.89	Vertical
4804.000	5.49	34.70	39.24	47.20	48.15	74	-25.85	Vertical
5956.109	7.41	36.22	39.19	47.64	52.08	74	-21.92	Vertical
7206.000	8.27	35.63	39.07	47.32	52.15	74	-21.85	Vertical
9608.000	9.26	37.33	37.93	43.32	51.98	74	-22.02	Vertical
11312.310	9.91	38.14	38.38	43.41	53.08	74	-20.92	Vertical
3616.451	5.83	33.01	38.79	47.81	47.86	74	-26.14	Horizontal
4804.000	5.49	34.70	39.24	49.71	50.66	74	-23.34	Horizontal
6063.190	7.46	36.23	39.18	47.92	52.43	74	-21.57	Horizontal
7206.000	8.27	35.63	39.07	46.96	51.79	74	-22.21	Horizontal
9608.000	9.26	37.33	37.93	42.93	51.59	74	-22.41	Horizontal
10999.950	9.64	38.10	38.22	44.20	53.72	74	-20.28	Horizontal

Test mode:		Transmitting		Test channel:		Middle		Remark:
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3653.463	5.81	33.04	38.81	46.47	46.51	74	-27.49	Vertical
4866.000	5.65	34.77	39.26	47.90	49.06	74	-24.94	Vertical
6047.776	7.47	36.25	39.18	47.64	52.18	74	-21.82	Vertical
7299.000	8.38	35.53	39.06	47.88	52.73	74	-21.27	Vertical
9732.000	9.19	37.71	37.86	43.89	52.93	74	-21.07	Vertical
10999.950	9.64	38.10	38.22	44.20	53.72	74	-20.28	Vertical
3644.175	5.82	33.03	38.80	46.33	46.38	74	-27.62	Horizontal
4866.000	5.65	34.77	39.26	49.99	51.15	74	-22.85	Horizontal
6047.776	7.47	36.25	39.18	46.02	50.56	74	-23.44	Horizontal
7299.000	8.38	35.53	39.06	46.21	51.06	74	-22.94	Horizontal
9732.000	9.19	37.71	37.86	43.27	52.31	74	-21.69	Horizontal
11112.520	9.74	38.11	38.28	43.50	53.07	74	-20.93	Horizontal

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

Report No.: SZEM150300138103

Page : 20 of 32

Test mode:		Transmitting		Test channel:		Highest		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
3359.099	5.87	32.67	38.68	46.44	46.30	74	-27.70	Vertical	
4950.000	5.87	34.85	39.28	52.33	53.77	74	-20.23	Vertical	
6047.776	7.47	36.25	39.18	46.37	50.91	74	-23.09	Vertical	
7425.000	8.53	35.43	39.05	46.38	51.29	74	-22.71	Vertical	
9900.000	9.10	38.21	37.76	42.73	52.28	74	-21.72	Vertical	
11027.980	9.66	38.10	38.24	43.50	53.02	74	-20.98	Vertical	
3489.840	5.91	32.88	38.74	46.24	46.29	74	-27.71	Horizontal	
4950.000	5.87	34.85	39.28	51.85	53.29	74	-20.71	Horizontal	
5895.771	7.28	36.10	39.19	46.57	50.76	74	-23.24	Horizontal	
7425.000	8.53	35.43	39.05	46.56	51.47	74	-22.53	Horizontal	
9900.000	9.10	38.21	37.76	43.33	52.88	74	-21.12	Horizontal	
11633.540	10.12	38.33	38.53	43.92	53.84	74	-20.16	Horizontal	

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

6.3 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2009		
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit(band edge):	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.		
	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

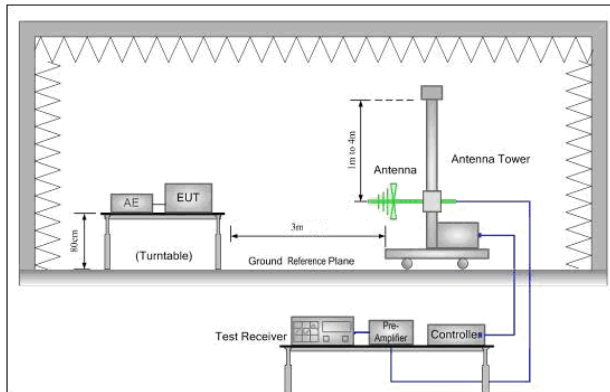


Figure 1. 30MHz to 1GHz

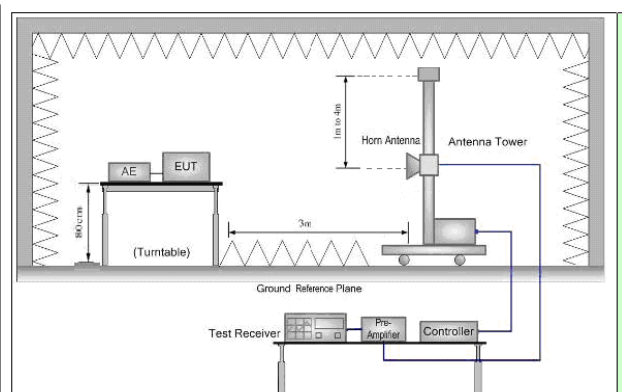


Figure 2. Above 1 GHz



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

Report No.: SZEM150300138103

Page : 22 of 32

Test Procedure:	<ul style="list-style-type: none">a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channelg. Test the EUT in the lowest channel , the Highest channelh. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.i. Repeat above procedures until all frequencies measured was complete.
Instruments Used:	Refer to section 5.10 for details.
Test Mode:	Transmitting mode
Test Results:	Pass

Measurement Data

Average value:	
Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	PDCF (For model CX-30C) =-15.08



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM150300138103

Page : 23 of 32

Test plot as follows:

Model No.: CX-30C

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak	Vertical
------------	--------------	---------------	--------	---------	------	----------

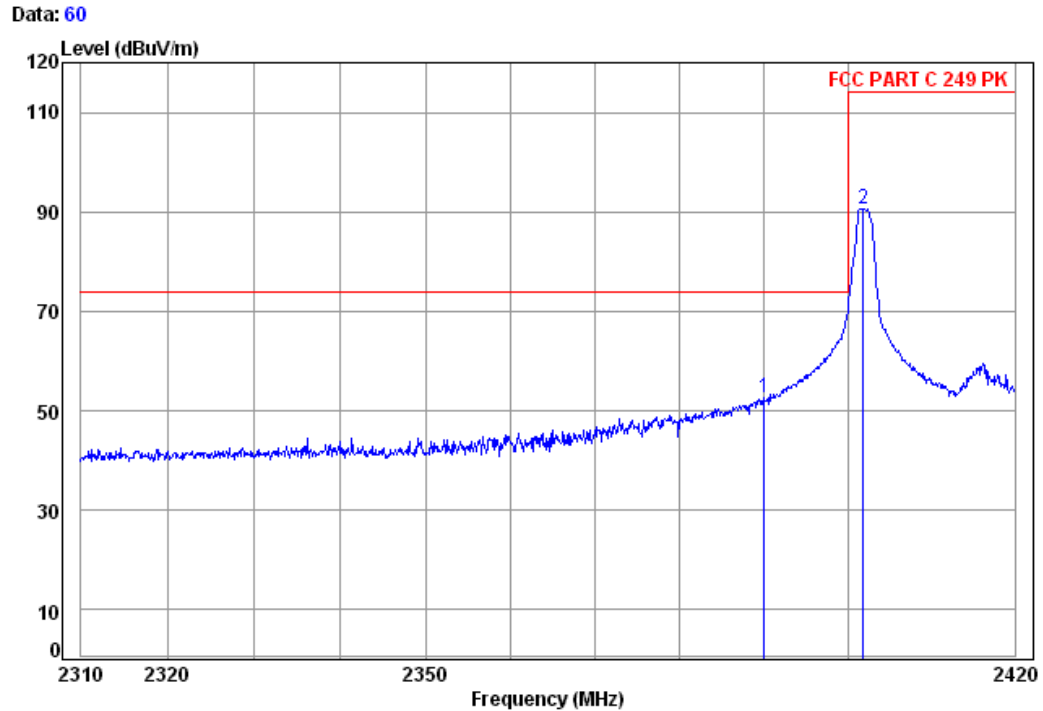

Site : chamber
Condition: FCC PART C 249 PK 3m Vertical
Job No: : 1381CR
Mode: : 2402 Band edge

		Cable	Ant	Preamp	Read	Limit	Over
	Freq	Loss	Factor	Factor	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1 pp	2390.00	4.90	32.35	38.46	53.75	52.54	74.00 -21.46
2	2401.83	4.92	32.41	38.46	91.72	90.59	114.00 -23.41

Average value= Peak value+PDCF:

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
2390.00	37.46	54.00	-16.54
2401.83	75.51	94.00	-18.49




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM150300138103

Page : 24 of 32

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak	Horizontal
------------	--------------	---------------	--------	---------	------	------------

Data: 54

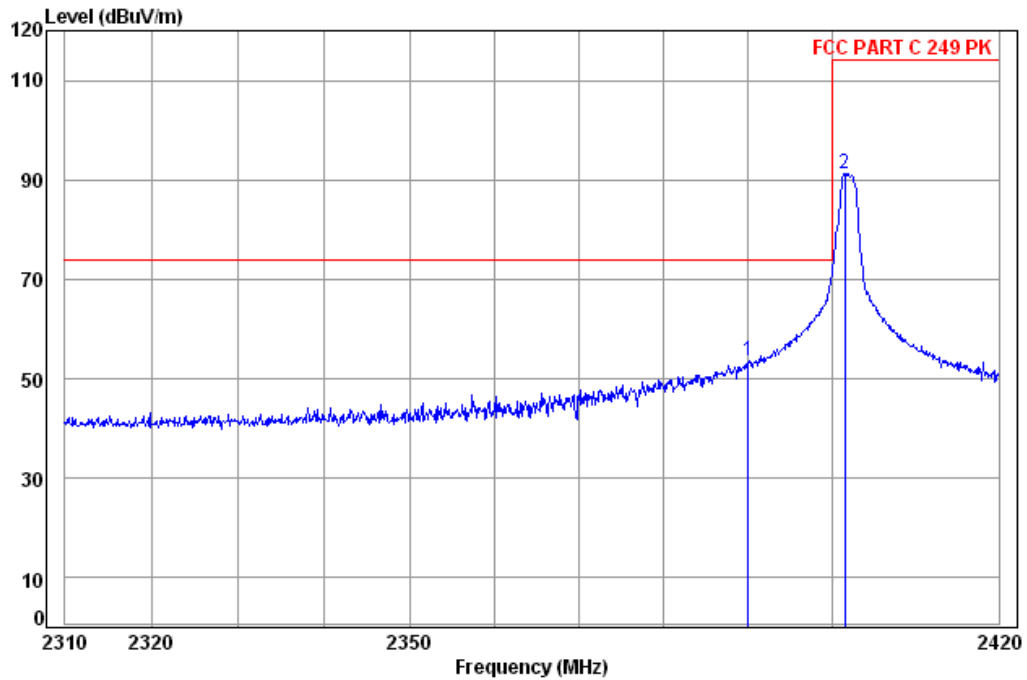

Site : chamber
Condition: FCC PART C 249 PK 3m Horizontal
Job No: 1381CR
Mode: 2402 Band edge

		Cable	Ant	Preamp	Read		Limit	Over
Freq	Loss	Factor	Factor	Level	Level	Line		Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m		dB
1 pp 2390.00	4.90	32.35	38.46	54.86	53.65	74.00	-20.35	
2 2401.50	4.92	32.41	38.46	92.28	91.15	114.00	-22.85	

Average value= Peak value+PDCF:

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
2390.00	38.57	54.00	-15.43
2401.50	76.07	94.00	-17.93




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM150300138103

Page : 25 of 32

Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak	Vertical
------------	--------------	---------------	---------	---------	------	----------

Data: 37

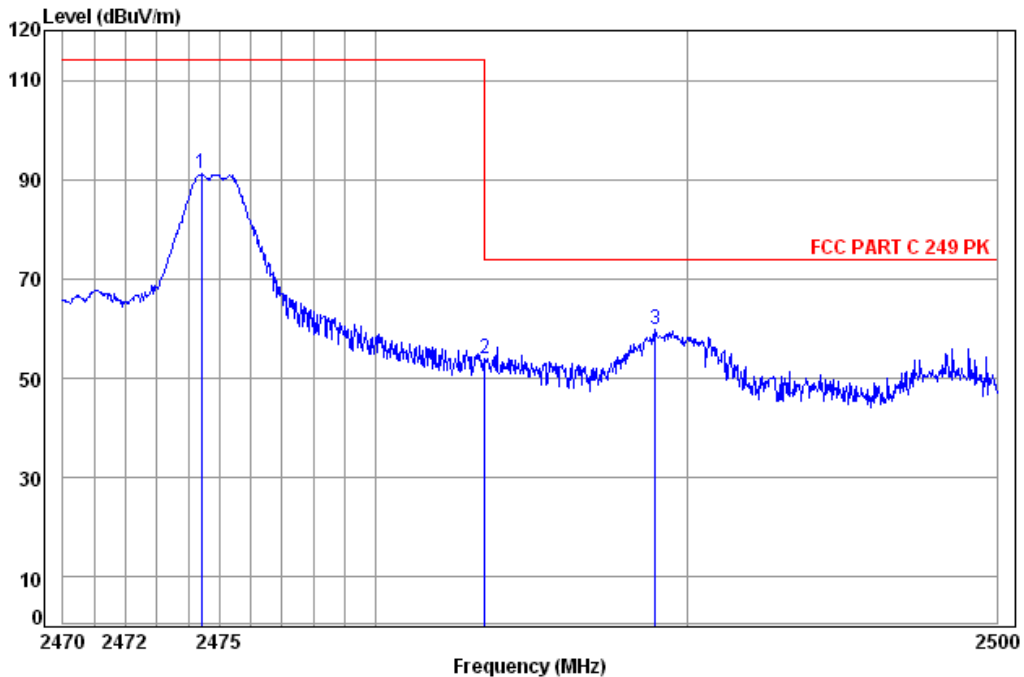

Site : chamber
Condition: FCC PART C 249 PK 3m Vertical
Job No: : 1381CR
Mode: : 2475 Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2474.42	5.02	32.44	38.46	92.10	91.10	114.00	-22.90
2	2483.50	5.03	32.44	38.47	55.09	54.09	74.00	-19.91
3 pp	2488.98	5.04	32.44	38.47	60.78	59.79	74.00	-14.21

Average value= Peak value+PDCF:

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
2474.42	76.02	94.00	-17.98
2483.50	39.01	54.00	-14.99
2488.98	44.71	54.00	-9.29




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM150300138103

Page : 26 of 32

Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak	Horizontal
------------	--------------	---------------	---------	---------	------	------------

Data: 29

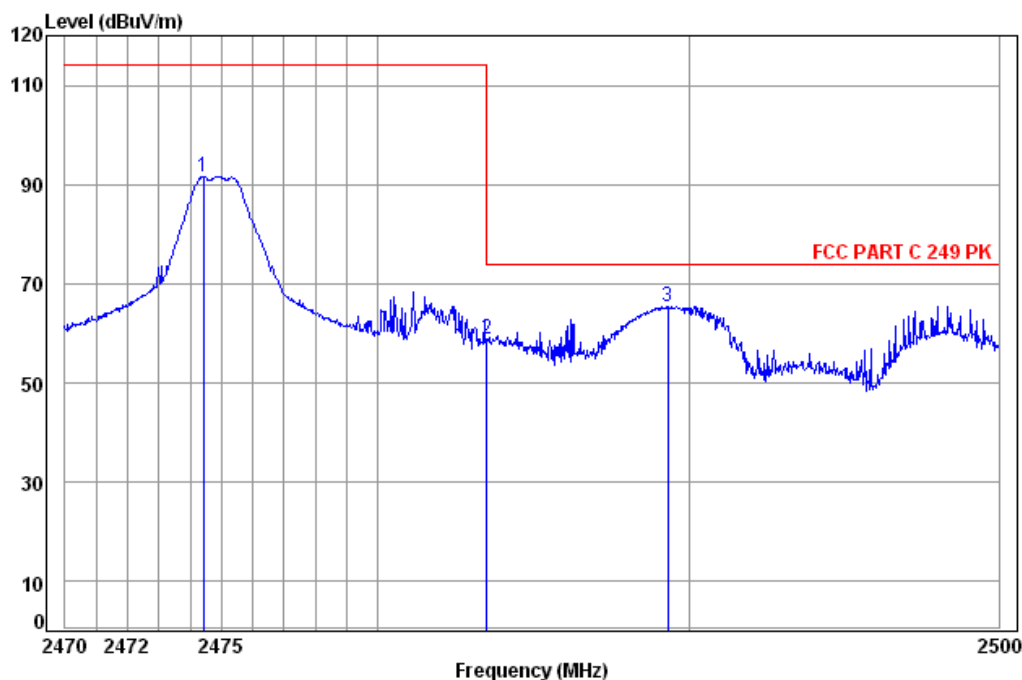

Site : chamber
Condition: FCC PART C 249 PK 3m Horizontal
Job No: : 1381CR
Mode: : 2475 Band edge

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2474.42	5.02	32.44	38.46	92.59	91.59	114.00	-22.41
2	2483.50	5.03	32.44	38.47	60.02	59.02	74.00	-14.98
3 pp	2489.34	5.04	32.44	38.47	66.54	65.55	74.00	-8.45

Average value= Peak value+PDCF:

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
2474.42	76.51	94.00	-17.49
2483.50	43.94	54.00	-10.06
2489.34	50.47	54.00	-3.53


Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

6.4 20dB Bandwidth

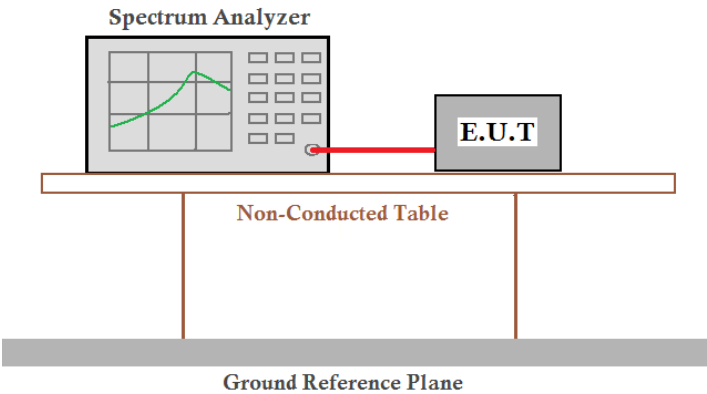Test Requirement:	47 CFR Part 15C Section 15.215
Test Method:	ANSI C63.10:2009
Test Setup:	
Instruments Used:	Refer to section 5.10 for details
Test mode:	Transmitting mode
Limit:	Within the band 2400MHz-2483.5MHz
Test Results:	Pass





**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

Report No.: SZEM150300138103

Page : 28 of 32

Measurement Data

Model No.: CX-30C


Test channel	20dB bandwidth (MHz)	Results
Lowest	2.038	Pass
Middle	1.149	Pass
Highest	1.298	Pass




Page : 29 of 32

Model No.: CX-30C

Test channel:	Lowest
---------------	--------

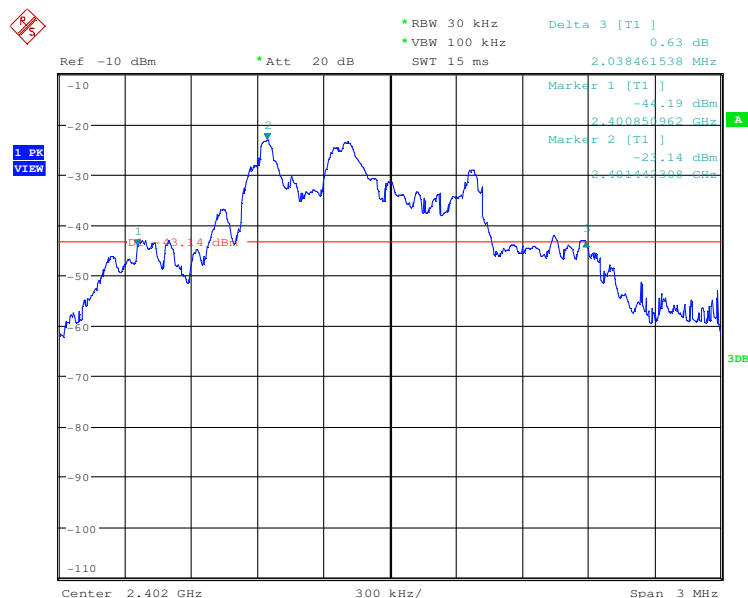

Test channel:	Middle
---------------	--------

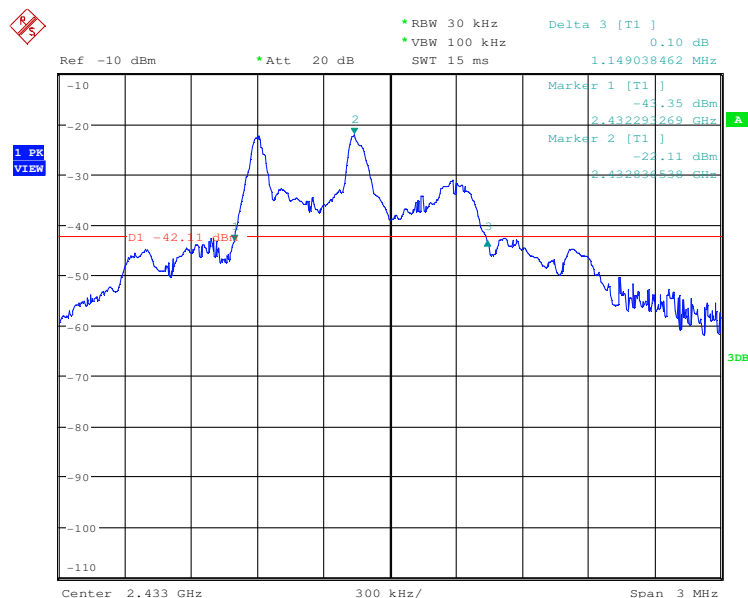

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM150300138103

Page : 30 of 32

Test channel:	Highest
---------------	---------

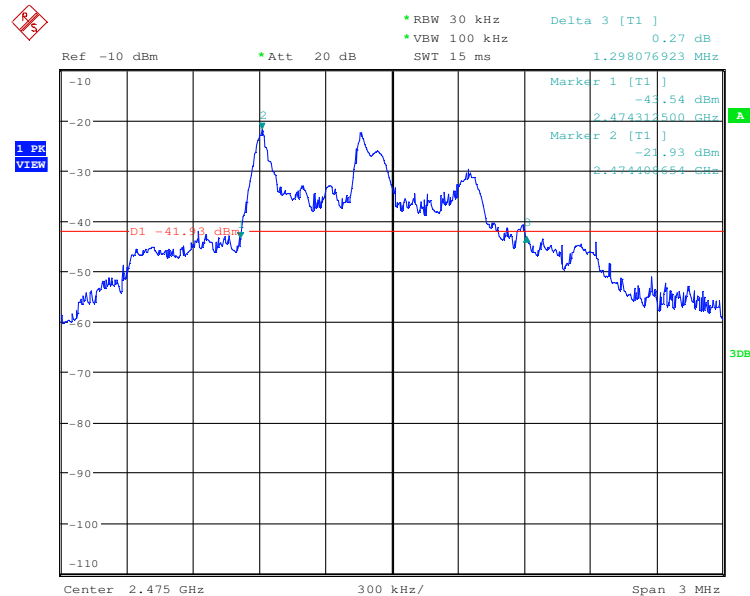

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

7 Photographs

7.1 Radiated Emission Test Setup

Model No.: CX-30C



"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



7.2 EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1503001381CR.