

**FCC - TEST REPORT**Report Number : **68.950.16.442.01** Date of Issue: **May 13, 2016**Model : **CX-35, CX-20, CX-22, CX-36, CX-37,
CX-23, CX-24, CX-91, CX-92, CX-93**

Product Type : Remote Control

Applicant : Guangdong Cheerson Hobby Technology Co., Ltd

Address : Fengxin No.2 Road & Laimei Road, Fengxin Industrial Zone

Chenghai 515800 Shantou, Guangdong Province

PEOPLE'S REPUBLIC OF CHINA

Production Facility : Guangdong Cheerson Hobby Technology Co., Ltd

Address : Fengxin No.2 Road & Laimei Road, Fengxin Industrial Zone

Chenghai 515800 Shantou, Guangdong Province

Test Result : ☒ **Positive** ☐ **Negative**

Total pages : 29

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval



1 Table of Contents

1 Table of Contents.....	2
2 Details about the Test Laboratory	3
3 Description of the Equipment Under Test.....	4
4 Summary of Test Standards.....	5
5 Summary of Test Results	6
6 General Remarks.....	7
7 Test setups	8
8 Systems test configuration	9
9 Technical Requirement	10
9.1 Field strength of emissions and restricted bands	10
9.2 20dB Bandwidth.....	20
9.3 Band edge testing.....	23
10 Test equipment list.....	28
11 System Measurement Uncertainty	29



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park,
Nantou Checkpoint Road 2, Nanshan District,
Shenzhen City, 518052,
P. R. China

FCC Registration Number: 502708

Telephone: 86 755 8828 6998
Fax: 86 755 828 5299

Test Site 2:

Company name: Dongguan Precise Testing Service Co., Ltd.
Building D, Baoding Technology Park, Guangming Road2, Dongcheng
District, Dongguan, Guangdong, China.

FCC Registration Number: 371540

Remark: All test items were performed at Site 2.

3 Description of the Equipment under Test

Description of the Equipment Under Test

Product: Remote control

Model no.: CX-35

FCC ID: 2AD6LGC0324352

Rating Voltage: 6VDC supplied by 4 × 1.5V AA Batteries

RF Transmission Frequency: 2420MHz-2465MHz

No. of Operated Channel: 46

Modulation: FSK

Antenna Type: Integrated Antenna

Antenna Gain: 3.5dBi

Description of the EUT: The EUT is a remote control which operated at 2.4GHz.

Remark: As per Client Declaration, the circuit design, PCB Layout, shielding and interface of Fixed Part of all models are identical except the model name and appearance color. So we use CX-35as a representative to perform all testing.

Channel List:

Channel	Frequency(MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2420	13	2432	25	2444	37	2456
2	2421	14	2433	26	2445	38	2457
3	2422	15	2434	27	2446	39	2458
4	2423	16	2435	28	2447	40	2459
5	2424	17	2436	29	2448	41	2460
6	2425	18	2437	30	2449	42	2461
7	2426	19	2438	31	2450	43	2462
8	2427	20	2439	32	2451	44	2463
9	2428	21	2440	33	2452	45	2464
10	2429	22	2441	34	2453	46	2465
11	2430	23	2442	35	2454		
12	2431	24	2443	36	2455		

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2015 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

5 Summary of Test Results

Technical Requirements					
FCC Part 15 Subpart C					
Test Condition	Pages	Test Site	Test Result		
			Pass	Fail	N/A
15.207 Conducted emission AC power port	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.205(a), §15.209(a), §15.249(a), §15.249(c) Field strength of emissions and Restricted bands	10	Site 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
FCC §15.215(c) 20dB bandwidth	20	Site 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.249(d) Out of band emissions	23	Site 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.203 Antenna requirement	See note 1		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses an integral antenna, which gain is 3.5dBi. According to §15.203, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2AD6LGC0324352 complies with Section 15.205, 15.209, 15.249 of the FCC Part 15, Subpart C Rules.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: May 6, 2016

Testing Start Date: May 6, 2016

Testing End Date: May 10, 2016


- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -

Reviewed by:

Prepared by:




John Zhi
EMC Project Manager




Alan Xiong
EMC Project Engineer

7 Test setups

7.1 Radiated test setups

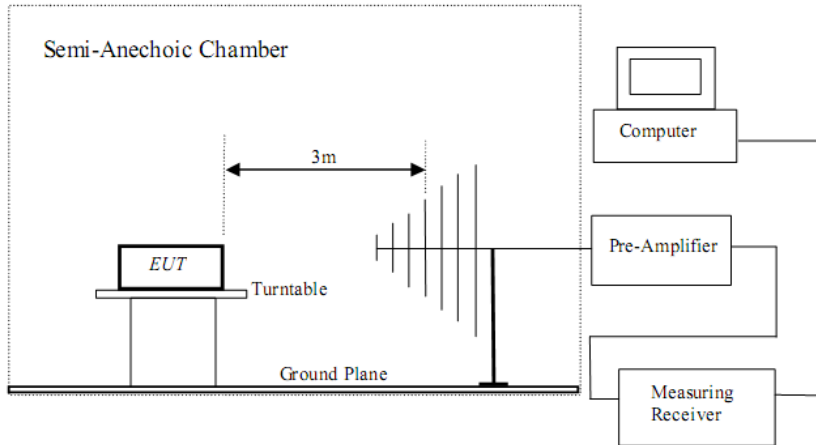

7.2 Conducted RF test setups

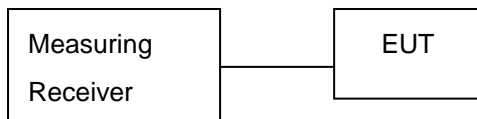

8 Systems test configuration

Auxiliary Equipment Used during Test:

Name	Model No	S/N	Manufacturer	FCC
--	--	--	--	--

Test software which used to control the EUT in continues transmitting mode

The system was configured to non-hopping mode.

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power

9 Technical Requirement

9.1 Field strength of emissions and restricted bands

Test Method

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
3. Use the following spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured ,RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Follow the guidelines in ANSI C63.4-1992 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc.
The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{duty cycle}/100\text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Limits

According to §15.249 (a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

According to §15.249 (c), Field strength limits are specified at a distance of 3 meters.

According to §15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

According to §15.205 and Unwanted emissions falling into restricted bands in §15.205 (a) Table 3 shall comply with the limits specified in §15.209.

Field strength of emissions and Restricted bands


EUT: Remote control

M/N: CX-35

Operating Condition: Tx; 2420MHz

Test Specification: Horizontal

Remark: 30MHz-1GHz

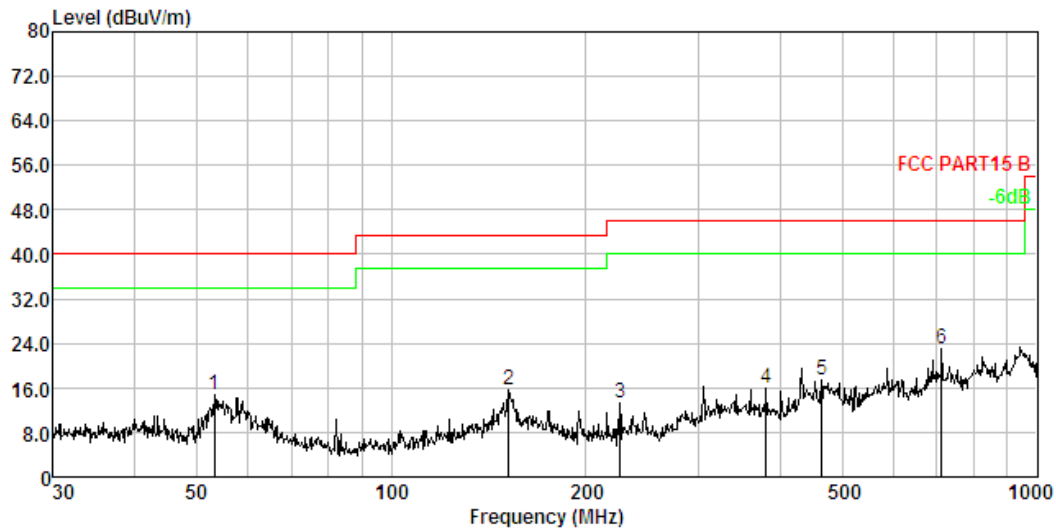

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamplifier Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	53.318	1.58	12.02	31.39	30.17	14.82	40.00	-25.18	Peak
2.	152.130	2.53	13.90	29.87	30.53	15.77	43.50	-27.73	Peak
3.	226.099	2.88	11.06	30.08	30.67	13.35	46.00	-32.65	Peak
4.	381.249	3.36	14.91	28.61	30.85	16.03	46.00	-29.97	Peak
5.	463.970	3.53	16.59	28.31	30.92	17.51	46.00	-28.49	Peak
6.	711.674	3.92	20.36	29.84	31.07	23.05	46.00	-22.95	Peak

Field strength of emissions and Restricted bands


EUT: Remote control

M/N: CX-35

Operating Condition: Tx; 2420MHz

Test Specification: Vertical

Remark: 30MHz-1GHz

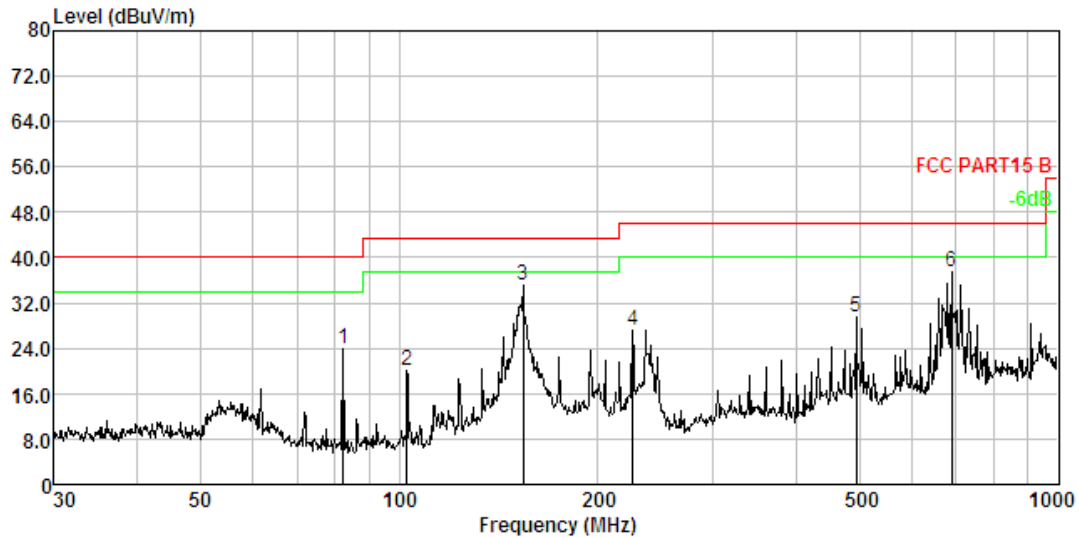

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamplifier Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	82.359	1.97	8.73	43.54	30.32	23.92	40.00	-16.08	Peak
2.	102.719	2.17	10.47	37.79	30.40	20.03	43.50	-23.47	Peak
3.	154.279	2.54	13.89	49.14	30.54	35.03	43.50	-8.47	Peak
4.	226.099	2.88	11.06	43.81	30.67	27.08	46.00	-18.92	Peak
5.	494.199	3.59	17.01	39.72	30.94	29.38	46.00	-16.62	Peak
6.	689.565	3.89	20.01	44.70	31.06	37.54	46.00	-8.46	Peak

Field strength of emissions and Restricted bands


EUT: Remote control

M/N: CX-35

Operating Condition: Tx; 2445MHz

Test Specification: Horizontal

Remark: 30MHz-1GHz

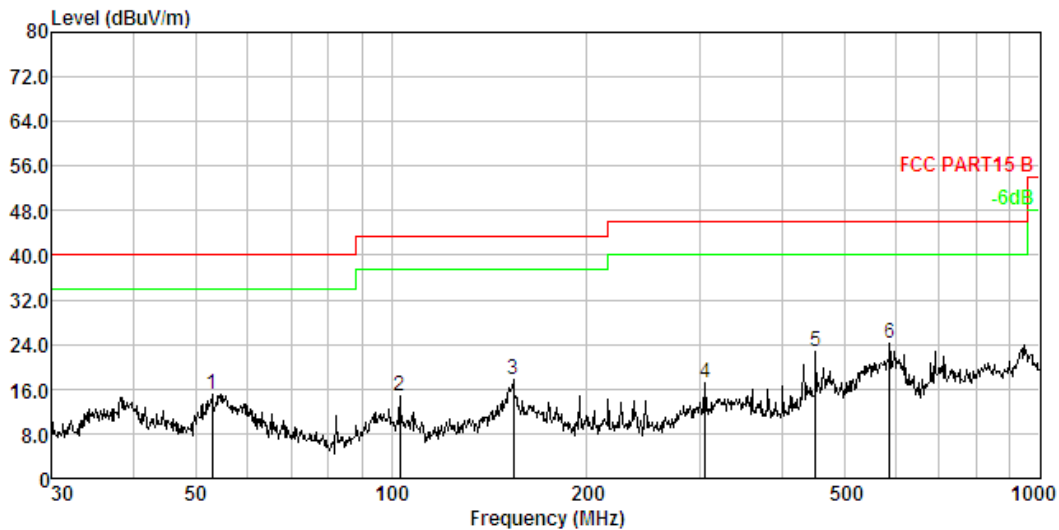

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	52.945	1.57	12.05	31.68	30.17	15.13	40.00	-24.87	Peak
2.	103.080	2.17	10.50	32.57	30.40	14.84	43.50	-28.66	Peak
3.	154.279	2.54	13.89	31.82	30.54	17.71	43.50	-25.79	Peak
4.	304.610	3.15	13.30	31.43	30.78	17.10	46.00	-28.90	Peak
5.	451.135	3.51	16.38	33.61	30.91	22.59	46.00	-23.41	Peak
6.	586.844	3.75	18.81	32.64	31.00	24.20	46.00	-21.80	Peak

Field strength of emissions and Restricted bands


EUT: Remote control

M/N: CX-35

Operating Condition: Tx; 2445MHz

Test Specification: Vertical

Remark: 30MHz-1GHz

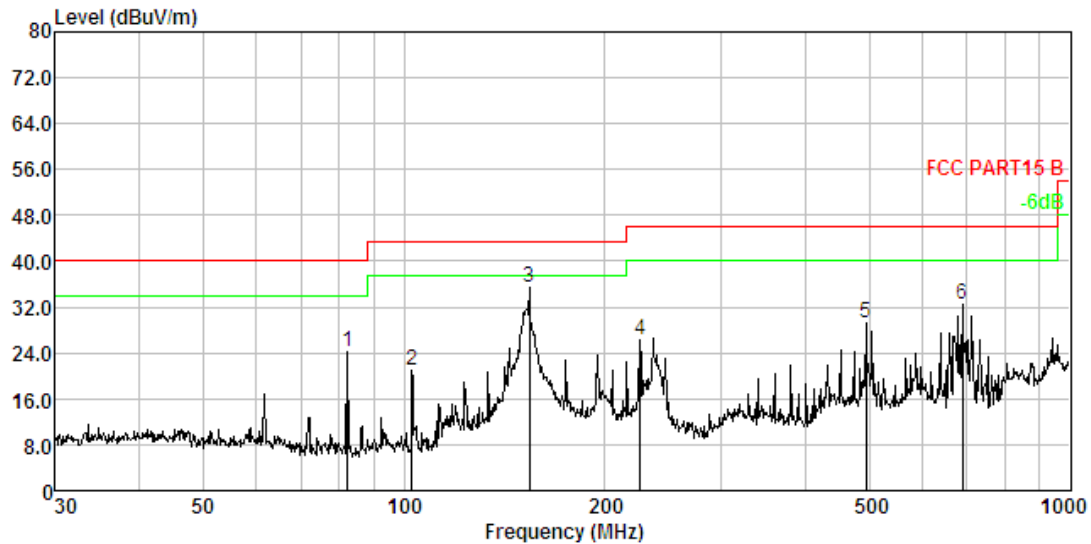

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	82.359	1.97	8.73	43.85	30.32	24.23	40.00	-15.77	Peak
2.	102.719	2.17	10.47	38.79	30.40	21.03	43.50	-22.47	Peak
3.	154.279	2.54	13.89	49.54	30.54	35.43	43.50	-8.07	Peak
4.	226.099	2.88	11.06	42.94	30.67	26.21	46.00	-19.79	Peak
5.	494.199	3.59	17.01	39.63	30.94	29.29	46.00	-16.71	Peak
6.	689.565	3.89	20.01	39.58	31.06	32.42	46.00	-13.58	Peak

Field strength of emissions and Restricted bands


EUT: Remote control

M/N: CX-35

Operating Condition: Tx; 2465MHz

Test Specification: Horizontal

Remark: 30MHz-1GHz

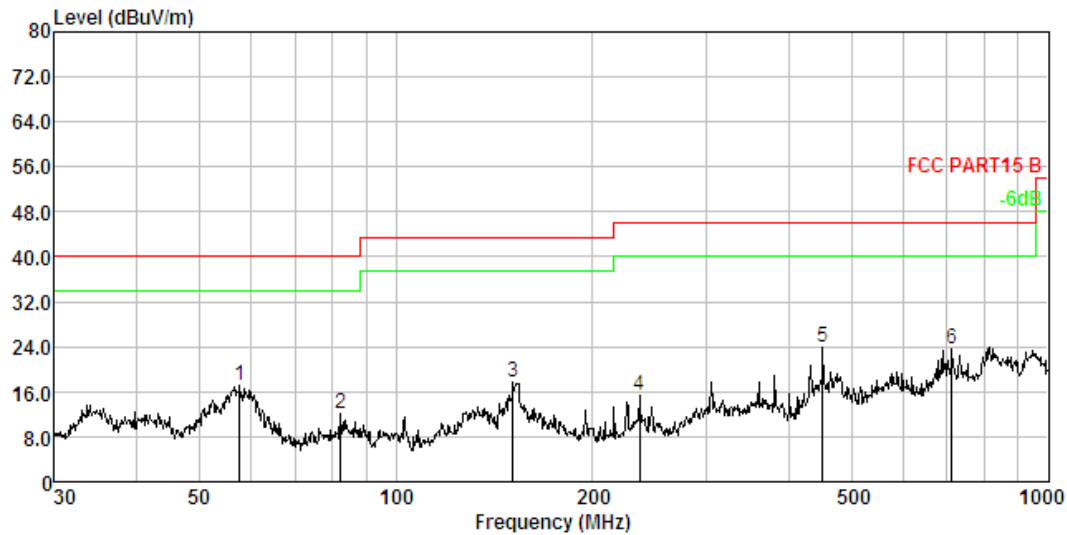

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	57.594	1.65	12.04	33.78	30.20	17.27	40.00	-22.73	Peak
2.	82.359	1.97	8.73	31.66	30.32	12.04	40.00	-27.96	Peak
3.	151.067	2.52	13.90	31.70	30.53	17.59	43.50	-25.91	Peak
4.	236.645	2.93	11.56	31.59	30.69	15.39	46.00	-30.61	Peak
5.	451.135	3.51	16.38	34.88	30.91	23.86	46.00	-22.14	Peak
6.	711.674	3.92	20.36	30.49	31.07	23.70	46.00	-22.30	Peak

Field strength of emissions and Restricted bands


EUT: Remote control

M/N: CX-35

Operating Condition: Tx; 2465MHz

Test Specification: Vertical

Remark: 30MHz-1GHz

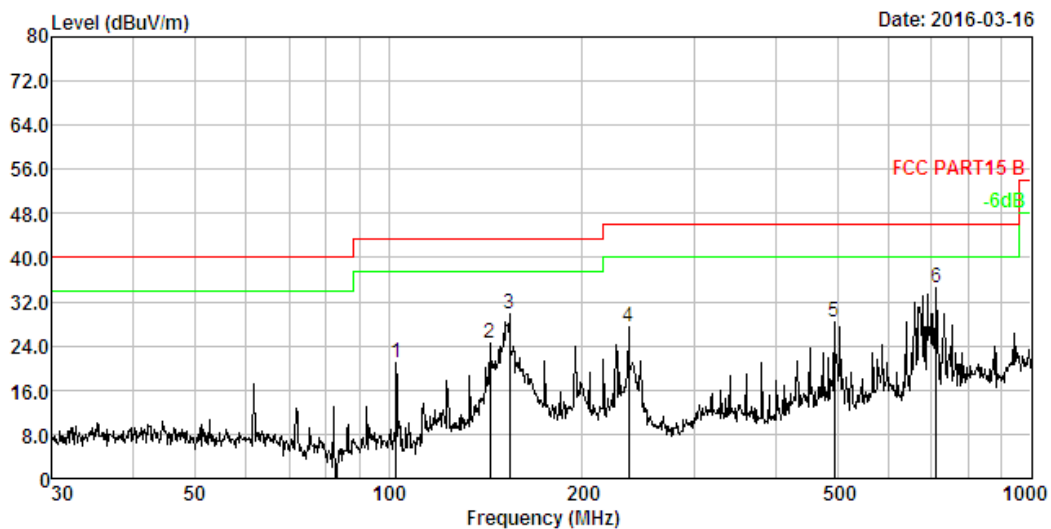

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	102.719	2.17	10.47	38.63	30.40	20.87	43.50	-22.63	Peak
2.	143.830	2.47	13.57	38.98	30.52	24.50	43.50	-19.00	Peak
3.	154.279	2.54	13.89	43.89	30.54	29.78	43.50	-13.72	Peak
4.	236.645	2.93	11.56	43.68	30.69	27.48	46.00	-18.52	Peak
5.	494.199	3.59	17.01	38.70	30.94	28.36	46.00	-17.64	Peak
6.	711.674	3.92	20.36	41.44	31.07	34.65	46.00	-11.35	Peak

Field strength of emissions and Restricted bands

EUT: Remote control

M/N: CX-35

Operating Condition: Tx; 2420MHz

Test Specification: Horizontal

Remark: Above 1GHz

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2420.356	101.42	-9.24	92.18	114	-21.82	peak
2420.356	95.43	-9.24	86.19	94	-7.81	AVG
4840.712	52.73	3.76	56.49	74	-17.51	peak
4840.712	46.18	3.76	49.94	54	-4.06	AVG
7261.068	45.36	8.14	53.5	74	-20.5	peak
7261.068	39.55	8.14	47.69	54	-6.31	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT: Remote control

M/N: CX-35

Operating Condition: Tx; 2420MHz

Test Specification: Vertical

Remark: Above 1GHz

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2420.356	99.88	-9.24	90.64	114	-23.36	peak
2420.356	93.56	-9.24	84.32	94	-9.68	AVG
4840.712	51.26	3.76	55.02	74	-18.98	peak
4840.712	45.76	3.76	49.52	54	-4.48	AVG
7261.068	44.38	8.14	52.52	74	-21.48	peak
7261.068	38.74	8.14	46.88	54	-7.12	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark 1: According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Remark 2: Testing is carried out with frequency rang 30MHz to 25GHz, which above 1GHz are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Field strength of emissions and Restricted bands

EUT: Remote control

M/N: CX-35

Operating Condition: Tx; 2445MHz

Test Specification: Horizontal

Remark: Above 1GHz

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2445.316	99.85	-9.16	90.69	114	-23.31	peak
2445.316	93.74	-9.16	84.58	94	-9.42	AVG
4890.632	50.36	3.76	54.12	74	-19.88	peak
4890.632	44.21	3.76	47.97	54	-6.03	AVG
7335.948	44.87	8.17	53.04	74	-20.96	peak
7335.948	38.56	8.17	46.73	54	-7.27	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT: Remote control

M/N: CX-35

Operating Condition: Tx; 2445MHz

Test Specification: Vertical

Remark: Above 1GHz

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2445.316	97.54	-9.16	88.38	114	-25.62	peak
2445.316	91.07	-9.16	81.91	94	-12.09	AVG
4890.632	50.67	3.76	54.43	74	-19.57	peak
4890.632	43.57	3.76	47.33	54	-6.67	AVG
7335.948	43.54	8.17	51.71	74	-22.29	peak
7335.948	37.28	8.17	45.45	54	-8.55	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark 1: According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Remark 2: Testing is carried out with frequency rang 30MHz to 25GHz, which above 1GHz are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Field strength of emissions and Restricted bands

EUT: Remote control

M/N: CX-35

Operating Condition: Tx; 2465MHz

Test Specification: Horizontal

Remark: Above 1GHz

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2465.221	101.48	-9.11	92.37	114	-21.63	peak
2465.221	96.53	-9.11	87.42	94	-6.58	AVG
4930.442	52.86	3.83	56.69	74	-17.31	peak
4930.442	47.18	3.83	51.01	54	-2.99	AVG
7395.663	45.14	8.21	53.35	74	-20.65	peak
7395.663	38.36	8.21	46.57	54	-7.43	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT: Remote control

M/N: CX-35

Operating Condition: Tx; 2465MHz

Test Specification: Vertical

Remark: Above 1GHz

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2465.221	99.53	-9.11	90.42	114	-23.58	peak
2465.221	94.36	-9.11	85.25	94	-8.75	AVG
4930.442	51.64	3.83	55.47	74	-18.53	peak
4930.442	46.88	3.83	50.71	54	-3.29	AVG
7395.663	44.31	8.21	52.52	74	-21.48	peak
7395.663	37.86	8.21	46.07	54	-7.93	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark 1: According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Remark 2: Testing is carried out with frequency rang 30MHz to 25GHz, which above 1GHz are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9.2 20dB Bandwidth

Test Method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

Limits:

According to 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

20dB Bandwidth

Frequency MHz	20dB Bandwidth MHz	Limit kHz	Result
2420	8.586	--	Pass
2445	6.443	--	Pass
2465	4.905	--	Pass



20dB Bandwidth

9.3 Band edge testing

Test Method

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
3. Use the following spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured, RBW = 1 MHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Follow the guidelines in ANSI C63.4-1992 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{duty cycle}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Limit:

According to §15.249(d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Band edge testing

EUT: Remote control

M/N: CX-35


Operating Condition: Tx; 2420MHz

Test Specification: Horizontal

Detector: Peak



Detector: Average

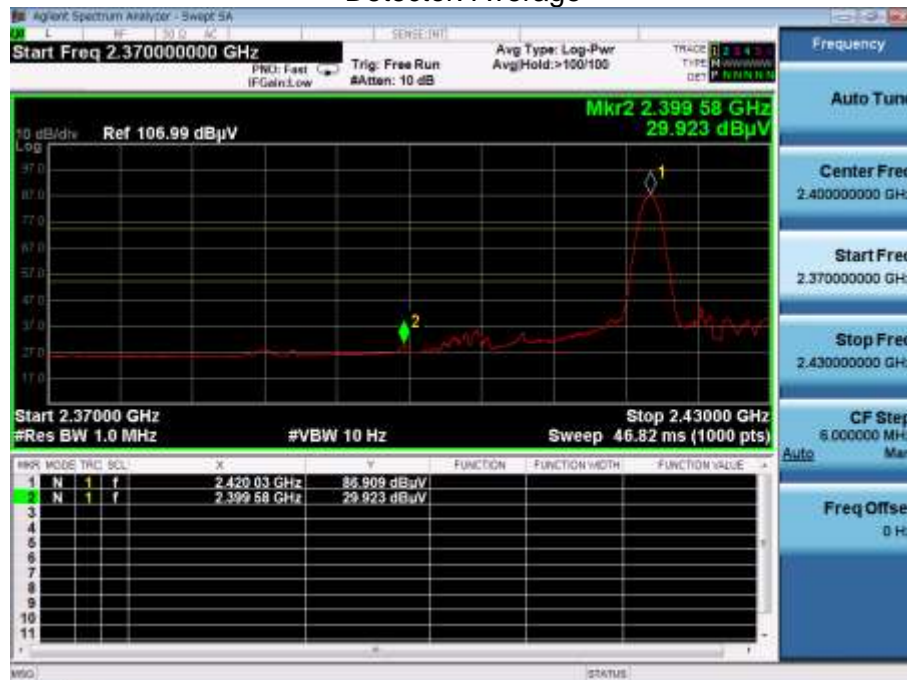




Band edge testing

EUT: Remote control
M/N: CX-35
Operating Condition: Tx; 2420MHz
Test Specification: Vertical

Detector: Peak



Detector: Average

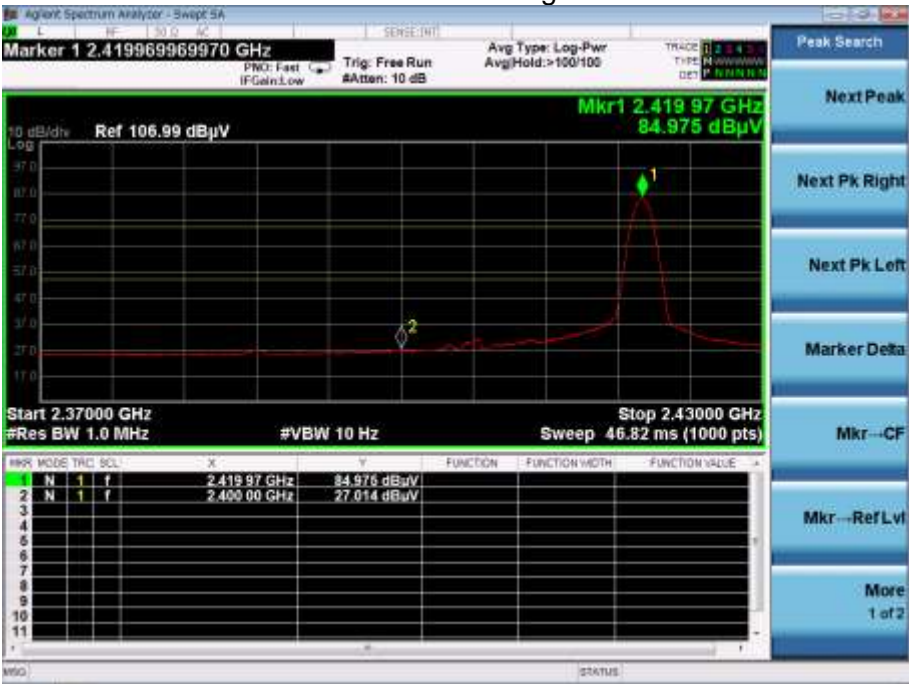

Band edge testing

EUT: Remote control
M/N: CX-35
Operating Condition: Tx; 2465MHz
Test Specification: Horizontal

Detector: Peak



Detector: Average



Band edge testing

EUT: Remote control
M/N: CX-35
Operating Condition: Tx; 2465MHz
Test Specification: Vertical

Detector: Peak



Detector: Average



10 Test equipment list

List of Test Instruments

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	N9010A	MY53470504	June 6, 2015	June 5, 2016
Temporary antenna connector	Sat	CE001	N/A	June 6, 2015	June 5, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	June 6, 2015	June 5, 2016
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty

System Measurement Uncertainty	
Items	Extended Uncertainty
Radiated Emissions Electric field 3 m distance	+/-3.8dB
Band Width	+/-1.6kHz
Band Edge	+/-3.8dB