

TEST REPORT

of

FCC Part 15 Subpart C §15.247

FCC ID: 2AD74RWL-100

Equipment Under Test : Smart wristband
Model Name : RWL-100
Applicant : Lineable Inc.
Manufacturer : Lineable Inc.
Date of Test(s) : 2015.03.02 ~ 2015.03.18
Date of Issue : 2015.03.19

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Jungmin Yang

Date:

2015.03.19

Approved By:



Hyunchae You

Date:

2015.03.19

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

INDEX

Table of contents

| | |
|--|----|
| 1. General information ----- | 3 |
| 2. Transmitter radiated spurious emissions and conducted spurious emission ----- | 6 |
| 3. 6 dB bandwidth ----- | 21 |
| 4. Maximum peak output power ----- | 25 |
| 5. Power Spectral Density ----- | 27 |
| 6. Antenna Requirement ----- | 31 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

-Wireless Div. 2FL, 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-837

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Telephone : + 82 31 688 0901

FAX : + 82 31 688 0921

1.2. Details of Applicant

Applicant : Lineable Inc.

Address : (Daechi-dong, 2F Themis B/D), 30 Samseong-ro 84-gil, Gangnam-gu, Seoul, Korea

Contact Person : Jeong, Key

Phone No. : + 82 2 6225 0098

1.3. Description of EUT

| | |
|------------------------------|----------------------------|
| Kind of Product | Smart wristband |
| Model Name | RWL-100 |
| Power Supply | DC 3 V |
| Frequency Range | 2 402 MHz ~ 2 480 MHz (LE) |
| Modulation Technique | GFSK |
| Number of Channels | 40 channels |
| Operation Temperature | -10 °C ~ 50 °C |
| Antenna Type | Internal type |
| Antenna Gain | -0.2 dB i |
| H/W Version | 1.0 |
| S/W Version | 1.0 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.4. Test Equipment List

| Equipment | Manufacturer | Model | S/N | Cal Date | Cal Interval | Cal Due. |
|-------------------|-------------------------------|--------------------------------------|---------------|---------------|--------------|---------------|
| Signal Generator | R&S | SMR40 | 100272 | Jul. 18, 2014 | Annual | Jul. 18, 2015 |
| Signal Generator | R&S | SMBV100A | 255834 | Jun. 25, 2014 | Annual | Jun. 25, 2015 |
| Spectrum Analyzer | Agilent | N9030A | US51350132 | Sep. 24, 2014 | Annual | Sep. 24, 2015 |
| Attenuator | MCLI | FAS-23-20 | 23834 | Jun. 20, 2014 | Annual | Jun. 20, 2015 |
| High Pass Filter | Wainwright | WHK3.0/18G-10SS | 344 | Jun. 10, 2014 | Annual | Jun. 10, 2015 |
| High Pass Filter | Wainwright | WHK7.5/26.5G-6SS | 11 | Jun. 10, 2014 | Annual | Jun. 10, 2015 |
| Low Pass Filter | Mini circuits | NLP-1200+ | V8979400903-1 | Jun. 10, 2014 | Annual | Jun. 10, 2015 |
| Power Sensor | R&S | NRP-Z81 | 100748 | Jun. 10, 2014 | Annual | Jun. 10, 2015 |
| DC Power Supply | Agilent | U8002A | MY48490027 | Dec. 22, 2014 | Annual | Dec. 22, 2015 |
| Preamplifier | H.P. | 8447F | 2944A03909 | Aug. 27, 2014 | Annual | Aug. 27, 2015 |
| Preamplifier | R&S | SCU 18 | 10117 | Dec. 26, 2014 | Annual | Dec. 26, 2015 |
| Preamplifier | MITEQ Inc. | JS44-18004000-35-8P | 1546891 | Apr. 28, 2014 | Annual | Apr. 28, 2015 |
| Test Receiver | R&S | ESU26 | 100109 | Mar. 03, 2015 | Annual | Mar. 03, 2016 |
| Bilog Antenna | SCHWARZBECK MESSELEKTRONIK | VULB9163 | 396 | Jun. 07, 2013 | Biennial | Jun. 07, 2015 |
| Loop Antenna | SCHWARZBECK MESSELEKTRONIK | FMZB 1519 | 1519-039 | Jul. 09, 2013 | Biennial | Jul. 09, 2015 |
| Horn Antenna | R&S | HF906 | 100326 | Dec. 10, 2013 | Biennial | Dec. 10, 2015 |
| Horn Antenna | SCHWARZBECK MESSELEKTRONIK | BBHA9170 | BBHA9170431 | May 15, 2014 | Biennial | May 15, 2016 |
| Antenna Master | INNCO | MM4000 | N/A | N.C.R. | N/A | N.C.R. |
| Turn Table | INNCO | DS 1200S | N/A | N.C.R. | N/A | N.C.R. |
| Anechoic Chamber | SY Corporation | L x W x H (9.6 m x 6.4 m x 6.4 m) | N/A | N.C.R. | N/A | N.C.R. |

► Support equipment

| Description | Manufacturer | Model | Serial Number |
|-------------|--------------|-------|---------------|
| N/A | - | - | - |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.5. Summary of Test Results

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part15 Subpart C § 15.247 | | |
|---|--|----------|
| Standard section | Test Item(s) | Result |
| 15.205 15.209 15.247(d) | Transmitter Radiated Spurious Emissions Conducted Spurious Emission | Complied |
| 15.247(a)(2) | 6 dB Bandwidth | Complied |
| 15.247(b)(3) | Maximum Peak Output Power | Complied |
| 15.247(e) | Power Spectral Density | Complied |

1.6. Test Procedure(s)

The measurement procedures described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) and the guidance provided in KDB 558074_v03r02 were used in the measurement of the DUT.

1.7. Sample calculation

Where relevant, the following sample calculation is provided:

1.7.1. Conducted test

Offset value (dB) = Attenuator (dB) + Cable loss (dB)

1.7.2. Radiation test

Field strength level (dB μ V/m) = Measured level (dB μ V) + Antenna factor (dB) + Cable loss (dB) - amplifier gain(dB)

1.8. Test report revision

| Revision | Report number | Date of Issue | Description |
|----------|----------------------|---------------|-------------|
| 0 | F690501/RF-RTL008508 | 2015.03.19 | Initial |


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission


2.1. Test Setup

2.1.1. Transmitter Radiated Spurious Emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

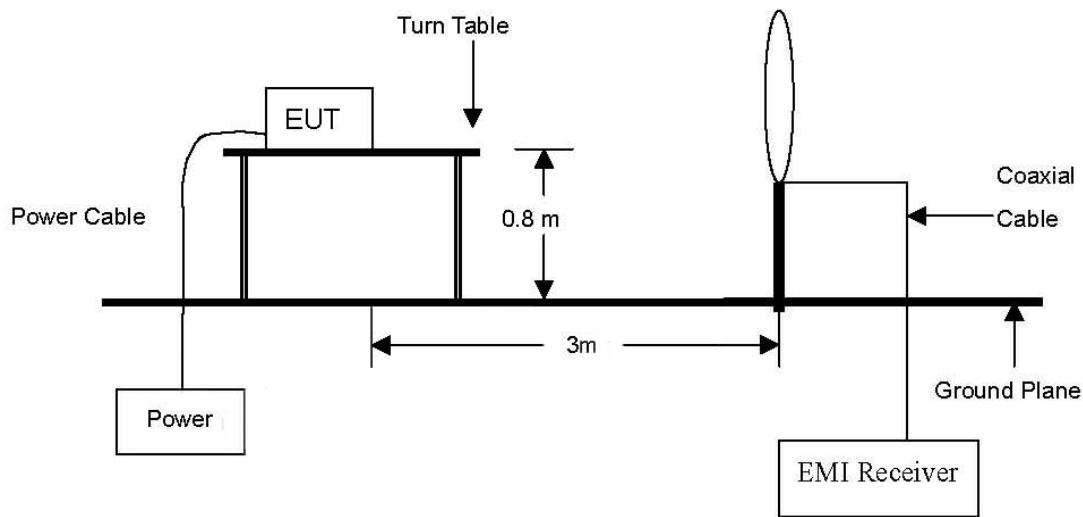


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

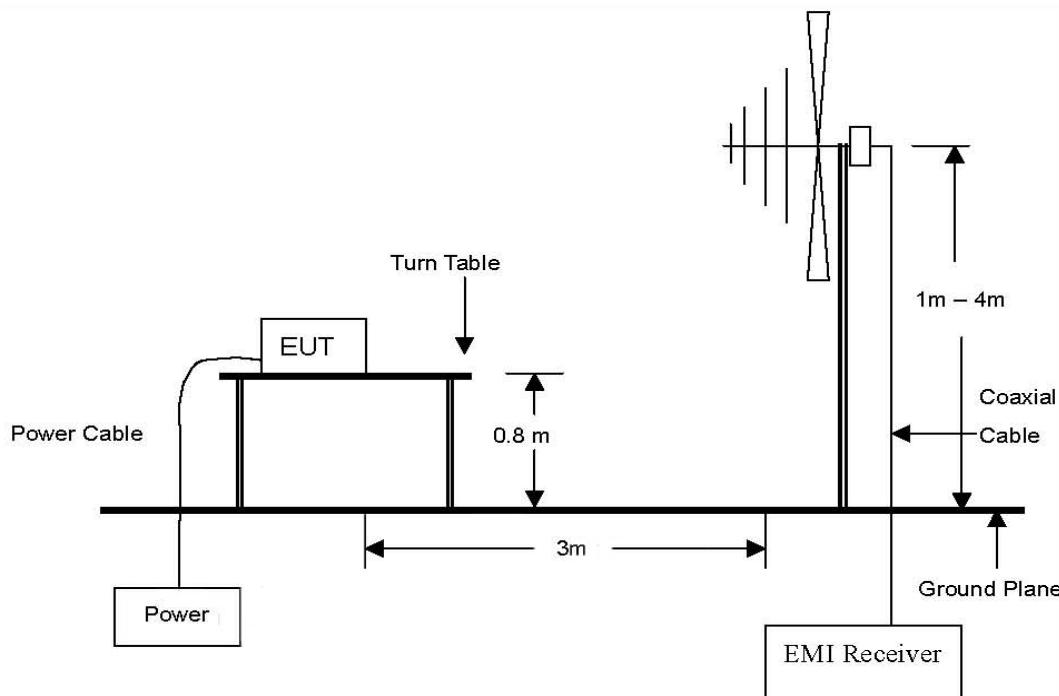

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

The diagram below shows the test setup that is utilized to make the measurements for emission. The spurious emissions were investigated from 1 GHz to the 10th harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

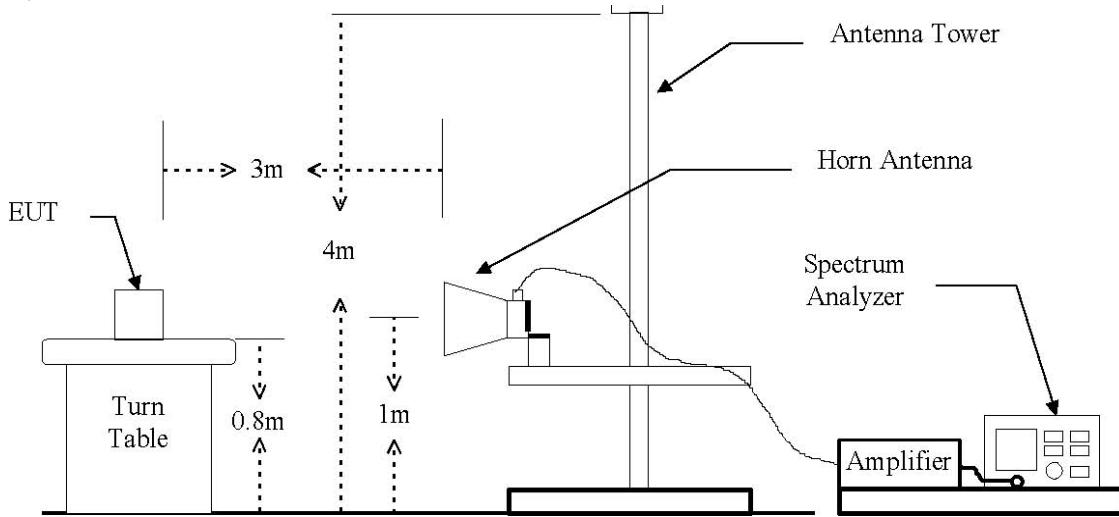

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.1.2. Conducted Spurious Emission



2.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement , provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section , the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.209(a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

| Frequency (MHz) | Distance (Meters) | Field Strength (dB μ N/m) | Field Strength (μ N/m) |
|-----------------|-------------------|-------------------------------|-----------------------------|
| 0.009 – 0.490 | 300 | 20 log (2 400/F(kHz)) | 2 400/F(kHz) |
| 0.490 – 1.705 | 30 | 20 log (24 000/F(kHz)) | 24 000/F(kHz) |
| 1.705 – 30.0 | 30 | 29.54 | 30 |
| 30 - 88 | 3 | 40.0 | 100 |
| 88 – 216 | 3 | 43.5 | 150 |
| 216 – 960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates in section 11.0 & 12.0 of KDB 558074_v03r02 and ANSI C63.4 2003.

2.3.1. Test Procedures for emission below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum Hold Mode.

2.3.2. Test Procedures for emission from above 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a bi-log antenna, a horn antenna and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

NOTE:

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

1. Unwanted Emissions into Non-Restricted Frequency Bands

- The Reference Level Measurement refer to section 11.2

Set analyzer center frequency to DTS channel center frequency, SPAN \geq 1.5 times the DTS bandwidth, the RBW = 100 kHz and VBW \geq 3 x RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold.

- Unwanted Emissions Level Measurement refer to section 11.3

Set the center frequency and span to encompass frequency range to be measured, the RBW = 100 kHz and VBW \geq 3 x RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold.

2. Unwanted Emissions into Restricted Frequency Bands

- Peak Power measurement procedure refer to section 12.2.4

Set RBW = as specified in Table 1, VBW \geq 3 x RBW, Detector = Peak, Sweep time = auto, Trace = Max hold.

Table 1- RBW as a function of frequency

| Frequency | RBW |
|----------------|---------------|
| 9 – 150 kHz | 200 – 300 Hz |
| 0.15 – 30 MHz | 9 – 10 kHz |
| 30 – 1 000 MHz | 100 – 120 kHz |
| >1 000 MHz | 1 MHz |

- Average Power measurements procedure refer to section 12.2.5.2

Set RBW = 1 MHz, VBW \geq 3 x RBW, Detector = RMS, if span/(# of points in sweep) \leq (RBW/2).

Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied then the detector mode shall be set to peak,

Averaging type = power(i.e., RMS). Sweep time = auto, Perform a trace average of at least 100 traces.

If duty cycle < 98 percent, a correction factor shall be added to the measurement results.

- Voltage averaging mode was used above the correction factor is $20 \log (1/x)$, where x is the duty cycle.

3. To get a maximum emission level from the EUT, the EUT is manipulated through three orthogonal planes. Worst orthogonal plan of EUT is X – axis during radiation test.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.3.3. Test Procedures for Conducted Spurious Emissions

All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

Per the guidance of KDB 558074_v03r02, section 11.1 & 11.2 & 11.3, the reference level for out of band emissions is established from the plots of this section since the band edge emissions are measured with a RBW of 100 kHz. This reference level is then used as the limit in subsequent plots for out of band spurious emissions shown in section 2.4.3. The limit for out of band spurious emission at the band edge is 20 dB below the fundamental emission level measured in a 100 kHz bandwidth.

1. Conducted Emissions at Band Edge

- The Measurement refer to section 11.2

Set the center frequency and span to encompass frequency range to be measured, the RBW = 100 kHz and VBW \geq 3 x RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold, Ensure that the number of measurement points \geq span/RBW, The trace was allowed to stabilize.

2. Conducted Spurious Emissions

- The Measurement refer to section 11.3

Start frequency was set to 9 kHz and stop frequency was set to 26.5 GHz (separated into two plots per channel), RBW = 100 kHz, VBW \geq 3 x RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold, The trace was allowed to stabilize.

3. Correction function

- For plots showing conducted spurious emissions from 9 kHz to 26.5 GHz, all path loss of wide frequency range was investigated and compensated to spectrum analyzer as Correction function.
So, the reading values shown in plots were final result.

2.4. Test Results

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

2.4.1. Radiated Spurious Emission

The frequency spectrum from 9 kHz to 1 000 MHz was investigated.

| Radiated Emissions | | | Ant | Correction Factors | | Total | FCC Limit | |
|--------------------|----------------------|-------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz) | Reading (dB μ N) | Detect Mode | Pol. | AF (dB/m) | AMP + CL (dB) | Actual (dB μ N/m) | Limit (dB μ N/m) | Margin (dB) |
| 31.94 | 43.59 | Peak | V | 12.84 | -27.03 | 29.40 | 40.00 | 10.60 |
| 206.54 | 40.02 | Peak | V | 11.98 | -25.30 | 26.70 | 43.50 | 16.80 |
| 276.38 | 38.46 | Peak | V | 14.56 | -24.82 | 28.20 | 46.00 | 17.80 |
| 322.94 | 43.29 | Peak | H | 14.66 | -24.65 | 33.30 | 46.00 | 12.70 |
| 400.54 | 44.31 | Peak | V | 16.78 | -24.99 | 36.10 | 46.00 | 9.90 |
| Above 500.00 | Not detected | - | - | - | - | - | - | - |

Remark:

1. Spurious emissions for all channels and modes were investigated and almost the same below 1 GHz.
2. Reported spurious emissions are in Middle channel as worst case among other modes.
3. Radiated spurious emission measurement as below
(Actual = Reading + Antenna Factor + Amp + CL)

2.4.2. Spurious Radiated Emission

The frequency spectrum from above 1 000 MHz was investigated. All reading values are peak and average values.

GFSK (1 Mbps)

Low Channel (2 402 MHz)

| Radiated Emissions | | | Ant. | Correction Factors | | | Total | FCC Limit | |
|--------------------|----------------------|-------------|------|--------------------|---------|-----------|-----------------------|----------------------|-------------|
| Frequency (MHz) | Reading (dB μ N) | Detect Mode | Pol. | AF (dB/m) | CL (dB) | Duty (dB) | Actual (dB μ N/m) | Limit (dB μ N/m) | Margin (dB) |
| *2 310.00 | 12.53 | Peak | H | 27.70 | 6.09 | - | 46.32 | 74.00 | 27.68 |
| *2 310.00 | 2.44 | Average | H | 27.70 | 6.09 | 6.78 | 43.01 | 54.00 | 10.99 |
| *2 337.20 | 17.99 | Peak | H | 27.80 | 6.15 | - | 51.94 | 74.00 | 22.06 |
| *2 337.20 | 3.65 | Average | H | 27.80 | 6.15 | 6.78 | 44.38 | 54.00 | 9.62 |
| *2 390.00 | 13.63 | Peak | H | 28.05 | 6.25 | - | 47.93 | 74.00 | 26.07 |
| *2 390.00 | 3.37 | Average | H | 28.05 | 6.25 | 6.78 | 44.45 | 54.00 | 9.55 |

| Radiated Emissions | | | Ant. | Correction Factors | | | Total | FCC Limit | |
|--------------------|----------------------|-------------|------|--------------------|--------------|-----------|-----------------------|----------------------|-------------|
| Frequency (MHz) | Reading (dB μ N) | Detect Mode | Pol. | AF (dB/m) | AMP+ CL (dB) | Duty (dB) | Actual (dB μ N/m) | Limit (dB μ N/m) | Margin (dB) |
| *4 804.47 | 42.35 | Peak | H | 32.62 | -33.97 | - | 41.00 | 74.00 | 33.00 |
| *4 804.47 | 32.01 | Average | H | 32.62 | -33.97 | 6.78 | 37.44 | 54.00 | 16.56 |
| Above 4 900.00 | Not detected | - | - | - | - | - | - | - | - |

Middle Channel (2 440 MHz)

| Radiated Emissions | | | Ant. | Correction Factors | | | Total | FCC Limit | |
|--------------------|----------------------|-------------|------|--------------------|--------------|-----------|-----------------------|----------------------|-------------|
| Frequency (MHz) | Reading (dB μ N) | Detect Mode | Pol. | AF (dB/m) | AMP+ CL (dB) | Duty (dB) | Actual (dB μ N/m) | Limit (dB μ N/m) | Margin (dB) |
| *4 879.67 | 44.45 | Peak | H | 33.00 | -33.71 | - | 43.74 | 74.00 | 30.26 |
| *4 879.67 | 33.50 | Average | H | 33.00 | -33.71 | 6.78 | 39.57 | 54.00 | 14.43 |
| Above 4 900.00 | Not detected | - | - | - | - | - | - | - | - |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel (2 480 MHz)

| Radiated Emissions | | | Ant. | Correction Factors | | | Total | FCC Limit | |
|--------------------|----------------------|-------------|------|--------------------|---------|-----------|-----------------------|----------------------|-------------|
| Frequency (MHz) | Reading (dB μ V) | Detect Mode | Pol. | AF (dB/m) | CL (dB) | Duty (dB) | Actual (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
| *2 483.50 | 16.84 | Peak | H | 28.31 | 6.27 | - | 51.42 | 74.00 | 22.58 |
| *2 483.50 | 2.75 | Average | H | 28.31 | 6.27 | 6.78 | 44.11 | 54.00 | 9.89 |
| *2 483.75 | 18.27 | Peak | H | 28.31 | 6.27 | - | 52.85 | 74.00 | 21.15 |
| *2 483.75 | 3.93 | Average | H | 28.31 | 6.27 | 6.78 | 45.29 | 54.00 | 8.71 |
| *2 500.00 | 13.16 | Peak | H | 28.35 | 6.28 | - | 47.79 | 74.00 | 26.21 |
| *2 500.00 | 3.39 | Average | H | 28.35 | 6.28 | 6.78 | 44.80 | 54.00 | 9.20 |

| Radiated Emissions | | | Ant. | Correction Factors | | | Total | FCC Limit | |
|--------------------|----------------------|-------------|------|--------------------|--------------|-----------|-----------------------|----------------------|-------------|
| Frequency (MHz) | Reading (dB μ V) | Detect Mode | Pol. | AF (dB/m) | AMP+ CL (dB) | Duty (dB) | Actual (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
| *4 960.08 | 44.04 | Peak | H | 33.16 | -33.56 | - | 43.64 | 74.00 | 30.36 |
| *4 960.08 | 32.92 | Average | H | 33.16 | -33.56 | 6.78 | 39.30 | 54.00 | 14.70 |
| Above 5 000.00 | Not detected | - | - | - | - | - | - | - | - |

Remarks :


- “*” means the restricted band.
- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
- Actual = Reading + AF + AMP + CL

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


2.4.3. Spurious RF Conducted Emissions: Plot of Spurious RF Conducted Emission

GFSK (1 Mbps)

Low Channel

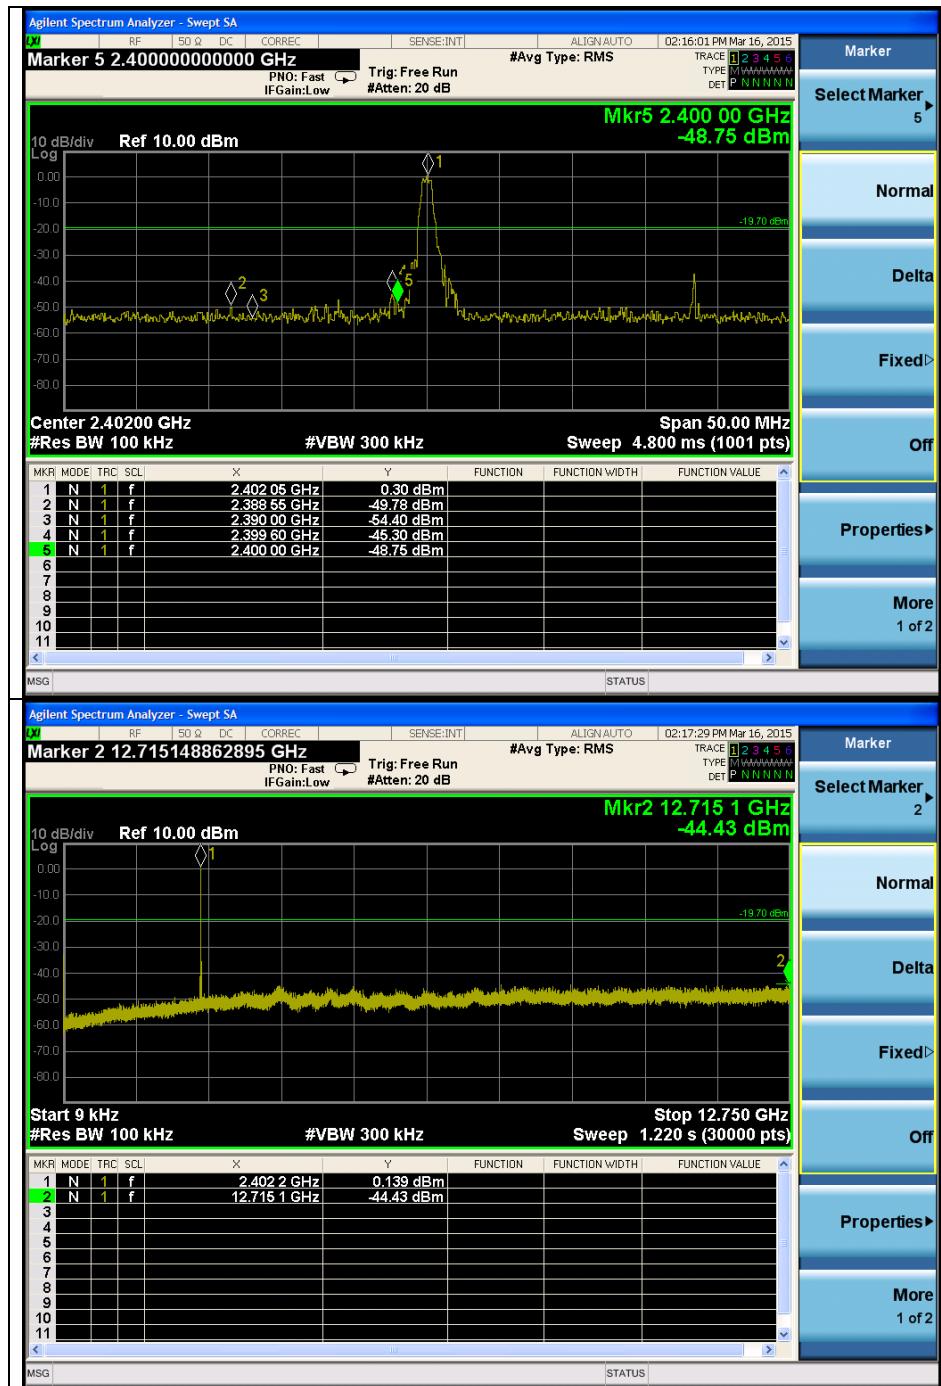


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

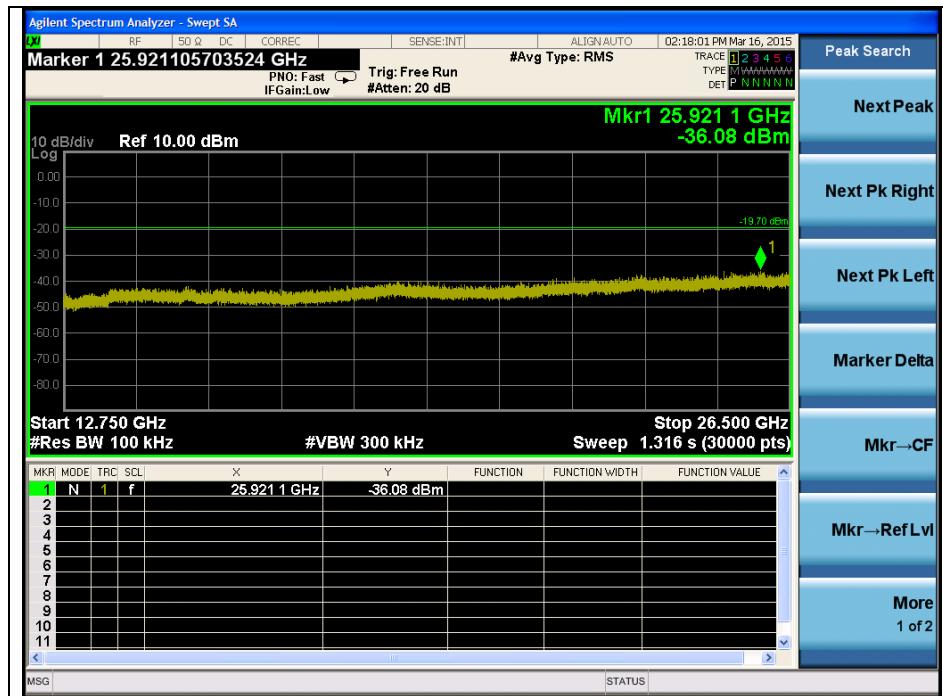


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

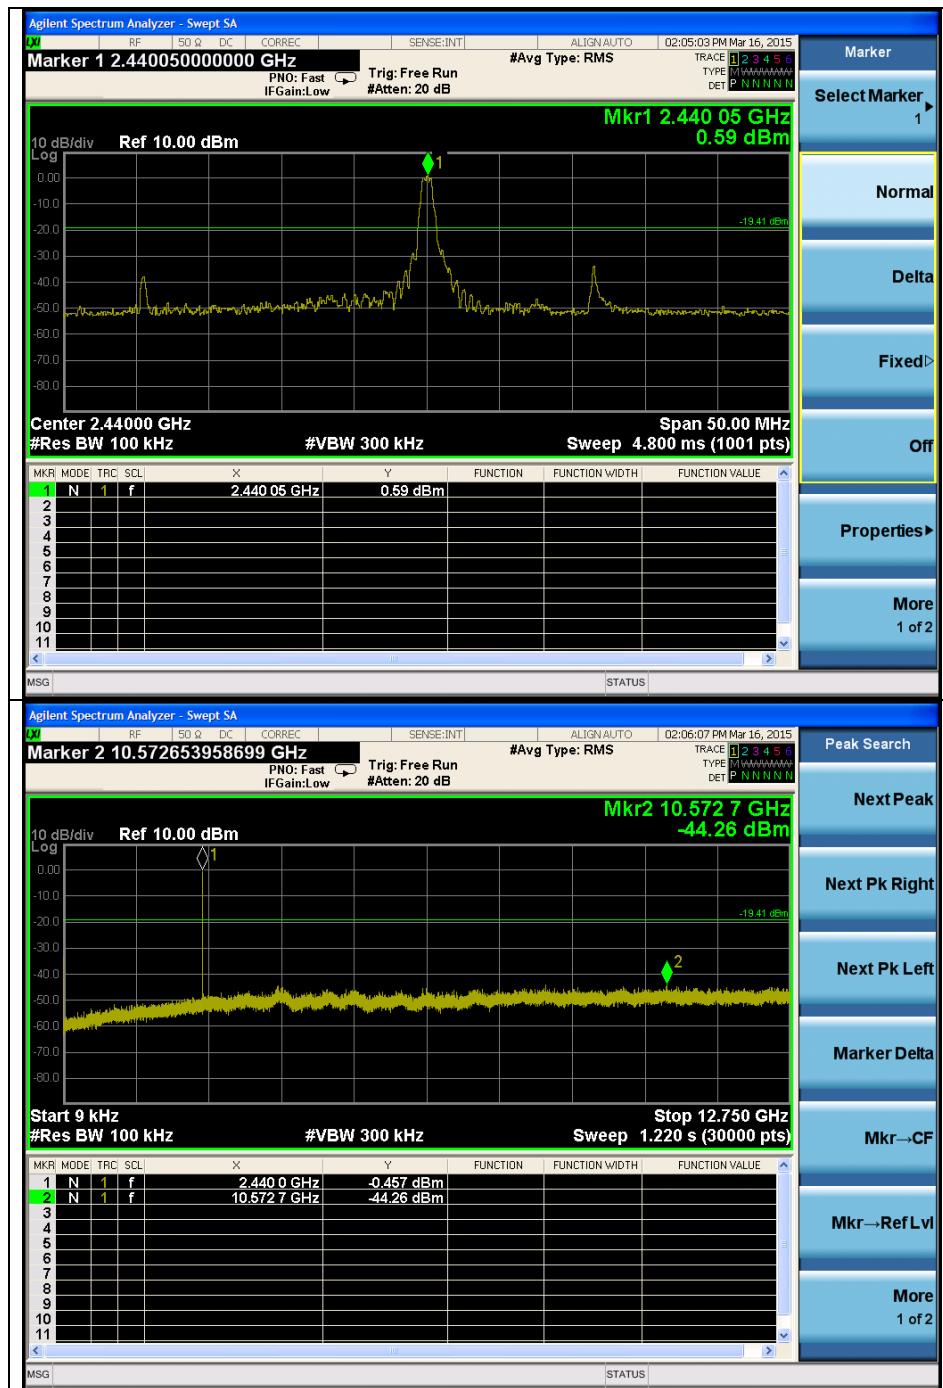


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

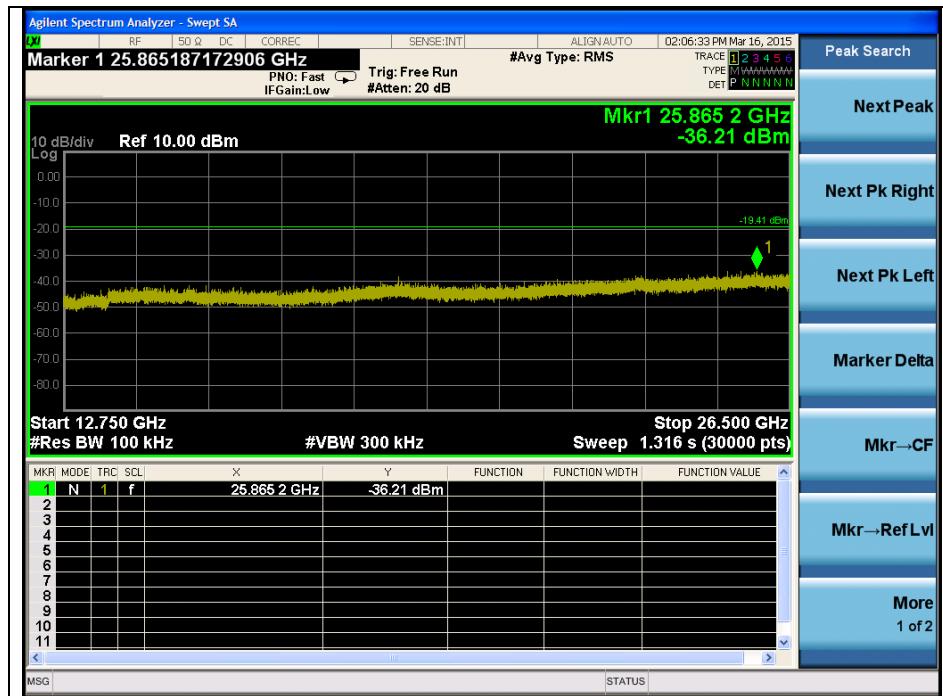


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

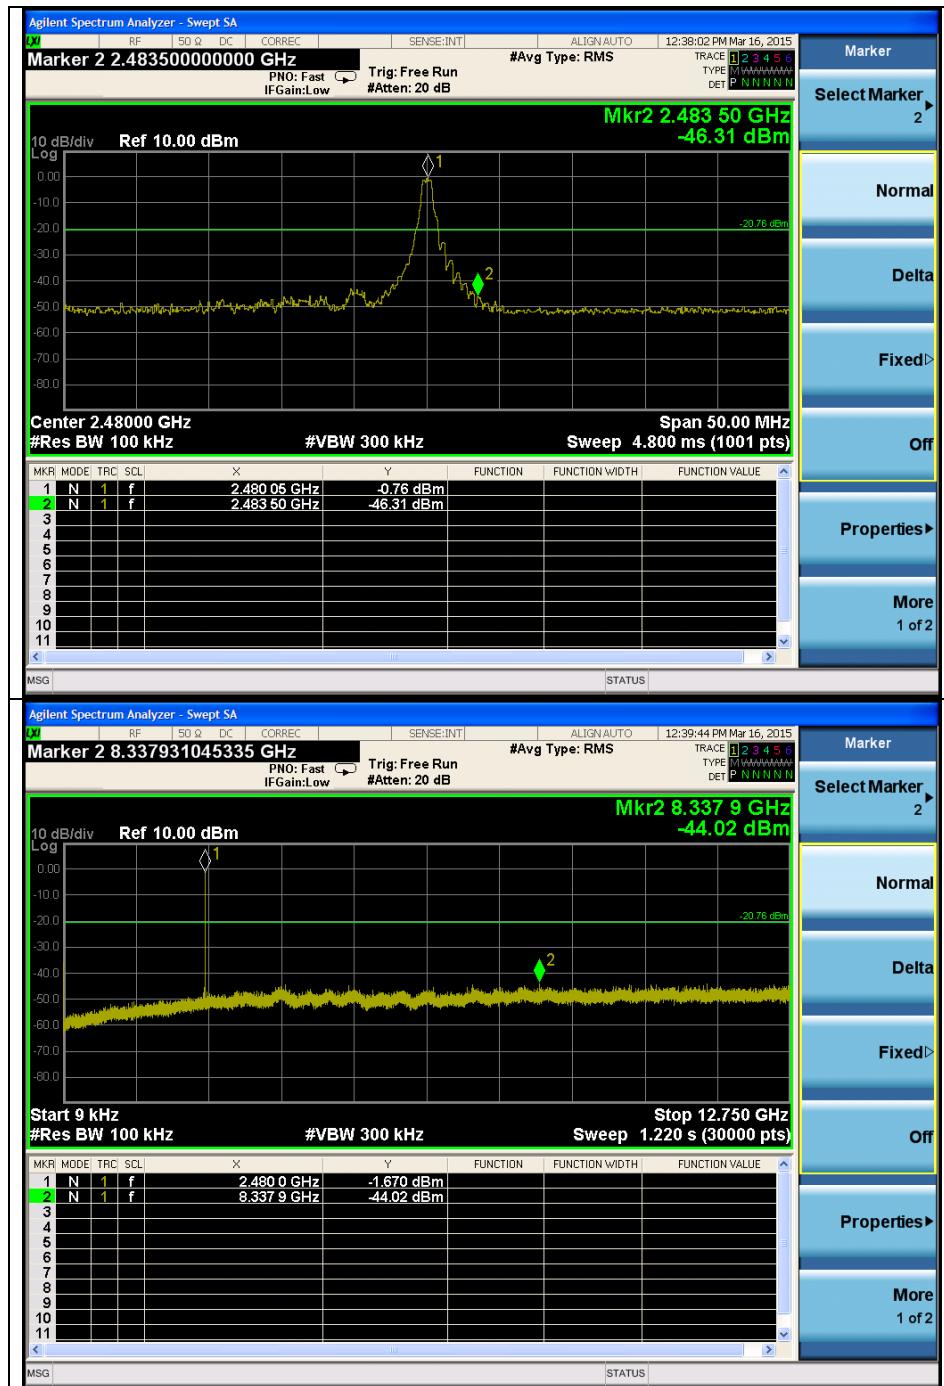

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

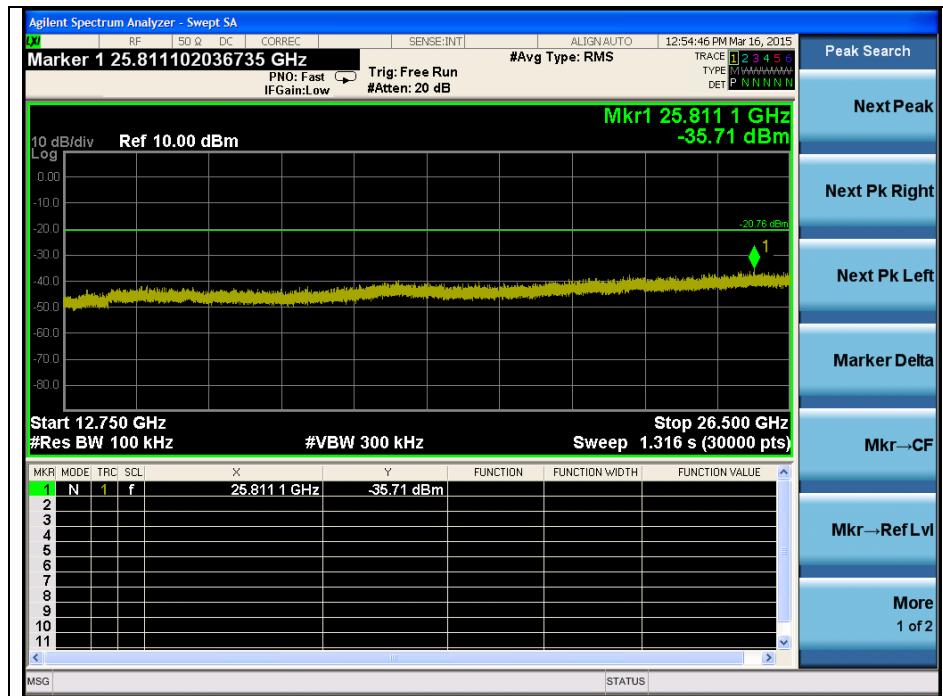

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3. 6 dB Bandwidth Measurement

3.1. Test Setup



3.2. Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 ~ 928 MHz, 2 400 ~ 2 483.5 MHz, and 5 725 ~ 5 825 MHz bands. The minimum of 6 dB Bandwidth shall be at least 500 kHz.

3.3. Test Procedure

3.3.1. 6 dB Bandwidth

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

The test follows section 8.0 of FCC KDB Publication 558074_v03r02.

Tests performed using section 8.1 Option 1.

- Option 1:

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude point (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.4. Test Results

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

| Mode | Frequency (MHz) | Channel | Data Rate (Mbps) | 6 dB Bandwidth (MHz) |
|------|-----------------|---------|------------------|----------------------|
| GFSK | 2 402 | Low | 1 | 0.654 |
| | 2 440 | Middle | 1 | 0.672 |
| | 2 480 | High | 1 | 0.657 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

GFSK (1Mbps)

Low Channel



Middle Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4. Maximum Peak Output Power Measurement

4.1. Test Setup

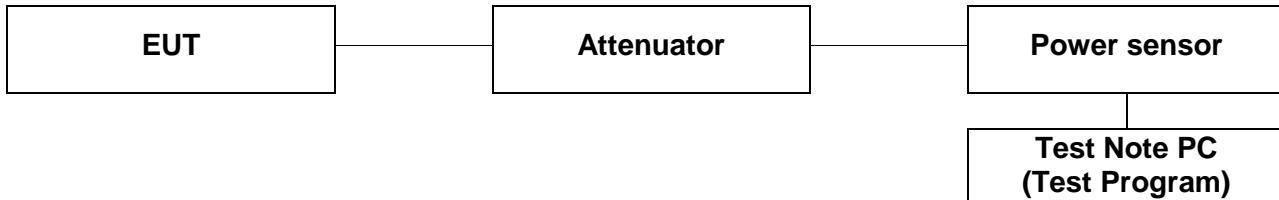

4.2. Limit

According to §15.247(b)(3), for systems using digital modulation in the 902 ~ 928 MHz, 2 400 ~ 2 483.5 MHz, and 5 725 ~ 5 850 MHz band: 1 Watt. As an alternative to a peak power measurement, compliance with the one watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antenna elements. The average must not include any intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), the conducted output power limit specified in paragraph(b) of this section is based on the use of antenna with directional gains that do not exceed 6 dBi. Except as shown in paragraph(c) of this section, if transmitting antenna of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3. Test Procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

The test follows section 9.1.2 of FCC KDB Publication 558074_v03r02.

- Peak power meter method

-The maximum peak conducted output power can be measured using a broad band peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector

4.4. Test Results

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

| Mode | Channel | Frequency (MHz) | Data Rate (Mbps) | Attenuator + Cable offset (dB) | Peak Power Result (dB m) |
|------|---------|-----------------|------------------|--------------------------------|--------------------------|
| GFSK | Low | 2 402 | 1 | 20.80 | 2.05 |
| | Middle | 2 440 | 1 | 20.84 | 1.90 |
| | High | 2 480 | 1 | 20.85 | 0.85 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5. Power Spectral Density Measurement

5.1. Test Setup



5.2. Limit

§15.247(e) For digitally modulated system, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dB m in any 3 kHz band any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.3. Test Procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

The measurements are recorded using the PKPSD measurement procedure in section 10.2 of KDB 558074_v03r02.

- This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to at least 1.5 times the DTS bandwidth.
3. Set the RBW to : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.4. Test Results

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

| Mode | Channel | Frequency (MHz) | Data Rate (Mbps) | Measured PSD (dB m) | Maximum Limit (dB m) |
|------|---------|-----------------|------------------|---------------------|----------------------|
| GFSK | Low | 2 402 | 1 | -11.63 | 8 |
| | Middle | 2 440 | 1 | -13.01 | 8 |
| | High | 2 480 | 1 | -14.91 | 8 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

GFSK (1Mbps)**Low Channel****Middle Channel**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6. Antenna Requirement

6.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6 dB i are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6 dB i.

6.2. Antenna Connected Construction

Antenna used in this product is internal type with gain of -0.2 dB i.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.