


Test Report

Product	Location transmitter for indoors way finding and tracking		
Name and address of the applicant	Sonitor Technologies AS Drammensveien 288, 0283 Oslo, Norway		
Name and address of the manufacturer	Sonitor Technologies AS Drammensveien 288, 0283 Oslo Norway		
Model	INF-C322		
Rating	6Vdc (4x1.5V AA battery)		
Trademark	ultraBeacon™		
Serial number	Radiated sample: 660; Conducted sample: 657		
Additional information	This tested device supports both IEEE802.15.4 based and BLE radio technologies. This test report covers only BLE		
Tested according to	FCC Part 15.247 Frequency Hopping Transmitters / Digital Transmission Systems Industry Canada RSS-247, Issue 2 Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices		
Order number	379748		
Tested in period	2019.10.22 – 2019.10.26		
Issue date	2019.10.30		
Name and address of the testing laboratory	 Instituttveien 6 Kjeller, Norway	CAB Number: FCC: NO0001 ISED: NO0470 TEL: +47 22 96 03 30 FAX: +47 22 96 05 50	  NORWEGIAN ACCREDITATION TEST 033
An accredited technical test executed under the Norwegian accreditation scheme			
 Prepared by [G.Suhanthakumar]		 Approved by [Frode Sveinsen]	
This report shall not be reproduced except in full without the written approval of Nemko. Opinions and interpretations expressed within this report are not part of the current accreditation. This report was originally distributed electronically with digital signatures. For more information contact Nemko.			

CONTENTS

1	INFORMATION	3
1.1	Test Item.....	3
1.2	Normal test condition.....	4
1.3	Test Engineer(s)	4
1.4	Description of modification for Modification Filing	4
1.5	Family List Rational	4
1.6	Antenna Requirement.....	4
1.7	Worst-Case Configuration and Mode	4
1.8	Comments	4
2	TEST REPORT SUMMARY	5
2.1	General.....	5
2.2	Test Summary	6
3	TEST RESULTS.....	7
3.1	Test Frequencies	7
3.2	99% Occupied Bandwidth	8
3.3	Minimum 6 dB Bandwidth	12
3.4	Peak Power Output	16
3.5	Conducted Emissions at Antenna Connector.....	27
3.6	Restricted Bands of operation	31
3.7	Spurious Emissions (Radiated)	32
3.8	Radiated emission 30 – 1000 MHz.....	35
3.9	Power Spectral Density (PSD).....	64
4	Measurement Uncertainty.....	68
5	LIST OF TEST EQUIPMENT	69
6	BLOCK DIAGRAM.....	70
6.1	Power Line Conducted Emission.....	70
6.2	Test Site Radiated Emission	70

1 INFORMATION

1.1 Test Item

Name	ultraBeacon™
FCC ID	2AD7T21118051701
ISED ID	2030-21118051701
Model/version	INF-C322
Serial number	Radiated sample: 660; Conducted sample: 657
Hardware identity and/or version	V2.00
Software identity and/or version	INF-C322-1.1.0-rc 1.52638
Frequency Range	2400 – 2483.5 MHz
Tunable Bands	None
Number of Channels	40
Operating Modes	TX only
Measured BW (99%)	2.06 MHz
Emission classification	F1D
Transmitter spurious, dBµV/m@3m	PK: 61.05 ; AV: 41.05 (2.4835GHz)
Type of Modulation	GFSK, 1Mbps and 2Mbps
User Frequency Adjustment	None
Conducted Output Power, Max	0.00224 W (3.51dBm)
Type of Power Supply	6.0Vdc, (4x AA batteries)
Antenna Connector	Only integral antenna
Number of Antennas	1
Diversity or Smart Antennas	None
Desktop Charger	N/A

Description of Test Item

The ultraBeacon is a combined BLE and ultrasound beacon used as a part of Forkbeard platform for indoors positioning.

The Forkbeard platform delivers near 100 times better distance accuracy than Bluetooth signals alone, allowing you to get down to centimeter level location accuracy in indoor environments. Combining the strength of ultrasound and Bluetooth with the formidable array of sensor technologies found in modern device platforms, Forkbeard accurately positions mobile devices such as smartphones, tablets and laptops with a latency of only up to 1 – 2 seconds. Moreover, the ultrasound technology always ensures >99.9% room-level location accuracy, which makes Forkbeard the only indoor positioning technology needed for any workflow, and way-finding applications.

1.2 Normal test condition

Temperature: 20 - 24 °C
 Relative humidity: 20 - 50 %
 Normal test voltage: 6.0Vdc

The values are the limit registered during the test period.

1.3 Test Engineer(s)

G.Suhanthakumar

1.4 Description of modification for Modification Filing

Not applicable.

1.5 Family List Rational

Not Applicable.

1.6 Antenna Requirement

Is the antenna detachable? Yes No

If detachable, is the antenna connector non-standard? Yes No

Type of antenna connector: N/A

Ref. FCC §15.203

1.7 Worst-Case Configuration and Mode

Radiated Emissions were performed with the EUT set to transmit at the channel with the highest output power as worst-case scenario.

1.8 Comments

All measurements were done with the EUT powered by a fully charged battery.

All ports were populated during spurious emission measurements.

Revision history

Version	Date	Comment	Sign
00	2019.10.30	First Version	gns

2 TEST REPORT SUMMARY

2.1 General

All measurements are traceable to national standards.

The tests were conducted for demonstrating compliance with FCC CFR 47 Part 15, paragraph 15.247 and ISED Canada RSS-247 Issue 2 and RSS-GEN Issue 5.

Tests were performed in accordance with ANSI C63.4-2014 and and ANSI C63.10-2013.

Radiated tests were made in a semi-anechoic chamber at measuring distances of 1m, 3m and 10m.

A description of the test facility is on file with FCC and ISED.

New Submission

Production Unit

Class II Permissive Change

Pre-production Unit

DTS Equipment Code

Family Listing



THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".

Nemko Group authorizes the above named entity to reproduce this report provided it is reproduced in its entirety and for use by the entity's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use that a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party caused by decisions made or actions based on this report.

2.2 Test Summary

Name of test	FCC Part 15 reference	RSS-247 Issue 2, RSS-GEN Issue 5 reference	Result
Supply Voltage Variations	15.31(e)	6.11 (RSS-GEN)	N/A ¹
Number of frequencies	15.31(m)	6.8 (RSS-GEN)	Complies
Antenna Requirement	15.203	6.8 (RSS-GEN)	Complies ²
Power Line Conducted Emission	15.107(a) 15.207(a)	7.2 / 8.8 (RSS-GEN)	Complies ¹
99% Occupied Bandwidth	N/A	6.7 (RSS-GEN)	-
Minimum 6 dB Bandwidth	15.247(a)(2)	5.2 (1) (RSS-247)	Complies
Peak Power Output	15.247(b)	5.4 (RSS-247)	Complies
Power Spectral Density	15.247(e)	5.2 (2) (RSS-247)	Complies
Spurious Emissions (Antenna Conducted)	15.247(c)(d)	5.5 (RSS-247)	Complies
Spurious Emissions (Radiated)	15.247(c)(d) 15.109(a) 15.209(a)	5.5 (RSS-247) 7.3 (RSS-GEN) 8.9 (RSS-GEN)	Complies

¹ The tested equipment operates only with rechargeable battery.

² Integral antenna

3 TEST RESULTS

3.1 Test Frequencies

FCC Part 15.31 (m)

RSS-Gen 6.8

Authorized Band:	2400 - 2483.5 MHz
Frequency band width:	83.5MHz
Low Channel:	2402MHz
Mid channel:	2440MHz
High Channel:	2480MHz

3.2 99% Occupied Bandwidth

RSS-Gen, 6.7

ISED Canada RSS-247 Issue 2, Clause 5.1

ISED Canada RSS-GEN Issue 5, Clause 6.7

Measurement procedure: ANSI C63.10-2013 Clause 6.9.2 / 7.8.3

Test Results: Complies

Measurement Data:

Channel Frequency (MHz)	Measured 99% BW (MHz), 1Mbps	Measured 99% BW (MHz), 2Mbps
2402	1.05	2.05
2440	1.05	2.06
2480	1.05	2.06


See attached plots.

Requirements:


Frequency hopping systems in the 2400 - 2483.5 MHz band shall use at least 15 non-overlapping channels. No requirements for bandwidth for this frequency band.

No requirements for Digital Transmission Systems.


No requirement for 99% BW.

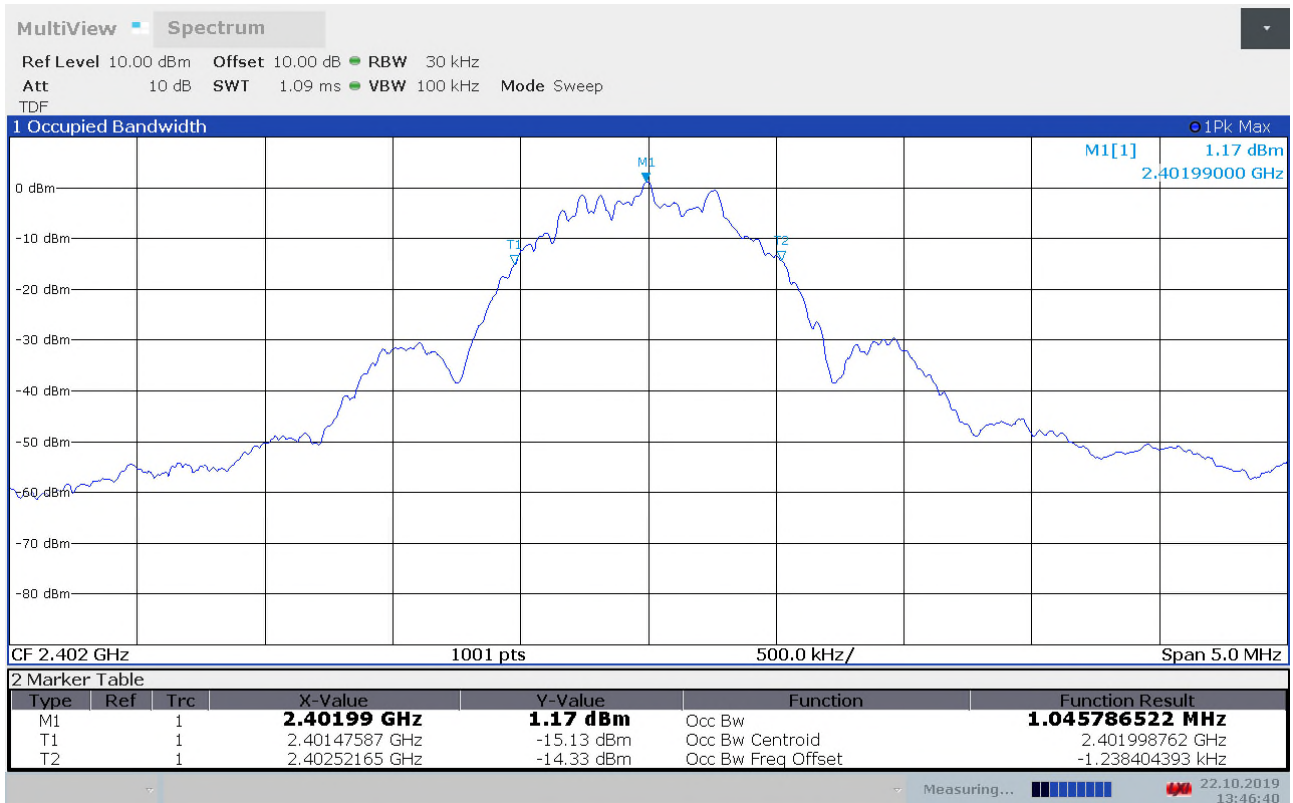


99% Bandwidth , ch2402MHz, 1Mbps

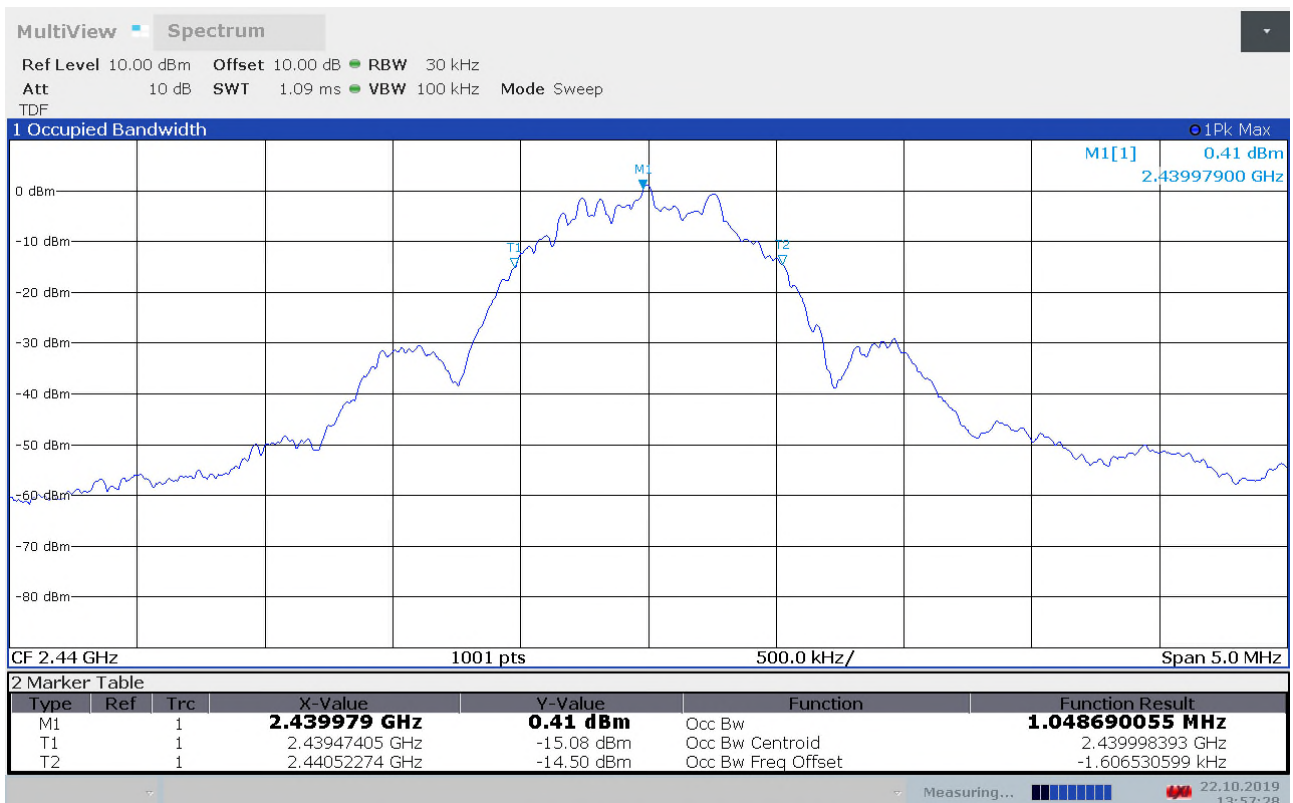


99% Bandwidth , ch2440MHz, 1Mbps

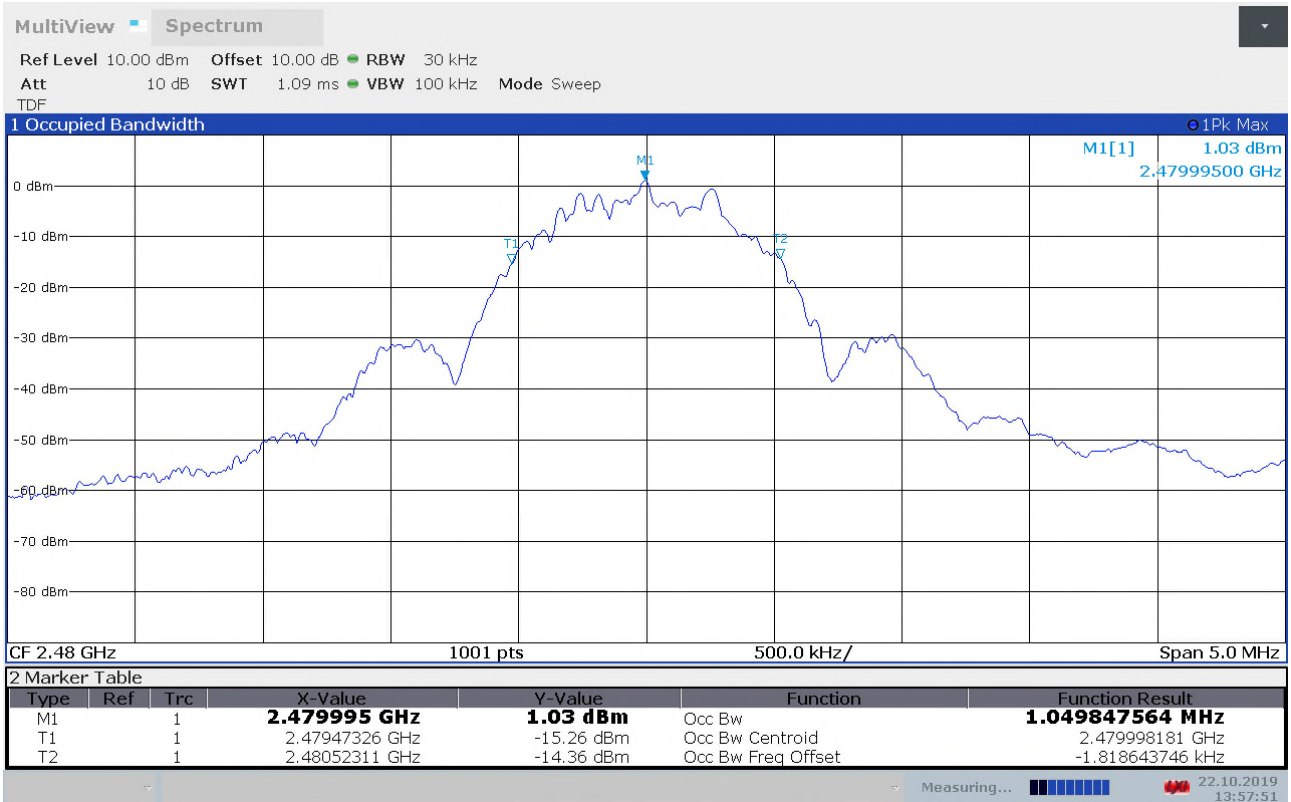


99% Bandwidth , ch2480MHz, 1Mbps

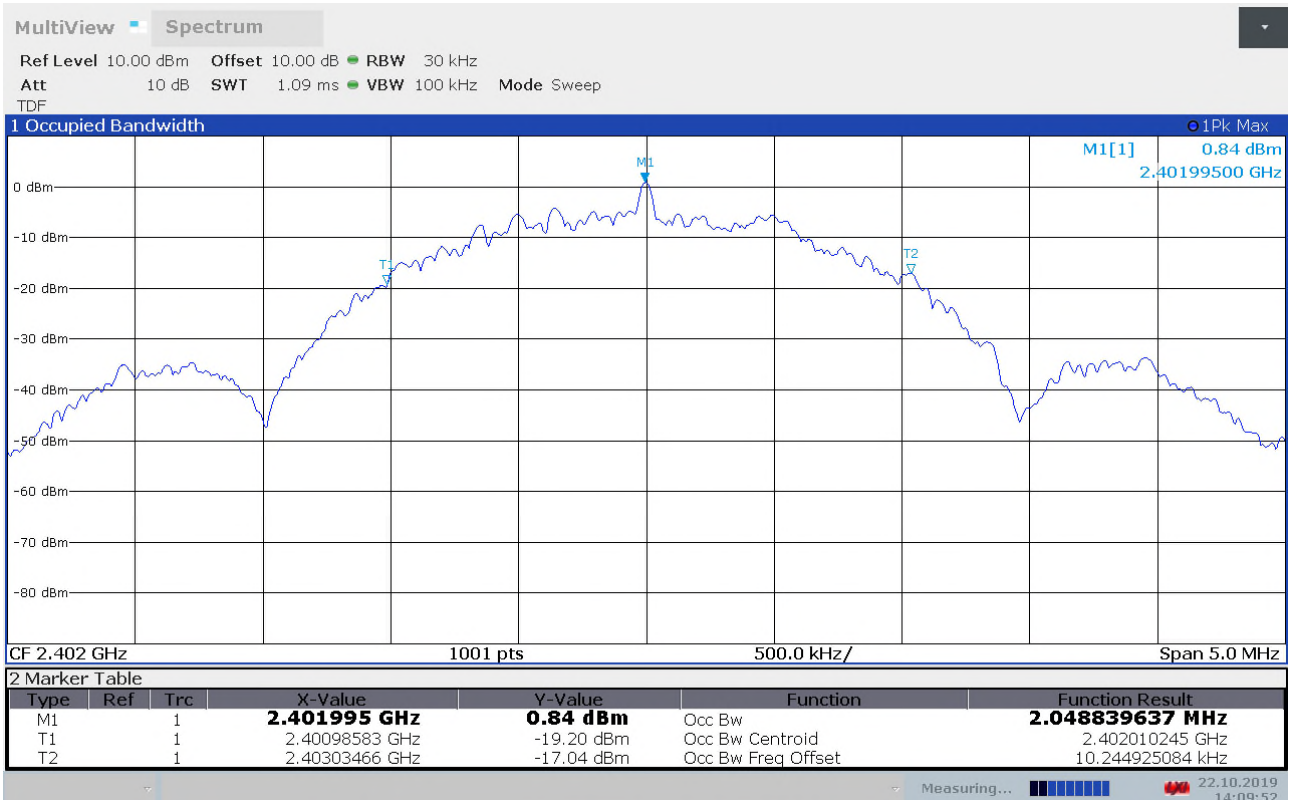

99% Bandwidth , ch2402MHz, 2Mbps

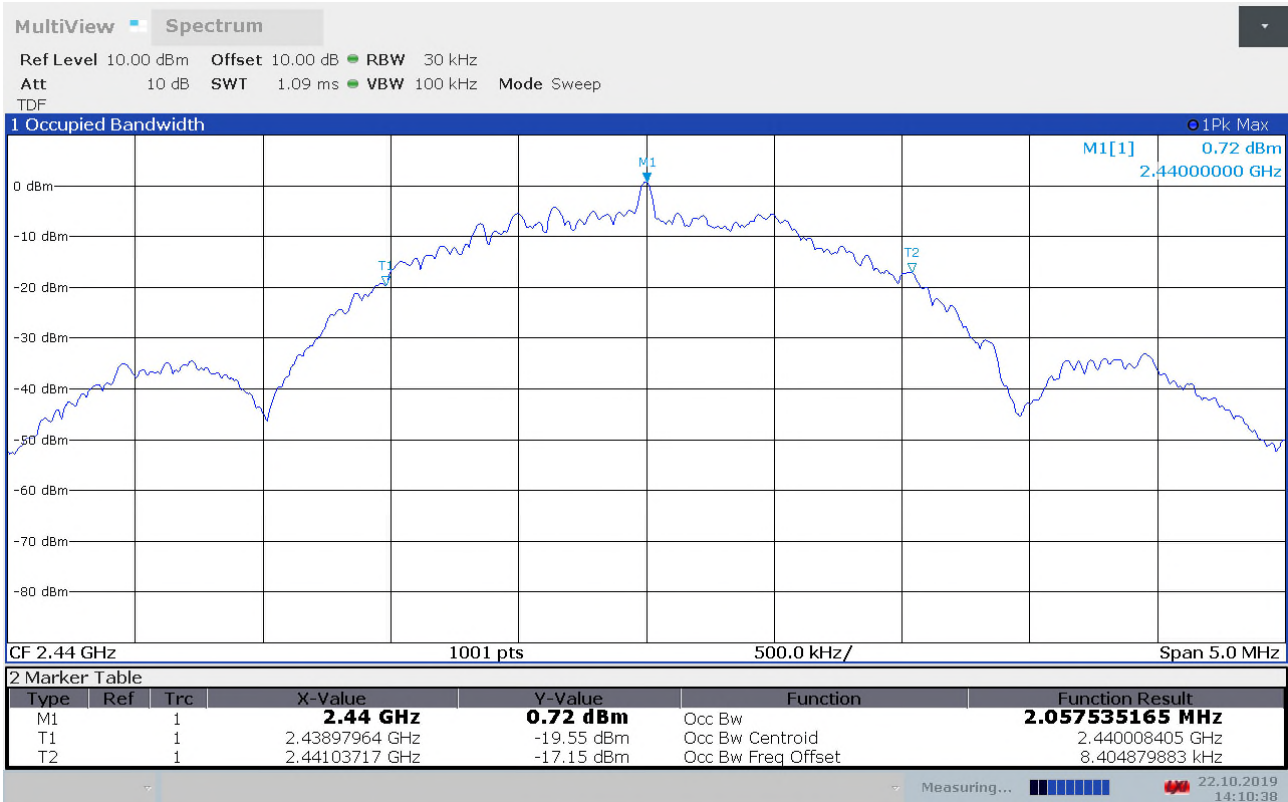

99% Bandwidth , ch2440MHz, 2Mbps

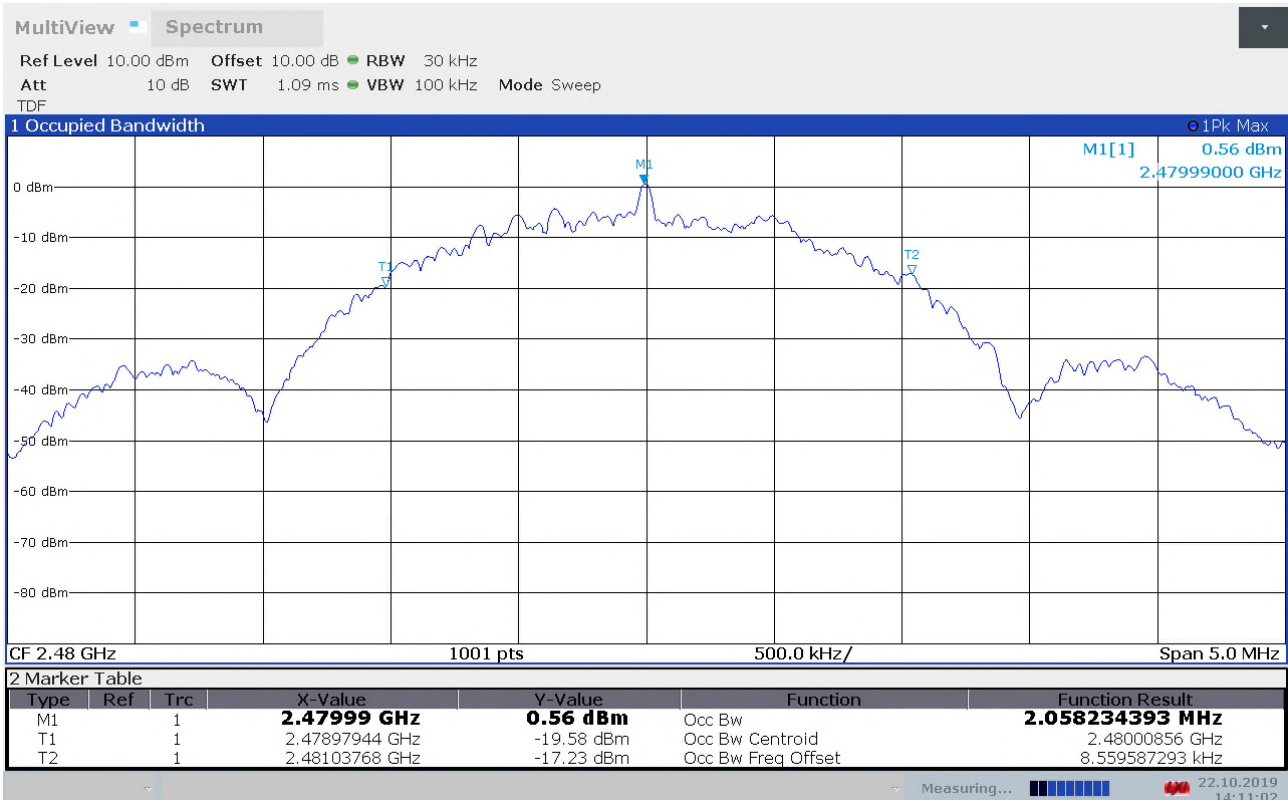

99% Bandwidth , ch2480MHz, 2Mbps

3.3 Minimum 6 dB Bandwidth

FCC Part 15.247 (a)(2)

ISED Canada RSS-247 Issue 2, Clause 5.2 (a)

Measurement procedure: ANSI C63.10-2013 Clause 11.8

Test Results: Complies


Measurement Data:

Channel Frequency (MHz)	Measured 6 dB BW (kHz), 1Mbps	Measured 6 dB BW (MHz), 2Mbps
2402	704.3	1.17
2440	719.3	1.17
2480	724.3	1.17


Requirements:

For Digital Transmission Systems in the 2400-2483.5 MHz band the minimum 6 dB bandwidth shall be at least 500 KHz.


No requirements for Frequency Hopping Systems.

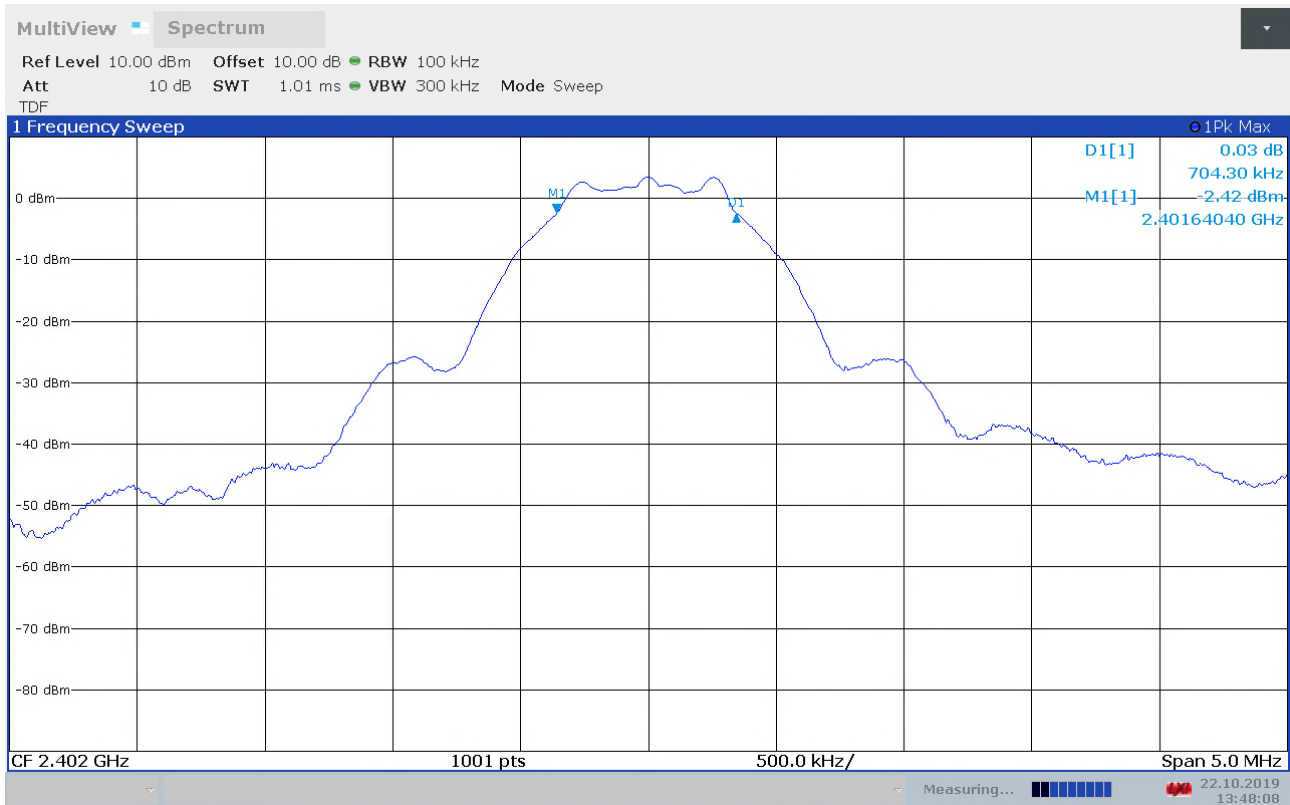

6 dB Bandwidth, ch2402MHz, 1Mbps

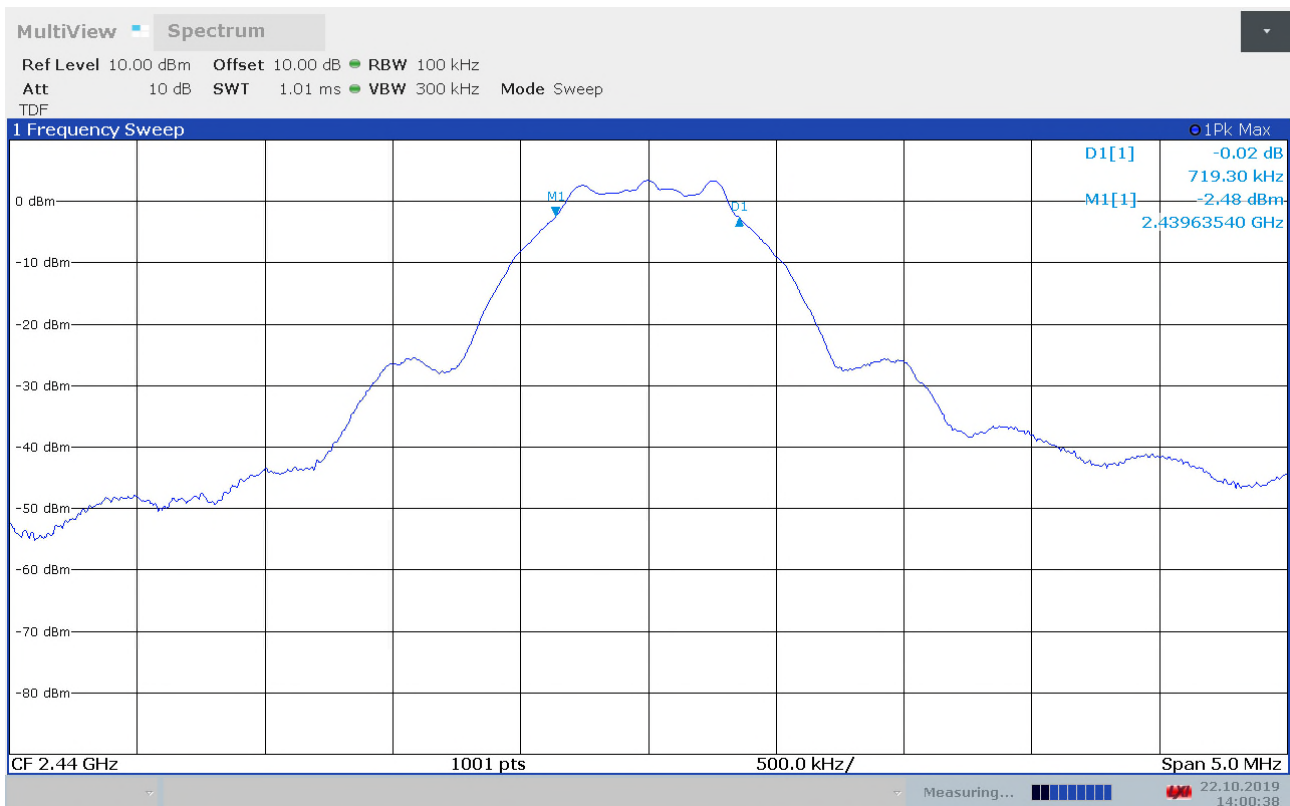


6 dB Bandwidth, ch2440MHz, 1Mbps

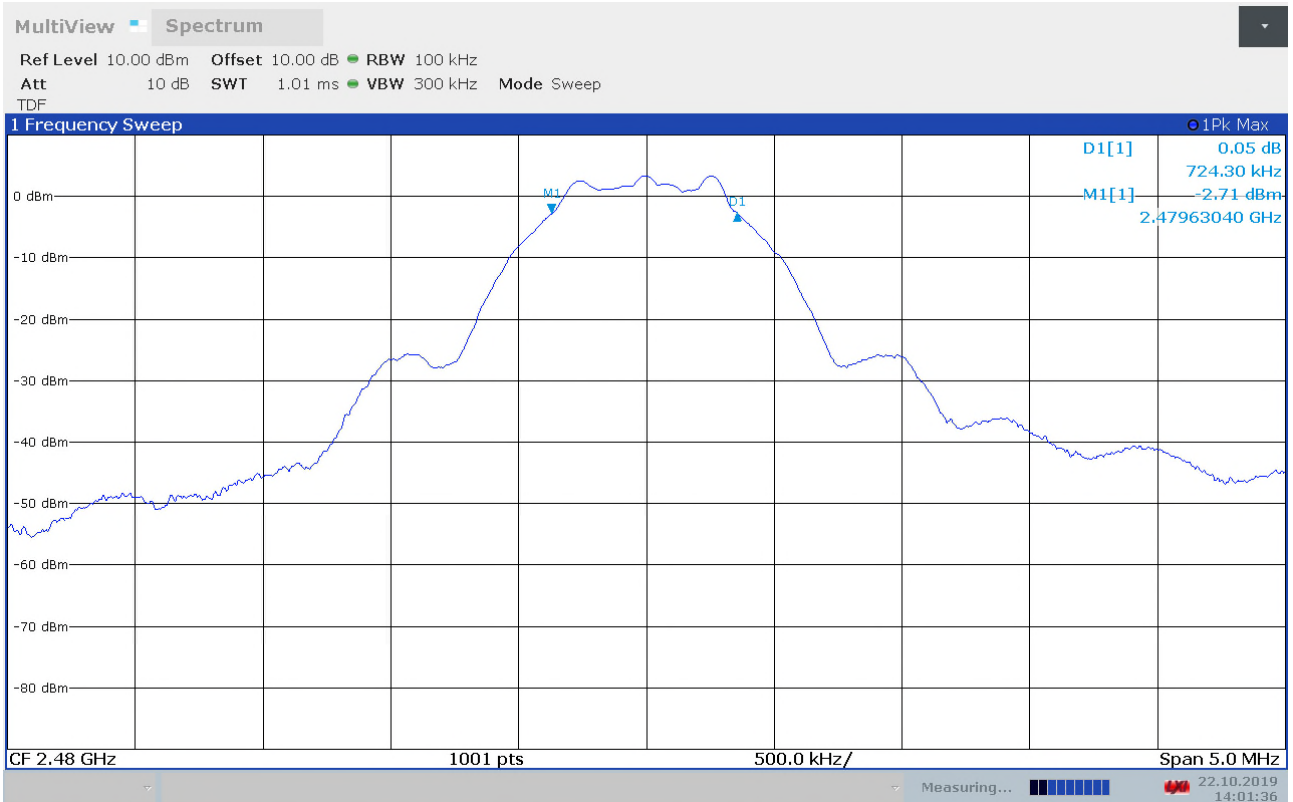


6 dB Bandwidth, ch2480MHz, 1Mbps



6 dB Bandwidth, ch2402MHz, 2Mbps

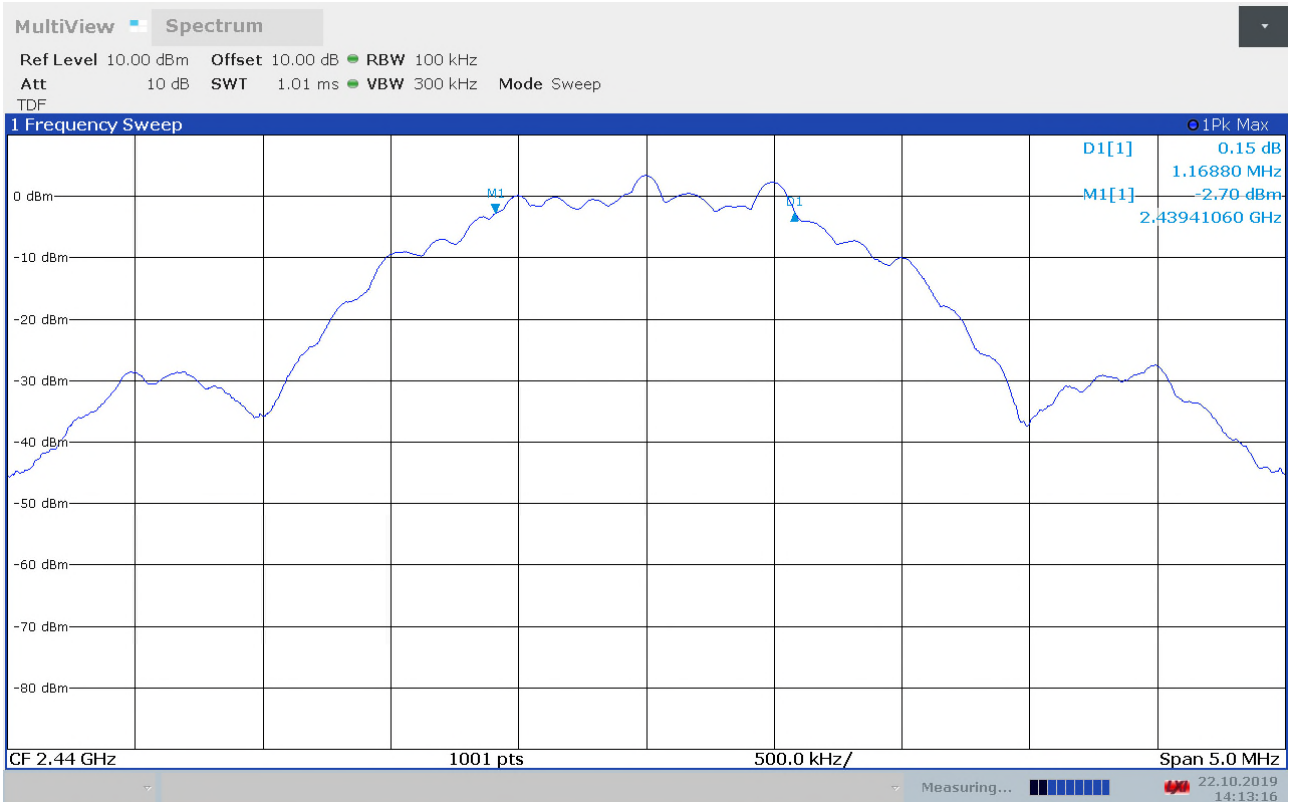

6 dB Bandwidth, ch2440MHz, 2Mbps

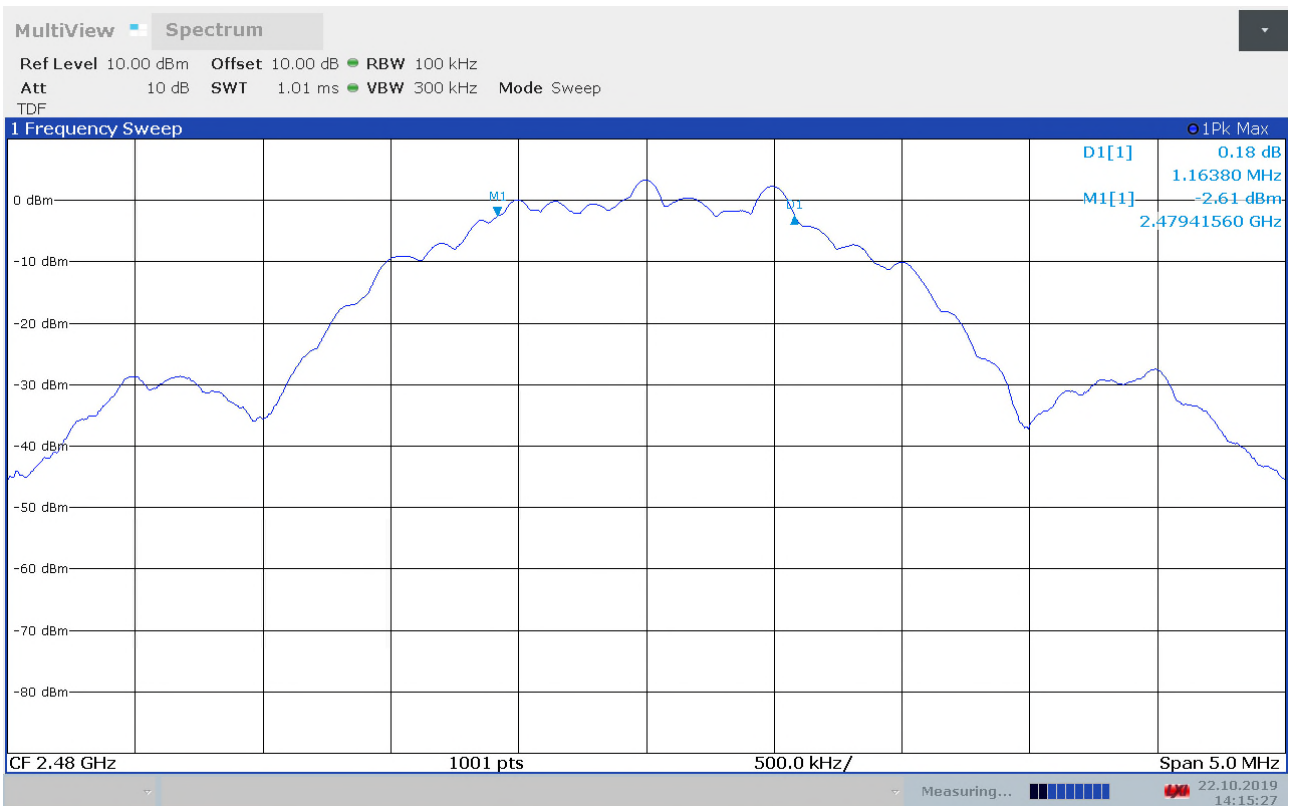

6 dB Bandwidth, ch2480MHz, 2Mbps

3.4 Peak Power Output

FCC part 15.247 (b)

ISED Canada RSS-247 Issue 2, Clause 5.4

Measurement procedure: ANSI C63.10-2013 Clause 11.9.1.2

Test Results: Complies

Measurement Data: 1Mbps

	2402 MHz	2440 MHz	2480 MHz
Conducted Power (dBm)	3.49	3.44	3.34
Conducted Power (Watts)	0.00223	0.00221	0.00216
Field Strength (dB μ V/m), HP	94.89	95.09	92.26
EIRP, Calculated (mWatts)	0.92	0.97	0.50
Antenna gain (dBi)	-3.8	-3.6	-6.3

Measurement Data: 2Mbps

	2402 MHz	2440 MHz	2480 MHz
Conducted Power (dBm)	3.51	3.42	3.35
Conducted Power (Watts)	0.00224	0.00220	0.00216
Field Strength (dB μ V/m), HP	95.00	94.94	92.42
EIRP, Calculated (mWatts)	0.94	0.94	0.52
Antenna gain (dBi)	-3.8	-3.7	-6.2

Antenna gain = $10 \cdot \log(\text{EIRP} / \text{Conducted power})$ dBi

EIRP is calculated from measured field strength by the formulas in KDB 412172 D01 Determining ERP and EIRP v01.

See attached plots.

Requirements:


The maximum peak output power shall not exceed the following limits:

For frequency hopping systems employing at least 75 hopping channels: 1 Watt


For all other frequency hopping systems in the 2400 - 2483.5 MHz band: 0.125 Watts

For Digital Transmission Systems in the 2400 - 2483.5 MHz band: 1 Watt


If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below the stated value above by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

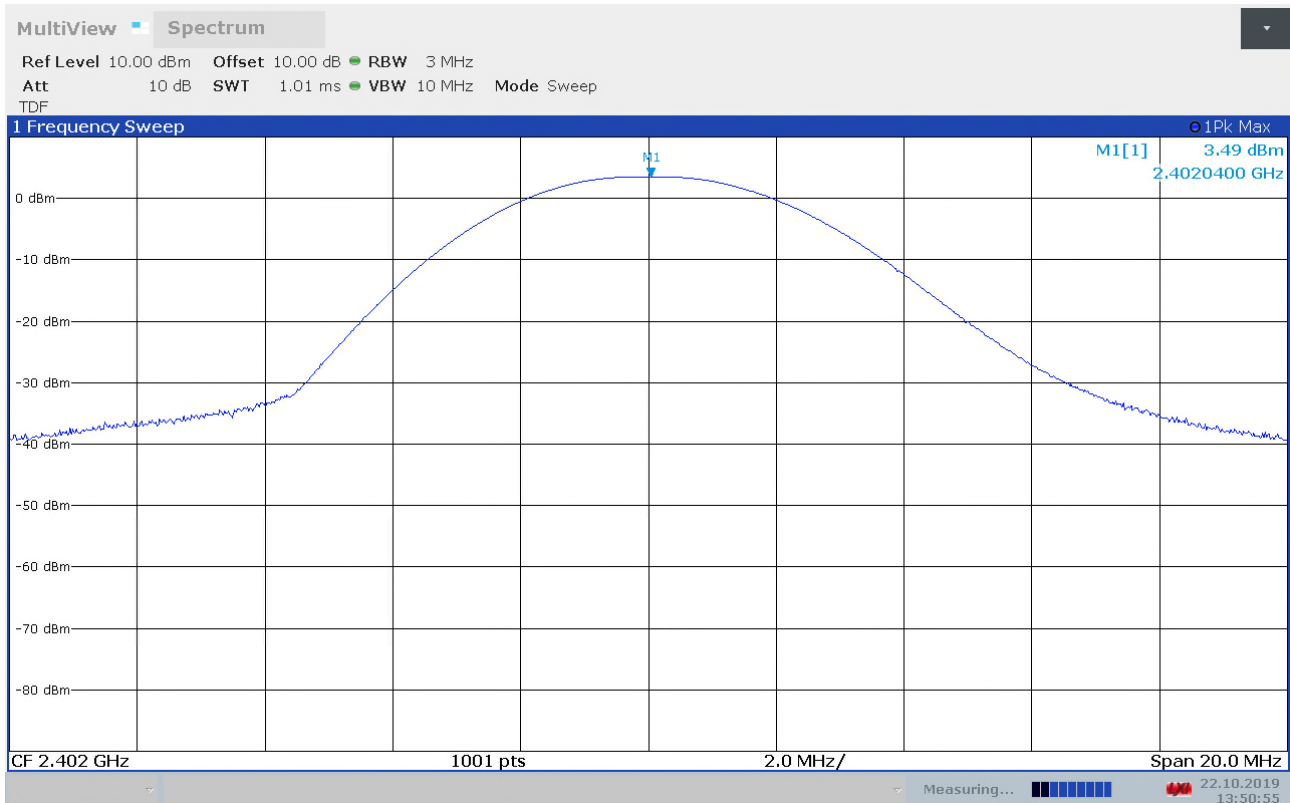


Conducted Power , Ch2402MHz, 1Mbps

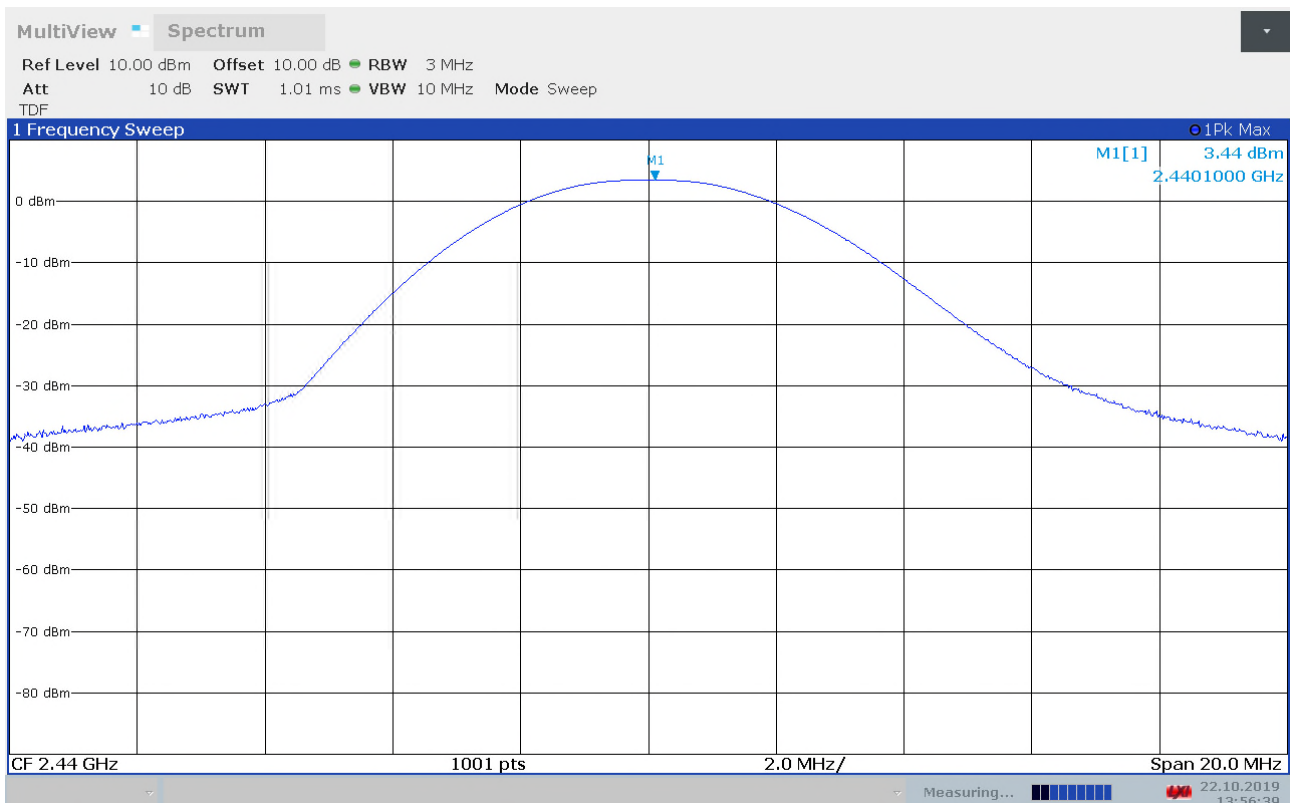

Conducted Power , Ch2440MHz, 1Mbps

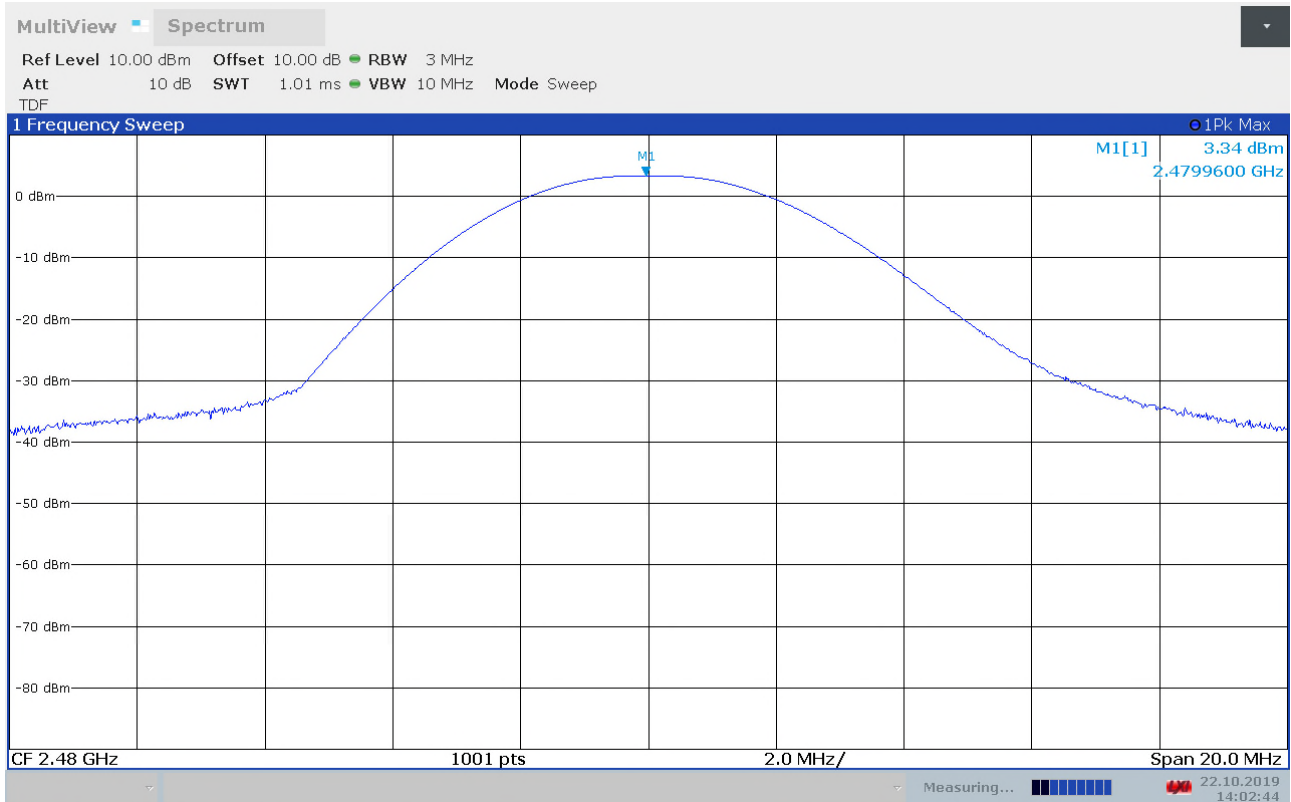


Conducted Power, Ch2480MHz, 1Mbps

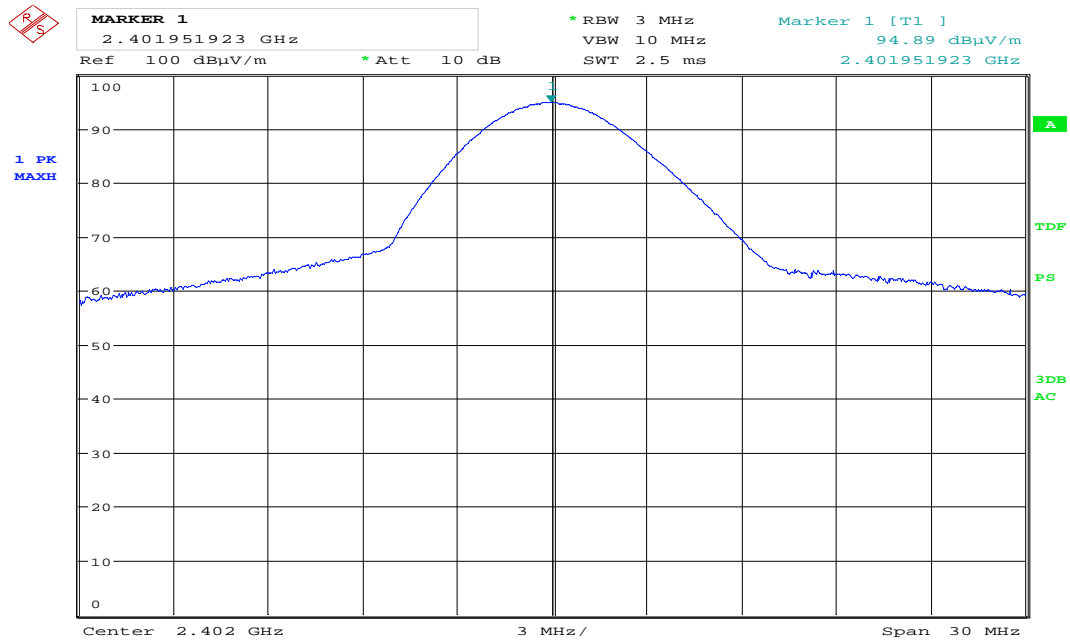


Date: 23.OCT.2019 14:17:57

Radiated Field strength, HP, ch2402MHz, 1Mbps

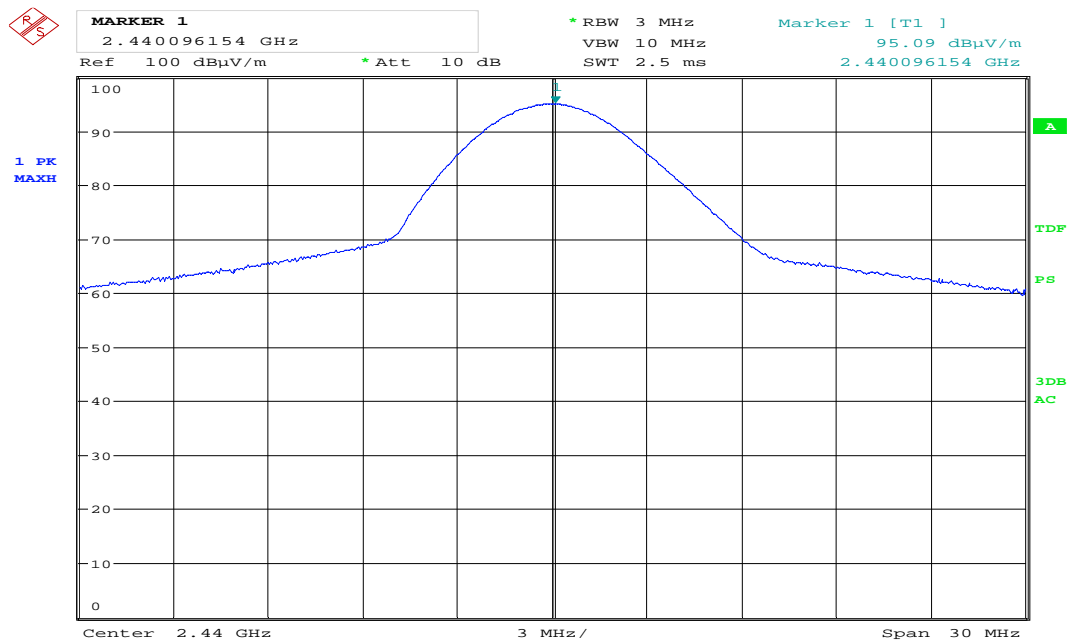


Date: 23.OCT.2019 14:33:49

Radiated Field strength, HP, ch2440MHz, 1Mbps

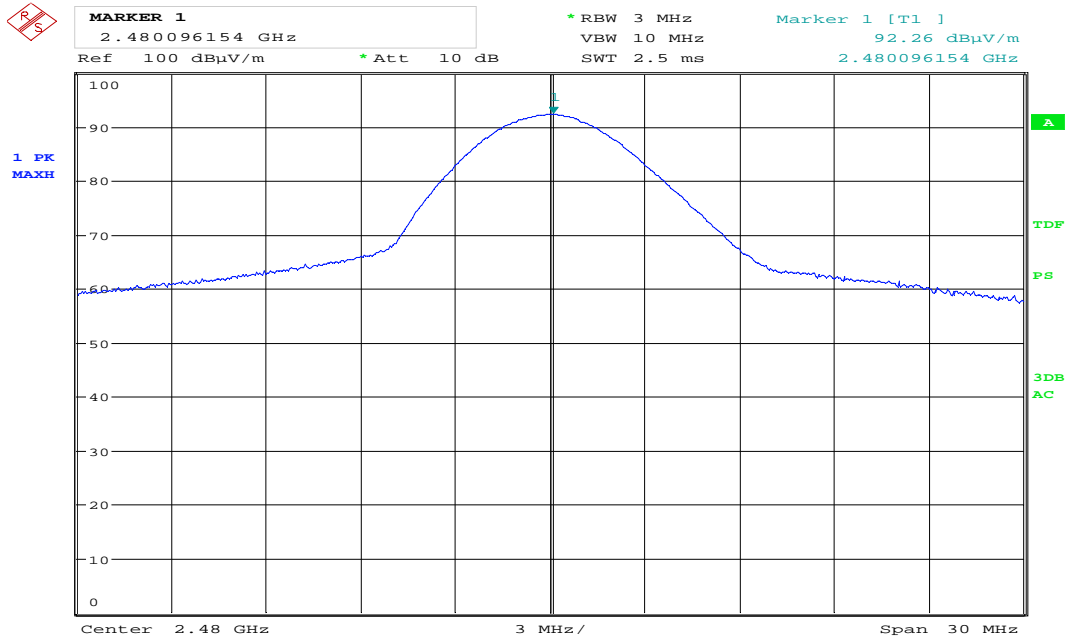


Date: 23.OCT.2019 14:38:14

Radiated Field strength , HP, ch2480MHz, 1Mbps

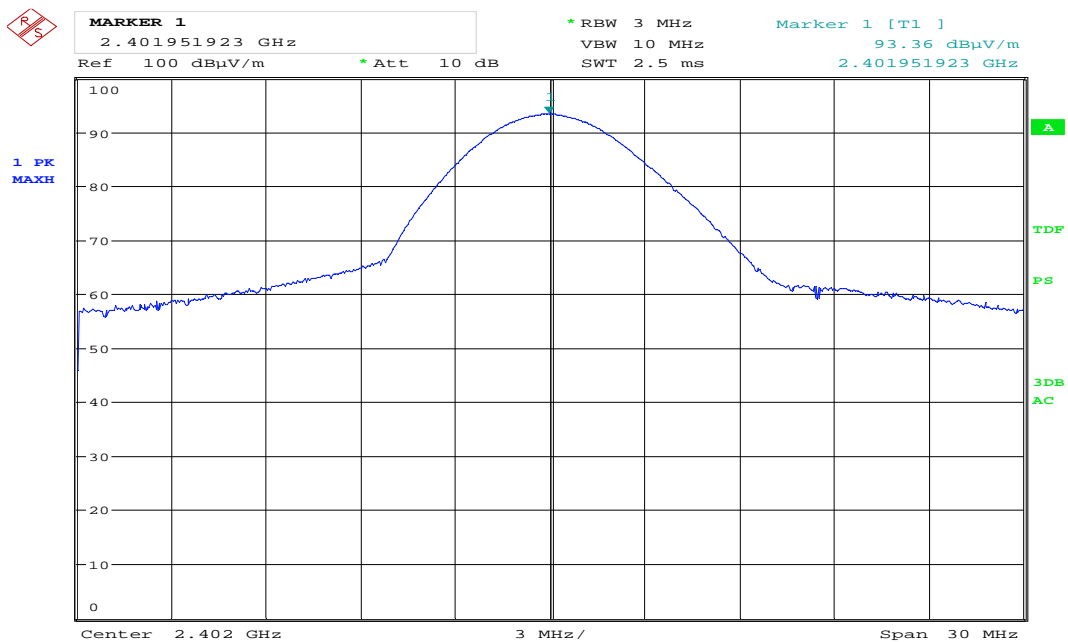


Date: 23.OCT.2019 14:25:09

Radiated Field strength , VP, ch2402MHz, 1Mbps

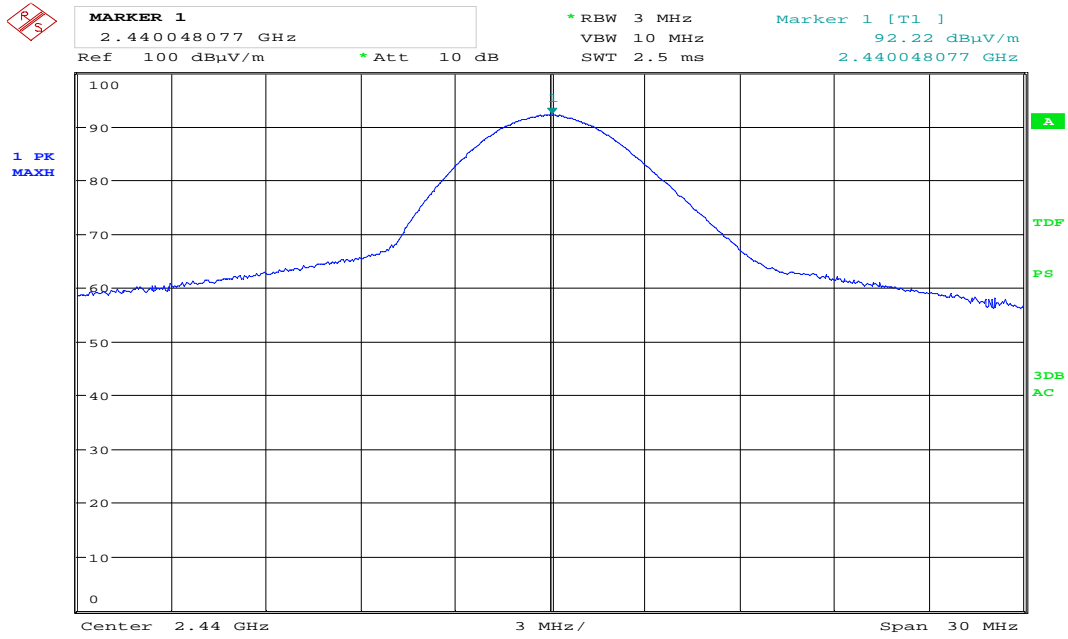


Date: 23.OCT.2019 14:30:18

Radiated Field strength , VP, ch2440MHz, 1Mbps

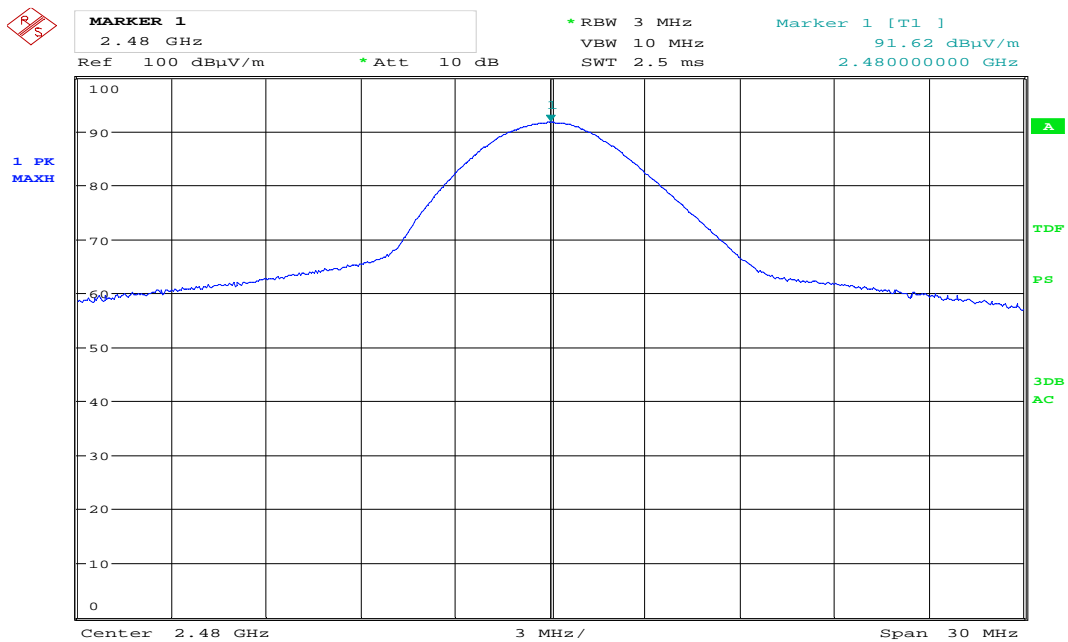


Date: 23.OCT.2019 14:43:48


Radiated Field strength , VP, ch2480MHz, 1Mbps

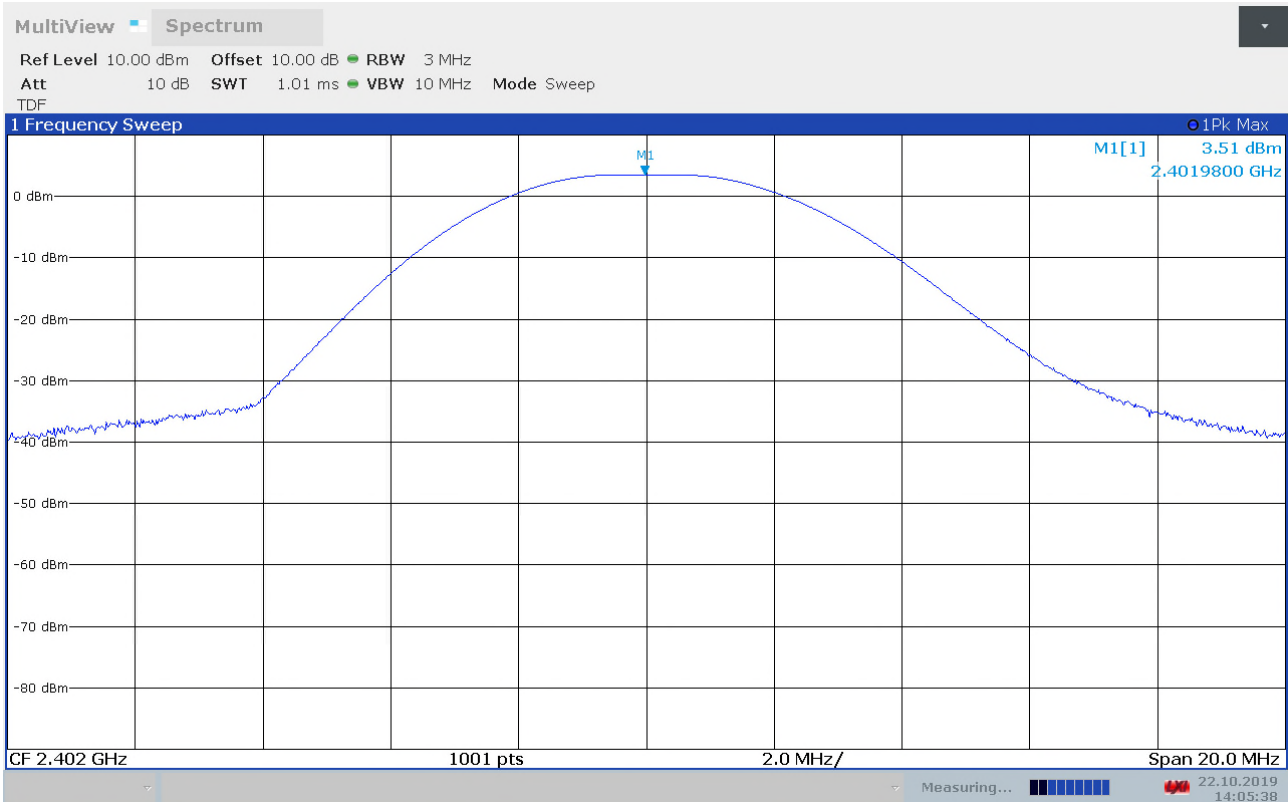


Conducted Power , Ch2402MHz, 2Mbps

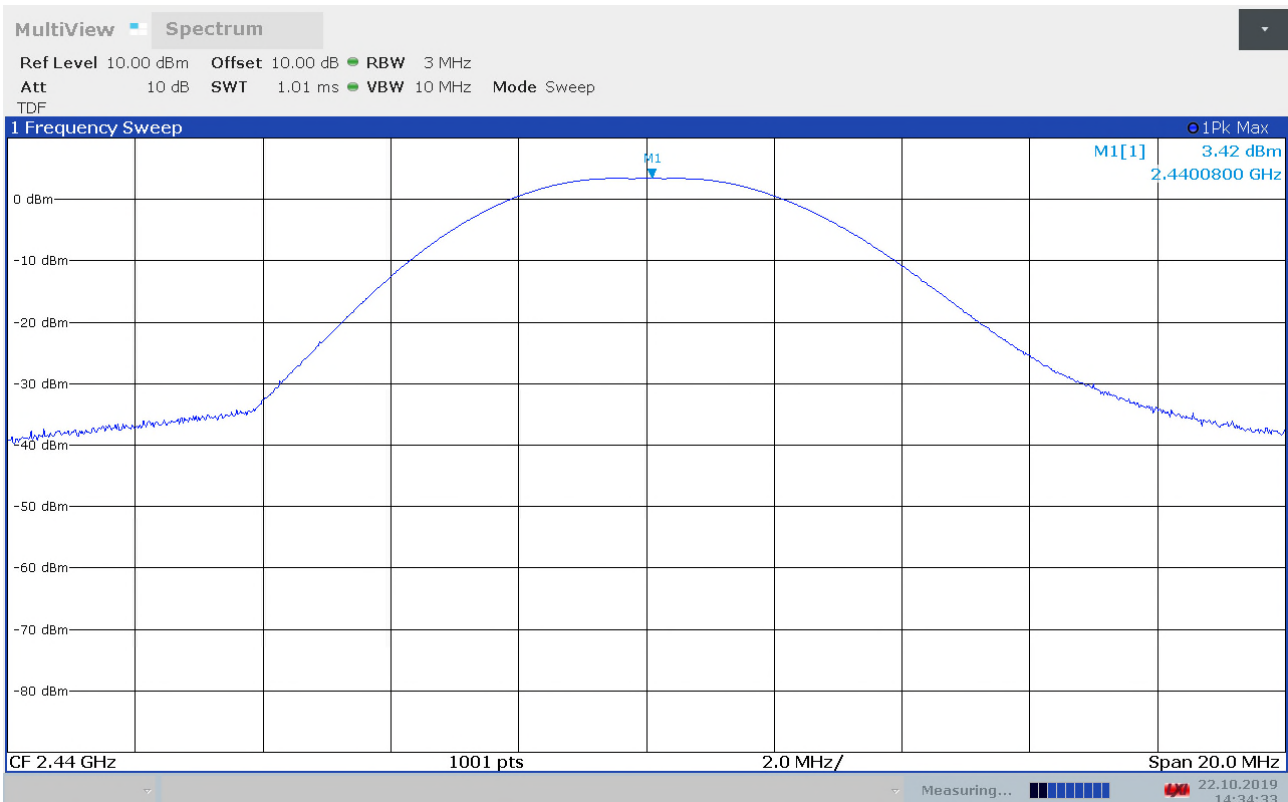

Conducted Power , Ch2440MHz, 2Mbps

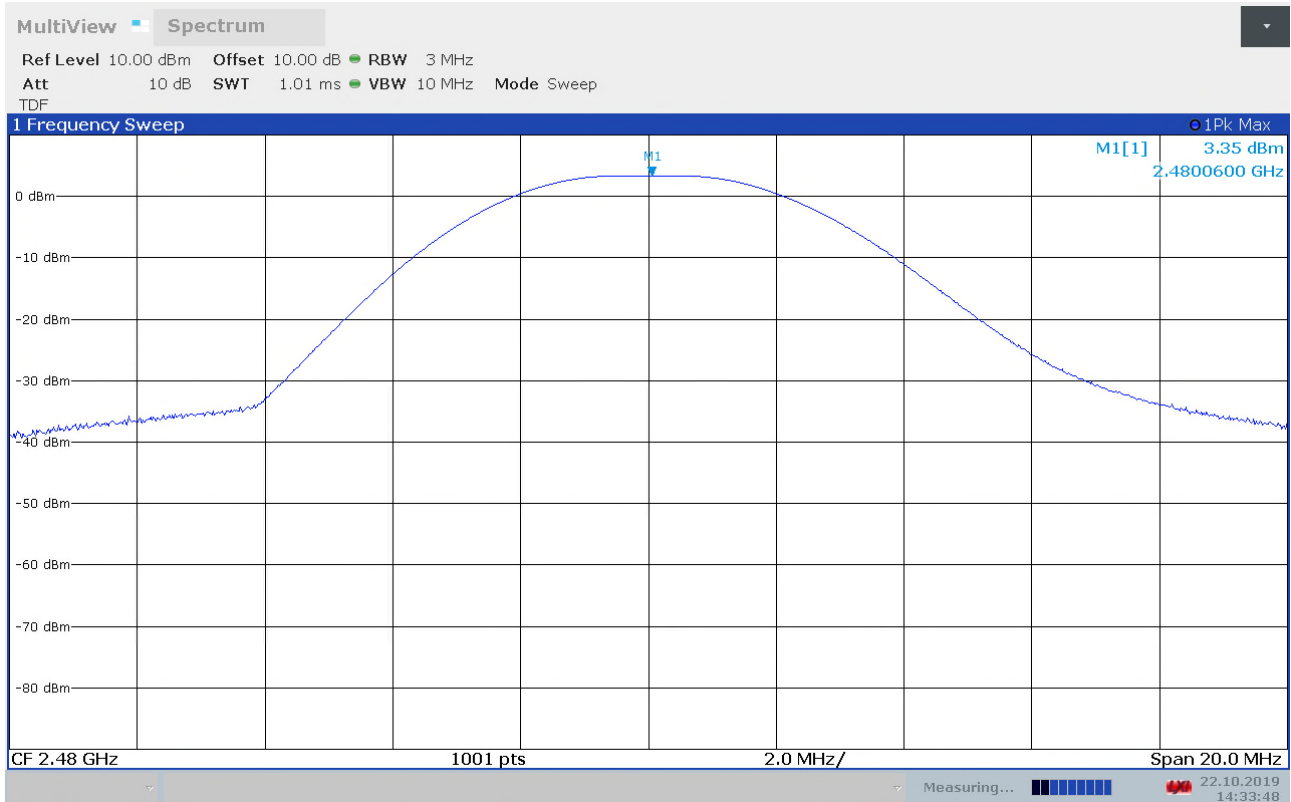


Conducted Power, Ch2480MHz, 2Mbps

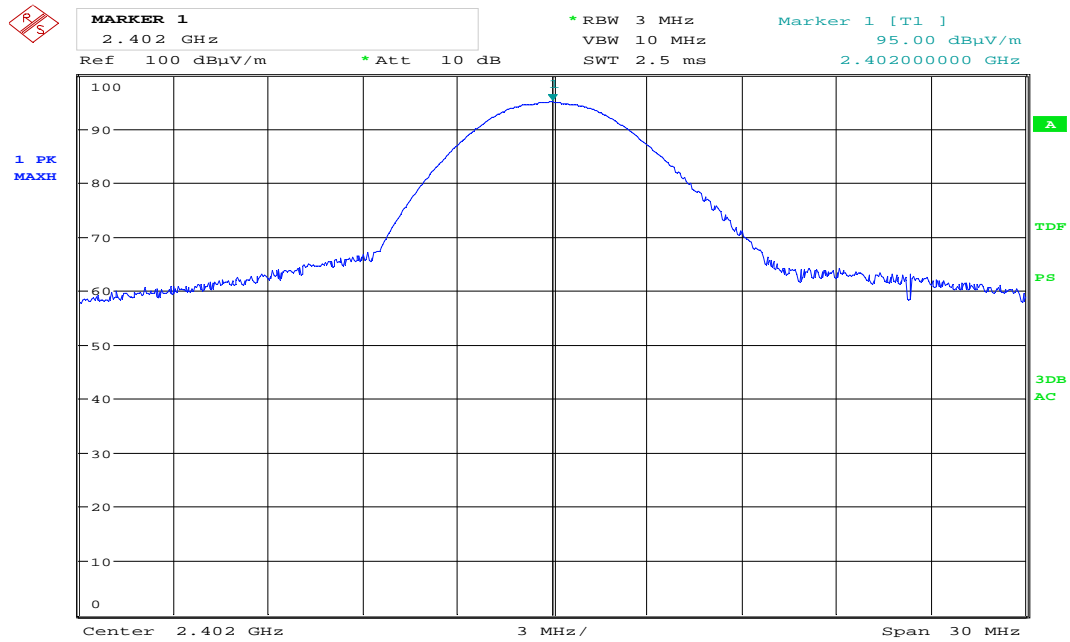


Date: 23.OCT.2019 13:15:28

Radiated Fildstrength , HP, ch2402MHz, 2Mbps

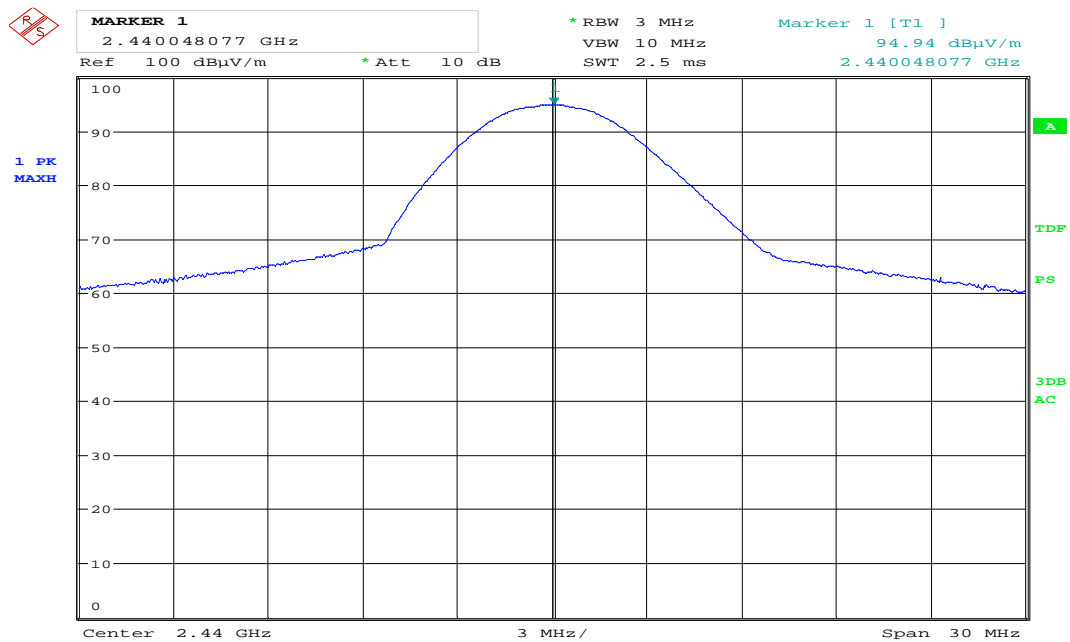


Date: 23.OCT.2019 13:30:33

Radiated Field strength , HP, ch2440MHz, 2Mbps

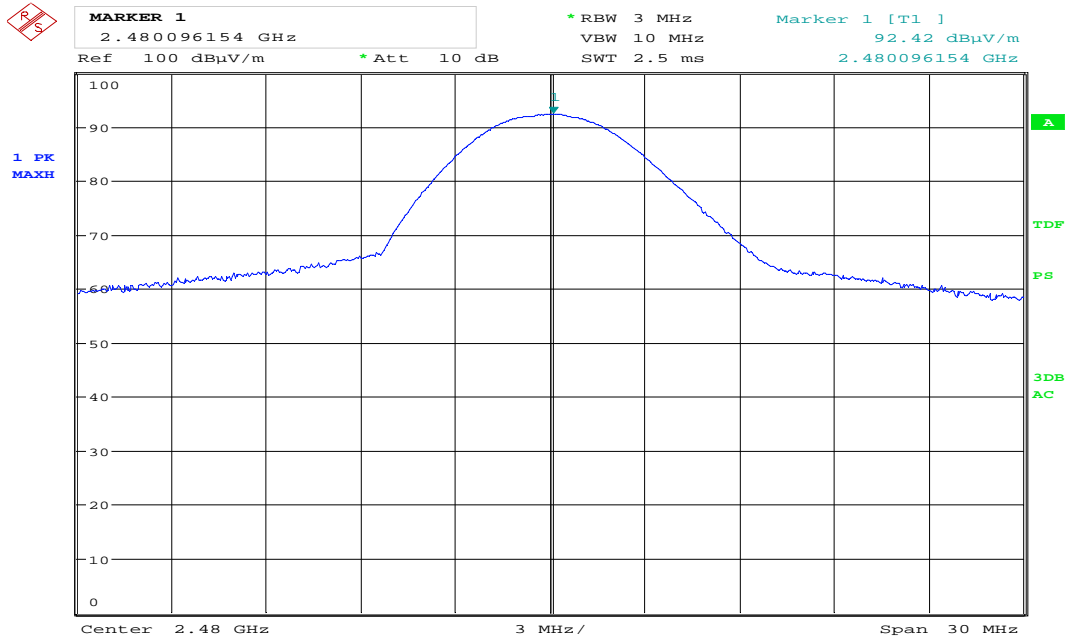


Date: 23.OCT.2019 13:42:02

Radiated Field strength , HP, ch2480MHz, 2Mbps

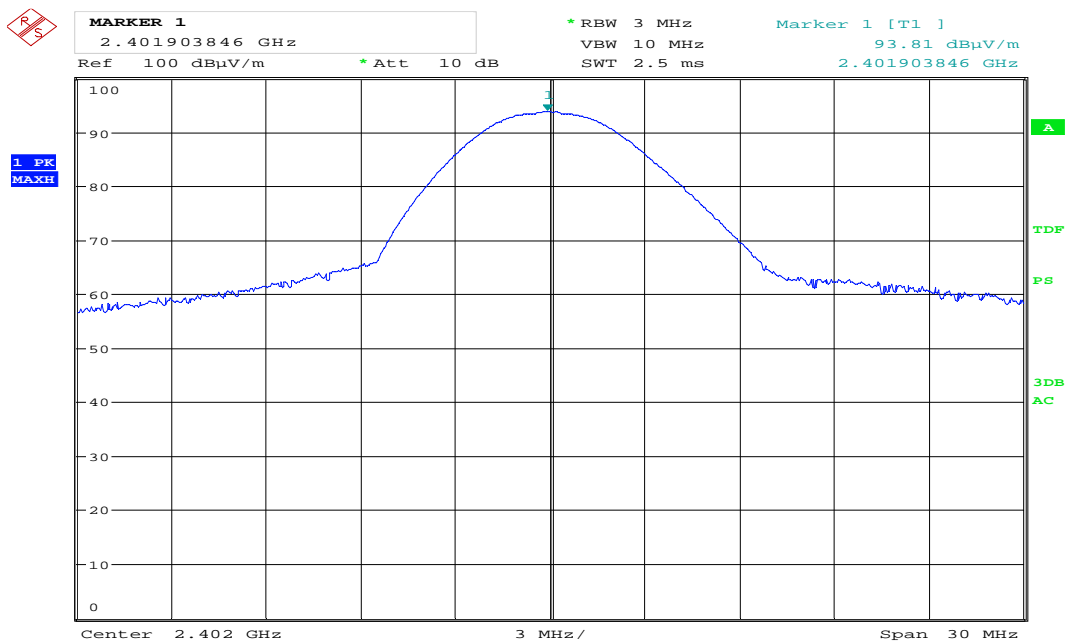


Date: 23.OCT.2019 13:12:10

Radiated Field strength , VP, ch2402MHz, 2Mbps

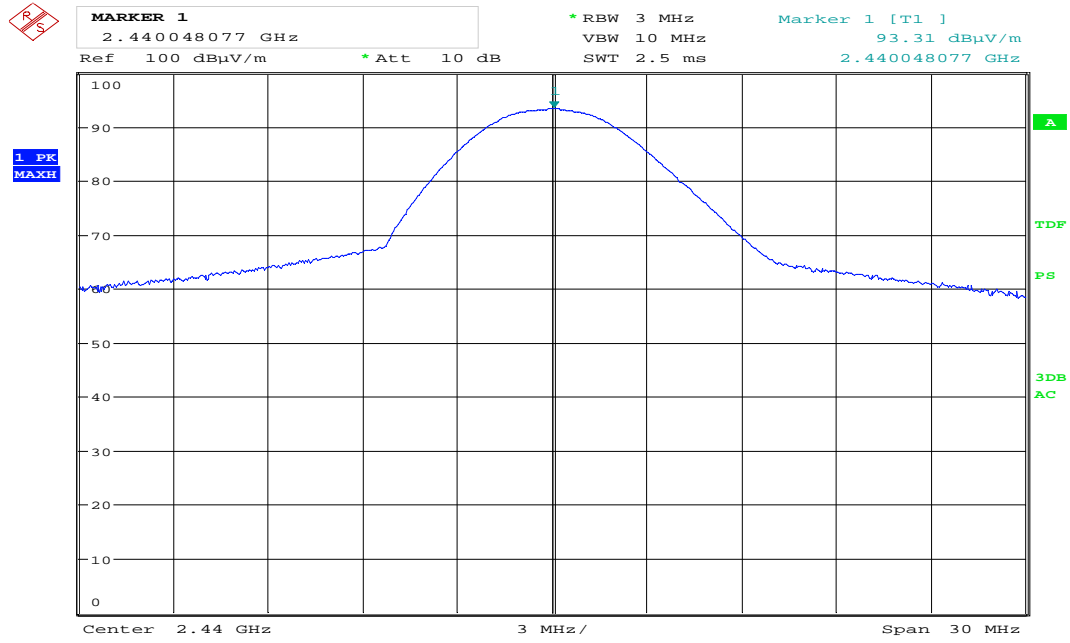

Date: 23.OCT.2019 13:31:50

Radiated Field strength , VP, ch2440MHz, 2Mbps

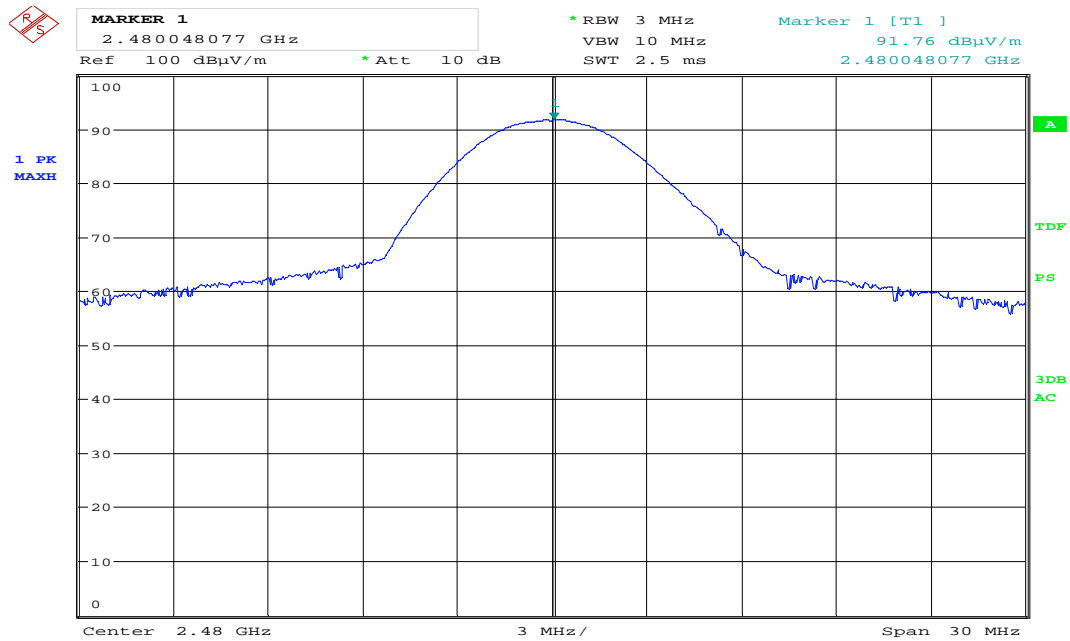

Date: 23.OCT.2019 13:43:53

Radiated Field strength , VP, ch2480MHz, 2Mbps

3.5 Conducted Emissions at Antenna Connector

Para. No.: 15.247 (d)

ISED Canada RSS-247 Issue 2, Clause 5.5

Measurement procedure: ANSI C63.10-2013 Clause 11.11

Test Results: Complies

Carrier Frequency	Highest Value (dBc)	Margin (dB)	Verdict
2402 MHz	44.12	>30	Pass
2440 MHz	44.67	>30	Pass
2480 MHz	48.54	>30	Pass

Measured with Peak Detector


RF conducted power to 25 GHz: see attached plots.

Limit


Peak measurement	RMS averaging
20 dBc or more in 100 kHz bandwidth	30 dBc or more in 100 kHz bandwidth

Detector type shall be the same as used for measuring Output Power.


Attenuation below the general limits specified in part 15.209(a) is not required.

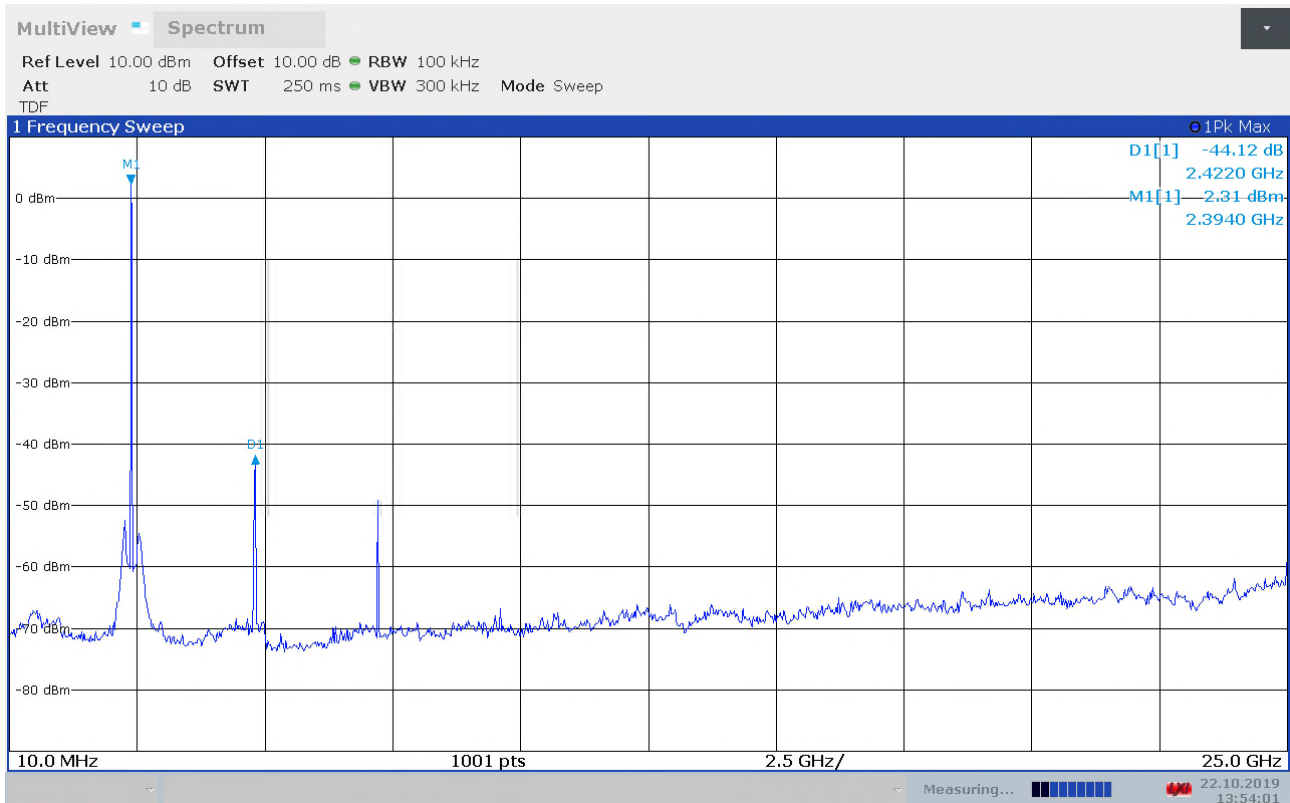


Conducted spurious emissions, 10MHz - 25GHz, ch2402MHz, 1Mbps

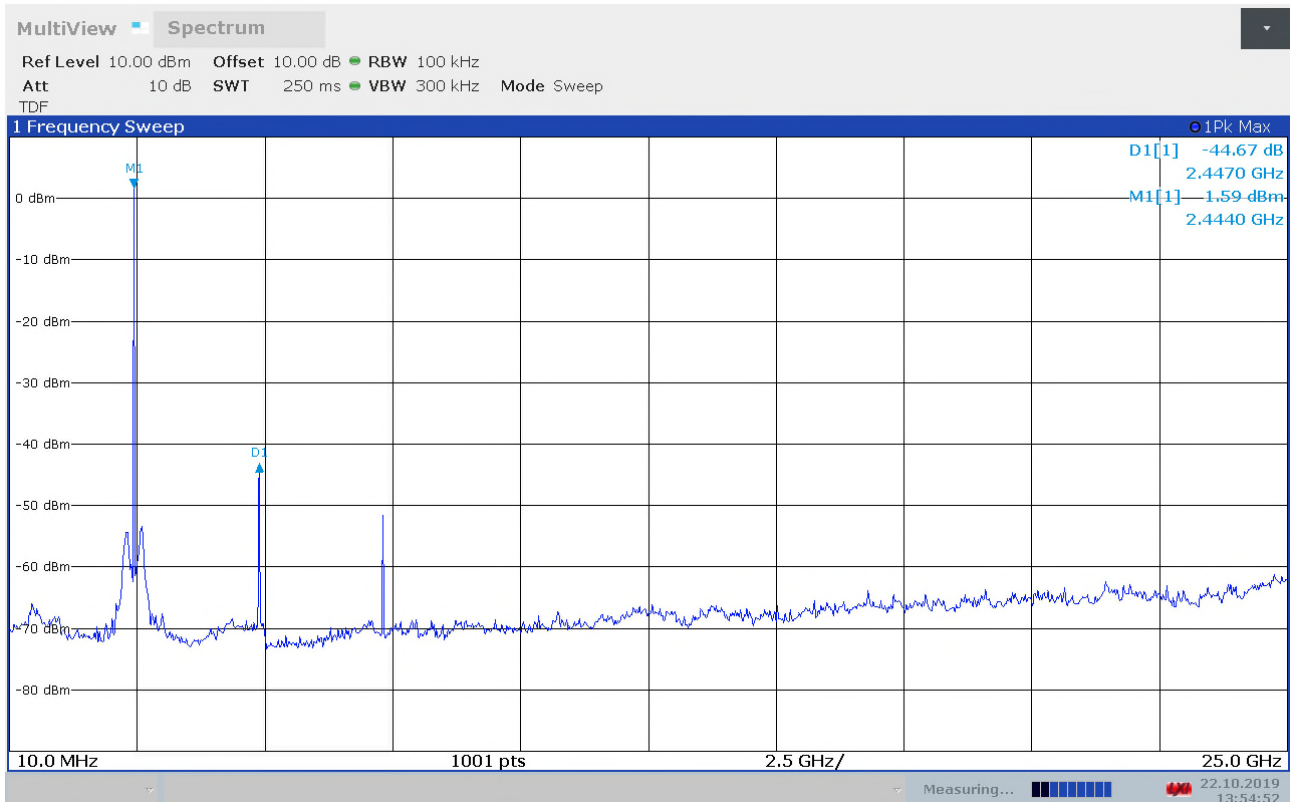


Conducted spurious emissions, 10MHz - 25GHz, ch2440MHz, 1Mbps

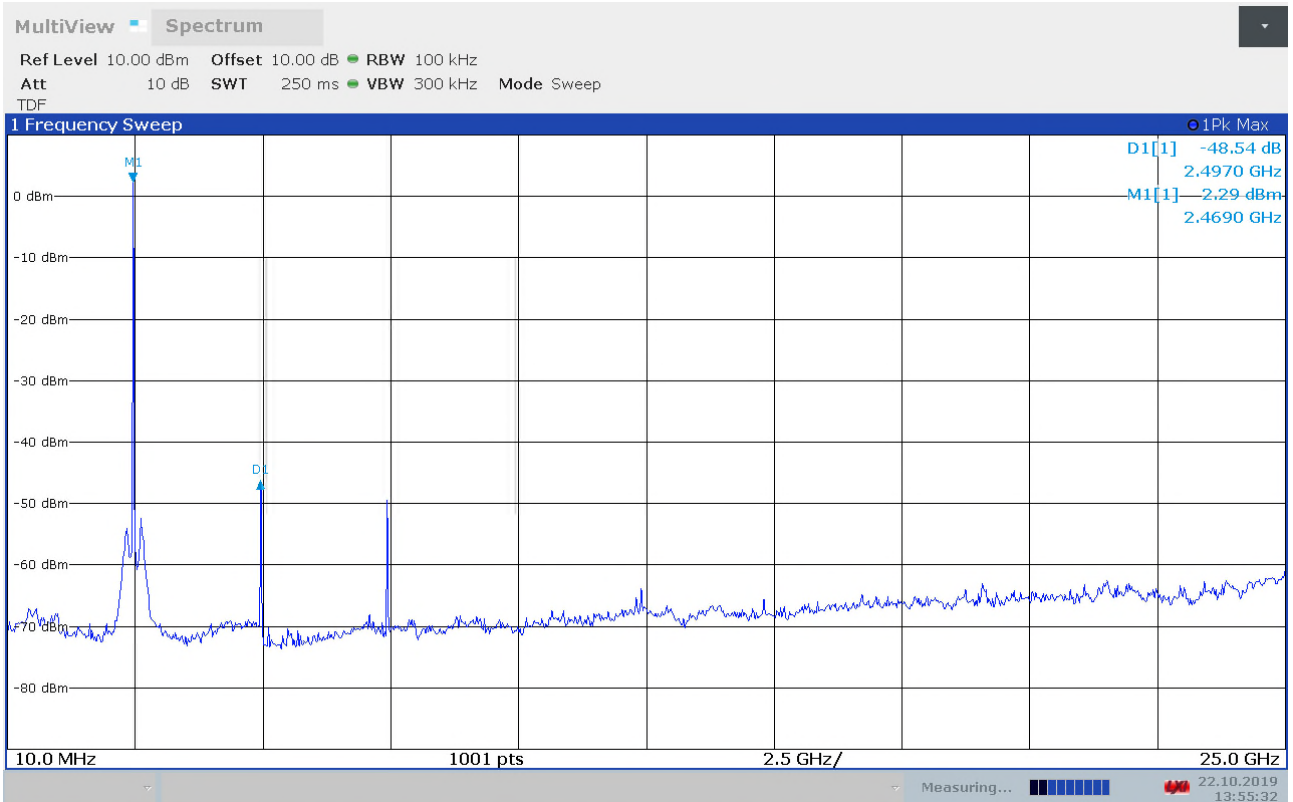


Conducted spurious emissions, 10MHz - 25GHz, ch2480MHz, 1Mbps

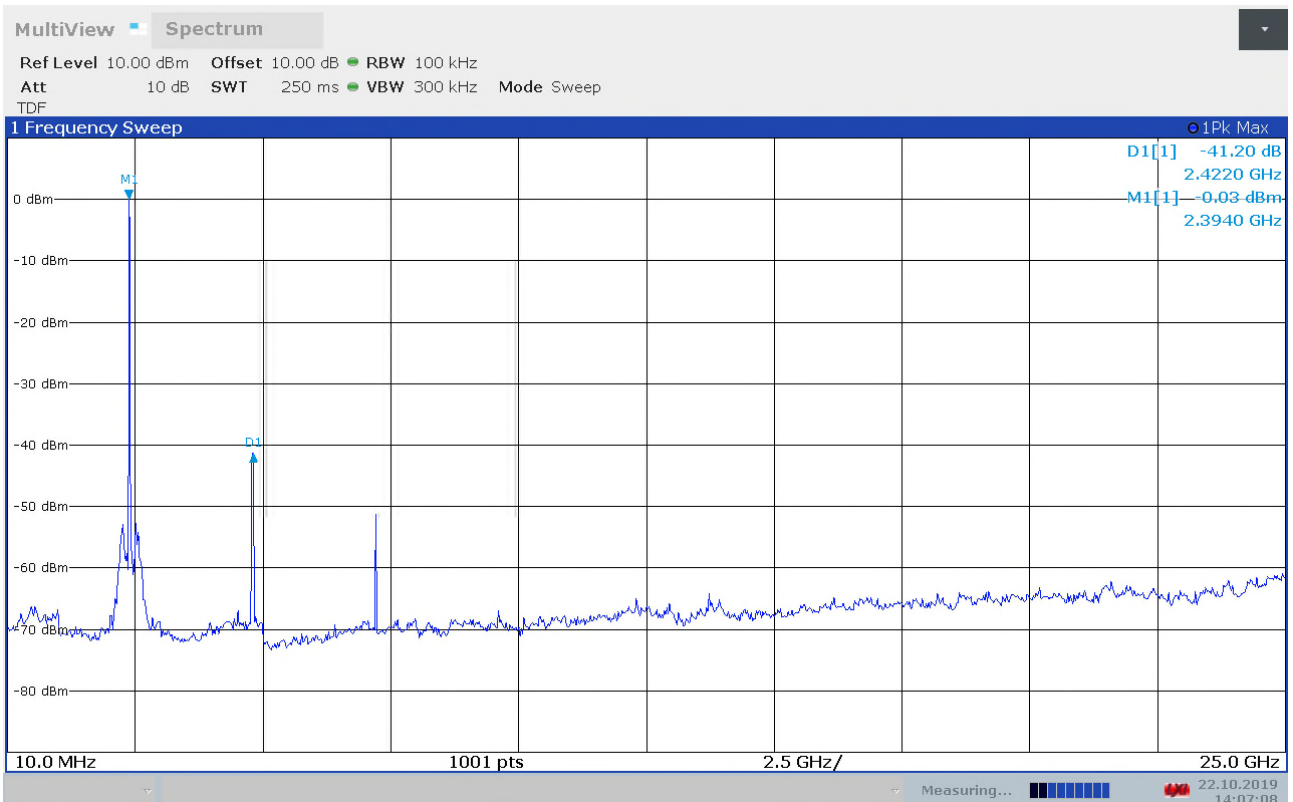

Conducted spurious emissions, 10MHz - 25GHz, ch2402MHz, 2Mbps

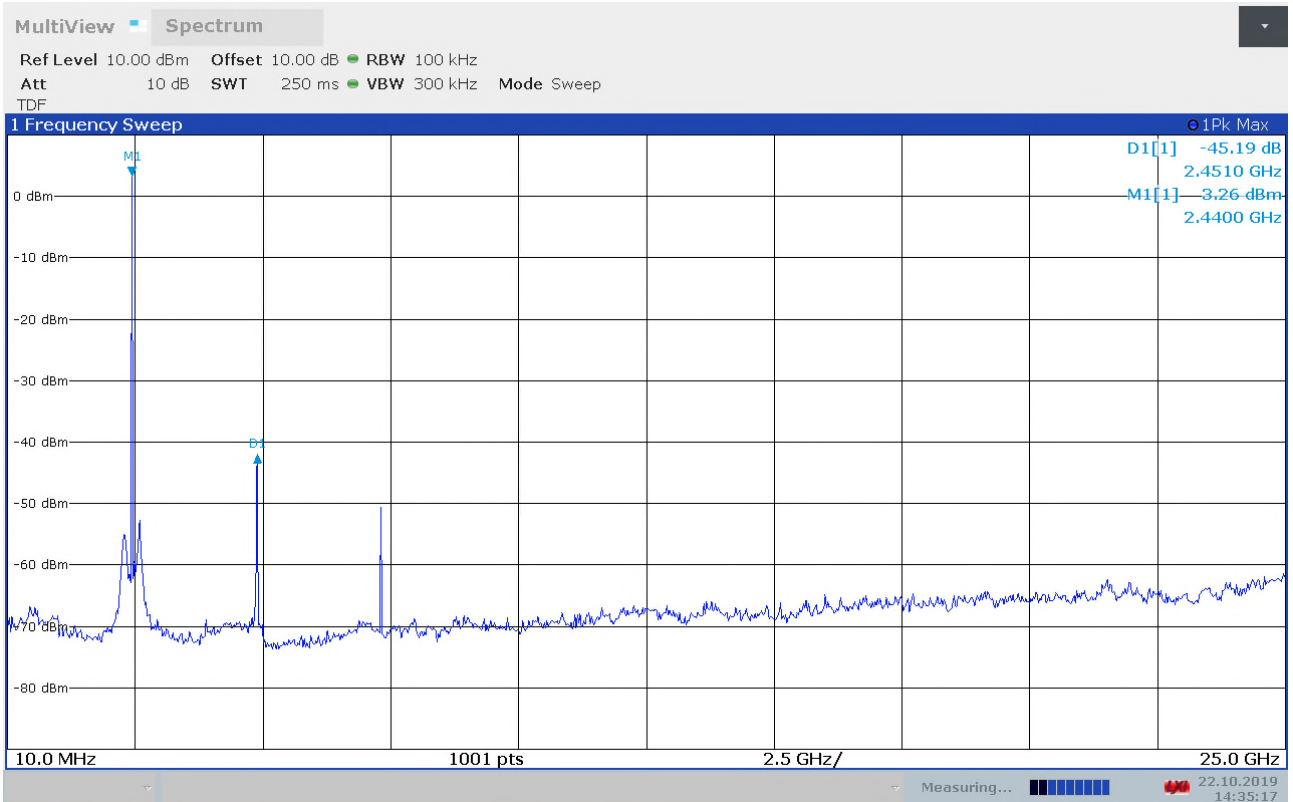

Conducted spurious emissions, 10MHz - 25GHz, ch2440MHz, 2Mbps

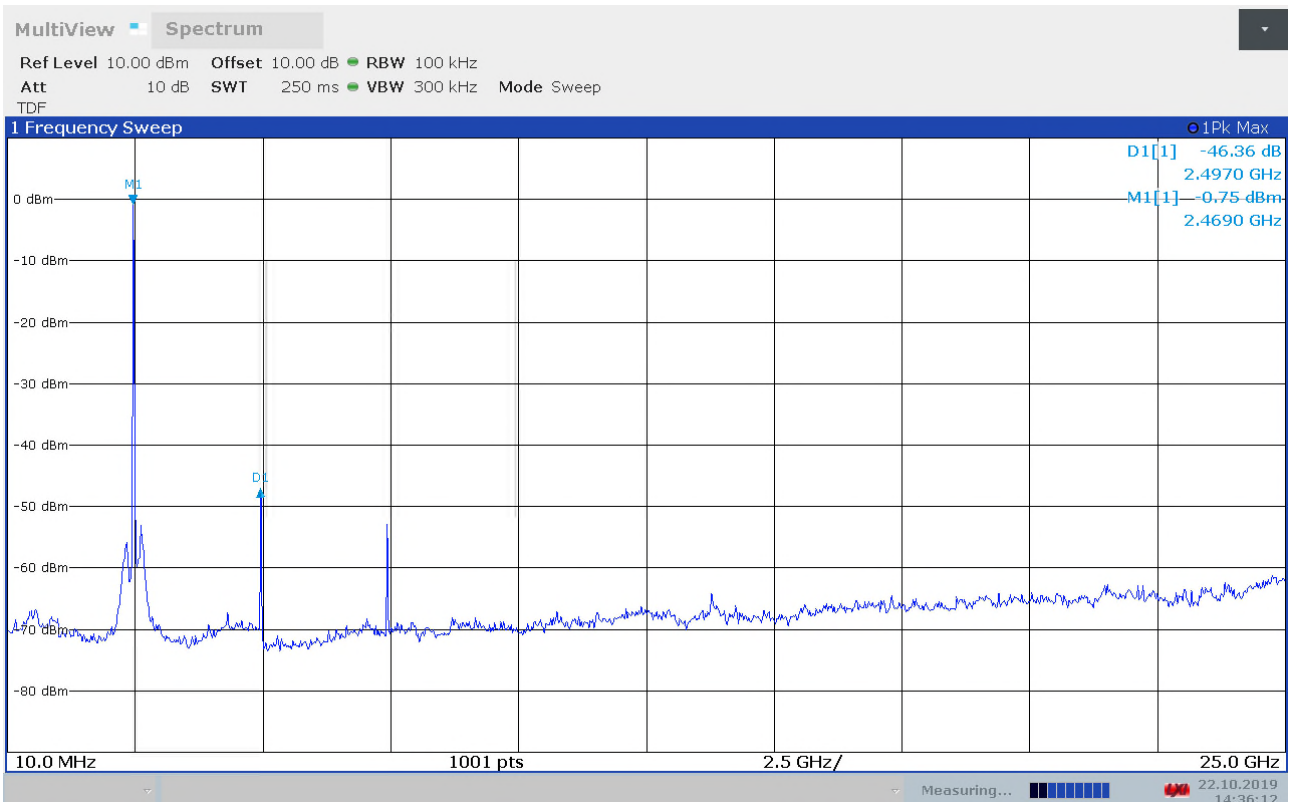

Conducted spurious emissions, 10MHz - 25GHz, ch2480MHz, 2Mbps

3.6 Restricted Bands of operation

Restricted Bands of operation for FCC and ISSED are defined in FCC Part 15.205 and ISSED RSS-GEN, Issue 4 clause 8.10.

Generally, no fundamentals are allowed in the restricted bands and all emissions must comply with the limits in FCC 15.209 or RSS-GEN, Issue 5, clause 8.9.

FCC (MHz)	ISSED (MHz)	FCC (GHz)	ISSED (GHz)
0.090-0.110		0.96-1.24 1.3-1.427	0.96-1.427
0.495-0.505		1.435-1.6265	
2.1735-2.1905		1.6455-1.6465	
	3.020-3.026	1.660-1.710	
4.125-4.128		1.7188-1.7222	
4.17725-4.17775		2.2-2.3	
4.20725-4.20775		2.31-2.39	
	5.677-5.683	2.4835-2.5	
6.215-6.218		2.69-2.9	2.655-2.9
6.26775-6.26825		3.26-3.267	
6.31175-6.31225		3.332-3.339	
8.291-8.294		3.3458-3.358	
8.362-8.366		3.6-4.4	3.5-4.4
8.37625-8.38675		4.5-5.15	
8.41425-8.41475		5.35-5.46	
12.29-12.293		7.25-7.75	
12.51975-12.52025		8.025-8.5	
12.57675-12.57725		9.0-9.2	
13.36-13.41		9.3-9.5	
16.42-16.423		10.6-12.7	
16.69475-16.69525		13.25-13.4	
16.80425-16.80475		14.47-14.5	
25.5-25.67		15.35-16.2	
37.5-38.25		17.7-21.4	
73-74.6		22.01-23.12	
74.8-75.2		23.6-24.0	
108-121.94 123-138	108-138	31.2-31.8	
149.9-150.05		36.43-36.5	
156.52475-156.52525		Above 38.6	
156.7-156.9			
162.0125-167.17			
167.72-173.2			
240-285			
322-335.4			
399.9-410			
608-614			

Frequencies in **Bold** text are specific for FCC or ISSED, all other frequencies are common.

3.7 Spurious Emissions (Radiated)

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3 / 8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

Measurement Data:

Band-Edge: 1Mbps

	Measured field strength (dB μ V/m)		Limit dB μ V/m	Margin	
	2390 MHz	2483.5 MHz		dB	
Peak Detector	52.39	61.05	74	21.61	12.95
Average Detector	/	/	54	/	/
Average with DC correction	/	41.05	54	/	12.95

Band-Edge: 23Mbps

	Measured field strength (dB μ V/m)		Limit dB μ V/m	Margin	
	2390 MHz	2483.5 MHz		dB	
Peak Detector	52.06	60.90	74	21.94	13.1
Average Detector	/	/	54	/	/
Average with DC correction	/	40.90	54	/	13.1

See attached plots.


Duty Cycle Correction Factor Calculation:

Manufacturer declared duty cycle: 0.154%

Duty Cycle Correction factor = $-20 \times \log(\text{Duty Cycle}) = -20 \text{ dB}$


Maximum allowed Duty Cycle Correction: 20 dB

Maximum Duty Cycle Correction Factor according to Para 15.35 (b): 20 dB

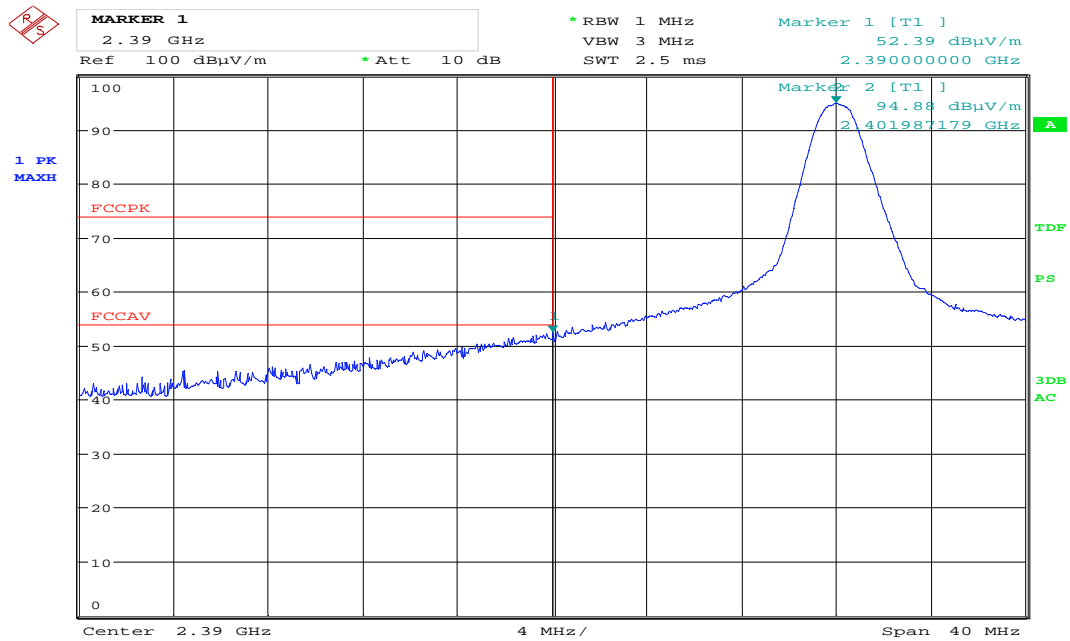


Date: 23.OCT.2019 14:22:01

Lower Band edge , PK , ch2402MHz, 1Mbps

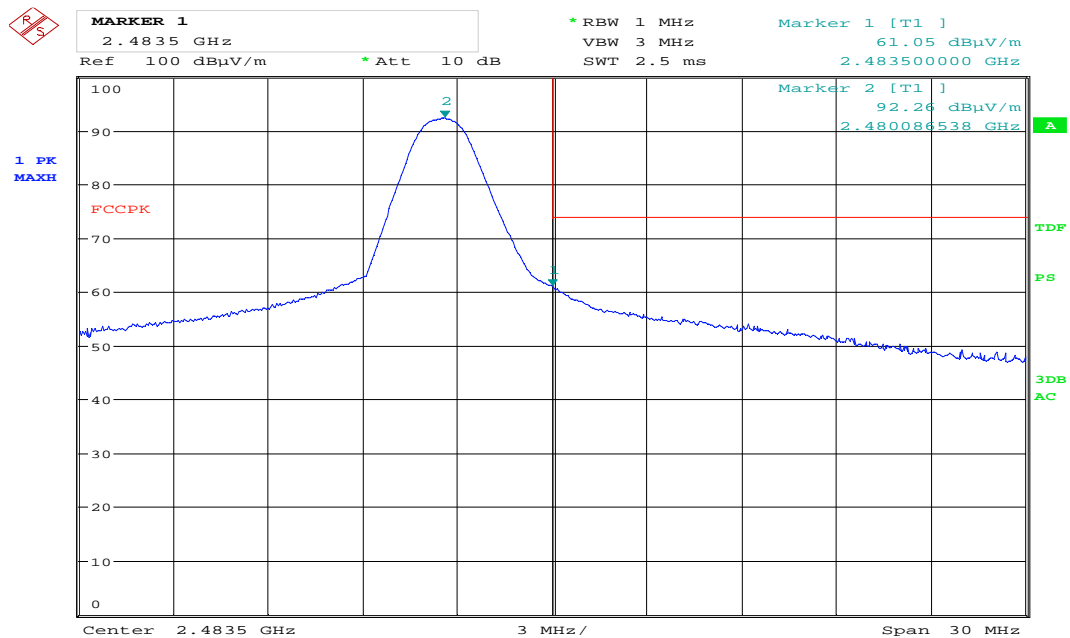


Date: 23.OCT.2019 14:39:55

Upper band edge, PK , ch2480MHz, 1Mbps

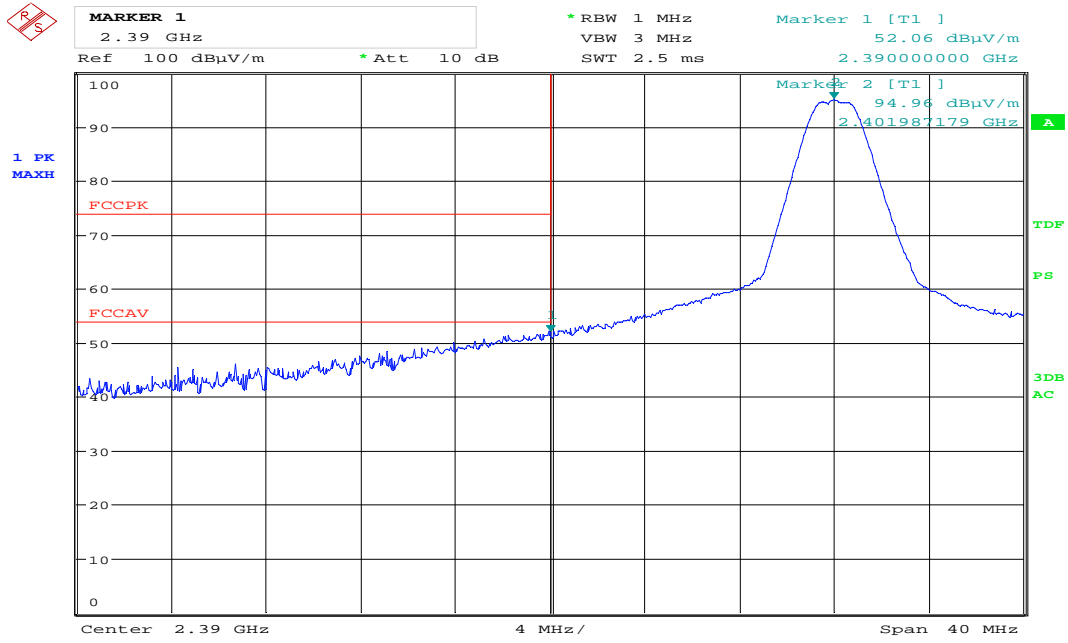

Date: 23.OCT.2019 13:18:37

Lower Band edge , PK , ch2402MHz, 2Mbps

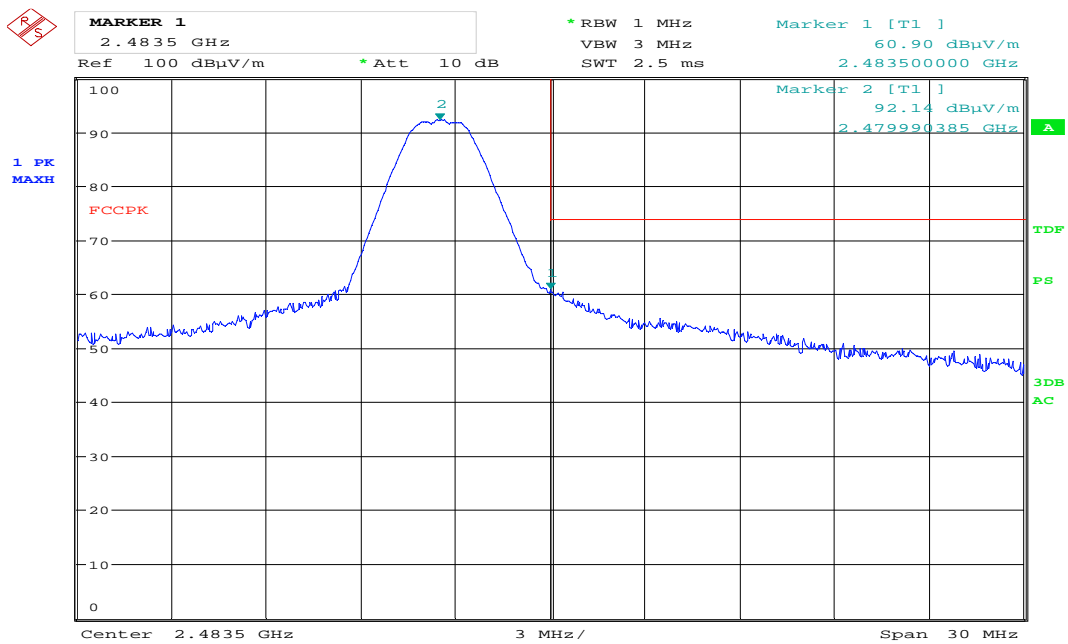

Date: 23.OCT.2019 13:46:41

Upper band edge, PK , ch2480MHz, 2Mbps

3.8 Radiated emission 30 – 1000 MHz.

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3/8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

Detector: Quasi-Peak

Measuring distance 3 m

Tested in TX mode

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
101.145150	2.28	43.50	41.22	1000.0	120.000	332.0	V	45.0


See attached plots

Requirements/Limit

FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, Clause 8.9 @ frequencies defined in clause 8.10	
	Radiated emission limit @3 meters	
Frequency (MHz)	Quasi Peak (µV/m)	Quasi Peak (dBµV/m)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

The limit above 1000 MHz is specified for Average Detector, when the measurement is performed with a Peak Detector a Duty-Cycle Correction Factor has to be calculated to find the corresponding Average Detector value.

Full Spectrum

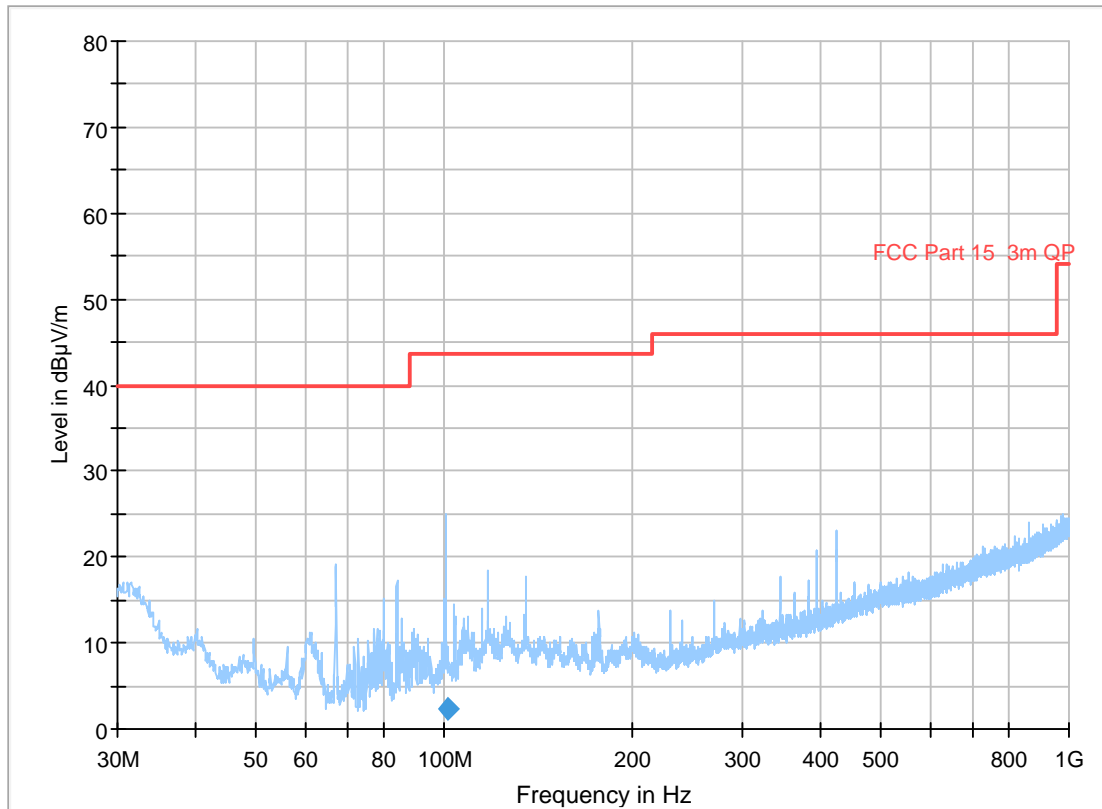

Radiated Emissions, 1-25 GHz

FCC Part 15.209 (a), ISED Canada RSS-GEN Issue 5, Clause 7.3/8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Measuring distance: 3m (1 – 8 GHz), 1m (8 – 25 GHz)

Peak Detector: (Restricted band frequencies)

Frequency	RF channel	Dist. corr. factor	Field strength, Peak Detector, 3m	Limit	Margin
GHz	L,M,H	dB	dB μ V/m	dB μ V/m	dB
4.81	M	0	/	74	/
4.88	H	0	/	74	/
4.96	L	0	50.68	74	23.32
Other freqs	L,M,H	0	None detected	74	>20

Average Detector: (Restricted band frequencies)

Frequency	RF channel	Dist. corr. factor	Field strength, Average Detector, 3m	Duty cycle corr. factor	Limit	Margin
GHz	L,M,H	dB	dB μ V/m	dB	dB μ V/m	dB
4.81	M	0	/	20	54	/
4.88	H	0	/	20	54	/
4.96	L	0	/	20	54	/
Other freqs	L,M,H	/	None detected	/	54	>20

Maxium is obtained in HP with 1Mbps datarate

Manufacturer declared duty cycle: 0.154%


Duty Cycle Correction factor = $-20 \times \log(\text{Duty Cycle}) = -20 \text{ dB}$

Maximum allowed Duty Cycle Correction: 20 dB

Antenna factor, amplifier gain and cable loss are included in spectrum analyzer "Transducer factor"., See plots.


Requirements/Limit

FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, Clause 8.9 @ frequencies defined in clause 8.10	
Radiated emission limit @3 meters		
Frequency (MHz)	AV (dBμV/m)	Peak (dBμV/m)
Above 1 GHz	54.0	74.0

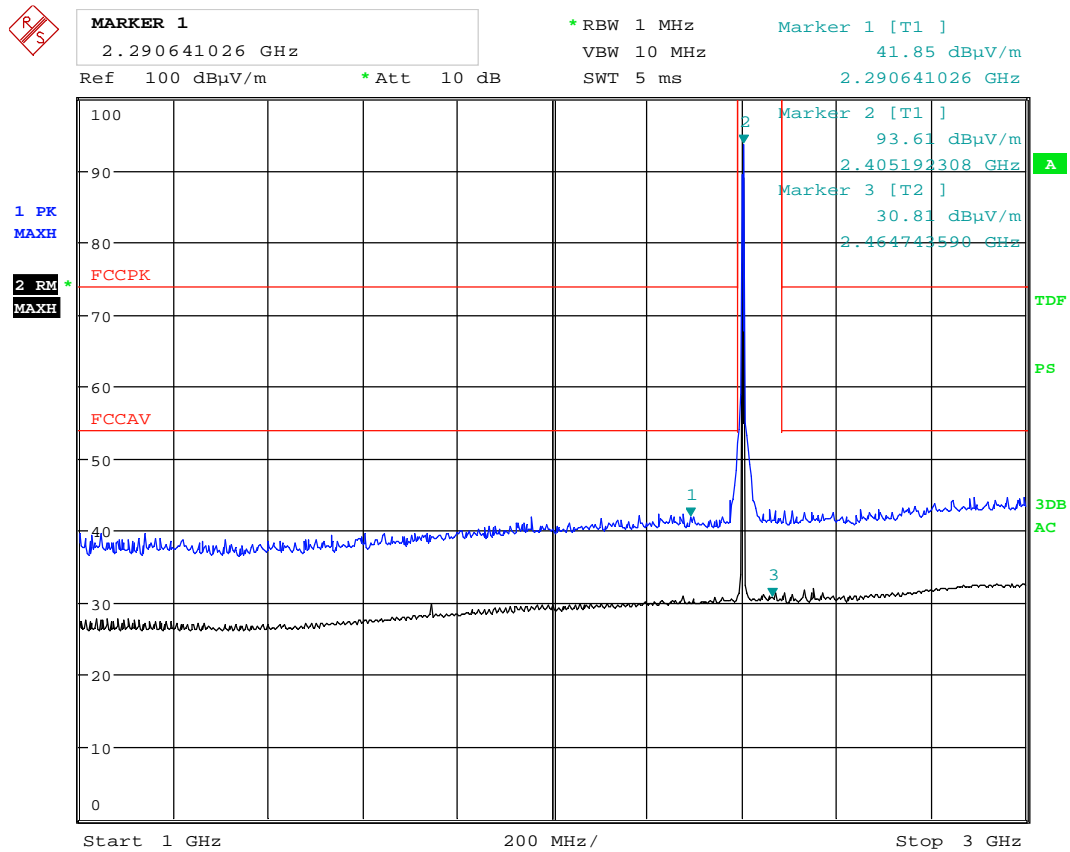


Date: 23.OCT.2019 14:23:32

Radiated spurious emissions, VP, 1 - 3GHz, ch2402MHz, PK scan, 1Mbps

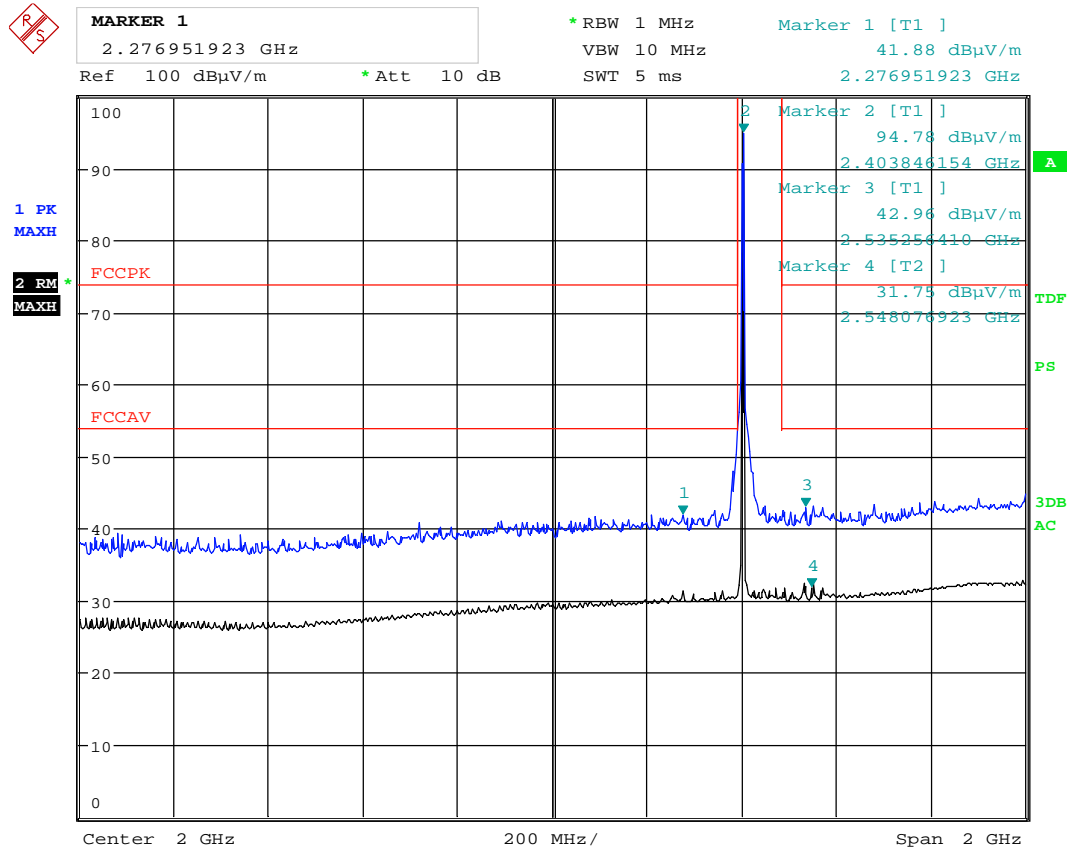


Date: 23.OCT.2019 14:20:15

Radiated spurious emissions, HP, 1 - 3GHz, ch2402MHz, PK scan, 1Mbps

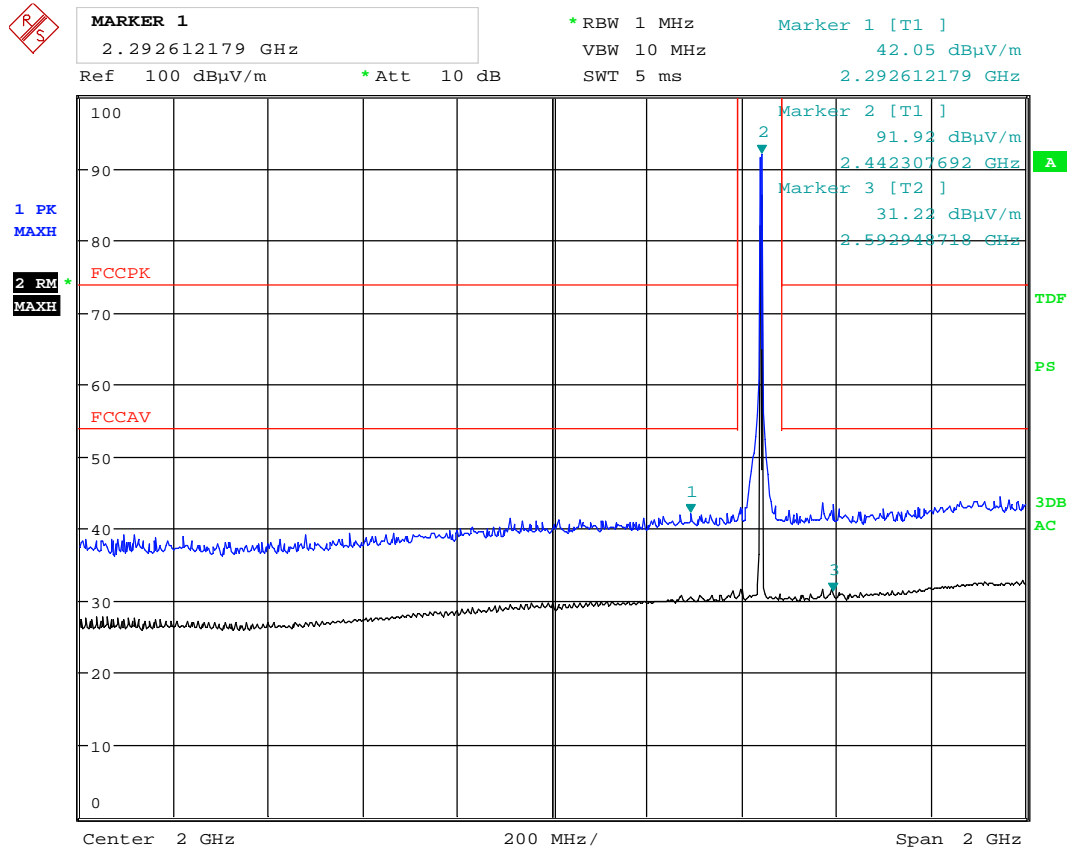

Date: 23.OCT.2019 14:31:22

Radiated spurious emissions, VP, 1 - 3GHz, ch2440MHz, PK scan, 1Mbps

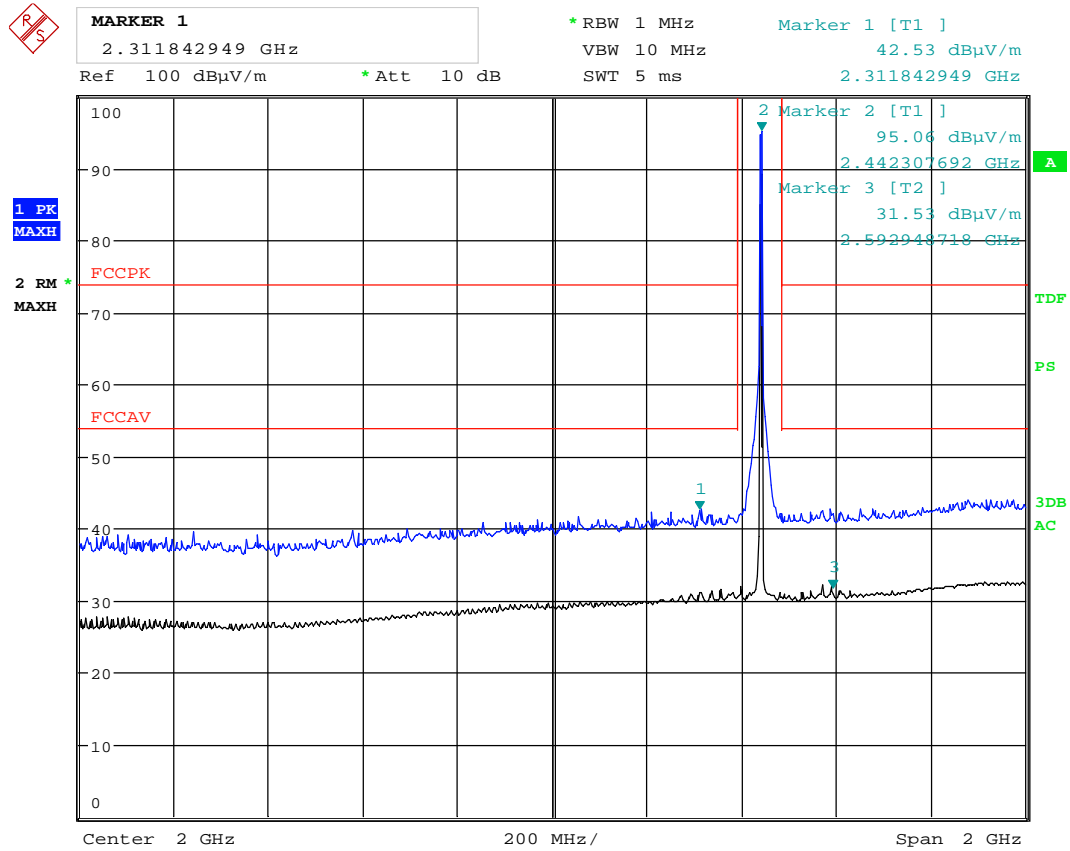

Date: 23.OCT.2019 14:32:35

Radiated spurious emissions, HP, 1 - 3GHz, ch2440MHz, PK scan, 1Mbps



MARKER 1
 1.743115385 GHz


*RBW 1 MHz
 VBW 10 MHz
 SWT 5 ms

Marker 1 [T1]
 44.69 dBμV/m
 1.743115385 GHz

Ref 100 dBμV/m *Att 10 dB

1 PK
 MAXH


2 RM *
 MAXH

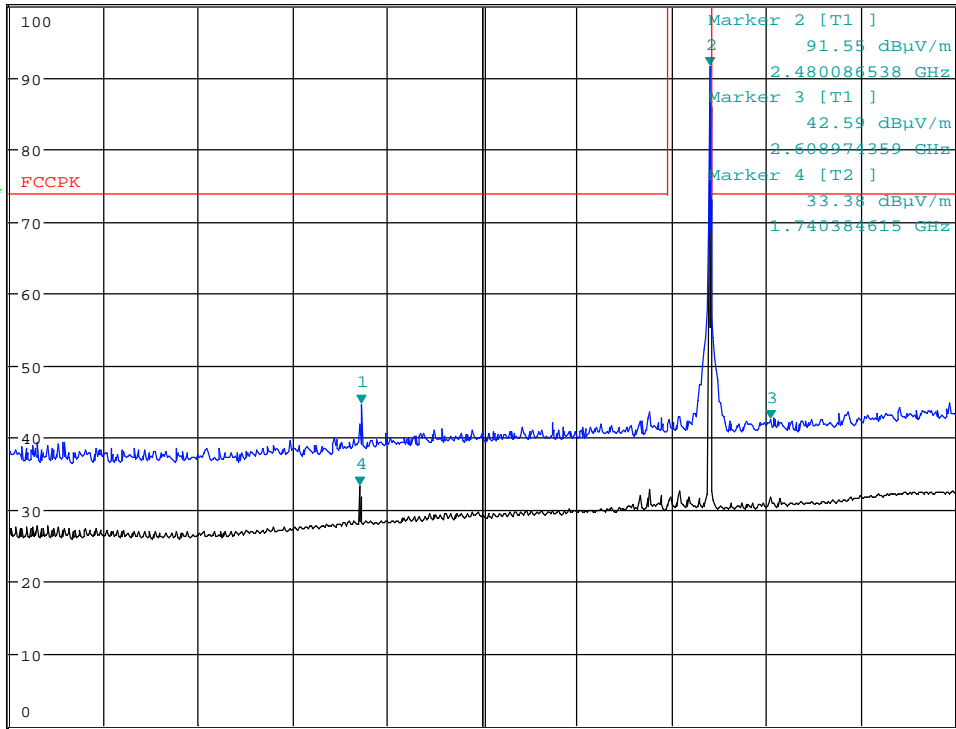

Start 1 GHz 200 MHz/ Stop 3 GHz

Date: 23.OCT.2019 14:42:25

Radiated spurious emissions, VP, 1 - 3GHz, ch2480MHz, PK scan, 1Mbps

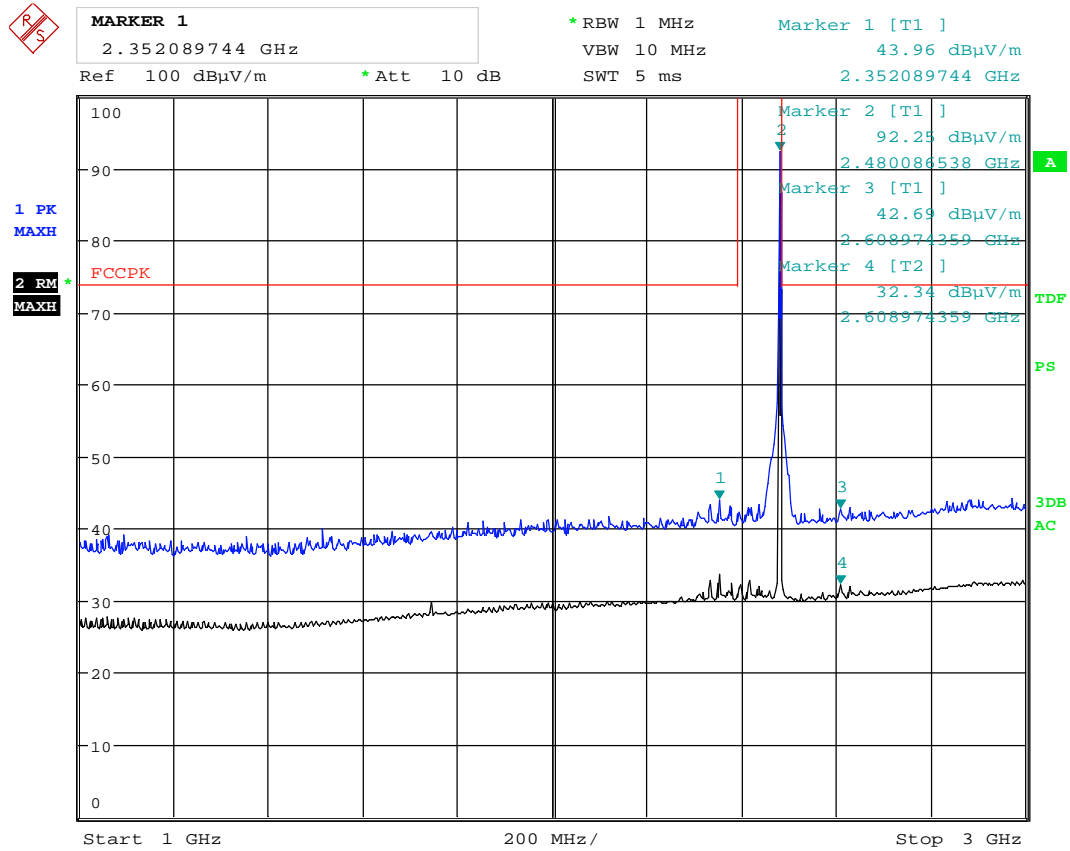

Date: 23.OCT.2019 14:40:56

Radiated spurious emissions, HP, 1 - 3GHz, ch2480MHz, PK scan, 1Mbps




MARKER 2
 17.80769231 GHz

*RBW 1 MHz Marker 2 [T2]
 VBW 10 MHz 41.68 dBμV/m
 SWT 90 ms 17.807692308 GHz

Ref 82 dBμV/m *Att 10 dB

1 PK
 MAXH

2 RM *
 MAXH

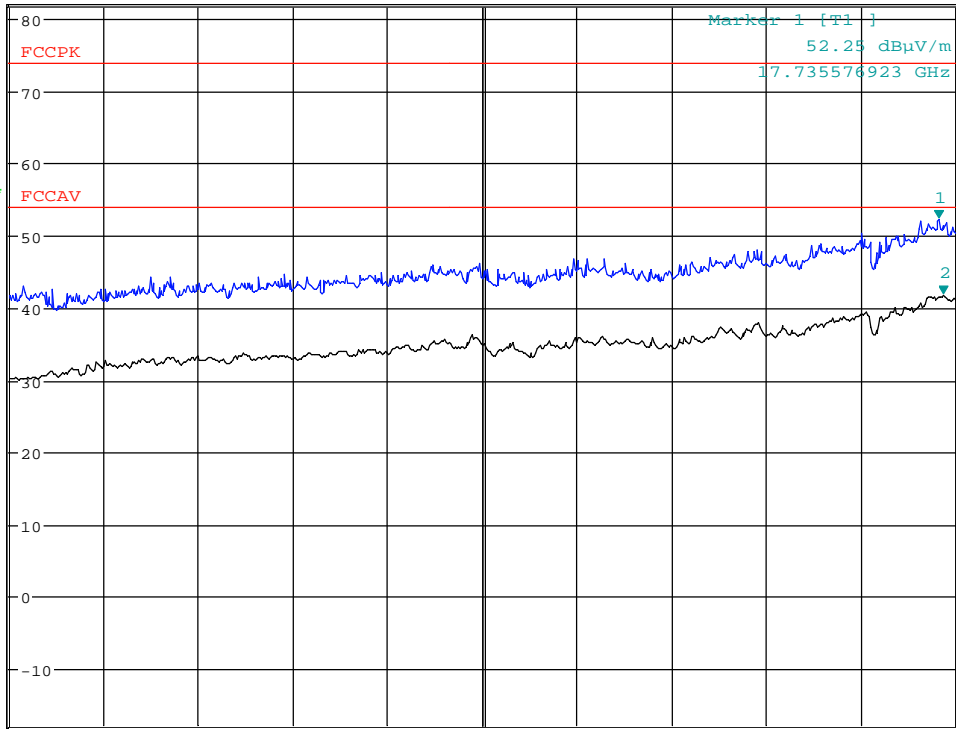

Start 3 GHz 1.5 GHz/ Stop 18 GHz

Date: 23.OCT.2019 12:43:42

Radiated spurious emissions, VP, 3 - 18GHz, ch2402MHz, PK scan, 1Mbps




MARKER 1
 17.61538462 GHz

*RBW 1 MHz Marker 1 [T1]
 VBW 10 MHz 52.21 dBµV/m
 SWT 90 ms 17.615384615 GHz

Ref 82 dBµV/m *Att 10 dB

1 PK
 MAXH

2 RM *
 MAXH

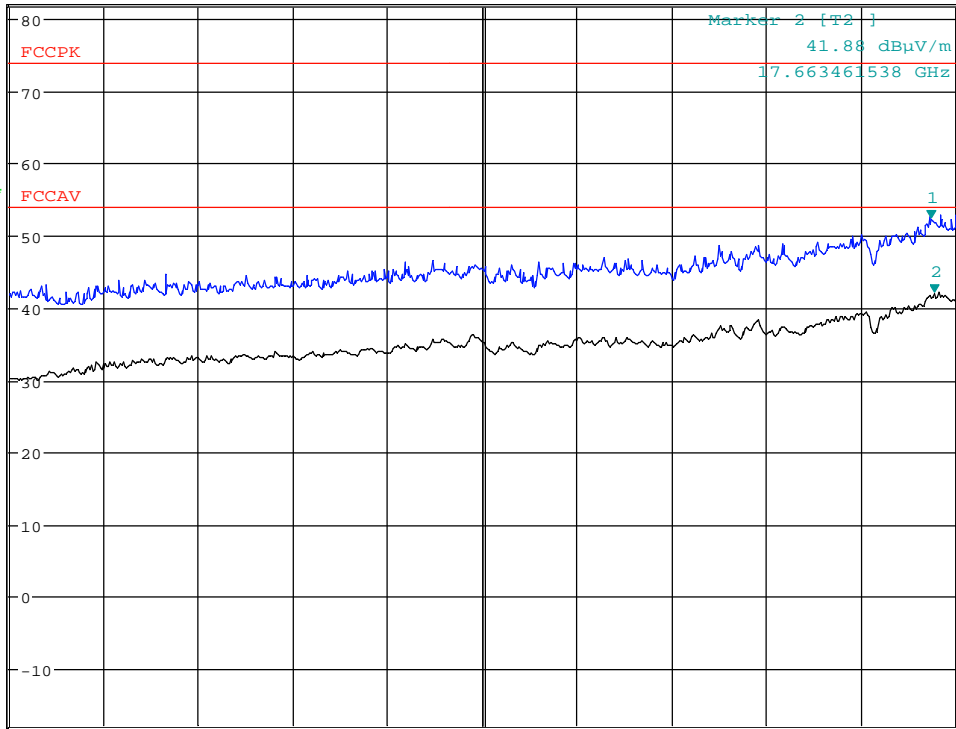

Start 3 GHz 1.5 GHz/ Stop 18 GHz

Date: 23.OCT.2019 12:42:47

Radiated spurious emissions, HP, 3 - 18GHz, ch2402MHz, PK scan, 1Mbps




MARKER 1
 17.78365385 GHz

*RBW 1 MHz Marker 1 [T1]
 VBW 10 MHz 52.04 dBμV/m
 Ref 82 dBμV/m *Att 10 dB SWT 90 ms 17.783653846 GHz

1 PK
 MAXH

2 RM *
 MAXH

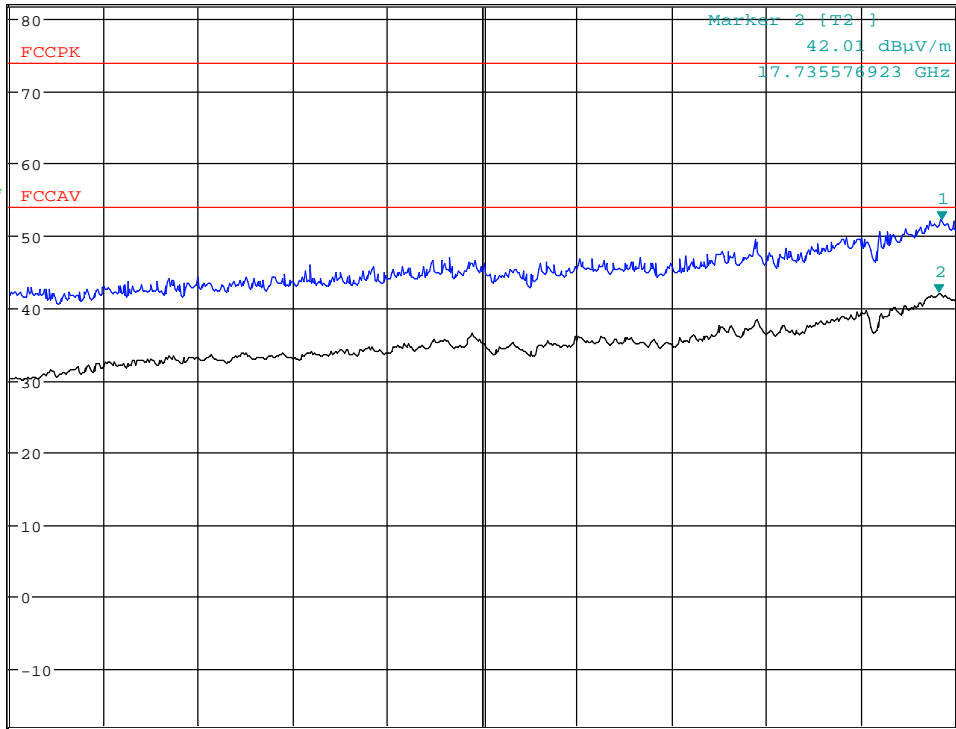

Start 3 GHz 1.5 GHz/ Stop 18 GHz

Date: 23.OCT.2019 12:46:33

Radiated spurious emissions, VP, 3 - 18GHz, ch2440MHz, PK scan, 1Mbps




MARKER 1
 17.73557692 GHz

*RBW 1 MHz Marker 1 [T1]
 VBW 10 MHz 52.89 dBμV/m
 SWT 90 ms 17.735576923 GHz

Ref 82 dBμV/m *Att 10 dB

1 PK
 MAXH

2 RM *
 MAXH

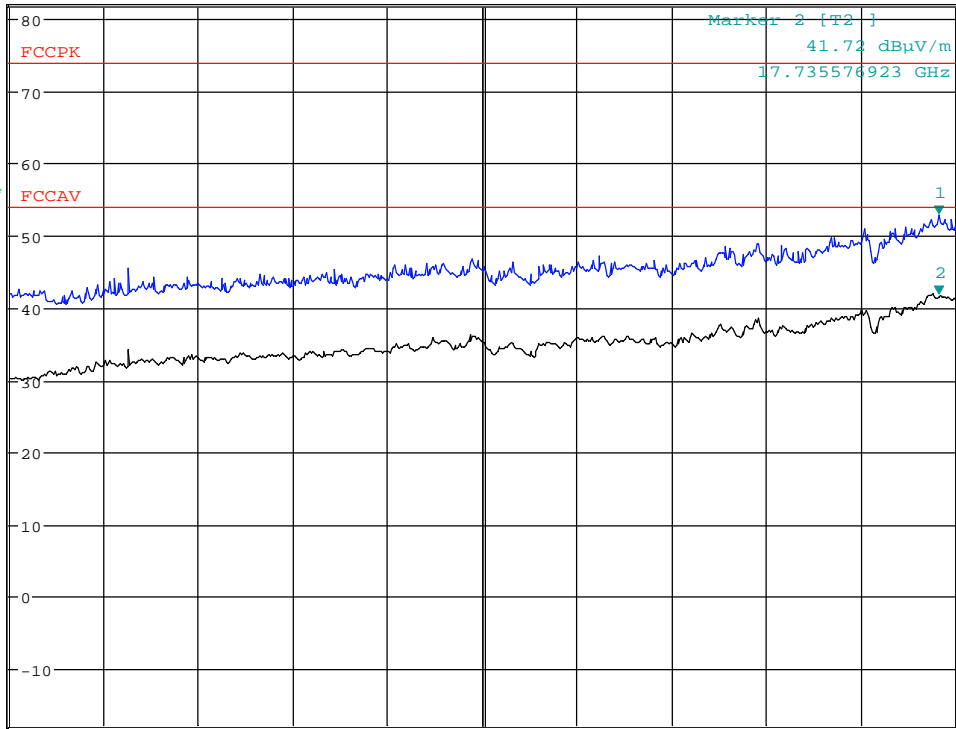

Start 3 GHz 1.5 GHz/ Stop 18 GHz

Date: 23.OCT.2019 12:47:39

Radiated spurious emissions, HP, 3 - 18GHz, ch2440MHz, PK scan, 1Mbps




MARKER 1
 17.66346154 GHz

*RBW 1 MHz Marker 1 [T1]
 VBW 10 MHz 52.05 dBµV/m
 SWT 90 ms 17.663461538 GHz

Ref 82 dBµV/m *Att 10 dB

1 PK
 MAXH

2 RM *
 MAXH

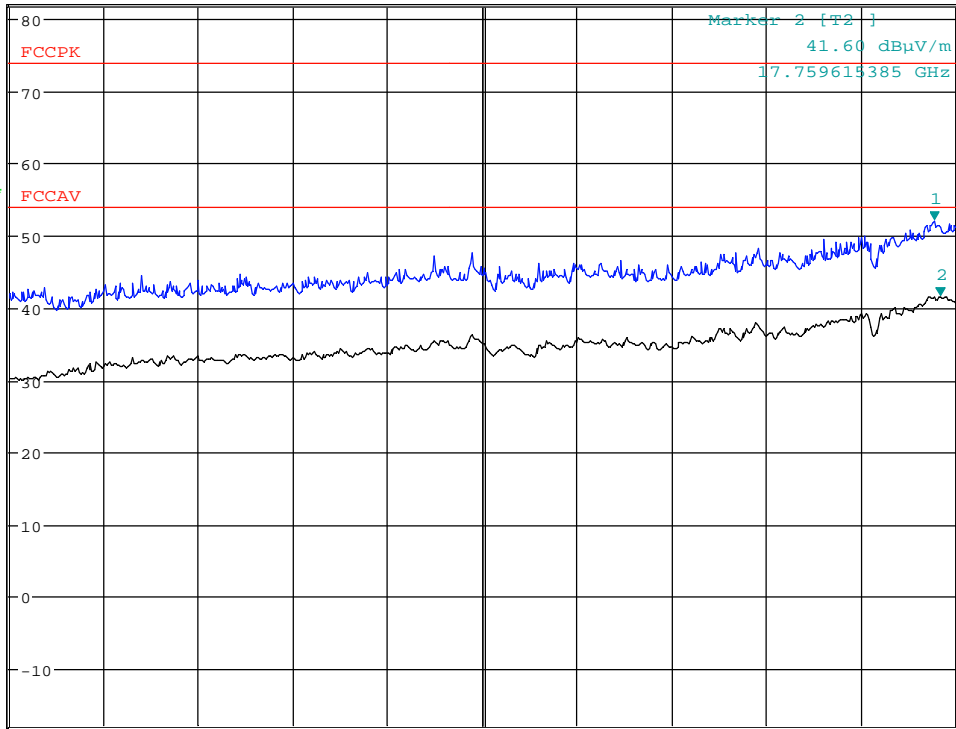

Start 3 GHz 1.5 GHz/ Stop 18 GHz

Date: 23.OCT.2019 12:50:24

Radiated spurious emissions, VP, 3 - 18GHz, ch2480MHz, PK scan, 1Mbps




MARKER 1
 4.947115385 GHz

*RBW 1 MHz Marker 1 [T1]
 VBW 10 MHz 50.68 dBμV/m
 SWT 90 ms 4.947115385 GHz

Ref 82 dBμV/m *Att 10 dB


1 PK
 MAXH

2 RM *
 MAXH

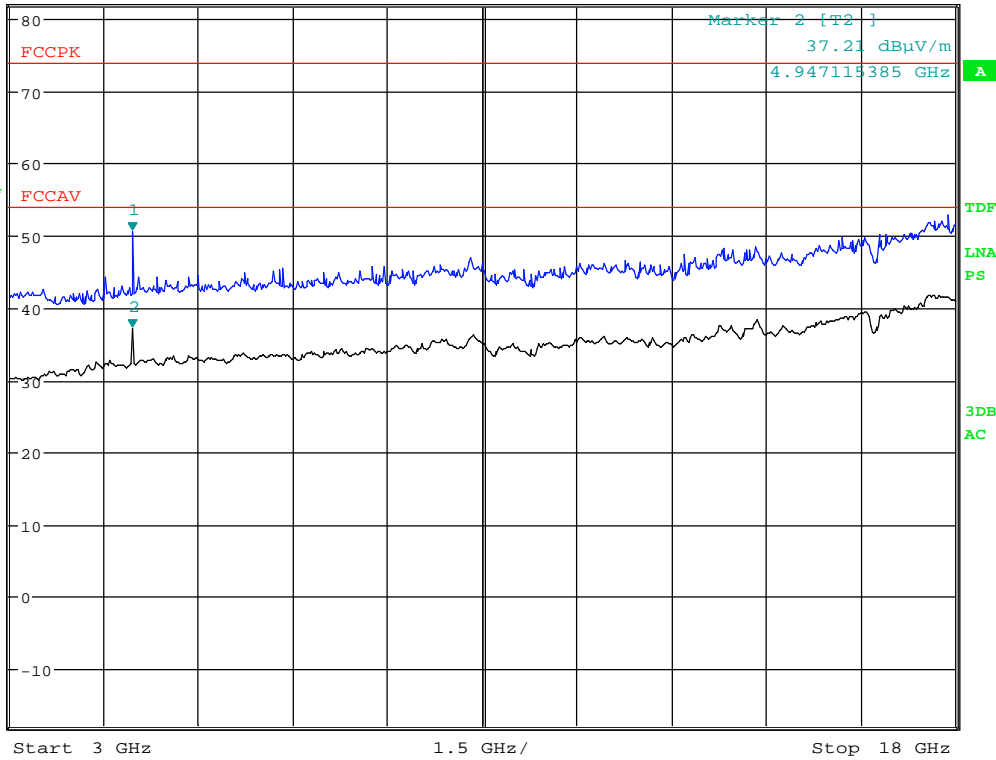


Date: 23.OCT.2019 12:49:50

Radiated spurious emissions, HP, 3 - 18GHz, ch2480MHz, PK scan, 1Mbps

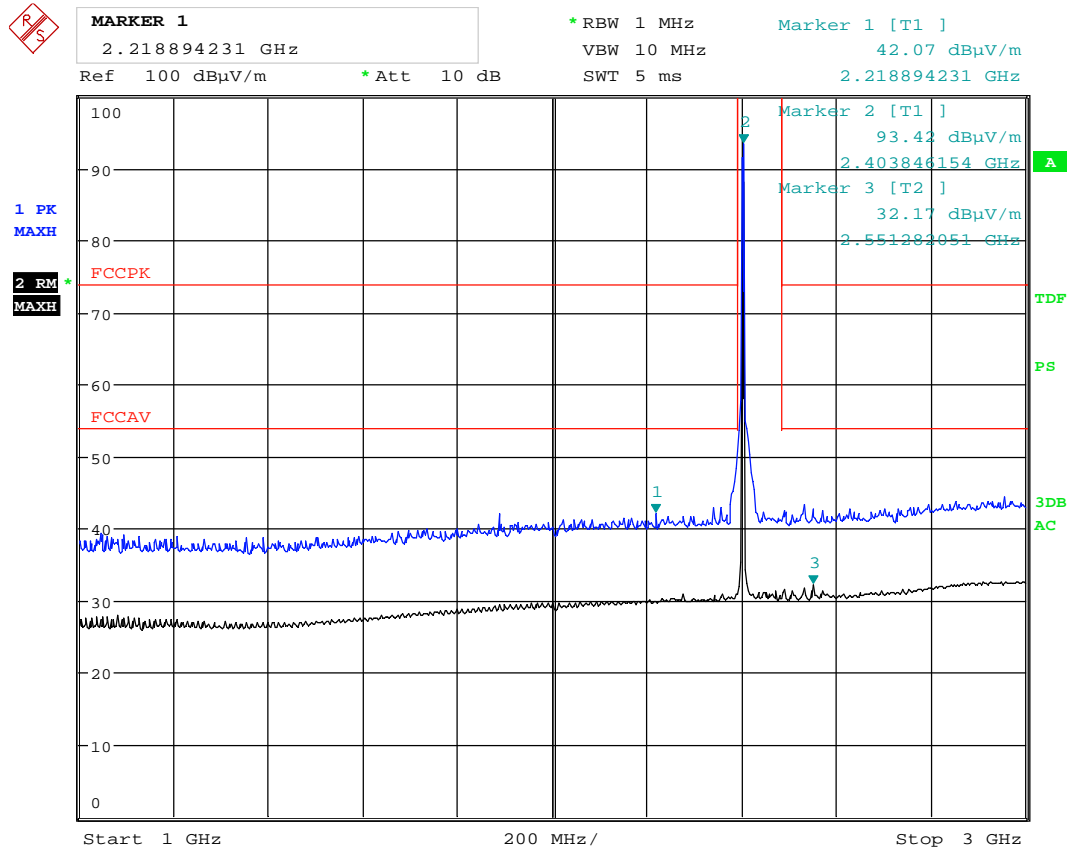


Date: 23.OCT.2019 13:35:11

Radiated spurious emissions, VP, 1 - 3GHz, ch2402MHz, PK scan, 2Mbps

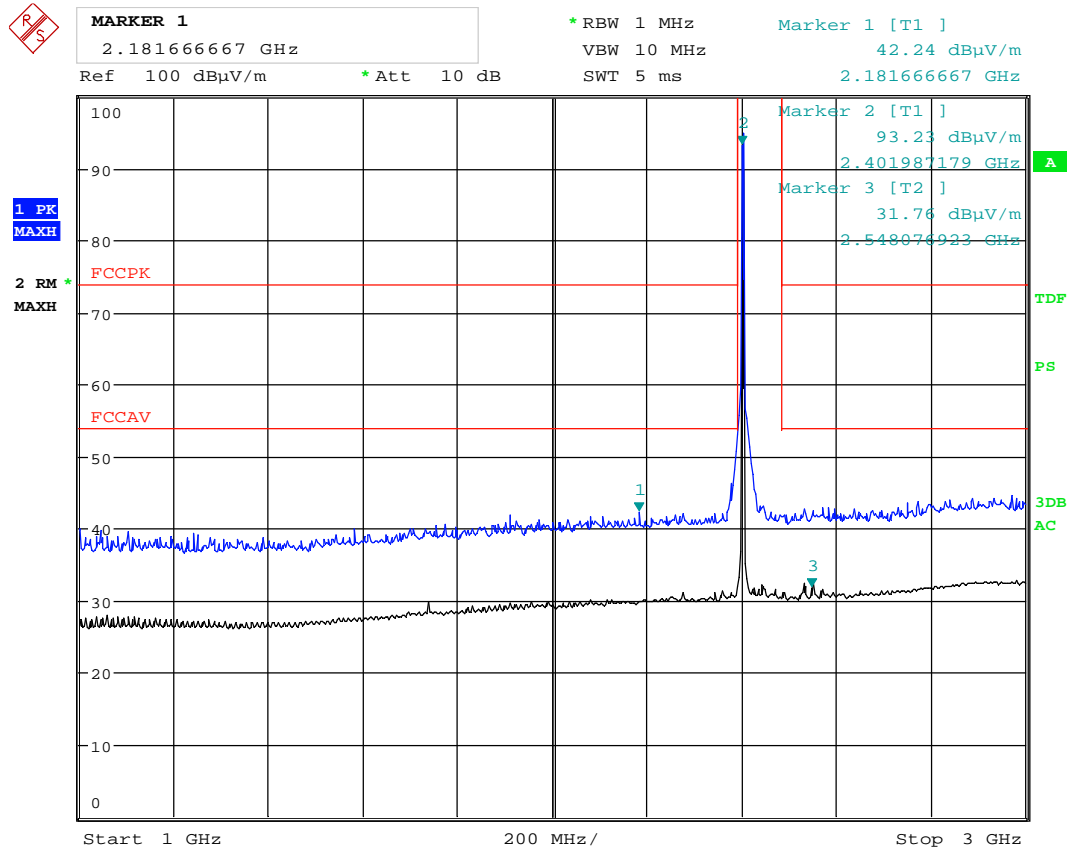


Date: 23.OCT.2019 13:20:00

Radiated spurious emissions, HP, 1 - 3GHz, ch2402MHz, PK scan, 2Mbps

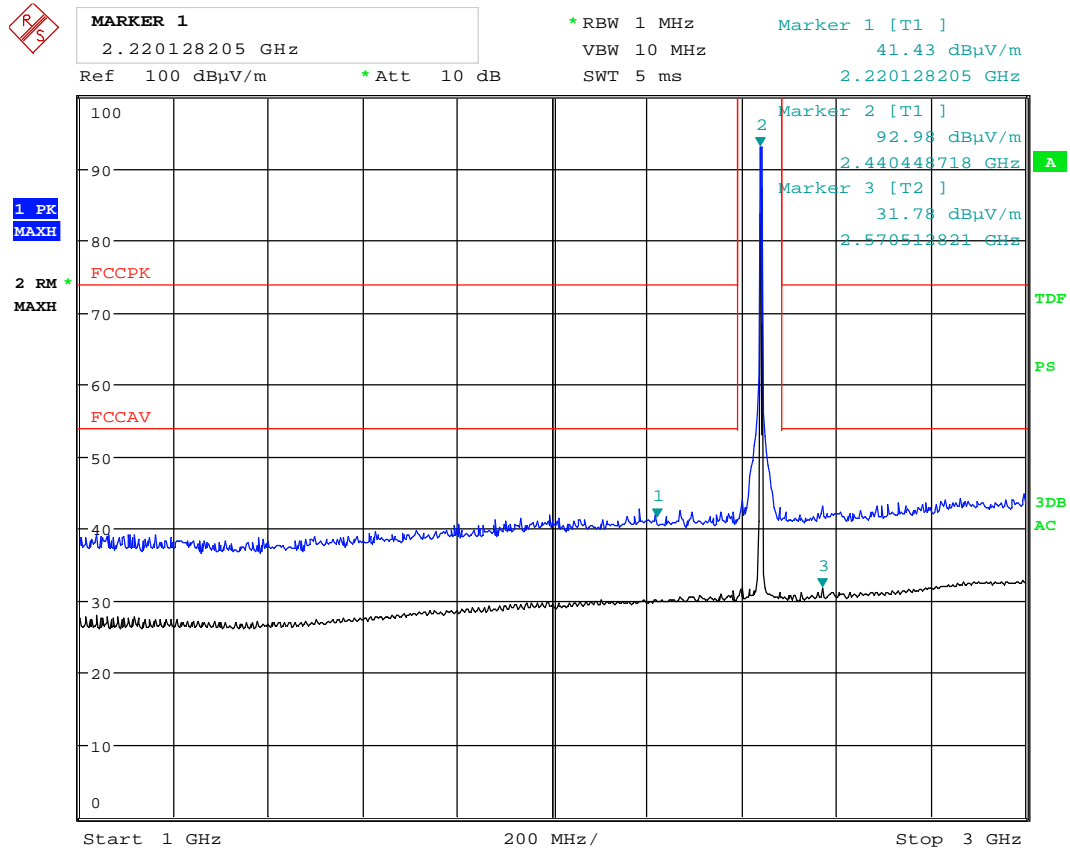

Date: 23.OCT.2019 13:28:13

Radiated spurious emissions, VP, 1 - 3GHz, ch2440MHz, PK scan, 2Mbps

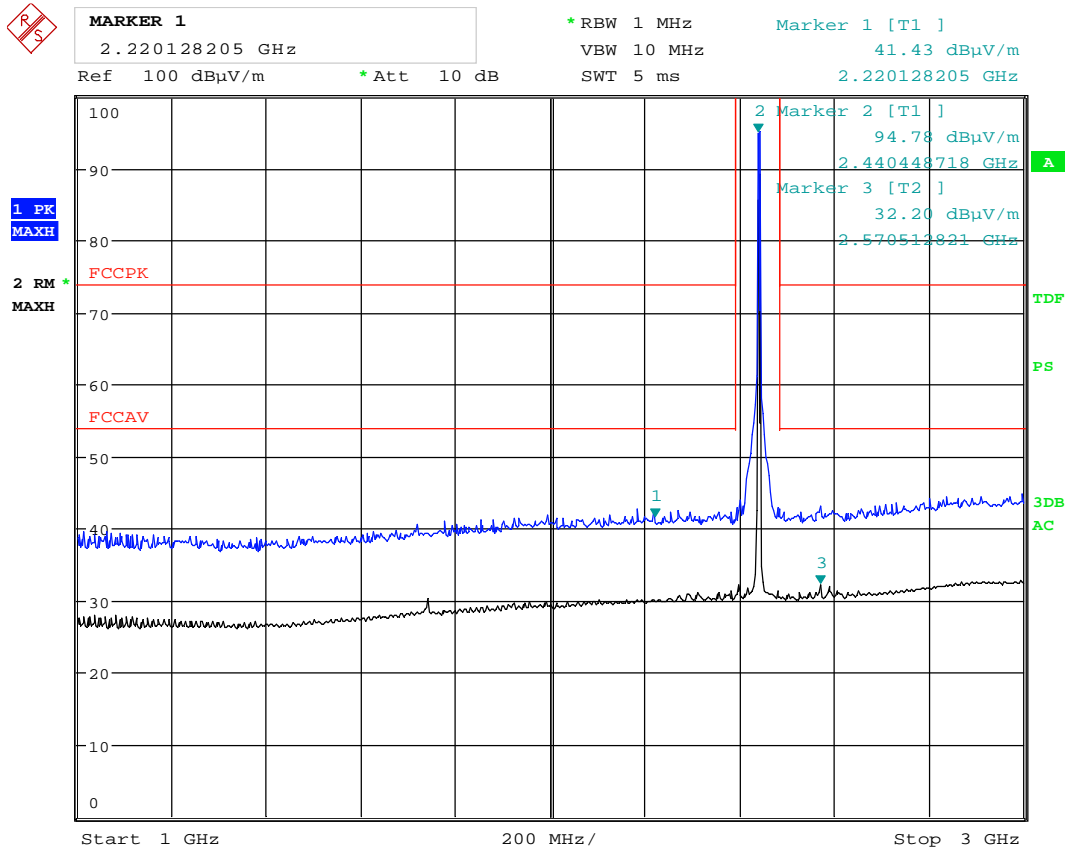

Date: 23.OCT.2019 13:29:19

Radiated spurious emissions, HP, 1 - 3GHz, ch2440MHz, PK scan, 2Mbps




MARKER 1
 2.215689103 GHz

*RBW 1 MHz
 VBW 10 MHz
 SWT 5 ms

Marker 1 [T1]
 40.03 dBμV/m
 2.215689103 GHz


1 PK
 MAXH

2 RM *
 MAXH

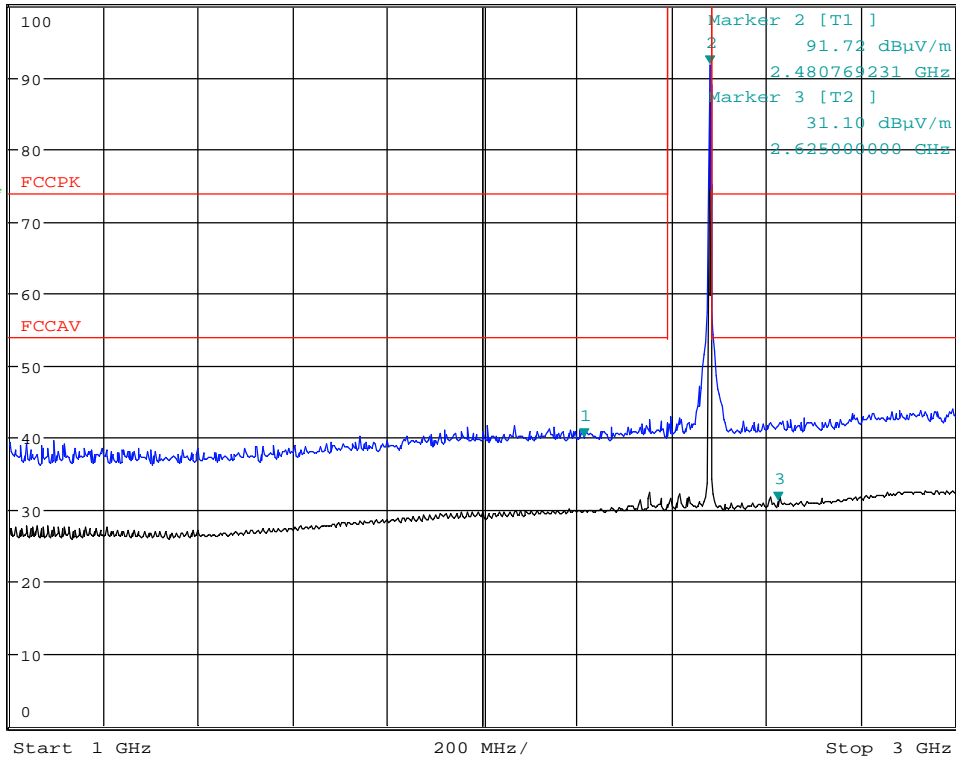

Date: 23.OCT.2019 13:38:14

Radiated spurious emissions, VP, 1 - 3GHz, ch2480MHz, PK scan, 2Mbps

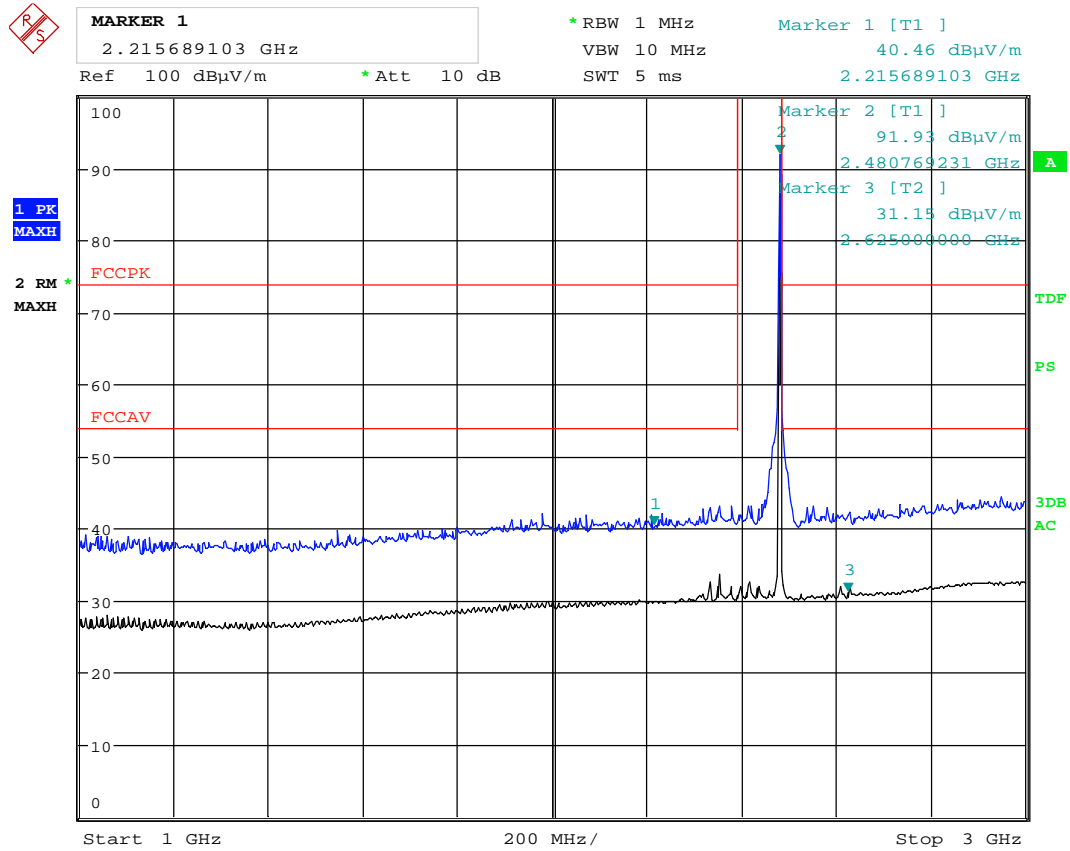


Date: 23.OCT.2019 13:39:19

Radiated spurious emissions, HP, 1 - 3GHz, ch2480MHz, PK scan, 2Mbps



MARKER 1
 17.56730769 GHz
 Ref 82 dB μ V/m *Att 10 dB

*RBW 1 MHz Marker 1 [T1]
 VBW 10 MHz 52.01 dB μ V/m
 SWT 90 ms 17.567307692 GHz

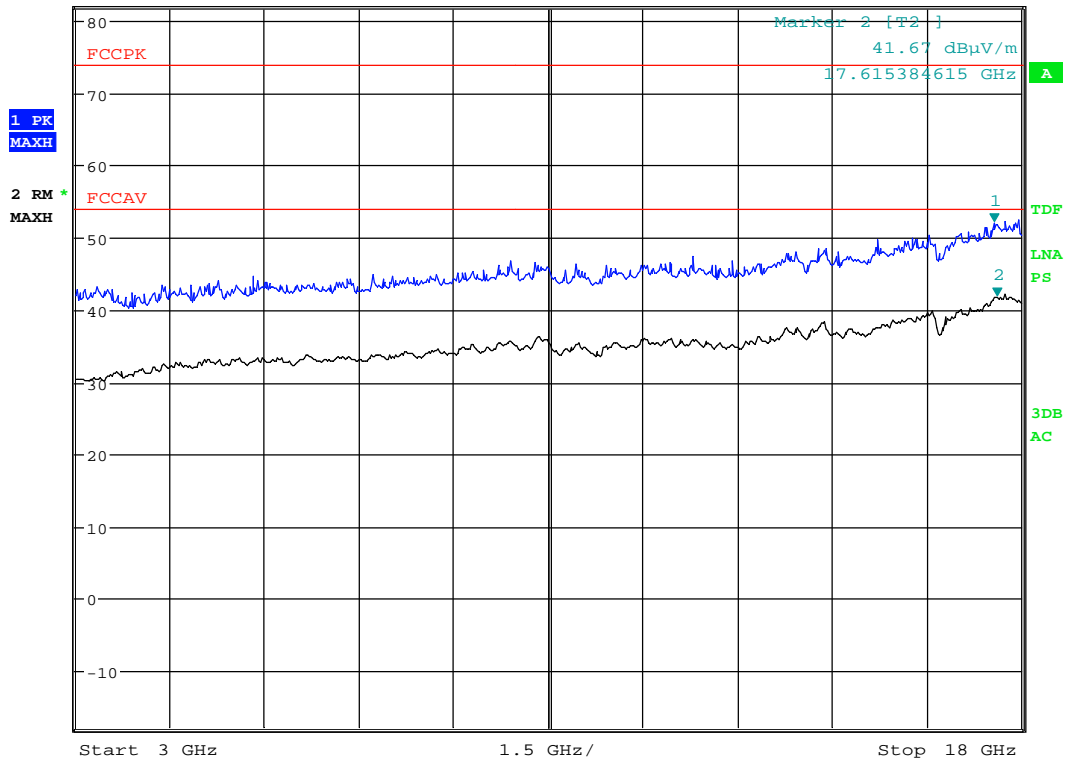

Date: 23.OCT.2019 12:25:15

Radiated spurious emissions, VP, 3 - 18GHz, ch2402MHz, PK scan, 2Mbps




MARKER 1
 17.6875 GHz

*RBW 1 MHz Marker 1 [T1]
 VBW 10 MHz 52.98 dBμV/m
 SWT 90 ms 17.687500000 GHz

Ref 82 dBμV/m *Att 10 dB

1 PK
 MAXH

2 RM *
 MAXH

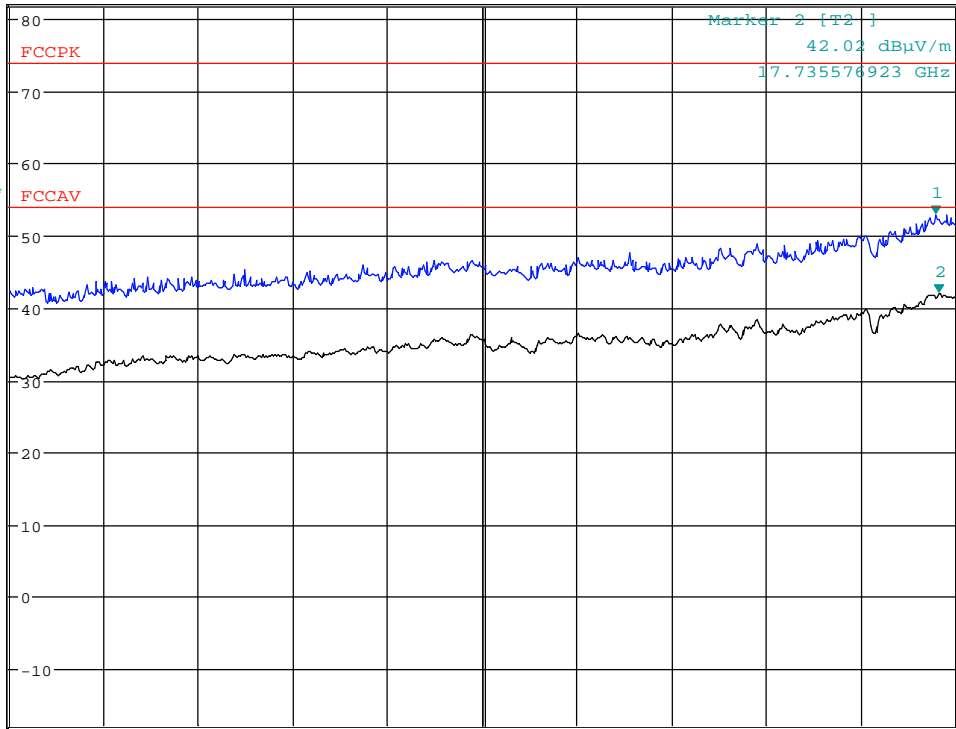

Start 3 GHz 1.5 GHz/ Stop 18 GHz

Date: 23.OCT.2019 12:23:56

Radiated spurious emissions, HP, 3 - 18GHz, ch2402MHz, PK scan, 2Mbps



MARKER 1
 17.75961538 GHz


*RBW 1 MHz
 VBW 10 MHz
 SWT 90 ms

Marker 1 [T1]
 52.69 dB μ V/m
 17.759615385 GHz

Ref 82 dB μ V/m *Att 10 dB

1 PK
 MAXH

2 RM *
 MAXH

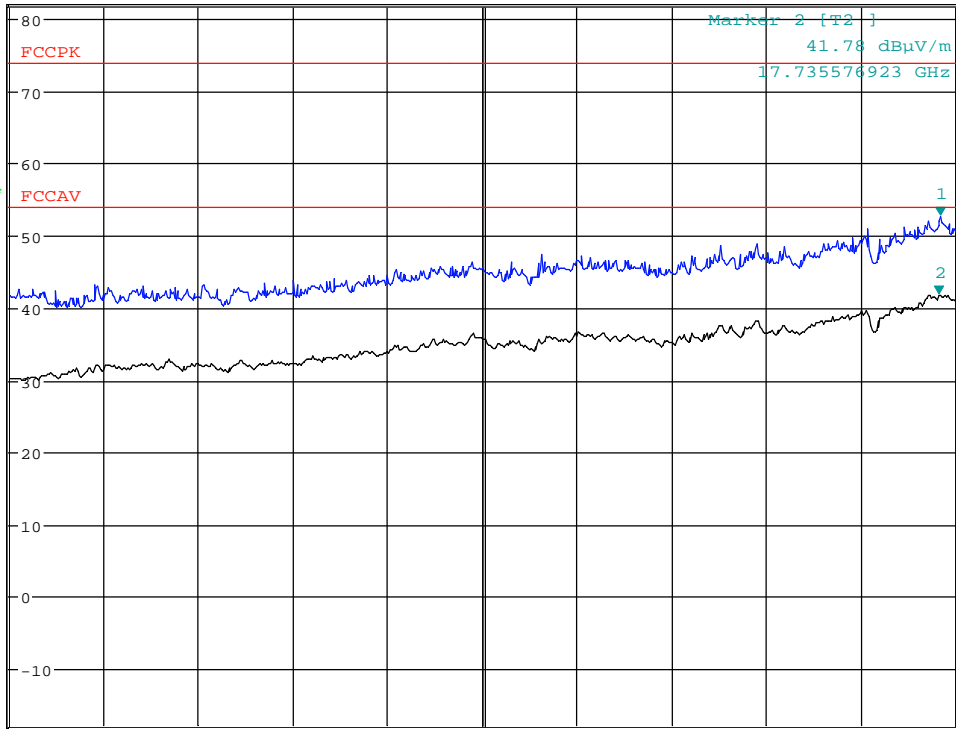

Start 3 GHz 1.5 GHz/ Stop 18 GHz

Date: 23.OCT.2019 12:30:37

Radiated spurious emissions, VP, 3 - 18GHz, ch2440MHz, PK scan, 2Mbps




MARKER 1
 17.75961538 GHz

*RBW 1 MHz Marker 1 [T1]
 VBW 10 MHz 52.22 dBμV/m
 SWT 90 ms 17.759615385 GHz

1 PK
 MAXH

2 RM *
 MAXH

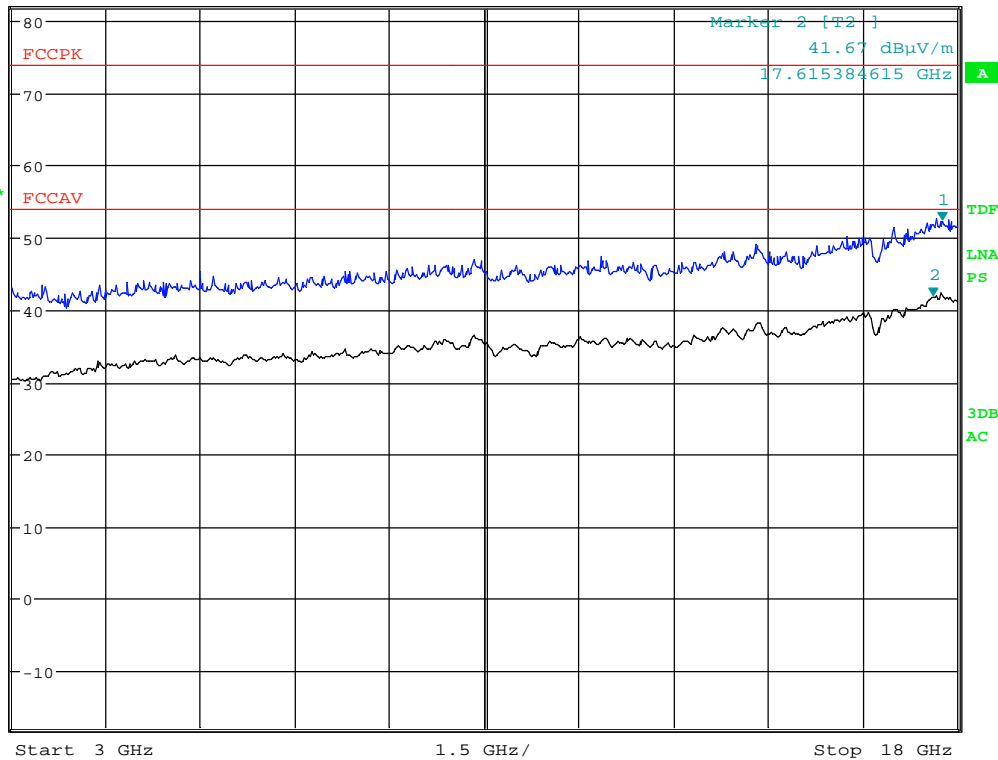

Date: 23.OCT.2019 12:29:07

Radiated spurious emissions, HP, 3 - 18GHz, ch2440MHz, PK scan, 2Mbps




MARKER 1
 17.6875 GHz

*RBW 1 MHz
 VBW 10 MHz
 SWT 90 ms
 Marker 1 [T1]
 52.49 dBµV/m
 17.687500000 GHz

Ref 82 dBµV/m *Att 10 dB

1 PK
 MAXH

2 RM *
 MAXH

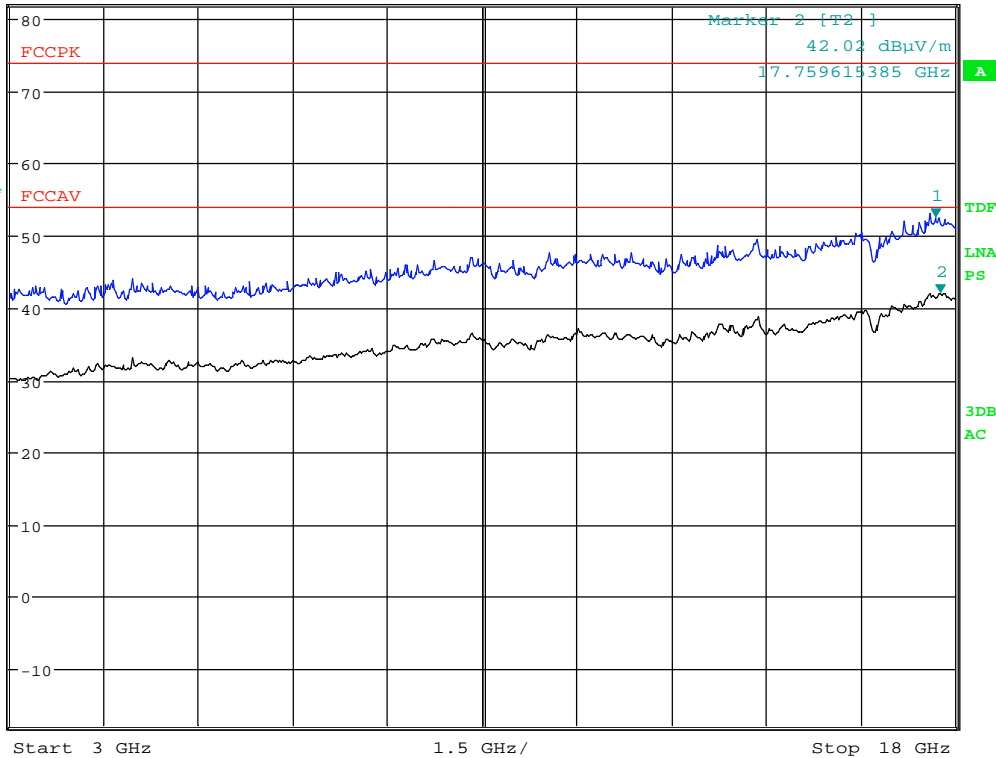

Date: 23.OCT.2019 12:37:37

Radiated spurious emissions, VP, 3 - 18GHz, ch2480MHz, PK scan, 2Mbps




MARKER 1
 4.947115385 GHz

*RBW 1 MHz Marker 1 [T1]
 VBW 10 MHz 49.79 dBμV/m
 SWT 90 ms 4.947115385 GHz

Ref 82 dBμV/m *Att 10 dB

1 PK
 MAXH

2 RM *
 MAXH

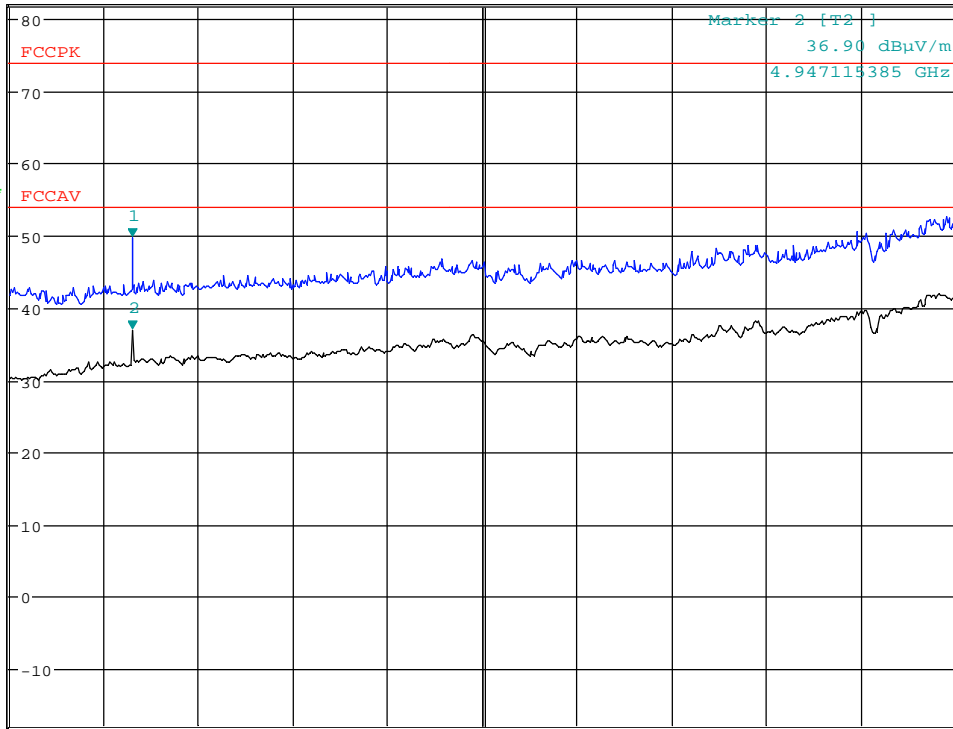

Start 3 GHz 1.5 GHz/ Stop 18 GHz

Date: 23.OCT.2019 12:38:48

Radiated spurious emissions, HP, 3 - 18GHz, ch2480MHz, PK scan, 2Mbps




MARKER 1
 24.79807692 GHz

*RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 50.41 dBμV/m
 SWT 45 ms 24.798076923 GHz

Ref 72.5 dBμV/m *Att 10 dB

1 PK
 MAXH

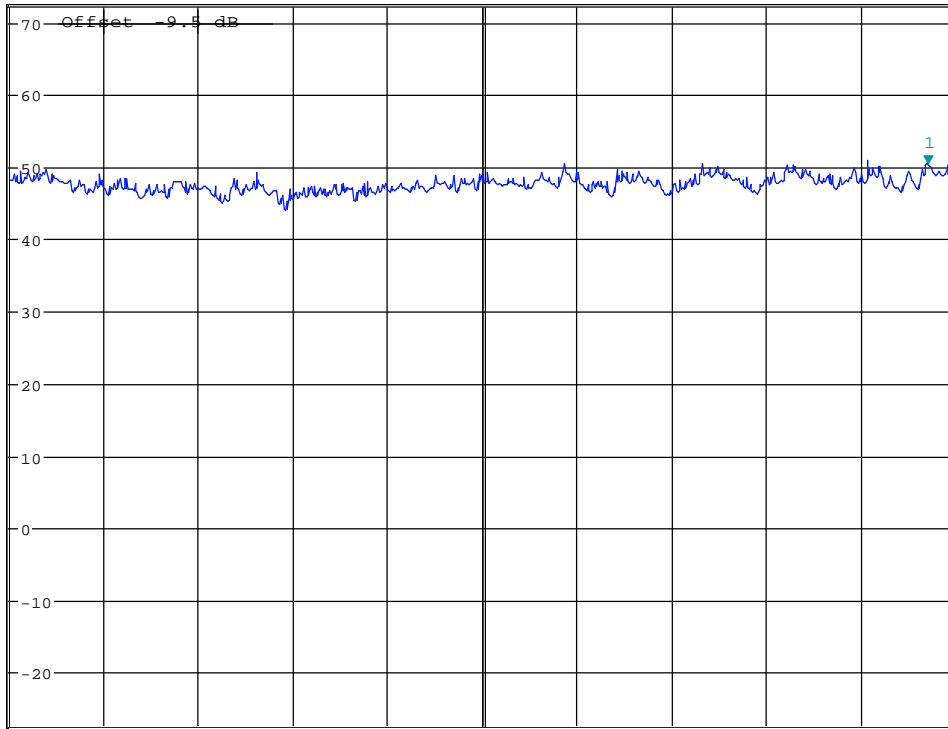

Start 18 GHz 700 MHz/ Stop 25 GHz

Date: 23.OCT.2019 14:53:41

Pre-scan, Radiated spurious emissions, VP, 18 - 25GHz (1 and 2Mbps)




MARKER 1
 23.79967949 GHz

*RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 51.00 dBμV/m
 SWT 45 ms 23.799679487 GHz

Ref 72.5 dBμV/m *Att 10 dB

1 PK
 MAXH

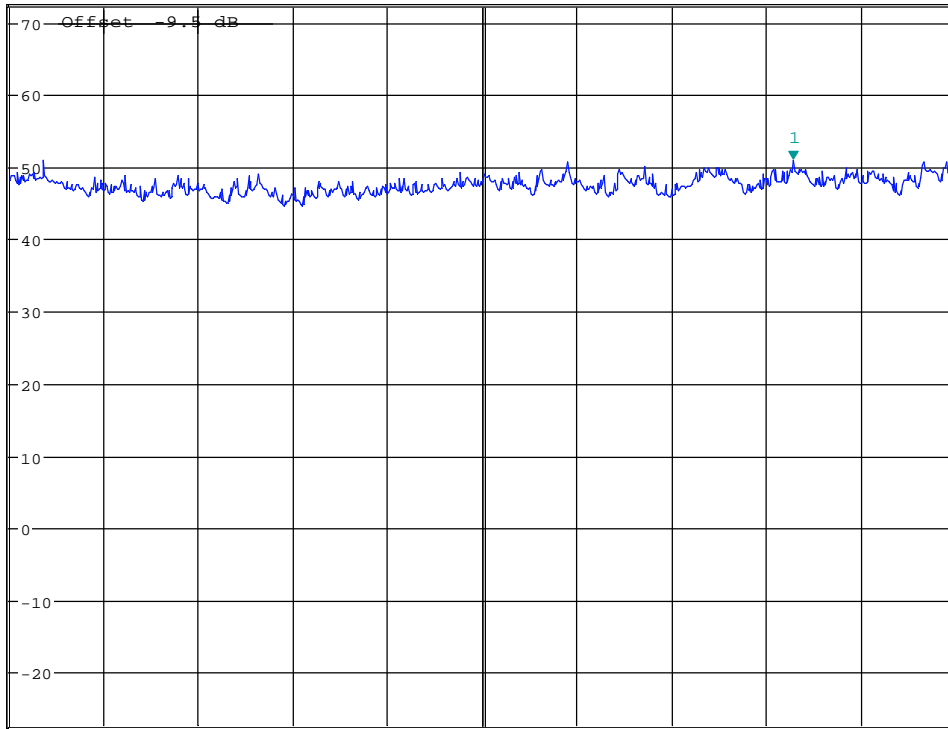

Start 18 GHz 700 MHz/ Stop 25 GHz

Date: 23.OCT.2019 14:54:11

Pre-scan, Radiated spurious emissions, HP, 18 - 25GHz (1 and 2 Mbps)

3.9 Power Spectral Density (PSD)

FCC part 15.247(e)

ISED Canada RSS-247 Issue 2, Clause 5.2 (2)

Measurement procedure: ANSI C63.10-2013 Clause 11.10

Test Results: Complies

Measured and Calculated Data:


The measurement procedures PKPSD described in ANSI C63.10-2013 was used.

	2402 MHz	2440 MHz	2480 MHz
Measured value (dBm), 1Mbps	-12.87	-12.79	-12.81
Measured value (dBm), 2Mbps	-14.66	-14.74	-14.86


Requirements:

The Power Spectral Density of a Digital Transmission System shall be no greater than +8 dBm in any 3 kHz band


No requirements for Frequency Hopping Systems.

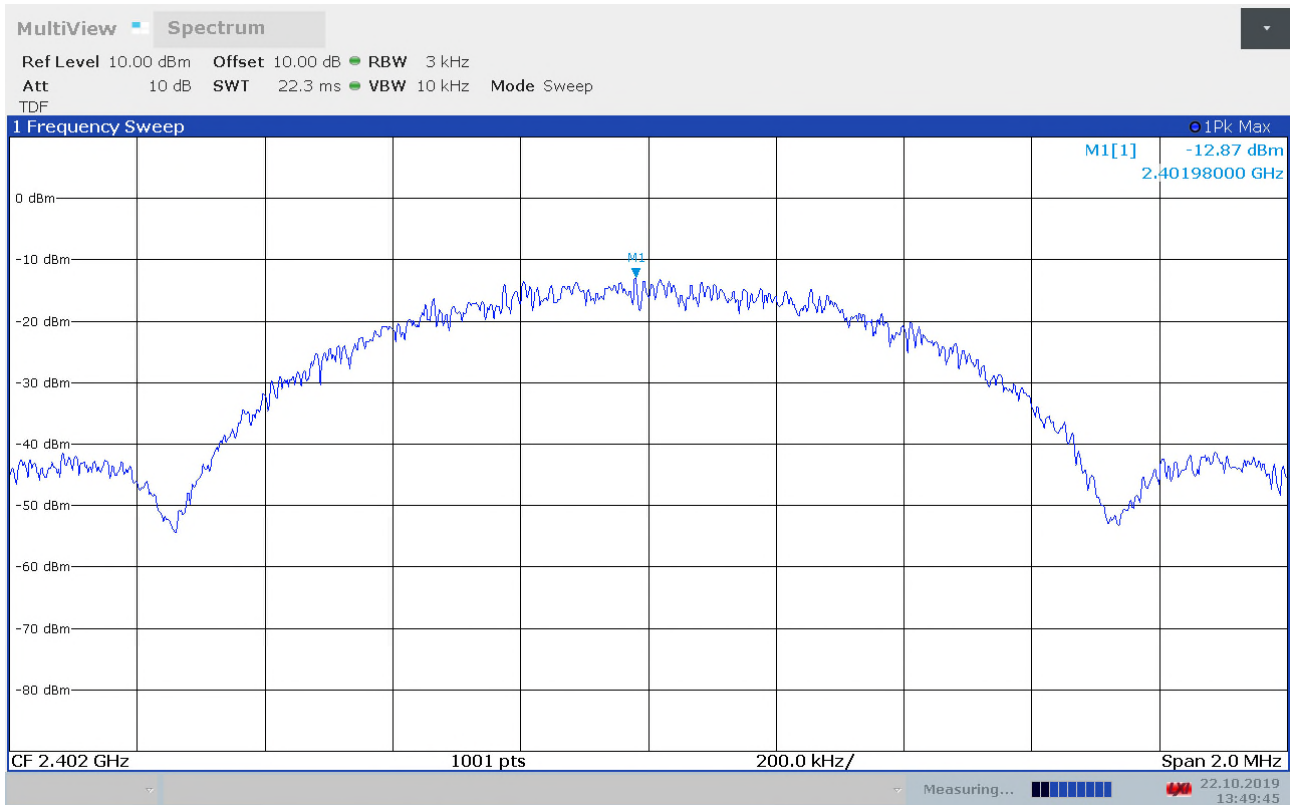


Conducted PSD, ch2402MHz, 1Mbps

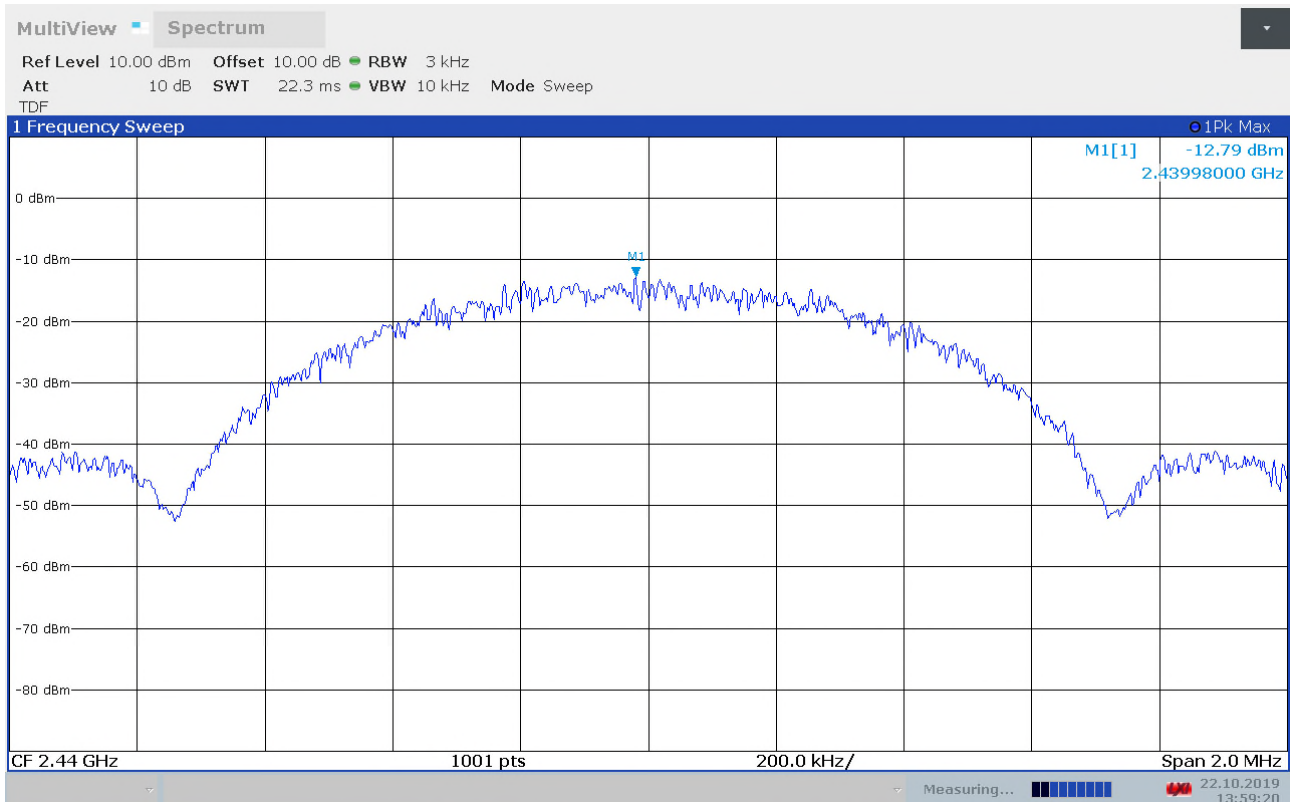


Conducted PSD, ch2440MHz, 1Mbps

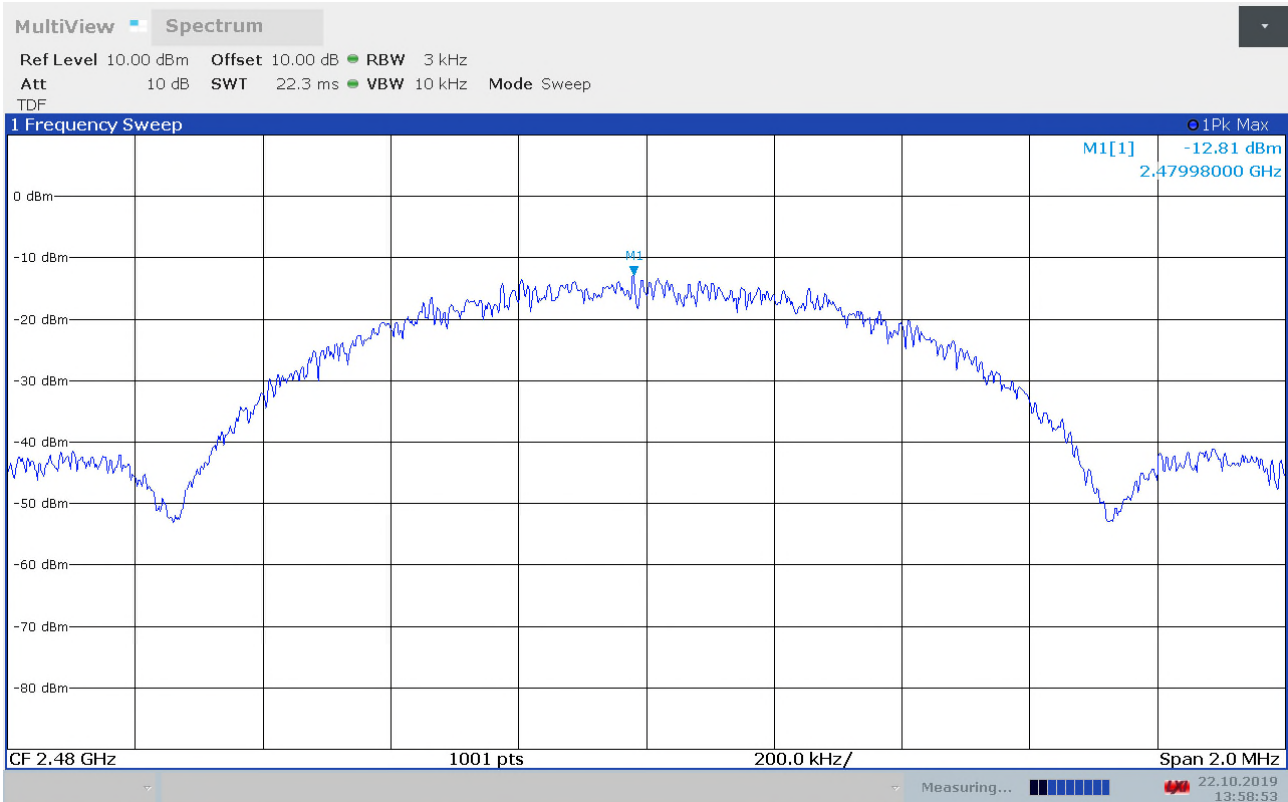


Conducted PSD, ch2480MHz, 1Mbps

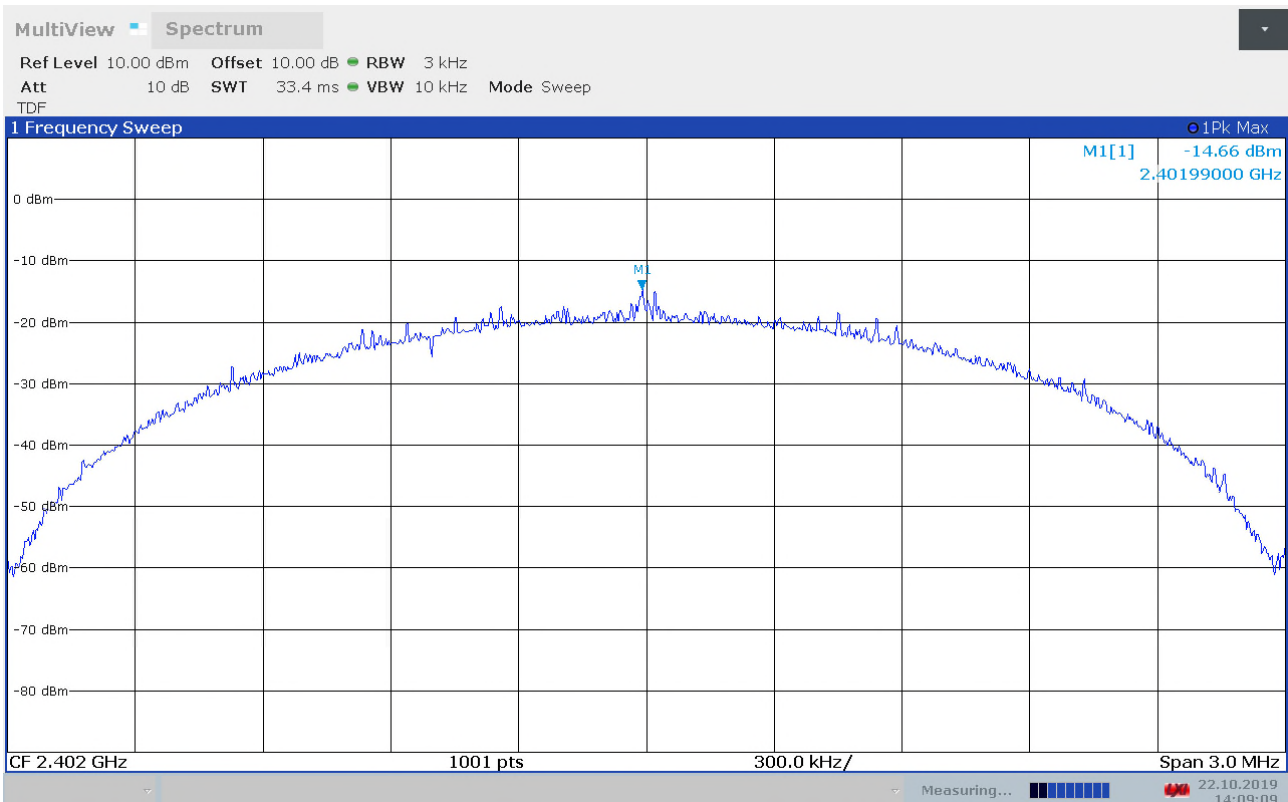

Conducted PSD, ch2402MHz, 2Mbps

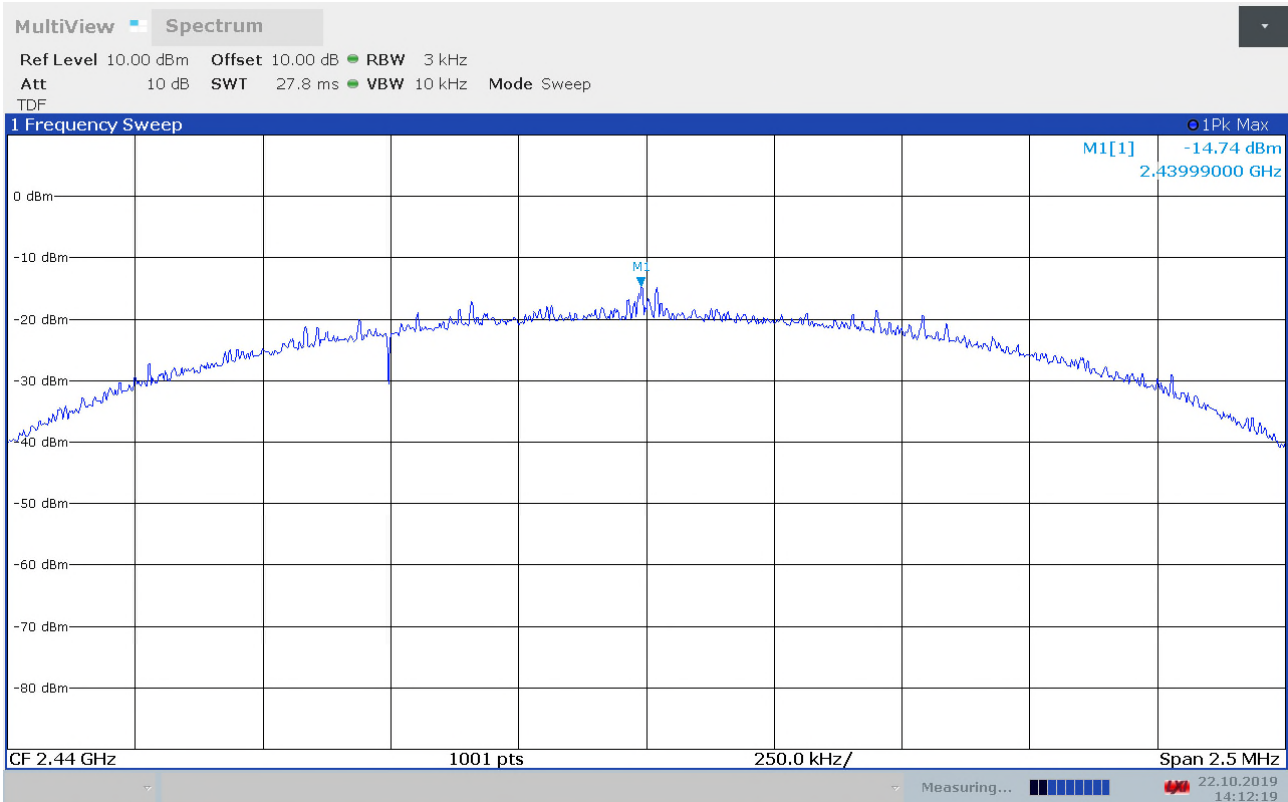

Conducted PSD, ch2440MHz, 2Mbps

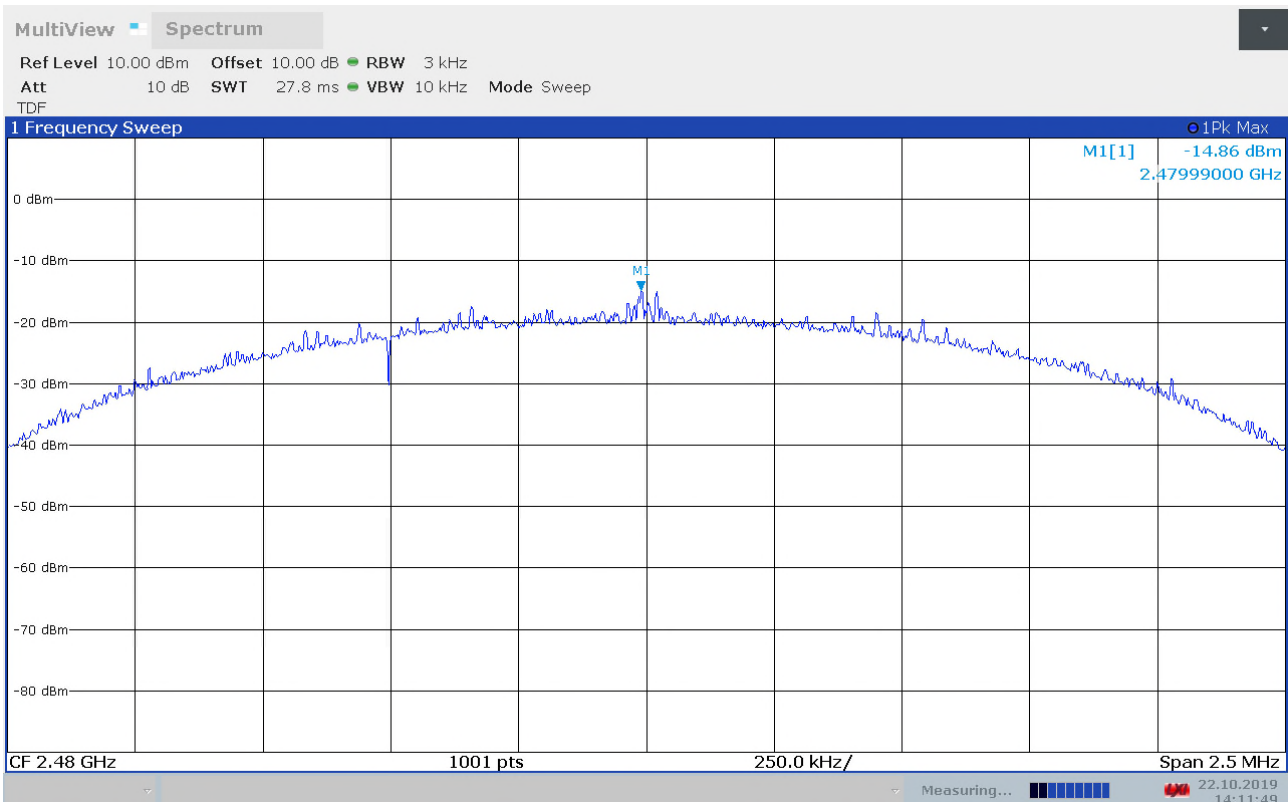

Conducted PSD, ch2480MHz, 2Mbps

4 Measurement Uncertainty

Measurement Uncertainty Values		
Test Item		Uncertainty
Output Power		±0.5 dB
Power Spectral Density		±0.5 dB
Out of Band Emissions, Conducted	< 3.6 GHz	±0.6 dB
	> 3.6 GHz	±0.9 dB
Spurious Emissions, Radiated	< 1 GHz	±2.5 dB
	> 1 GHz	±2.2 dB
Emission Bandwidth		±4 %
Power Line Conducted Emissions		+2.9 / -4.1 dB
Spectrum Mask Measurements	Frequency	±5 %
	Amplitude	±1.0 dB
Frequency Error		±0.6 ppm
Temperature Uncertainty		±1 °C

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2

5 LIST OF TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Test Laboratory.


No.	Instrument/ ancillary	Type of instrument/ ancillary	Manufacturer	Ref. no.	Cal. Date	Cal. Due
1.	ESU40	EMI Receiver	Rohde & Schwarz	LR1639	2019.01	2020.01
2.	FSW43	Spectrum analyser	Rohde & Schwarz	LR1690	2019.01	2020.01
3.	HFH2-Z2	Active Loop antenna	Rohde & Schwarz	LR1660	2019.09	2021.09
4.	3115	Antenna horn	EMCO	LR 1330	2016.10	2020.10
5.	PM 320K	Antenna Horn	Sivers	LR 1717	N/A	
6.	DBF-520-20	Antenna Horn	Systron-Donner corp	LR 102	N/A	
7.	638	Antenna Horn	NARDA	LR 1480	N/A	
8.	637	Antenna Horn	NARDA	LR 099	N/A	
9.	ARJB1	Bi-log Hybrid Antenna	Sunol	LR 1734	2018.05	2020.05
10.	4768-10	Attenuator	Narda	LR 1356	Cal b4 use	
11.	6HC3000/18000	Highpass Filter	Trilithic	LR 1614	Cal b4 use	
12.	8449B	Pre-amplifier	Hewlett Packard	LR 1322	2019.07	2020.07
13.	310N	Pre-amplifier	Sonoma	LR 1686	2019.07	2020.07
14.	Model 45	Multimeter	Fluke	LT 5218	2018.11	2020.11

The software listed below has been used for one or more tests.


No.	Manufacturer	Name	Version	Comment
1	Rohde & Schwarz	GPIBShot	2.7	Screenshots from R&S Spectrum Analyzers
2	Rohde & Schwarz	RScommander	1.9.2 64bit	Versatile Software Tool for R&S Instruments
3	Rohde & Schwarz	EMC 32	10.40.10	Radiated Emission test software

6 BLOCK DIAGRAM

6.1 Power Line Conducted Emission

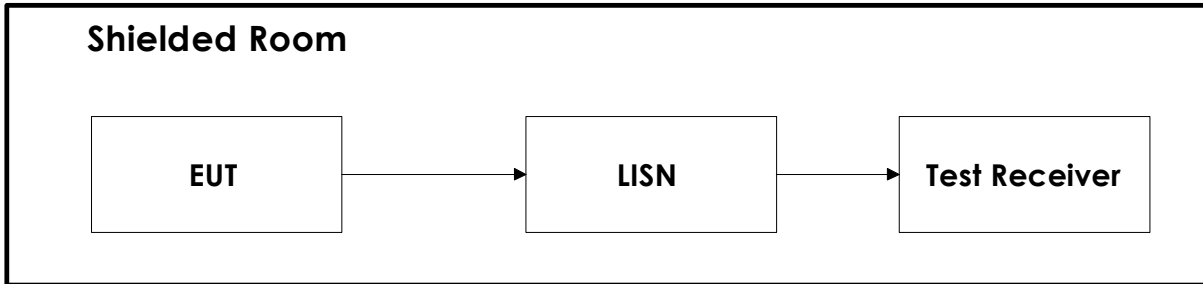

6.2 Test Site Radiated Emission

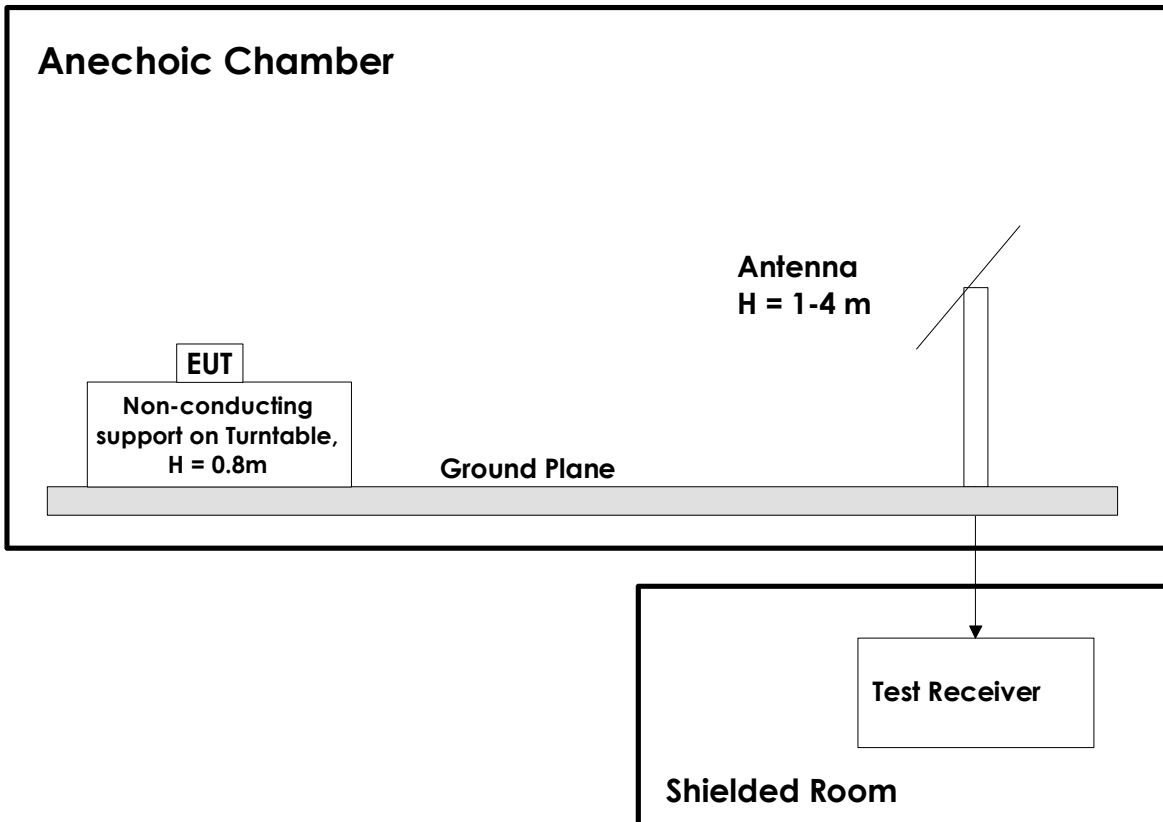

This test setup is used for all radiated emissions tests. For frequencies below 30 MHz the measuring distance is 10m, for all other frequencies it is 3m or 1m. Emissions above 1 GHz are measured with a Spectrum Analyzer and Horn Antenna. For measurements above 18 GHz the test receiver is moved inside the anechoic chamber and located next to the antenna to minimize the cable loss. All measurements at 1GHz and above were performed with turntable height 1.5m and with the ground plane covered by absorbers. A pre-amplifier is used for all measurements above 30 MHz, and High-Pass or Band-Pass filter is used for all harmonics.