

MEASUREMENT REPORT

FCC PART 24

FCC ID: 2AD8UAHFID01

Application: Nokia Solutions and Networks, OY

Application Type: Class II Permissive Change

Product: AirScale Indoor Radio ASiR-pRRH


Model No.: AHFID

Brand Name: Nokia

FCC Rule Part(s): Part 24 Subpart E

Test Procedure(s): ANSI C63.26-2015

Test Date: October 23, 2020 ~ April 06, 2021

Reviewed By: 
(Paddy Chen)

Approved By: 
(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2006TW0002-U7	Rev. 01	Initial Report	06-15-2021	Valid

Note: This report is prepared for FCC Class II permissive supplement to MRT Original report No. 2006TW0002-U5, updated 5G NR n25 to n2 band and added related data.

CONTENTS

Description	Page
General Information.....	5
1. INTRODUCTION.....	6
1.1. Scope.....	6
1.2. MRT Test Location.....	6
2. PRODUCT INFORMATION.....	7
2.1. Equipment Description.....	7
2.2. Emission Designator.....	8
2.3. Description of Available Antennas.....	8
2.4. Test Mode Detail.....	9
2.5. Test Methodology.....	9
2.6. EMI Suppression Device(s)/Modifications.....	9
2.7. Test Environment Condition.....	9
3. TEST EQUIPMENT CALIBRATION DATE.....	10
4. MEASUREMENT UNCERTAINTY.....	11
5. TEST RESULT.....	12
5.1. Summary.....	12
5.2. Equivalent Isotropically Radiated Power Measurement.....	13
5.2.1. Test Limit.....	13
5.2.2. Test Procedures Used.....	13
5.2.3. Test Setting.....	13
5.2.4. Test Setup.....	14
5.2.5. Test Result.....	15
5.3. Emission Bandwidth.....	23
5.3.1. Test Limit.....	23
5.3.2. Test Procedure.....	23
5.3.3. Test Setting.....	23
5.3.4. Test Setup.....	24
5.3.5. Test Result.....	25
5.4. Band Edge Measurement.....	45
5.4.1. Test Limit.....	45
5.4.2. Test Procedure Used.....	45
5.4.3. Test Setting.....	45
5.4.4. Test Setup.....	46
5.4.5. Test Result.....	47

6. CONCLUSION51

General Information

Applicant:	Nokia Solutions and Networks, OY
Applicant Address:	2000 W. Lucent Lane, Naperville, Illinois, United States, 60563
Manufacturer:	Nokia Solutions and Networks, OY
Manufacturer Address:	2000 W. Lucent Lane, Naperville, Illinois, United States, 60563
Test Site:	MRT Technology (Taiwan) Co., Ltd
Test Site Address:	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan (R.O.C)

- MRT facility is a FCC registered (Reg. No. TW3261) test facility with the site description report on file and is designated by the FCC as an Accredited Test Film.
- MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

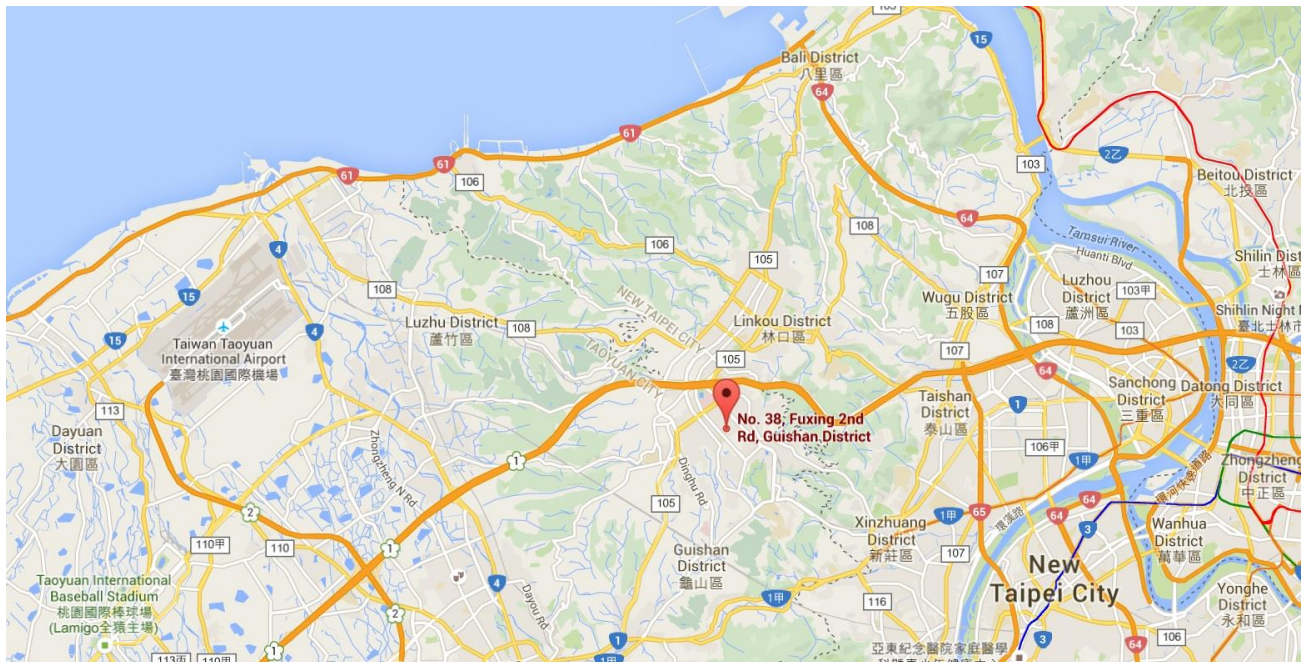

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	AirScale Indoor Radio ASiR-pRRH
Model No.:	AHFID
Brand Name:	Nokia
Test Device Serial No.:	NH204300255
Hardware Version:	A102
Software Version:	FL18A
Voltage Range:	PoE: 52 ~ 57Vdc
Operating Band (s):	5G NR n2, LTE B2
Modulation Type:	QPSK, 16QAM, 64QAM, 256QAM
T _x Frequency Range:	n2 & LTE Band 2: 1930 ~ 1990 MHz
R _x Frequency Range:	n2 & LTE Band 2: 1850 ~ 1910 MHz
Max EIRP Power:	<u>Band 2:</u> LTE 5MHz + NR 5MHz: 32.60dBm; LTE 20MHz + NR 5MHz: 32.28dBm LTE 20MHz + NR 20MHz: 32.38dBm; NR 5MHz + LTE 5MHz: 32.27dBm NR 5MHz + LTE 20MHz: 32.26dBm; NR 20MHz + LTE 20MHz: 32.23dBm
Emission Designator:	Refer to Section 2.2
Antenna Specification:	Refer to Section 2.3

2.2. Emission Designator

n2 & LTE Band 2		QPSK			16QAM		
BW (MHz)	Feq. (MHz)	Designator	Tolerance (ppm)	Max Power (W)	Designator	Tolerance (ppm)	Max Power (W)
LTE+NR							
5 + 5	1935.0~1985.0	9M47G7D	--	1.8197	9M46W7D	--	1.5066
20 + 5	1942.5 ~ 1977.5	23M7G7D	--	1.6904	23M7W7D	--	1.6482
20 + 20	1950.0~ 1970.0	38M3G7D	--	1.6406	38M3W7D	--	1.7298
NR+LTE							
5 + 5	1935.0~1985.0	9M48G7D	--	1.6866	9M44W7D	--	1.6672
5 + 20	1942.5 ~ 1977.5	23M7G7D	--	1.6672	23M7W7D	--	1.6827
20 + 20	1950.0~ 1970.0	38M3G7D	--	1.5241	38M2W7D	--	1.6711
n2 & LTE Band 2		64QAM			256QAM		
BW (MHz)	Feq. (MHz)	Designator	Tolerance (ppm)	Max Power (W)	Designator	Tolerance (ppm)	Max Power (W)
LTE+NR							
5 + 5	1935.0~1985.0	9M45W7D	--	1.5205	9M46W7D	--	1.4757
20 + 5	1942.5 ~ 1977.5	23M6W7D	--	1.4588	23M7W7D	--	1.5276
20 + 20	1950.0~ 1970.0	38M2W7D	--	1.5241	38M4W7D	--	1.3183
NR+LTE							
5 + 5	1935.0~1985.0	9M46W7D	--	1.3428	9M46W7D	--	1.3583
5 + 20	1942.5 ~ 1977.5	23M7W7D	--	1.5171	23M6W7D	--	1.3740
20 + 20	1950.0~ 1970.0	38M2W7D	--	1.3305	38M2W7D	--	1.3614

2.3. Description of Available Antennas

Band Support	Antenna Type	Model	Antenna Gain
n2	Omni Internal Antenna	6744	ANT 0: 4.4dBi ANT 1: 4.9dBi

2.4. Test Mode Detail

Test Item	Channel Bandwidth	Modulation
Equivalent Isotropically Radiated Power	<u>LTE + NR Mode:</u> 5 + 5MHz; 20 + 20MHz; 20 + 5MHz	QPSK, 16QAM, 64QAM, 256QAM
Emission Bandwidth		<u>NR + LTE Mode:</u> 256QAM
Band Edge Measurements	5 + 5MHz; 20 + 20MHz; 20 + 5MHz	QPSK

Note: There are a few different possible carrier and BW combinations that have been evaluated. Representative Minimum + Maximum carrier and BW configurations are included in this report as it is representative of all other possible configurations

2.5. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 2, Part 24, Part 27
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP

2.6. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.7. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH

3. TEST EQUIPMENT CALIBRATION DATE

Radiated Emissions

Instrument	Brand	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2021/10/05
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2022/04/26
Broadband Hornantenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2022/04/23
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2022/04/23
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2022/04/23
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2022/04/23
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2022/03/23
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2022/03/24
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2021/11/02
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2021/07/14
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2021/06/16
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2022/05/27

Conducted Test Equipment

Instrument	Brand	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2022/04/23
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2021/11/02
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2021/07/11
Temperature & Humidity Chamber	TEN BILLION	TTH-B3UP	MRTTWA00036	1 year	2022/06/09
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2022/05/27

Software	Version	Function
EMI Software	V3	EMI Test Software

4. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.65dB
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz ~ 30MHz: 3.92dB 30MHz ~ 1GHz: 4.25dB 1GHz ~ 18GHz: 4.40dB

5. TEST RESULT

5.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1046; 24.232(a)(2)	Equivalent Isotropically Radiated Power	Refer to Section 5.2	Conducted & Radiated	Pass	Section 5.2
2.1049	Emission Bandwidth	Refer to Section 5.3	Conducted	Pass	Section 5.3
24.238(a)	Band Edge Measurements	Refer to Section 5.4		Pass	Section 5.4

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) The Emission Bandwidth, Channel Band-edge were presented the worst test data of modulation & antenna port in the test report.

5.2. Equivalent Isotropically Radiated Power Measurement

5.2.1. Test Limit

The Radiated Equivalent Isotropically Power shall be according to the specific rule Part 24.232(a)(2) that are limited to EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

5.2.2. Test Procedures Used

KDB 971168 D01v03r01 - Section 5.2.4 & 5.8

ANSI C63.26-2015 - Section 5.2.4.2 & 5.2.7

5.2.3. Test Setting

Average Power Measurement


Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

Radiated Equivalent Isotropically Power Measurement


1. $RBW \geq OBW$
2. $VBW \geq 3 * RBW$
3. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period)
4. Detector = power averaging (rms)
5. Set sweep trigger to "free run"
6. If the EUT can be configured to transmit continuously, then set the trigger to free run
7. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.
To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time
8. The trace was allowed to stabilize
9. Use the peak marker function to determine the peak amplitude level.
10. $EIRP = \text{Output Power Level of S.G} - T_x \text{ Cable Loss} + \text{Antenna Gain of Substitution Antenna.}$

5.2.4. Test Setup

Conducted Measurement of Output Power

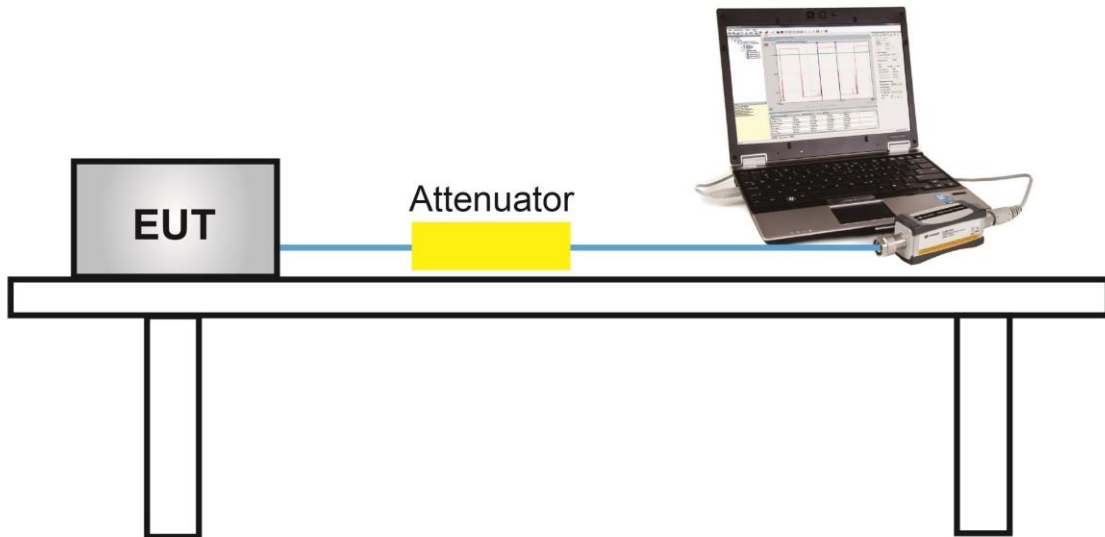

Radiated Measurement of Equivalent Isotropically Radiated Power

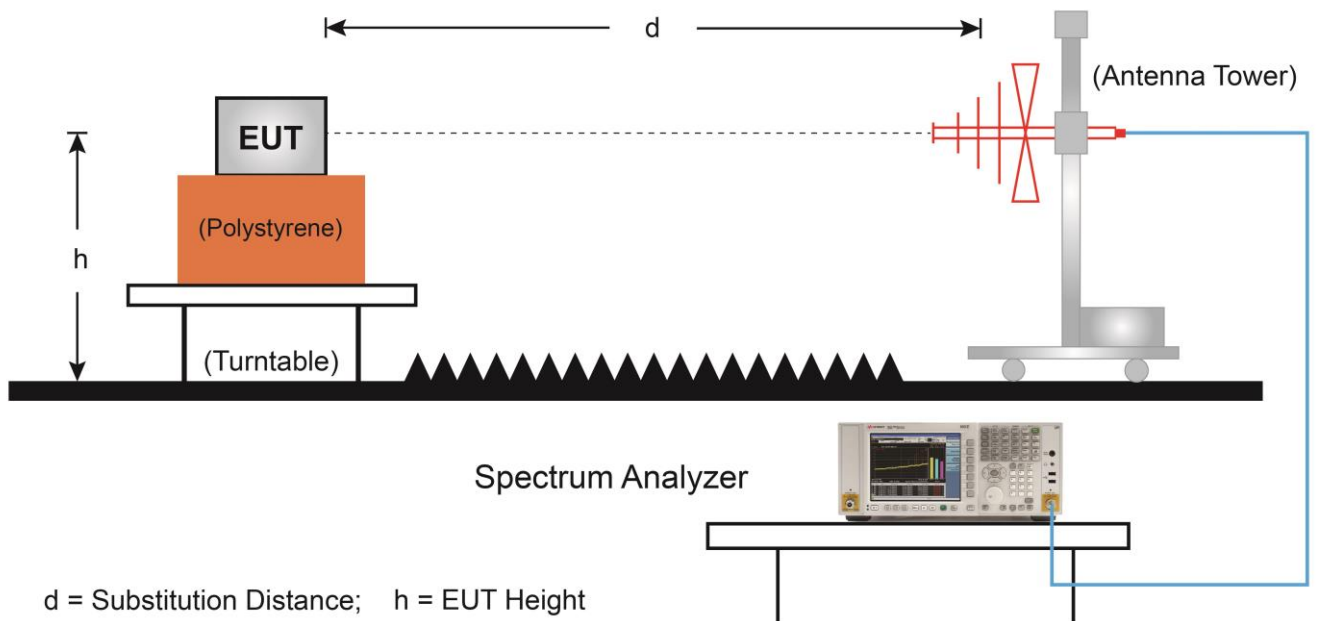

5.2.5. Test Result

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2021/02/01 ~ 2021/04/06
Test Configuration	Band 2 Concurrent Mode - LTE + NR		

Frequency (MHz)	Channel Bandwidth (MHz)	Ant 0 Power (dBm)	Ant 1 Power (dBm)	Total Power (dBm)
QPSK				
1932.5+1937.5	5+5	21.15	21.76	24.48
1957.5+1962.5	5+5	22.99	23.25	26.13
1982.5+1987.5	5+5	23.58	23.72	26.66
1940.0+1952.5	20+5	20.65	20.17	23.43
1957.5+1970.0	20+5	22.67	22.34	25.52
1975.0+1987.5	20+5	23.44	23.21	26.34
1940.0+1960.0	20+20	21.37	20.95	24.18
1950.0+1970.0	20+20	20.98	21.65	24.34
1960.0+1980.0	20+20	22.82	22.94	25.89
16QAM				
1932.5+1937.5	5+5	21.14	21.80	24.49
1957.5+1962.5	5+5	22.94	23.24	26.10
1982.5+1987.5	5+5	23.54	23.62	26.59
1940.0+1952.5	20+5	20.69	20.24	23.48
1957.5+1970.0	20+5	22.41	22.32	25.38
1975.0+1987.5	20+5	23.37	23.32	26.36
1940.0+1960.0	20+20	21.39	20.96	24.19
1950.0+1970.0	20+20	20.98	21.68	24.35
1960.0+1980.0	20+20	22.82	22.99	25.92

Frequency (MHz)	Channel Bandwidth (MHz)	Ant 0 Power (dBm)	Ant 1 Power (dBm)	Total Power (dBm)
64QAM				
1932.5+1937.5	5+5	21.24	21.82	24.55
1957.5+1962.5	5+5	23.01	23.31	26.17
1982.5+1987.5	5+5	23.66	23.72	26.70
1940.0+1952.5	20+5	20.67	20.82	23.76
1957.5+1970.0	20+5	22.32	22.32	25.33
1975.0+1987.5	20+5	23.45	23.23	26.35
1940.0+1960.0	20+20	21.42	20.98	24.22
1950.0+1970.0	20+20	21.00	21.67	24.36
1960.0+1980.0	20+20	22.85	23.01	25.94
256QAM				
1932.5+1937.5	5+5	21.14	21.82	24.50
1957.5+1962.5	5+5	23.03	23.31	26.18
1982.5+1987.5	5+5	23.57	23.63	26.61
1940.0+1952.5	20+5	20.45	20.22	23.35
1957.5+1970.0	20+5	22.71	22.56	25.65
1975.0+1987.5	20+5	23.52	23.44	26.49
1940.0+1960.0	20+20	21.40	20.95	24.19
1950.0+1970.0	20+20	20.99	21.71	24.38
1960.0+1980.0	20+20	22.80	23.03	25.93

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2021/02/01 ~ 2021/04/06
Test Configuration	Band 2 Concurrent Mode - NR + LTE		

Frequency (MHz)	Channel Bandwidth (MHz)	Ant 0 Power (dBm)	Ant 1 Power (dBm)	Total Power (dBm)
QPSK				
1932.5+1937.5	5+5	21.79	21.14	24.49
1957.5+1962.5	5+5	23.40	23.01	26.22
1982.5+1987.5	5+5	23.60	23.66	26.64
1932.5+1945.0	5+20	20.79	20.88	23.85
1950.0+1962.5	5+20	23.21	23.01	26.12
1967.5+1980.0	5+20	22.58	22.42	25.51
1940.0+1960.0	20+20	21.33	20.81	24.09
1950.0+1970.0	20+20	21.49	21.01	24.27
1960.0+1980.0	20+20	22.68	22.65	25.68
16QAM				
1932.5+1937.5	5+5	21.78	21.14	24.48
1957.5+1962.5	5+5	23.25	22.92	26.10
1982.5+1987.5	5+5	23.55	23.71	26.64
1932.5+1945.0	5+20	20.56	21.06	23.83
1950.0+1962.5	5+20	23.02	22.45	25.75
1967.5+1980.0	5+20	22.67	22.54	25.62
1940.0+1960.0	20+20	21.35	20.86	24.12
1950.0+1970.0	20+20	21.61	20.93	24.29
1960.0+1980.0	20+20	22.74	22.64	25.70

Frequency (MHz)	Channel Bandwidth (MHz)	Ant 0 Power (dBm)	Ant 1 Power (dBm)	Total Power (dBm)
64QAM				
1932.5+1937.5	5+5	21.70	21.24	24.49
1957.5+1962.5	5+5	23.37	23.10	26.25
1982.5+1987.5	5+5	23.55	23.79	26.68
1932.5+1945.0	5+20	20.72	21.02	23.88
1950.0+1962.5	5+20	23.06	22.56	25.83
1967.5+1980.0	5+20	22.72	22.68	25.71
1940.0+1960.0	20+20	21.32	20.95	24.15
1950.0+1970.0	20+20	21.58	21.01	24.31
1960.0+1980.0	20+20	22.80	22.67	25.75
256QAM				
1932.5+1937.5	5+5	21.74	21.15	24.47
1957.5+1962.5	5+5	23.37	23.00	26.20
1982.5+1987.5	5+5	23.52	23.71	26.63
1932.5+1945.0	5+20	20.62	20.89	23.77
1950.0+1962.5	5+20	23.10	22.58	25.86
1967.5+1980.0	5+20	22.65	22.67	25.67
1940.0+1960.0	20+20	21.35	20.90	24.14
1950.0+1970.0	20+20	21.55	20.93	24.26
1960.0+1980.0	20+20	22.81	22.62	25.73

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2021/02/01 ~ 2021/04/06
Test Configuration	Band 2 Concurrent Mode - LTE + NR		

Frequency (MHz)	Channel Bandwidth (MHz)	Reading Level (dBm)	Factor (dB)	EIRP (dBm)	Limit (dBm)
QPSK					
1932.5+1937.5	5+5	26.71	4.90	31.61	< 62.15
1957.5+1962.5	5+5	26.28	4.80	31.08	< 62.15
1982.5+1987.5	5+5	26.87	5.73	32.60	< 62.15
1940.0+1952.5	20+5	26.92	4.72	31.64	< 62.15
1957.5+1970.0	20+5	26.77	4.80	31.57	< 62.15
1975.0+1987.5	20+5	26.83	5.45	32.28	< 62.15
1940.0+1960.0	20+20	26.98	4.55	31.53	< 62.15
1950.0+1970.0	20+20	26.89	4.80	31.69	< 62.15
1960.0+1980.0	20+20	26.98	5.17	32.15	< 62.15
16QAM					
1932.5+1937.5	5+5	25.72	4.90	30.62	< 62.15
1957.5+1962.5	5+5	26.98	4.80	31.78	< 62.15
1982.5+1987.5	5+5	25.38	5.73	31.11	< 62.15
1940.0+1952.5	20+5	25.94	4.72	30.66	< 62.15
1957.5+1970.0	20+5	25.86	4.80	30.66	< 62.15
1975.0+1987.5	20+5	26.72	5.45	32.17	< 62.15
1940.0+1960.0	20+20	26.09	4.55	30.64	< 62.15
1950.0+1970.0	20+20	25.89	4.80	30.69	< 62.15
1960.0+1980.0	20+20	27.21	5.17	32.38	< 62.15

Frequency (MHz)	Channel Bandwidth (MHz)	Reading Level (dBm)	Factor (dB)	EIRP (dBm)	Limit (dBm)
64QAM					
1932.5+1937.5	5+5	25.60	4.90	30.50	< 62.15
1957.5+1962.5	5+5	26.69	4.80	31.49	< 62.15
1982.5+1987.5	5+5	26.09	5.73	31.82	< 62.15
1940.0+1952.5	20+5	25.92	4.72	30.64	< 62.15
1957.5+1970.0	20+5	25.78	4.80	30.58	< 62.15
1975.0+1987.5	20+5	26.19	5.45	31.64	< 62.15
1940.0+1960.0	20+20	25.97	4.55	30.52	< 62.15
1950.0+1970.0	20+20	25.74	4.80	30.54	< 62.15
1960.0+1980.0	20+20	26.66	5.17	31.83	< 62.15
256QAM					
1932.5+1937.5	5+5	25.78	4.90	30.68	< 62.15
1957.5+1962.5	5+5	26.89	4.80	31.69	< 62.15
1982.5+1987.5	5+5	25.65	5.73	31.38	< 62.15
1940.0+1952.5	20+5	25.95	4.72	30.67	< 62.15
1957.5+1970.0	20+5	25.87	4.80	30.67	< 62.15
1975.0+1987.5	20+5	26.39	5.45	31.84	< 62.15
1940.0+1960.0	20+20	25.97	4.55	30.52	< 62.15
1950.0+1970.0	20+20	25.86	4.80	30.66	< 62.15
1960.0+1980.0	20+20	26.03	5.17	31.20	< 62.15

Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2021/02/01 ~ 2021/04/06
Test Configuration	Band 2 Concurrent Mode - NR + LTE		

Frequency (MHz)	Channel Bandwidth (MHz)	Reading Level (dBm)	Factor (dB)	EIRP (dBm)	Limit (dBm)
QPSK					
1932.5+1937.5	5+5	26.76	4.90	31.66	< 62.15
1957.5+1962.5	5+5	27.47	4.80	32.27	< 62.15
1982.5+1987.5	5+5	26.21	5.73	31.94	< 62.15
1932.5+1945.0	5+20	26.85	4.72	31.57	< 62.15
1950.0+1962.5	5+20	26.25	4.80	31.05	< 62.15
1967.5+1980.0	5+20	26.77	5.45	32.22	< 62.15
1940.0+1960.0	20+20	27.11	4.55	31.66	< 62.15
1950.0+1970.0	20+20	26.83	4.80	31.63	< 62.15
1960.0+1980.0	20+20	26.66	5.17	31.83	< 62.15
16QAM					
1932.5+1937.5	5+5	25.70	4.90	30.60	< 62.15
1957.5+1962.5	5+5	26.70	4.80	31.50	< 62.15
1982.5+1987.5	5+5	26.49	5.73	32.22	< 62.15
1932.5+1945.0	5+20	25.87	4.72	30.59	< 62.15
1950.0+1962.5	5+20	26.75	4.80	31.55	< 62.15
1967.5+1980.0	5+20	26.81	5.45	32.26	< 62.15
1940.0+1960.0	20+20	26.06	4.55	30.61	< 62.15
1950.0+1970.0	20+20	25.88	4.80	30.68	< 62.15
1960.0+1980.0	20+20	27.06	5.17	32.23	< 62.15

Frequency (MHz)	Channel Bandwidth (MHz)	Reading Level (dBm)	Factor (dB)	EIRP (dBm)	Limit (dBm)
64QAM					
1932.5+1937.5	5+5	25.65	4.90	30.55	< 62.15
1957.5+1962.5	5+5	26.25	4.80	31.05	< 62.15
1982.5+1987.5	5+5	25.55	5.73	31.28	< 62.15
1932.5+1945.0	5+20	25.88	4.72	30.60	< 62.15
1950.0+1962.5	5+20	27.01	4.80	31.81	< 62.15
1967.5+1980.0	5+20	26.12	5.45	31.57	< 62.15
1940.0+1960.0	20+20	26.10	4.55	30.65	< 62.15
1950.0+1970.0	20+20	25.78	4.80	30.58	< 62.15
1960.0+1980.0	20+20	26.07	5.17	31.24	< 62.15
256QAM					
1932.5+1937.5	5+5	25.73	4.90	30.63	< 62.15
1957.5+1962.5	5+5	26.45	4.80	31.25	< 62.15
1982.5+1987.5	5+5	25.60	5.73	31.33	< 62.15
1932.5+1945.0	5+20	25.85	4.72	30.57	< 62.15
1950.0+1962.5	5+20	26.41	4.80	31.21	< 62.15
1967.5+1980.0	5+20	25.93	5.45	31.38	< 62.15
1940.0+1960.0	20+20	26.04	4.55	30.59	< 62.15
1950.0+1970.0	20+20	25.79	4.80	30.59	< 62.15
1960.0+1980.0	20+20	26.17	5.17	31.34	< 62.15

5.3. Emission Bandwidth

5.3.1. Test Limit

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.3.2. Test Procedure

KDB 971168 D01v03r01 - Section 4.1 & 4.2


ANSI C63.26-2015 - Section 5.4.3 & 5.4.4

5.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency;
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW;
3. VBW $\geq 3 \times$ RBW;
4. Detector = Peak;
5. Trace mode = max hold;
6. Sweep = auto couple;
7. Allow the trace to stabilize;
8. The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 26 dB below the reference level

5.3.4. Test Setup

Spectrum Analyzer

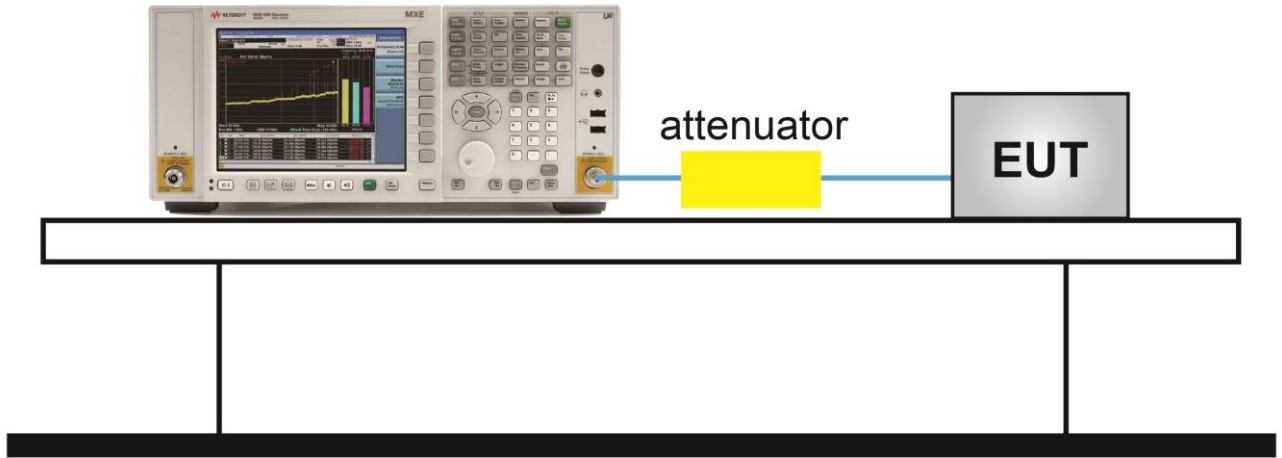

5.3.5. Test Result


Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2021/02/01 ~ 2021/04/06
Test Configuration	Band 2 Concurrent Mode - LTE + NR		

Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK		
1932.5+1937.5	5+5	9.46
1957.5+1962.5	5+5	9.47
1982.5+1987.5	5+5	9.45
1940.0+1952.5	20+5	23.68
1957.5+1970.0	20+5	23.68
1975.0+1987.5	20+5	23.71
1940.0+1960.0	20+20	38.28
1950.0+1970.0	20+20	38.30
1960.0+1980.0	20+20	38.18
16QAM		
1932.5+1937.5	5+5	9.46
1957.5+1962.5	5+5	9.46
1982.5+1987.5	5+5	9.45
1940.0+1952.5	20+5	23.69
1957.5+1970.0	20+5	23.66
1975.0+1987.5	20+5	23.66
1940.0+1960.0	20+20	38.30
1950.0+1970.0	20+20	38.29
1960.0+1980.0	20+20	38.22


64QAM		
1932.5+1937.5	5+5	9.43
1957.5+1962.5	5+5	9.44
1982.5+1987.5	5+5	9.45
1940.0+1952.5	20+5	23.56
1957.5+1970.0	20+5	23.59
1975.0+1987.5	20+5	23.62
1940.0+1960.0	20+20	38.22
1950.0+1970.0	20+20	38.23
1960.0+1980.0	20+20	38.14
256QAM		
1932.5+1937.5	5+5	9.44
1957.5+1962.5	5+5	9.45
1982.5+1987.5	5+5	9.46
1940.0+1952.5	20+5	23.53
1957.5+1970.0	20+5	23.66
1975.0+1987.5	20+5	23.63
1940.0+1960.0	20+20	38.21
1950.0+1970.0	20+20	38.39
1960.0+1980.0	20+20	38.14

5+5MHz Channel Bandwidth - QPSK


1932.5+1937.5 MHz

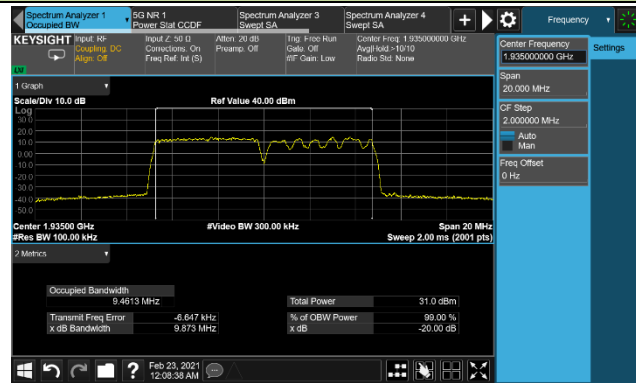

1957.5+1962.5 MHz

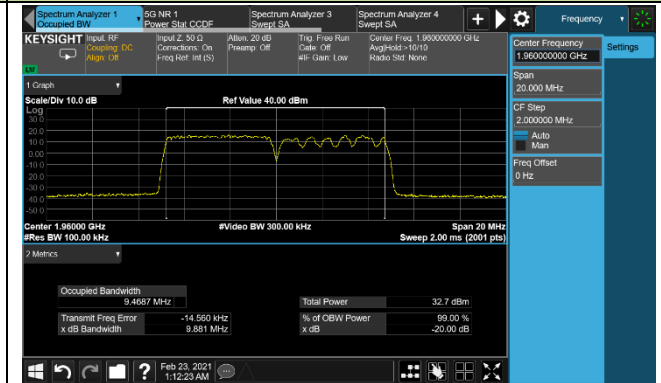


1982.5+1987.5 MHz

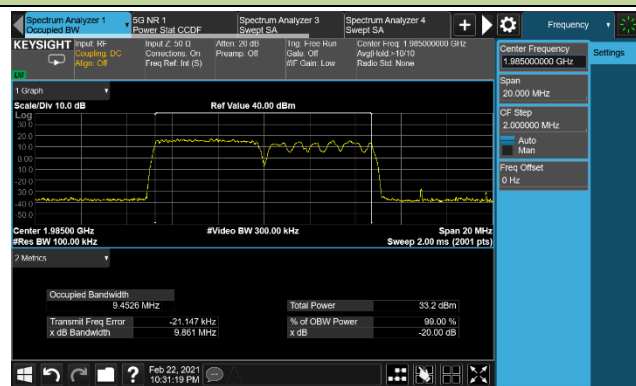


20+5MHz Channel Bandwidth - QPSK


1940.0+1952.5 MHz

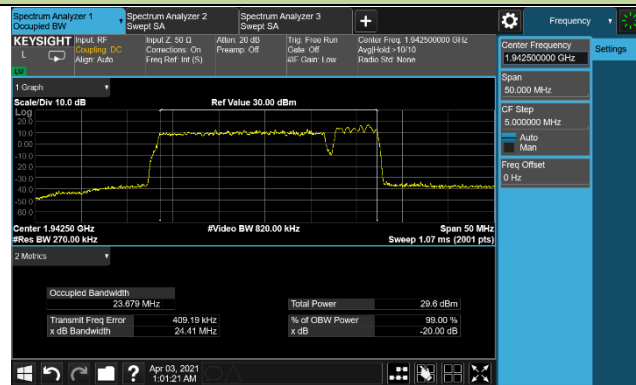

1957.5+1970.0 MHz

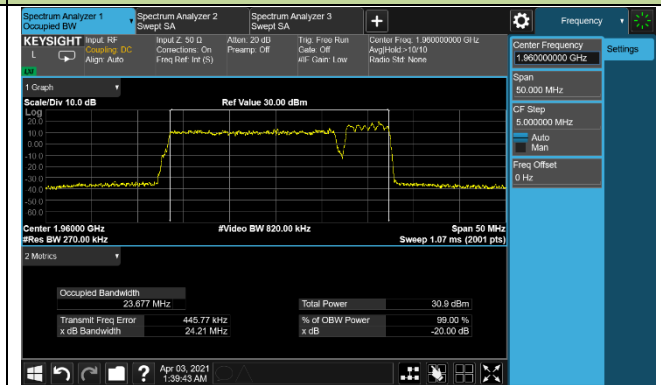


1975.0+1987.5 MHz

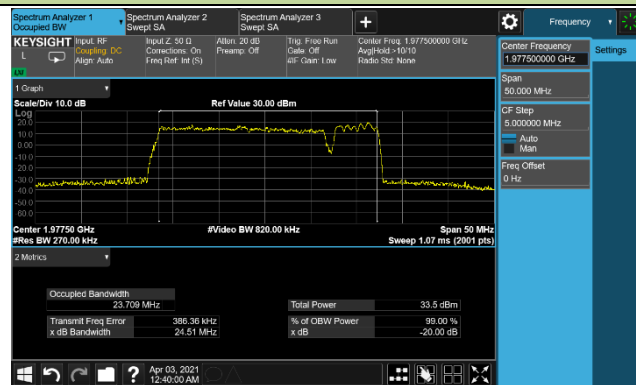


20+20MHz Channel Bandwidth - QPSK



1940.0+1960.0 MHz

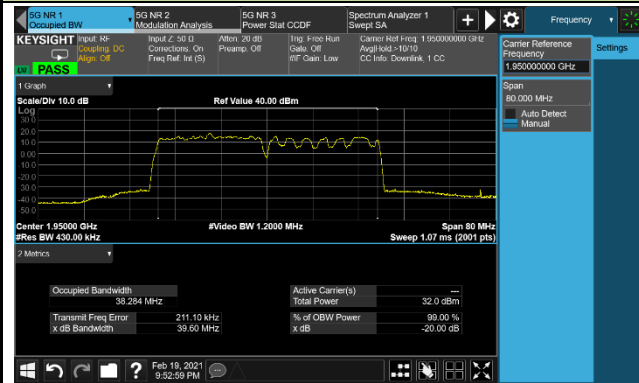

1950.0+1970.0 MHz

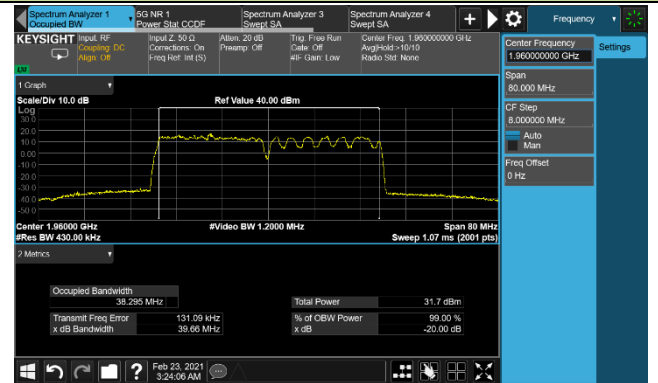


1960.0+1980.0 MHz

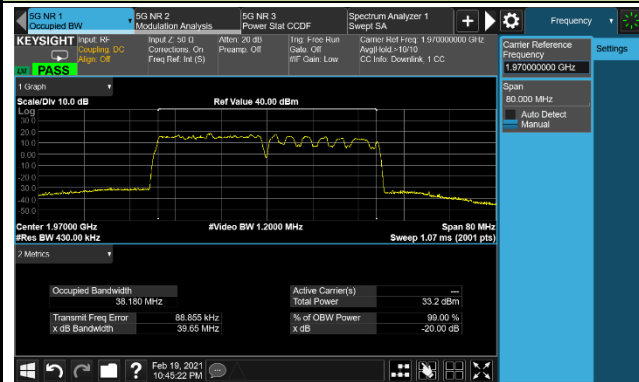


5+5MHz Channel Bandwidth - 16QAM


1932.5+1937.5 MHz

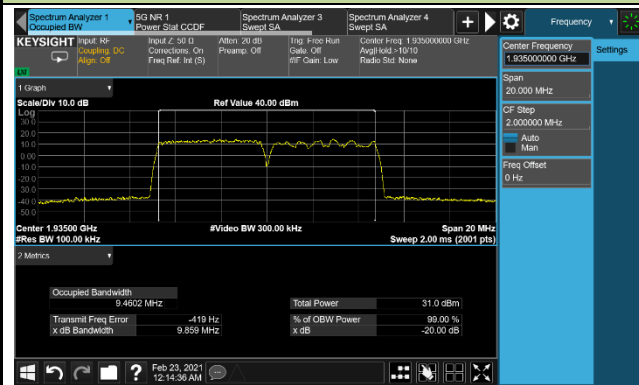

1957.5+1962.5 MHz

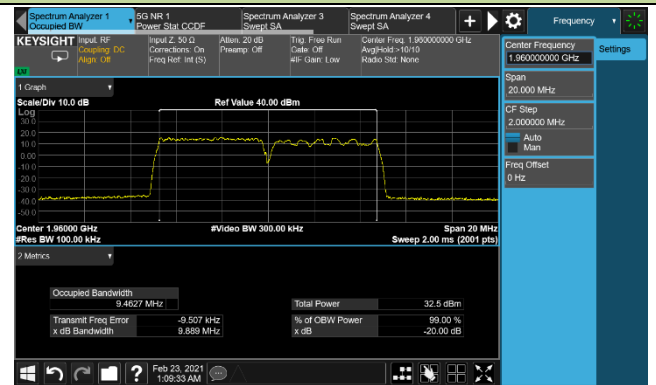


1982.5+1987.5 MHz

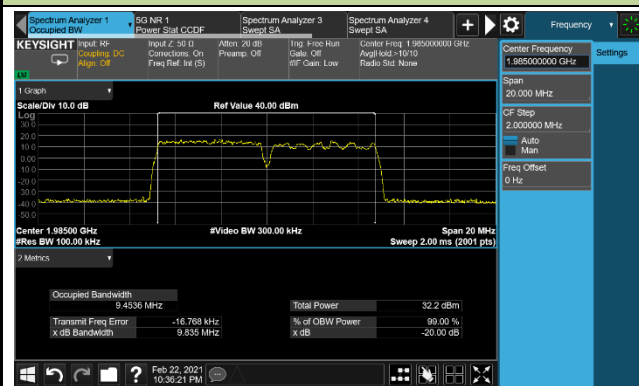


20+5 MHz Channel Bandwidth - 16QAM


1940.0+1952.5 MHz

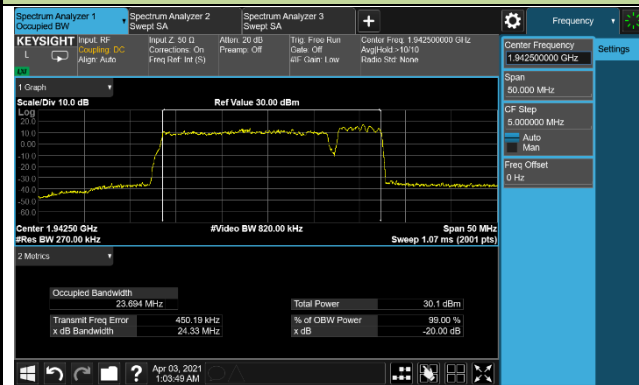


1957.5+1970.0 MHz

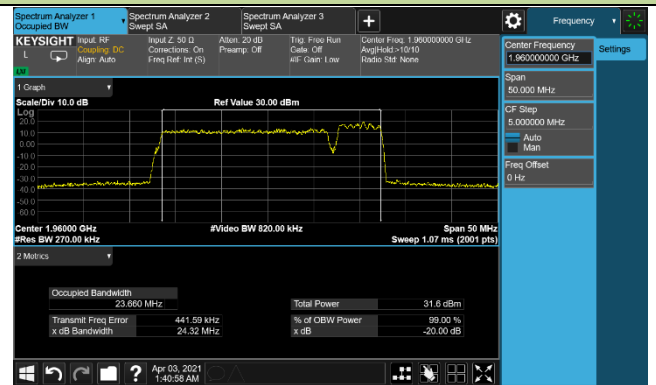


1975.0+1987.5 MHz

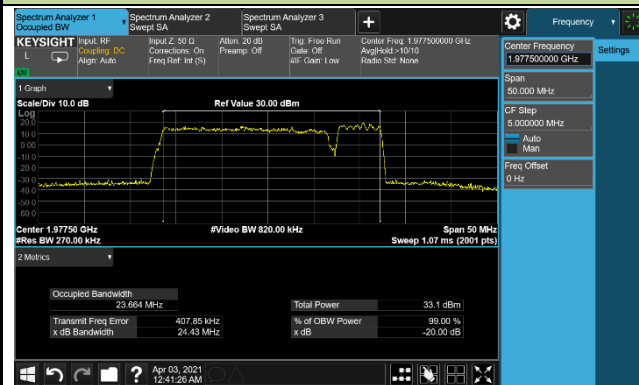

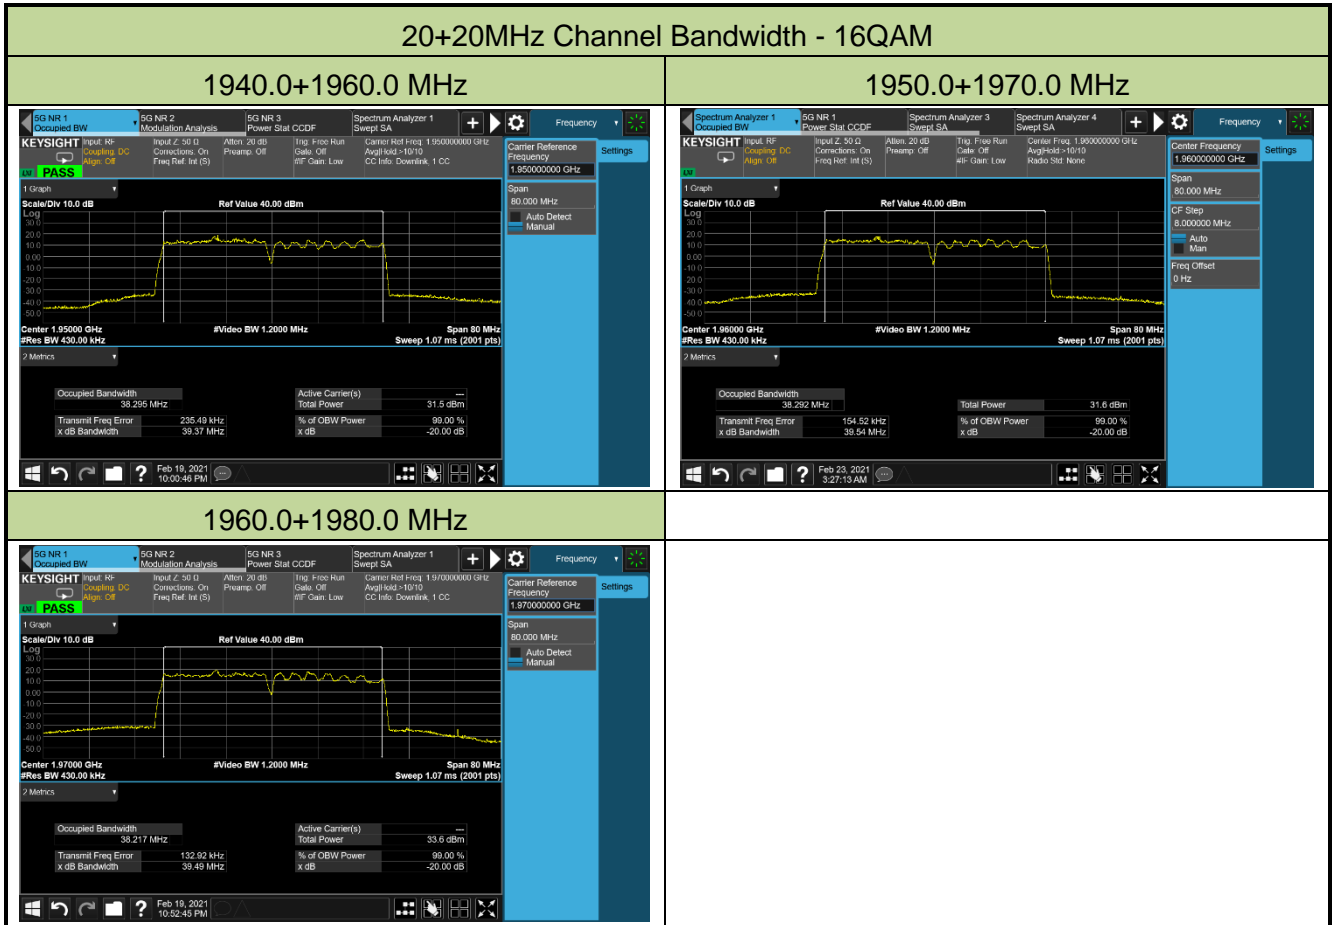


5+5MHz Channel Bandwidth -64QAM


1932.5+1937.5 MHz

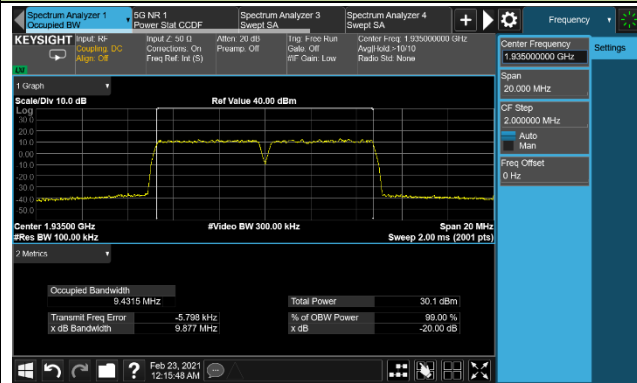

1957.5+1962.5 MHz

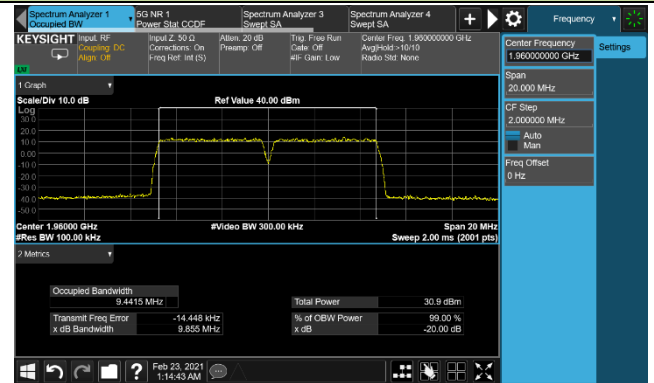


1982.5+1987.5 MHz

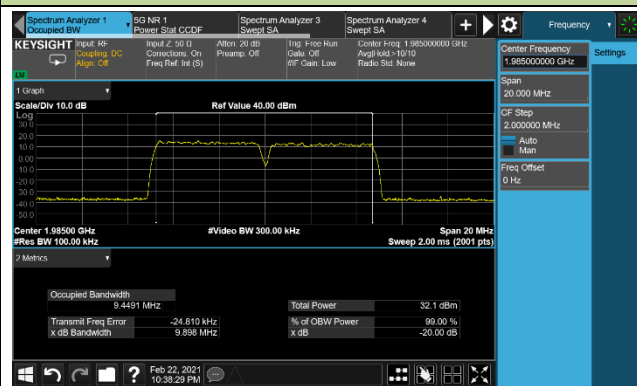


20+5 MHz Channel Bandwidth - 64QAM


1940.0+1952.5 MHz

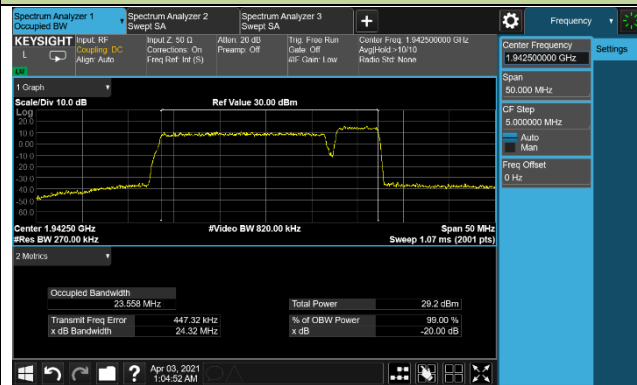

1957.5+1970.0 MHz

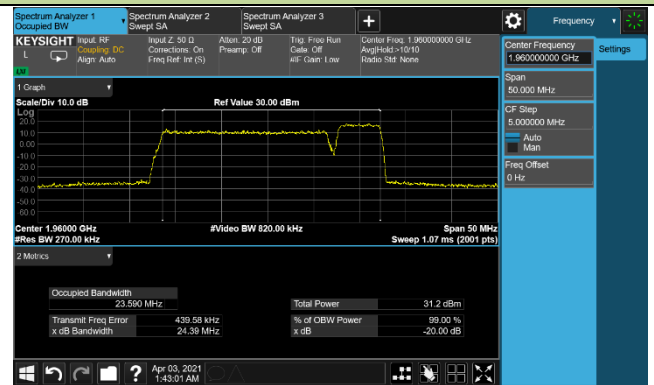


1975.0+1987.5 MHz

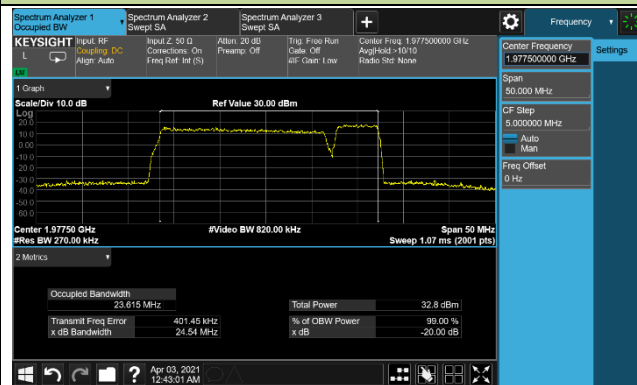

20+20MHz Channel Bandwidth - 64QAM


1940.0+1960.0 MHz

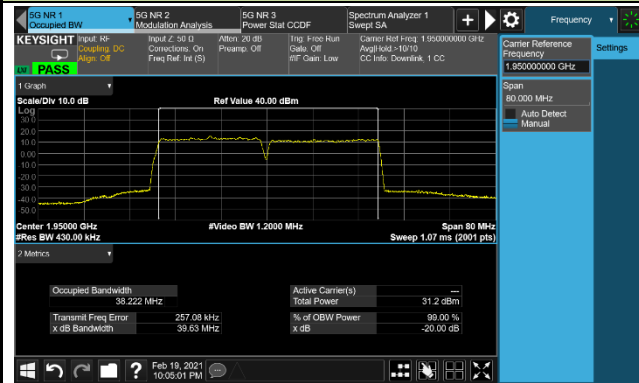

1950.0+1970.0 MHz




1960.0+1980.0 MHz

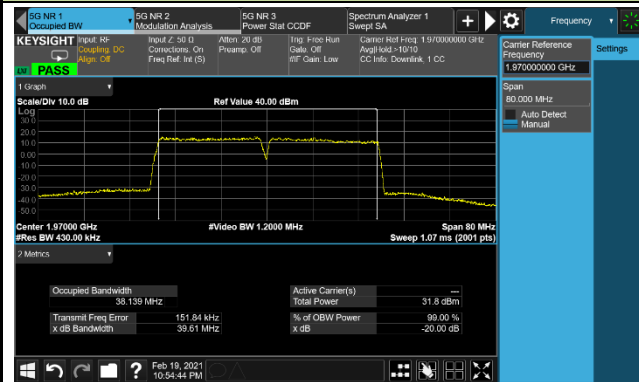


5+5MHz Channel Bandwidth - 256QAM


1932.5+1937.5 MHz

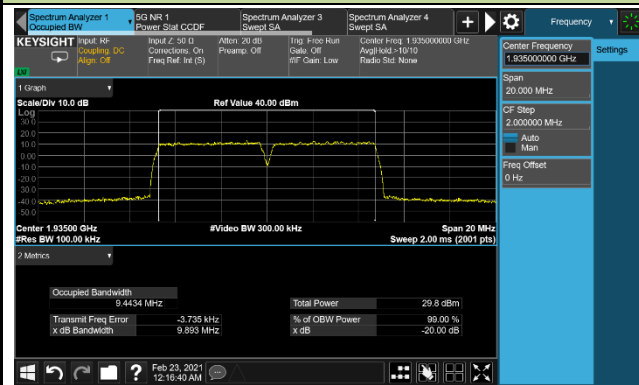

1957.5+1962.5 MHz

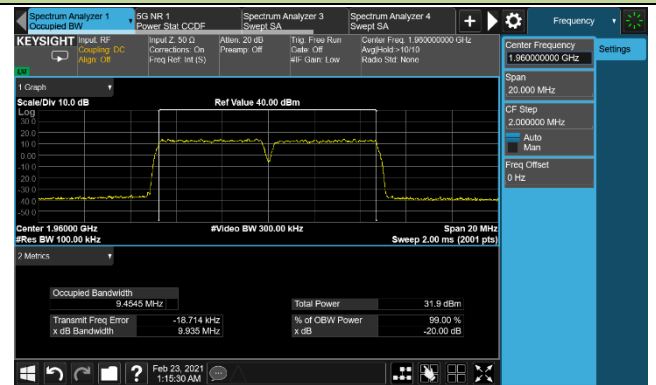


1982.5+1987.5 MHz

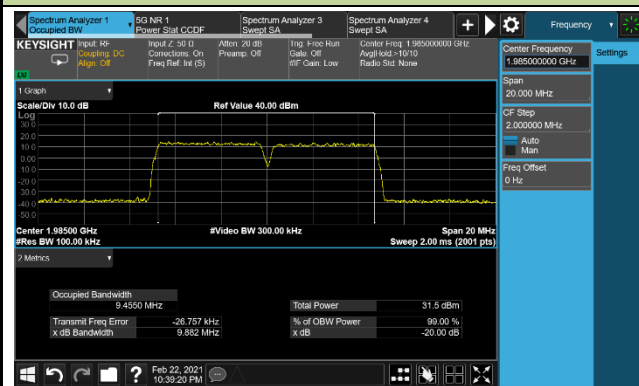


20+5MHz Channel Bandwidth - 256QAM


1940.0+1952.5 MHz

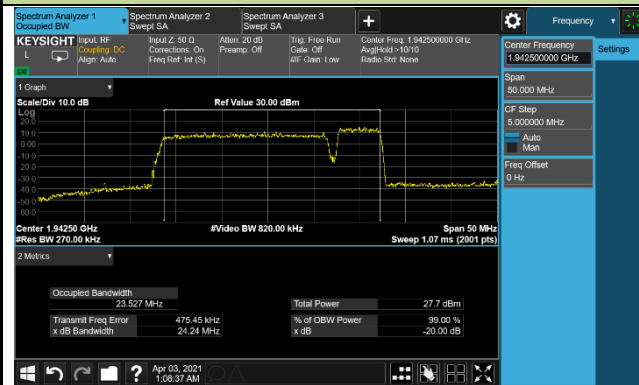

1957.5+1970.0 MHz

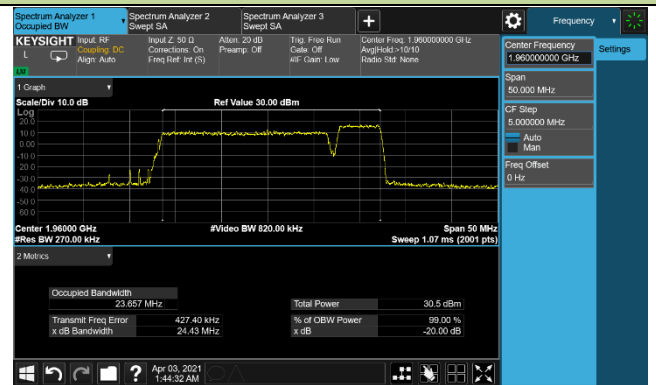


1975.0+1987.5 MHz

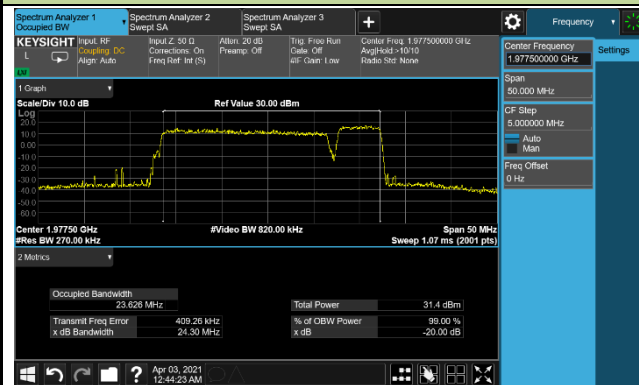


20+20MHz Channel Bandwidth - 256QAM


1940.0+1960.0 MHz

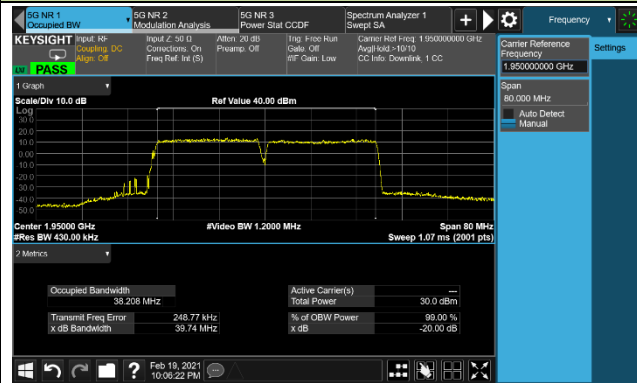

1950.0+1970.0 MHz

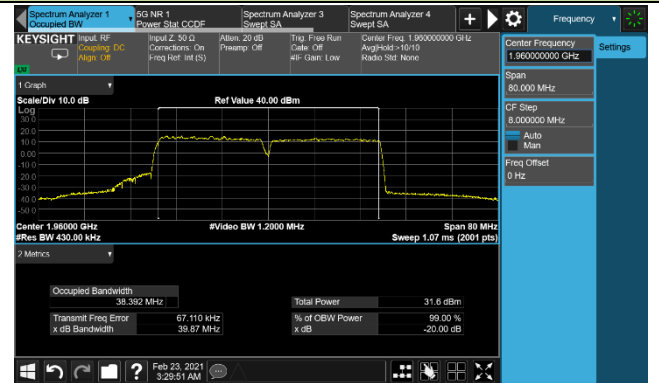

1960.0+1980.0 MHz

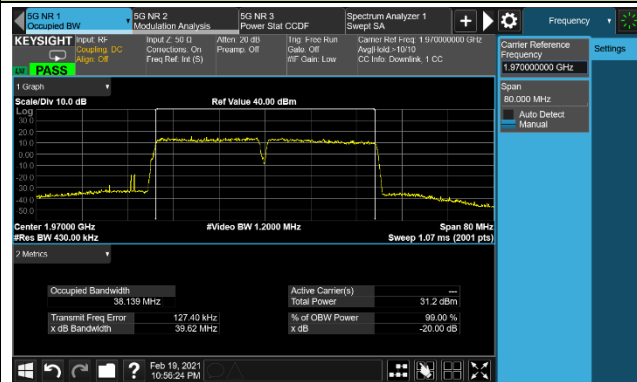


Product	AirScale Indoor Radio ASiR-pRRH	Test Engineer	Peter Xu
Test Site	SR2	Test Date	2021/02/01 ~ 2021/04/06
Test Configuration	Band 2 Concurrent Mode - NR + LTE		

Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK		
1932.5+1937.5	5+5	9.43
1957.5+1962.5	5+5	9.45
1982.5+1987.5	5+5	9.48
1932.5+1945.0	5+20	23.65
1950.0+1962.5	5+20	23.70
1967.5+1980.0	5+20	23.58
1940.0+1960.0	20+20	38.26
1950.0+1970.0	20+20	38.29
1960.0+1980.0	20+20	38.20
16QAM		
1932.5+1937.5	5+5	9.41
1957.5+1962.5	5+5	9.42
1982.5+1987.5	5+5	9.44
1932.5+1945.0	5+20	23.63
1950.0+1962.5	5+20	23.69
1967.5+1980.0	5+20	23.54
1940.0+1960.0	20+20	38.23
1950.0+1970.0	20+20	38.24
1960.0+1980.0	20+20	38.21


64QAM		
1932.5+1937.5	5+5	9.45
1957.5+1962.5	5+5	9.45
1982.5+1987.5	5+5	9.46
1932.5+1945.0	5+20	23.61
1950.0+1962.5	5+20	23.65
1967.5+1980.0	5+20	23.55
1940.0+1960.0	20+20	38.19
1950.0+1970.0	20+20	38.22
1960.0+1980.0	20+20	38.16
256QAM		
1932.5+1937.5	5+5	9.45
1957.5+1962.5	5+5	9.46
1982.5+1987.5	5+5	9.46
1932.5+1945.0	5+20	23.51
1950.0+1962.5	5+20	23.61
1967.5+1980.0	5+20	23.50
1940.0+1960.0	20+20	38.21
1950.0+1970.0	20+20	38.22
1960.0+1980.0	20+20	38.19

5+5MHz Channel Bandwidth - QPSK


1932.5+1937.5 MHz

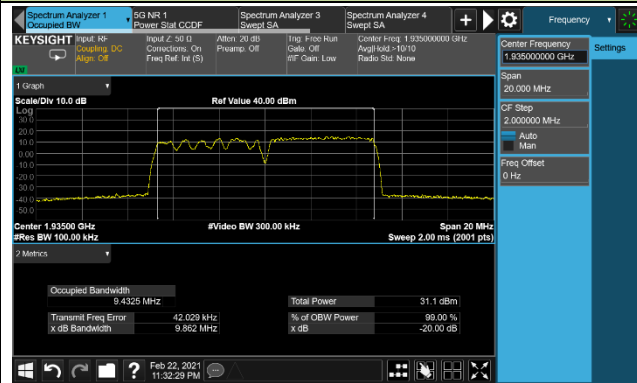

1957.5+1962.5 MHz

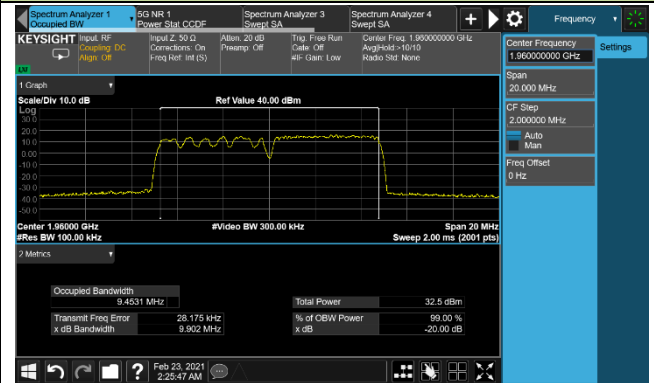


1982.5+1987.5 MHz

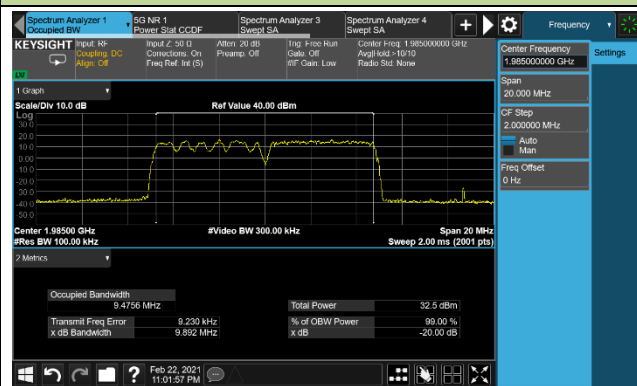


5 + 20 MHz Channel Bandwidth - QPSK


1932.5+1945.0 MHz

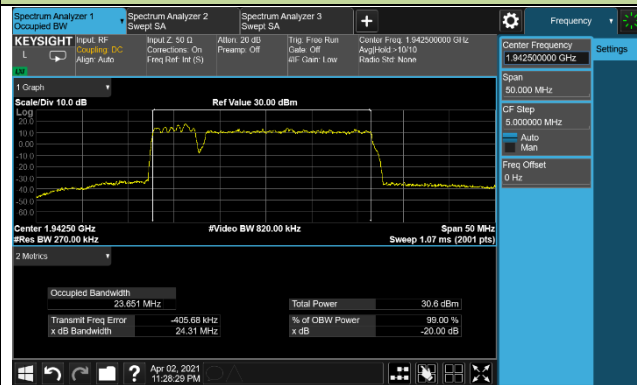

1950.0+1962.5 MHz

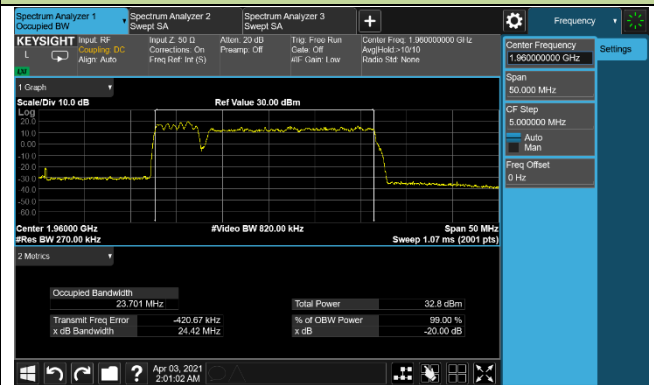


1967.5+1980.0 MHz

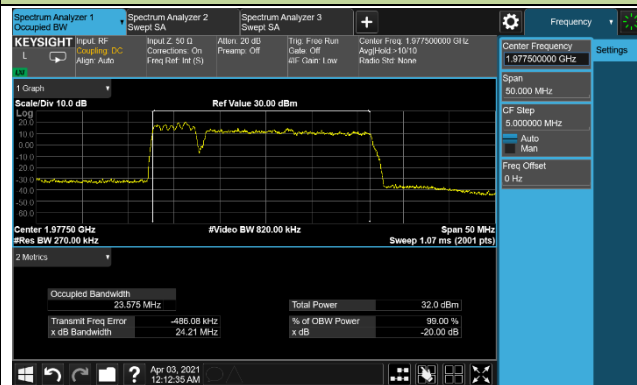


20+20MHz Channel Bandwidth - QPSK



1940.0+1960.0 MHz

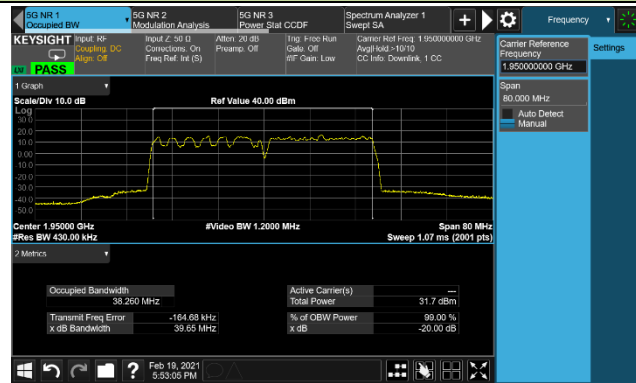

1950.0+1970.0 MHz

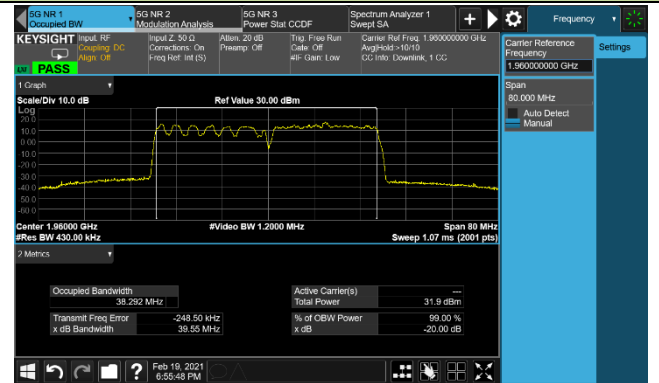


1960.0+1980.0 MHz

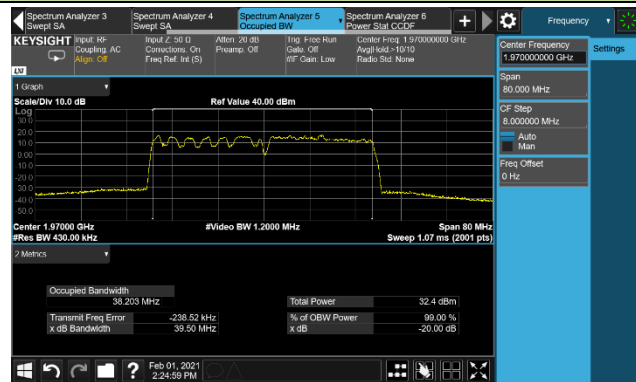


5+5MHz Channel Bandwidth -16QAM


1932.5+1937.5 MHz

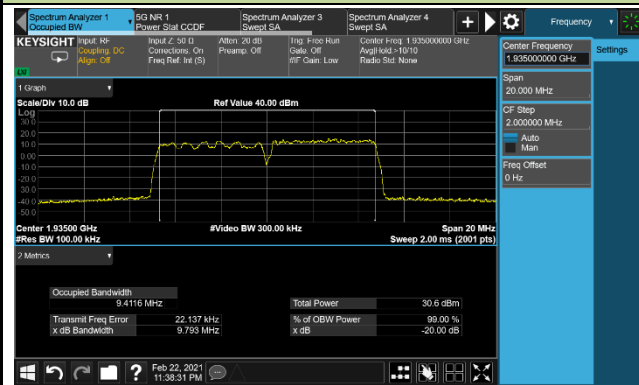

1957.5+1962.5 MHz

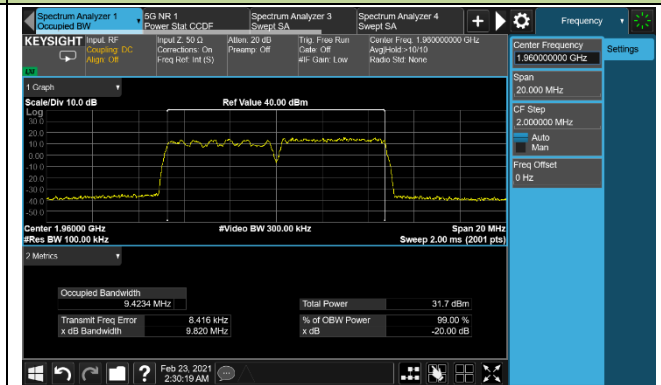


1982.5+1987.5 MHz

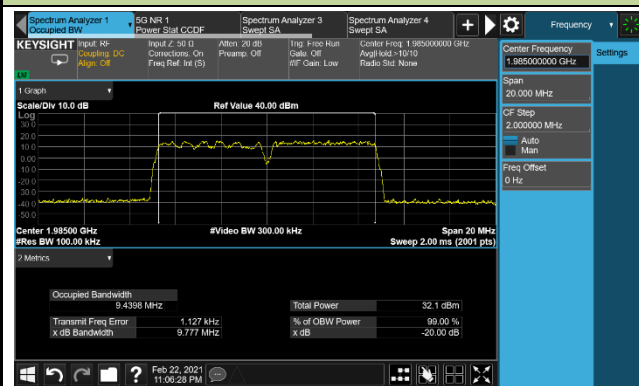


5+20MHz Channel Bandwidth -16QAM

1932.5+1945.0 MHz

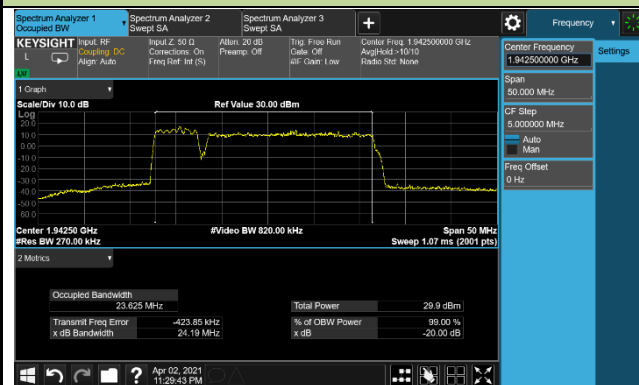

1950.0+1962.5 MHz

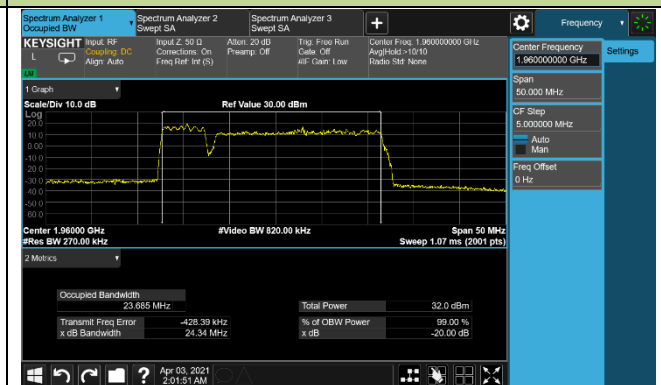

1967.5+1980.0 MHz

