



## RF Exposure Evaluation Declaration

---

**FCC ID:** 2AD8UFZCW12A1

**APPLICANT:** Nokia Solutions and Networks

**Application Type:** Verification

**Product:** Wireless Smart Access Point

**Model No.:** W12A-AC200i

**Trademark:** Nokia

**FCC Classification:** Digital Transmission System (DTS)  
Unlicensed National Information Infrastructure (UNII)

Reviewed By : Robin Wu  
( Robin Wu )

Approved By : Marlin Chen  
( Marlin Chen )



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standards through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date
1506RSU00618	Rev. 01	Initial report	11-10-2015


## 1. PRODUCT INFORMATION

### 1.1. Equipment Description

Product Name	Wireless Access Point
Model No.	WI2A-AC200i
Brand Name	Nokia
Hardware Version	v2.0
Wi-Fi Specification	802.11a/b/g/n/ac
Frequency Range	<p><b><u>2.4GHz:</u></b>            For 802.11b/g/n-HT20:            2412 ~ 2462 MHz            For 802.11n-HT40:            2422 ~ 2452 MHz</p> <p><b><u>5GHz:</u></b>            For 802.11a/n-HT20:            5180~5320MHz, 5500~5700MHz, 5745~5825MHz            For 802.11ac-VHT20:            5180~5320MHz, 5500~5720MHz, 5745~5825MHz            For 802.11n-HT40:            5190~5310MHz, 5510~5670MHz, 5755~5795MHz            For 802.11ac-VHT40:            5190~5310MHz, 5510~5710MHz, 5755~5795MHz            For 802.11ac-VHT80:            5210MHz, 5290MHz, 5530MHz, 5610MHz, 5690MHz, 5775MHz</p>
Type of Modulation	802.11b: DSSS 802.11g/a/n/ac: OFDM
Maximum Average Output Power	<p><b><u>For 2.4GHz Band:</u></b>            802.11b: 26.36dBm            802.11g: 25.49dBm            802.11n-HT20: 25.39dBm            802.11n-HT40: 25.46dBm</p> <p><b><u>For 5GHz Band:</u></b>            802.11a: 26.29dBm            802.11n-HT20: 26.09dBm            802.11n-HT40: 25.98dBm            802.11ac-VHT20: 26.18dBm            802.11ac-VHT40: 26.00dBm            802.11ac-VHT80: 21.78dBm</p>

The change of the measured voltage at the radio part of the EUT is below  $\pm 1\%$ , when input voltage from external power supply (AC Adapter & POE Adapter) to the equipment under test, thus the RF test is tested with AC Adapter only.

AC Adapter Voltage	3.30V
POE Adapter Voltage	3.31V

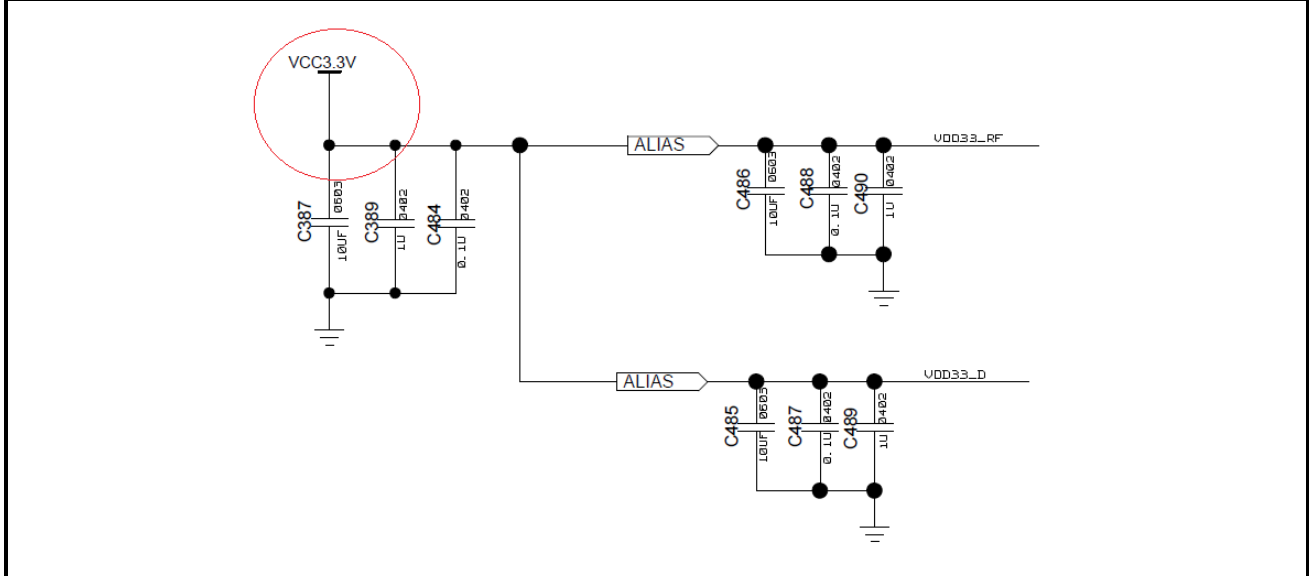

## 1.2. Antenna Description

Antenna Type	Frequency Band (MHz)	Tx Paths	Per Chain Max Antenna Gain (dBi)		Beam Forming Directional Gain (dBi)	CDD Directional Gain (dBi)
			Ant 1	Ant 2		
PCB Antenna	2412 ~2462	2	3.23	2.38	5.83	5.83
	5150 ~ 5250	2	5.40	4.53	7.99	7.99
	5250 ~ 5350	2	5.50	4.81	8.17	8.17
	5470 ~ 5725	2	5.89	5.97	8.94	8.94
	5725 ~ 5850	2	6.00	5.86	8.94	8.94

1. The EUT supports Cyclic Delay Diversity (CDD) technology for 802.11a/b/g mode, and CDD signals are correlated.
2. The EUT supports Beam Forming technology for 802.11n/ac mode, and exclude 802.11b/g mode.

Correlated signals include, but are not limited to, signals transmitted in any of the following modes:

- Unequal Antenna gains, with equal transmit powers. For Antenna gains given by  $G_1, G_2, \dots, G_N$  dBi transmit signals are correlated, then
- Directional gain =  $10 \cdot \log\left[\frac{(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2}{N_{ANT}}\right]$  dBi [Note the “20”s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

For example: 5250 ~ 5350MHz Directional Gain =  $10 \cdot \log\left[\frac{(10^{5.50/20} + 10^{4.81/20})^2}{2}\right] = 8.17$  dBi

## 2. RF Exposure Evaluation

### 2.1. Limits

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

#### LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (Minutes)
(A) Limits for Occupational/ Control Exposures				
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6
(B) Limits for General Population/ Uncontrolled Exposures				
300-1500	--	--	f/1500	6
1500-100,000	--	--	1	30

f= Frequency in MHz

Calculation Formula:  $P_d = (P_{out} * G) / (4 * \pi * r^2)$

Where

$P_d$  = power density in mW/cm<sup>2</sup>

$P_{out}$  = output power to antenna in mW

G = gain of antenna in linear scale

$\pi$  = 3.1416

r = distance between observation point and center of the radiator in cm

$P_d$  is the limit of MPE, 1mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance r where the MPE limit is reached.

## 2.2. Test Result of RF Exposure Evaluation

Product	Wireless Access Point
Test Item	RF Exposure Evaluation

Antenna Gain: The maximum Gain measured in fully anechoic chamber is 5.83dBi for 2.4GHz, 7.99dBi for 5.2GHz, 8.17dBi for 5.3GHz, 8.94dBi for 5.6GHz and 8.94dBi for 5.80GHz in logarithm scale.

### For 2.4GHz ISM Band:

Test Mode	Frequency Band (MHz)	Maximum Average Output Power (dBm)	Power Density at R = 20 cm (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )
802.11b/g/n-HT20/ n-HT40	2412 ~ 2462	26.36	0.3294	1

### For 5GHz UNII Band:

Test Mode	Frequency Band (MHz)	Maximum Average Output Power (dBm)	Power Density at R = 20 cm (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )
802.11a/n-HT20/ n-H40/ac-VHT20 ac-VHT40/ac-VHT80	5180 ~ 5240	26.29	0.5330	1
	5260 ~ 5320	21.63	0.1900	1
	5500 ~ 5700	20.96	0.1944	1
	5725 ~ 5825	26.22	0.6527	1

**CONCLUSION:**

Both of the WLAN 2.4GHz Band and WLAN 5GHz Band can transmit simultaneously. Therefore, the Max Power Density at R (20 cm) =  $0.3294\text{mW}/\text{cm}^2 + 0.6527\text{mW}/\text{cm}^2 = 0.9821\text{mW}/\text{cm}^2 < 1\text{mW}/\text{cm}^2$ .

So the EUT complies with the requirement.

---

The End