

# Testing Report

Customer Name: Linghangda Technology Co., Ltd.


Product Name: PCB Antenna

Sample Model: 154217

Reference Standard: *GB/T 9410-2008; ANSI/IEEE Std149-1979*

Issue Date: 2023.5.17

Engineer: Zkmis	Date: 2023.5.17
Auditor: Eason	Date: 2023.5.17
Approver: Janson	Date: 2023.5.17

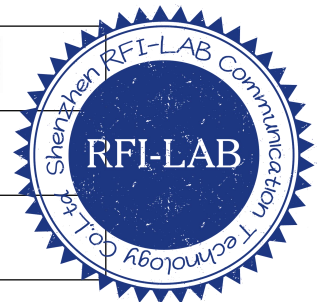

### Version

Version No.	Date	Description	Formulate	Approval
A0	2023.5.17	For the first time, formulate	Zkris	Eason

### Contents

1.General Information .....3

    1.1 General information of testing institutions .....3

    1.2 Testing principle ..... 3

    1.3 Test equipment .....4

    1.4 Test environment .....4

    1.5 Statement ..... 4

2.Sample Information ..... 5

    2.1 Client information .....5

    2.2 Description of EUT(S) .....5

    2.3 EUT appearance .....6

    2.4 EUT setup photo of free space OTA testing .....6

3. Test Results ..... 7

    3.1 Test standard ..... 7

    3.2 Test uncertainty .....7

    3.3 Test data ..... 8

        3.3.1 VSWR parameters ..... 8

        3.3.2 VSWR data ..... 8

        3.3.3 Typical free space efficiency and gain ..... 8

        3.3.4 Typical free space radiation pattern .....9


    (The following is blank) ..... 10

# 1. General Information

## 1.1 General information of testing institutions

<b>Name</b>	Shenzhen RFI-LAB Communication Technology Co., Ltd.
<b>Address</b>	10/F A, Lingyun Bld, Liufang Rd, Baoan District, SZ
<b>Tel</b>	13682621346
<b>E-mail</b>	rfi-lab@tech-now.com
<b>Equipment</b>	All the equipment used in the report is fixed in Zone B, West Side of 1/F, Building 1, Tingwei Industrial Park, No.6 Liufang Road, Bao 'an District, Shenzhen

## 1.2 Testing principle

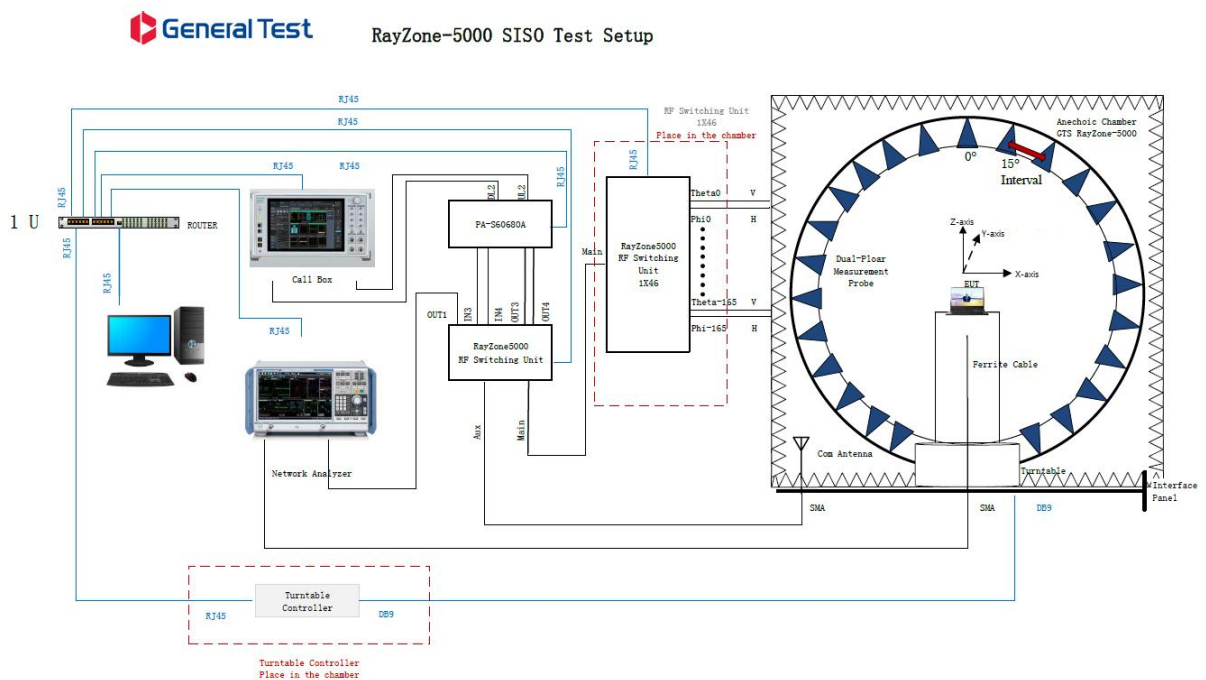

### 1.3 Test equipment

Equipment	Model No.	Serial No.	Manufacturer	Calibration date	Next calibration date
OTA Test System	RayZone-5000	RFI-LAB-RF-D00	GTS	2023.3.14	2025.3.13
Network Analyzer	E5071C	RFI-LAB-RF-D01	KEYSIGHT	2023.5.12	2024.5.11
Network Analyzer	E5071C	RFI-LAB-RF-C02	KEYSIGHT	2023.5.12	2024.5.11

### 1.4 Test environment

Temperature	24.1°C
Humidity	59%RH
Pressure	100.14kPa

### 1.5 Statement

- (1) The test results in the report are only applicable to the tested samples and the tested samples work under the environment described in the report.
- (2) Only Shenzhen RFI-LAB Communication Technology Co., Ltd. have the right to modify the report, and the modification information shall be annotated in the revision form.
- (3) Any objection to this report shall be raised within 30 days after formal confirmation of the report.
- (4) This report is invalid if there is any evidence that the sample information provided is falsified.
- (5) The report is invalid without the signature of the auditor and approver.

## 2. Sample Information


### 2.1 Client information

<b>Name</b>	Linghangda Technology Co., Ltd.
<b>Address</b>	Room 603, Block B, Zihui Creative, No. 2005, Xihuan Road, Shajing Street, Bao 'an District, Shenzhen
<b>Contacts</b>	Yanhu Gong
<b>Tel</b>	13509659440
<b>E-mail</b>	yh.gong@lhdpcb.com
<b>Manufacturer</b>	Linghangda Technology Co., Ltd.
<b>Manufacturer's Address</b>	Room 603, Block B, Zihui Creative, No. 2005, Xihuan Road, Shajing Street, Bao 'an District, Shenzhen

### 2.2 Description of EUT(S)


<b>Product Name</b>	PCB Antenna
<b>Sample Model</b>	154217
<b>Antenna Size</b>	/
<b>Serial No.</b>	/
<b>Antenna Type</b>	PCB Antenna
<b>Test Item</b>	VSWR; Antenna gain; Efficiency; Radiation pattern
<b>Frequency Range</b>	2400-2500MHz
<b>Received Date</b>	2023.5.15
<b>Test Date</b>	2023.5.17
<b>Remark</b>	The length of the RF cable is 60mm

## 2.3 EUT appearance


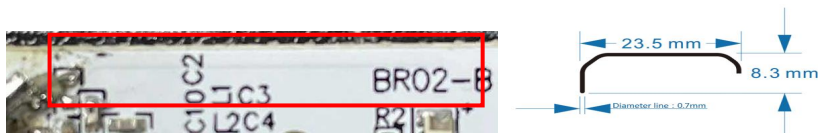


## 2.4 EUT setup photo of free space OTA testing

Planform

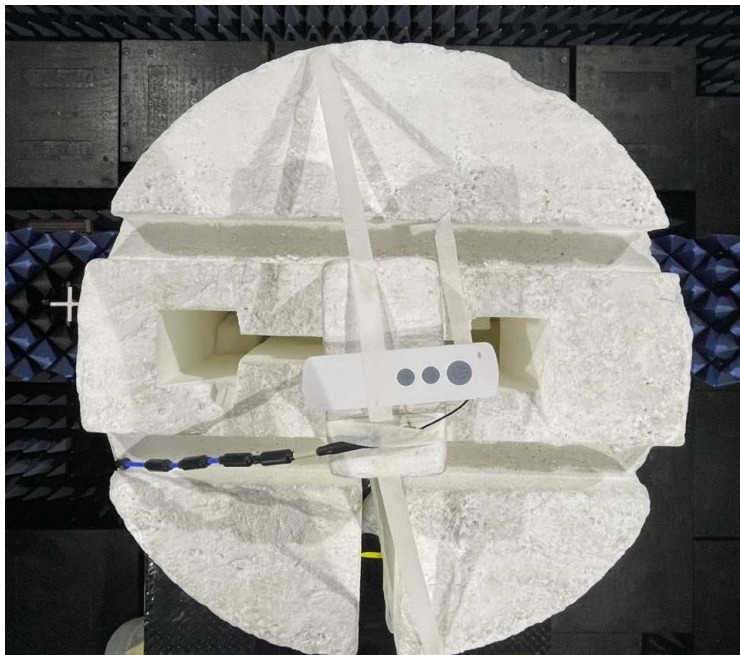

Front view

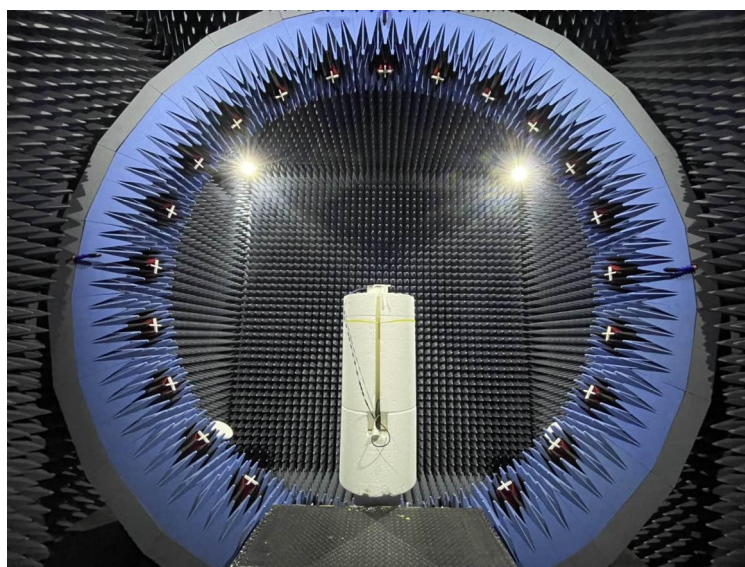

## 3. Test Results

### 3.1 Test standard

Name	Parameter	Method	Standard no.
Mobile communication antenna	Antenna gain	Generic specification for antennas used in the mobile communications	GB/T 9410-2008
	Radiation pattern		
	VSWR		
Antenna	Radiation efficiency	IEEE Standard Test Procedures for Antennas	ANSI/IEEE Std 149-1979
	Gain and directivity		


### 3.2 Test uncertainty

The uncertainty was calculated on the basis of the GUM published by ISO, using the inclusion factor of  $K=2$  and the 95% confidence level to express the extended uncertainty.

Item	Uncertainty
VSWR	$\pm 0.3$
Antenna gain	$\pm 0.72\text{dB}$
Radiation efficiency	$\pm 0.72\text{dB}$

### 3.3 Test data

#### 3.3.1 VSWR parameters

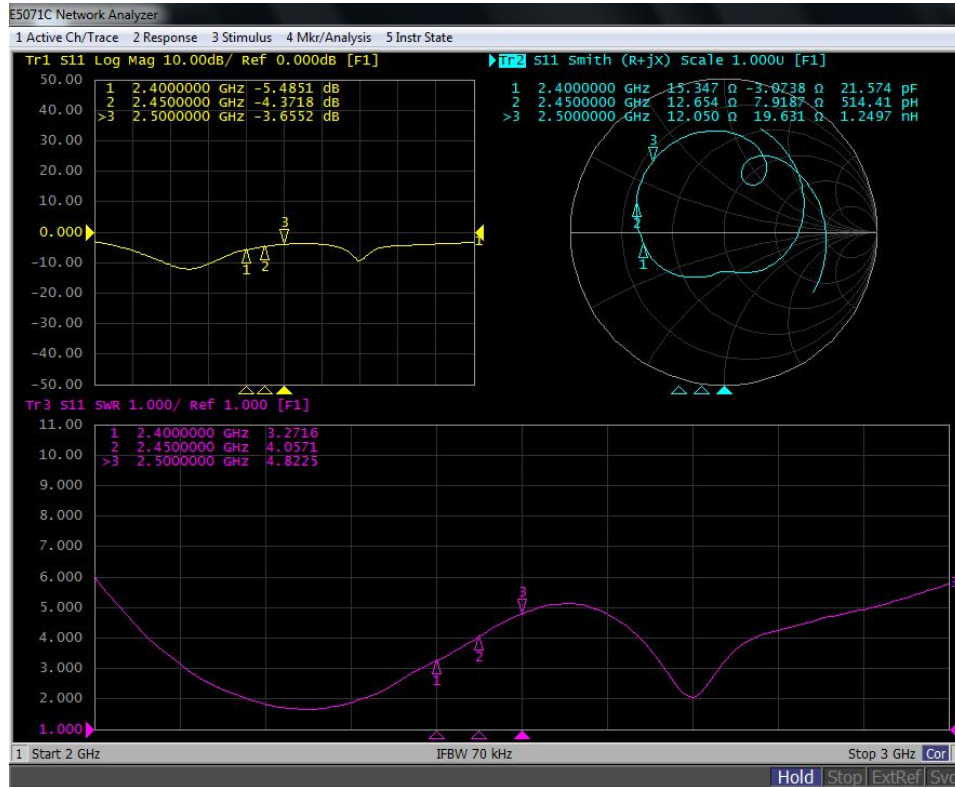

#### 3.3.2 VSWR data

Frequency/MHz	2400	2450	2500
VSWR	3.2716	4.0571	4.8225


#### 3.3.3 Typical free space efficiency and gain

Frequency/MHz	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain/dBi	-4.12	-4.40	-4.49	-4.64	-4.74	-4.41	-4.33	-4.31	-4.38	-4.19	-3.91
Efficiency/%	12.20	11.88	11.97	11.59	11.42	11.62	11.54	11.35	10.99	11.08	11.40




### 3.3.4 Typical free space radiation pattern


(1) X-Z Plane(unit:dBi):

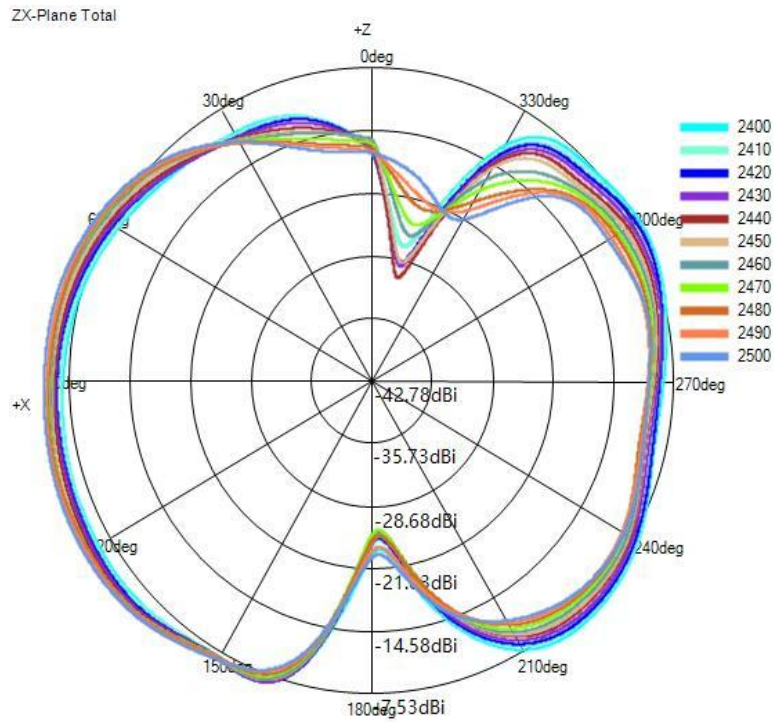


(2) Y-Z Plane(unit:dBi):

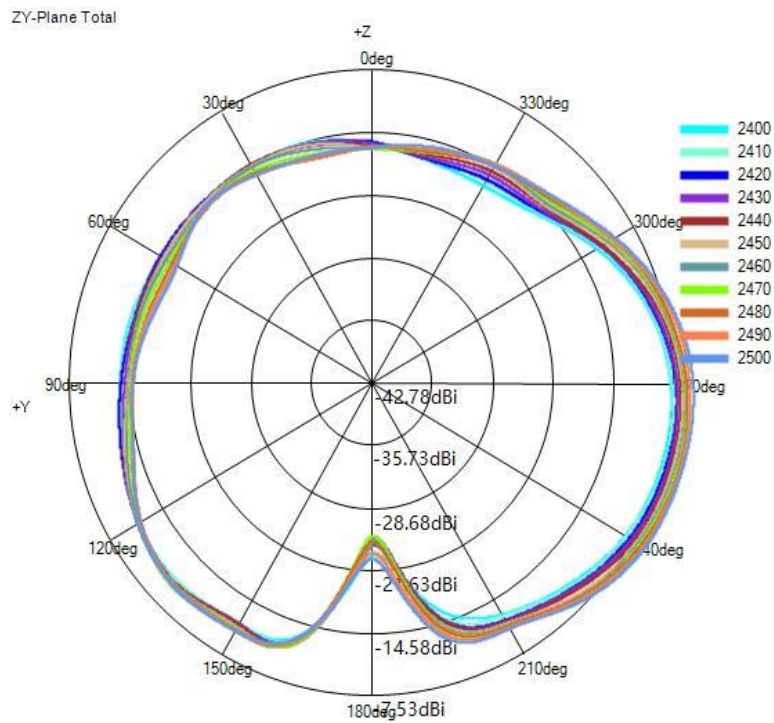

(3) X-Y Plane(unit:dBi):

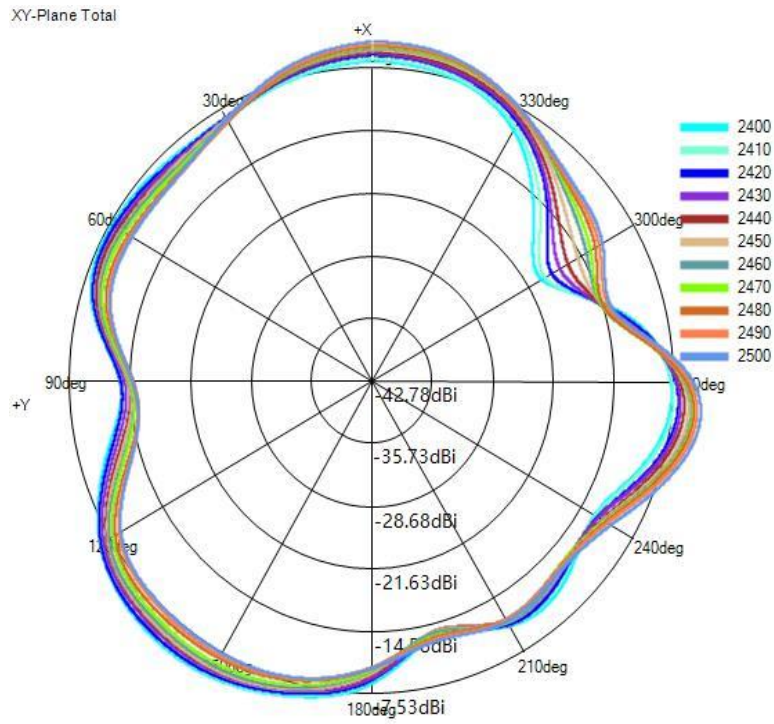

(4) Typical Free Space 3D Radiation Pattern at 2.5GHz(unit:dBi):

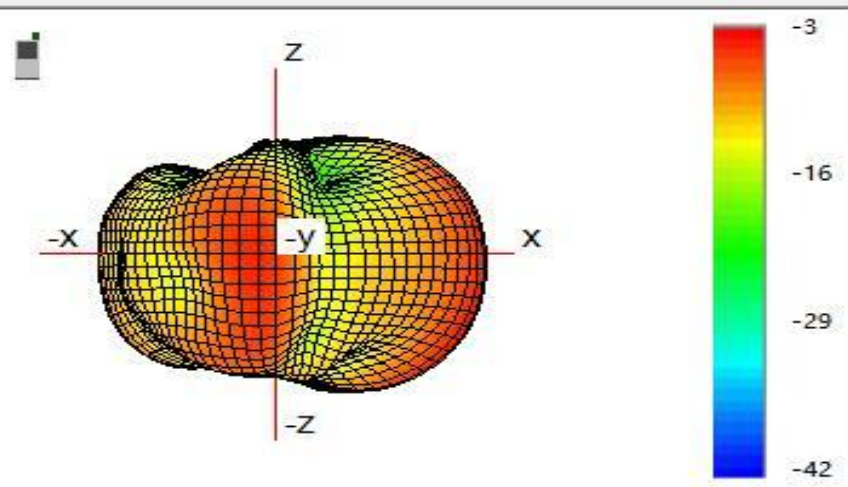

-----  
**End**

**(The following is blank)**