
FCC Test Report

Report No.: AGC01679150701FE03

FCC ID : 2AD9EMBT-CRX
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Bluetooth Audio Receiver
BRAND NAME : N/A
MODEL NAME : MBT-CRX
CLIENT : JL Audio, Inc.
DATE OF ISSUE : Oct.24,2015
STANDARD(S) : FCC Part 15 Rules
TEST PROCEDURE(S) :
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct.24,2015	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION.....	5
2.2. TABLE OF CARRIER FREQUENCYS.....	5
3. MEASUREMENT UNCERTAINTY.....	7
4. DESCRIPTION OF TEST MODES.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	8
6. TEST FACILITY	9
7 ALL TEST EQUIPMENT LIST	9
8. RADIATED EMISSION	10
8.1 TEST LIMIT	10
8.2. MEASUREMENT PROCEDURE	11
8.3. TEST SETUP	12
8.4. TEST RESULT	15
9. BAND EDGE EMISSION	41
9.1. MEASUREMENT PROCEDURE	41
9.2 TEST SETUP	41
9.3 RADIATED TEST RESULT	42
10. 20DB BANDWIDTH	50
10.1. MEASUREMENT PROCEDURE	50
10.2. TEST SET-UP	50
10.3. LIMITS AND MEASUREMENT RESULTS	50
11. FCC LINE CONDUCTED EMISSION TEST	60
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	60
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	60
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	61
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	61
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	62
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	66
APPENDIX B: PHOTOGRAPHS OF EUT	68


1. VERIFICATION OF CONFORMITY

Applicant	JL Audio, Inc.
Address	10369 North Commerce Pkwy Miramar, FL 33025-3962, USA
Manufacturer	AVS (Ningbo) Industrial Co., Ltd.
Address	NO. 7, 59TH, CHUANG FU ROAD, XIAO GANG INDUSTRIAL AREA, BEI LUN NB CITY, ZHE JIANG ,CHINA
Product Designation	Bluetooth Audio Receiver
Brand Name	N/A
Test Model	MBT-CRX
Date of test	Oct.19,2015 and Oct.23,2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Compliance Certification Service (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Tested By



Jerry Xiao(Xiao Wang)

Oct.24,2015

Reviewed By



Forrest Lei(Lei Yonggang)

Oct.24,2015

Approved By



Solger Zhang(Zhang Hongyi)

Authorized Officer

Oct.24,2015

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	4.05dBm(Max)
Bluetooth Version	V4.0
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of channels	79 for BR/EDR 40 for BLE
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	PCB Antenna (Met 15.203 Antenna requirement)
Antenna Gain	0dBi
Power Supply	DC 12 V by DC Source

2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR Bluetooth channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18 \text{Db}$
2	All emissions, radiated	$\pm 3.91 \text{Db}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link with charging


Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.

5. SYSTEM TEST CONFIGURATION


5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Note: AE Only that TV sound system and DC POWER SUPPLY

Configure 2: (Control continuous TX)

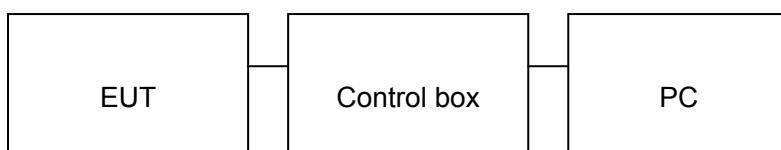

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth Audio Receiver	N/A	MBT-CRX	EUT
2	PC	Lenovo	SL410k	A.E
3	Control box	N/A	N/A	A.E
4	TV sound system	N/A	BASS	A.E
5	DC POWER SUPPLY	LODESTAR	LP3005D	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
N/A	BANDWIDTH	Compliant

6. TEST FACILITY

Site	Compliance Certification Service(Shenzhen) Inc.
Location	No.10-1 Mingkeda Logistics Park, No.18 Huanguan South RD. Guan Ian Town, Baoan Distr
FCC Registration No.	441872
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

7 ALL TEST EQUIPMENT LIST

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2015	03/01/2016
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/17/2016
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2015	03/17/2016
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2015	07/09/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2015	03/01/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2015	03/01/2016
Loop Antenna	COM-POWER	AL-130	121044	09/27/2015	09/26/2016
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	03/09/2015	03/08/2016
LISN	EMCO	3825/2	8901-1459	03/09/2015	03/08/2016
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2015	03/03/2016
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

8. RADIATED EMISSION

8.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		µ V/m	dB(µV)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)	

Remark: (1) Emission level dB µ V = 20 log Emission level µ V/m
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1.5MHz/1.5MHz for Peak, 1.5MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

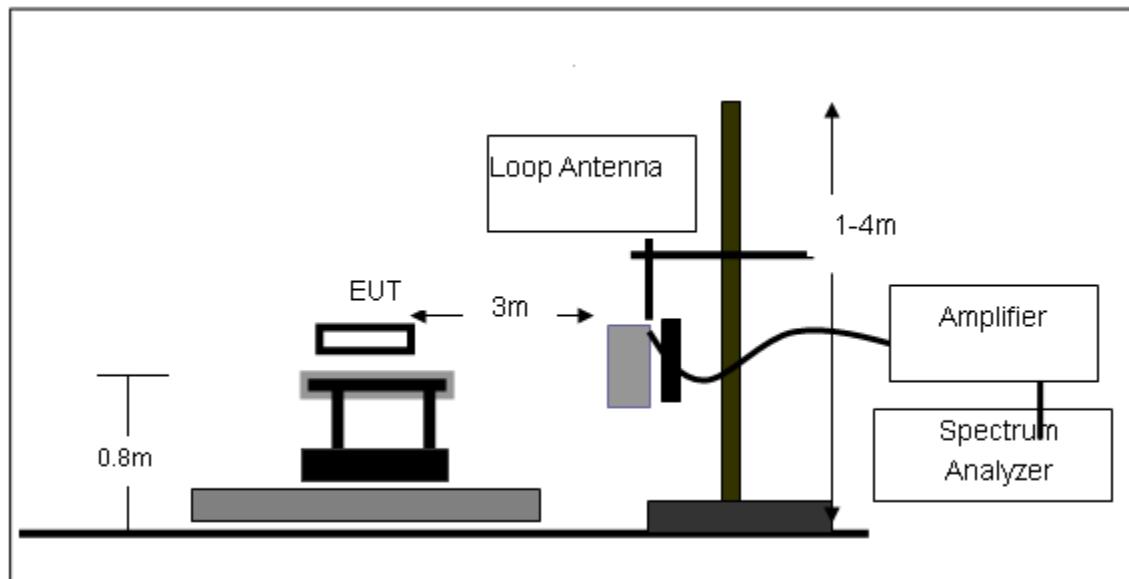

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

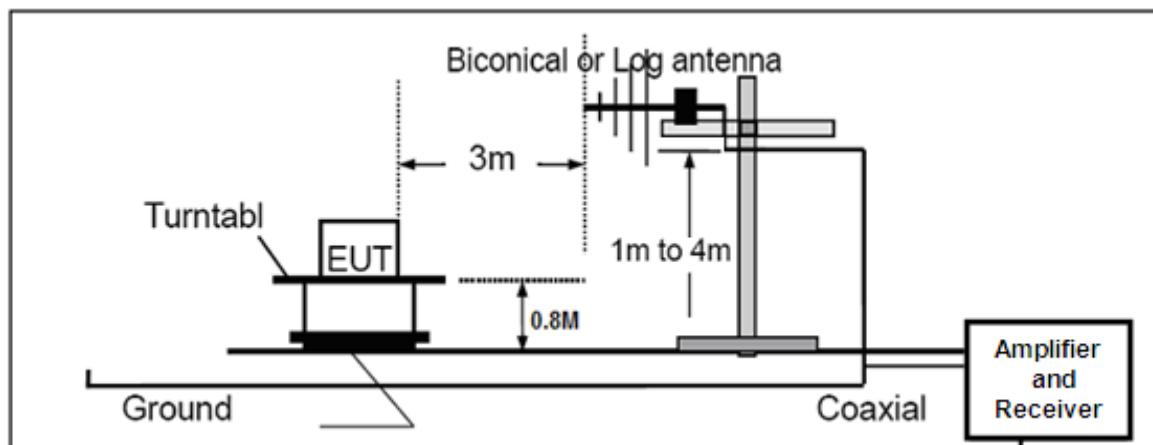

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

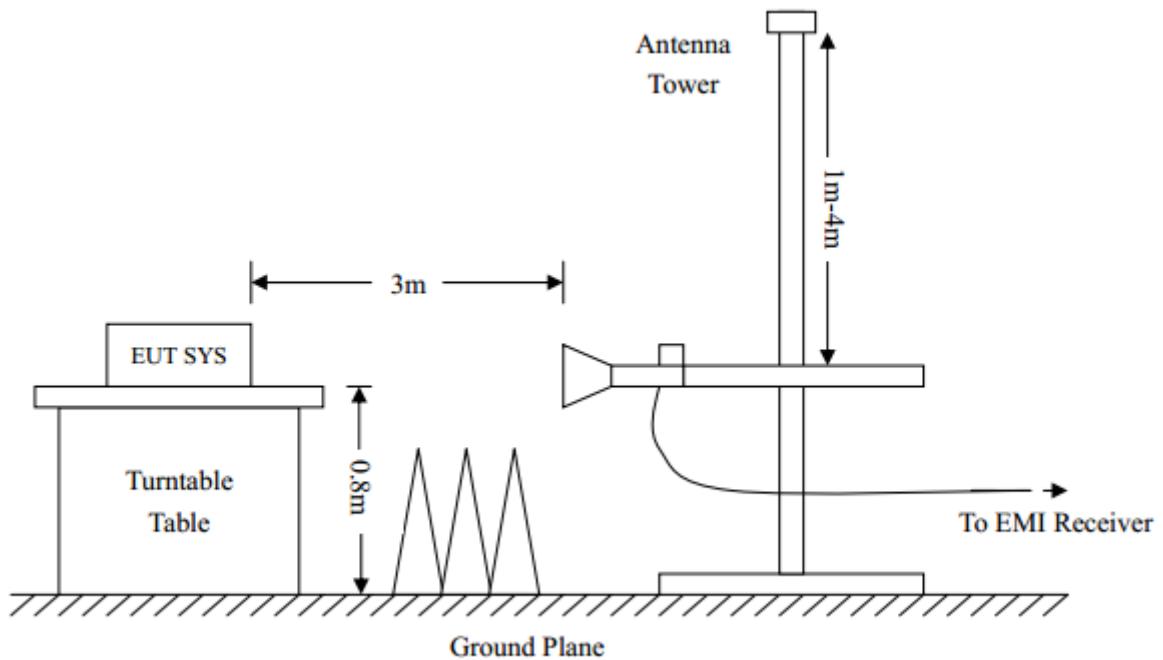

8.4. TEST RESULT

(Worst modulation: GFSK)


FOR BR/EDR BLUETOOTH

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ


RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

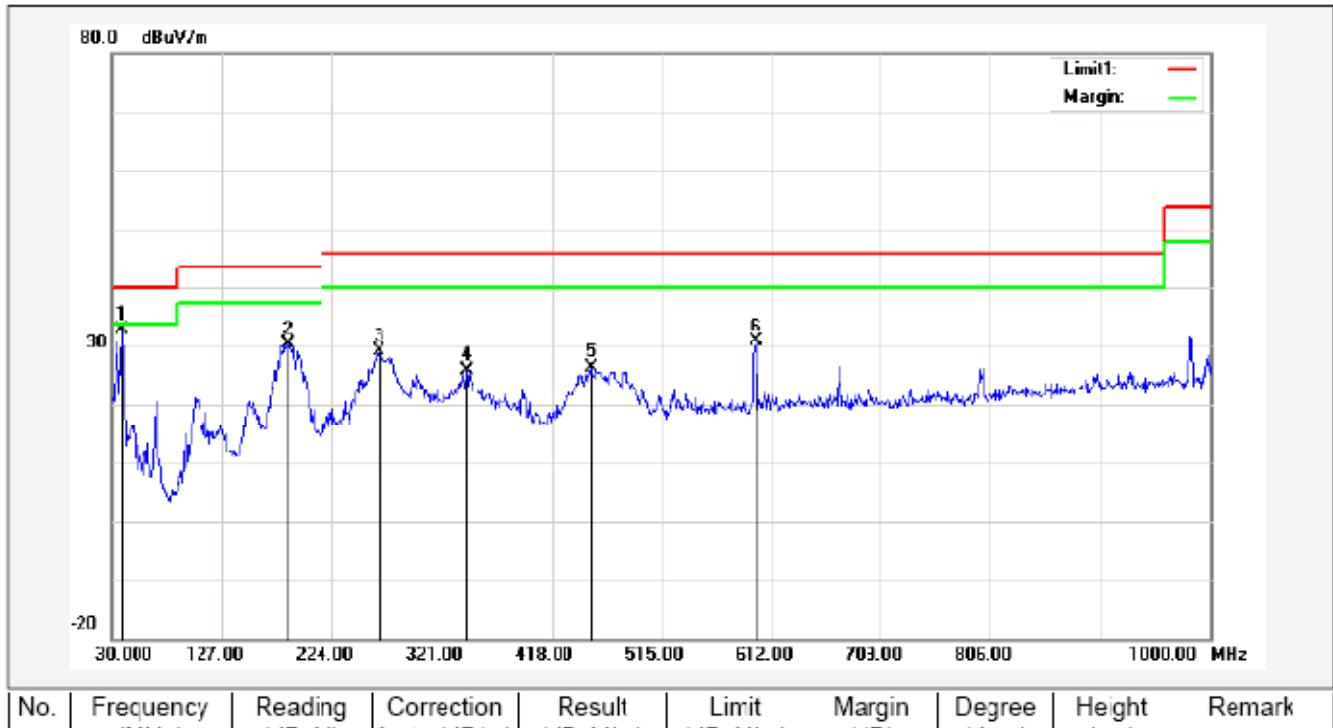

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	38.7300	48.74	-15.79	32.95	40.00	-7.05			peak
2	186.1700	53.36	-22.89	30.47	43.50	-13.03			peak
3	265.7100	49.27	-20.25	29.02	46.00	-16.98			peak
4	343.3100	43.82	-17.99	25.83	46.00	-20.17			peak
5	452.9200	41.71	-15.38	26.33	46.00	-19.67			peak
6	599.3900	43.73	-12.88	30.90	46.00	-15.10			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

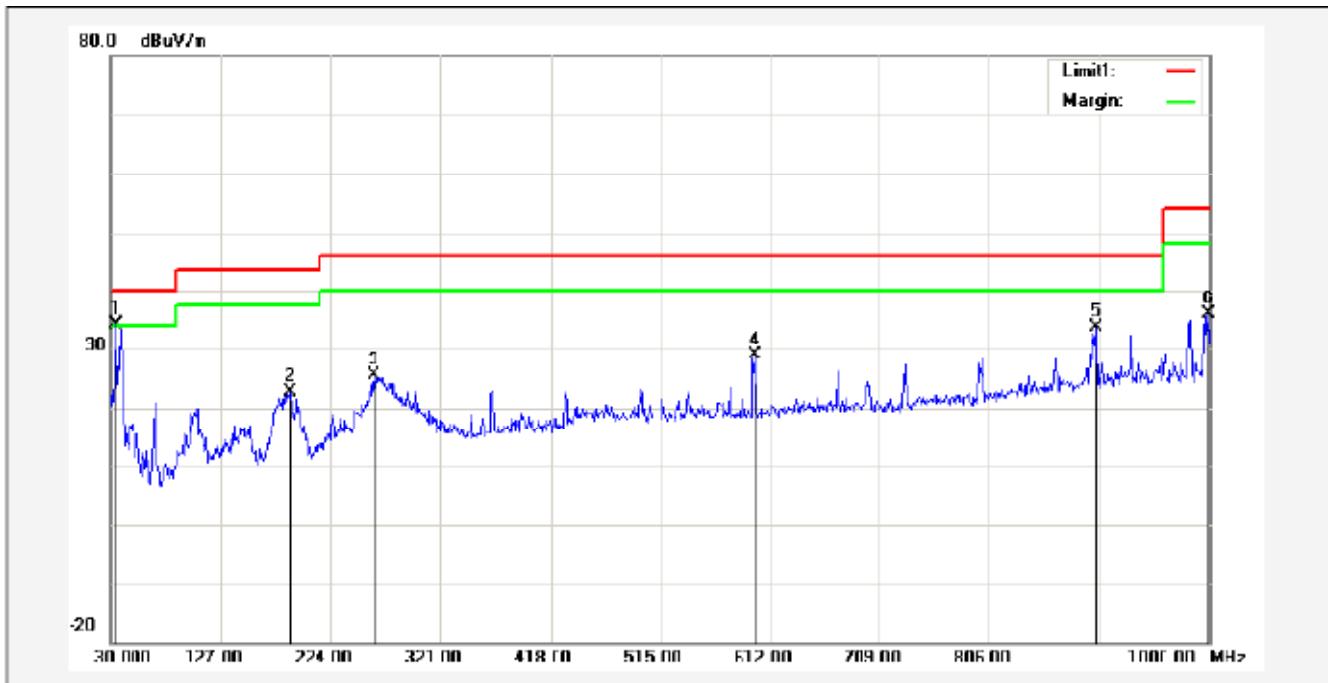


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	33.8800	48.23	-14.06	34.17	40.00	-5.83			peak
2	188.1100	45.47	-22.88	22.59	43.50	-20.91			peak
3	261.8300	45.31	-20.02	25.29	46.00	-20.71			peak
4	599.3900	41.74	-12.88	28.86	46.00	-17.14			peak
5	899.1200	43.40	-9.84	33.56	46.00	-12.44			peak
6	999.0300	45.24	-9.35	35.09	54.00	-10.11			peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

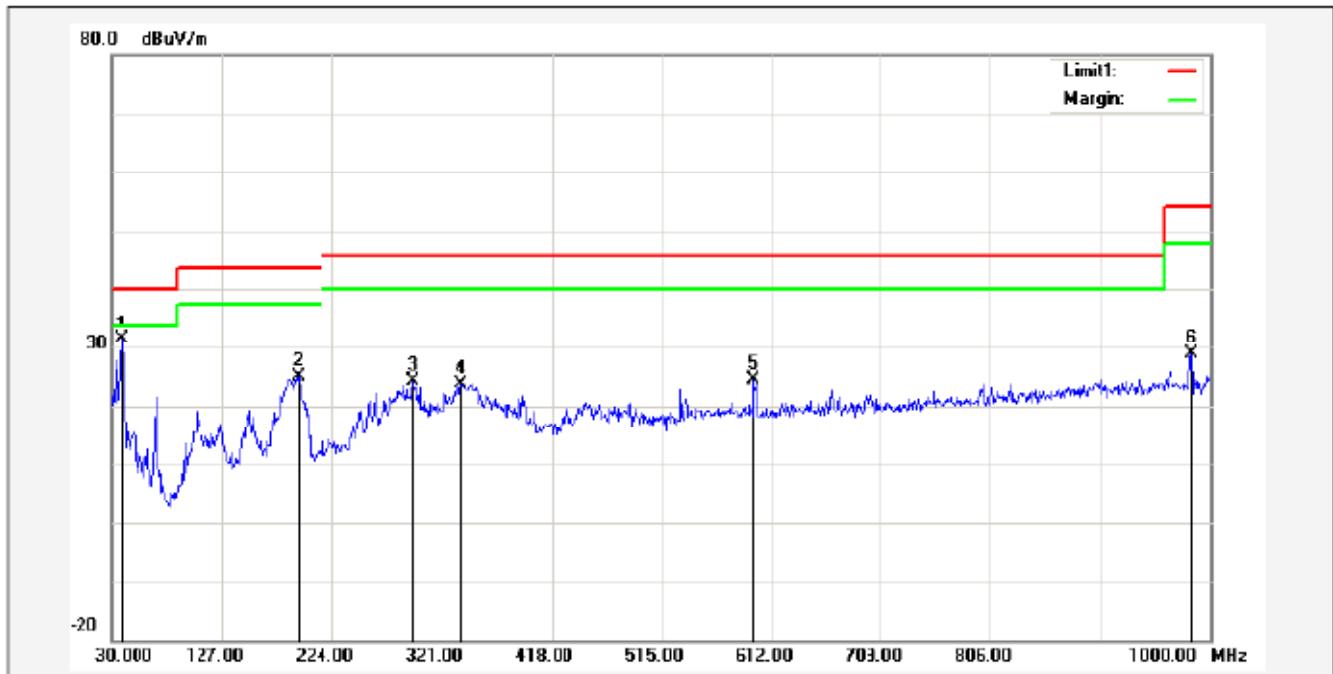

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	37.7600	46.85	-15.48	31.37	40.00	-8.63			peak
2	194.9000	47.93	-22.80	25.13	43.50	-18.37			peak
3	295.7800	44.22	-19.95	24.27	46.00	-21.73			peak
4	338.4600	42.03	-18.19	23.89	46.00	-22.11			peak
5	597.4500	37.44	-12.91	24.53	46.00	-21.47			peak
6	983.5100	38.21	-9.24	28.97	54.00	-25.03			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

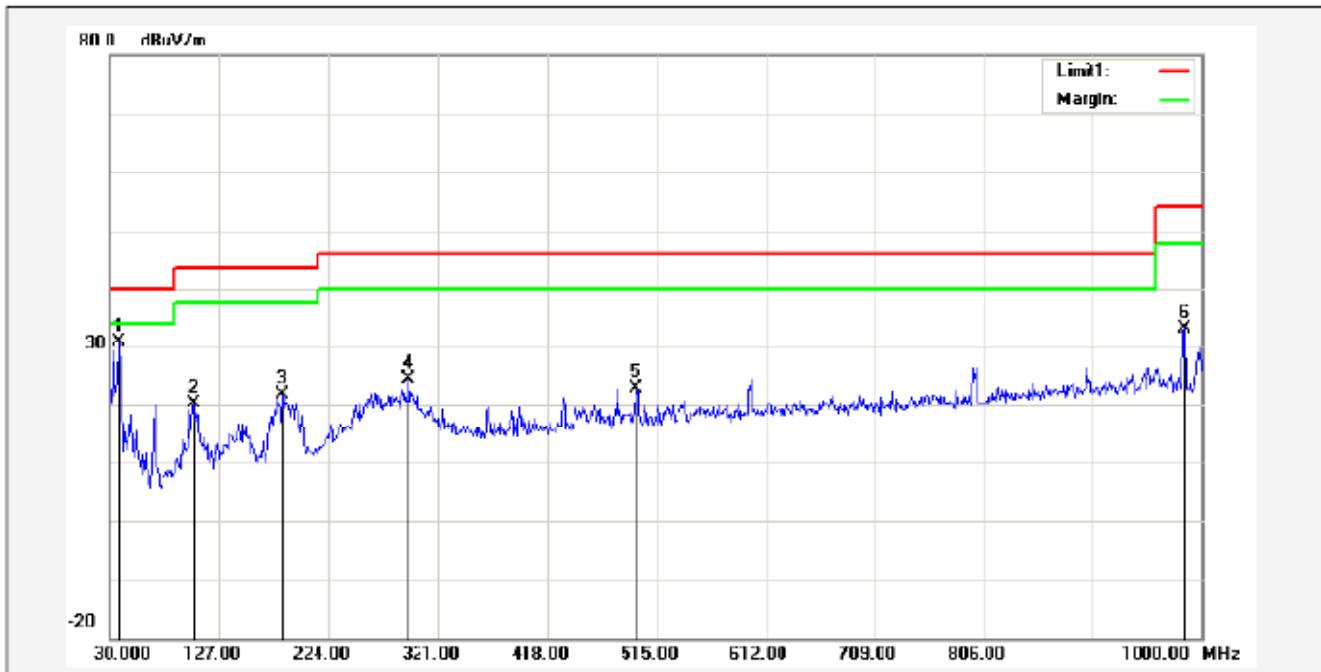


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	38.7300	46.65	-15.79	30.86	40.00	-9.14			peak
2	104.6900	43.17	-22.81	20.36	43.50	-23.14			peak
3	183.2600	44.88	-22.92	21.96	43.50	-21.54			peak
4	294.8100	44.32	-20.04	24.28	46.00	-21.72			peak
5	497.5400	37.36	-14.36	23.00	46.00	-23.00			peak
6	983.5100	42.48	-9.24	33.24	54.00	-20.76			peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

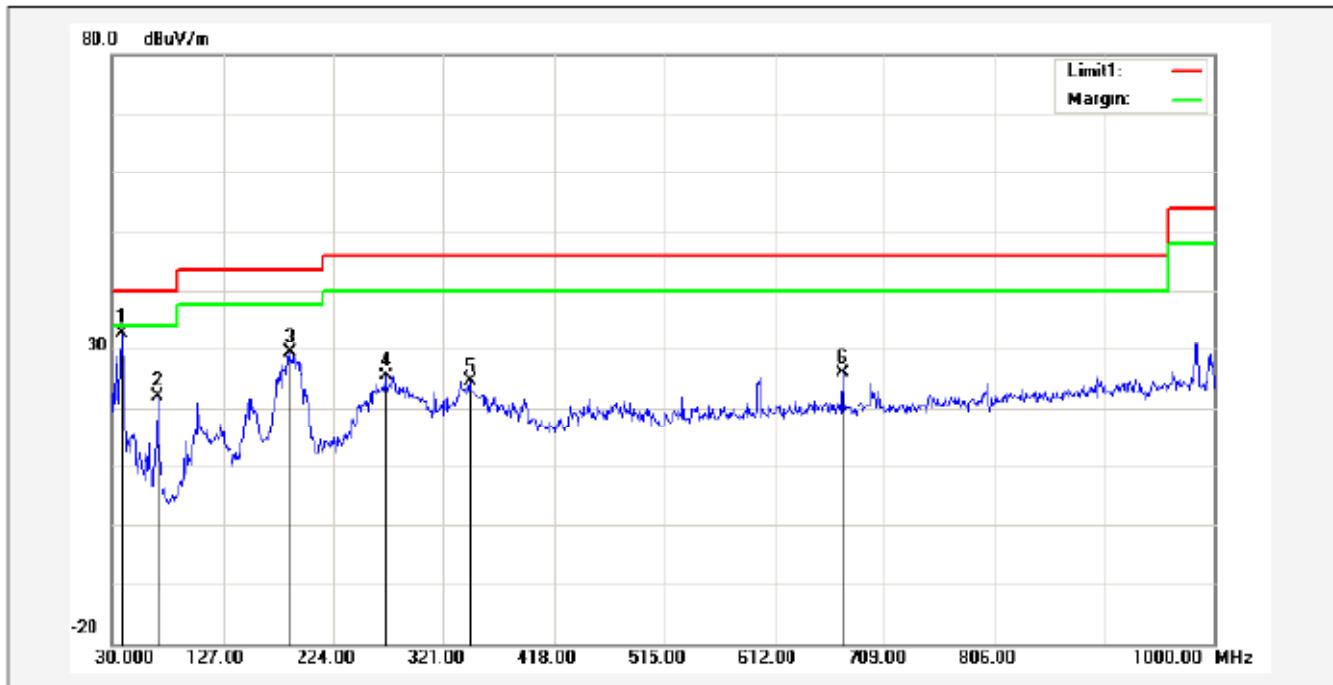

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	38.7300	48.37	-15.79	32.58	40.00	-7.42			peak
2	68.8000	47.39	-25.49	21.90	40.00	-18.10			peak
3	185.2000	52.38	-22.90	29.48	43.50	-14.02			peak
4	270.5600	45.93	-20.49	25.44	46.00	-20.56			peak
5	344.2800	42.40	-17.94	24.46	46.00	-21.54			peak
6	672.1400	38.16	-12.19	25.97	46.00	-20.03			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

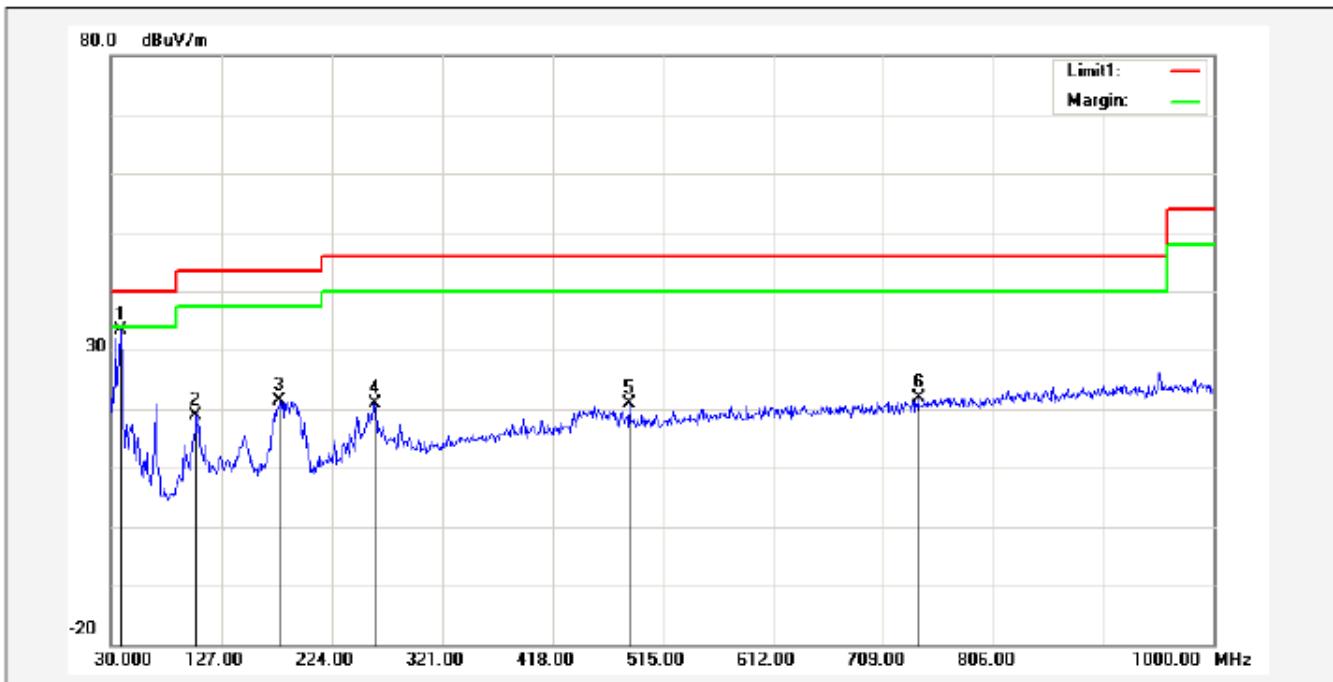

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	38.7300	49.17	-15.79	33.38	40.00	-6.62			peak
2	104.6900	41.75	-22.81	18.94	43.50	-24.56			peak
3	178.4100	44.36	-22.95	21.41	43.50	-22.09			peak
4	261.8300	40.93	-20.02	20.91	46.00	-25.09			peak
5	485.9000	35.22	-14.36	20.86	46.00	-25.14			peak
6	740.0400	33.26	-11.35	21.91	46.00	-24.09			peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

FOR BLE

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ


RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL



No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	38.7300	47.99	-15.79	32.20	40.00	-7.80			peak
2	68.8000	46.53	-25.49	21.04	40.00	-18.96			peak
3	186.1700	53.56	-22.89	30.67	43.50	-12.83			peak
4	248.2500	43.17	-21.15	22.02	46.00	-23.98			peak
5	336.5200	41.24	-18.24	23.00	46.00	-23.00			peak
6	448.0700	42.21	15.50	26.71	46.00	19.29			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

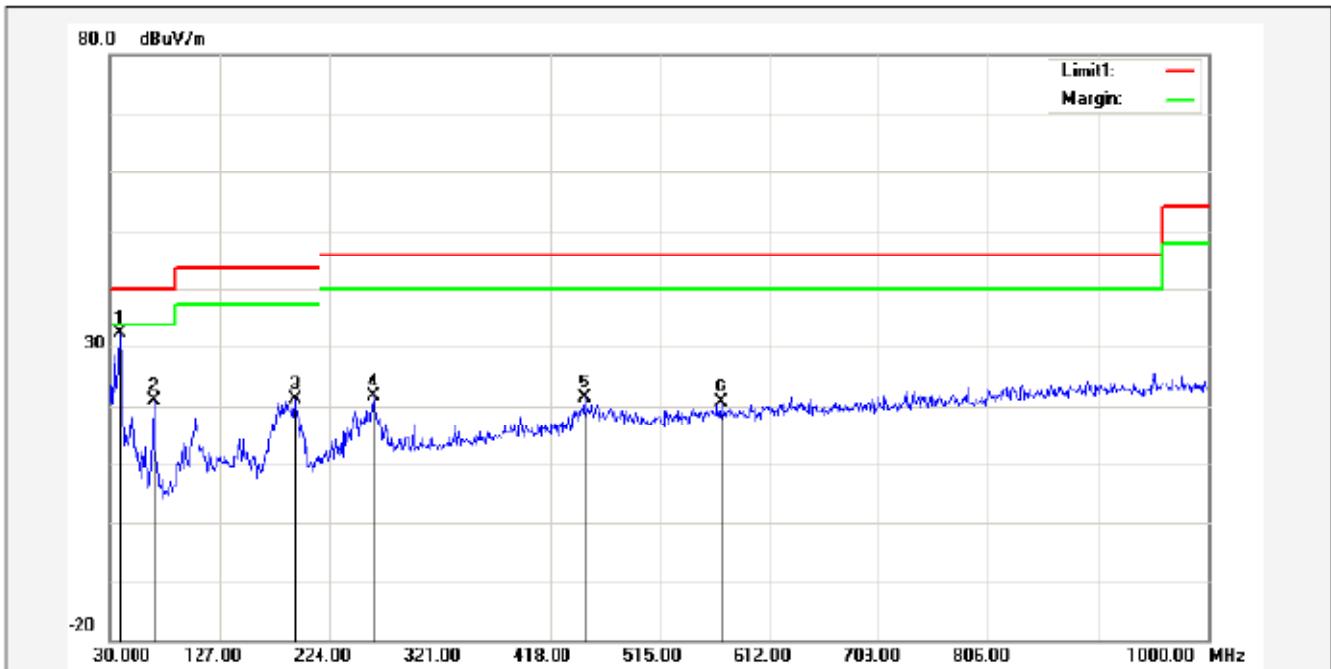


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	37.7600	47.93	-15.48	32.50	40.00	-7.50			peak
2	68.8000	46.39	-26.49	20.90	40.00	-19.10			peak
3	192.9600	44.03	-22.82	21.21	43.50	-22.29			peak
4	261.8300	41.59	-20.02	21.57	46.00	-24.43			peak
5	449.0400	36.94	-15.48	21.46	46.00	-24.54			peak
6	569.3200	33.62	-13.04	20.58	46.00	-25.42			peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

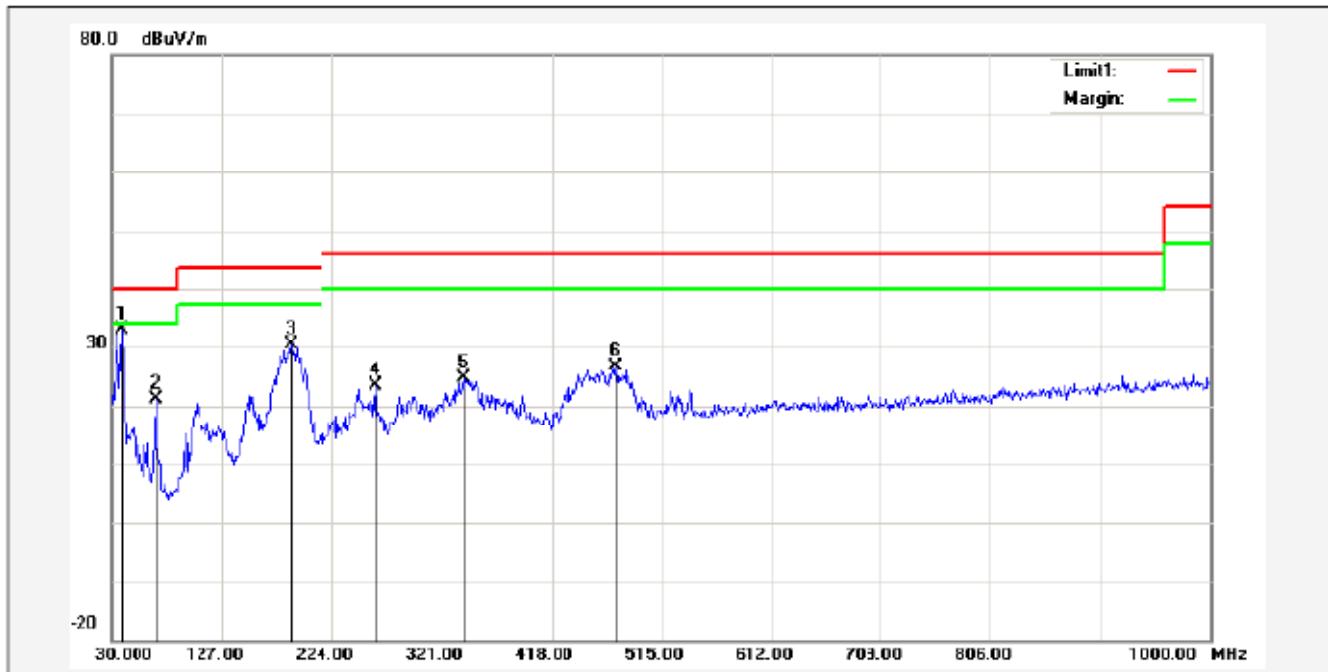

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	38.7300	48.72	-15.79	32.93	40.00	-7.07			peak
2	68.8000	46.69	-25.49	21.20	40.00	-18.80			peak
3	188.1100	53.37	-22.88	30.49	43.50	-13.01			peak
4	261.8300	43.28	-20.02	23.26	46.00	-22.74			peak
5	340.4000	42.75	-18.13	24.62	46.00	-21.38			peak
6	474.2600	41.31	-14.57	26.74	46.00	-19.26			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

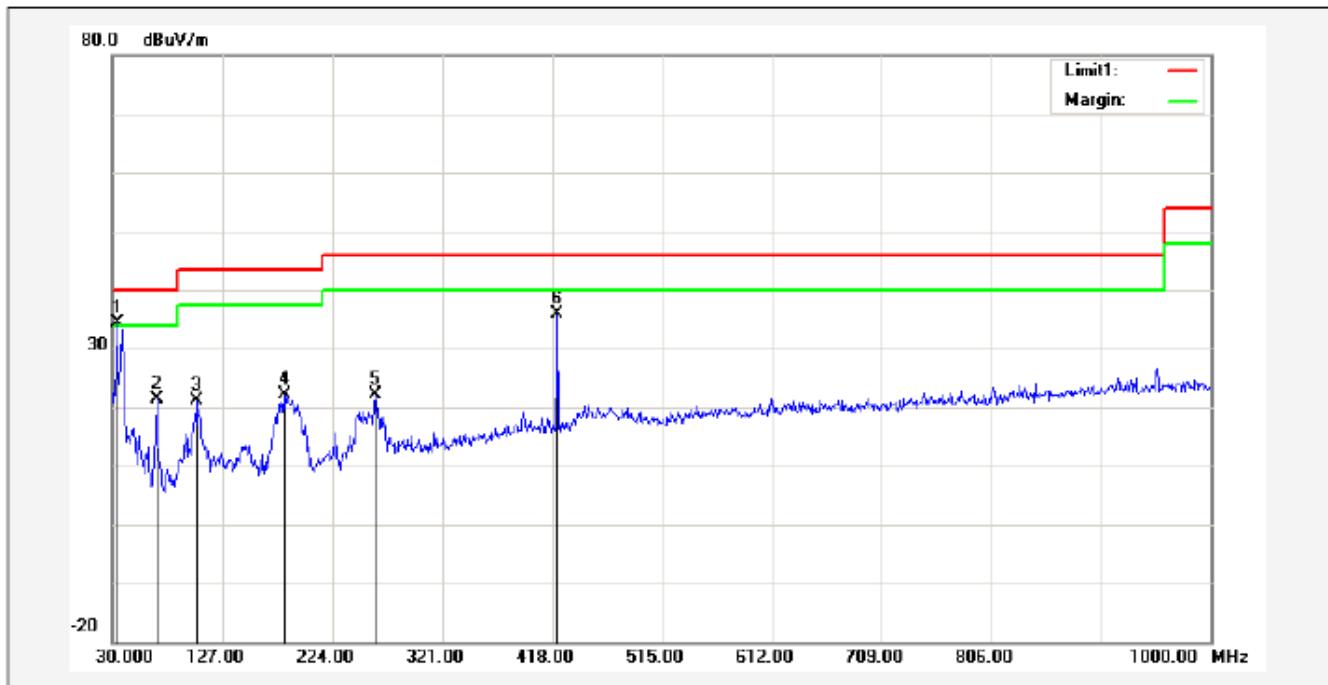


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	33.8800	48.52	-14.06	34.46	40.00	-5.54			peak
2	68.8000	46.79	-25.49	21.30	40.00	-18.70			peak
3	104.6900	43.99	-22.81	21.18	43.50	-22.32			peak
4	181.3200	45.01	-22.94	22.07	43.50	-21.43			peak
5	261.8300	42.09	-20.02	22.07	46.00	-23.93			peak
6	422.8500	51.43	-15.47	35.96	46.00	-10.04			peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

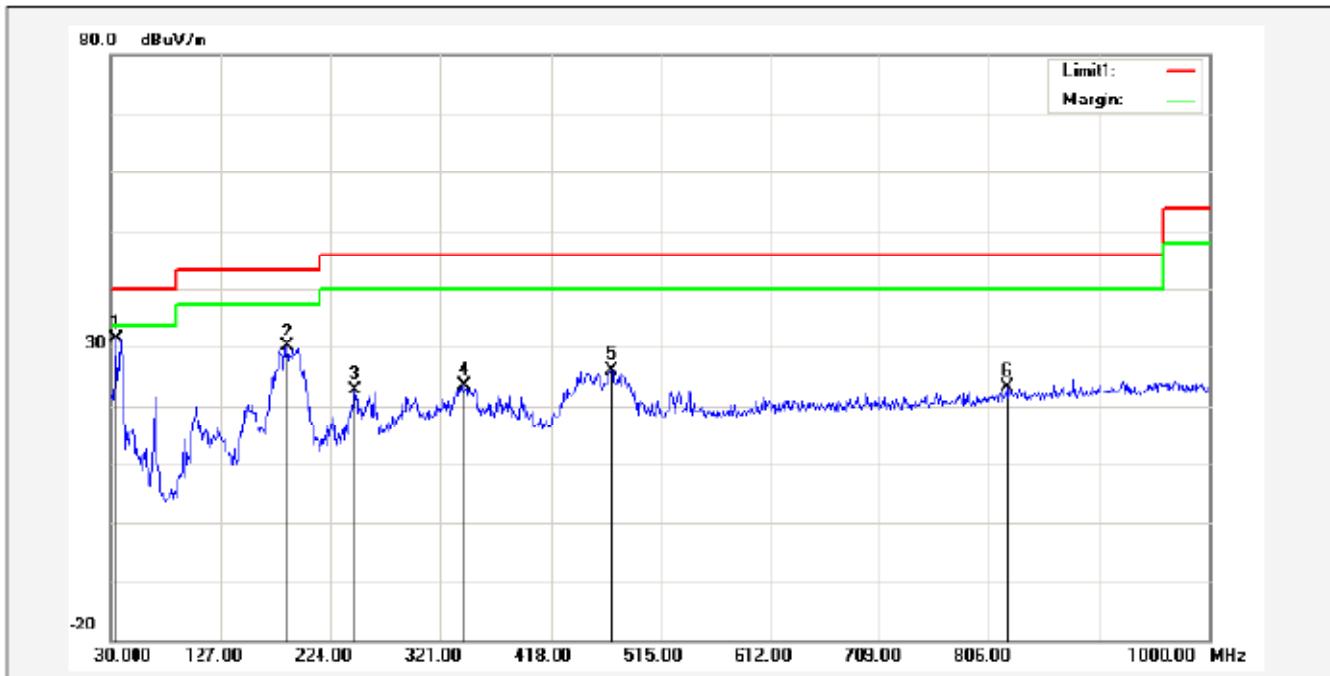

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	33.8800	45.59	-14.06	31.53	40.00	-8.47			peak
2	186.1700	53.08	-22.89	30.19	43.50	-13.31			peak
3	245.3400	44.13	-21.28	22.85	46.00	-23.15			peak
4	342.3400	41.59	-18.04	23.55	46.00	-22.45			peak
5	471.3500	40.69	-14.67	26.02	46.00	-19.98			peak
6	821.5200	33.79	-10.43	23.36	46.00	-22.64			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

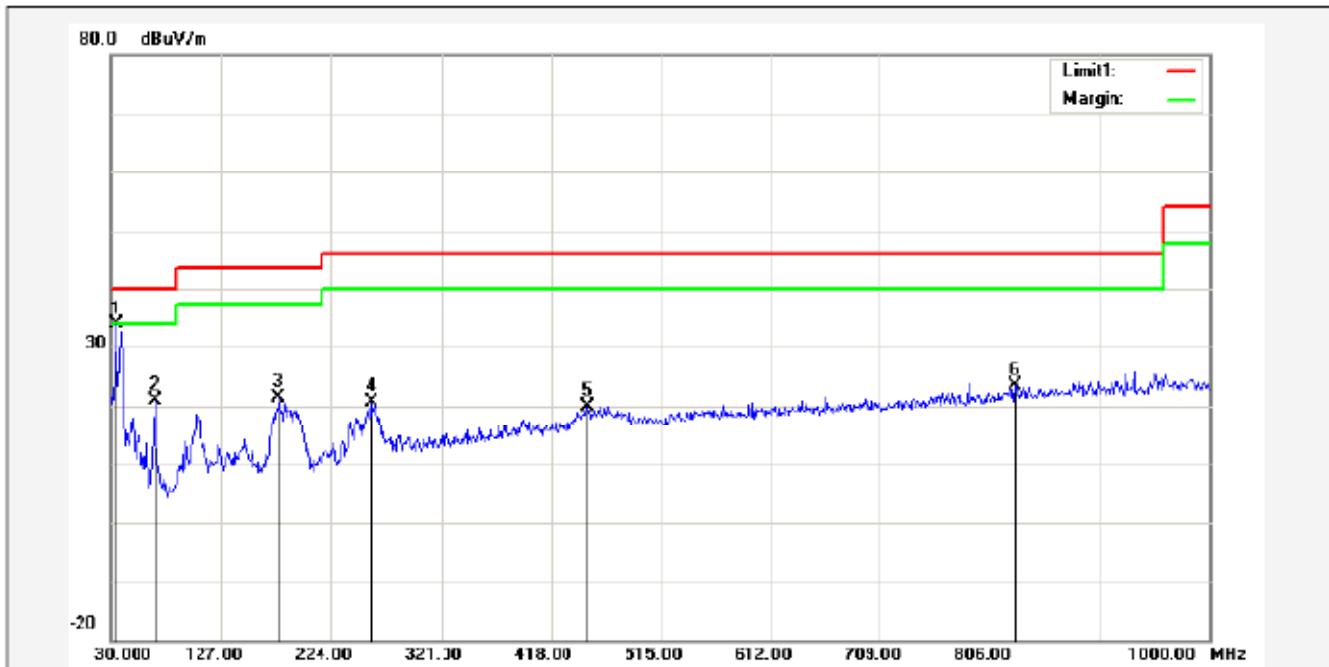

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	33.8800	48.02	-14.06	33.96	40.00	-6.04			peak
2	68.8000	46.34	-25.49	20.85	40.00	-19.15			peak
3	178.4100	44.26	-22.95	21.31	43.50	-22.19			peak
4	258.9200	40.64	-20.04	20.60	46.00	-25.40			peak
5	450.9800	35.42	-15.43	19.99	46.00	-26.01			peak
6	828.3100	33.90	-10.55	23.35	46.00	-22.65			peak

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION ABOVE 1GHZ

FOR BR/EDR BLUETOOTH

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

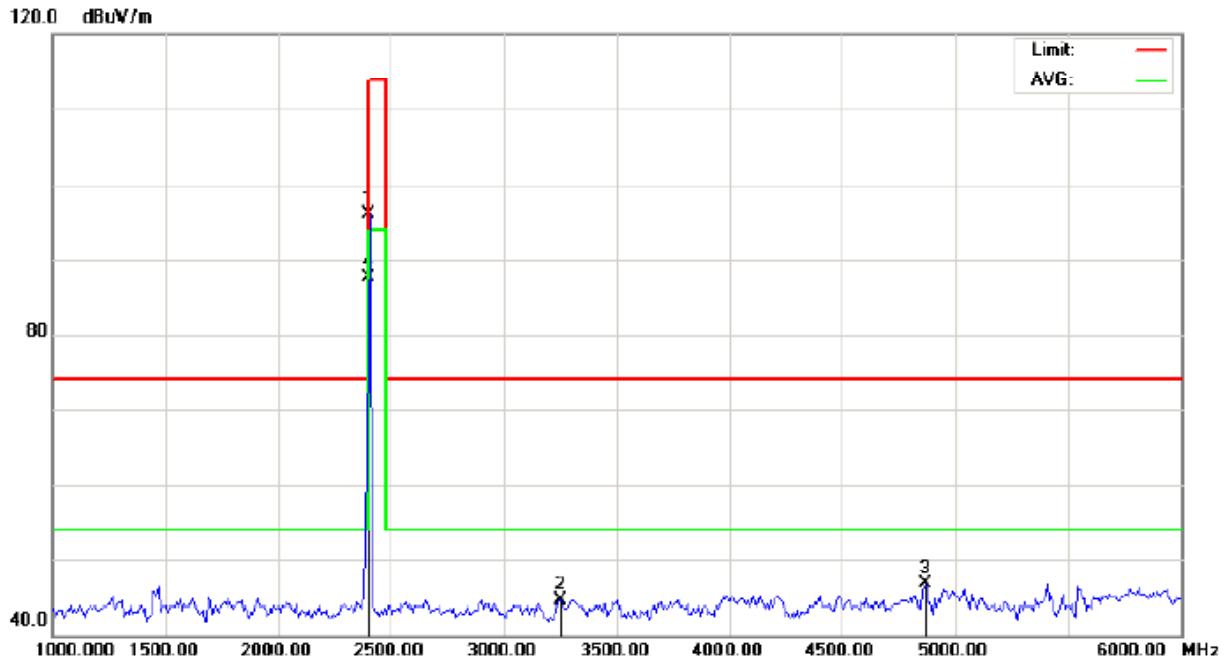


Site: site #1 Polarization: *Horizontal* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT: Bluetooth Audio Receiver Distance: 3m
 M/N: MBT-CRX
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	105.75	-9.68	96.07	114.00	-17.93	peak			
2		3258.333	52.67	-8.12	44.55	74.00	-29.45	peak			
3		4866.667	48.84	-2.15	46.69	74.00	-27.31	peak			
4	*	2402.000	97.26	-9.68	87.58	94.00	-6.42	AVG	150	270	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

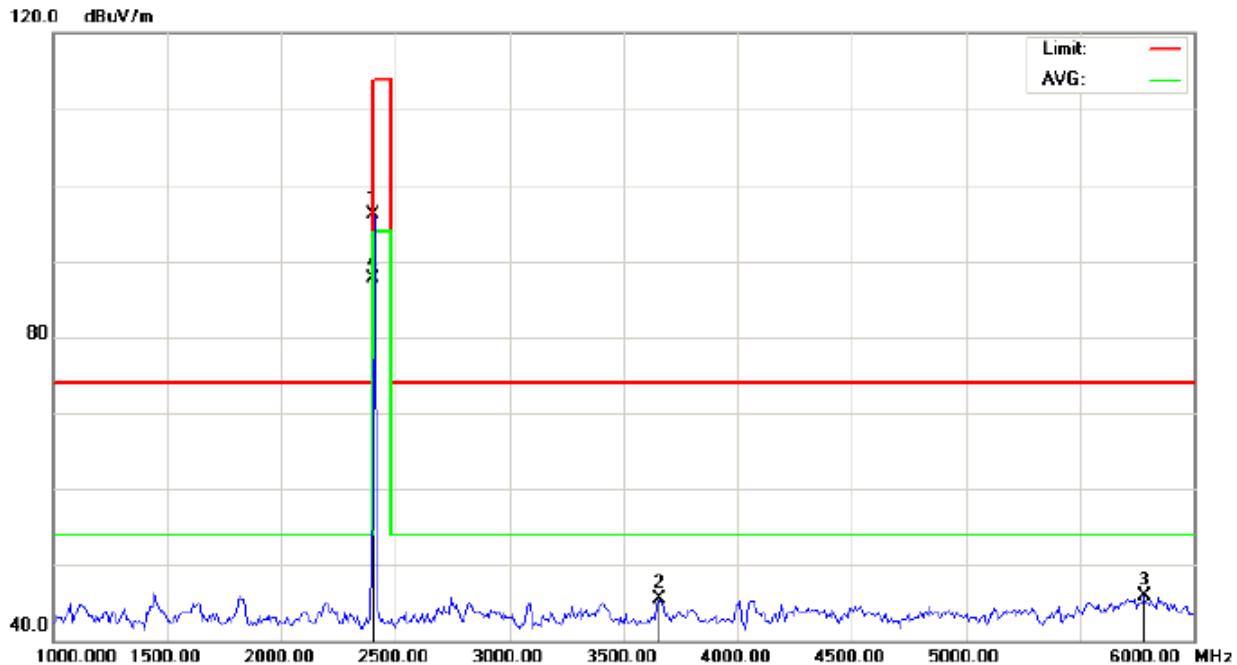

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Audio Receiver Distance: 3m
M/N: MBT-CRX
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	105.70	-9.68	96.02	114.00	-17.98	peak			
2		3658.333	52.40	-6.91	45.49	74.00	-28.51	peak			
3		5783.333	47.49	-1.68	45.81	74.00	-28.19	peak			
4	*	2402.000	97.34	-9.68	87.66	94.00	-6.34	AVG	150	192	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL




Site: site #1 Polarization: **Horizontal** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Audio Receiver Distance: 3m
M/N: MBT-CRX
Mode: Middle Channel TX
Note:

No.	Mlk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	107.77	-9.63	98.14	114.00	-15.86	peak			
2		3108.333	54.95	-8.26	46.69	74.00	-27.31	peak			
3		5033.333	48.59	-1.80	46.79	74.00	-27.21	peak			
4	*	2441.000	97.86	-9.63	88.23	94.00	-5.77	AVG	150	72	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

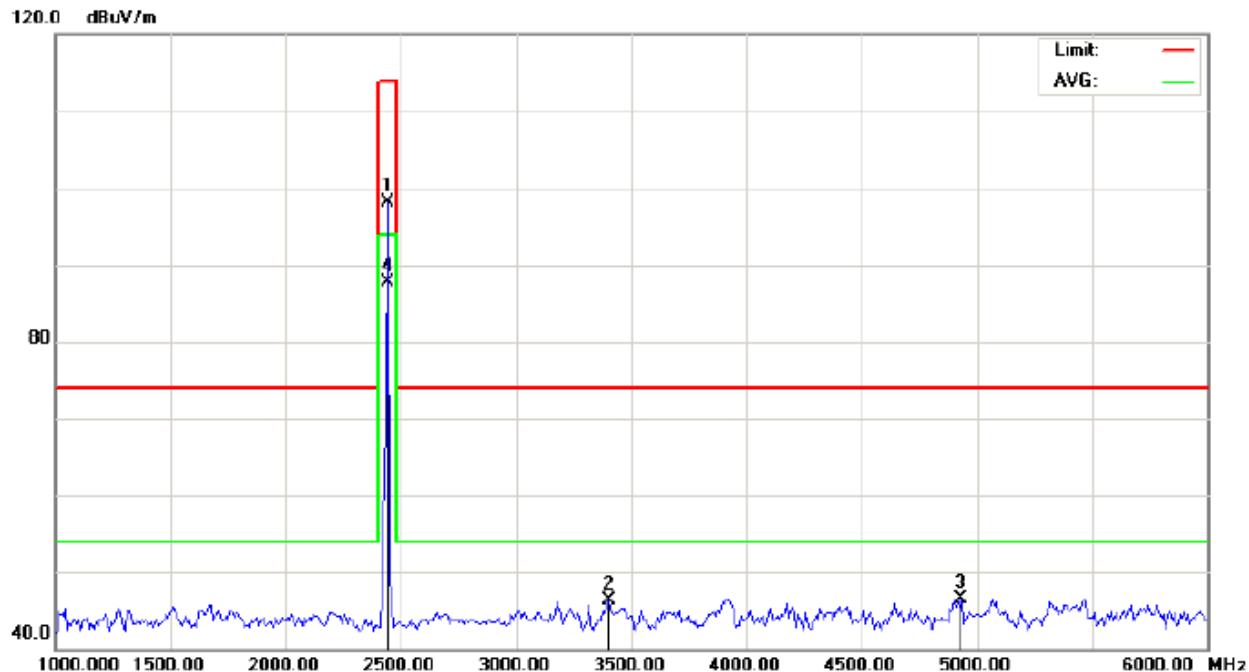


Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Audio Receiver Distance: 3m
M/N: MBT-CRX
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	107.74	-9.63	98.11	114.00	-15.89	peak			
2		3400.000	54.21	-7.98	46.23	74.00	-27.77	peak			
3		4933.333	48.43	-1.97	46.46	74.00	-27.54	peak			
4	*	2441.000	97.29	-9.63	87.66	94.00	-6.34	AVG	150	115	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

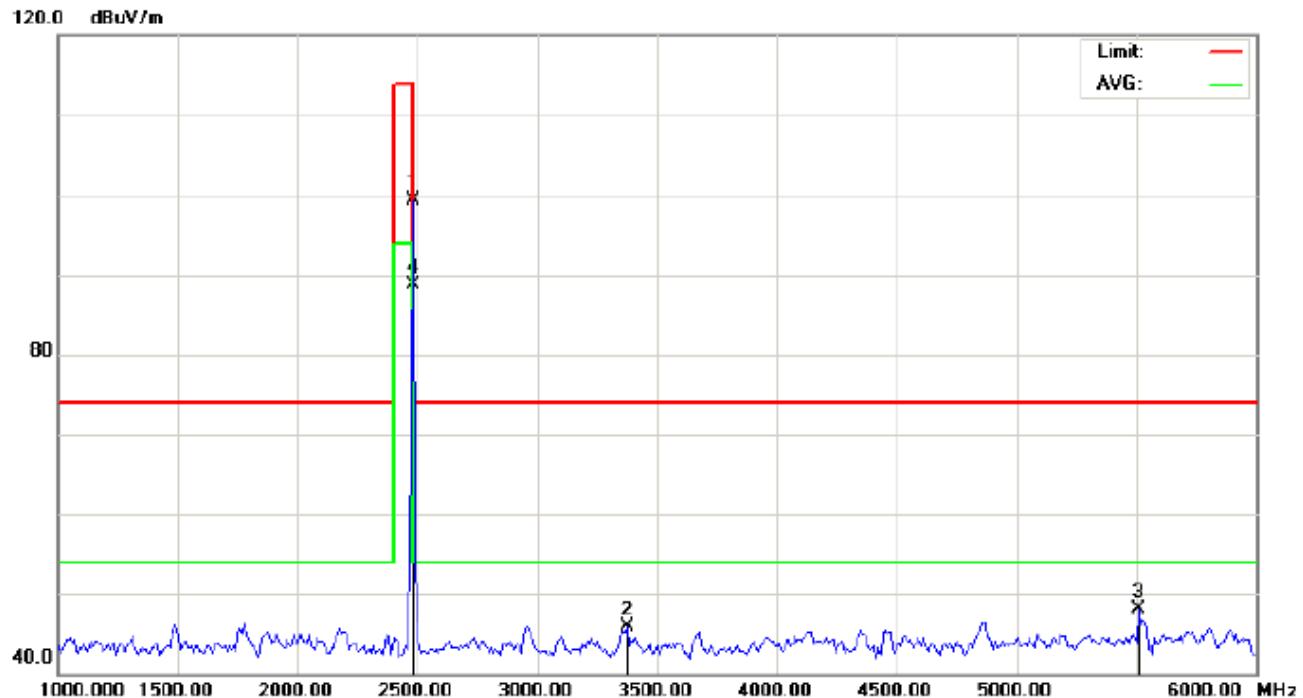


Site: site #1 Polarization: *Horizontal* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT: Bluetooth Audio Receiver Distance: 3m
 M/N: MBT-CRX
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	108.87	-9.59	99.28	114.00	-14.72	peak			
2		3375.000	54.01	-8.01	46.00	74.00	-28.00	peak			
3		5508.333	49.82	-1.81	48.01	74.00	-25.99	peak			
4	*	2480.000	98.23	-9.59	88.64	94.00	-5.36	AVG	150	37	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

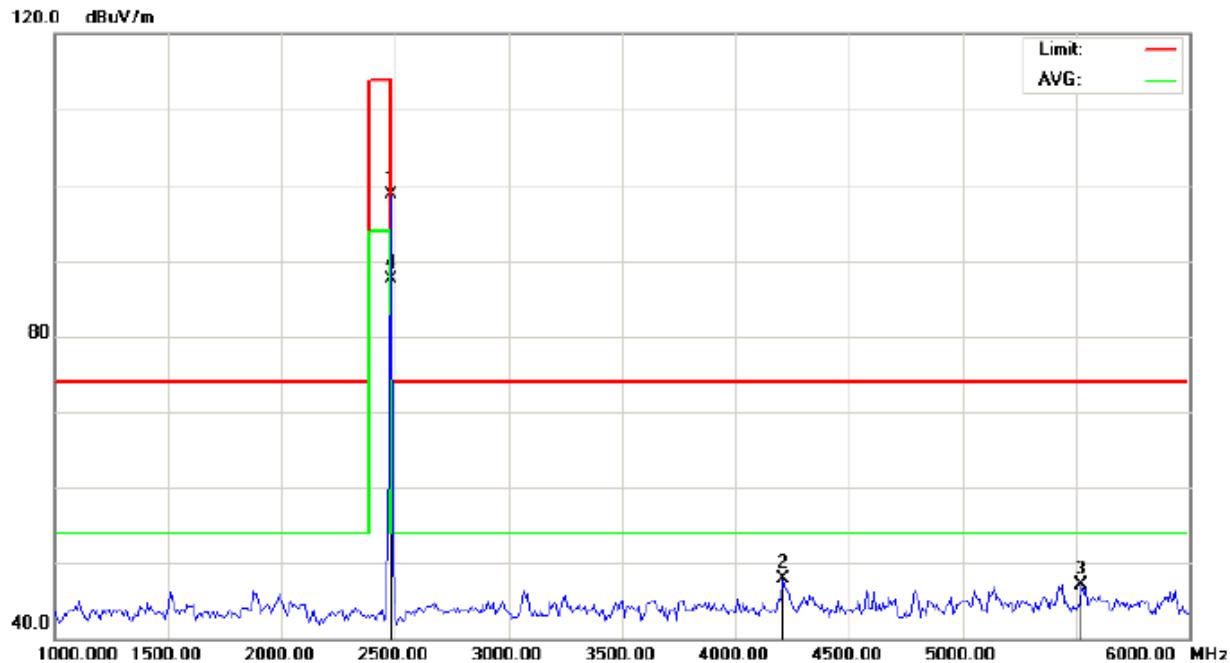

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Audio Receiver Distance: 3m
M/N: MBT-CRX
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	108.37	-9.59	98.78	114.00	-15.22	peak			
2		4208.333	52.04	-4.10	47.94	74.00	-26.06	peak			
3		5525.000	48.99	-1.80	47.19	74.00	-26.81	peak			
4	*	2480.000	97.11	-9.59	87.52	94.00	-6.48	AVG	150	0	

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value


Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	105.75	-9.68	96.07	114	-17.93	Horizontal
2402	105.70	-9.68	96.02	114	-17.98	Vertical
2441	107.77	-9.63	98.14	114	-15.86	Horizontal
2441	107.74	-9.63	98.11	114	-15.89	Vertical
2480	108.87	-9.59	99.28	114	-14.72	Horizontal
2480	108.37	-9.59	98.78	114	-15.22	Vertical

Average value

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	97.26	-9.68	87.58	94	-6.42	Horizontal
2402	97.34	-9.68	87.66	94	-6.34	Vertical
2441	97.86	-9.63	88.23	94	-5.77	Horizontal
2441	97.29	-9.63	87.66	94	-6.34	Vertical
2480	98.23	-9.59	88.64	94	-5.36	Horizontal
2480	97.11	-9.59	87.52	94	-6.48	Vertical

FOR BLE

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

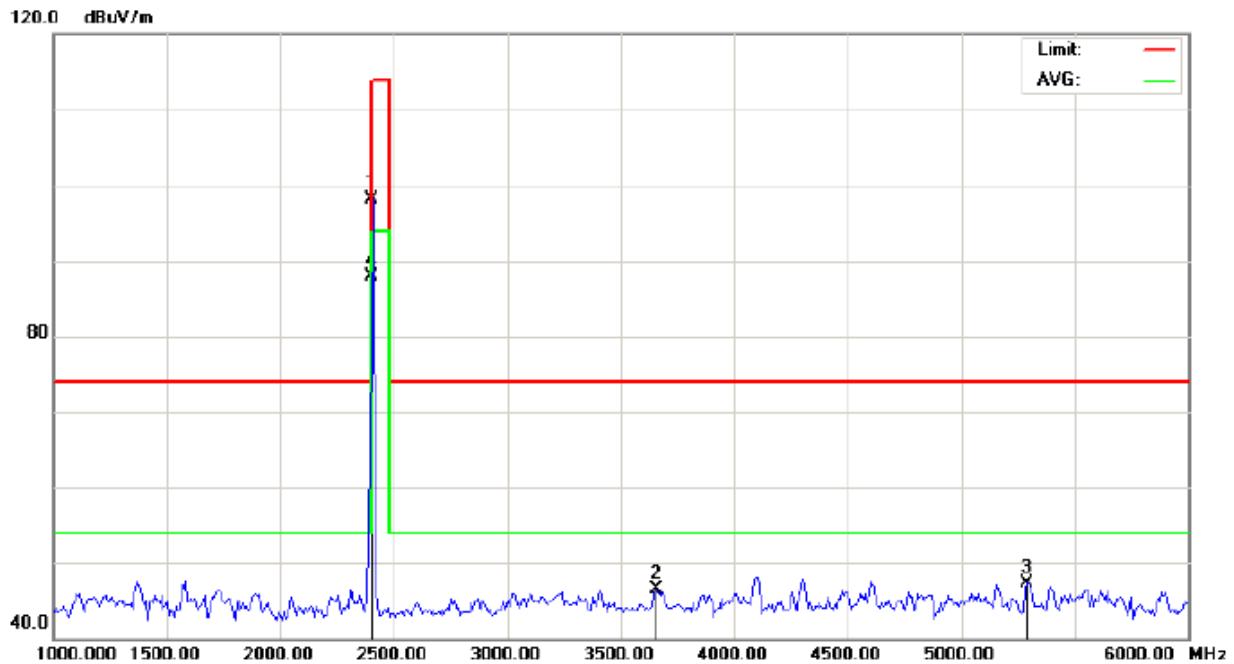


Site: site #1 Polarization: **Horizontal** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT: Bluetooth Audio Receiver Distance: 3m
 M/N: MBT-CRX
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		2402.000	107.72	-9.68	98.04	114.00	-15.96	peak			
2		3658.333	53.50	-6.91	46.59	74.00	-27.41	peak			
3		5291.667	49.08	-1.81	47.27	74.00	-26.73	peak			
4	*	2402.000	97.66	-9.68	87.98	94.00	-6.02	AVG	150	308	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

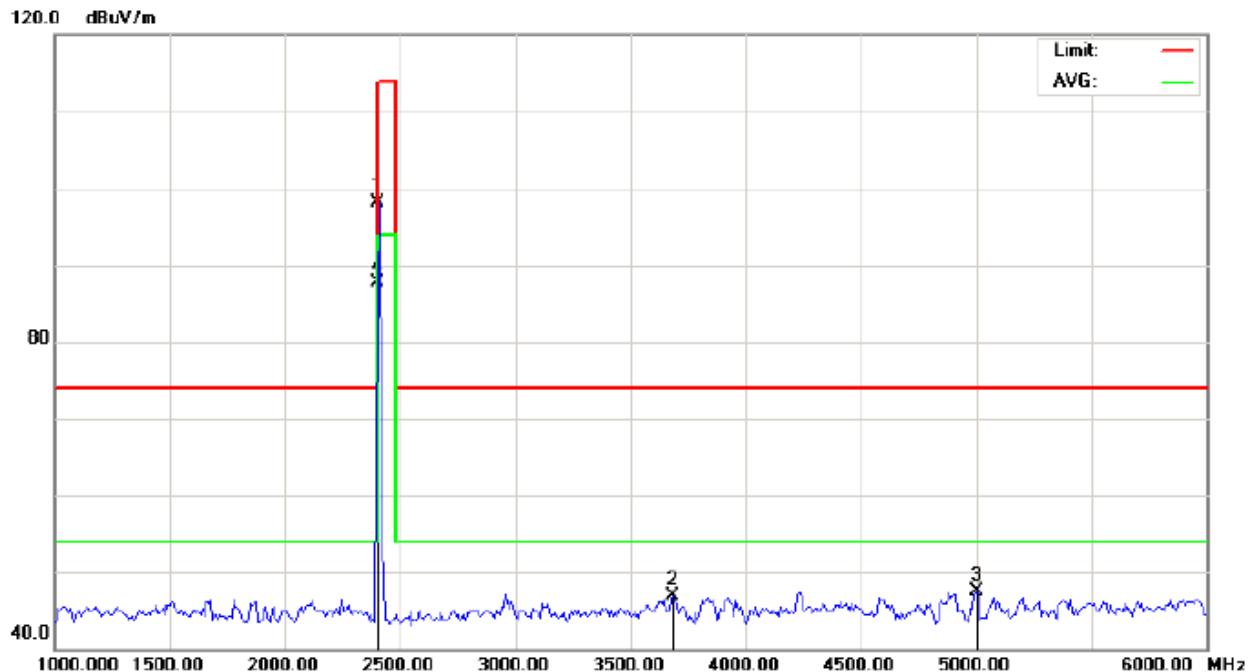


Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Audio Receiver Distance: 3m
M/N: MBT-CRX
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	107.70	-9.68	98.02	114.00	-15.98	peak			
2		3683.333	53.60	-6.76	46.84	74.00	-27.16	peak			
3		5000.000	49.24	-1.80	47.44	74.00	-26.56	peak			
4	*	2402.000	97.43	-9.68	87.75	94.00	-6.25	AVG	150	209	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

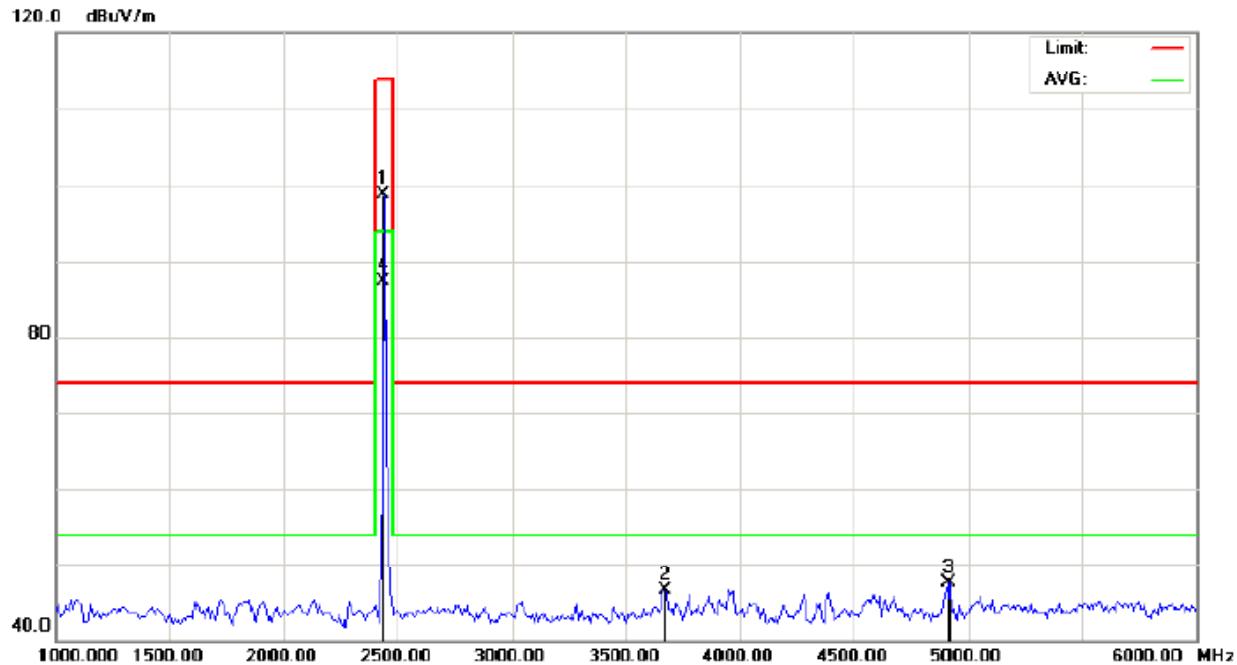


Site: site #1 Polarization: **Horizontal** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Audio Receiver Distance: 3m
M/N: MBT-CRX
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/lm	dB		cm	degree	
1		2440.000	108.29	-9.64	98.65	114.00	-15.35	peak			
2		3666.667	53.38	-6.86	46.52	74.00	-27.48	peak			
3		4916.667	49.56	-2.02	47.54	74.00	-26.46	peak			
4	*	2440.000	96.98	-9.64	87.34	94.00	-6.66	AVG	150	97	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

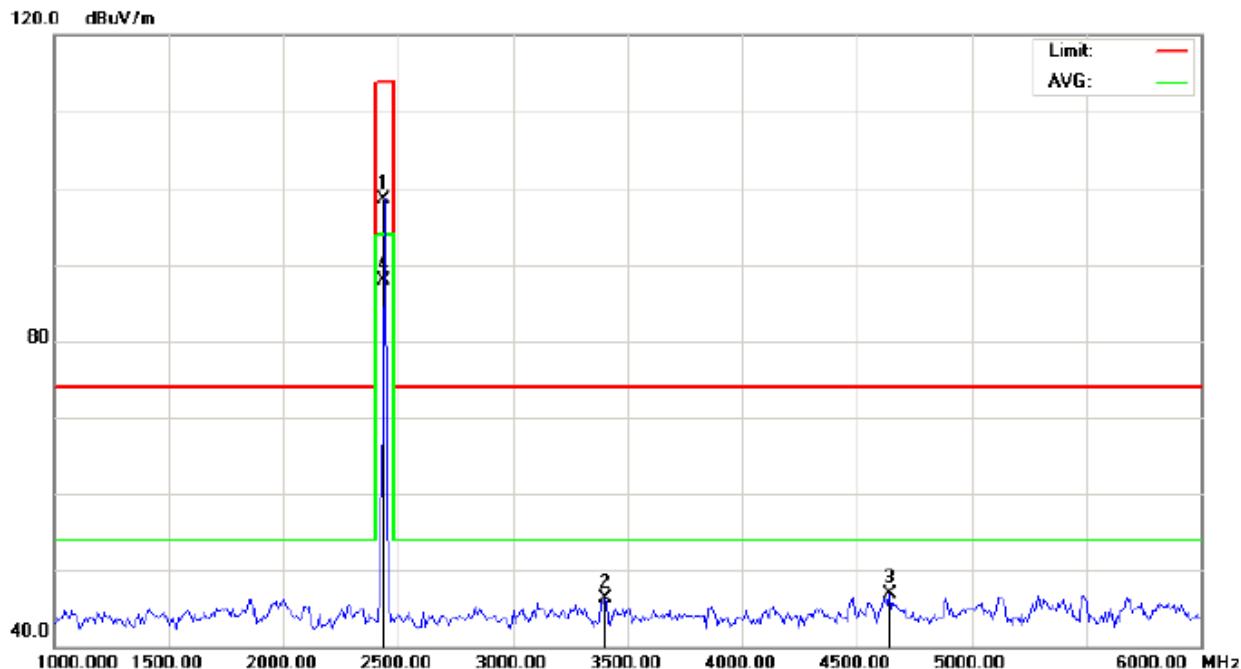


Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Audio Receiver Distance: 3m
M/N: MBT-CRX
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	108.24	-9.64	98.60	114.00	-15.40	peak			
2		3400.000	54.21	-7.98	46.23	74.00	-27.77	peak			
3		4641.667	49.69	-2.74	46.95	74.00	-27.05	peak			
4	*	2440.000	97.54	-9.64	87.90	94.00	-6.10	AVG	150	144	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

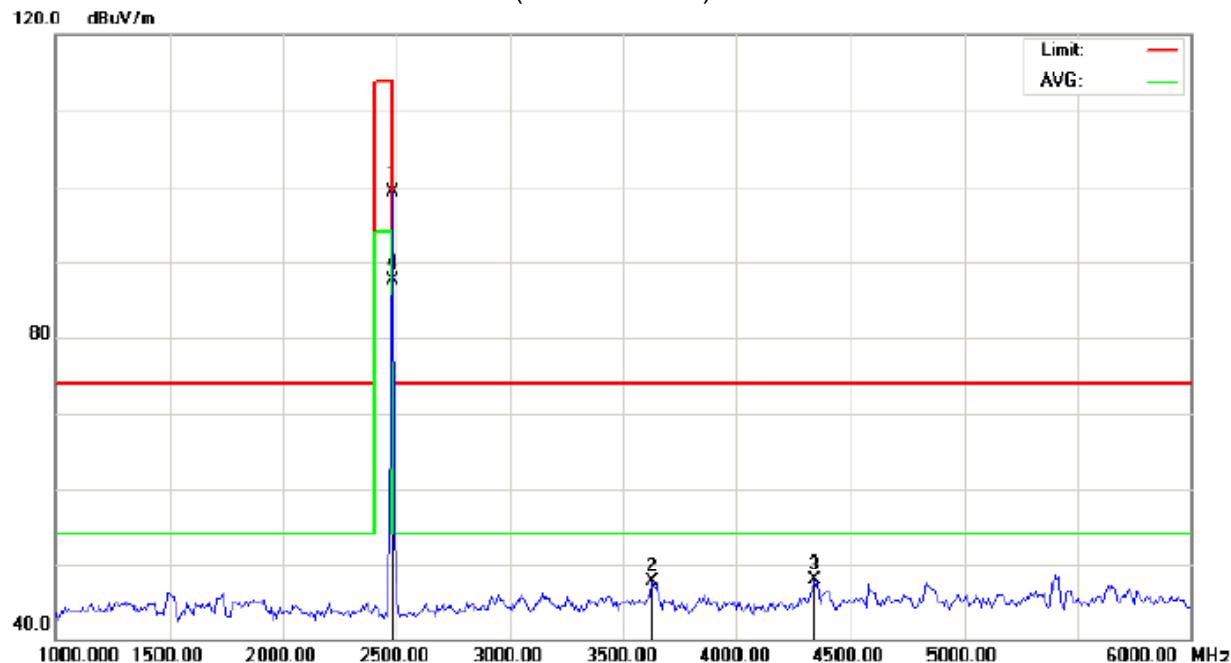


Site: site #1 Polarization: **Horizontal** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Audio Receiver Distance: 3m
M/N: MBT-CRX
Mode: High Channel TX
Note:

No.	Mlk *	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	2480.000	108.83	-9.59	99.24	114.00	-14.76	peak				
2	3625.000	54.90	-7.12	47.78	74.00	-26.22	peak				
3	4341.667	51.59	-3.65	47.94	74.00	-26.06	peak				
4	*	2480.000	97.21	-9.59	87.62	94.00	-6.38	AVG	150	41	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

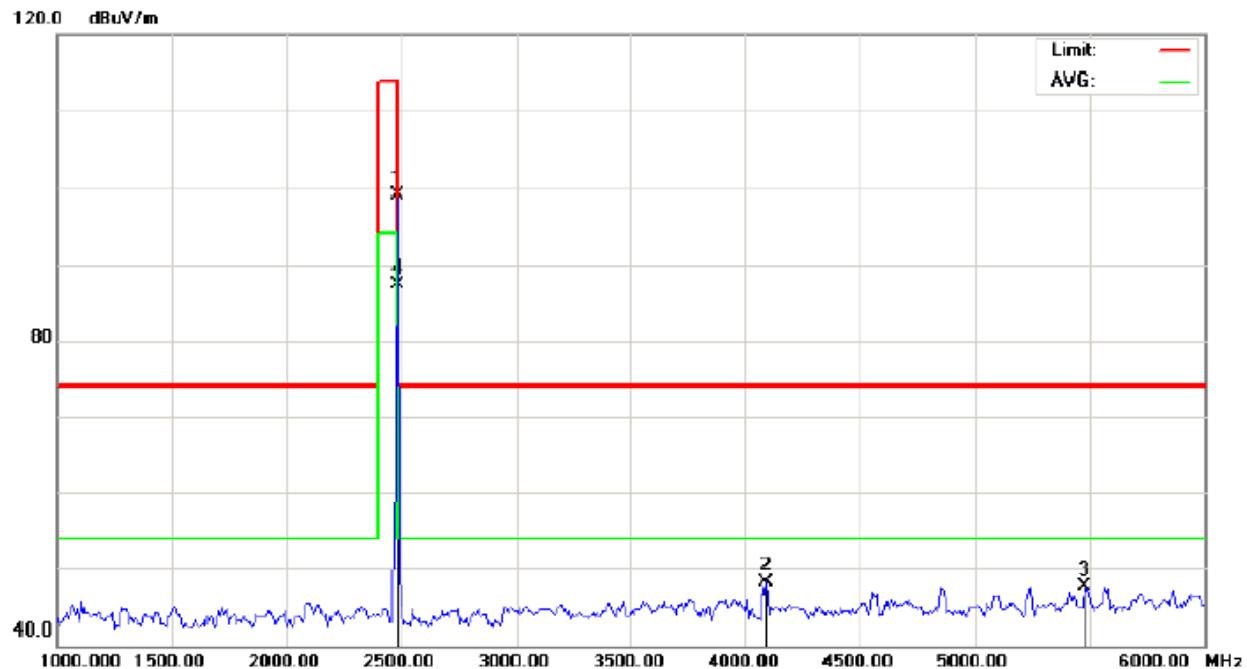

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Audio Receiver Distance: 3m
M/N: MBT-CRX
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	108.40	-9.59	98.81	114.00	-15.19	peak			
2		4091.667	52.78	-4.50	48.28	74.00	-25.72	peak			
3		5475.000	49.42	-1.81	47.61	74.00	-26.39	peak			
4	*	2480.000	96.89	-9.59	87.30	94.00	-6.70	AVG	150	0	

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	107.72	-9.68	98.04	114	-15.96	Horizontal
2402	107.70	-9.68	98.02	114	-15.98	Vertical
2440	108.29	-9.64	98.65	114	-15.35	Horizontal
2440	108.24	-9.64	98.60	114	-15.40	Vertical
2480	108.83	-9.59	99.24	114	-14.76	Horizontal
2480	108.40	-9.59	98.81	114	-15.19	Vertical

Average value

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	97.66	-9.68	87.98	94	-6.02	Horizontal
2402	97.43	-9.68	87.75	94	-6.25	Vertical
2440	96.98	-9.64	87.34	94	-6.66	Horizontal
2440	97.54	-9.64	87.90	94	-6.10	Vertical
2480	97.21	-9.59	87.62	94	-6.38	Horizontal
2480	96.89	-9.59	87.30	94	-6.70	Vertical

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE

1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.


2Max hold the trace of the step 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1.5MHz / Sweep=AUTO


(b) AVERAGE: RBW=1.5MHz ; VBW=1/on time(1KHz) / Sweep=AUTO

9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

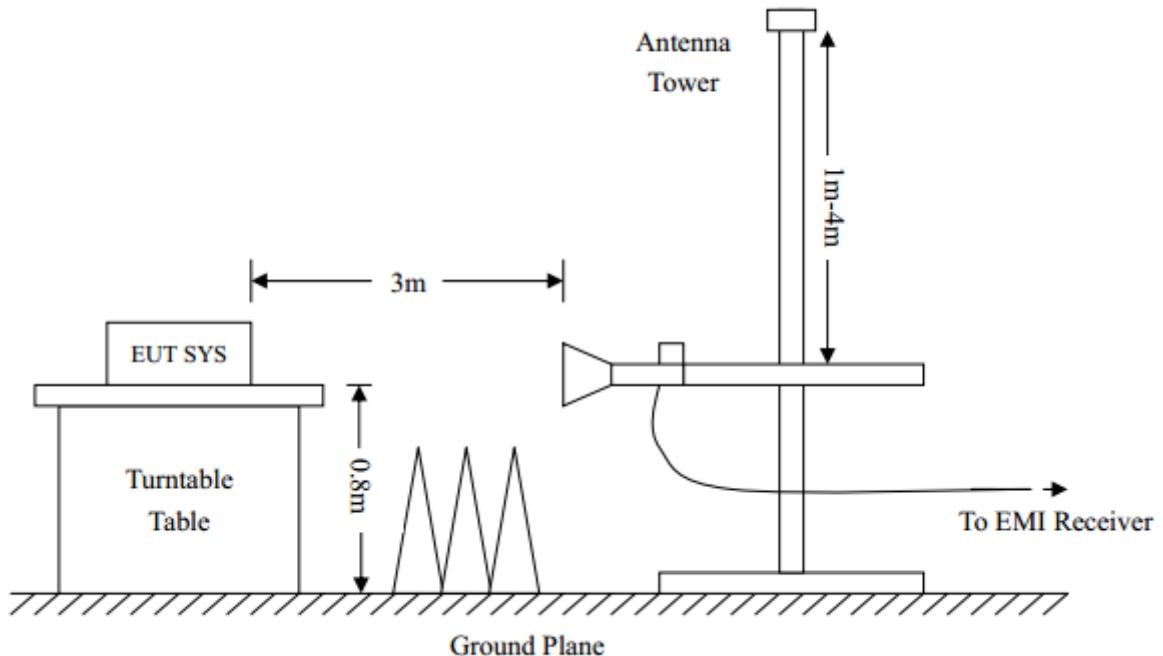

CONDUCTED TEST SETUP

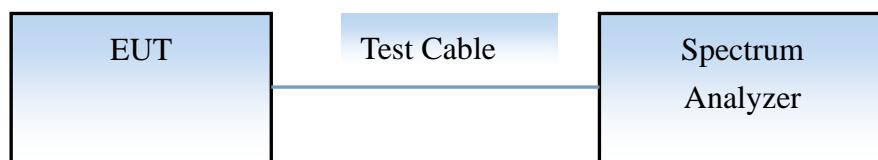


9.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

FOR BR/EDR BLEUTOOTH

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

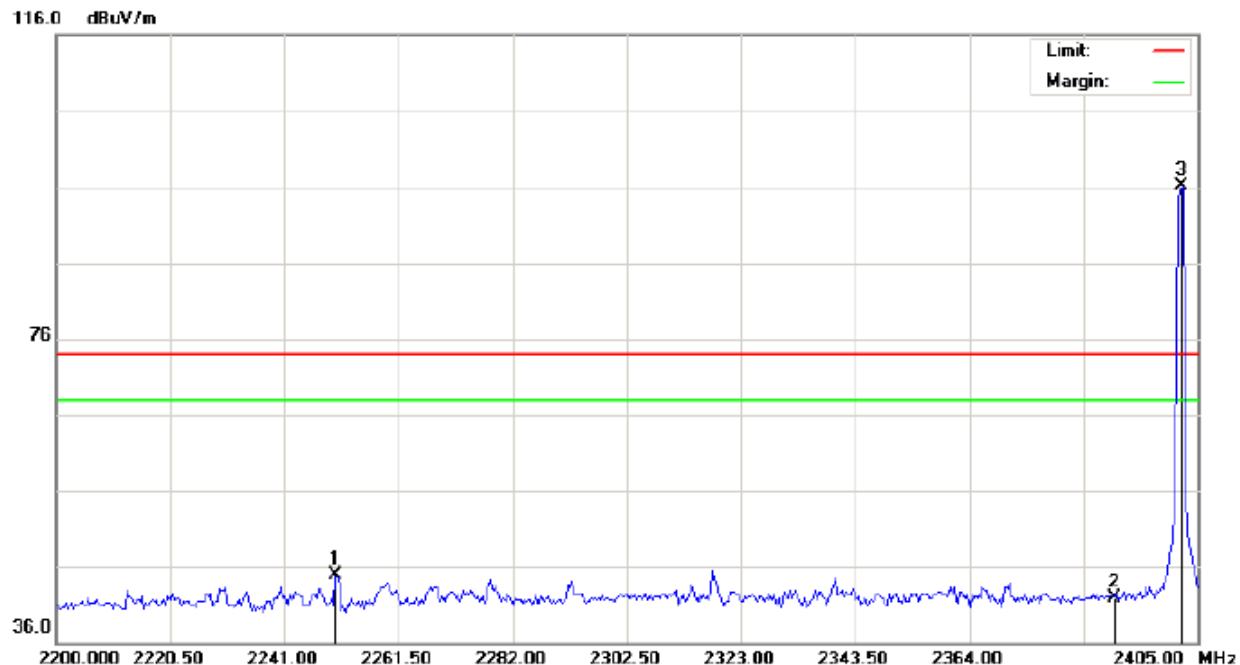

Site: site #1 Polarization: *Horizontal* Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Audio Receiver Distance: 1000 m


M/N: MBT-CRX

Mode: Low Channel TX

Note:-

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2250.225	34.66	10.16	44.82	74.00	-29.18	peak			
2		2390.000	31.50	10.31	41.81	74.00	-32.19	peak			
3	*	2402.000	85.72	10.32	96.04	74.00	22.04	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL –Vertical

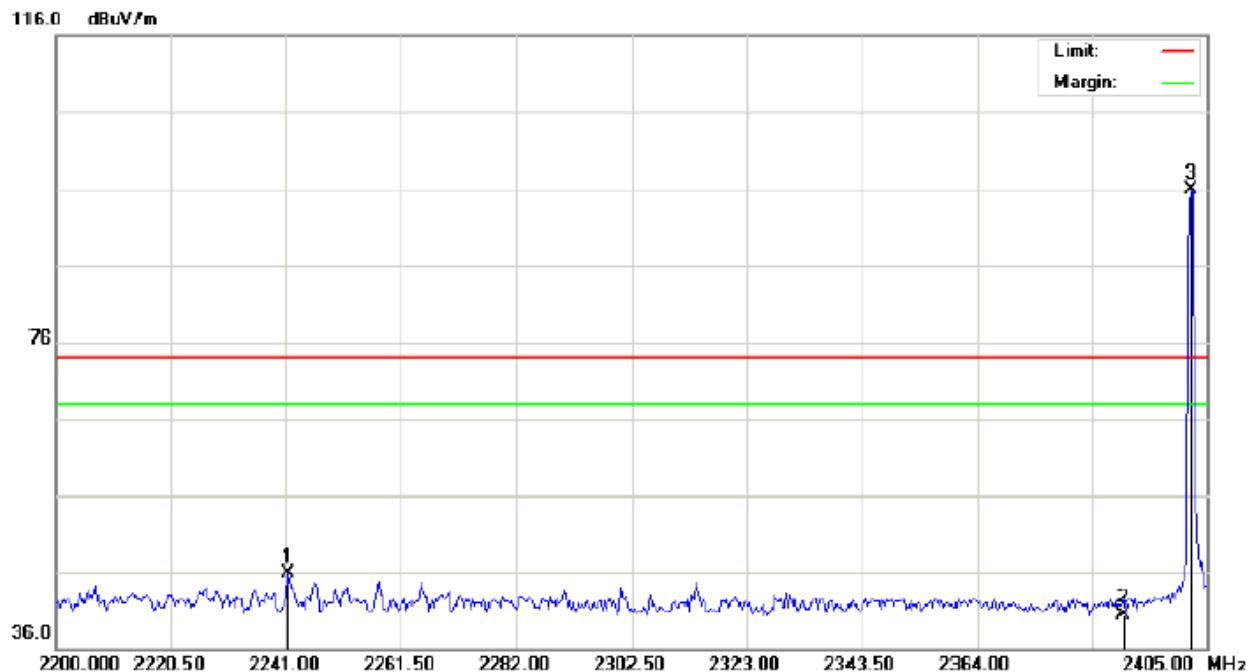

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Audio Receiver Distance:
M/N: MBT-CRX
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2241.342	35.75	10.15	45.90	74.00	-28.10	peak			
2		2390.000	30.21	10.31	40.52	74.00	-33.48	peak			
3	*	2402.000	85.61	10.32	95.93	74.00	21.93	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

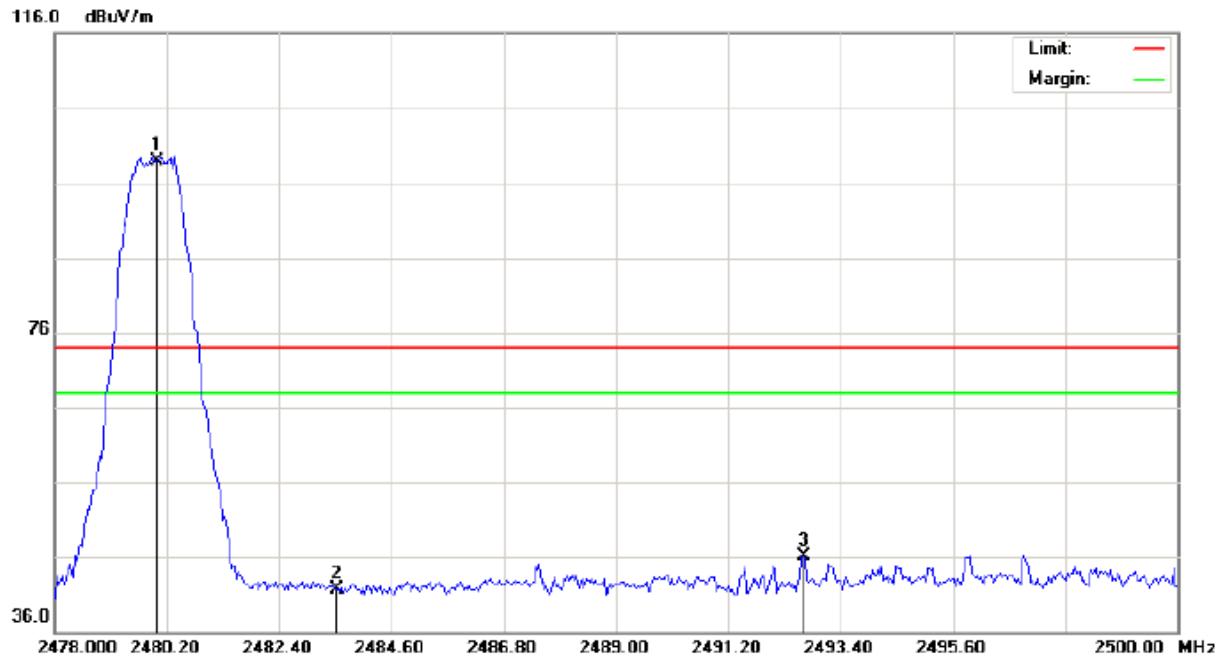

Site: site #1 Polarization: *Horizontal* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT: Bluetooth Audio Receiver Distance:
 M/N: MBT-CRX
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.55	10.41	98.96	74.00	24.96	peak			
2		2483.530	31.32	10.41	41.73	74.00	-32.27	peak			
3		2492.667	35.71	10.42	46.13	74.00	-27.87	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

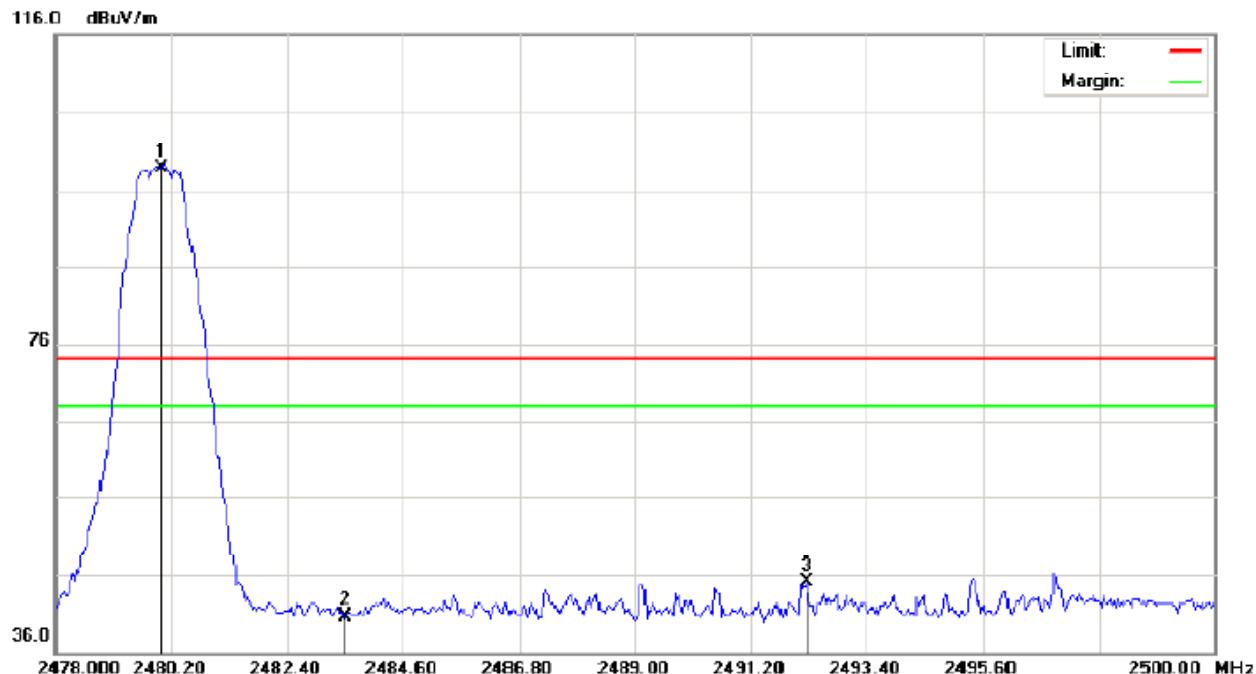

Site: site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT: Bluetooth Audio Receiver Distance:
 M/N: MBT-CRX
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.32	10.41	98.73	74.00	24.73	peak			
2		2483.500	30.26	10.41	40.67	74.00	-33.33	peak			
3		2492.263	34.77	10.42	45.19	74.00	-28.81	peak			

RESULT: PASS


Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

FOR BLE


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

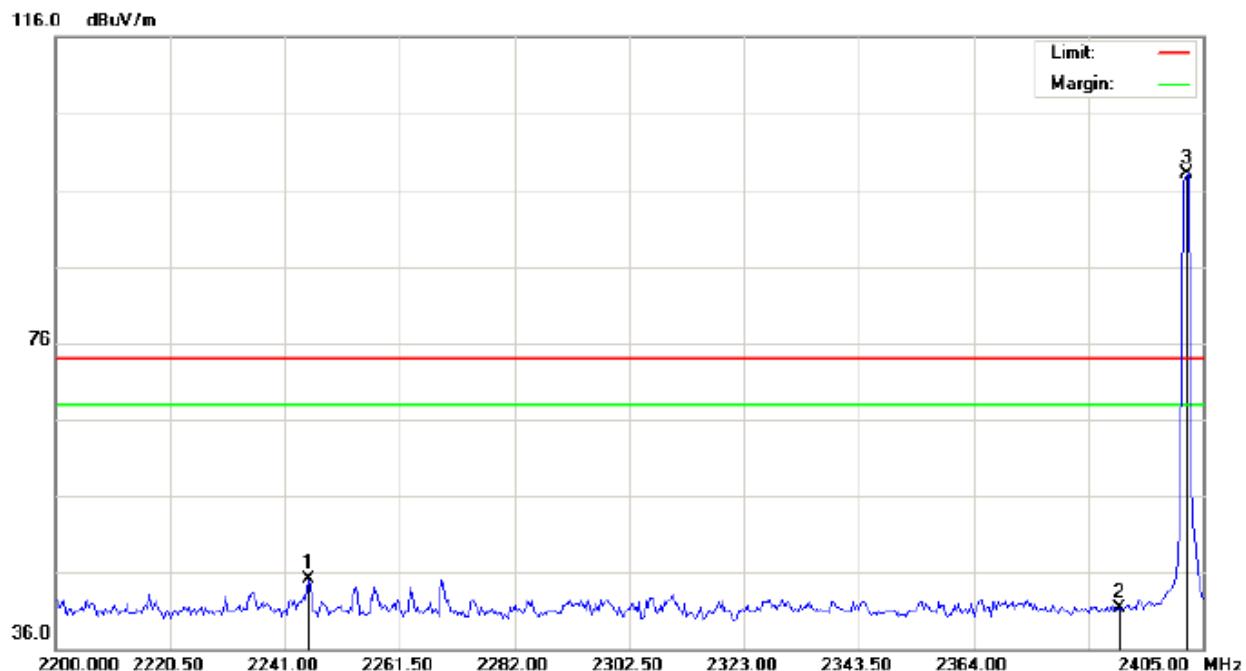

Site: site #1 Polarization: *Horizontal* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT: Bluetooth Audio Receiver Distance:
 M/N: MBT-CRX
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2245.100	35.04	10.15	45.19	74.00	-28.81	peak			
2		2390.000	31.00	10.31	41.31	74.00	-32.69	peak			
3	*	2402.000	87.72	10.32	98.04	74.00	24.04	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL –Vertical

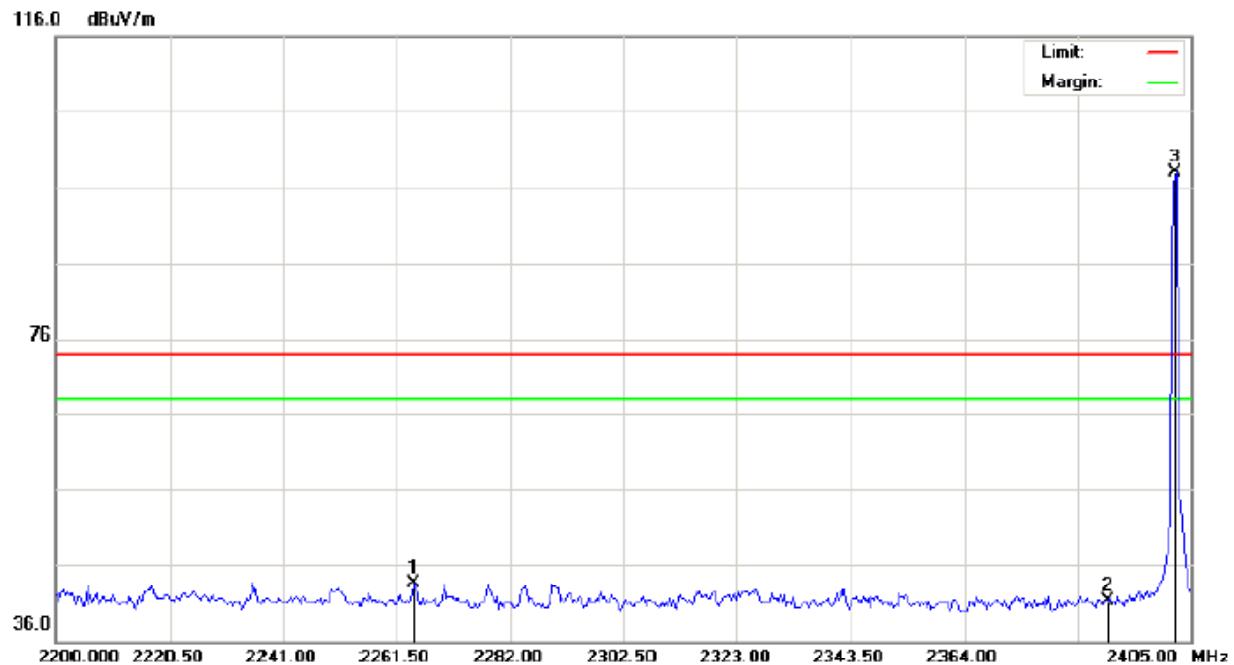

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Audio Receiver Distance:
M/N: MBT-CRX
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2264.575	33.41	10.17	43.58	74.00	-30.42	peak			
2		2390.000	30.71	10.31	41.02	74.00	-32.98	peak			
3	*	2402.000	87.59	10.32	97.91	74.00	23.91	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

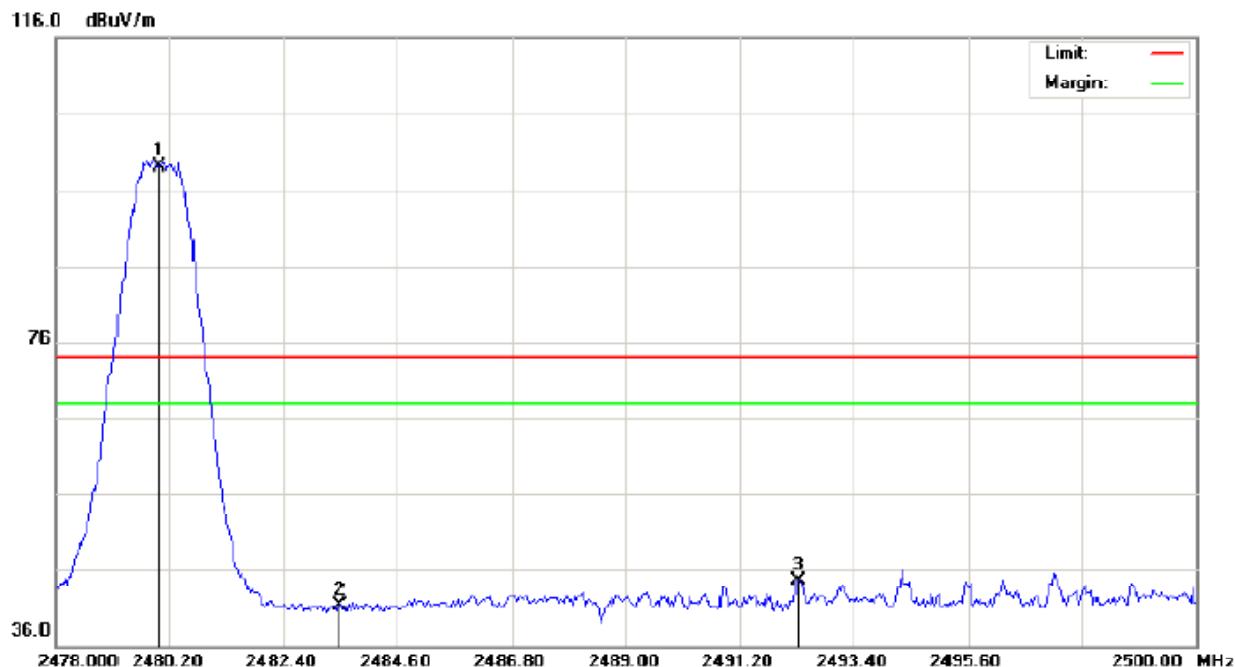

Site: site #1 Polarization: **Horizontal** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Audio Receiver Distance:
M/N: MBT-CRX
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.55	10.41	98.96	74.00	24.96	peak			
2		2483.500	30.69	10.41	41.10	74.00	-32.90	peak			
3		2492.337	34.11	10.42	44.53	74.00	-29.47	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

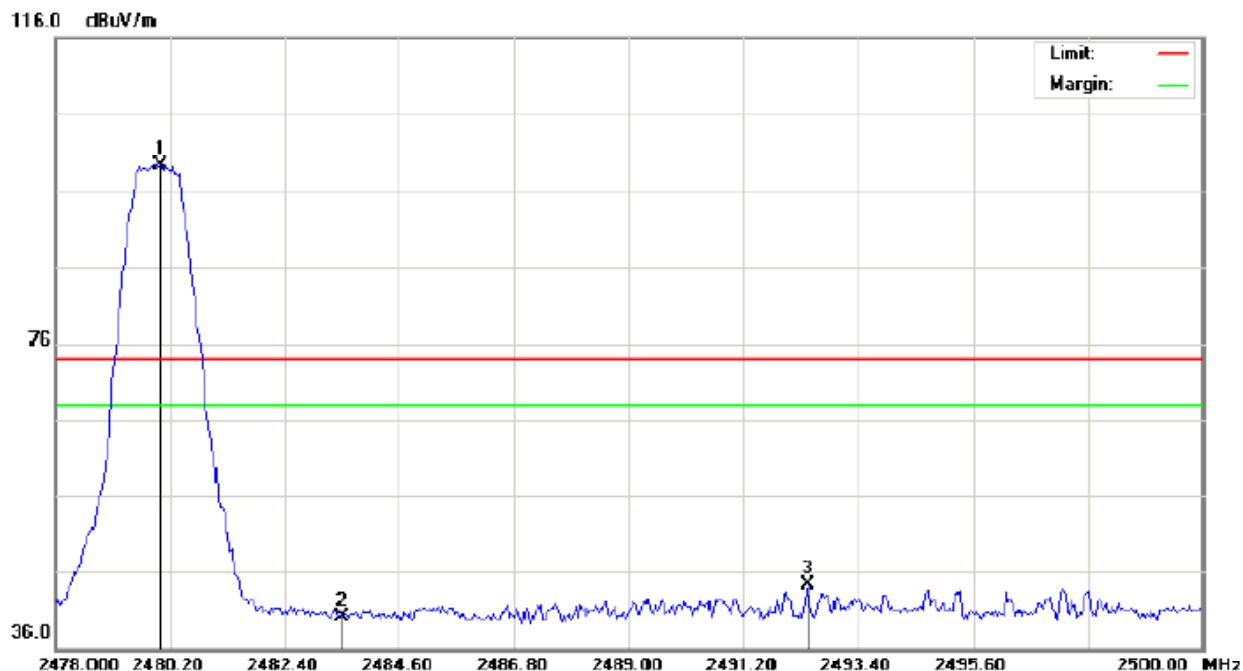

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Audio Receiver Distance:
M/N: MBT-CRX
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.82	10.41	99.23	74.00	25.23	peak			
2		2483.500	29.76	10.41	40.17	74.00	-33.83	peak			
3		2492.447	33.80	10.42	44.22	74.00	-29.78	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The “Factor” value can be calculated automatically by software of measurement system.


10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 $RBW \geq 1\%$ of the 20 dB bandwidth, $VBW \geq RBW$; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP

(BLOCK DIAGRAM OF CONFIGURATION)

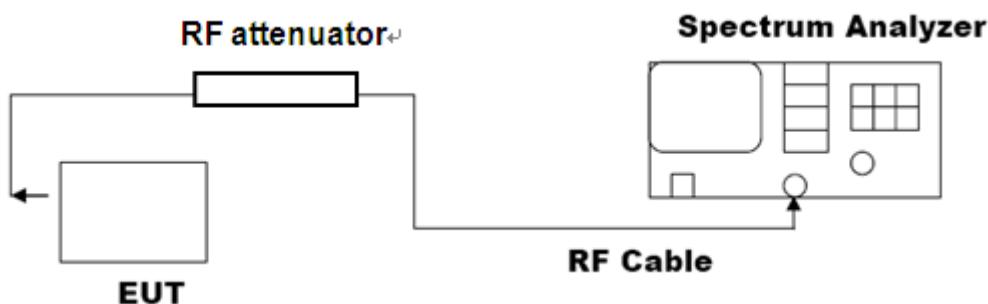


10.3. LIMITS AND MEASUREMENT RESULTS

FOR BR/EDR BLUETOOTH

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULTS			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
N/A	Low Channel	0.938	PASS
	Middle Channel	0.805	PASS
	High Channel	0.803	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

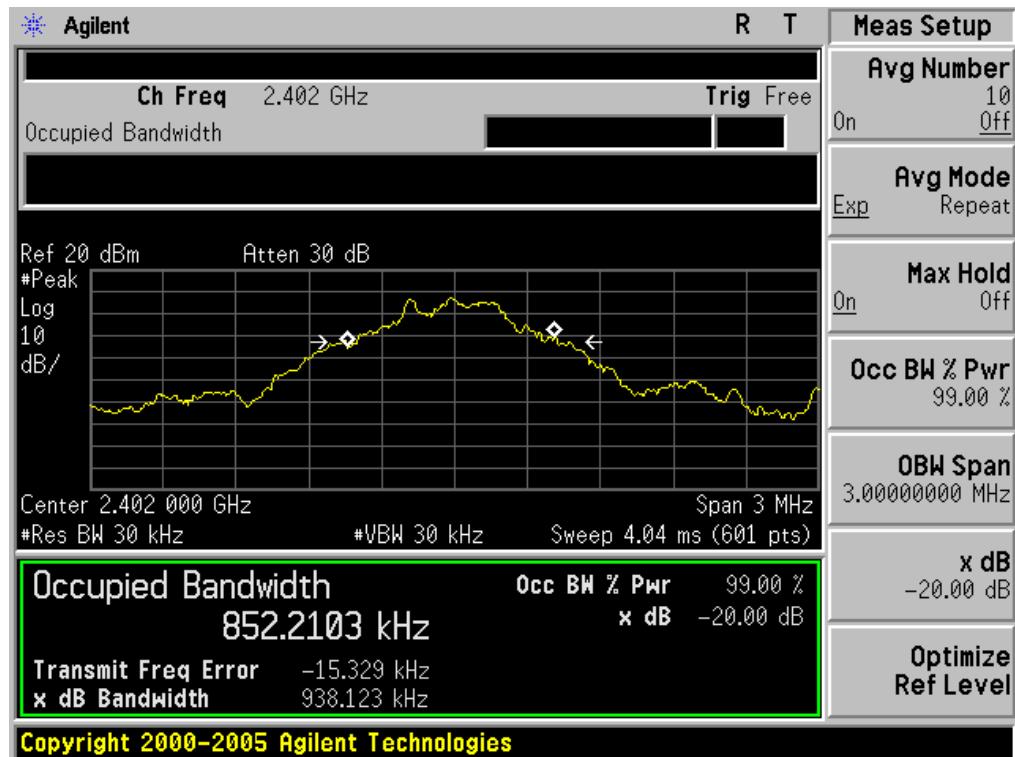

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL




TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

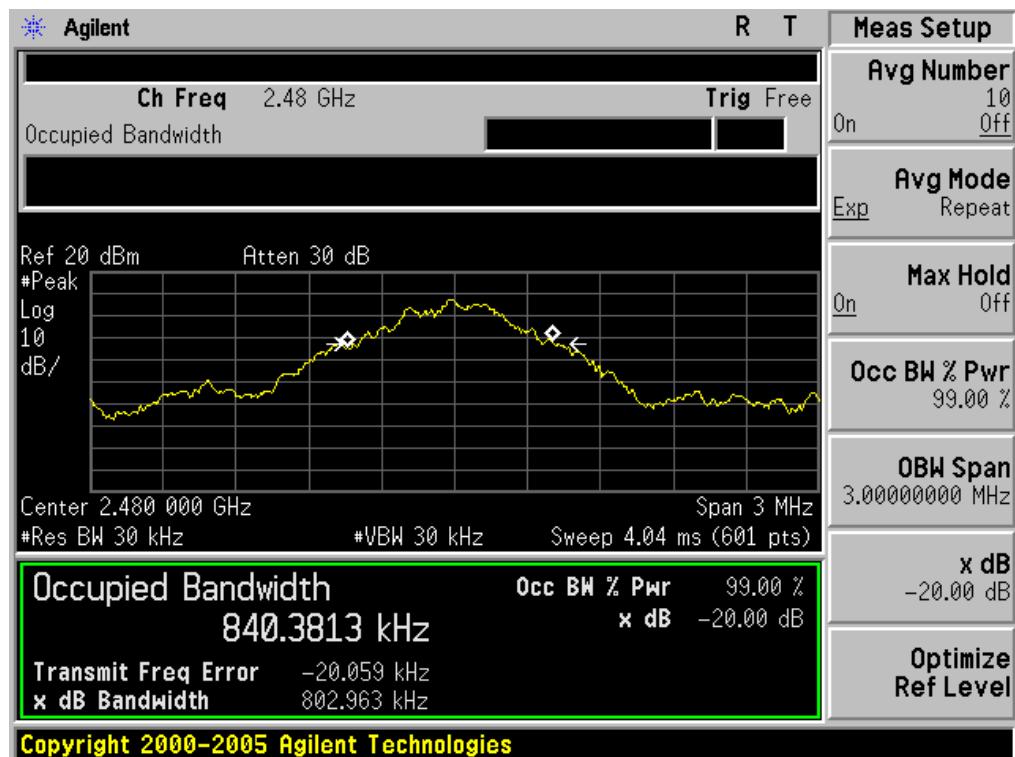


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.289	PASS
	Middle Channel	1.215	PASS
	High Channel	1.222	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

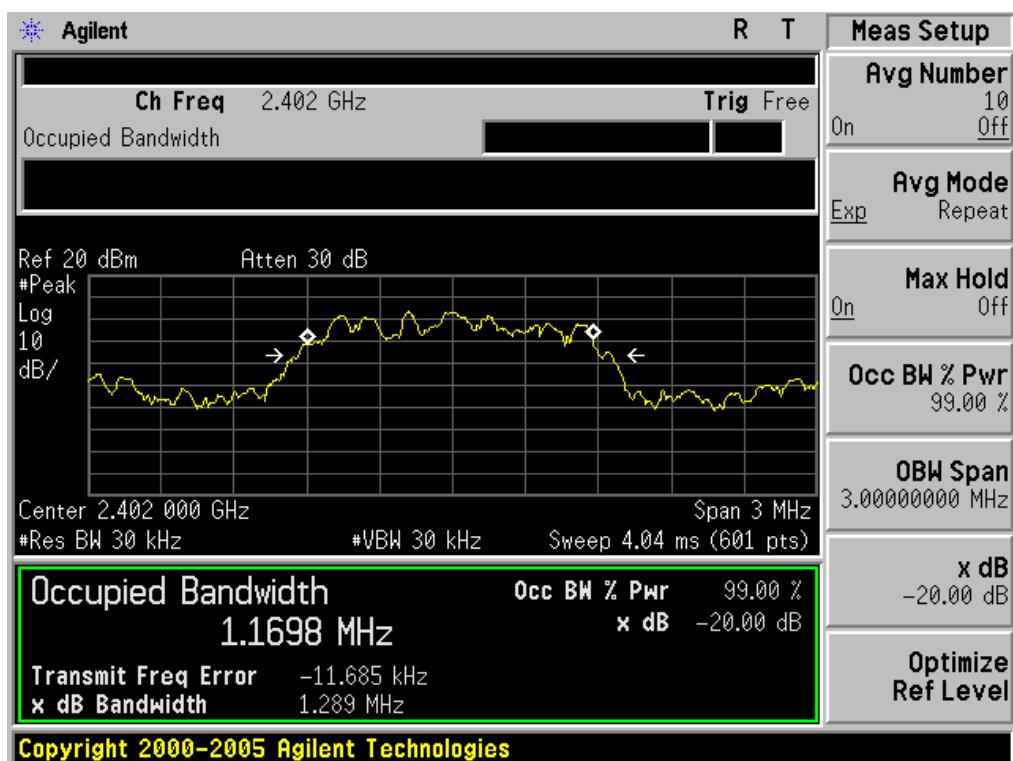

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

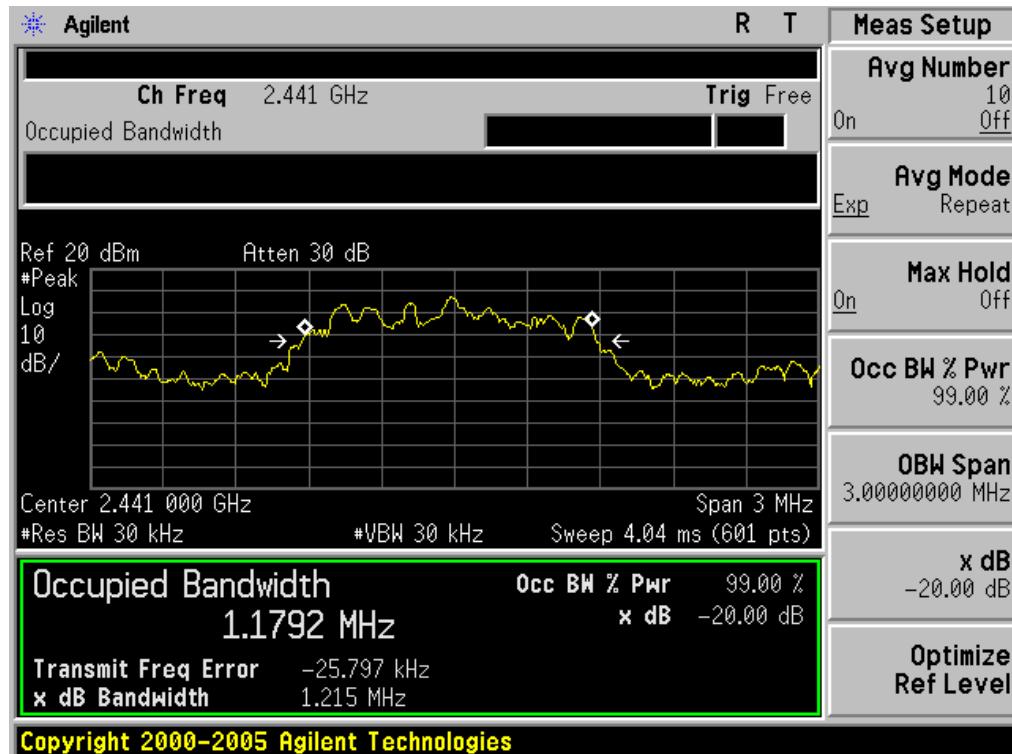


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

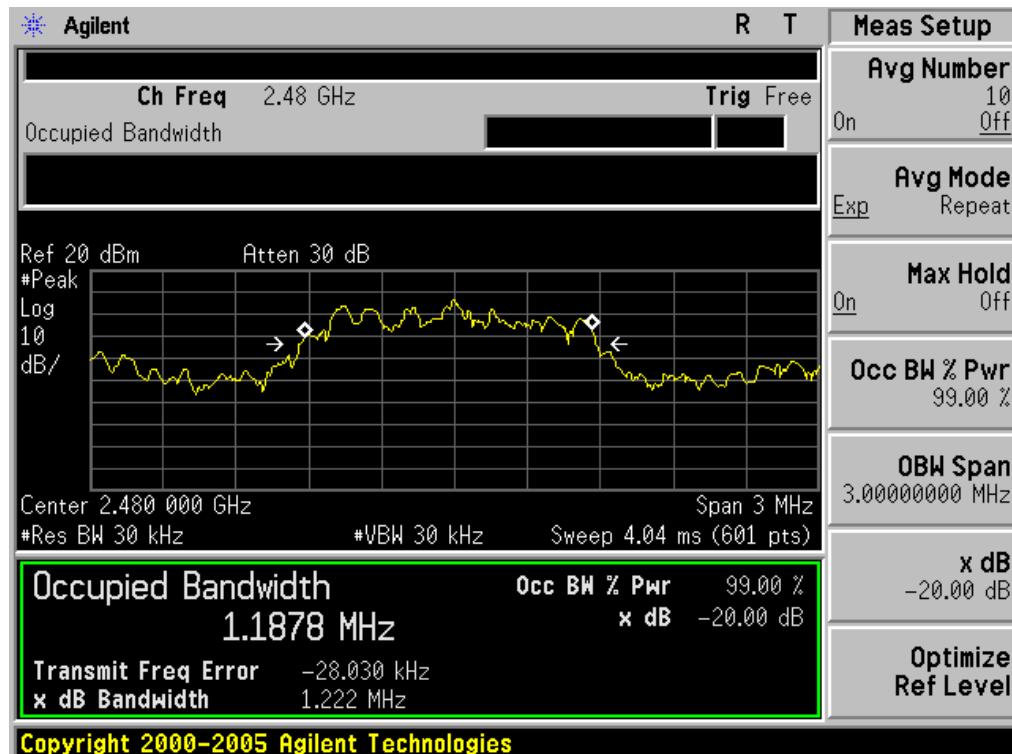


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.201	PASS
	Middle Channel	1.197	PASS
	High Channel	1.227	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

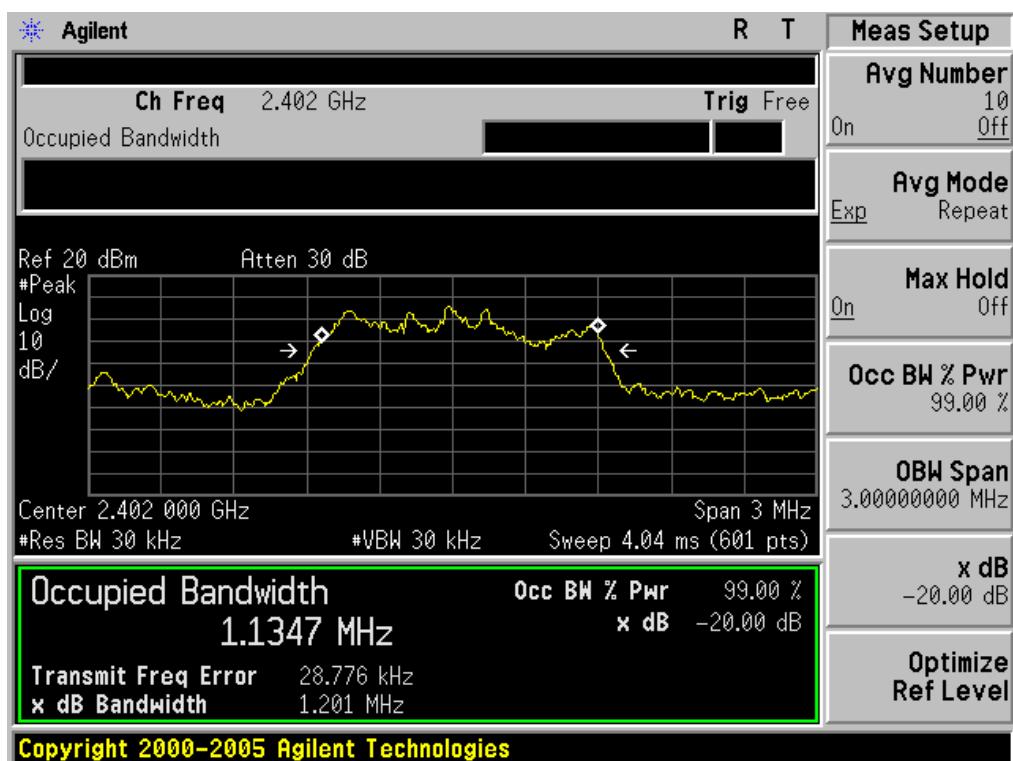

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

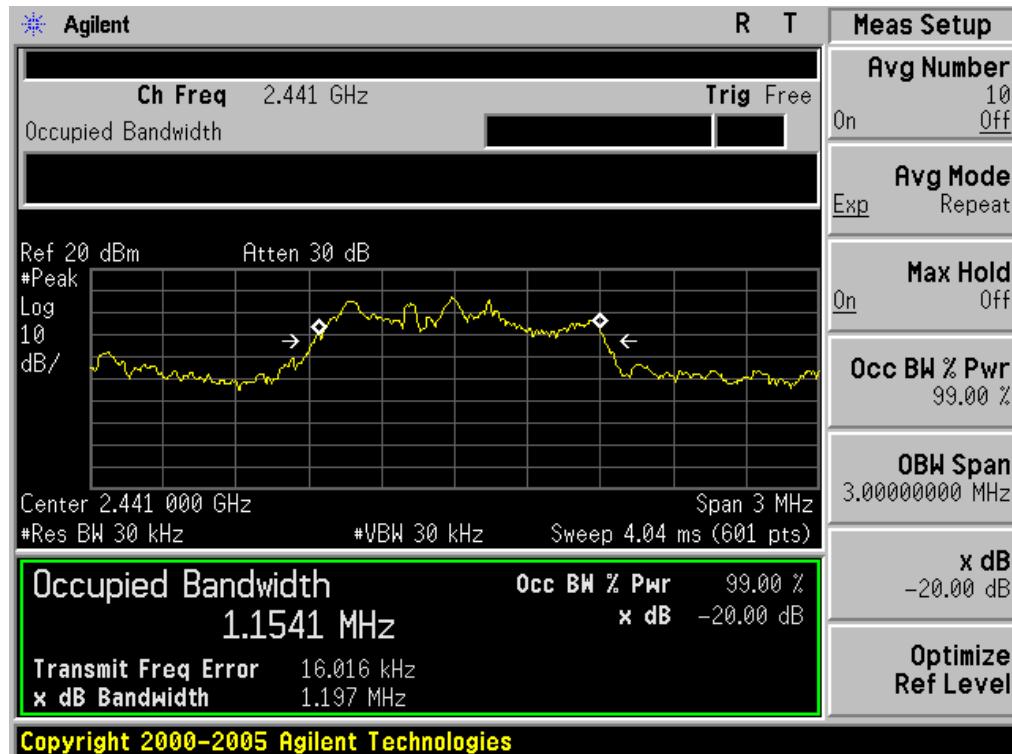


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

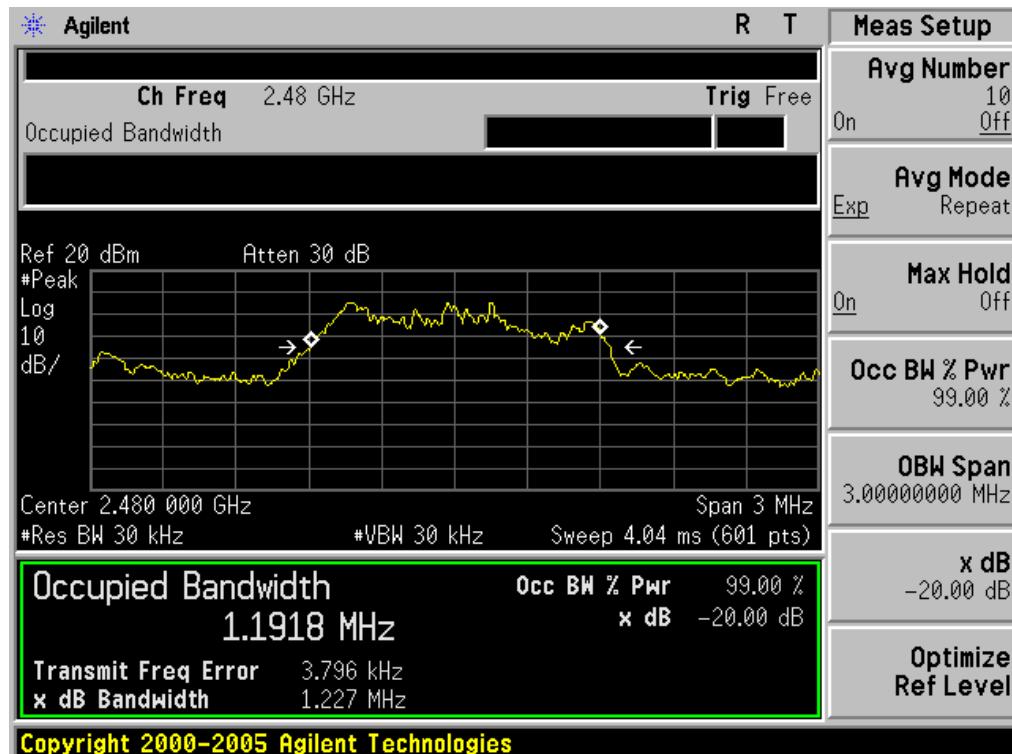


FOR BLE

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
N/A	Low Channel	1.213	PASS
	Middle Channel	1.213	PASS
	High Channel	1.198	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

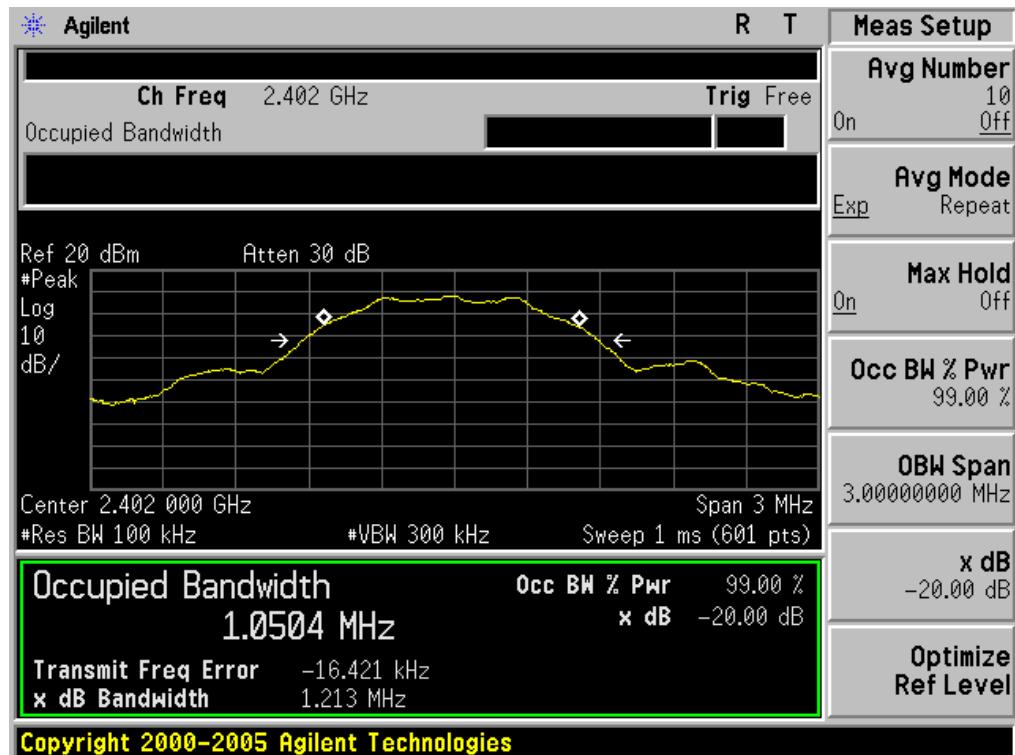

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

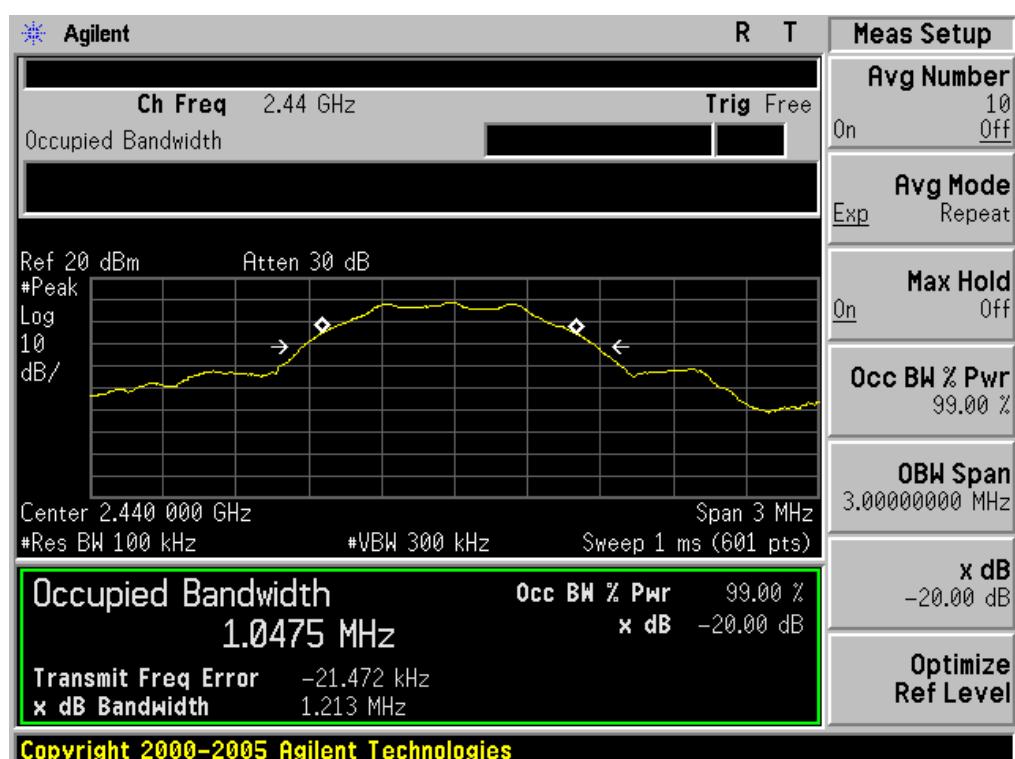

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

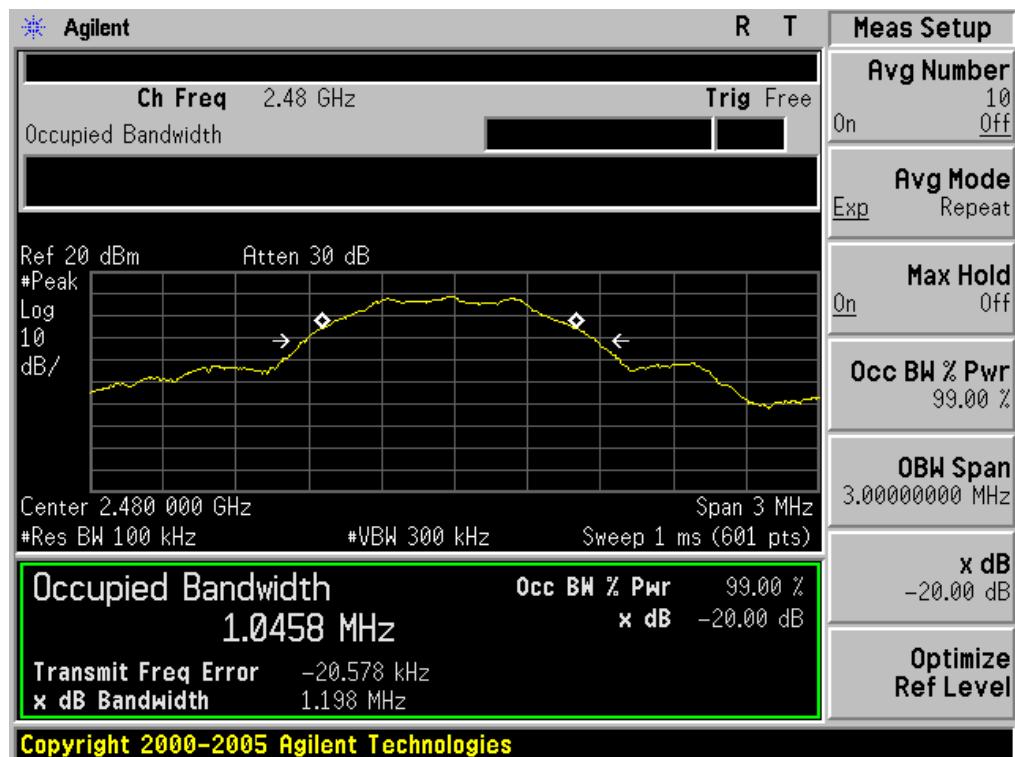

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

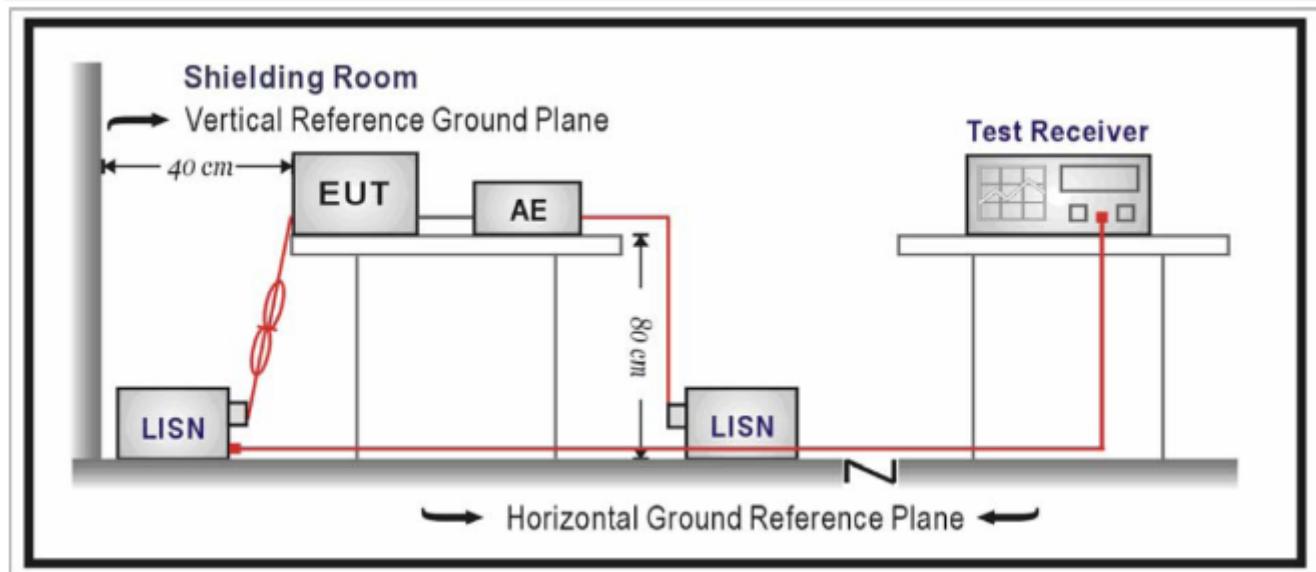

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by PC which received 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.


**11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST
FOR BR/EDR BLUETOOTH**

Line Conducted Emission Test Line 1-L

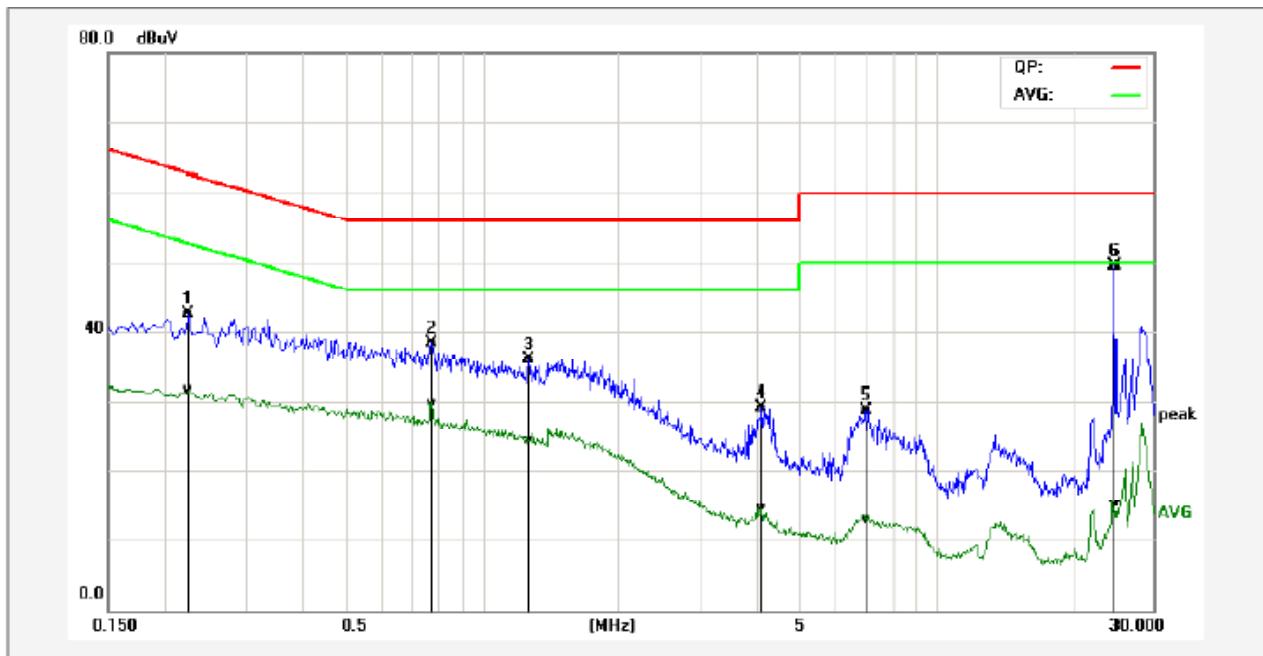

No.	Frequency (MHz)	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading (dBuV)	reading (dBuV)	factor (dB)	result (dBuV)	result (dBuV)	limit (dBuV)	limit (dBuV)	margin (dB)	margin (dB)	
1P	0.2260	32.86	21.86	9.69	42.55	31.55	62.59	52.60	-20.04	-21.05	Pass
2P	0.7780	28.59	20.03	9.77	38.36	29.80	56.00	46.00	-17.64	-16.20	Pass
3P	1.2660	26.18	14.57	9.72	35.90	24.29	56.00	46.00	-20.10	-21.71	Pass
4P	4.1300	19.49	4.79	9.70	29.19	14.49	56.00	46.00	-26.81	-31.51	Pass
5P	7.0620	18.99	3.11	9.78	28.77	12.89	60.00	50.00	-31.23	-37.11	Pass
6*	24.6740	39.61	5.25	9.89	49.50	15.14	60.00	50.00	-10.50	-34.86	Pass


Line Conducted Emission Test Line 2-N

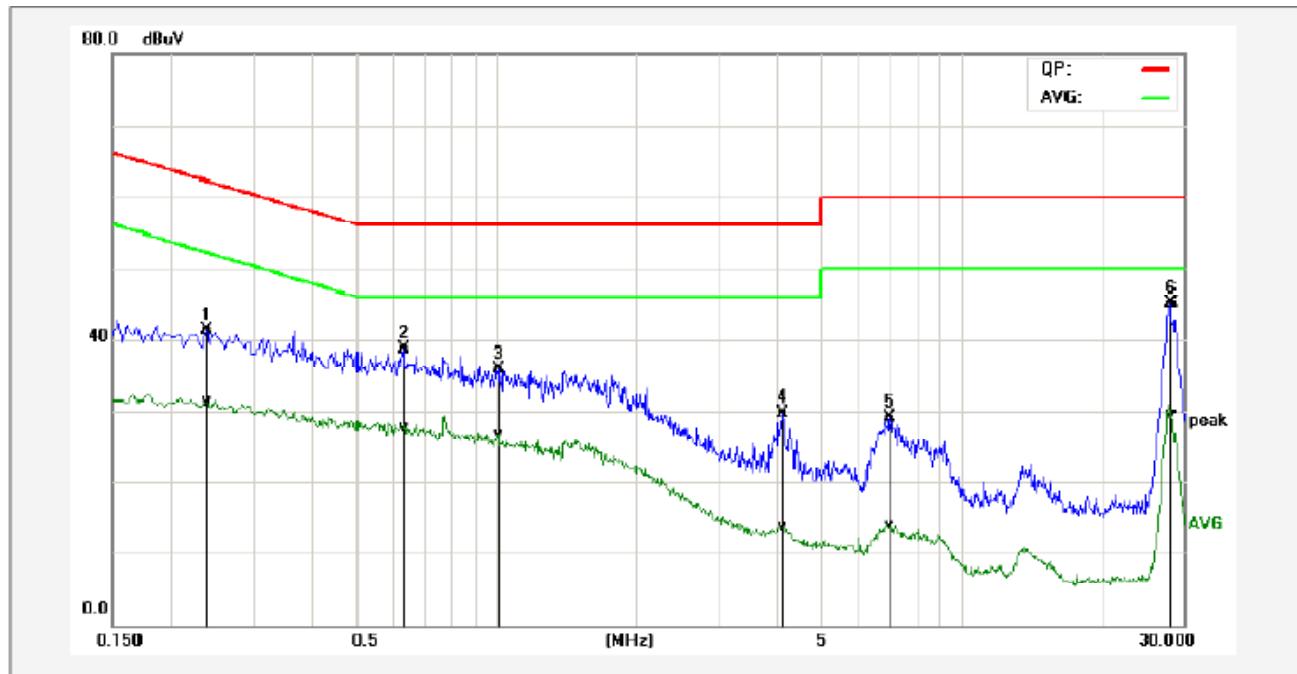

No.	Frequency (MHz)	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
		(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1P	0.2380	31.56	21.44	9.78	41.34	31.22	62.16	52.17	-20.82	-20.95	Pass
2P	0.6340	29.08	17.96	9.69	38.77	27.65	56.00	46.00	-17.23	-18.35	Pass
3P	1.0140	26.03	16.98	9.81	35.84	26.79	56.00	46.00	-20.16	-19.21	Pass
4P	4.1420	19.92	3.95	9.77	29.69	13.72	56.00	46.00	-26.31	-32.28	Pass
5P	7.0340	19.40	4.07	9.78	29.18	13.85	60.00	50.00	-30.82	-36.15	Pass
6*	28.2060	35.17	19.60	9.86	45.03	29.46	60.00	50.00	-14.97	-20.54	Pass


FOR BLE

Line Conducted Emission Test Line 1-L

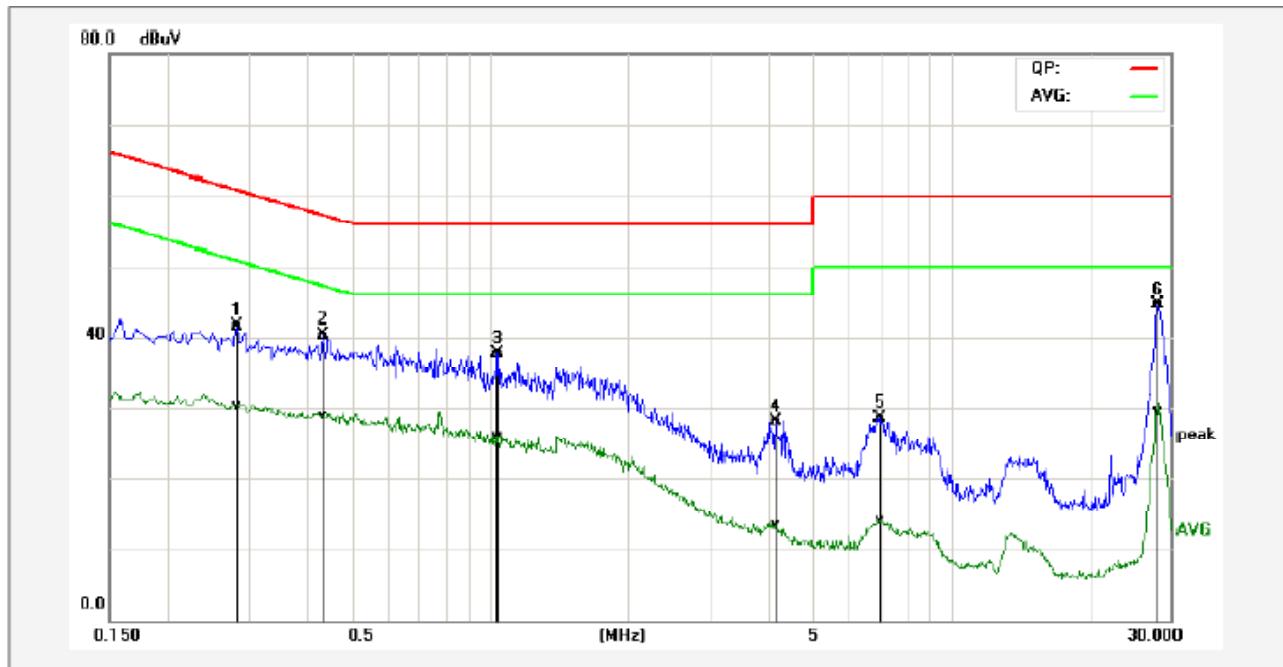

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1P	0.2819	31.73	20.55	9.69	41.42	30.24	60.76	50.76	-19.34	-20.52	Pass
2P	0.4340	30.60	19.28	9.68	40.28	28.96	57.18	47.18	-16.90	-18.22	Pass
3P	1.0420	27.99	16.12	9.71	37.70	25.83	56.00	46.00	-18.30	-20.17	Pass
4P	4.1660	18.42	3.53	9.70	28.12	13.23	56.00	46.00	-27.88	-32.77	Pass
5P	7.0180	18.74	4.03	9.78	28.52	13.81	60.00	50.00	-31.48	-36.19	Pass
6*	28.0900	34.47	19.47	9.96	44.43	29.43	60.00	50.00	-15.57	-20.57	Pass

Line Conducted Emission Test Line 2-N

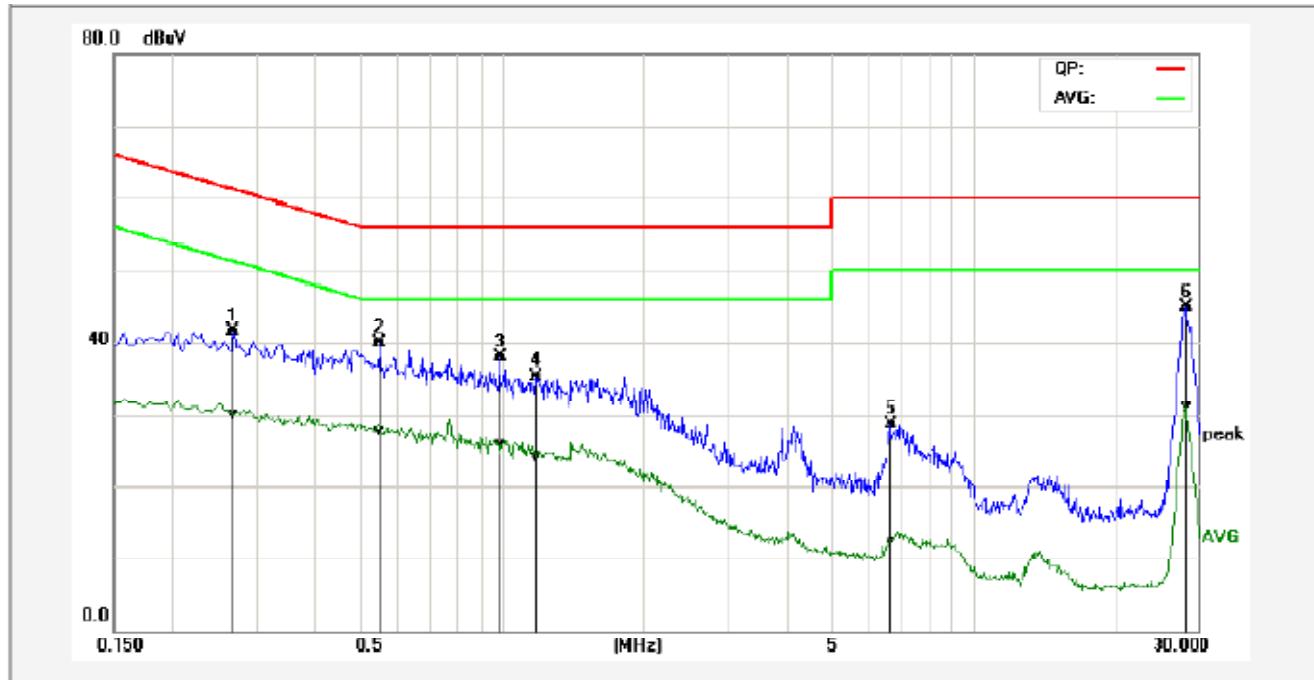

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.2700	31.77	20.28	9.77	41.54	30.05	61.12	51.12	-19.58	-21.07	Pass
2P	0.5500	30.17	17.97	9.68	39.85	27.65	56.00	46.00	-16.15	-18.35	Pass
3P	0.9940	28.11	16.17	9.81	37.92	25.98	56.00	46.00	-18.08	-20.02	Pass
4P	1.1900	25.48	14.53	9.79	35.27	24.32	56.00	46.00	-20.73	-21.68	Pass
5P	6.6820	18.90	2.75	9.78	28.68	12.53	60.00	50.00	-31.32	-37.47	Pass
6*	28.2100	35.01	21.26	9.86	44.87	31.12	60.00	50.00	-15.13	-18.88	Pass

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP




FCC RADIATED EMISSION TEST SETUP






APPENDIX B: PHOTOGRAPHS OF EUT
TOP VIEW OF EUT

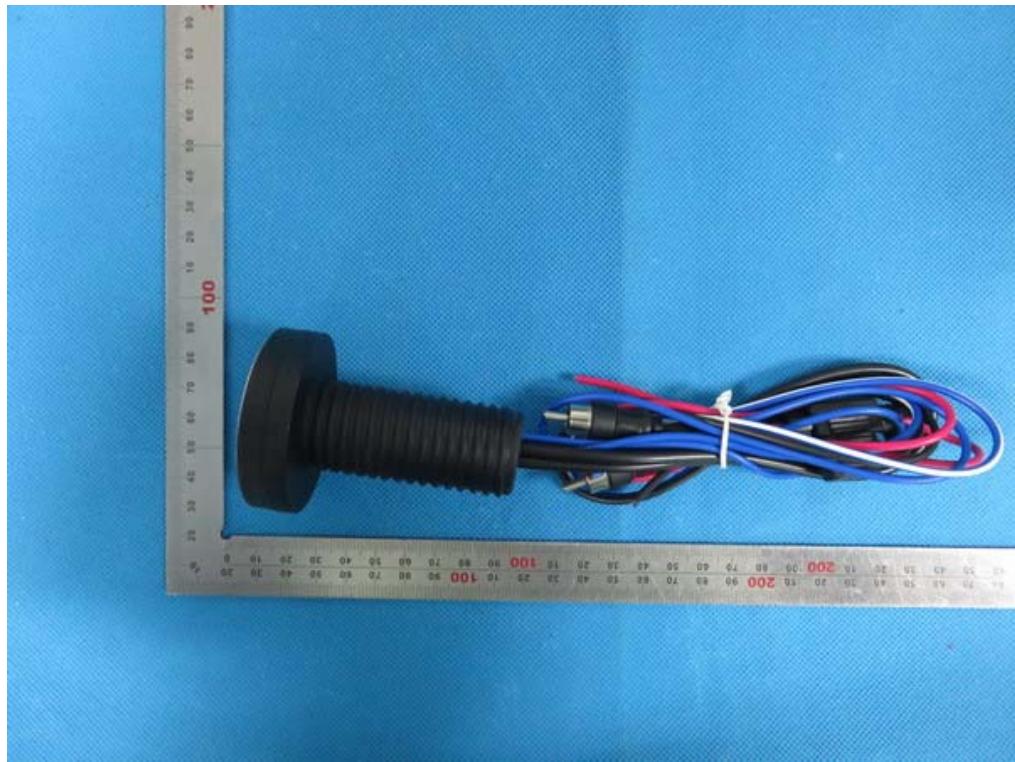

BOTTOM VIEW OF EUT

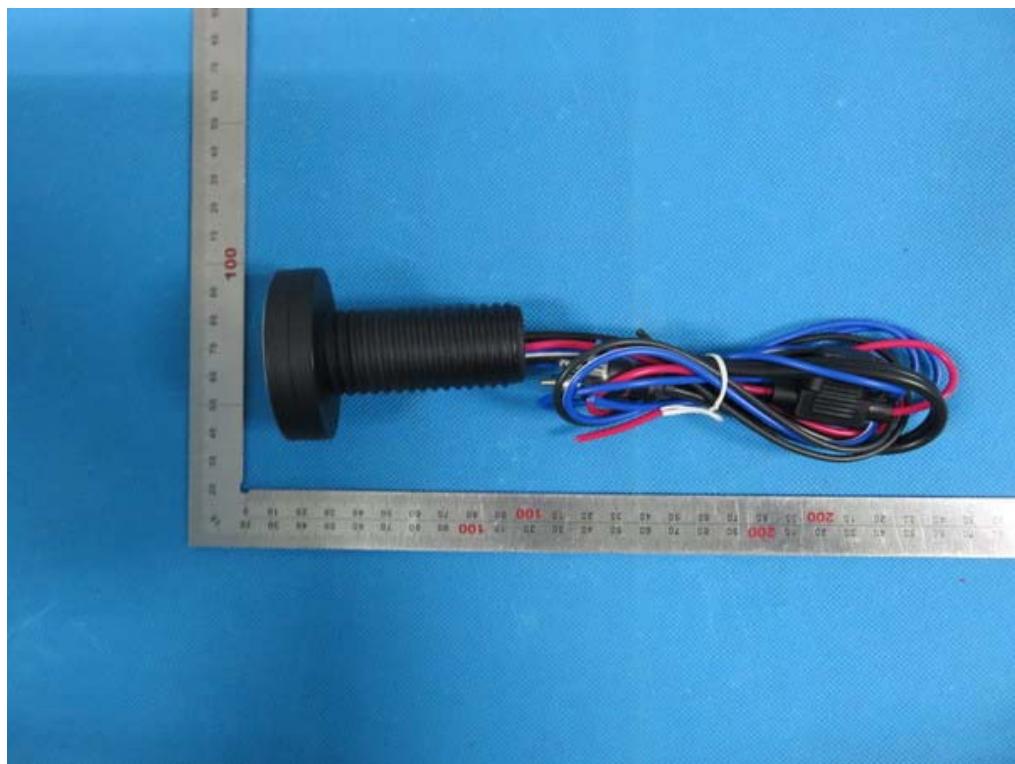


FRONT VIEW OF EUT



BACK VIEW OF EUT





LEFT VIEW OF EUT

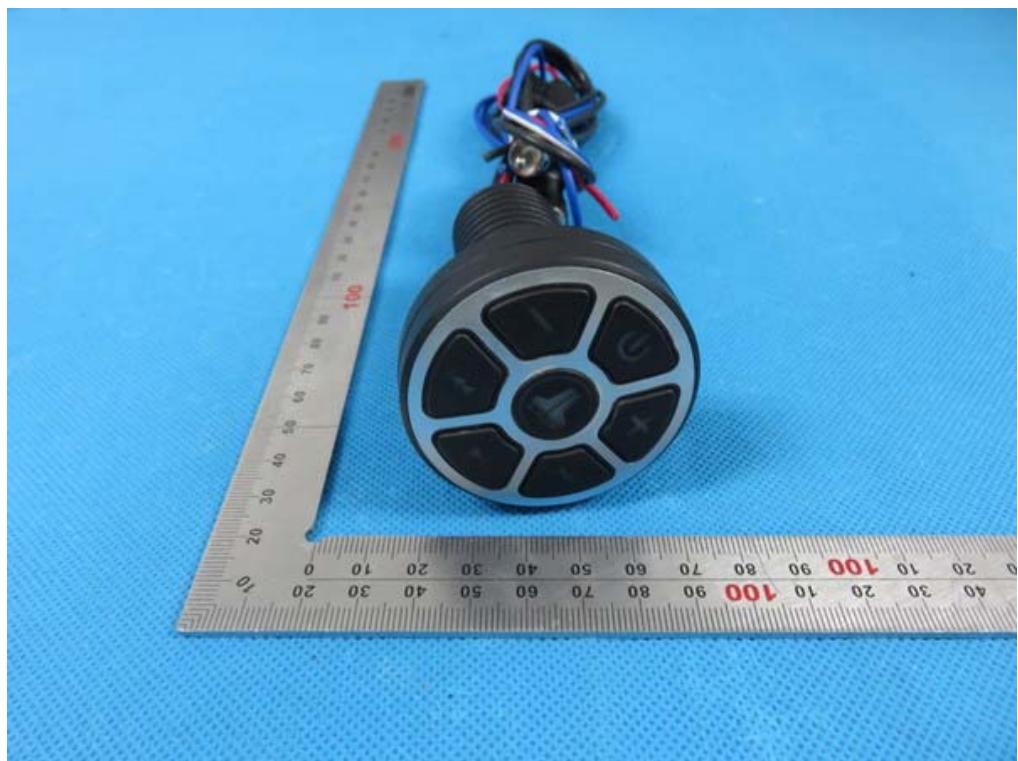


RIGHT VIEW OF EUT




OPEN VIEW OF EUT

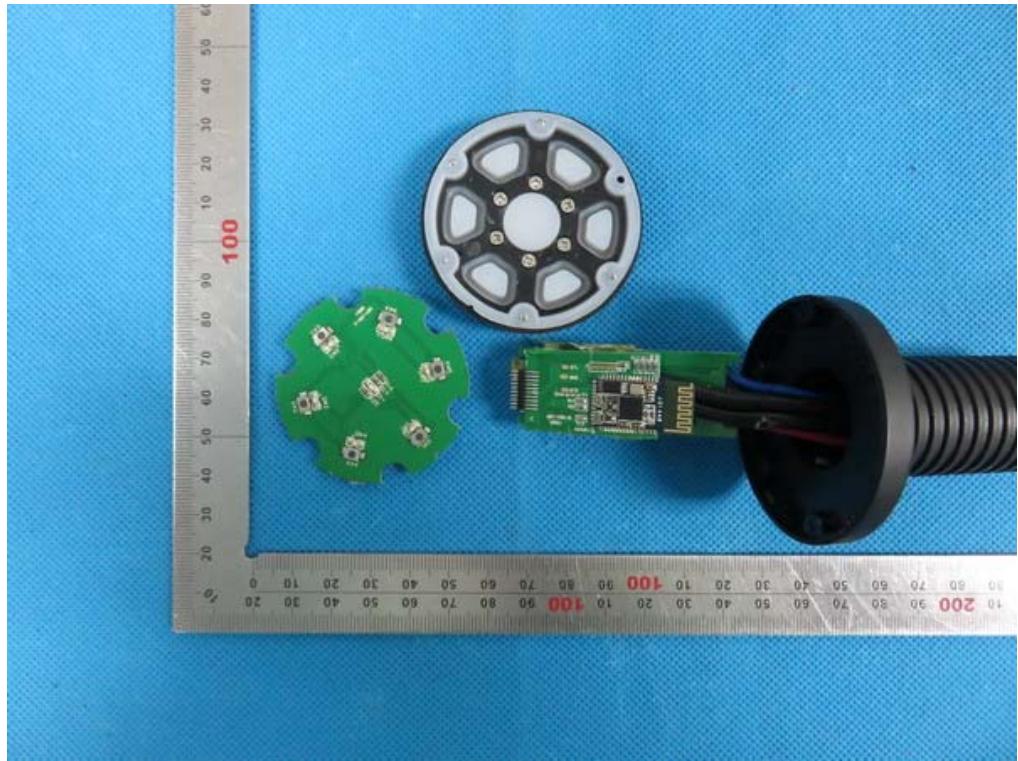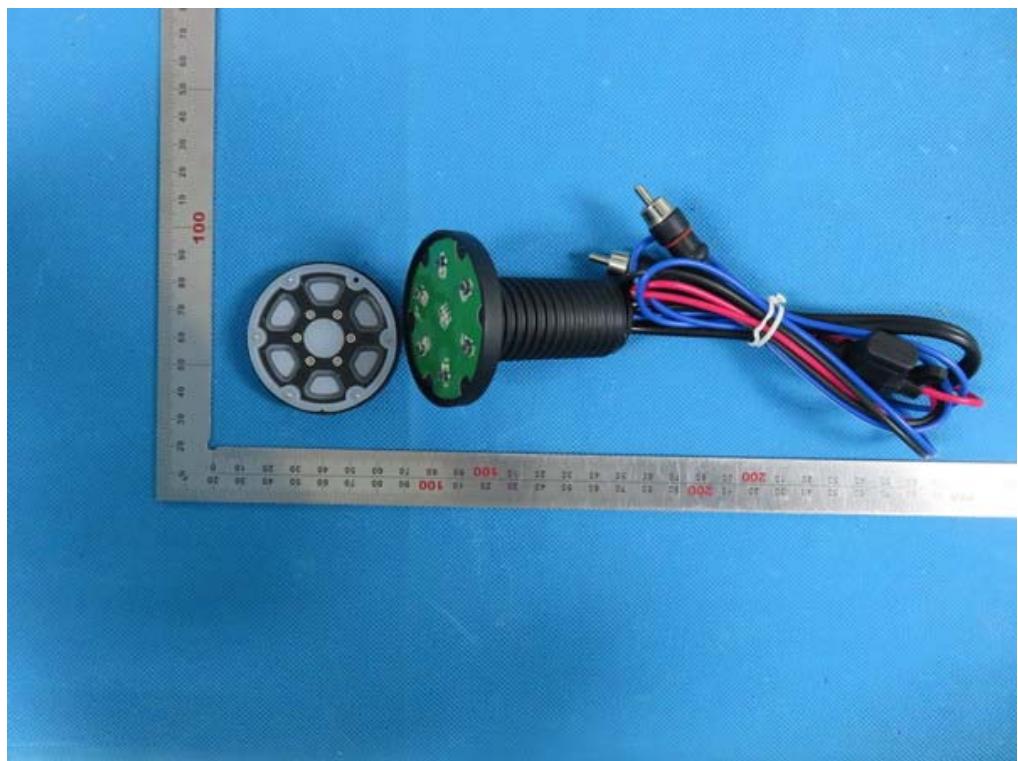


INTERNAL VIEW OF EUT-1

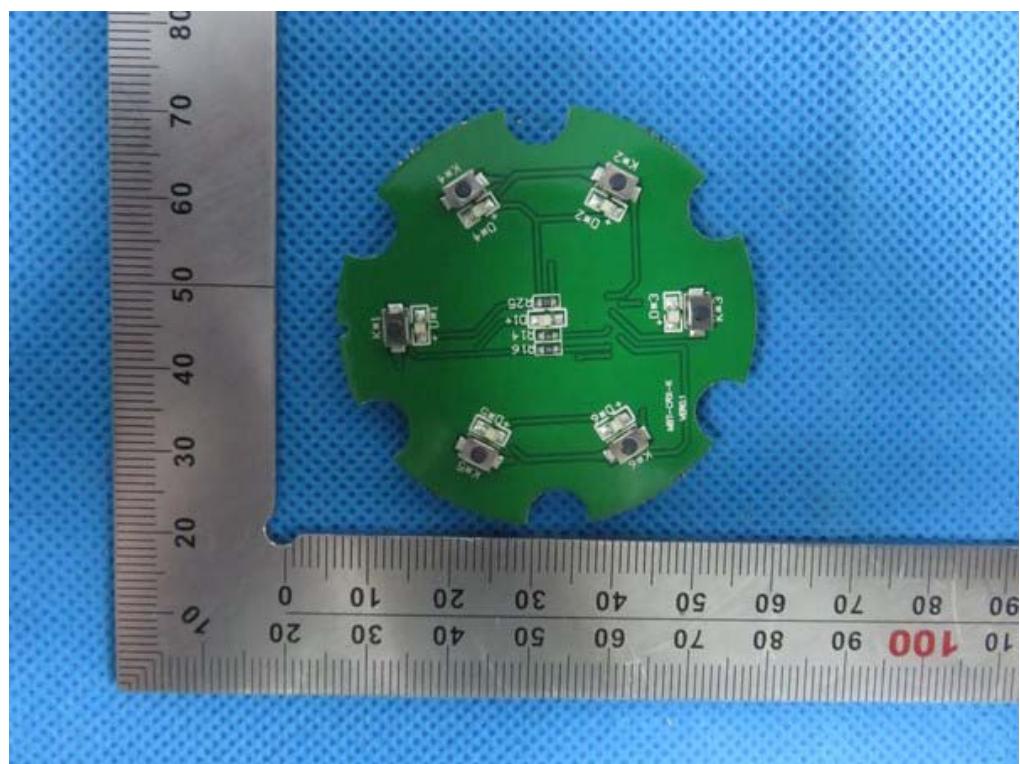


INTERNAL VIEW OF EUT-2

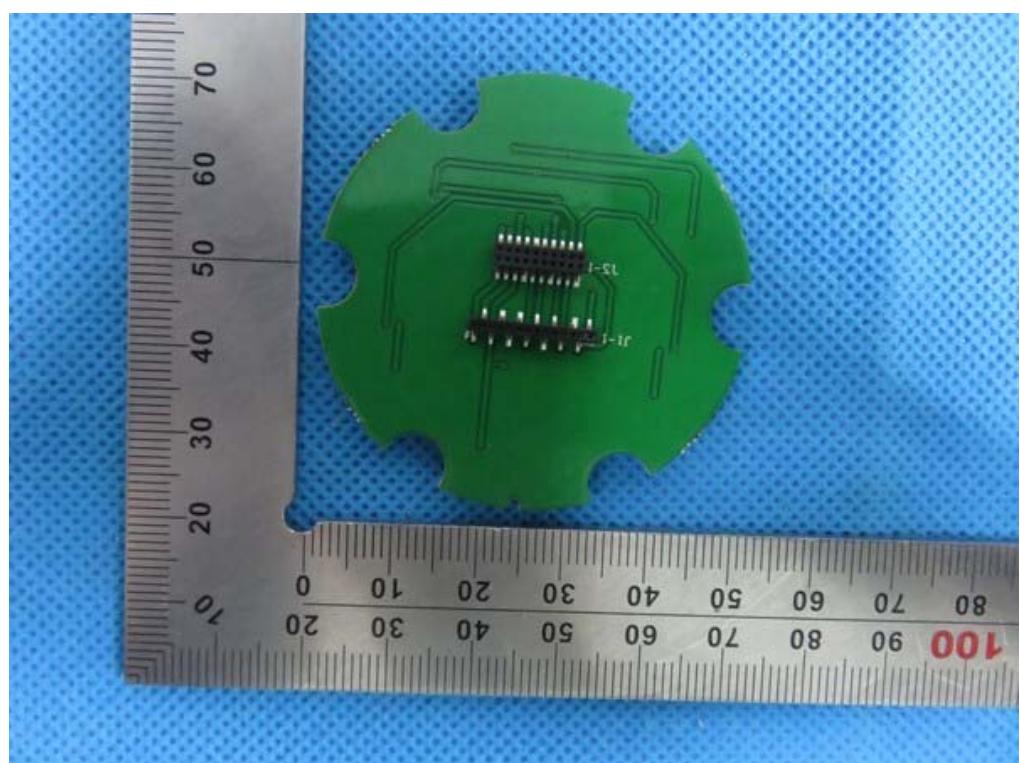


INTERNAL VIEW OF EUT-3

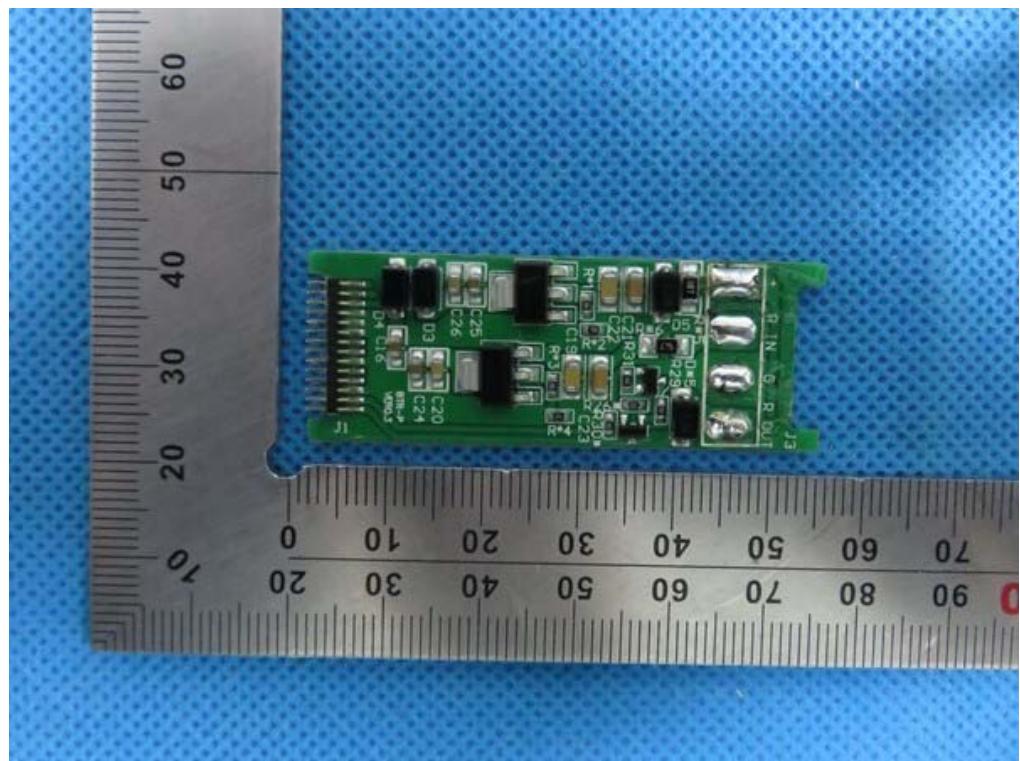


INTERNAL VIEW OF EUT-4

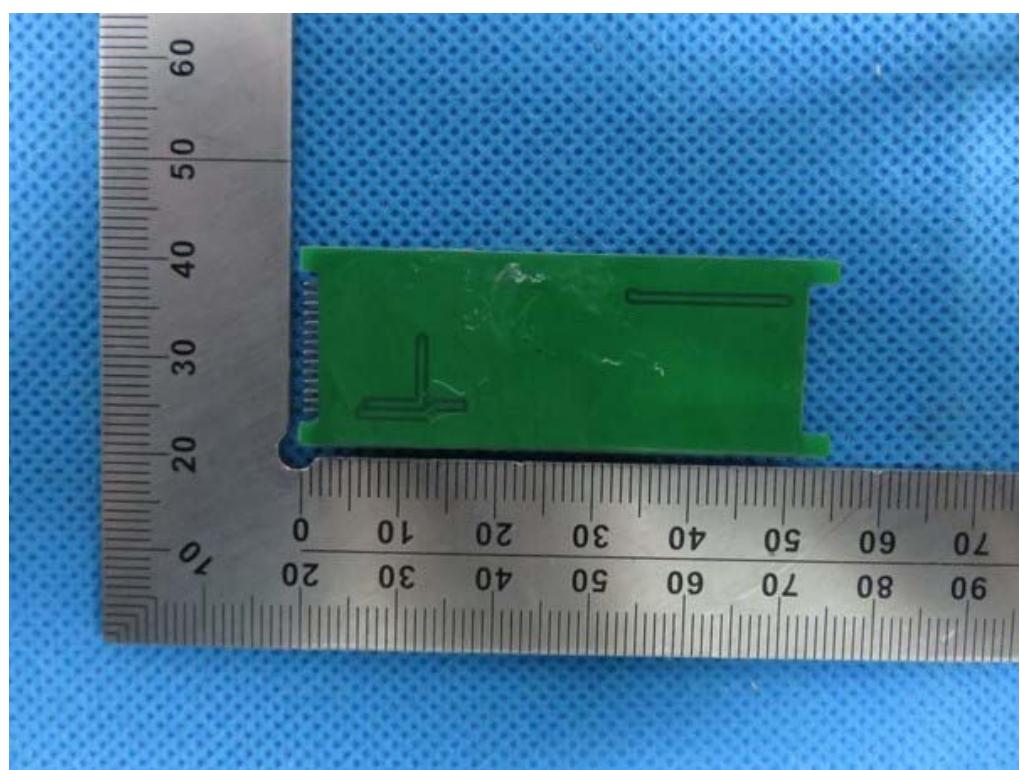

INTERNAL VIEW OF EUT-5

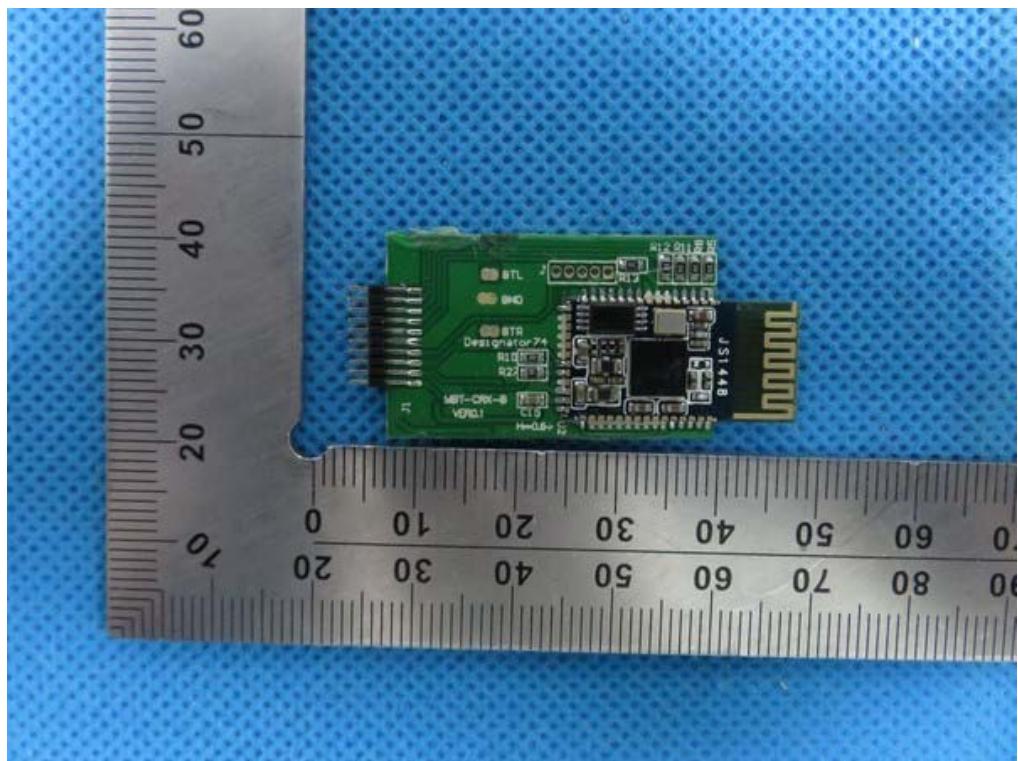


INTERNAL VIEW OF EUT-6

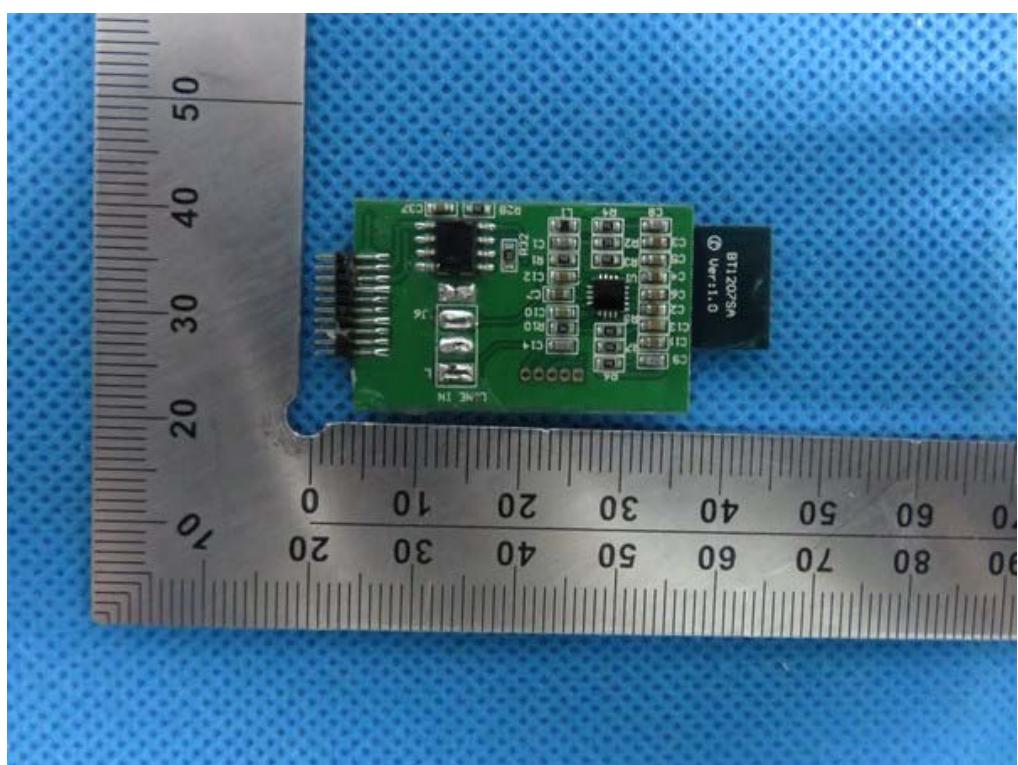


INTERNAL VIEW OF EUT-7




INTERNAL VIEW OF EUT-8

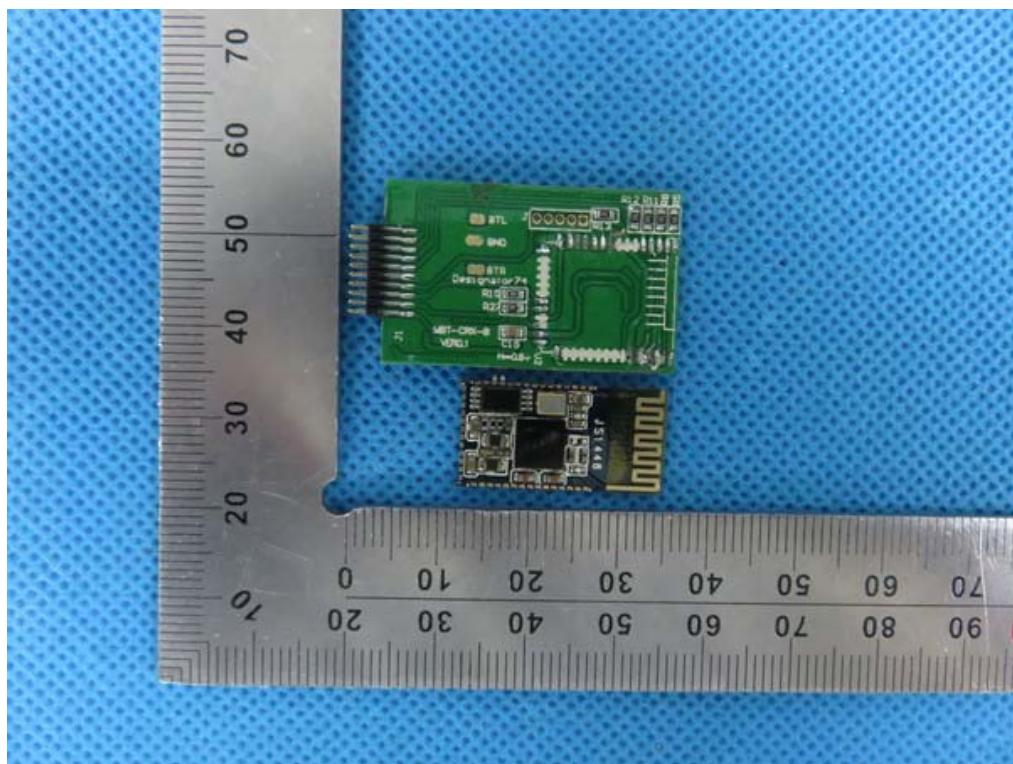


INTERNAL VIEW OF EUT-9

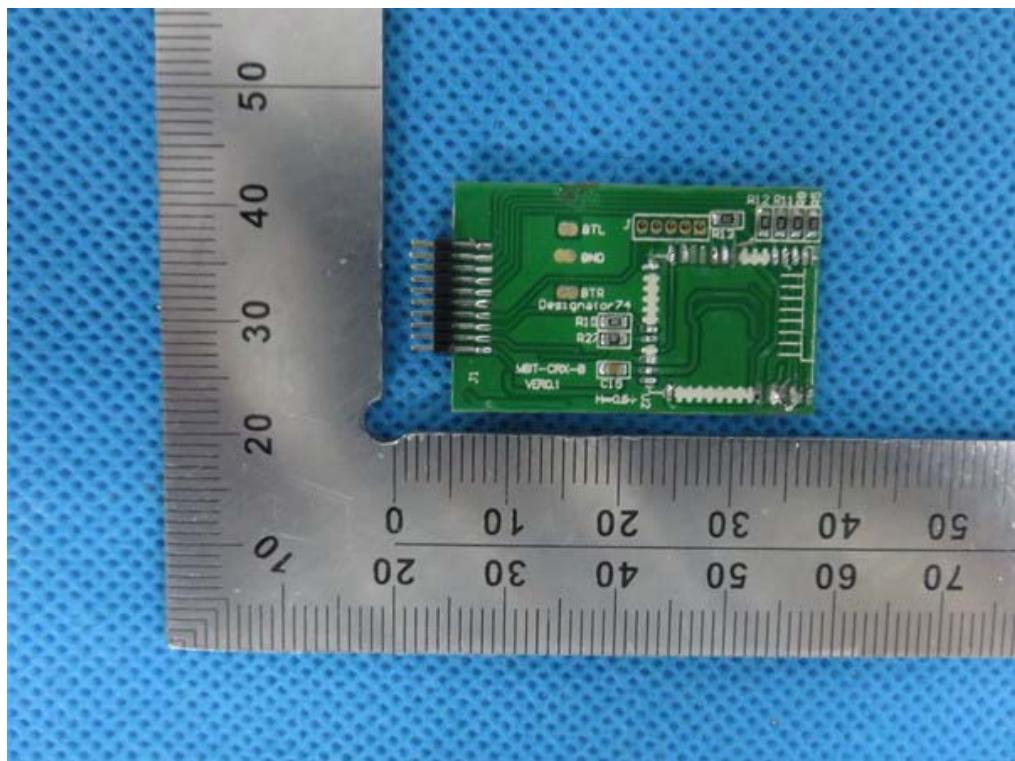

INTERNAL VIEW OF EUT-10

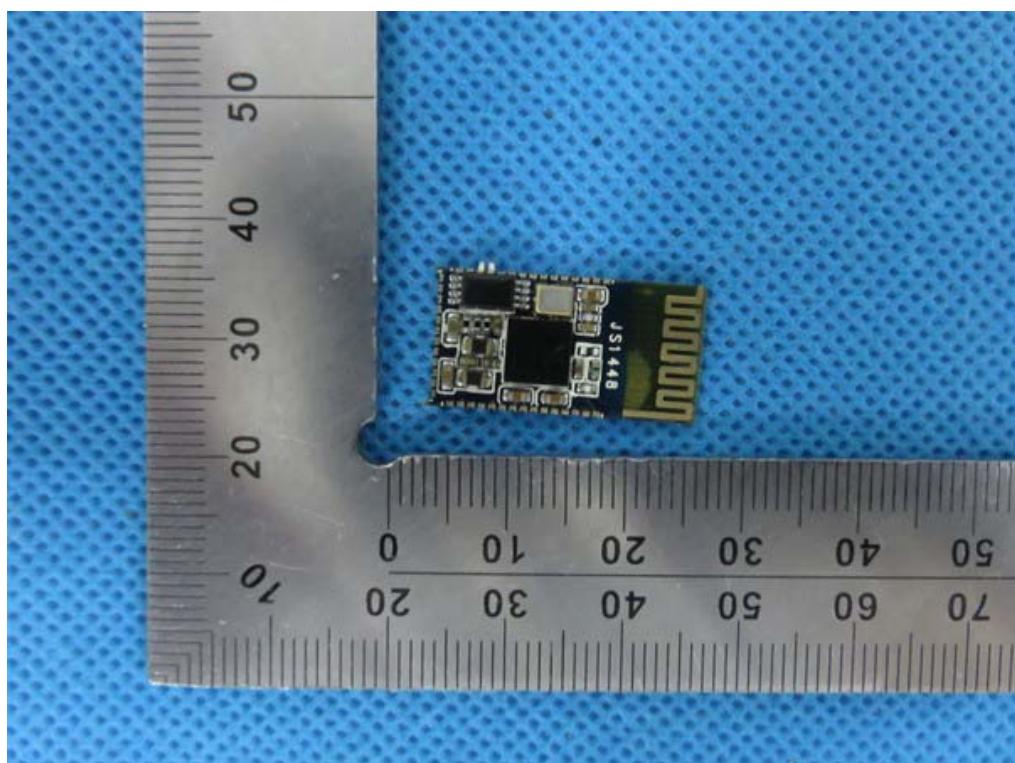

INTERNAL VIEW OF EUT-11

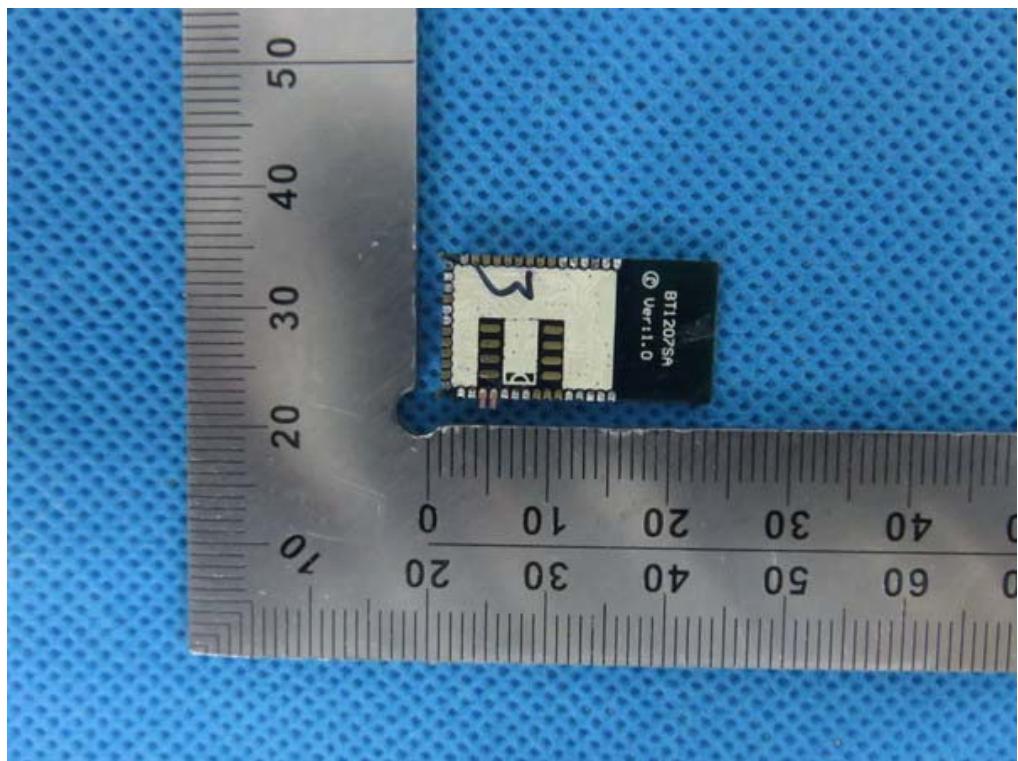

----END OF REPORT----