



FCC LISTED, REGISTRATION
NUMBER: 2764.01

ISED LISTED REGISTRATION
NUMBER: 23595-1

Test report No:
2692ERM.001

Test report

**USA FCC Part 15.247, 15.209, 15.207
CANADA RSS-247, RSS-Gen**

**Radio Frequency Devices. Operation within the bands 902 - 928 MHz,
2400 -2483.5 MHz, and 5725 - 5850 MHz.**

**Digital Transmission Systems (DTSs), Frequency Hopping Systems
(FHSs) and License-Exempt Local Area Network (LE-LAN) Devices.**

Identification of item tested	Data Logger
Trademark	Danlaw
Model and /or type reference	DL970
Other identification of the product	FCC ID: 2AD9I-DL970 IC ID: 20087-DL970 HW Version: 2.0 SW Version: 1.4.1.0
Features	LTE, 3G, GPS, WLAN, Bluetooth (BLE)
Manufacturer	DANLAW INC 41211 Vincenti Court, Novi, Michigan 48375, USA
Test method requested, standard	USA FCC Part 15.247, 10-1-18 Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209, 10-1-18 Edition: Radiated emission limits; general requirements CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 (April 2018). 558074 D01 15.247 Meas Guidance v05r02. Guidance for Compliance Measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under section §15.247 of the FCC Rules ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Domingo Galvez EMC&RF Lab Manager
Date of issue	12-13-2019
Report template No	FDT08_21

Index

Competences and guarantees	3
General conditions	3
Uncertainty	3
Data provided by the client.....	4
Usage of samples	4
Test sample description	5
Identification of the client.....	6
Testing period and place.....	7
Document history	7
Environmental conditions	7
Remarks and comments	7
Testing verdicts.....	8
Summary	8
List of equipment used during the test.....	9
Appendix A: Test results (Bluetooth Low Energy)	10
Appendix B: Test results (WI-FI 2.4GHz)	44

Competences and guarantees

DEKRA Certification Inc. is a testing laboratory accredited by A2LA (The American Association for Laboratory Accreditation), to perform the tests indicated in the Certificate 2764.01

DEKRA Certification Inc. is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Certification Inc. has a calibration and maintenance program for its measurement equipment.

DEKRA Certification Inc. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Certification at the time of performance of the test.

DEKRA Certification Inc. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Certification Inc.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Certification Inc.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Certification Inc. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Certification internal document PODT000.

Frequency (MHz)	U(k=2)	Units
30-180	3.82	dB
180-1000	2.61	dB
1000-18000	2.92	dB
18000-40000	2.15	dB

Data provided by the client

Danlaw's Data Logger was developed to provide companies with an easy to install, wireless communication device for monitoring and logging vehicle network message data.

The Danlaw Data Logger provides:

- Support for all major passenger car & light truck protocols
- Simple plug-n-go via the vehicle's OBDII connector
- OBD Vehicle Data logging with real-time data stamp
- LTE & 3G communication
- Support for FTP, TCP/IP data transfer
- Firmware Over-The-Air (FOTA) Re-flash
- Rugged, compact field-hardened design
- No external antenna connections needed
- Completely self-contained

DEKRA declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: The client.

Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
2692/04	Conducted Sample	DL970	S327	1107/2019

1. Sample S/01 has undergone following test(s).

All conducted tests indicated in appendix A & B.

Sample S/02 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
2692/09	Radiated Sample	DL970	S334	1107/2019

1. Sample S/02 has undergone following test(s).

All radiated tests indicated in appendix A & B.

Following Accessory item was used with Sample S/01 & S/02 to perform testing


Control N°	Description	Model	Serial N°	Date of reception
2692/06	DELL Laptop	----	----	11/07/2019

Test sample description

Ports..... .: :	Port name and description	Cable					
		Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾		
	USB connector; access virtual COM port	1.70	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
Supplementary information to the ports..... .: :							
Rated power supply	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<input checked="" type="checkbox"/>	DC: $V_{nom} = 12\text{ V}$; $V_{low} = 9\text{ V}$; $V_{high} = 15\text{ V}$						
<input type="checkbox"/>	DC:						
Rated Power							
Clock frequencies							
Other parameters.....							
Software version	1.4.1.0						
Hardware version.....	2.0						
Dimensions in cm (W x H x D)....	4.75 x 4.4 x 2.3						
Mounting position.....	<input type="checkbox"/>	Table top equipment					
	<input type="checkbox"/>	Wall/Ceiling mounted equipment					
	<input type="checkbox"/>	Floor standing equipment					
	<input type="checkbox"/>	Hand-held equipment					
	<input checked="" type="checkbox"/>	Other: Vehicle					

Modules/parts	Module/parts of test item	Type	Manufacturer	
		WLAN/BLT module	QCA9377	Qualcomm
		3G/LTE/GPS module	MDM9207	Qualcomm
Accessories (not part of the test item)	Description	Type	Manufacturer	
Documents as provided by the applicant.....	Description	File name	Issue date	
	PICS			
	User Manual			
	Instruction for testing			

Copy of marking plate:

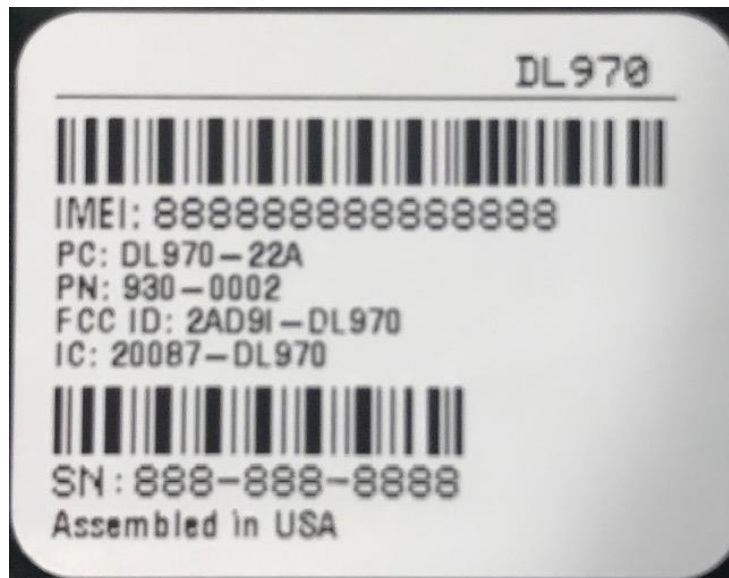

Identification of the client

DANLAW INC
 41211 Vincenti Court, Novi, Michigan 48375, USA

Testing period and place

Test Location	DEKRA Certification Inc.
Date (start)	11-27-2019
Date (finish)	12-03-2019

Document history

Report number	Date	Description
2692ERM.001	12-13-2019	First release

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

In the semi-anechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 60 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

Remarks and comments

The tests have been performed by the technical personnel: Divya Adusumilli, BhagyaShree Chaudhary, Poojita Bhattu and Koji Nishimoto.

Testing verdicts

Not applicable :	N/A
Pass :	P
Fail :	F
Not measured :	N/M

Summary

FCC PART 15 PARAGRAPH / RSS-247 (Bluetooth Low Energy)					
Report Section	15.247 Spec Clause	RSS Spec Clause	Test Description	Verdict	Remark
A.1	§ 2.1049	RSS-Gen 6.7	99% Occupied Bandwidth	P	N/A
A.2	§ 15.247 (a) (2)	RSS-247 5.2. (a)	6dB Emission Bandwidth	P	N/A
A.3	§ 15.247 (b) (3)	RSS-247 5.4. (d)	Maximum peak conducted output power and antenna gain	P	N/A
A.4	§ 15.247 (d)	RSS-247 5.5.	Band-edge emissions compliance (Transmitter)	P	N/A
A.5	§ 15.247 (e)	RSS-247 5.2. (b)	Power spectral density	P	N/A
A.6	§15.207 (a)	RSS Gen 8.8	Conducted Emission Limits	P	N/A
A.7	§ 15.247 (d)	RSS-Gen 8.9 & 8.10.	Emission limitations radiated (Transmitter)	P	N/A
<u>Supplementary information and remarks:</u> N/A					

FCC PART 15 PARAGRAPH (WIFI 2.4GHz)					
Section	FCC Spec Clause	RSS Spec Clause	Test Description	Verdict	Remark
B.1	§ 2.1049 & §15.247 (a) (2)	RSS-247 5.2 (a)	99% Occupied Bandwidth & 6dB Bandwidth	P	N/A
B.2	§ 15.247 (b)	RSS-247 5.4 (d)	Maximum Output Power and antenna gain	P	N/A
B.3	§ 15.247 (d)	RSS-247 5.5	Band-edge conducted emissions compliance (Transmitter)	P	N/A
B.4	§ 15.247 (e)	RSS-247 5.2 (b)	Power Spectral Density	P	N/A
B.5	§15.247(d)	RSS-247 5.5	Emission limitations Conducted (Transmitter)	P	N/A
B.6	§15.247 (d)	RSS-247 5.5	Emission limitations Radiated (Transmitter)	P	N/A
<u>Supplementary information and remarks:</u> N/A					

List of equipment used during the test

Conducted Measurements

Test system Rohde & Schwarz TS 8997:

CONTROL NUMBER	DESCRIPTION	LAST CALIBRATION	NEXT CALIBRATION
1039	Signal analyzer Rohde & Schwarz FSV40	2018/10	2020/10
1009	RF generator Rohde & Schwarz SMB100A	2019/08	2021/08
1042	RF generator Rohde & Schwarz SMBV100A	2018/01	2021/01
101	Climatic chamber Espec	2019/01	2020/01

Radiated Measurements

CONTROL NUMBER	DESCRIPTION	LAST CALIBRATION	NEXT CALIBRATION
1179	Semi anechoic Absorber Lined Chamber Frankonia SAC 3 plus "L"	N/A	N/A
1064	BiconicalLog antenna ETS LINDGREN 3142E	2017/03	2020/03
1057	Double-ridge Waveguide Horn antenna 1-18 GHz	2017/03	2020/03
1056	Double-ridge Waveguide Horn antenna 18-40 GHz	2017/03	2020/03
1012	Rohde & Schwarz EMI Test Receiver ESR26	2018/09	2020/09
1014	Spectrum analyzer Rohde & Schwarz FSV40	2019/04	2021/04
0981	RF pre-amplifier 1-18 GHz Bonn Elektronik BLMA 0118-2A	2018/10	2021/05
1015, 1017, 1019, 1020	Rohde & Schwarz EMC32 software	N/A	N/A

Appendix A: Test results (Bluetooth Low Energy)

Appendix A Content

PRODUCT INFORMATION	12
DESCRIPTION OF TEST CONDITIONS	13
TEST A.1: 99% OCCUPIED BANDWIDTH	14
TEST A.2: 6DB BANDWIDTH.....	17
TEST A.3: MAXIMUM PEAK CONDUCTED OUTPUT POWER AND ANTENNA GAIN.....	20
TEST A.4: BAND-EDGE EMISSIONS COMPLIANCE (TRANSMITTER).....	23
TEST A.5: POWER SPECTRAL DENSITY	26
TEST A.6: EMISSION LIMITATIONS CONDUCTED (TRANSMITTER).....	29
TEST A.7: EMISSION LIMITATIONS RADIATED (TRANSMITTER).....	32

PRODUCT INFORMATION

The following information is provided by the client

Information	Description
Operating Frequency Range	2400 – 2483.5 MHz
Nominal Channel Bandwidth	BLE: 1 MHz
RF Output Power	14 dBm
Antenna type	BLE antenna is embedded in the plastics of the device
Antenna gain	2.2 dBi
Nominal Voltage	
- Supply Voltage	12 Vdc
- Type of power source	DC voltage
Equipment type	Bluetooth LE

DESCRIPTION OF TEST CONDITIONS

TEST CONDITIONS	DESCRIPTION
TC#01 (1 Mbps)	<p><u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$</p> <p>Data Rate: 1 Mbps Bandwidth: 1 MHz</p> <p><u>Test Frequencies for Conducted/ Radiated tests:</u> Lowest channel: 2402 MHz Middle channel: 2440 MHz Highest channel: 2480 MHz</p>


TEST A.1: 99% OCCUPIED BANDWIDTH

LIMITS:	Product standard:	§ 2.1049 and RSS-Gen
	Test standard:	§ 2.1049 and RSS-Gen 6.7

LIMITS

The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs

TEST SETUP

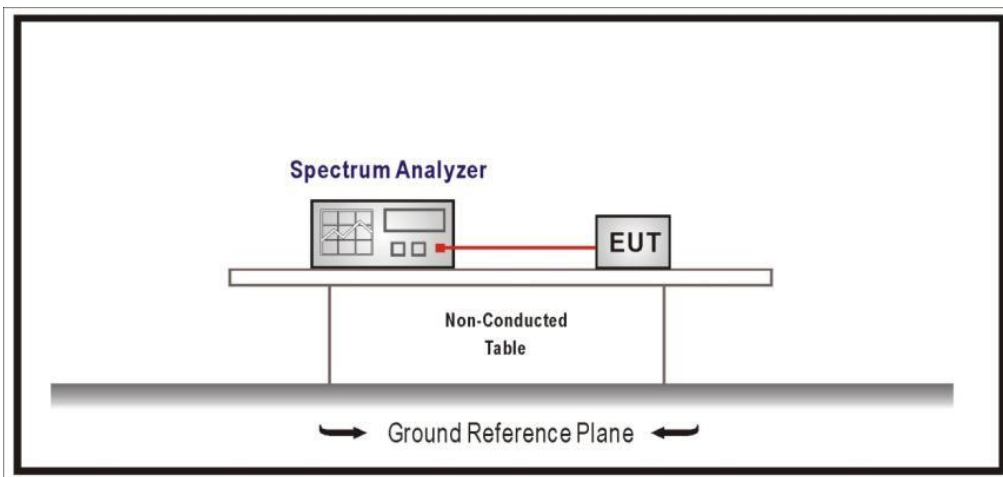



TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (1 Mbps)
TEST RESULTS:	PASS

	Lowest frequency	Middle frequency	Highest frequency
	2402 MHz	2440 MHz	2480 MHz
99% bandwidth (MHz)	1.05	1.05	1.05
Measurement uncertainty (kHz)	<± 8.33		


TEST RESULTS (Cont.):

Lowest Channel

Middle Channel

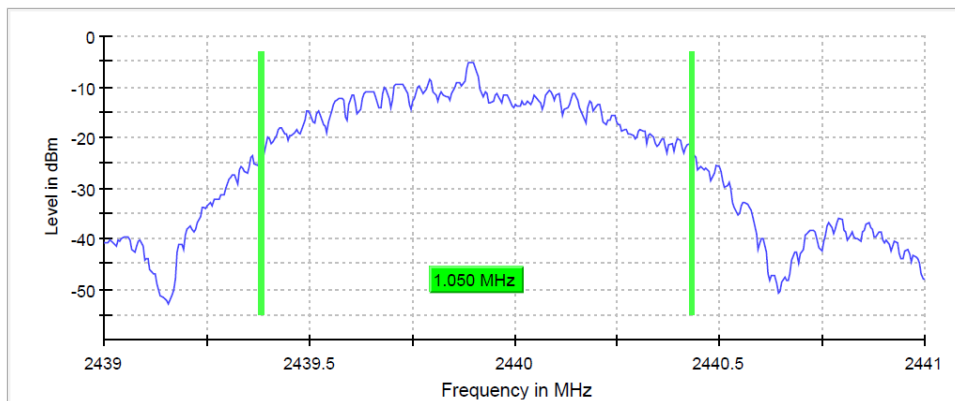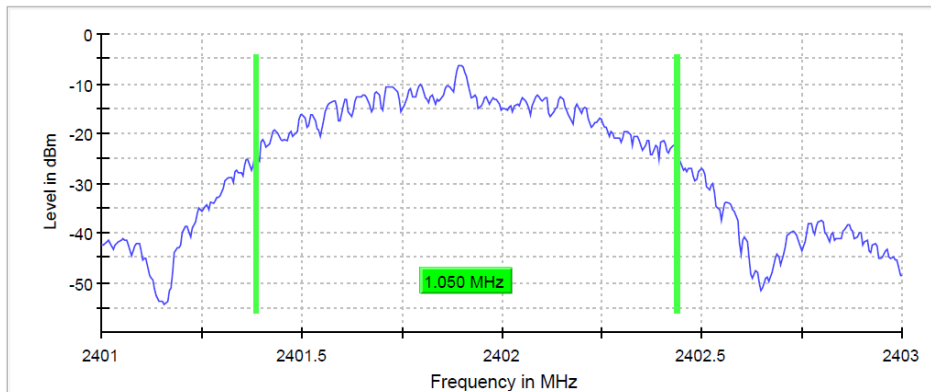

Highest Channel

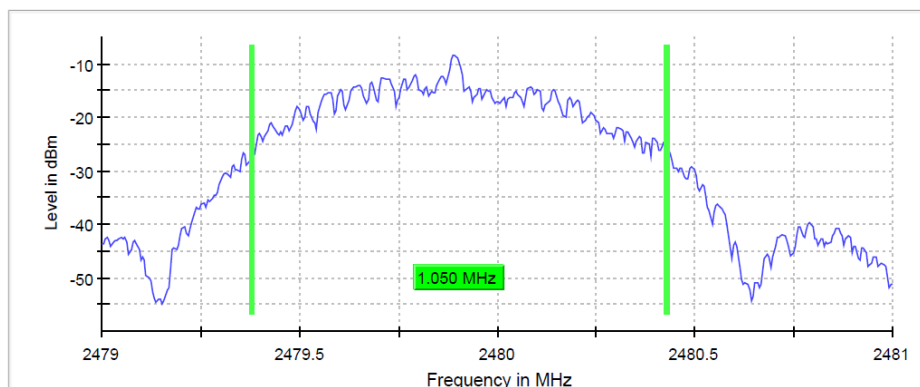

TEST RESULTS (Cont.):

Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100	2.43900	2.47900
Stop Frequency	2.40300	2.44100	2.48100
Span	2.000 MHz	2.000 MHz	2.000 MHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	400	400	400
Sweep time	189.648 us	189.648 us	189.648 us
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FET	FET	FET
Preamplifier	off	Off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	5 / max. 150	6 / max. 150	5 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable	0.09 dB	0.08 dB	0.11 dB


TEST A.2: 6DB BANDWIDTH

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(a)(2) and RSS-247 5.2(a)

LIMITS

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST SETUP

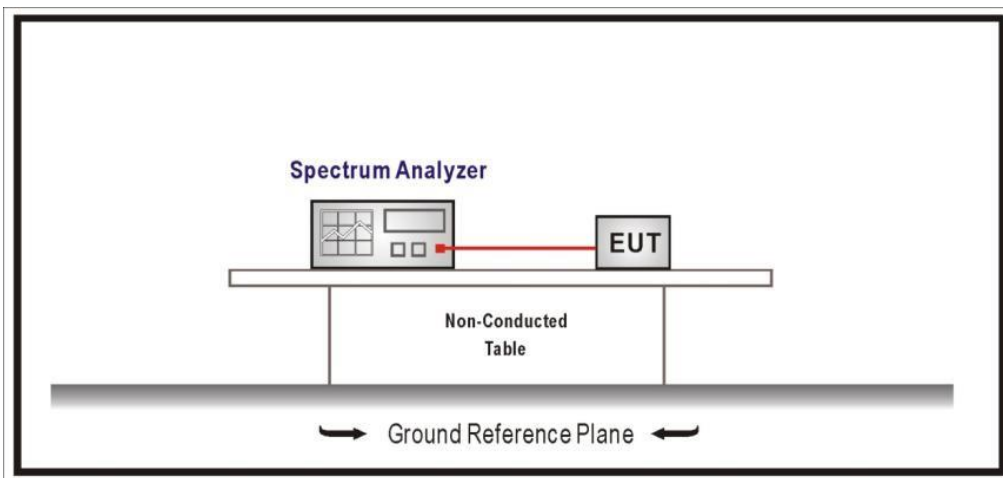


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (1 Mbps)
TEST RESULTS:	PASS


	Lowest frequency	Middle frequency	Highest frequency
	2402 MHz	2440 MHz	2480 MHz
6 dB Spectrum bandwidth (kHz)	712.872	693.070	712.872
Measurement uncertainty (kHz)	<±20.0		

TEST RESULTS (Cont.):

Low Channel:

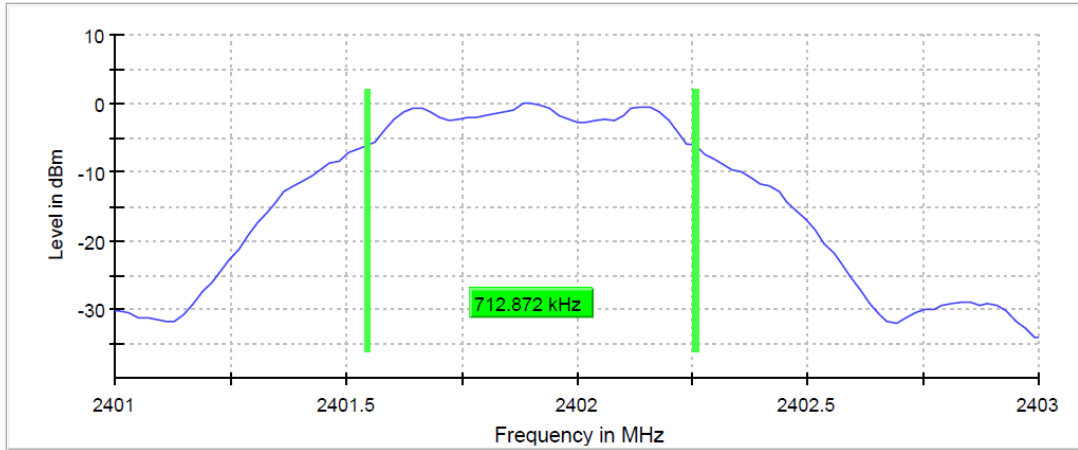


Mid Channel:

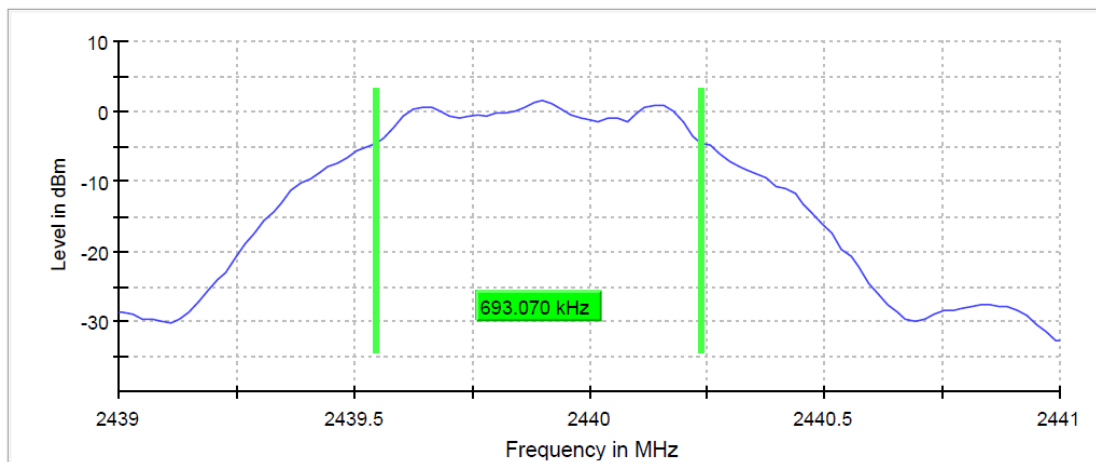

TEST RESULTS (Cont.):

High Channel:

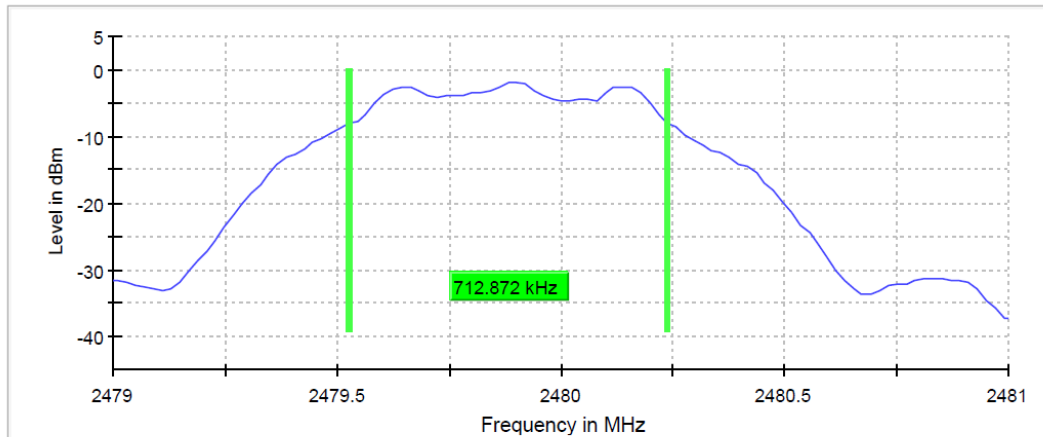

Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100 GHz	2.43900 GHz	2.47900 GHz
Stop Frequency	2.40300 GHz	2.44100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz	2.000 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	101	101	101
Sweep time	18.938 μ s	18.938 μ s	18.938 μ s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	Off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	10 / max. 150	9 / max. 150	9 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable	0.05 dB	0.05 dB	0.17 dB

TEST A.3: MAXIMUM PEAK CONDUCTED OUTPUT POWER AND ANTENNA GAIN

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(b)(3) and RSS-247 5.4(d)

LIMITS


§15.247(b)(3) and RSS-247 5.4(d): For systems using digital modulation in the 2400-2483.5 MHz band: 1 watt (30 dBm).

RSS-247 5.4(d): The e.i.r.p. shall not exceed 4 W (36 dBm)

TEST SETUP

The maximum peak conducted output power was measured using the method according to point 9.1.1. of Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v04 dated 05/04/2017.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power

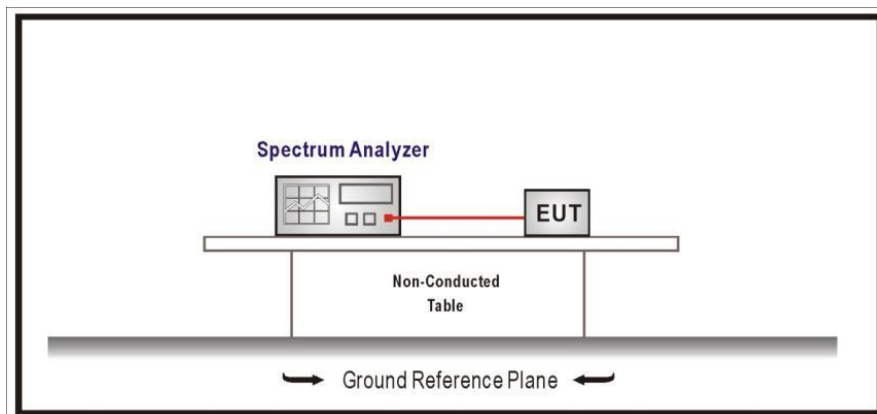

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (1 Mbps)
TEST RESULTS:	PASS


	Lowest frequency 2402 MHz	Middle frequency 2440 MHz	Highest frequency 2480 MHz
Maximum conducted power (dBm)	0.4	1.7	-1.5
Maximum EIRP power (dBm)	2.6	3.9	0.7
Measurement uncertainty (dB)	<±0.78		

Maximum declared antenna gain: 2.2 dBi

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.


TEST RESULTS (Cont.):	CONDUCTED PEAK POWER
------------------------------	-----------------------------

Lowest Channel

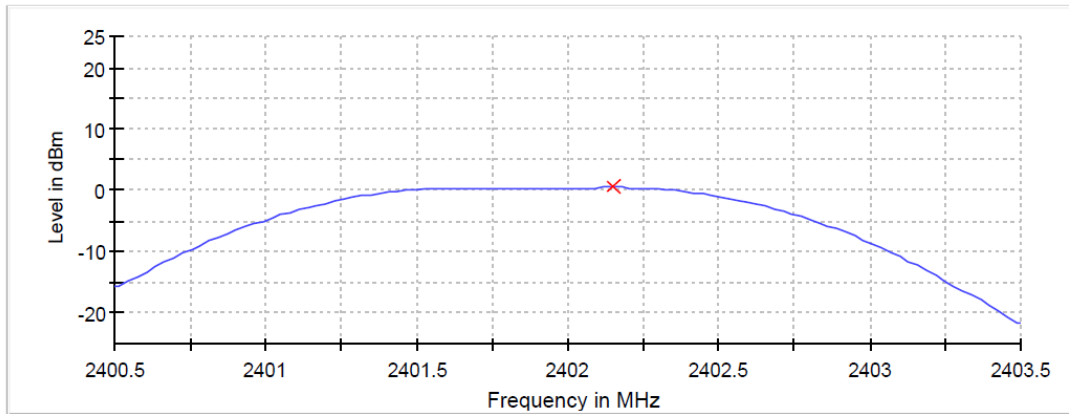


— Connector 1 × Peak Connector 1

Middle Channel

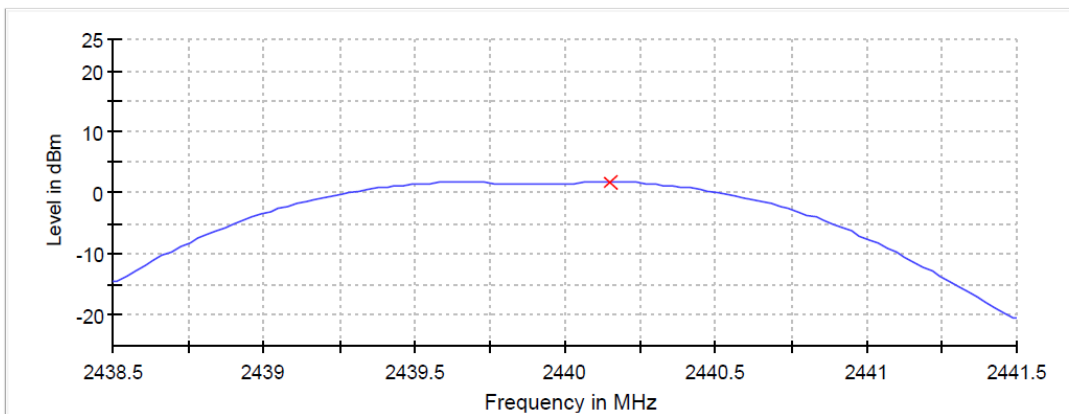

— Connector 1 × Peak Connector 1

Highest Channel

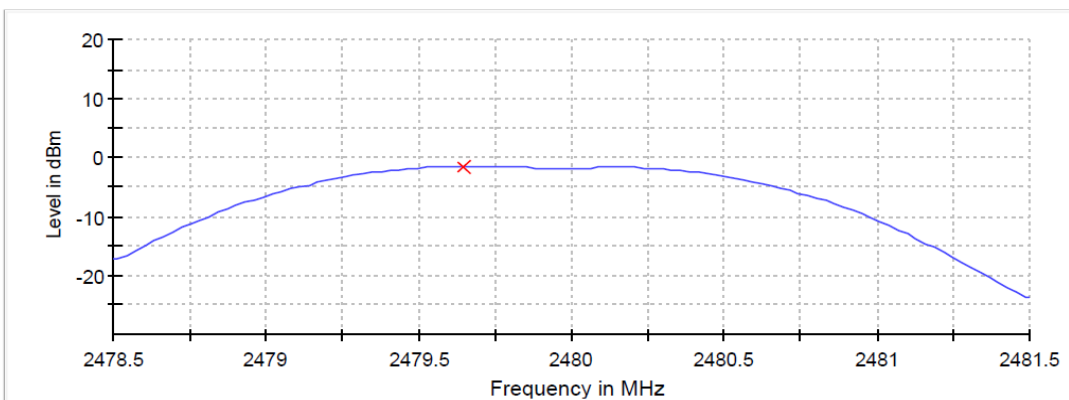

— Connector 1 × Peak Connector 1

TEST RESULTS (Cont.):

Setting	Measurement		
	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40050	2.43850	2.47850
Stop Frequency	2.40350	2.44150	2.48150
Span	3.000 MHz	3.000 MHz	3.000 MHz
RBW	1.000 MHz	1.000 MHz	1.000 MHz
VBW	3.000 MHz	3.000 MHz	3.000 MHz
Sweep Points	101	101	101
Sweep time	1.907 us	1.907 us	1.907 us
Reference Level	10.000	10.000	10.000
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	Off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	4 / max.	4 / max.	4 / max.
Stable	3 / 3	3 / 3	3 / 3
Max Stable	0.05 dB	0.01 dB	0.05 dB


TEST A.4: BAND-EDGE EMISSIONS COMPLIANCE (TRANSMITTER)

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(d) and RSS-247 5.5

LIMITS

In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

TEST SETUP

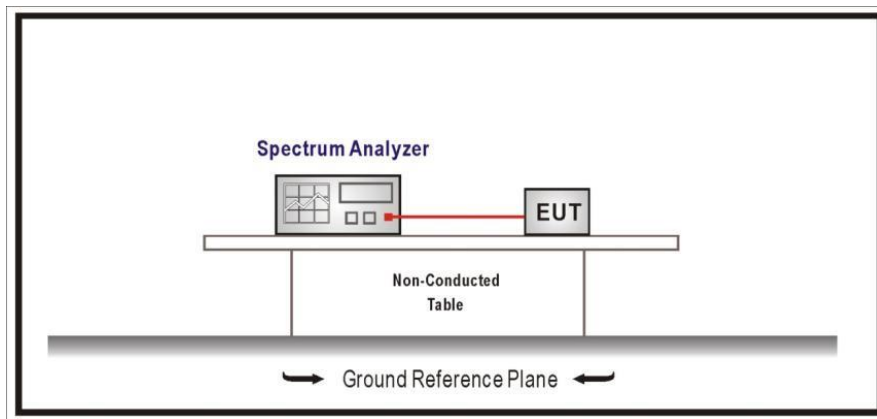


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (1 Mbps)
TEST RESULTS:	PASS

Note: Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

TEST RESULTS (Cont.):

Lowest Channel

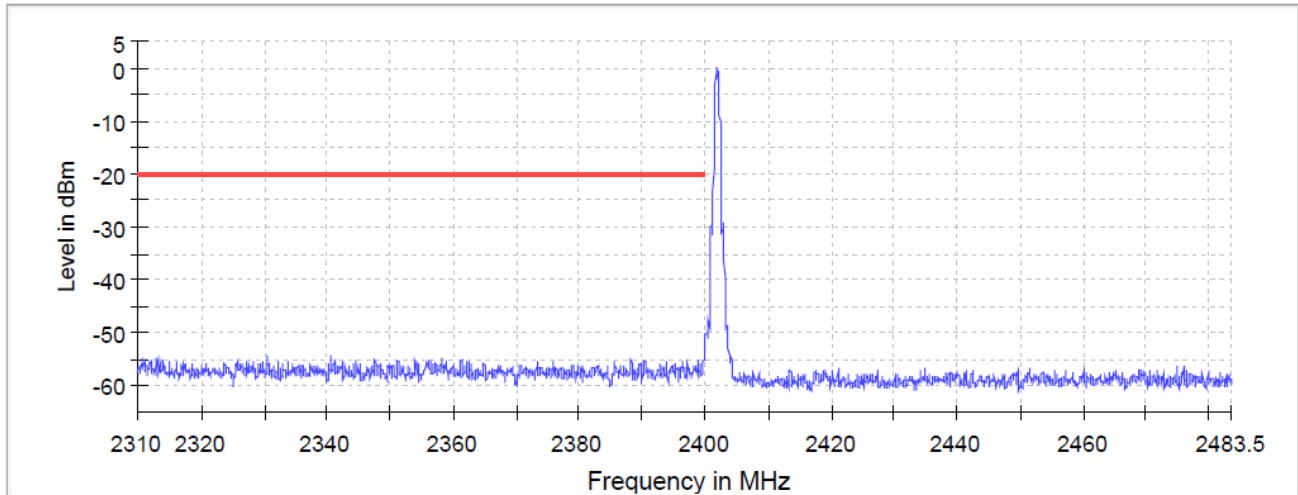


— Limit — Sum Level × Fail

Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.31000	2.40000 GHz
Stop Frequency	2.40000	2.48350 GHz
Span	90.000 MHz	83.500 MHz
RBW	100.000	100.000 kHz
VBW	300.000	300.000 kHz
Sweep Points	1800	1670
Sweep time	113.672 us	94.727 us
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamplifier	off	Off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	4 / max. 150	6 / max. 150
Stable	3 / 3	3 / 3
Max Stable	0.00 dB	0.07 dB

TEST RESULTS (Cont.):

Highest Channel

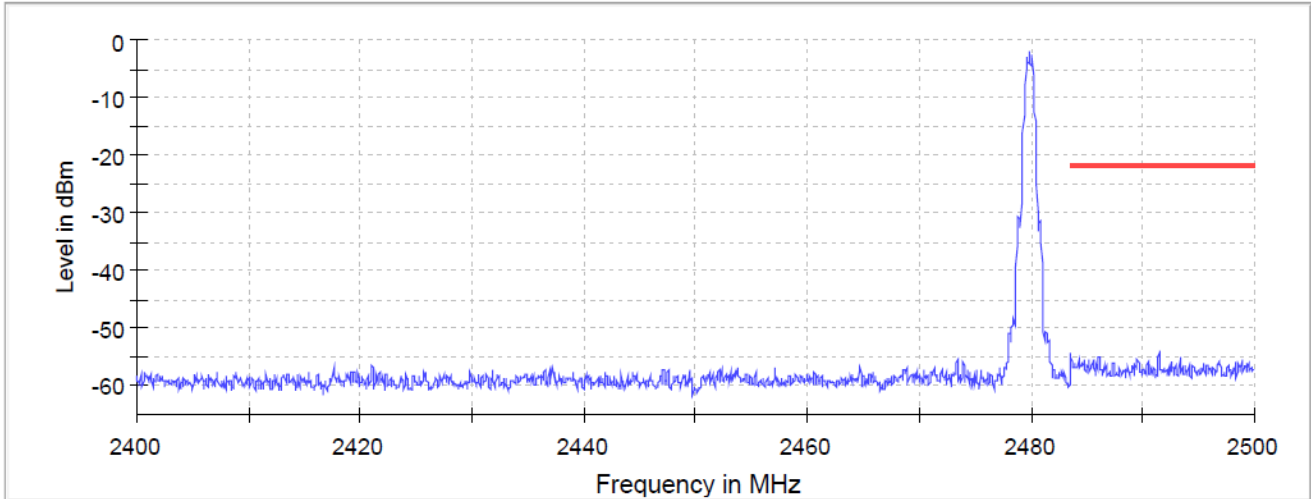

— Limit — Sum Level × Fail

Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	2.40000 GHz	2.48350 GHz
Stop Frequency	2.48350 GHz	2.50000 GHz
Span	83.500 MHz	16.500 MHz
RBW	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz
Sweep Points	1670	330
Sweep time	94.727 us	18.945 us
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	Off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	5 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3
Max Stable	0.10 dB	0.00 dB

TEST A.5: POWER SPECTRAL DENSITY


LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(e) and RSS-247 5.2 (b)

LIMITS

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST SETUP

The maximum power spectral density level in the fundamental emission was measured using the method PKPSD (Peak PSD) according to point 10.2. of Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v04 dated 05/04/2017.

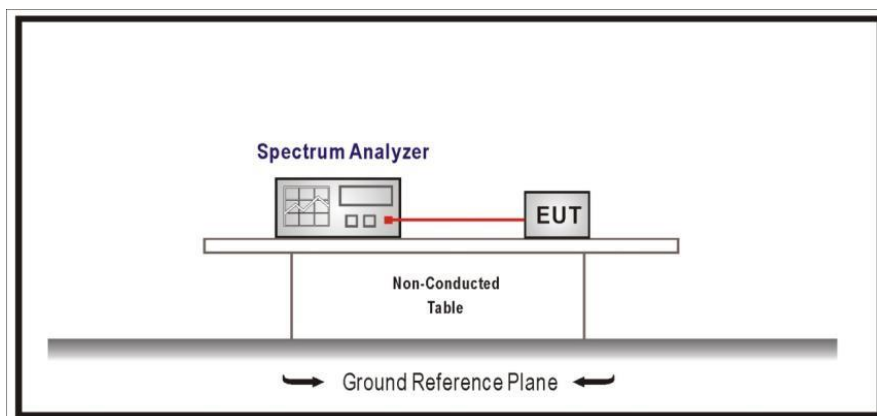


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01(1 Mbps)
TEST RESULTS:	PASS


	Lowest frequency 2402 MHz	Middle frequency 2440 MHz	Highest frequency 2480 MHz
Power spectral density (dBm)	-6.192	-4.854	-8.218
Measurement uncertainty (dB)	<±0.78		

TEST RESULTS (Cont.):

Low Channel:

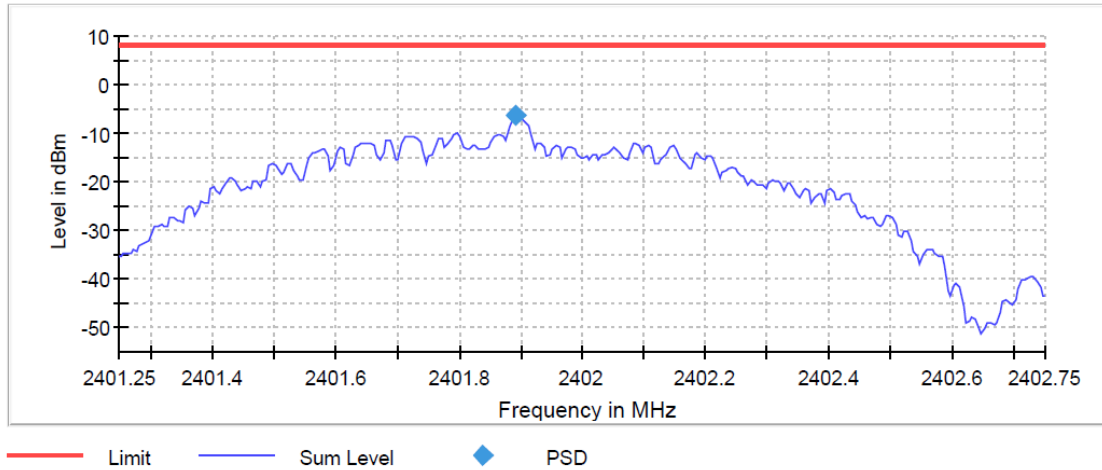


Mid Channel:

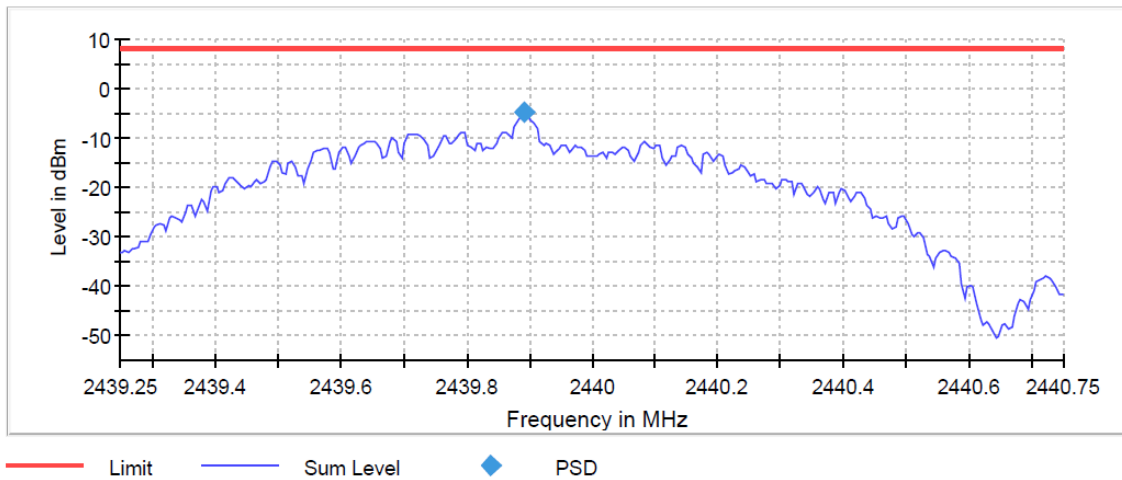

TEST RESULTS (Cont.):

High Channel:

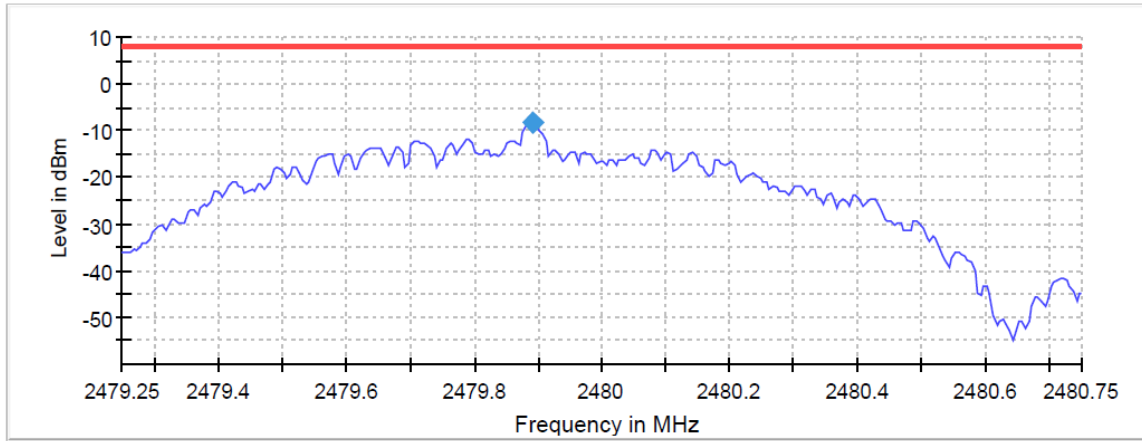

— Limit — Sum Level ◆ PSD

Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40125 GHz	2.43925 GHz	2.47925 GHz
Stop Frequency	2.40275 GHz	2.44075 GHz	2.48075 GHz
Span	1.500 MHz	1.500 MHz	1.500 MHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	300	300	300
Sweep time	1.500 ms	1.500 ms	1.500 ms
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	Sweep	Sweep	Sweep
Preamp	off	Off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	3 / max. 150	3 / max. 150	3 / max. 150
Stable	2 / 2	2 / 2	2 / 2
Max Stable	0.18 dB	0.17 dB	0.21 dB


TEST A.6: EMISSION LIMITATIONS CONDUCTED (TRANSMITTER)

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(d) and RSS-Gen 8.9 and 8.10

SPECIFICATION

In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

TEST SETUP

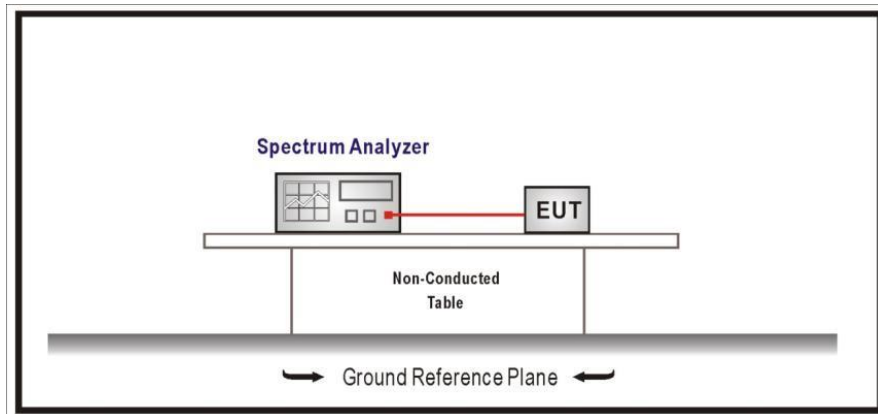


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (1 Mbps)
TEST RESULTS:	PASS


Frequency range 30 MHz – 26 GHz

No Conducted spurious signals detected more than 20 dB respect to the reference limit for low, Mid and high operating channels.

Low Channel:

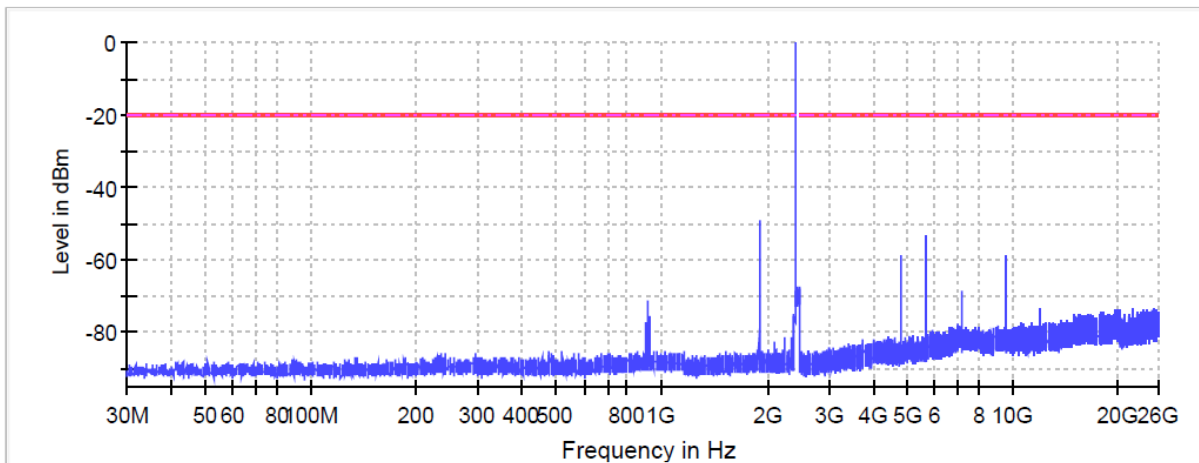


Mid Channel:

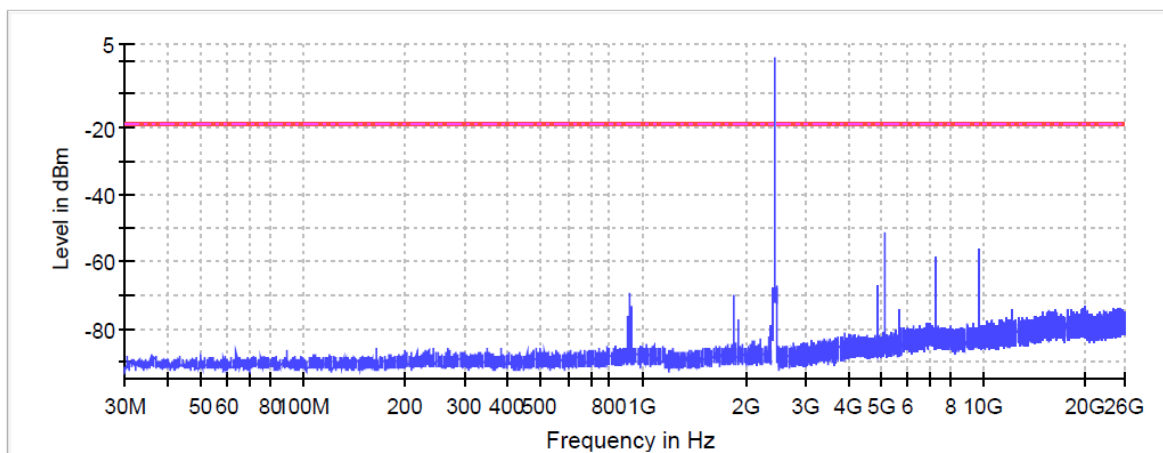

TEST RESULTS (Cont.):

High Channel:

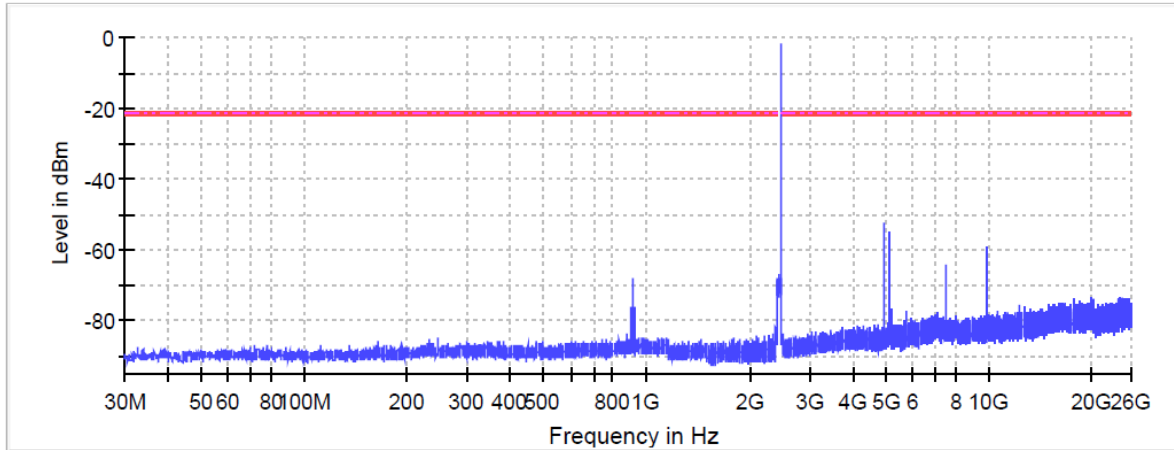

— Limit — Sum Level - - - Threshold × Critical × Final Critical

Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	29400	29400	29400
Sweep time	29.4 ms	29.4 ms	29.4 ms
Reference Level	-30.000 dBm	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	30	30	30
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	Off	Off
Stable mode	Trace	Trace	Trace
Stable value	1.00 dB	1.00 dB	1.00 dB
Run	5 / max. 40	22 / max. 40	9 / max. 40
Stable	1 / 1	1 / 1	1 / 1
Max Stable	0.00 dB	0.00 dB	0.00 dB

TEST A.7: EMISSION LIMITATIONS RADIATED (TRANSMITTER)

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(d) and RSS-Gen 8.9 and 8.10

LIMITS

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required

TEST SETUP

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at 3 m for the frequency range 30-1000 MHz (Bilog antenna) and at 1m for the frequency range 1-26 GHz (1 GHz-18 GHz and 18 GHz- 26 GHz Double ridge horn antennas).

For radiated emissions in the range 1- 26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.


The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

TEST SETUP (CONT.)

Radiated measurements Setup $f < 1$ GHz

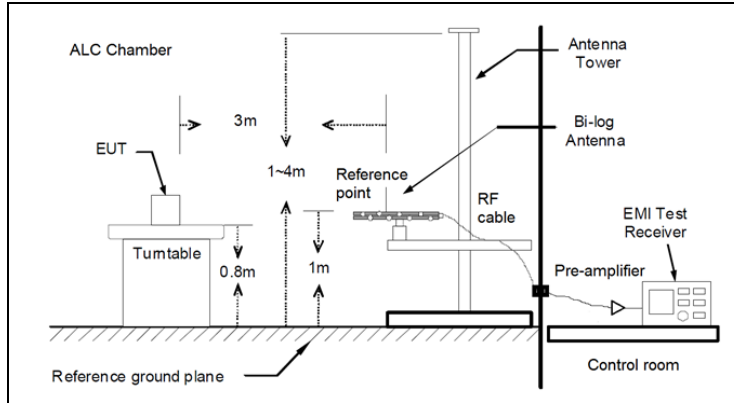

Radiated measurements setup $f > 1$ GHz

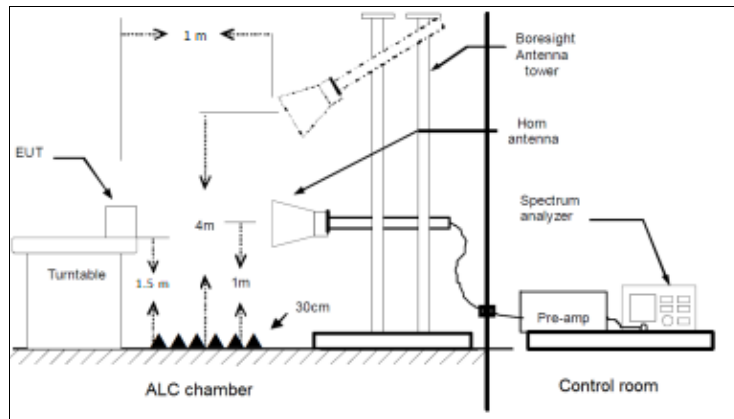

TESTED SAMPLES:	S/02
TESTED CONDITIONS MODES:	TC#01(1 Mbps)
TEST RESULTS:	PASS

Frequency range 30 MHz – 1000 MHz

The spurious emissions detected were shown in the below plots and tables for Low, Mid and High Operating Channels.

Frequency range 1 GHz – 26 GHz


The results in the next tables and plots show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.5 GHz (see next plots).

TEST RESULTS (Cont.):

30-1000 MHz

Low Channel

RF_FCC_15.247_E Field_30MHz_1GHz

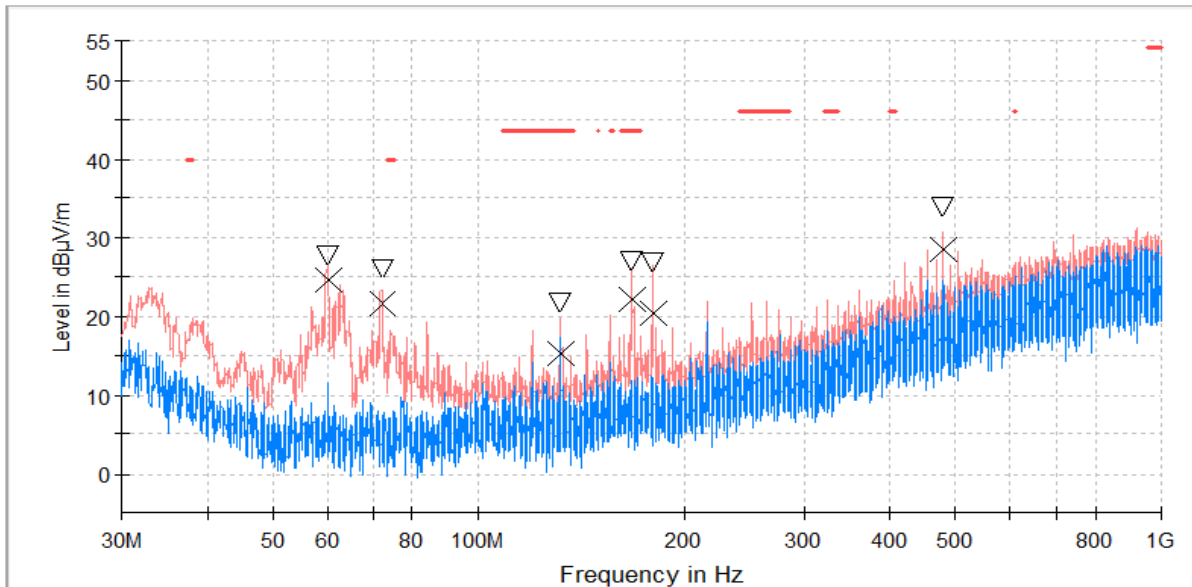

- PK+_MAXH
- PK+_CLRWR
- TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Limit
- ∇ MaxPeak-PK+ (Single)
- × QuasiPeak-QPK (Single)

Result Table_Single


Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Pol
60.021500	27.6	24.6	V
72.001000	25.9	21.7	V
132.044000	21.5	15.2	V
167.934000	26.9	22.1	H
180.010500	26.8	20.3	H
480.031500	33.9	28.4	V

TEST RESULTS (Cont.):

30-1000 MHz

Middle Channel

RF_FCC_15.247_E Field_30MHz_1GHz

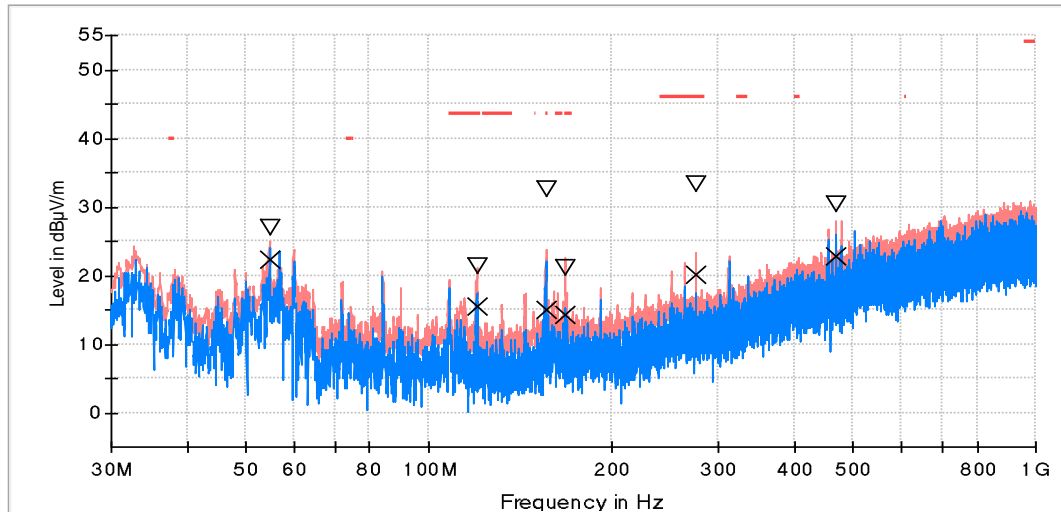

- PK+_MAXH
- PK+_CLRWR
- TX limits to Spurious Emission FCC15.247 (30M Hz to 1GHz) Restricted Bands QPK Limit
- ▽ MaxPeak-PK+ (Single)
- x QuasiPeak-QPK (Single)

Result Table_Single


Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Pol
54.638000	26.9	22.4	V
168.031000	21.2	14.2	V
156.003000	32.5	15.0	V
275.992000	33.3	20.2	V
119.967500	21.4	15.5	V
468.003500	30.3	22.9	V

TEST RESULTS (Cont.):

30-1000 MHz

High Channel

RF_FCC_15.247_E Field_30MHz_1GHz

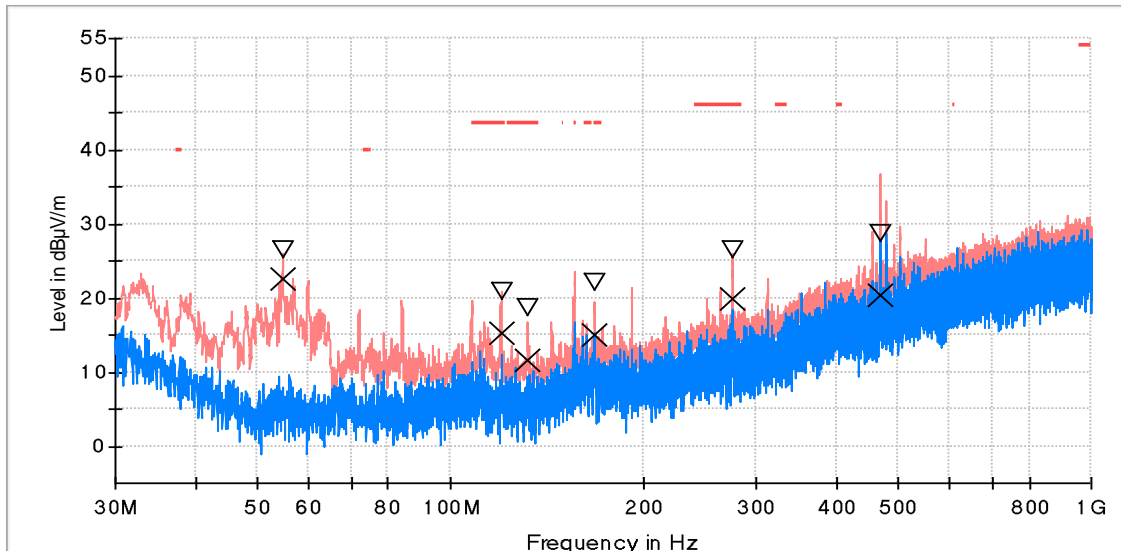

- PK+_MAXH
- PK+_CLRWR
- - - TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Limit
- ▽ MaxPeak-PK+ (Single)
- × QuasiPeak-QPK (Single)


Result Table_Single

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Pol
54.638000	26.5	22.6	V
275.895000	26.4	19.9	V
119.967500	20.9	15.2	V
468.003500	28.7	20.3	V
131.995500	18.6	11.5	V
167.885500	22.0	14.9	V

TEST RESULTS (Cont.):

1-18 GHz (Lowest Channel)

1GHz_18GHz_HP & VP_CH Low

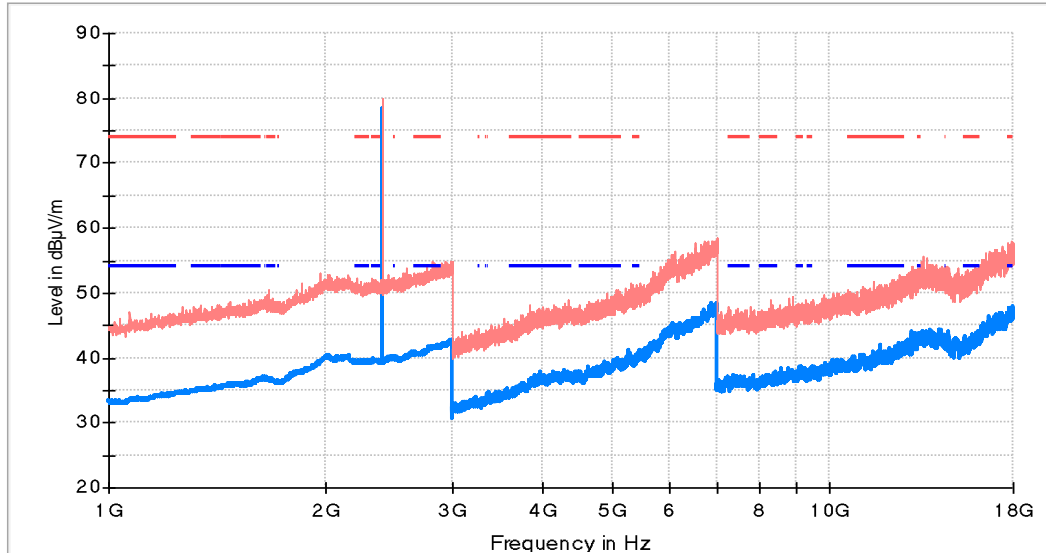

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands AVG Limit


Maximizations

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Comment
2402.000000	79.8	78.3	H	Fundamental

TEST RESULTS (Cont.):

1-18 GHz (Middle Channel)

1GHz_18GHz_HP & VP_CH Mid

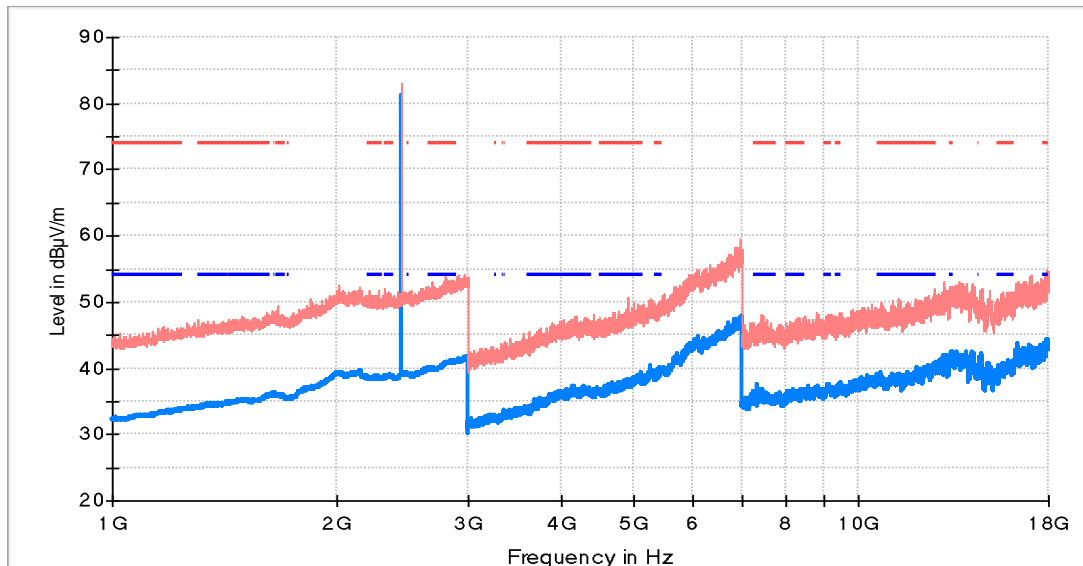

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands AVG Limit


Maximizations

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	PoI	Comment
2440.000000	82.9	81.3	H	Fundamental

TEST RESULTS (Cont.):

1-18 GHz (Highest Channel)

1GHz_18GHz_HP & VP_CH High

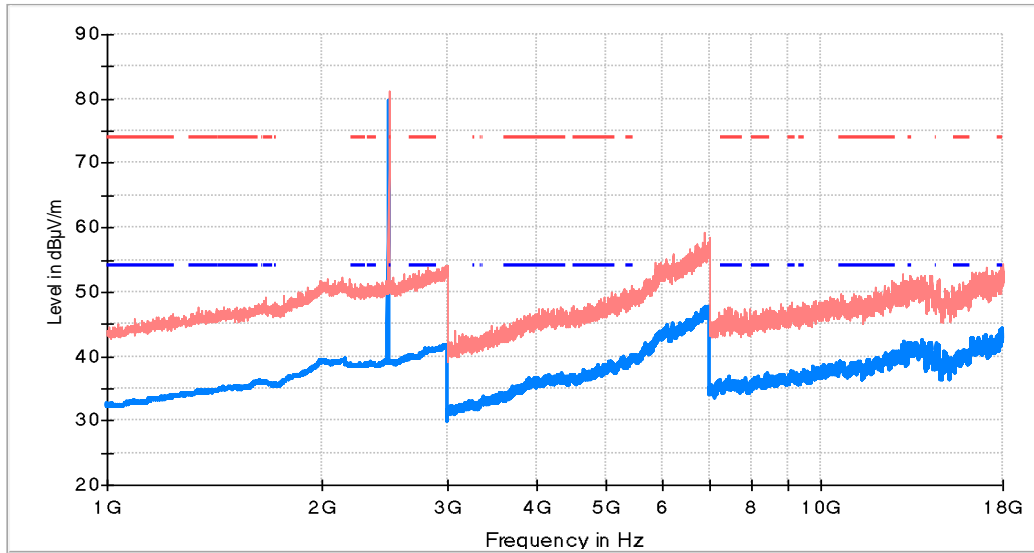

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands AVG Limit


Maximizations

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	PoI	Comment
2480.000000	79.8	78.3	H	Fundamental

TEST RESULTS (Cont.):


18 – 26 GHz

Low Channel

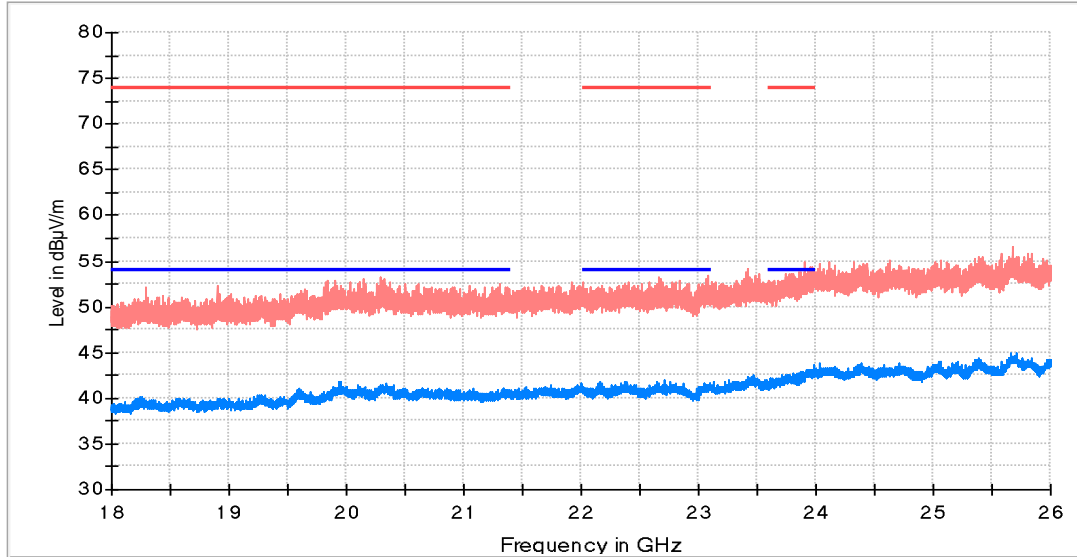

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands AVG Limit

Middle Channel

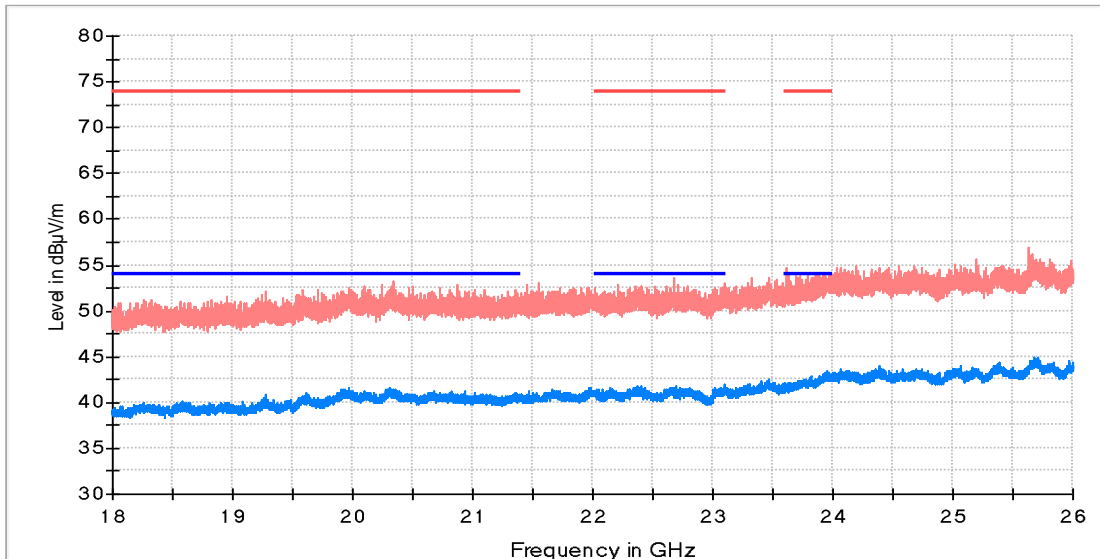


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands AVG Limit

TEST RESULTS (Cont.):

18 – 26 GHz

Highest Channel

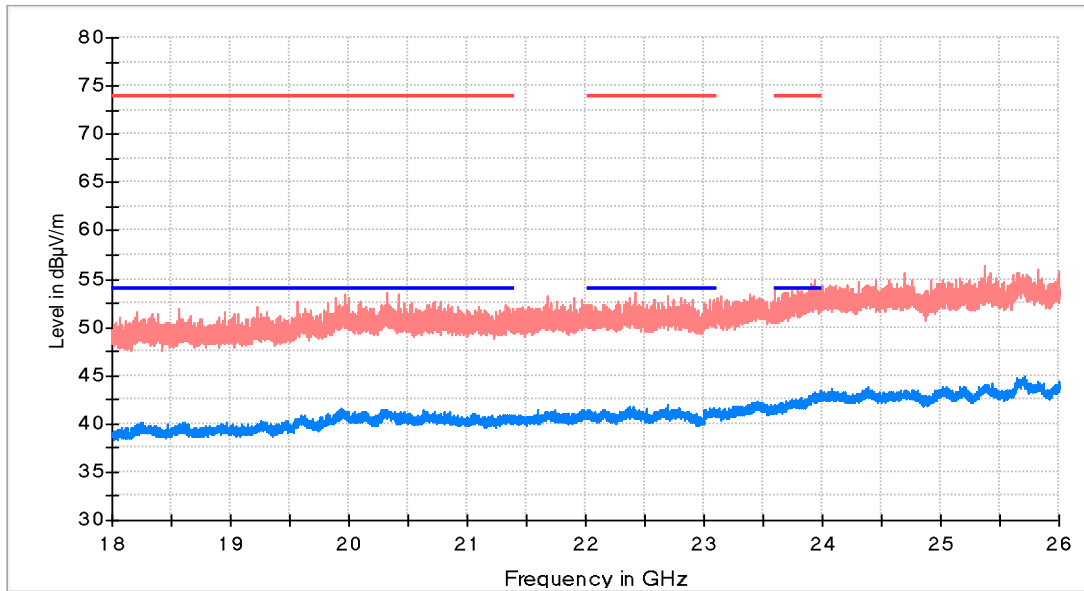


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands AVG Limit

TEST RESULTS (Cont.):


Restricted Bands (2.31 GHz – 2.5 GHz)

Low Channel

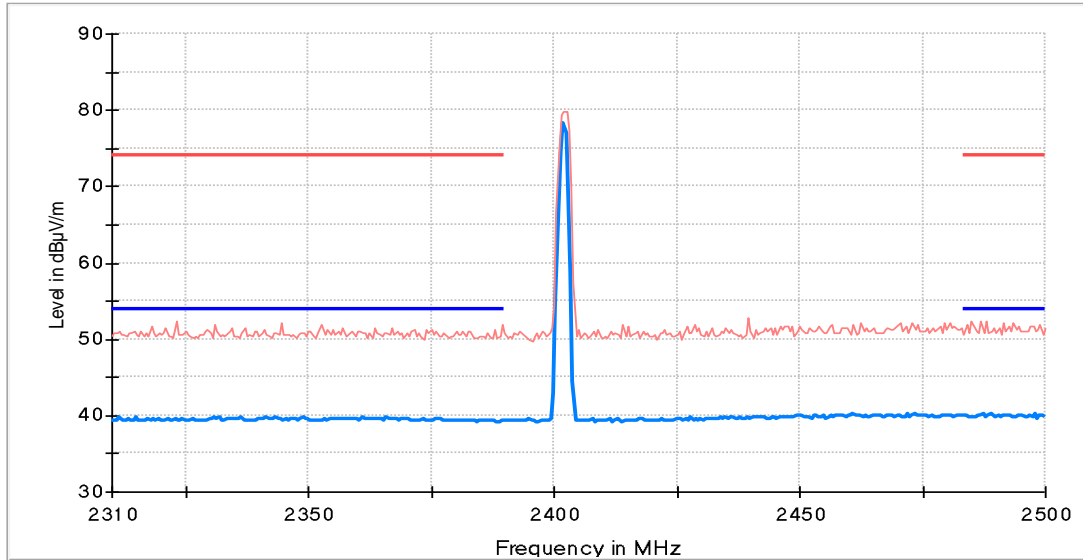

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands AVG Limit


Middle Channel

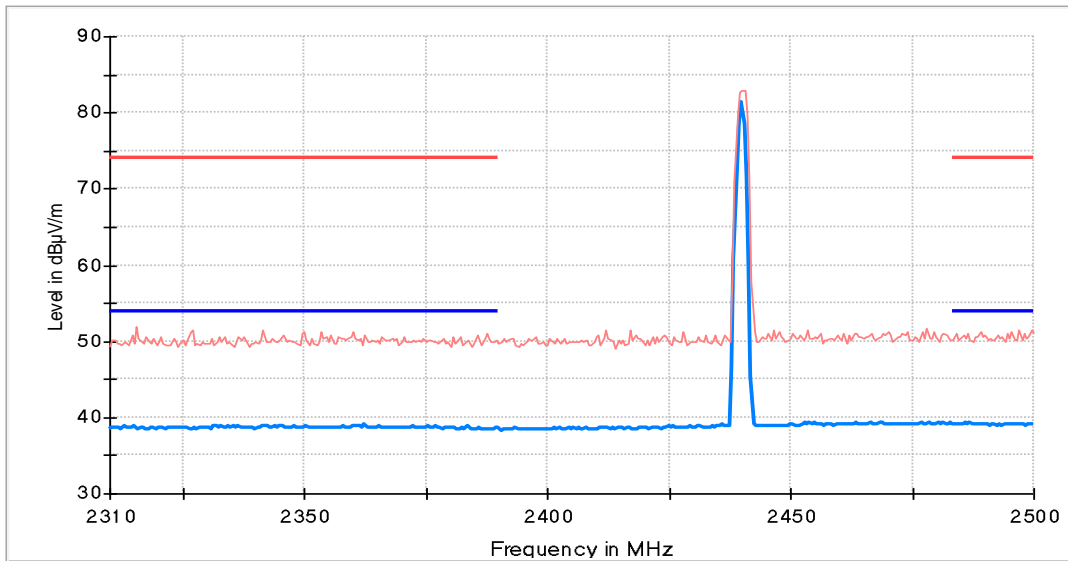

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1 GHz to 26 GHz) Restricted Bands AVG Limit

TEST RESULTS (Cont.):

Highest Channel

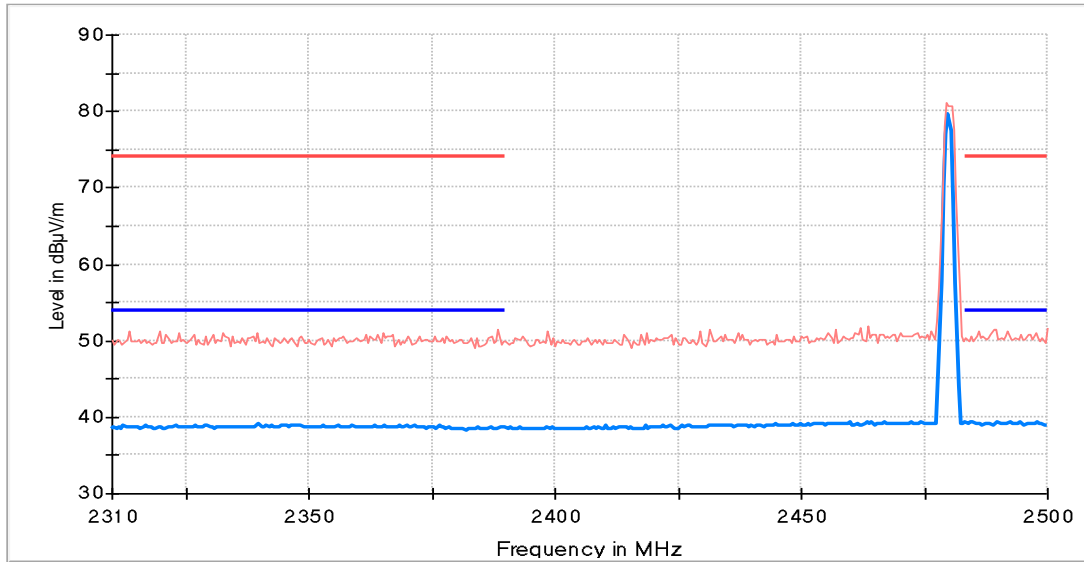

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC1 5.247 (1 GHz to 26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC1 5.247 (1 GHz to 26 GHz) Restricted Bands AVG Limit

Appendix B: Test results (WI-FI 2.4GHz)

Appendix B Content

PRODUCT INFORMATION	47
DESCRIPTION OF TEST CONDITIONS	48
TEST B.1: 99% OCCUPIED BANDWIDTH AND 6DB BANDWIDTH.....	48
TEST B.2: MAXIMUM CONDUCTED OUTPUT POWER AND ANTENNA GAIN	62
TEST B.3: BAND-EDGE EMISSIONS COMPLIANCE (TRANSMITTER).....	69
TEST B.4: POWER SPECTRAL DENSITY	78
TEST B.5: EMISSION LIMITATIONS CONDUCTED (TRANSMITTER).....	85
TEST B.6: EMISSION LIMITATIONS RADIATED (TRANSMITTER).....	92

PRODUCT INFORMATION

The following information is provided by the supplier, in accordance with clause 5.4.1:

Information	Description
Modulation	DSSS/OFDM
Maximum RF Output Power	b/g/n20 mode: 14 dBm
Operating Frequency Range	2412 – 2462 MHz
Nominal Channel Bandwidth	20 MHz
Antenna type	WLAN antenna is embedded in the plastics of the device
Antenna gain	2.2 dBi
Nominal Voltage	
- Supply Voltage	12 Vdc
- Type of power source	DC voltage
Equipment type	WIFI 2.4GHz b/g/n20

DESCRIPTION OF TEST CONDITIONS

During transmitter test the EUT was being controlled by the SW tool to operate in a continuous transmit mode on the test channel as required and in each of the different modulation modes.

TEST CONDITIONS	DESCRIPTION
TC#01 ⁽¹⁾ (b mode)	<u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ <u>Channel Bandwidth:</u> 20 MHz <u>Test Frequencies for Conducted/Radiated tests</u> Lowest channel: 2412 MHz Middle channel: 2437 MHz Highest channel: 2462 MHz
TC#02 ⁽¹⁾ (g mode)	<u>Power supply (V):</u> $V_{\text{nominal}} = 12\text{Vdc}$ <u>Channel Bandwidth:</u> 20 MHz <u>Test Frequencies for Conducted/Radiated tests</u> Lowest channel: 2412 MHz Middle channel: 2437 MHz Highest channel: 2462 MHz
TC#03 ⁽¹⁾ (n mode)	<u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ <u>Channel Bandwidth:</u> 20 MHz <u>Test Frequencies for Conducted/Radiated tests</u> Lowest channel: 2412 MHz Middle channel: 2437 MHz Highest channel: 2462 MHz

Note (1): For spurious emissions for OFDM modes 802.11g and 802.11n20 a preliminary scan was performed to determine the worst case. The following tables and plots show the results for DSSS modulation (802.11b) and the worst case in OFDM modulation (802.11n). The data rates of 1Mb/s for 802.11b, 6Mb/s for 802.11g and MCS0 for 802.11n20 were selected based on the preliminary testing that identified those rates corresponding to the worst cases.


TEST B.1: 99% OCCUPIED BANDWIDTH AND 6DB BANDWIDTH

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	§2.1049, Part 15 Subpart C §15.247(a)(2) and RSS-247 5.2(a)

LIMITS

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 KHz.

TEST SETUP

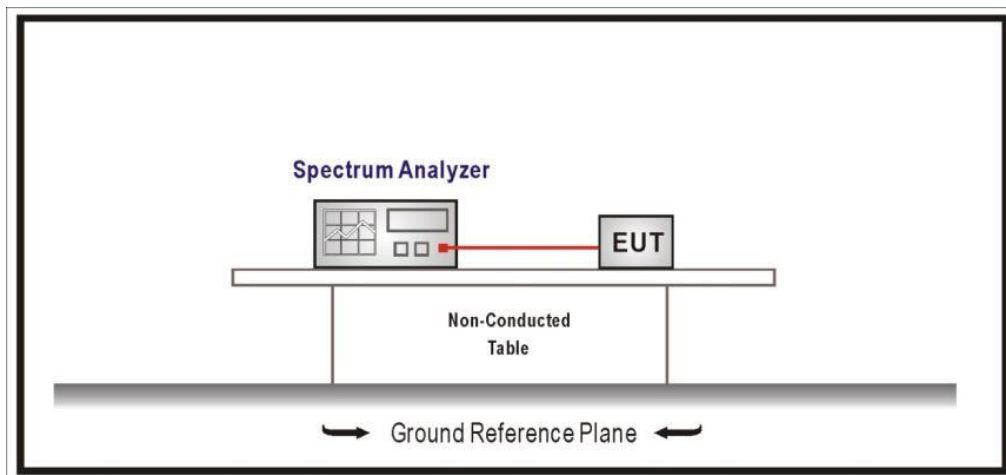

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (b mode)
TEST RESULTS:	PASS

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
6dB Bandwidth (MHz)	8.2	8.15	8.6
Occupied bandwidth (kHz)	13.4	13.1	13.3
Measurement uncertainty (kHz)	<± 1.80		


6dB Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	800	800	800
Sweep time	56.836 µs	56.836 µs	56.836 µs
Reference Level	0.000 dBm	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	21 / max. 150	7 / max. 150	10 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.02 dB	0.34 dB	0.17 dB


TEST RESULTS (Cont.):

6 dB BANDWIDTH


Lowest Channel

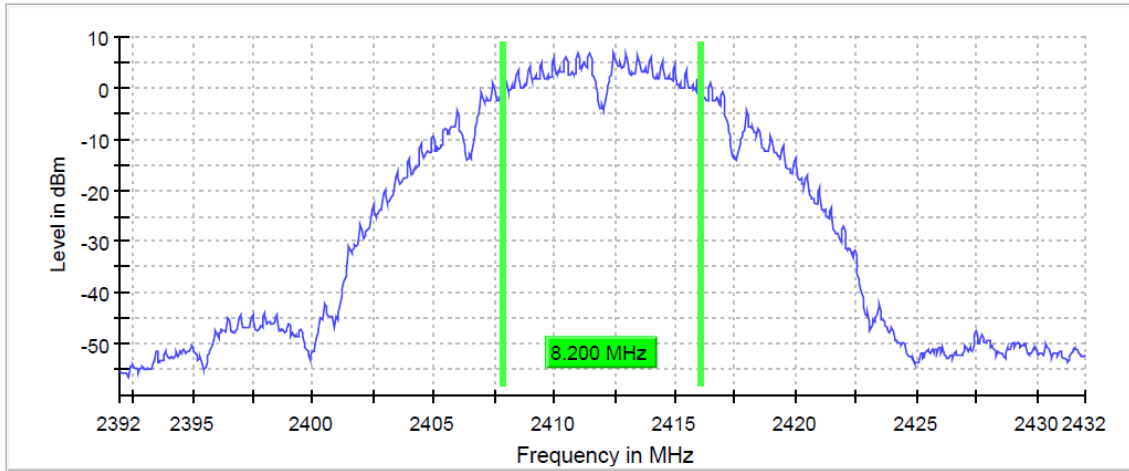

Middle Channel

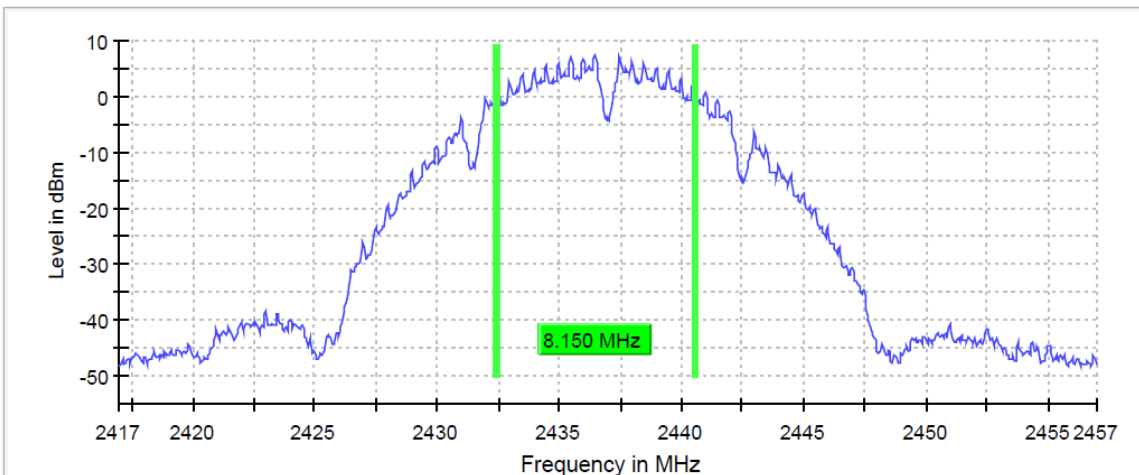

Highest Channel

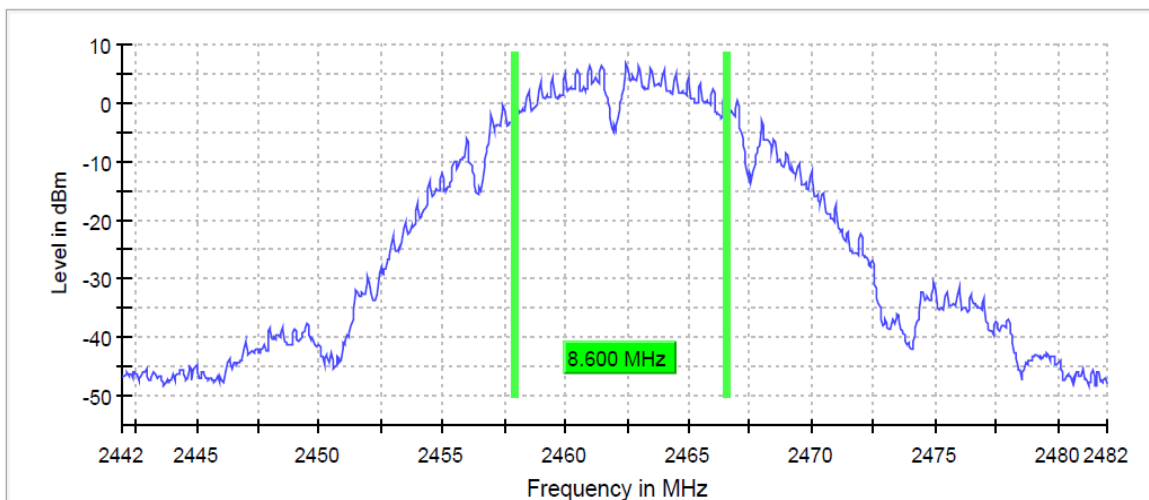

TEST RESULTS (Cont.):


OBW Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 µs	28.477 µs	28.477 µs
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	7 / max. 150	5 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.04 dB	0.08 dB	0.11 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH


Lowest Channel

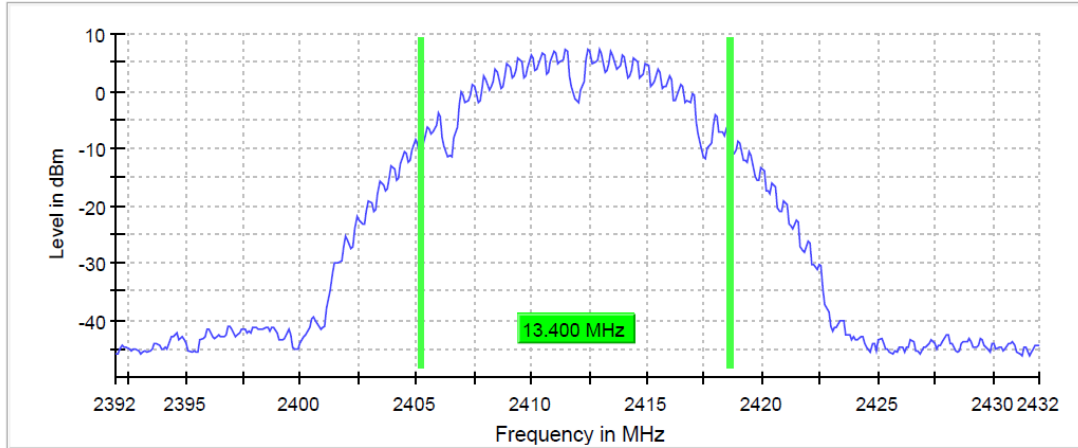

Middle Channel

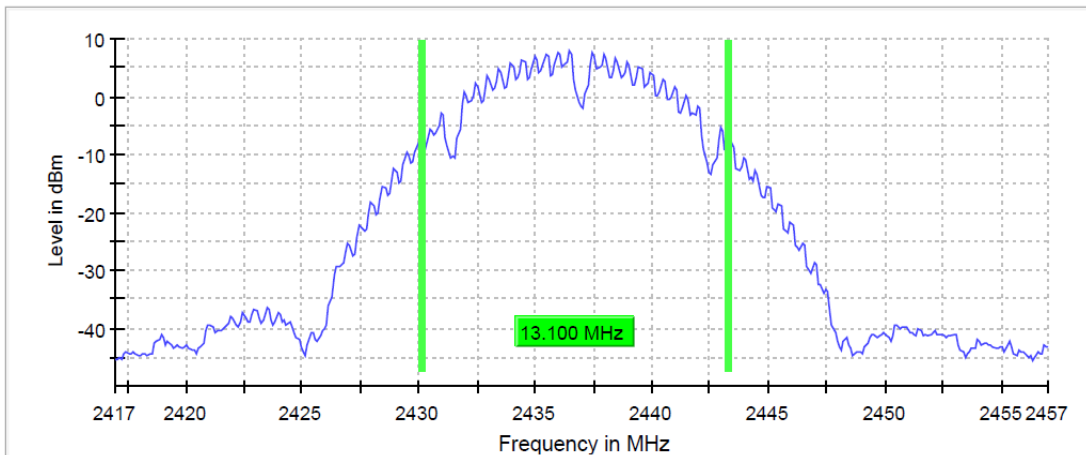

Highest Channel

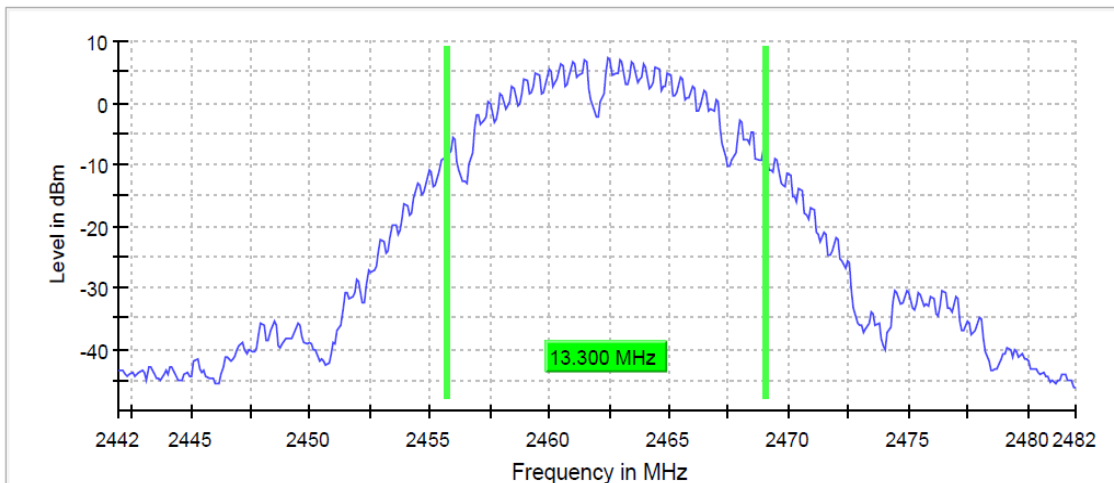

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (g mode)
TEST RESULTS:	PASS

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
6dB bandwidth (MHz)	16.1	15.4	15.2
Occupied bandwidth (MHz)	16.5	16.2	19.1
Measurement uncertainty (kHz)	<± 1.80		


6dB Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	800	800	800
Sweep time	56.836 µs	56.836 µs	56.836 µs
Reference Level	0.000 dBm	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	Off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	74 / max. 150	43 / max. 150	47 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.37 dB	0.37 dB	0.29 dB


TEST RESULTS (Cont.):

6 dB BANDWIDTH


Lowest Channel

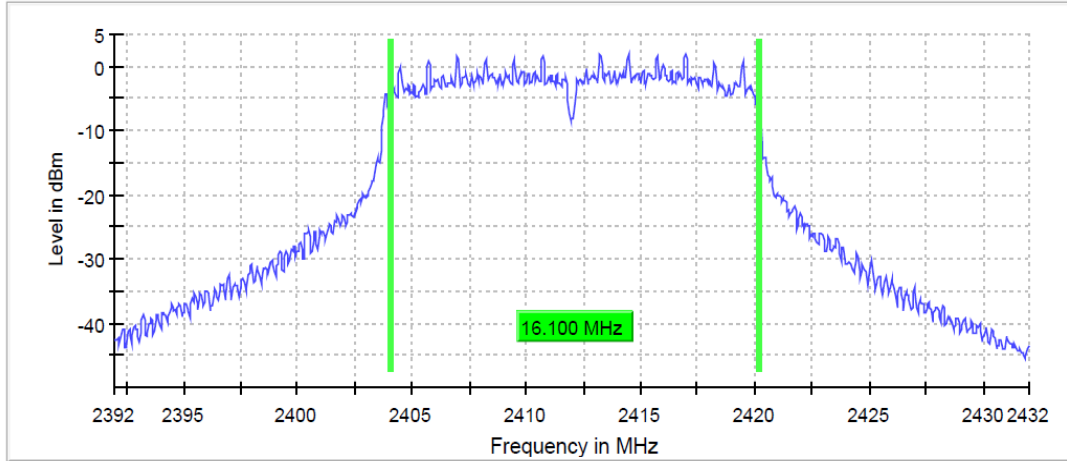

Middle Channel

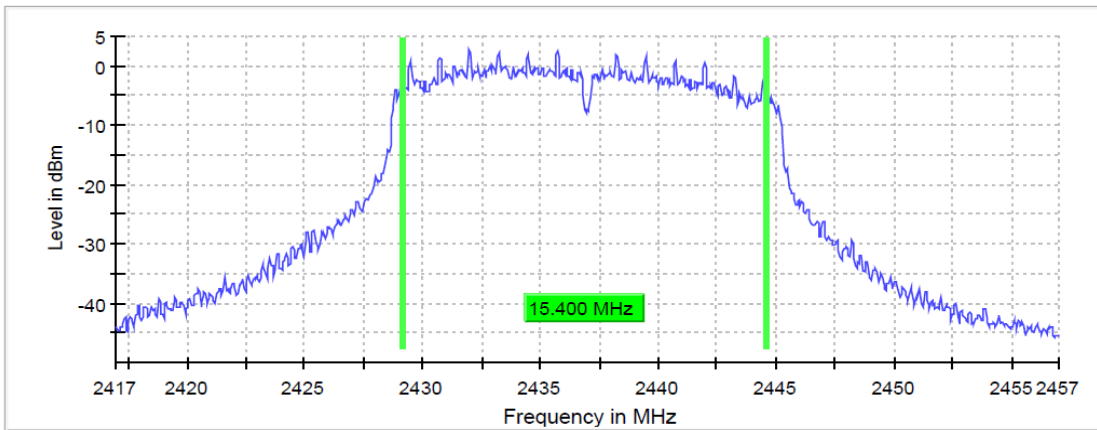

Highest Channel

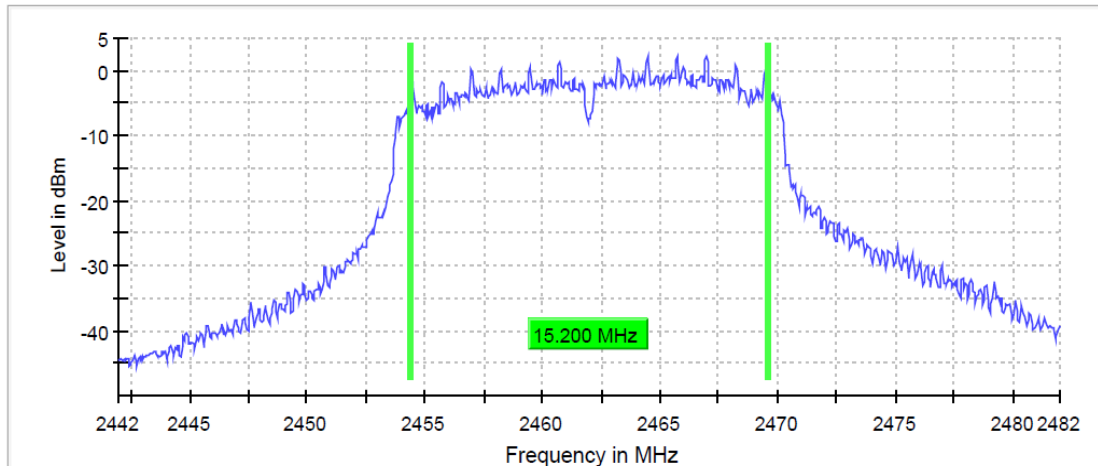

TEST RESULTS (Cont.):


OBW Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	61 / max. 150	33 / max. 150	53 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.00 dB	0.15 dB	0.25 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH


Lowest Channel

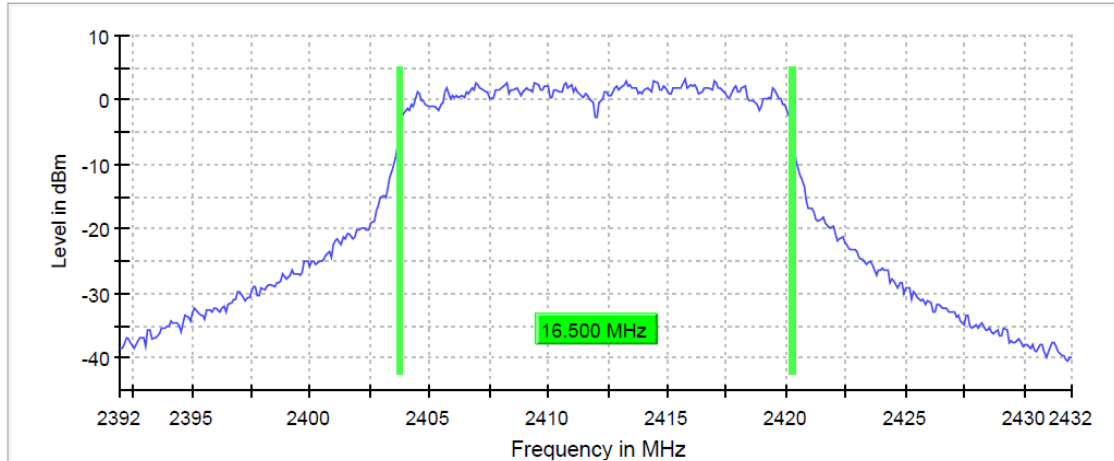

Middle Channel

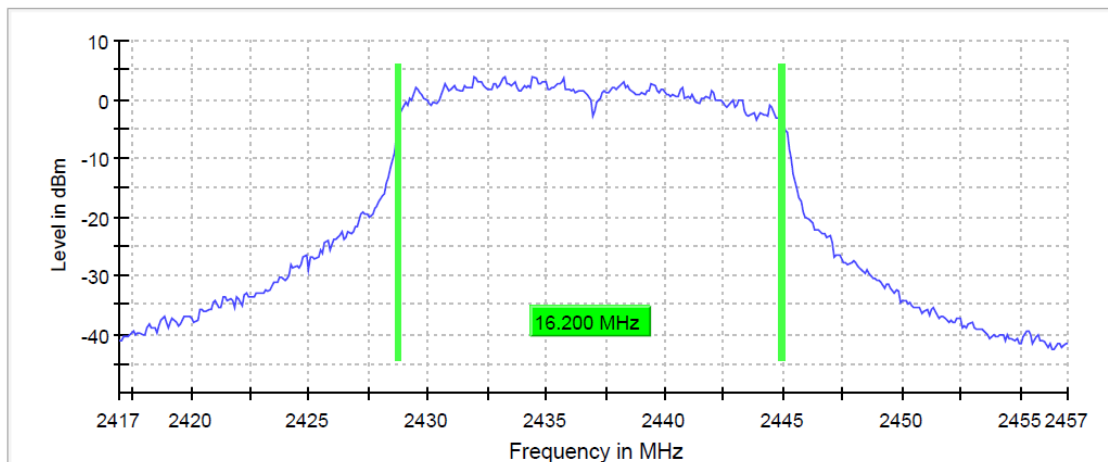

Highest Channel

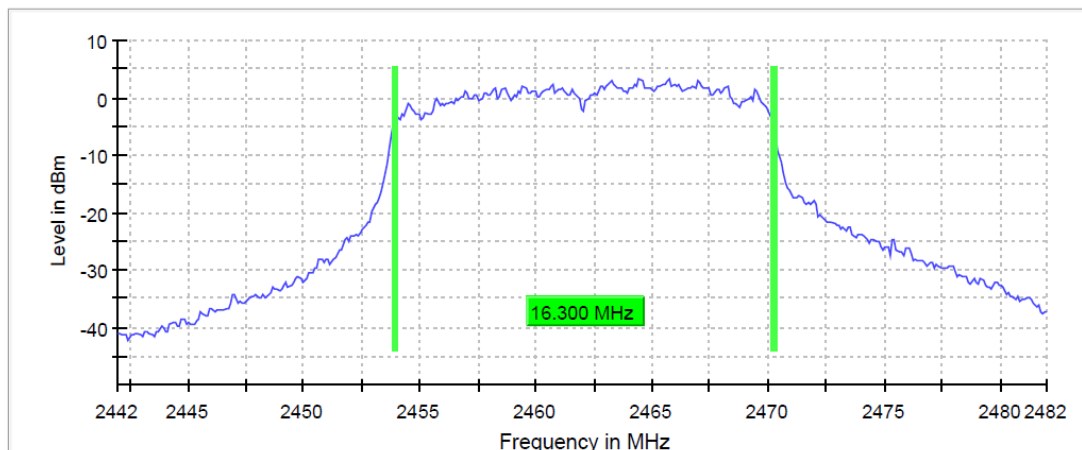

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (n20 mode)
TEST RESULTS:	PASS

	Lowest frequency 2412 MHz	Middle frequency 2437 MHz	Highest frequency 2462 MHz
6dB bandwidth (MHz)	16.15	15.5	15.8
Occupied bandwidth (MHz)	17.7	17.4	19.1
Measurement uncertainty (kHz)	<± 1.80		


6dB Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	800	800	800
Sweep time	56.836 μs	56.836 μs	56.836 μs
Reference Level	0.000 dBm	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	49 / max. 150	70 / max. 150	40 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.47 dB	0.48 dB	0.34 dB


TEST RESULTS (Cont.):

6 dB BANDWIDTH


Lowest Channel

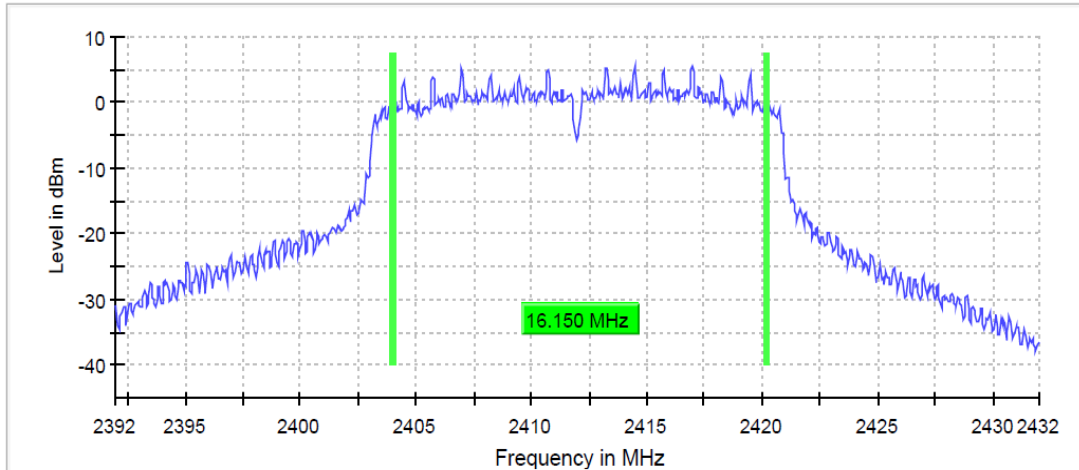

Middle Channel

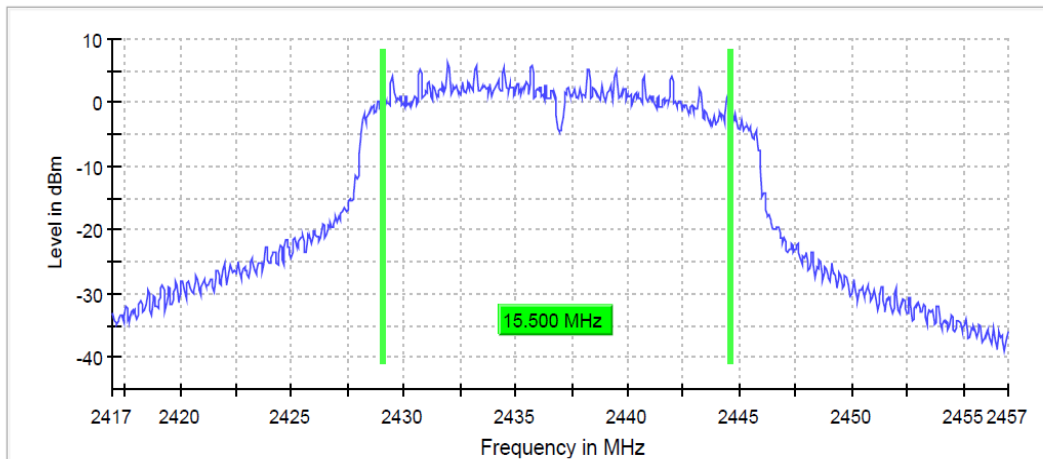

Highest Channel

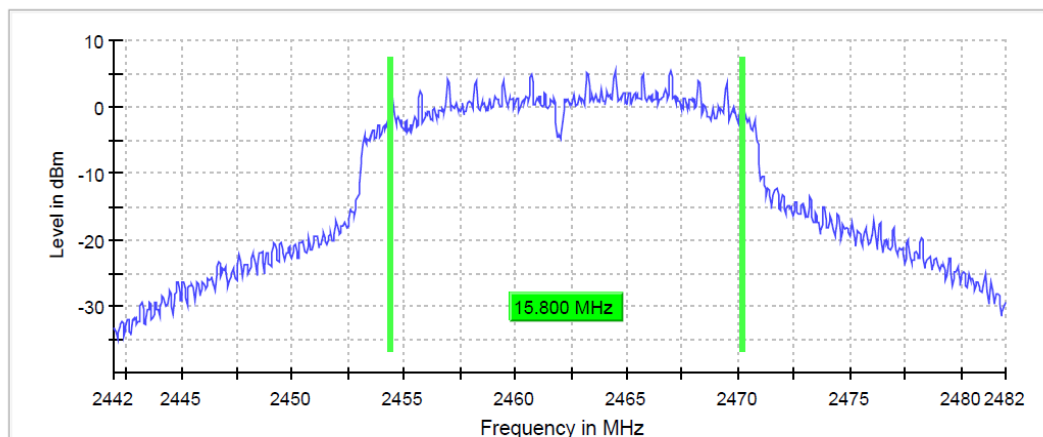

TEST RESULTS (Cont.):


OBW Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39200 GHz	2.41700 GHz	2.44200 GHz
Stop Frequency	2.43200 GHz	2.45700 GHz	2.48200 GHz
Span	40.00 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	31 / max. 150	45 / max. 150	40 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.00 dB	0.07 dB	0.03 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

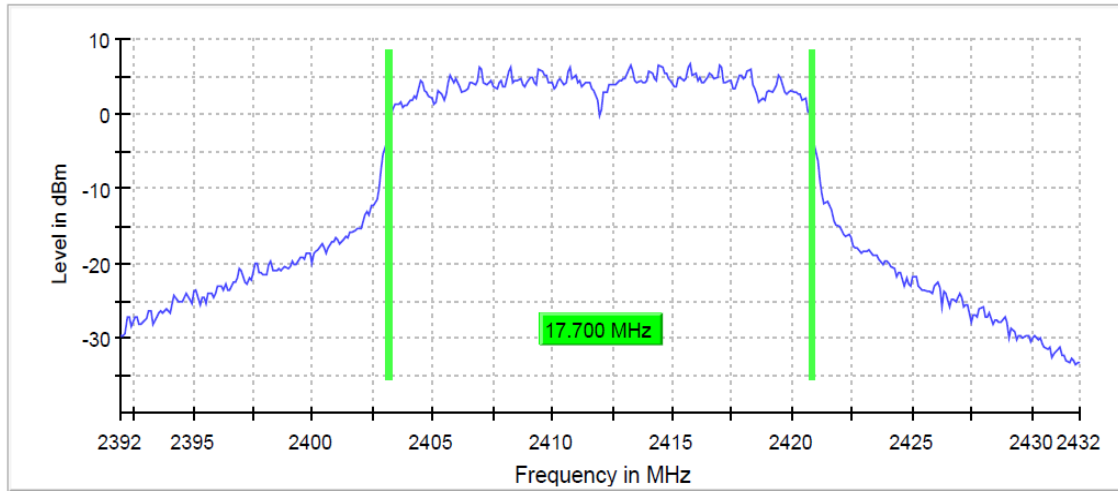

Middle Channel

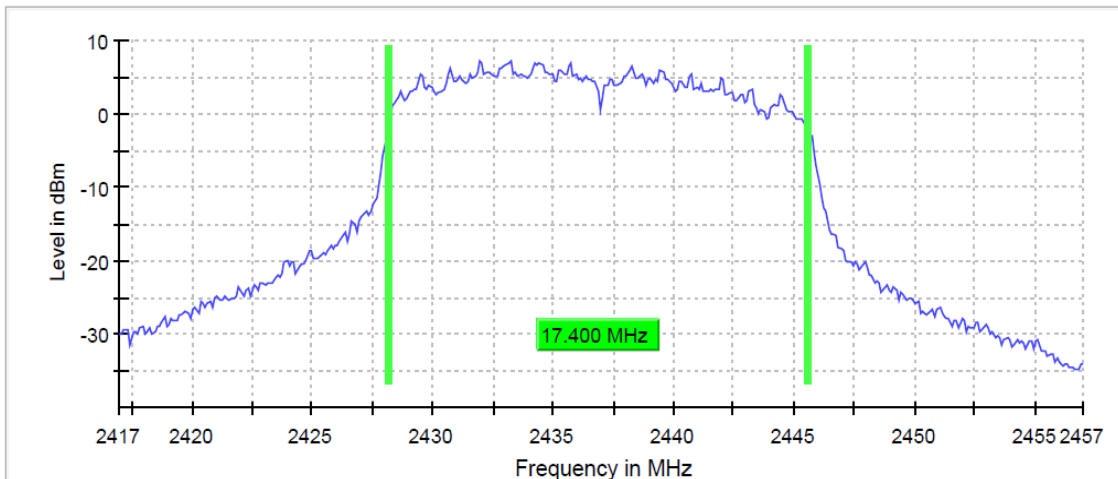

Highest Channel

