

Appendix B:SAR Measurement results Plots

Table of contents
2.4G WiFi Ant1
2.4G WiFi Ant2
5.2G WiFi Ant1
5.2G WiFi Ant2
5.8G WiFi Ant1
5.8G WiFi Ant2

Test Laboratory: CTI SAR Lab

WiFi 802.11b 1CH Right Side 0mm Ant1**DUT: Accent# 1000; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 38.864$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.56, 7.56, 7.56); Calibrated: 2/27/2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x8x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0363 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0700 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.00721 W/kg

Maximum value of SAR (measured) = 0.0461 W/kg

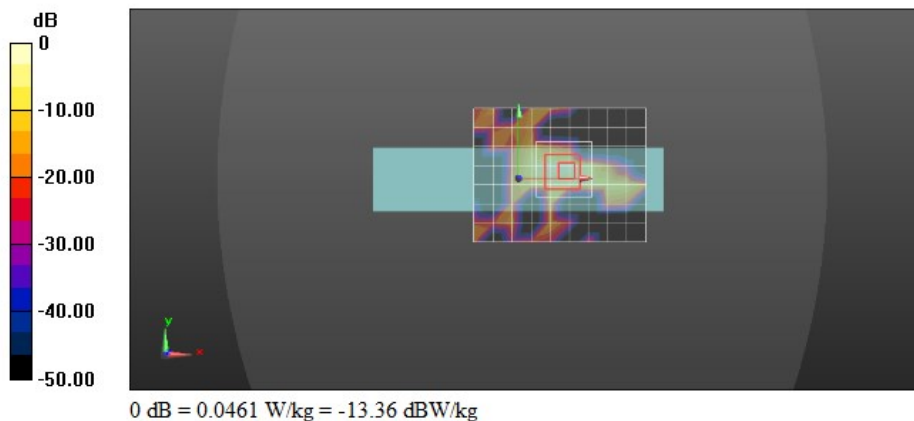

Test Laboratory: CTI SAR Lab

WiFi 802.11b 1CH Top Side 0mm Ant2

DUT: Accent# 1000; Type: NA; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 39.061$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.56, 7.56, 7.56); Calibrated: 2/27/2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.00295 W/kg


Configuration/Body/Zoom Scan (8x10x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.00000515 W/kg

SAR(1 g) = 5.36e-008 W/kg; SAR(10 g) = 5.36e-009 W/kg

Maximum value of SAR (measured) = 0.00271 W/kg

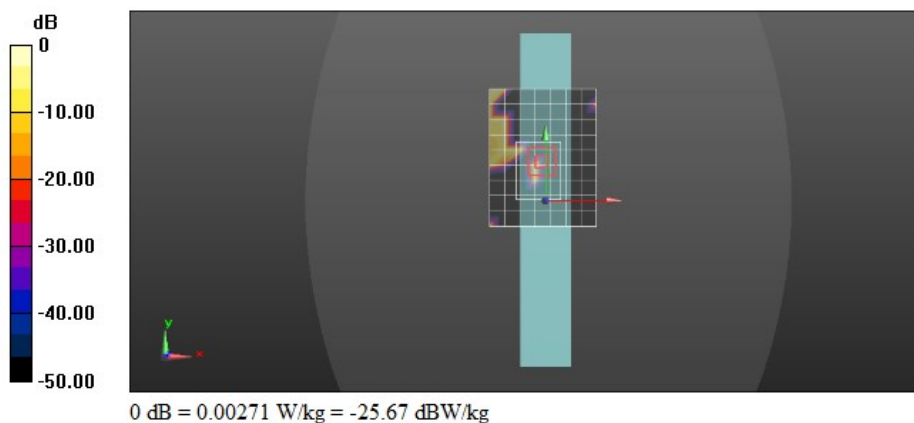

Test Laboratory: CTI SAR Lab

WiFi 802.11a 36CH Right Side 0mm Ant1

DUT: Accent# 1000; Type: NA; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.2G; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.549$ S/m; $\epsilon_r = 35.166$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(5.48, 5.48, 5.48); Calibrated: 2/27/2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.44 W/kg


Configuration/Body/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 10.91 V/m; Power Drift = -0.40 dB

Peak SAR (extrapolated) = 4.14 W/kg

SAR(1 g) = 0.907 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 2.55 W/kg

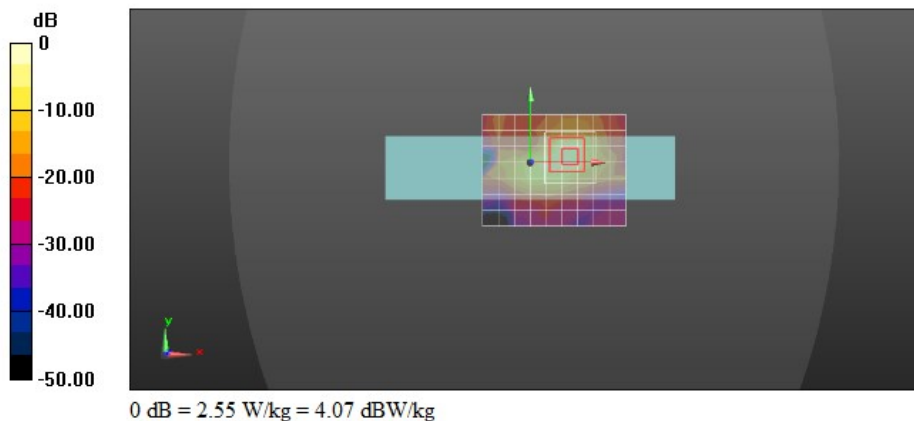

Test Laboratory: CTI SAR Lab

WiFi 802.11a 36CH Right Side 0mm Ant1 Repeated**DUT: Accent# 1000; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.2G; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.549$ S/m; $\epsilon_r = 35.166$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(5.48, 5.48, 5.48); Calibrated: 2/27/2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.43 W/kg


Configuration/Body/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 10.89 V/m; Power Drift = -0.38 dB

Peak SAR (extrapolated) = 4.14 W/kg

SAR(1 g) = 0.901 W/kg; SAR(10 g) = 0.216 W/kg

Maximum value of SAR (measured) = 2.55 W/kg

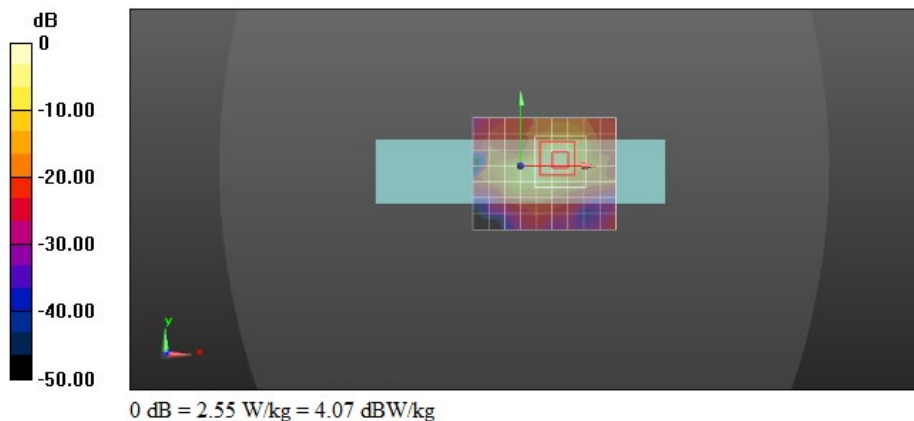

Test Laboratory: CTI SAR Lab

WiFi 802.11a 40CH Back Side 0mm Ant2**DUT: Accent# 1000; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.2G; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 34.892$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(5.48, 5.48, 5.48); Calibrated: 2/27/2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.763 W/kg


Configuration/Body/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.391 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.820 W/kg

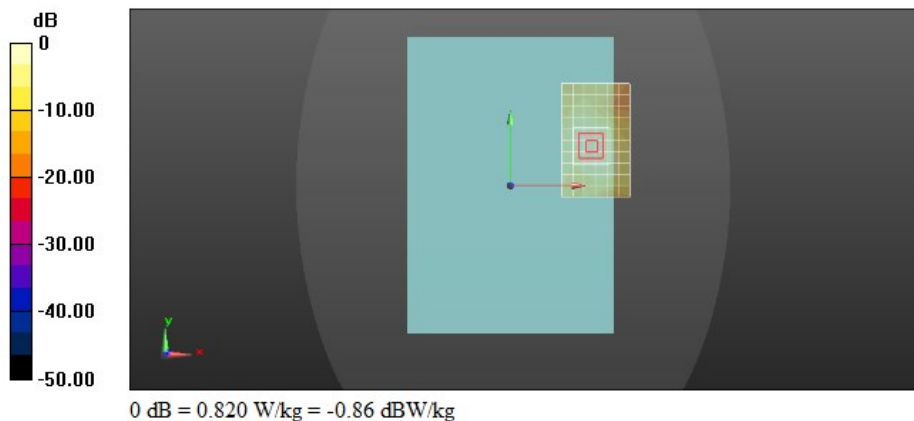

Test Laboratory: CTI SAR Lab

WiFi 802.11a 165CH Right Side 0mm Ant1**DUT: Accent# 1000; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.8G; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.188$ S/m; $\epsilon_r = 34.806$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(4.95, 4.95, 4.95); Calibrated: 2/27/2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.434 W/kg


Configuration/Body/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.226 V/m; Power Drift = -0.33 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.443 W/kg

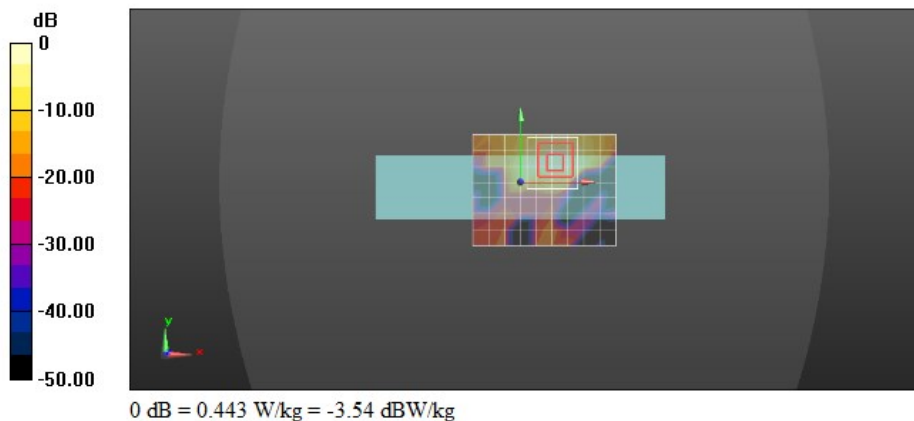

Test Laboratory: CTI SAR Lab

WiFi 802.11a 165CH Top Side 0mm Ant2**DUT: Accent# 1000; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.8G; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.321$ S/m; $\epsilon_r = 34.201$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(4.95, 4.95, 4.95); Calibrated: 2/27/2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.343 W/kg

Configuration/Body/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.5710 V/m; Power Drift = 0.85 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.408 W/kg

