

FCC SAR Test Report

Product : Accent® 800
Trade mark : Accent
Model/Type reference : ACN800-40
Serial Number : N/A
Report Number : EED32O81098205
FCC ID : 2AD9PA-A80040PRC
Date of Issue: : Oct. 12, 2022
Test Standards : Refer to Section 1.5
Test result : PASS

Prepared for:

Prentke Romich Company

1022 Heyl Rd. Wooster, Ohio 44691, United States of America

Prepared by:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District,

Shenzhen, Guangdong, China

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Compiled by:

Wei Shifeng

weishifeng

Approved by:

Aaron Ma

Aaron Ma

Reviewed by:

Tom Chen

Tom Chen

Date of Issue:

Oct. 12, 2022

Check No.:3435220722



Table of contents

1 General information	5
1.1 Notes	5
1.2 Application details	5
1.3 EUT Information	6
1.4 Statement of Compliance	8
1.5 Test standard/s	9
1.6 RF exposure limits	10
1.7 SAR Definition	10
1.8 Testing laboratory	11
1.9 Test Environment	11
1.10 Applicant and Manufacturer	11
2 SAR Measurement System Description and Setup	12
2.1 The Measurement System Description	12
2.2 Probe description	13
2.3 Data Acquisition Electronics description	14
2.4 SAM Twin Phantom description	15
2.5 ELI4 Phantom description	16
2.6 Device Holder description	17
3 SAR Test Equipment List	18
4 SAR Measurement Procedures	19
4.1 Spatial Peak SAR Evaluation	19
4.2 Data Storage and Evaluation	20
4.3 Data Storage and Evaluation	24
5 SAR Verification Procedure	26
5.1 Tissue Verification	26
5.2 System check Procedure	29
5.3 System check results	30
6 SAR Measurement variability and uncertainty	31
6.1 SAR measurement variability	31
6.2 SAR measurement uncertainty	31
7 SAR Test Configuration	32
7.1 WIFI 5G Test Configurations	32
7.2 WIFI 2.4G Test Configurations	36
8 SAR Test Results	37
8.1 Conducted Power Measurements	37

8.1.1 Conducted power of Wi-Fi 5G	37
8.1.2 Conducted Power of Wi-Fi 2.4G	42
8.1.3 Conducted Power of BT	44
8.2 SAR test results	45
8.2.1 Results overview of WiFi 5G	46
8.2.2 Results overview of WiFi 2.4G	48
8.3 Multiple Transmitter Information	49
8.4 Stand-alone SAR	50
8.5 Simultaneous transmission analysis	53
8.6 Simultaneous Transmission Possibilities and Conclusion	55
Annex A: Appendix A: SAR System performance Check Plots	56
Annex B: Appendix B: SAR Measurement results Plots	56
Annex C: Appendix C: Calibration reports	56
Annex D: Appendix D: Photo documentation	56

Modified History

REV.	Modification Description	Issued Date	Remark
REV.1.0	Initial Test Report Release	Oct. 12, 2022	

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report.

Centre Testing International Group Co., Ltd. does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report is not to be reProduced or published in full without the prior written permission.

1.2 Application details

Date of receipt of test item:	2022-08-10
Start of test:	2022-08-11
End of test:	2022-08-26

1.3 EUT Information

Device Information:			
Product:	Accent® 800		
Model:	ACN800-40		
Test Model No.:	ACN800-40		
Trade mark:	Accent		
SN:	N/A		
Device Type:	Portable Production		
Exposure Category:	uncontrolled environment / general population		
Hardware Version:	N/A		
Software Version:	N/A		
Antenna Type :	internal antenna		
Antenna gain:	BT: -0.24 dBi 2.4G wifi : Ant1: -0.52dBi ; Ant2: -0.32dBi; 5.2G wifi: Ant1: -5.81dBi ; Ant2: -1.96dBi; 5.8G wifi: Ant1: -1.08dBi ; Ant2: 2.17dBi;		
Others Accessories:	N/A		
Device Operating Configurations:			
Supporting Mode(s) :	5.2 BT Dual mode: 2402MHz to 2480MHz; 2.4GHz Wi-Fi: 802.11b/g/n(HT20 and HT40)/ax(HE20 and HE40): 2412MHz ~2462 MHz; 5G WIFI: U-NII-1:5.15-5.25GHz; U-NII-3:5.725-5.850GHz.		
Modulation:	BT: GFSK,π/4DQPSK,8DPSK WIFI: DSSS/OFDM/OFDMA		
Operating Frequency Range(s)	Band	TX(MHz)	RX(MHz)
	WIFI 2.4G	2412~2462	
	WIFI 5G	5150-5250; 5725-5850	
	BT	2402~2480	
Test Channels (low-mid-high):	1/3-6-9/11 (2.4G Wi-Fi)		
	0-39-78 (BT)		
	0-19-39 (BLE 2450)		
	WIFI 5G 802.11a/n/ac/ax(20M): 36-40-44-48-149-153-157-161-165		
	WIFI 5G 802.11 n/ac/ax (40M): 38-46-151-159		
WIFI 5G 802.11ac/ax(80M): 42-155			
Power Source:	Adapter:	model: MANGO60S-18BB-PRC input: 100-240V~50/60Hz,1.5A MAX output: 18V,3.33A,60W MAX	

	Li-ion Battery	model: 376893 DC 7.6V,7800mAh,59.28Wh
--	-------------------	--

Remark:

Company Name and Address shown on Report, the sample(s) and sample Information were Provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

1.4 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing are as below:

Band	MAX Reported SAR (W/kg)		SAR Test Limit (W/kg)
	1-g Head	1-g Body (0mm)	
WiFi 2.4G	N/A	0.148	1.60
WiFi 5.2G	N/A	1.077	1.60
WiFi 5.8G	N/A	0.997	1.60
Highest Simultaneous Transmission	N/A	1.182	1.60

Remark: N/A: This devices doesn't support voice mode, the head mode is not applicable.

Note:

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits(1.6W/kg) according to the FCC rule §2.1093, the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and Procedures specified in IEEE Std 1528-2013.

1.5 Test standard/s

ANSI Std C95.1-1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 5 of February 2021))
KDB 248227 D01	SAR guidance for IEEE 802.11(Wi-Fi) transmitters v02r02
KDB 616217 D04	SAR for laptop and tablets v01r02
KDB 447498 D04	Interim General RF Exposure Guidance v01
KDB 690783 D01	SAR Listings on Grants v01r03
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02

1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

The limit applied in this test report is shown in bold letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

1.7 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

- σ = conductivity of the tissue (S/m)
- ρ = mass density of the tissue (kg/m³)
- E = rms electric field strength (V/m)

1.8 Testing laboratory

Test Site	Centre Testing International Group Co., Ltd.
Test Location	Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China
Telephone	+86 (0) 755 3368 3668
Fax	+86 (0) 755 3368 3385

1.9 Test Environment


	Required	Actual
Ambient temperature:	18 – 25 °C	21.5 ± 2.0 °C
Tissue Simulating liquid:	18 – 25 °C	21.5 ± 2.0 °C
Relative humidity content:	30 – 70 %	30 – 70 %

1.10 Applicant and Manufacturer

Applicant/Client Name:	Prentke Romich Company
Applicant Address:	1022 Heyl Rd. Wooster, Ohio 44691, United States of America
Manufacturer Name:	Prentke Romich Company dba PRC-Salttillo
Manufacturer Address:	1022 Heyl Rd. Wooster, Ohio 44691, United States of America
Factory Name:	Estone Technology LTD
Factory Address:	2F, Building No.1, Jia'an Industrial Park, No.2 Long Chang Road, Bao'an, Shenzhen 518101, China.

2 SAR Measurement System Description and Setup

2.1 The Measurement System Description

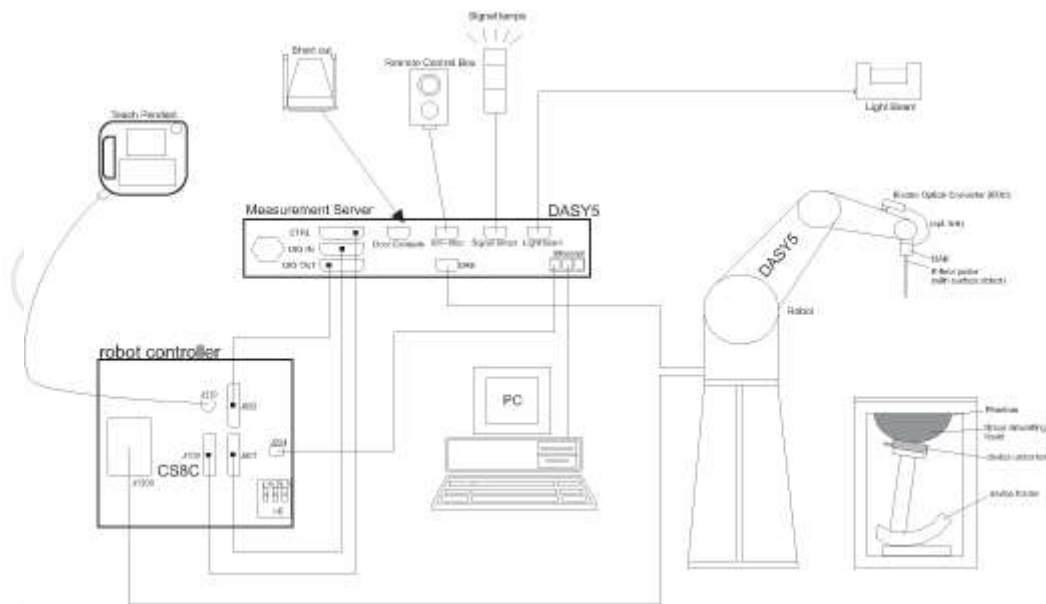

The DASYS system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli TX/RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field Probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for Probe alignment. This improves the (absolute) accuracy of the Probe positioning.
- A computer running Win7 Profesional operating system and the DASYS software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

2.2 Probe description

Dosimetric Probes: These Probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor(± 2 dB). The dosimetric Probes have special calibrations in various liquids at different frequencies.

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Dynamic range	5 μ W/g to 100 mW/g; Linearity: ± 0.2 dB



2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical Probe mounting device includes two different sensor systems for frontal and sideways Probe contacts. They are used for mechanical surface detection and Probe collision detection. The input impedance of the DAE4 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.


Batteries: The DAE works with either two standard 9V batteries or two 9V (actually 8.4V or 9.6 V) rechargeable batteries. Because the electronics automatically power-down unused components during braking or between measurements, the battery lifetime depends on system usage. Typical lifetimes are >20 hours for batteries and >10 hours for accus. Remove the batteries if you do not plan to use the DAE for a long period of time.



2.4 SAM Twin Phantom description

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6 mm). The phantom has three measurement areas:

- ◆ Left hand
- ◆ Right hand
- ◆ Flat phantom

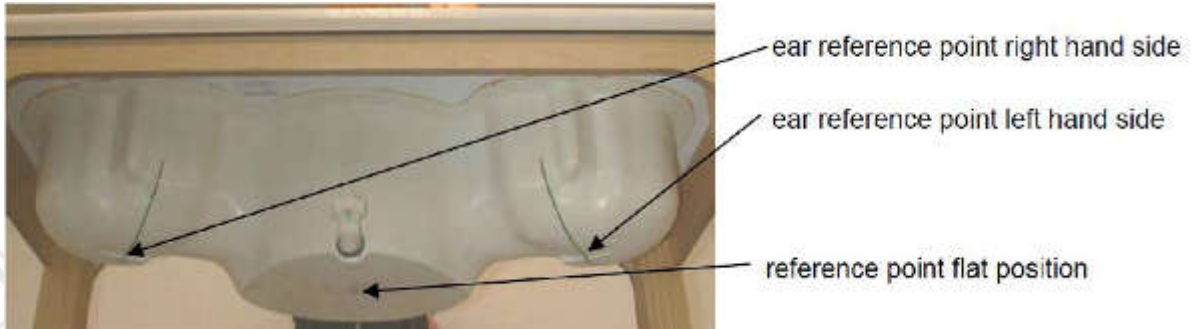

The phantom table for the DASY systems have the size of 100 x 50 x 85 cm (L xWx H). these tables are reinforced for mounting of the robot onto the table. For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.

A white cover is Provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters.


Three reference marks are Provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.



2.5 ELI4 Phantom description

The ELI4 phantom is intended for compliance testing of handheld and body mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

ELI4 has been optimized regarding its performance and can be integrated into a SPEAG standard phantom table. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points

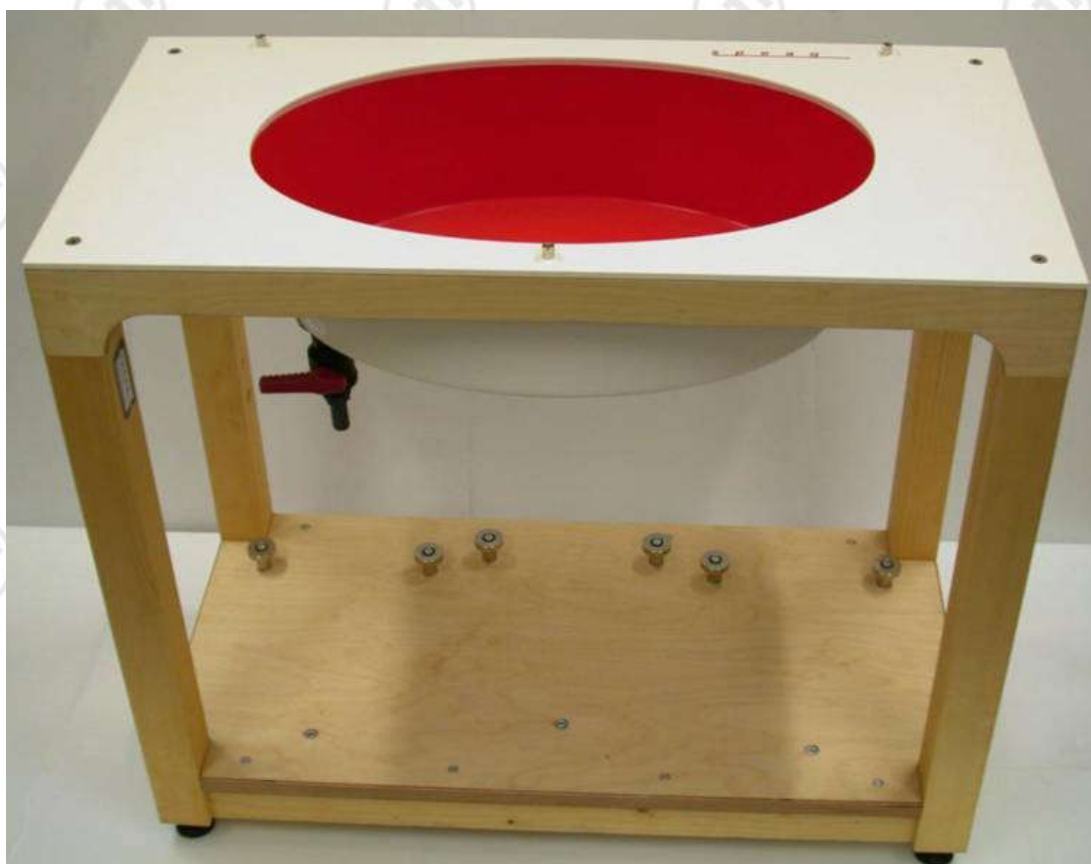

2.6 Device Holder description

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



3 SAR Test Equipment List

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

	Manufacturer	Device Type	Type(Model)	Serial number	Date of last calibration	Valid period
<input checked="" type="checkbox"/>	SPEAG	E-Field Probe	EX3DV4	7328	2022-02-27	One year
<input type="checkbox"/>	SPEAG	E-Field Probe	EX3DV4	7591	2021-08-12	One year
<input type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d193	2021-01-12	Three years
<input type="checkbox"/>	SPEAG	1750 MHz Dipole	D1750V2	1134	2021-01-12	Three years
<input type="checkbox"/>	SPEAG	1900 MHz Dipole	D1900V2	5d198	2021-01-12	Three years
<input type="checkbox"/>	SPEAG	2000 MHz Dipole	D2000V2	1078	2021-01-12	Three years
<input type="checkbox"/>	SPEAG	2300 MHz Dipole	D2300V2	1082	2020-01-06	Three years
<input checked="" type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	959	2021-01-12	Three years
<input type="checkbox"/>	SPEAG	2600 MHz Dipole	D2600V2	1101	2021-01-12	Three years
<input checked="" type="checkbox"/>	SPEAG	5 GHz Dipole	D5GHzV2	1208	2021-01-12	Three years
<input checked="" type="checkbox"/>	SPEAG	DAKS Probe	DAKS-3.5	1052	2021-01-27	Three years
<input checked="" type="checkbox"/>	SPEAG	Planar R140 Vector Reflectometer	DAKS-VNA R140	0200514	2021-01-27	Three years
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1458	2022-01-04	One year
<input checked="" type="checkbox"/>	SPEAG	Software	DASY 5	NA	NCR	NCR
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM V5.0	1875	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Flat Phantom	ELI V6.0	2024	NCR	NCR
<input type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU200	101553	2021-12-24	One year
<input type="checkbox"/>	R & S	Universal Radio Communication Tester	CMW500	102898	2021-12-24	One year
<input checked="" type="checkbox"/>	Agilent	Signal Generator	N5181A	MY50142334	2021-12-24	One year
<input checked="" type="checkbox"/>	BONN	Power Amplifier and directional coupler	SU319W	BL-SZ1550140	2021-12-24	One year
<input checked="" type="checkbox"/>	KEITHLEY	RF Power Meter	3500	1128079	2022-07-01	One year
<input checked="" type="checkbox"/>	KEITHLEY	RF Power Meter	3500	1128081	2022-07-01	One year
<input checked="" type="checkbox"/>	JINGCHUAN G	Temperature/ Humidity Indicator	GSP-8	EMK197F0009 5	2022-07-01	One year

Note:

- 1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
 - a) There is no physical damage on the dipole;
 - b) System check with specific dipole is within 10% of calibrated value;
 - c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
 - d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

4 SAR Measurement Procedures

4.1 Spatial Peak SAR Evaluation

The DASY5 software includes all numerical Procedures necessary to evaluate the spatial peak SAR values. The base for the evaluation is a "cube" measurement in a volume of 30mm³ (7x7x7 points). The measured volume must include the 1 g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan. If the 10g cube or both cubes are not entirely inside the measured volumes, the system issues a warning regarding the evaluated spatial peak values within the PostProcessing engine (SEMCAD X). This means that if the measured volume is shifted, higher values might be possible. To get the correct values you can use a finer measurement grid for the area scan. In complicated field distributions, a large grid spacing for the area scan might miss some details and give an incorrectly interpolated peak location. The entire evaluation of the spatial peak values is performed within the PostProcessing engine (SEMCAD X). The system always gives the maximum values for the 1 g and 10 g cubes.

The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. extraction of the measured data (grid and values) from the Zoom Scan
2. calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. generation of a high-resolution mesh within the measured volume
4. interpolation of all measured values from the measurement grid to the high-resolution grid
5. extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. calculation of the averaged SAR within masses of 1 g and 10 g

4.2 Data Storage and Evaluation

Data Storage

The DASY5 software stores the measured voltage acquired by the Data Acquisition Electronics (DAE) as raw data together with all the necessary software parameters for the data evaluation (Probe calibration data, liquid parameters and communication system parameters) in measurement files with the extension .da5x. The postProcessing software evaluates the data every time the data is visualized or exported. This allows the verification and modification of the setup after completion of the measurement. For example, if a measurement has been performed with an incorrect crest factor, the parameter can be corrected afterwards and the data can be reevaluated.

To avoid unintentional parameter changes or data manipulations, the parameters in measured files are locked. In the administrator access mode of the software, the parameters can be unlocked. After changing the parameters, the measured scans can be reevaluated in the postProcessing engine.

The measured data can be visualized or exported in different units or formats, depending on the selected Probe type (e.g., E-field, H-field, SAR). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The fields and SAR are calculated from the measured voltage (Probe voltage acquired by the DAE) and the following parameters:

Probe parameters:	- Sensitivity	$norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion Factor	$convF_i$
	- Diode Compression Point	dcp_i
	- Probe Modulation Response Factors	a_i, b_i, c_i, d
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Relative Permittivity	ρ

This parameters are stored in the DASY5 V52 measurement file.

These parameters must be correctly set in the DASY5 V52 software setup. They are available as configuration file and can be imported into the measurement file. The values displayed in the multimeter window are assessed using the parameters of the actual system setup. In the scan visualization and export modes, the parameters stored in the measurement file are used.

The measured voltage is not Proportional to the exciting. It must be first linearized.

ApProximated Probe Response Linearization using Crest Factor.

This linearization method is enabled when a custom defined communication system is measured. The compensation applied is a function of the measured voltage, the detector diode compression point and the crest factor of the measured signal.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with	V_i	=	linearized voltage of channel i (uV)	(i = x,y,z)
	U_i	=	measured voltage of channel i (uV)	(i = x,y,z)
	cf	=	crest factor of exciting field	(DASY parameter)
	dcp _i	=	diode compression point of channel i (uV)	(Probe parameter, i = x,y,z)

Field and SAR Calculation

The primary field data for each channel are calculated using the linearized voltage:

$$E \quad - \quad \text{fieldProbes :} \quad E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$H \quad - \quad \text{fieldProbes :} \quad H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = linearized voltage of channel i (i = x,y,z)

Norm_i = sensor sensitivity of channel i (i = x,y,z)

$\mu\text{V}/(\text{V/m})^2$ for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field Probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RMS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

Spatial Peak SAR for 1 g and 10 g

The DASY5 software includes all numerical Procedures necessary to evaluate the spatial peak SAR values. The base for the evaluation is a "cube" measurement at the points of the fine cube grid consisting of 5 x 5 x 7 points(with 8mm horizontal resolution) or 7 x 7 x 7 points(with 5mm horizontal resolution) or 8 x 8 x 7 points(with 4mm horizontal resolution)..The entire evaluation of the spatial peak values is performed within the PostProcessing engine (SEMCAD X).The system always gives the maximum values for the 1 g and 10 g cubes.

The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. extraction of the measured data (grid and values) from the Zoom Scan.
2. calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
3. generation of a high-resolution mesh within the measured volume.
4. interpolation of all measured values from the measurement grid to the high-resolution grid
5. extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
6. calculation of the averaged SAR within masses of 1 g and 10 g.

4.3 Data Storage and Evaluation

The DASYS installation includes predefined files with recommended Procedures for measurements and validation. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

Step 1: Power reference measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch Process. The Minimum distance of Probe sensors to surface determines the closest measurement point to phantom surface. By default, the Minimum distance of Probe sensors to surface is 4 mm. This distance can be modified by the user, but cannot be smaller than the Distance of sensor calibration points to Probe tip as defined in the Probe Properties. The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hotspot. The sophisticated interpolation routines implemented in DASYS software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2003 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Step 3: Zoom Scan

The Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The default Zoom Scan is defined in the following table. DASY5 is also able to perform repeated zoom scans if more than 1 peak is found during area scan. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Area scan and Zoom scan resolutions per FCC KDB Publication 865664 D01:

Frequency	Maximun Area Scan resolution ($\Delta x_{Area}, \Delta y_{Area}$)	Maximun Zoom Scan spatial resolution ($\Delta x_{Zoom}, \Delta y_{Zoom}$)	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{Zoom}(n)$	$\Delta z_{Zoom}(1)^*$	$\Delta z_{Zoom}(n>1)^*$	
≤ 2GHz	≤ 15mm	≤ 8mm	≤ 5mm	≤ 4mm	$\leq 1.5 * \Delta z_{Zoom}(n-1)$	≥ 30mm
2-3GHz	≤ 12mm	≤ 5mm	≤ 5mm	≤ 4mm	$\leq 1.5 * \Delta z_{Zoom}(n-1)$	≥ 30mm
3-4GHz	≤ 12mm	≤ 5mm	≤ 4mm	≤ 3mm	$\leq 1.5 * \Delta z_{Zoom}(n-1)$	≥ 28mm
4-5GHz	≤ 10mm	≤ 4mm	≤ 3mm	≤ 2.5mm	$\leq 1.5 * \Delta z_{Zoom}(n-1)$	≥ 25mm
5-6GHz	≤ 10mm	≤ 4mm	≤ 2mm	≤ 2mm	$\leq 1.5 * \Delta z_{Zoom}(n-1)$	≥ 22mm

Step 4: Power Drift Monitoring

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement job within the same Procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. If the value changed by more than 5%, the evaluation should be retested.

5 SAR Verification Procedure

5.1 Tissue Verification

The following materials are used for Producing the tissue-equivalent materials.

(Liquids used for tests are marked with☒):

Ingredients (% of weight)	Frequency (MHz)						
	Head Tissue						
Tissue Type	Head Tissue						
frequency band	<input type="checkbox"/> 835	<input type="checkbox"/> 1800	<input type="checkbox"/> 2000	<input type="checkbox"/> 2300	<input checked="" type="checkbox"/> 2450	<input type="checkbox"/> 2600	<input checked="" type="checkbox"/> 5200-5800
Water	41.45	52.64	54.9	62.82	62.7	55.242	65.52
Salt (NaCl)	1.45	0.36	0.18	0.51	0.5	0.306	0.0
Sugar	56.0	0.0	0.0	0.0	0.0	0.0	0.0
HEC	1.0	0.0	0.0	0.0	0.0	0.0	0.0
Bactericide	0.1	0.0	0.0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	36.8	0.0	17.24
DGBE	0.0	47.0	44.92	36.67	0.0	44.452	0.0
Diethylenglycol monohexylether	0.0	0.0	0.0	0.0	0.0	0.0	17.24

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue simulating liquids: parameters:


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r (+/-5%)	σ (S/m) (+/-5%)	ϵ_r	σ (S/m)		
2450H	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	39.74	1.83	20.51°C	8/12/2022
	2412	39.27 (37.31~41.23)	1.77 (1.68~1.86)	39.96	1.78	20.51°C	8/12/2022
	2437	39.22 (37.26~41.18)	1.79 (1.70~1.88)	39.86	1.81	20.51°C	8/12/2022
	2462	39.18 (37.22~41.14)	1.81 (1.72~1.90)	39.74	1.84	20.51°C	8/12/2022
2450H	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	39.79	1.81	21.25°C	8/15/2022
	2412	39.27 (37.31~41.23)	1.77 (1.68~1.86)	40.02	1.79	21.25°C	8/15/2022
	2437	39.22 (37.26~41.18)	1.79 (1.70~1.88)	39.90	1.81	21.25°C	8/15/2022
	2462	39.18 (37.22~41.14)	1.81 (1.72~1.90)	39.83	1.83	21.25°C	8/15/2022
5000H	5200	35.82 (34.20~37.61)	4.80 (4.56~5.04)	35.70	4.77	20.51°C	8/16/2022
	5180	36.02 (34.22~37.82)	4.64 (4.41~4.87)	35.95	4.76	20.51°C	8/16/2022
	5240	35.96 (34.16~37.76)	4.70 (4.47~4.94)	35.13	4.85	20.51°C	8/16/2022
5000H	5200	35.82 (34.20~37.61)	4.80 (4.56~5.04)	36.07	4.80	20.65°C	8/17/2022
	5180	36.02 (34.22~37.82)	4.64 (4.41~4.87)	36.32	4.76	20.65°C	8/17/2022
	5240	35.96 (34.16~37.76)	4.70 (4.47~4.94)	35.57	4.89	20.65°C	8/17/2022
5000H	5200	35.82 (34.20~37.61)	4.80 (4.56~5.04)	36.04	4.78	20.56°C	8/23/2022
	5180	36.02 (34.22~37.82)	4.64 (4.41~4.87)	36.39	4.73	20.56°C	8/23/2022
	5240	35.96 (34.16~37.76)	4.70 (4.47~4.94)	35.66	4.88	20.56°C	8/23/2022

5000H	5800	35.30 (33.54~37.07)	5.27 (5.01~5.53)	34.76	5.13	19.89°C	8/18/2022
	5745	35.36 (33.59~37.13)	5.22 (4.96~5.48)	34.51	5.21	19.89°C	8/18/2022
	5785	35.32 (33.55~37.09)	5.26 (5.00~5.52)	35.04	5.22	19.89°C	8/18/2022
	5825	35.28 (33.52~37.04)	5.30 (5.04~5.57)	34.92	5.36	19.89°C	8/18/2022
5000H	5800	35.30 (33.54~37.07)	5.27 (5.01~5.53)	35.23	5.08	20.50°C	8/24/2022
	5745	35.36 (33.59~37.13)	5.22 (4.96~5.48)	34.53	5.20	20.50°C	8/24/2022
	5785	35.32 (33.55~37.09)	5.26 (5.00~5.52)	34.87	5.18	20.50°C	8/24/2022
	5825	35.28 (33.52~37.04)	5.30 (5.04~5.57)	34.73	5.26	20.50°C	8/24/2022
ε _r = Relative permittivity, σ= Conductivity							

5.2 System check Procedure

The System check is performed by using a System check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the System check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

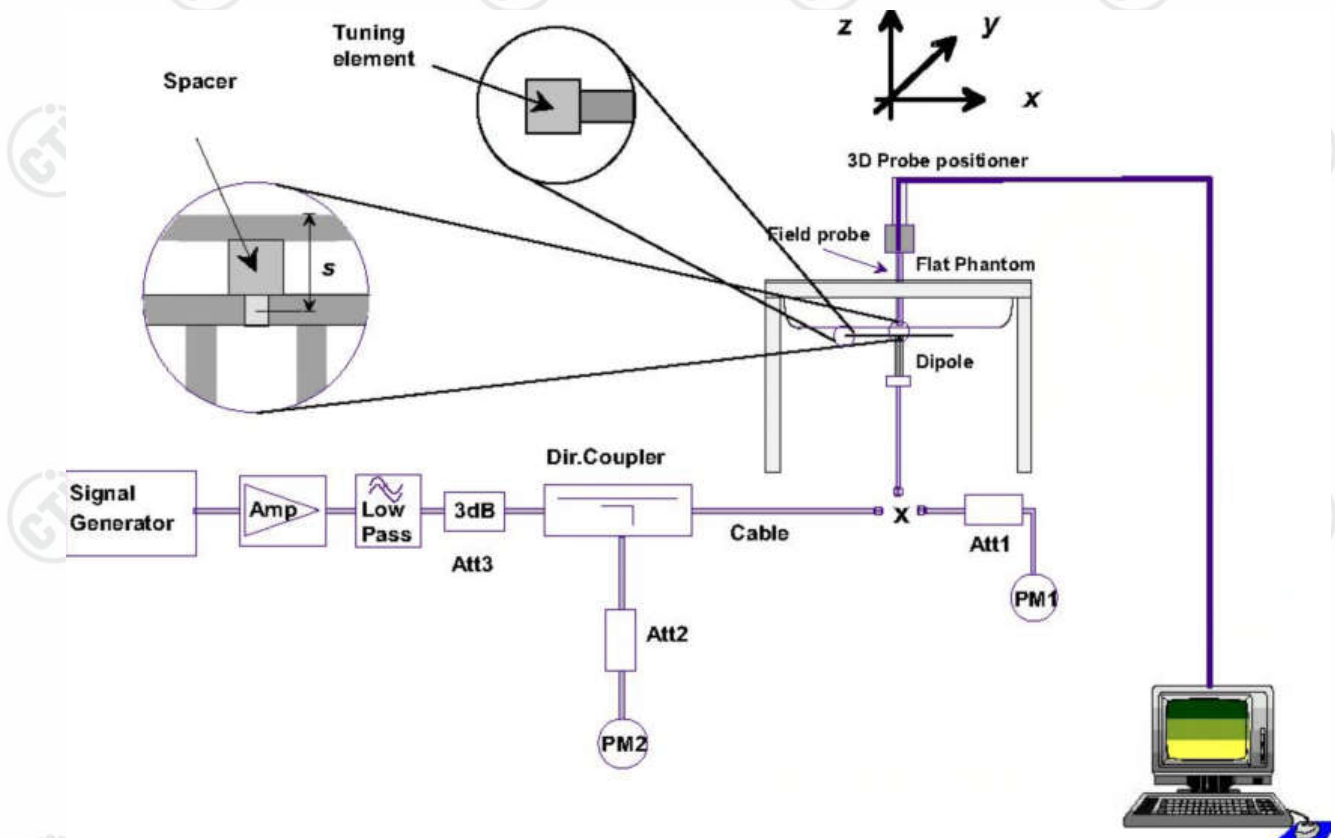

5.3 System check results

The system Check is performed for verifying the accuracy of the complete measurement system and performance of the software. The following table shows System check results for all frequency bands and tissue liquids used during the tests (plot(s) see annex A).

System Check (MHz)	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)		
D2450 Head	53.70 (48.33~59.07)	25.00 (22.50~27.50)	55.20	25.56	20.51°C	8/12/2022
D2450 Head	53.70 (48.33~59.07)	25.00 (22.50~27.50)	52.00	24.24	21.25°C	8/15/2022
D5200 Head	83.50 (75.15~91.85)	23.90 (21.51~26.29)	88.30	26.00	20.51°C	8/16/2022
D5200 Head	83.50 (75.15~91.85)	23.90 (21.51~26.29)	89.60	26.10	20.65°C	8/17/2022
D5200 Head	83.50 (75.15~91.85)	23.90 (21.51~26.29)	85.80	25.40	20.56°C	8/23/2022
D5800 Head	79.20 (71.28~87.12)	22.50 (20.25~24.75)	82.40	24.00	19.89°C	8/18/2022
D5800 Head	79.20 (71.28~87.12)	22.50 (20.25~24.75)	82.10	23.60	20.50°C	8/24/2022

Note: All SAR values are normalized to 1W forward power.

6 SAR Measurement variability and uncertainty

6.1 SAR measurement variability

In accordance with published RF Exposure KDB Procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results. The same Procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure.

- 1) Repeated measurement is not required when the original highest measured SAR is < 2.0 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 2.0 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 3.0 or when the original or repeated measurement is ≥ 3.6 W/kg (~ 10% from the 10-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 3.75 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

6.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

7 SAR Test Configuration

7.1 WIFI 5G Test Configurations

1) U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR Procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

1.1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.

1.2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.

1.3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This Procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

2) U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR Probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement Procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR Probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR Probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and Probe calibration frequency points requirements.

3) OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for Production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement Procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

3.1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.

3.2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.

3.3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.

3.4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection Procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement Procedures or additional power measurements required for further SAR test reduction. The same Procedures also apply to subsequent highest output power channel(s) selection.

3.4.1) The channel closest to mid-band frequency is selected for SAR measurement.

3.4.2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

4) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration Procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the Procedures.

7.2 WIFI 2.4G Test Configurations

For WiFi SAR testing, a communication link is set up with the testing software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The RF signal utilized in SAR measurement has 100% duty cycle and its crest factor is 1. The test Procedures in KDB 248227D01 v02r02 are applied.

Per KDB 248227 D01 802.11 Wi-Fi SAR v02r02, SAR Test Reduction criteria are as follows:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS Procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement Procedures in the required wireless mode test configuration(s). The relative SAR levels of multiple exposure test positions can be established by area scan measurements on the highest measured output power channel to determine the initial test position. The area scans must be measured using the same SAR measurement configurations, including test channel, maximum output power, Probe tip to phantom distance, scan resolution etc.

When the reported SAR for the initial test position is:

- 1) ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR Procedures.
- 2) > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
- 3) For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.

SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

8 SAR Test Results

8.1 Conducted Power Measurements

8.1.1 Conducted power of Wi-Fi 5G

Antenna		ANT1				
Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)
U-NII-1	802.11a	36	5180	6	11.5	11.35
		40	5200		11.5	11.18
		48	5240		11.5	11.49
	802.11n HT20	36	5180	6.5	11.5	10.76
		40	5200		11.5	11.04
		48	5240		11.5	10.73
	802.11n HT40	38	5190	13.5	10.5	10.38
		46	5230		10.5	10.14
	802.11ac VHT20	36	5180	6.5	10.5	10.41
		40	5200		10.5	10.46
		48	5240		10.5	9.94
	802.11ac VHT40	38	5190	13.5	11	10.18
		46	5230		11	10.56
	802.11ac VHT80	42	5210	29.3	8.5	8.35
	802.11ax HEW20	36	5180	8	9.5	8.86
		40	5200		9.5	8.76
		48	5240		9.5	9.12
	802.11ax HEW40	38	5190	16	8	7.78
46		5230	8		7.71	
802.11ax HEW80	42	5210	34	7.5	7.07	
U-NII-3	802.11a	149	5745	6	11.5	11.15
		157	5785		11.5	10.83
		165	5825		11.5	11.27
	802.11n HT20	149	5745	6.5	11	10.05
		157	5785		11	10.82
		165	5825		11	10.50
	802.11n HT40	151	5755	13.5	10.5	9.85
		159	5795		10.5	10.12

	802.11ac VHT20	149	5745	6.5	10.5	9.95
		157	5785		10.5	10.03
		165	5825		10.5	10.27
	802.11ac VHT40	151	5755	13.5	10.5	9.80
		159	5795		10.5	10.48
	802.11ac VHT80	155	5775	29.3	8.5	8.10
	802.11ax HEW20	149	5745	8	9	8.48
		157	5785		9	8.68
		165	5825		9	8.84
	802.11ax HEW40	151	5755	16	8	7.60
		159	5795		8	7.80
	802.11ax HEW80	155	5775	34	7	6.60

Antenna		ANT2				
Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)
U-NII-1	802.11a	36	5180	6	12	11.24
		40	5200		12	11.25
		48	5240		12	11.64
	802.11n HT20	36	5180	6.5	10.5	10.41
		40	5200		10.5	10.80
		48	5240		10.5	10.28
	802.11n HT40	38	5190	13.5	11	10.62
		46	5230		11	10.49
	802.11ac VHT20	36	5180	6.5	11	9.87
		40	5200		11	9.89
		48	5240		11	10.69
	802.11ac VHT40	38	5190	13.5	10.5	10.34
		46	5230		10.5	10.39
	802.11ac VHT80	42	5210	29.3	8.5	8.16
	802.11ax HEW20	36	5180	8	9	8.63
		40	5200		9	8.63
48		5240	9		8.60	
802.11ax HEW40	38	5190	16	9	8.00	
	46	5230		9	8.57	

	802.11ax HEW80	42	5210	34	7	6.90
U-NII-3	802.11a	149	5745	6	12	11.23
		157	5785		12	11.48
		165	5825		12	11.58
	802.11n HT20	149	5745	6.5	11	10.63
		157	5785		11	10.78
		165	5825		11	10.93
	802.11n HT40	151	5755	13.5	10.5	10.01
		159	5795		10.5	10.47
	802.11ac VHT20	149	5745	6.5	10.5	9.77
		157	5785		10.5	10.34
		165	5825		10.5	10.23
	802.11ac VHT40	151	5755	13.5	10.5	9.63
		159	5795		10.5	10.38
	802.11ac VHT80	155	5775	29.3	8.5	8.16
	802.11ax HEW20	149	5745	8	9.5	7.84
157		5785	9.5		9.11	
165		5825	9.5		8.79	
802.11ax HEW40	151	5755	16	9	8.43	
	159	5795		9	8.70	
802.11ax HEW80	155	5775	34	7.5	7.17	

MIMO

Band				U-NII-1		
Antenna				ANT1+ANT2	ANT1	ANT2
Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power(dBm)	Average Power(dBm)	Average Power(dBm)
802.11n (HT20)	36	5180	6.5	7.61	4.41	4.78
	40	5200		7.86	4.54	5.14
	48	5240		8.01	4.69	5.29
802.11n (HT40)	38	5190	13.5	6.17	3.01	3.31
	46	5230		6.42	3.29	3.52
802.11ac (VHT20)	36	5180	6.5	6.98	3.79	4.14
	40	5200		7.24	4.00	4.45
	48	5240		7.36	4.09	4.59
802.11ac (VHT40)	38	5190	13.5	6.16	3.04	3.26
	46	5230		6.35	3.16	3.52
802.11ac (VHT80)	42	5210	29.3	6.11	2.95	3.25
802.11ax (HEW20)	36	5180	8	7.04	3.71	4.32
	40	5200		7.27	3.94	4.55
	48	5240		7.45	4.09	4.77
802.11ax (HEW40)	38	5190	16	6.39	3.14	3.61
	46	5230		6.63	3.47	3.76
802.11ax (HEW80)	42	5210	34	5.77	2.61	2.90

Band				U-NII-3		
Antenna				ANT1+ANT2	ANT1	ANT2
Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power(dBm)	Average Power(dBm)	Average Power(dBm)
802.11n (HT20)	149	5745	6.5	7.99	4.82	5.14
	157	5785		8.11	4.98	5.22
	165	5825		7.95	4.81	5.06
802.11n (HT40)	151	5755	13.5	6.41	3.39	3.41
	159	5795		6.45	3.41	3.47
802.11ac (VHT20)	149	5745	6.5	7.18	4.09	4.24
	157	5785		7.34	4.09	4.55
	165	5825		7.31	4.23	4.37
802.11ac (VHT40)	151	5755	13.5	6.32	3.28	3.34
	159	5795		6.46	3.49	3.41
802.11ac (VHT80)	155	5775	29.3	6.06	2.93	3.17
802.11ax (HEW20)	149	5745	8	7.22	4.07	4.35
	157	5785		7.27	4.03	4.47
	165	5825		7.31	4.24	4.36
802.11ax (HEW40)	151	5755	16	6.64	3.64	3.61
	159	5795		6.76	3.70	3.79
802.11ax (HEW80)	155	5775	34	6.02	2.85	3.16

8.1.2 Conducted Power of Wi-Fi 2.4G

The output power of Wi-Fi 2.4G is as following:

Antenna		ANT1			
Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power(dBm)
802.11b	1	2412	1	13.00	12.37
	6	2437		13.00	12.69
	11	2462		13.00	12.59
802.11g	1	2412	6	11.00	10.33
	6	2437		11.00	10.65
	11	2462		11.00	10.64
802.11n (HT20)	1	2412	6.5	11.00	10.24
	6	2437		11.00	10.55
	11	2462		11.00	10.51
802.11n (HT40)	3	2422	13	11.00	10.42
	6	2437		11.00	10.51
	9	2452		11.00	10.57
802.11ax (HEW20)	1	2412	8	11.50	10.63
	6	2437		11.50	11.07
	11	2462		11.50	11.02
802.11ax (HEW40)	3	2422	16	11.50	10.84
	6	2437		11.50	10.76
	9	2452		11.50	11.11

Antenna		ANT2			
Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power(dBm)
802.11b	1	2412	1	13.00	12.28
	6	2437		13.00	12.64
	11	2462		13.00	12.79
802.11g	1	2412	6	11.00	10.21
	6	2437		11.00	10.35
	11	2462		11.00	10.55
802.11n	1	2412	6.5	10.50	10.06
	6	2437		10.50	10.13

(HT20)	11	2462		10.50	10.38
802.11n (HT40)	3	2422	13	10.50	9.94
	6	2437		10.50	10.24
	9	2452		10.50	10.36
802.11ax (HEW20)	1	2412	8	11.00	10.45
	6	2437		11.00	10.74
	11	2462		11.00	10.92
802.11ax (HEW40)	3	2422	16	11.00	10.31
	6	2437		11.00	10.60
	9	2452		11.00	10.69

MIMO

Antenna				ANT1+ANT2	ANT1	ANT2
Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power(dBm)	Average Power(dBm)	Average Power(dBm)
802.11n (HT20)	1	2412	6.5	7.57	4.76	4.35
	6	2437		7.04	4.18	3.87
	11	2462		6.55	3.74	3.32
802.11n (HT40)	3	2422	13	7.42	4.61	4.19
	6	2437		7.08	4.26	3.88
	9	2452		6.80	4.02	3.54
802.11ax (HEW20)	1	2412	8	6.43	3.54	3.30
	6	2437		5.90	2.93	2.85
	11	2462		5.42	2.55	2.27
802.11ax (HEW40)	3	2422	16	6.60	3.67	3.50
	6	2437		6.28	3.31	3.23
	9	2452		6.02	3.03	2.98

8.1.3 Conducted Power of BT

The output power of BT is as following:

For BT 3.0:

Channel	Average Conducted Power(dBm)			Tune-up Power(dBm)
	0CH	39CH	78CH	
GFSK	2.52	2.47	3.71	4.0
$\pi/4$ DQPSK	2.66	2.53	3.51	
8DPSK	2.84	2.69	3.70	

Note: channel /Frequency: 0/2402, 39/2441, 78/2480.

For BT (BLE)

Channel	Average Conducted Power(dBm)			Tune-up Power(dBm)
	0CH	19CH	39CH	
BLE_1M	2.56	2.10	2.31	3.0
BLE_2M	2.59	2.07	2.30	

Note: channel /Frequency: 0/2402, 19/2440, 39/2480.

8.2 SAR test results

Notes:

1) Per KDB447498 D01v06, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

2) Per KDB447498 D01v06, All measurement SAR result is scaled-up to account for tune-up tolerance is compliant.

3) Per KDB865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/Kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/Kg, only one repeated measurement is required.

4) Per KDB865664 D02v01r02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The same Procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure. The published RF exposure KDB Procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-Processing (Refer to appendix B for details).

8.2.1 Results overview of WiFi 5G

ANT1

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR _{1-g} (W/kg)	Actual Duty Cycle	Reported SAR _{1-g} (W/kg)
			1-g	10-g						
5.2G WiFi (U-NII-1 Band)										
Front Side	48/5240	802.11a	0.046	0.015	0.000	11.49	11.50	0.046	97.71%	0.047
Back Side	48/5240	802.11a	0.072	0.033	0.000	11.49	11.50	0.072	97.71%	0.074
Right Side	48/5240	802.11a	0.841	0.185	-0.240	11.49	11.50	0.843	97.71%	0.863
Bottom Side	48/5240	802.11a	0.054	0.020	0.000	11.49	11.50	0.054	97.71%	0.056
Right Side	36/5180	802.11a	0.849	0.187	-0.250	11.35	11.50	0.879	97.80%	0.899
Right Side	40/5200	802.11a	0.918	0.200	0.000	11.18	11.50	0.988	97.75%	1.011
SAR1-g >0.8 (W/kg) Repeated										
Right Side	36/5180	802.11a	0.867	0.186	0.070	11.18	11.50	0.933	97.80%	0.954
Right Side	40/5200	802.11a	0.916	0.198	-0.290	11.35	11.50	0.948	97.75%	0.970
Right Side	48/5240	802.11a	1.050	0.233	0.180	11.49	11.50	1.052	97.71%	1.077

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR _{1-g} (W/kg)	Actual Duty Cycle	Reported SAR _{1-g} (W/kg)
			1-g	10-g						
5.8G WiFi (U-NII-3 Band)										
Front Side	165/5825	802.11a	0.124	0.045	0.000	11.27	11.50	0.131	97.71%	0.134
Back Side	165/5825	802.11a	0.073	0.030	0.000	11.27	11.50	0.077	97.71%	0.079
Right Side	165/5825	802.11a	0.896	0.249	-0.230	11.27	11.50	0.945	97.71%	0.967
Bottom Side	165/5825	802.11a	0.268	0.077	0.000	11.27	11.50	0.283	97.71%	0.289
Right Side	149/5745	802.11a	0.601	0.168	0.040	11.15	11.50	0.651	97.80%	0.666
Right Side	157/5785	802.11a	0.596	0.175	-0.330	10.83	11.50	0.695	97.71%	0.712

SAR1-g >0.8 (W/kg) Repeated										
Right Side	165/582 5	802.11a	0.924	0.259	0.070	11.27	11.50	0.974	97.71%	0.997

ANT2

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR _{1-g} (W/kg)	Actual Duty Cycle	Reported SAR _{1-g} (W/kg)
			1-g	10-g						
5.2G WiFi (U-NII-1 Band)										
Front Side	48/5240	802.11a	0.040	0.014	0.000	11.64	12.00	0.044	97.75%	0.045
Back Side	48/5240	802.11a	0.100	0.043	0.000	11.64	12.00	0.109	97.75%	0.111
Top Side	48/5240	802.11a	0.111	0.030	-1.470	11.64	12.00	0.121	97.75%	0.123
Top Side	36/5180	802.11a	0.147	0.039	0.140	11.24	12.00	0.175	97.71%	0.179
Top Side	40/5200	802.11a	0.134	0.035	-1.590	11.25	12.00	0.159	97.75%	0.163

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR _{1-g} (W/kg)	Actual Duty Cycle	Reported SAR _{1-g} (W/kg)
			1-g	10-g						
5.8G WiFi (U-NII-3 Band)										
Front Side	165/582 5	802.11a	0.039	0.012	0.000	11.58	12.00	0.043	97.80%	0.044
Back Side	165/582 5	802.11a	0.129	0.044	0.000	11.58	12.00	0.142	97.80%	0.145
Top Side	165/582 5	802.11a	0.266	0.066	1.840	11.58	12.00	0.293	97.80%	0.300
Top Side	149/574 5	802.11a	0.295	0.077	-0.290	11.23	12.00	0.352	97.75%	0.360
Top Side	157/578 5	802.11a	0.285	0.072	0.170	11.48	12.00	0.321	97.71%	0.329

Note:

1) Scaled SAR = SAR Value * 10(0.1*(Tune up Power-Conducted Power))

Reported SAR = SAR Value * 10(0.1*(Tune up Power-Conducted Power))/ Duty factor * 100

8.2.2 Results overview of WiFi 2.4G


Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dBm)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR _{1-g} (W/kg)	Actual Duty Cycle	Reported SAR _{1-g} (W/kg)
			1-g	10-g						
ANT1										
Front Side	6/2437	802.11b	0.0125	0.0037	0.000	12.69	13.00	0.0134	99.05%	0.0136
Back Side	6/2437	802.11b	0.0036	0.0018	0.000	12.69	13.00	0.0038	99.05%	0.0039
Right Side	6/2437	802.11b	0.1120	0.0330	0.000	12.69	13.00	0.1203	99.05%	0.1214
Bottom Side	6/2437	802.11b	0.0027	0.0006	0.000	12.69	13.00	0.0029	99.05%	0.0030
Right Side	1/2412	802.11b	0.1270	0.0423	0.140	12.37	13.00	0.1468	98.93%	0.1480
Right Side	11/2462	802.11b	0.1020	0.0292	0.000	12.59	13.00	0.1121	98.93%	0.1133
ANT2										
Front Side	11/2462	802.11b	0.0001	0.0001	0.000	12.79	13.00	0.0001	98.93%	0.0001
Back Side	11/2462	802.11b	0.0001	0.0001	0.000	12.79	13.00	0.0001	98.93%	0.0001
Top Side	11/2462	802.11b	0.0017	0.0002	0.000	12.79	13.00	0.0018	98.93%	0.0018
Top Side	1/2412	802.11b	0.0026	0.0004	0.000	12.28	13.00	0.0030	98.93%	0.0031
Top Side	6/2437	802.11b	0.0011	0.0001	0.000	12.64	13.00	0.0012	98.93%	0.0012

Note: Per KDB248227D01:


- 1) SAR is measured for 2.4 GHz 802.11b DSSS using initial test position Procedure.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, 802.11g/n OFDM SAR Test is not required.
- 3) Scaled SAR = SAR Value * 10(0.1*(Tune up Power-Conducted Power))
 Reported SAR = SAR Value * 10(0.1*(Tune up Power-Conducted Power))/ Duty factor * 100

8.3 Multiple Transmitter Information

The location of the antennas inside this device is shown as below picture:

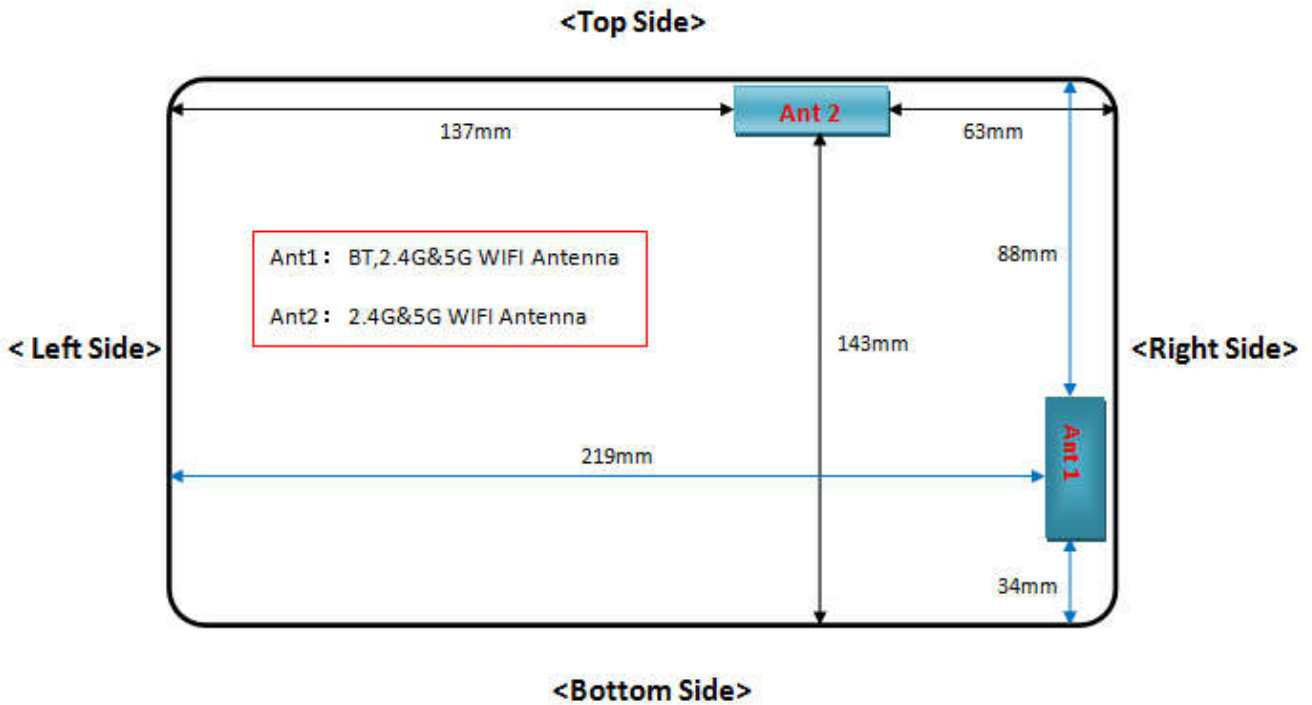

<EUT Front View>

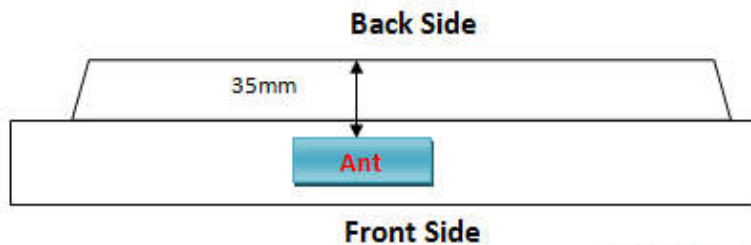

<EUT Side View>

Note:1)Per KDB 616217, because the diagonal Length is $>200\text{mm}$, it is considered a "tablet" device and need to test 0mm 1g Body SAR.

2) The device doesn't support telephone receiver, so additional Head SAR testing is not considered per KDB616217D04 and KDB648474D04.

8.4 Stand-alone SAR

Per FCC KDB 447498D01:

- 1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\left[\frac{\text{(max. power of channel, including tune-up tolerance, mW)}}{\text{(min. test separation distance, mm)}} \right] \cdot \sqrt{f(\text{GHz})} \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

- 2) At 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following:

a) $\{[\text{Power allowed at numeric threshold for 50 mm in step a)}] + [(\text{test separation distance} - 50 \text{ mm}) \cdot (f(\text{MHz})/150)]\}$ mW, at 100 MHz to 1500 MHz

b) $\{[\text{Power allowed at numeric threshold for 50 mm in step a)}] + [(\text{test separation distance} - 50 \text{ mm}) \cdot 10]\}$ mW at > 1500 MHz and ≤ 6 GHz

WiFi Antenna:

ANT1

(Antennas < 50 mm to adjacent sides)

Band	Exposure Condition	f(GHz)	P _{max}	P _{max}	Separation Distance(mm)						SAR Test (Yes or No)					
			dBm	mW	Front side	Back side	Left side	Right side	Top side	Bottom side	Front side	Back side	Left side	Right side	Top side	Bottom side
WiFi 2.4G	Body 0mm	2.45	13.00	19.95	5.00	35.00	219.00	5.00	88.00	34.00	Yes	Yes	>50mm	Yes	>50mm	Yes
WiFi 5.2G	Body 0mm	5.20	11.50	14.13	5.00	35.00	219.00	5.00	88.00	34.00	Yes	Yes	>50mm	Yes	>50mm	Yes
WiFi 5.8G	Body 0mm	5.80	11.50	14.13	5.00	35.00	219.00	5.00	88.00	34.00	Yes	Yes	>50mm	Yes	>50mm	Yes

(Antennas > 50 mm to adjacent sides)

Band	Exposure Condition	f(GHz)	P _{max}	P _{max}	Separation Distance(mm)						SAR Test (Yes or No)					
			dBm	mW	Front side	Back side	Left side	Right side	Top side	Bottom side	Front side	Back side	Left side	Right side	Top side	Bottom side
WiFi 2.4G	Body 0mm	2.45	13.00	19.95	5.00	35.00	219.00	5.00	88.00	34.00	<50mm	<50mm	No	<50mm	No	<50mm
WiFi 5.2G	Body 0mm	5.20	11.50	14.13	5.00	35.00	219.00	5.00	88.00	34.00	<50mm	<50mm	No	<50mm	No	<50mm
WiFi 5.8G	Body 0mm	5.80	11.50	14.13	5.00	35.00	219.00	5.00	88.00	34.00	<50mm	<50mm	No	<50mm	No	<50mm

ANT2

(Antennas <50mm to adjacent sides)

Band	Exposure Condition	f(GHz)	Pmax	Pmax	Seperation Distance(mm)						SAR Test (Yes or No)					
			dBm	mW	Front side	Back side	Left side	Right side	Top side	Bottom side	Front side	Back side	Left side	Right side	Top side	Bottom side
WiFi 2.4G	Body 0mm	2.45	13.00	19.95	5.00	35.00	137.00	63.00	5.00	143.00	Yes	Yes	>50mm	>50mm	Yes	>50mm
WiFi 5.2G	Body 0mm	5.20	12.00	15.85	5.00	35.00	137.00	63.00	5.00	143.00	Yes	Yes	>50mm	>50mm	Yes	>50mm
WiFi 5.8G	Body 0mm	5.80	12.00	15.85	5.00	35.00	137.00	63.00	5.00	143.00	Yes	Yes	>50mm	>50mm	Yes	>50mm

(Antennas >50mm to adjacent sides)

Band	Exposure Condition	f(GHz)	Pmax	Pmax	Seperation Distance(mm)						SAR Test (Yes or No)					
			dBm	mW	Front side	Back side	Left side	Right side	Top side	Bottom side	Front side	Back side	Left side	Right side	Top side	Bottom side
WiFi 2.4G	Body 0mm	2.45	13.00	19.95	5.00	35.00	137.00	63.00	5.00	143.00	<50mm	<50mm	No	No	<50mm	No
WiFi 5.2G	Body 0mm	5.20	12.00	15.85	5.00	35.00	137.00	63.00	5.00	143.00	<50mm	<50mm	No	No	<50mm	No
WiFi 5.8G	Body 0mm	5.80	12.00	15.85	5.00	35.00	137.00	63.00	5.00	143.00	<50mm	<50mm	No	No	<50mm	No

ANT1: BT Antenna

(Antennas <50mm to adjacent sides)

Band	Exposure Condition	f(GHz)	Pmax	Pmax	Seperation Distance(mm)						SAR Test (Yes or No)					
			dBm	mW	Front side	Back side	Left side	Right side	Top side	Bottom side	Front side	Back side	Left side	Right side	Top side	Bottom side
BT	Body 0mm	2.45	4.00	2.51	5.00	35.00	219.00	5.00	88.00	34.00	No	No	>50mm	No	>50mm	No

(Antennas >50mm to adjacent sides)

Band	Exposure Condition	f(GHz)	Pmax	Pmax	Seperation Distance(mm)						SAR Test (Yes or No)					
			dBm	mW	Front side	Back side	Left side	Right side	Top side	Bottom side	Front side	Back side	Left side	Right side	Top side	Bottom side
BT	Body 0mm	2.45	4.00	2.51	5.00	35.00	219.00	5.00	88.00	34.00	<50mm	<50mm	No	<50mm	No	<50mm

3) When the minimum test separation distance is > 50 mm, the estimated SAR value is 0.4 W/kg.

For conditions where the estimated SAR is overly conservative for certain conditions, the test lab may choose to perform standalone SAR measurements and use the measured SAR to determine simultaneous transmission SAR test exclusion.

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	F (GHz)	Calculation Result	SAR test exclusion Threshold	SAR test exclusion
BT	Body-Worn	4.00	2.51	5.00	2.450	0.79	3.00	Yes

1) When the standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance(mm)	f(GHz)	X	Estimated SAR(W/Kg)
BT	Body-Worn	4.00	2.51	5.00	2.45	7.50	0.105

- Note: 1) maximum possible output power (including tune-up tolerance) declared by manufacturer
2) Held to ear configurations are not applicable to Bluetooth for this device

8.5 Simultaneous transmission analysis

No.	Simultaneous Transmission Consideration	Required
1	2.4GHz WLAN Ant1 + 2.4GHz WLAN Ant2	Yes
2	5.2GHz WLAN Ant1 +5.2GHz WLAN Ant2	Yes
3	5.8GHz WLAN Ant1 +5.8GHz WLAN Ant2	Yes
4	2.4GHz WLAN (Ant1+Ant2) + Bluetooth	Yes
5	5.2GHz WLAN (Ant1+Ant2) + Bluetooth	Yes
6	5.8GHz WLAN (Ant1+Ant2) + Bluetooth	Yes

Estimate SAR:

Mode	Max. tune-up Power (dBm)	Frequency (GHz)	Estimate 1-g SAR(W/kg)
BT	4.0	2.450	0.105

Simultaneous Transmission Max SAR:

Mode	Ant1 Position	Ant1 1g SAR (W/kg)	Ant2 1g SAR (W/kg)	Summed(Ant1+Ant2) 1-g SAR(W/kg)
2.4GHz WLAN	Front Side	0.0136	0.0001	0.0137
2.4GHz WLAN	Back Side	0.0039	0.0001	0.0040
2.4GHz WLAN	Right Side	0.1480	/	0.1480
2.4GHz WLAN	Top Side	/	0.0031	0.0031
2.4GHz WLAN	Bottom Side	0.0030	/	0.0030
5.2GHz				
5.2GHz WLAN	Front Side	0.047	0.045	0.092
5.2GHz WLAN	Back Side	0.074	0.111	0.185
5.2GHz WLAN	Right Side	1.077	/	1.077
5.2GHz WLAN	Top Side	/	0.179	0.179
5.2GHz WLAN	Bottom Side	0.056	/	0.056

5.8GHz				
5.8GHz WLAN	Front Side	0.134	0.044	0.178
5.8GHz WLAN	Back Side	0.079	0.145	0.224
5.8GHz WLAN	Right Side	0.997	/	0.997
5.8GHz WLAN	Top Side	/	0.360	0.360
5.8GHz WLAN	Bottom Side	0.289	/	0.289

Mode	Position	Ant1+Ant2 1g SAR (W/kg)	BT Estimate 1g SAR (W/kg)	Summed 1-g SAR(W/kg)
2.4GHz WLAN	Right Side	0.148	0.105	0.253
5.2GHz WLAN	Right Side	1.077	0.105	1.182
5.8GHz WLAN	Right Side	0.997	0.105	1.102

Note:

1) Per KDB 447498D01v06, Simultaneous Transmission SAR Evaluation procedures is as followed:

Step 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.

Step 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.

Step 3: If the ratio of SAR to peak separation distance is ≤ 0.04 , Simultaneous SAR measurement is not required.

2) Simultaneous Transmission SAR Evaluation is not required for 2.4GHz WLAN and 5GHz WLAN , because the software mechanism have been incorporated to guarantee that the 2.4GHz WLAN and 5GHz WLAN transmitters would not simultaneously operate.

8.6 Simultaneous Transmission Possibilities and Conclusion

The above SAR results are sufficient to determine that the simultaneous transmission case does not exceed the SAR limit, so simultaneous transmission of SAR and Volume Scans is not required according to KDB 447498 D01v06, so the tested result is compliant with the FCC limit.

Annex A: Appendix A: SAR System performance Check Plots

(Please See Appendix A)

Annex B: Appendix B: SAR Measurement results Plots

(Please See Appendix B)

Annex C: Appendix C: Calibration reports

(Please See Appendix C)

Annex D: Appendix D: Photo documentation

(Please See Appendix D)

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.

*** End of Report ***