

ELECTROMAGNETIC COMPATIBILITY TEST REPORT**PREPARED FOR VERSA WIRELESS INC
BY QAI LABORATORIES**

Report Reference Number: E10676-1804_ Versa Wireless-PIR-MultiP_Rev1.1
Total Number of Pages: 46
Date of Issue: April 17, 2018

EMC Test Laboratory: **QAI Laboratories Inc.**
Address: 3980 North Fraser Way, Burnaby, BC, V5J 5K5 Canada
Phone: (604) 527-8378
Fax: (604) 527-8368

Laboratory Accreditations (per ISO/IEC 17025:2005):**American Association for Laboratory Accreditation Certificate Number: 3657.02**

This report has been completed in accordance with the requirements of ISO/IEC xxx5. Test results contained in this report are within QAI Laboratories ISO/IEC xxx5 accreditation. QAI Laboratories authorizes the applicant to reproduce this report, provided it is reproduced in its entirety and for the use by the company's employees only.

EMC Client: Versa Wireless Inc
Address: 103 – 19292 60th Ave.
Surrey, BC V3S 3M2, Canada
Phone: 778 772 0623

Applicable Test Standards: FCC Title 47 CFR Part 15: Subpart B, ICES-003 Issue 6
FCC Title 47 CFR Part 15: Subpart C 15.231
ICES-003 Issue 6
RSS-210 Issue 9
RSS-Gen Issue 4

Unit Under Tested: Versa Motion Family
Model Number: Motion-X
FCC ID: 2AD9XMOTION-X
IC Certification Number: 12673A-MOTIONX
Manufacturer: Versa Wireless, Inc.

REVISION HISTORY

Date	Report Number	Rev #	Details	Author's Initials
April 17, 2019	E10676-1804_ Versa-PIR-MultiP	1.1	Initial Release	JQ
Sept 30, 2018	E10676-1804_ Versa-PIR-MultiP	1.0	Initial Release	JQ
Sept 24, 2018	E10676-1804_ Versa-PIR-MultiP	0.0	Draft	JQ

All previous versions of this report have been superseded by the latest dated revision as listed in the above table. Please dispose of all previous electronic and paper printed revisions accordingly.

REPORT AUTHORIZATION

The data documented in this report is for the test equipment provided by Versa Wireless Inc. The tests were conducted on the sample equipment as requested by Versa Wireless Inc for the purpose of demonstrating compliance with FCC Title 47 CFR Part 15: Subpart C, 15.231, RSS-210 Issue 9, and RSS-Gen Issue 4 as agreed upon by Versa Wireless Inc as per Quote 18AN07235.

Versa Wireless Inc is responsible for the tested product configuration, continued product compliance, and for the appropriate auditing of subsequent products as required. This report may comprise partial list of tests that are required for FCC or IC Declaration of Conformity and can only be produced by the manufacturer.

This is to certify that the following report is true and correct to the best of our knowledge.



Tested by Jack Qin
EMC Division Project Manager



Report Prepared by Raksha Rawat
EMC Technical Writer



Approved by Parminder Singh
Director for the EMC Department

QAI FACILITIES

Founded in 1994 by a group of experienced certification and testing experts, QAI is an independent third-party testing, inspection and certification organization which serves the building industry, government and individuals with cost effective solutions through our in-house capabilities / services, and an established world-wide network of qualified affiliates. To help get your product to market, trust the provider that many leading global manufacturers do: QAI.

British Columbia

QAI Laboratories Inc.
Main Laboratory/Headquarters
3980 North Fraser Way,
Burnaby, BC V5J Canada

Ontario

QAI Laboratories Inc.
1081 Meyerside Drive, Unit #14
Mississauga, ON L5T 1M4 Canada

Virginia

QAI Laboratories Ltd.
1047 Zachary Taylor Hwy,
Suite A Huntly, VA 22640 USA

California

QAI Laboratories Ltd.
8385 White Oak Avenue Rancho
Cucamonga, CA 91730 USA

Oklahoma

QAI Laboratories Ltd.
108th East Avenue,
Tulsa, OK 74116 USA

QAI EMC ACCREDITATION

QAI EMC is your one-stop regulatory compliance partner for electromagnetic compatibility (EMC) and electromagnetic interference (EMI). Products are tested to the latest and applicable EMC/EMI requirements for domestic and international markets. QAI EMC goes above and beyond being a testing facility—we are your regulatory compliance partner. QAI EMC has the capability to perform RF Emissions and Immunity for all types of electronics manufacturing including Industrial, Scientific, Medical, Information Technology, Telecom, Wireless, Automotive, Marine and Avionics.

EMC Laboratory Location	FCC Designation (3m SAC)	IC Registration (3m SAC)	A2LA Certificate
Burnaby, BC, Canada	CA9543	21146-1	3657.02



Headquarters & EMC Laboratory in Burnaby, BC

TABLE OF CONTENTS

REVISION HISTORY	2
REPORT AUTHORIZATION	3
QAI FACILITIES.....	4
QAI EMC ACCREDITATION	4
TABLE OF CONTENTS	5
Section I: EXECUTIVE SUMMARY	6
1.2 Purpose.....	6
1.3 Scope.....	6
1.4 Summary of Results	6
Section II: EQUIPMENT UNDER TEST (EUT) INFORMATION	7
2.1 Product Description	7
GENERAL INFORMATION	8
3.1 Environmental Conditions	8
3.2 Measurement Uncertainty	8
3.3 Worst Test Case	8
3.4 Sample Calculations of Emissions Data.....	9
3.5 Test Equipment List	10
Section III: TEST RESULTS.....	11
4.1 Antenna Requirement	11
4.2 Transmission Time.....	12
4.3 Field Strength of Carrier Frequency	15
4.4 Intentional Spurious Emissions.....	16
4.5 Duty Cycle Correction Factor Calculation.....	24
4.6 20 dB Occupied Bandwidth	33
4.7 99% Occupied Bandwidth	37
4.8 Receiver Radiated Emissions.....	41
Appendix A: TEST SETUP PHOTOS.....	43

Section I: EXECUTIVE SUMMARY

1.2 Purpose

The purpose of this report is to demonstrate and document the compliance of “PIR – MultiP” as per Sections 1.2 & 1.3 of this report.

1.3 Scope

The information documented in this report is based on the test methods and levels as per Quote 18AN07235:

- **FCC Title 47 CFR Part 15** – Radio Frequency Devices, Subpart B- Unintentional Radiators.
- **ICES-003 Issue 6** – Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement.
- **FCC Title 47 CFR Part 15** – Radio Frequency Devices, Subpart C – Intentional Radiators
 - o §15.231 – Periodic Operation in the band 40.66-40.70 MHz and above 70 MHz
- **RSS-210 Issue 9** – License-exempt Radio Apparatus (All Frequency Bands): Category I Equipment
 - o Annex 1 – Momentarily Operated Devices and Remote Control
- **RSS-Gen Issue 4** – General Requirements and Information for the Certification of Radio Apparatus

1.4 Summary of Results

The following tests demonstrate the testimony to “FCC and IC” Mark Electromagnetic compatibility radio testing for the “PIR – MultiP” device manufactured by Versa Wireless Inc.

The following testing was performed pursuant to FCC & IC Radio and RF Emissions Standards

Test Description	Applicable FCC Test Standard	Applicable IC Test Standard	Test Method	Result
Antenna Requirement	Title 47 CFR Part 15: Subpart C §15.203	Rss-Gen Issue 4 Section 7.1.2	N/A	Pass
Transmission Time	Title 47 CFR Part 15: Subpart C §15.231 (a)	RSS-210 Issue 9	N/A	Pass
Field Strength of Carrier Frequency	Title 47 CFR Part 15: Subpart C §15.231 (b)	RSS-210 Issue 9 RSS-Gen Issue 4	ANSI C63.10-2013	Pass
Intentional Spurious Emissions	Title 47 CFR Part 15: Subpart C §15.231 (b)	RSS-210 Issue 9 RSS-Gen Issue 4	ANSI C63.10-2013	Pass
Duty Cycle	Title 47 CFR Part 15: Subpart C	Rss-Gen Issue 4	ANSI C63.10-2013	Pass
20dB Occupied Bandwidth	Title 47 CFR Part 15: Subpart C §15.231 (c)	N/A	ANSI C63.10-2013	Pass
99% Occupied Bandwidth	N/A	RSS-210 Issue 9 RSS-Gen Issue 4	ANSI C63.10-2013	Pass
Receiver Radiated Emissions	N/A	RSS-Gen Issue 4	ANSI C63.4-2014	Pass

Section II: EQUIPMENT UNDER TEST (EUT) INFORMATION

2.1 Product Description

The information provided in this section is for the Equipment Under Test (EUT) and the corresponding Auxiliary Equipment needed to perform the tests as a complete system.



EUT – Motion-X (PIR-MultiP)

Unit Under Tested: Versa Motion Family
Model Number: Motion-X / PIR-MultiP
FCC ID: 2AD9XMOTION-X
IC Certification Number: 12673A-MOTIONX

Equipment Under Test (EUT) Information

EUT	Motion-X (PIR-MultiP)
Description	Versa Motion Multiprotocol Device
FCC ID	2AD9XMOTION-X
IC Number	12673A-MOTIONX
Manufacturer	Versa Wireless, Inc.
Model No.	Motion-X or PIR-MultiP
Serial No.	0000010
Operating Frequency	319.5MHz, 344.92MHz, 345MHz, 433.42MHz, 433.92MHz.
Transmit Power	0.01 Watts
Antenna Type	Monopole Whip
Antenna Gain	3 dBi
Input Power	1 x CR123A, Lithium Battery, 3VDC, replaceable

GENERAL INFORMATION

3.1 Environmental Conditions

The equipment under test was operated and tested under the following environmental conditions:

Parameter	Conditions
Location	Indoors
Temperature	22-28°C
Relative Humidity	39.7 - 54.4%

3.2 Measurement Uncertainty

Parameter	Uncertainty
Radiated Emissions, 30MHz-1GHz	± 2.40 dB
Radiated Emissions, 1GHz-40GHz	± 2.48 dB
Radio Frequency	±1.5 x 10 ⁻⁵ MHz
Total RF Power Conducted	±1.36 dB
Spurious Emissions, Conducted	±1.36 dB
RF Power Density, Conducted	±1.36 dB
Temperature	±1°C
Humidity	±5 %
DC and low frequency voltages	±3 %

3.3 Worst Test Case

Worst-case orientation was determined during the preliminary testing. The final radiated emissions were performed in the worst-case orientation.

3.4 Sample Calculations of Emissions Data

Radiated and conducted emissions were performed using EMC32 software developed by Rohdes & Schwarz. Transducer factors like Antenna factors, Cable Losses and Amplifier gains were stored in the test templates which are used to perform the emissions measurements. After test is finished, data is generated from the EMC32 consisting of product details, emission plots and final data tables as shown below.

Frequency (MHz)	Q-Peak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Ant. Ht. (cm)	Pol	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
42.663900	33.0	1000.000	120.000	100.0	H	70.0	13.2	7.5	40.5

Quasi Peak reading shown in the table above is already corrected by the software using correction factor shown in column “Corr.” The correction factor listed under “Corr.” table calculated as:

$$\text{Corr. (dB)} = \text{Antenna factor} + \text{Cable loss}$$

Or

$$\text{Corr. (dB)} = \text{Antenna factor} + \text{Cable Loss} - \text{Amp gain (if pre-amplifier was used)}$$

The final Quasi-peak reading shown in the data is calculated by the software using following equation:

$$\text{Corrected Quasi Peak (dBµV/m)} = \text{Raw Quasi-Peak Reading} + \text{Antenna factor} + \text{Cable loss}$$

To obtain the final Quasi-Peak or Average reading during power line conducted emissions, transducer factors are included in the final measurement as shown below.

Frequency (MHz)	Q-Peak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150	44.3	1000.000	9.000	GND	0.6	21.7	66.0

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150	27.2	1000.000	9.000	GND	0.6	28.8	56.0

Quasi-Peak or Average reading shown in above table is already corrected by the software using the correction factor shown in column “Corr.” The correction factor listed under “Corr.” table calculated as:

$$\text{Corr. (dB)} = \text{Antenna factor} + \text{Cable loss}$$

The final Quasi-peak or Average reading shown in the data is calculated by the software using following equation:

$$\text{Corr. Quasi-Peak/Average Reading (dBµV)} = \text{Raw Quasi Peak/Average Reading} + \text{Antenna factor} + \text{Cable loss}$$

The allowable margins from the limits, as per the standards, were calculated for both radiated and conducted emissions:

$$\text{Margin (dB)} = \text{Limit} - \text{Quasi-Peak or Average reading}$$

3.5 Test Equipment List

The tables below contain all the equipment used by QAI Laboratories in conducting all tests on the Equipment Under Test (EUT) as per Section 1.3.

Emissions Test Equipment

Manufacturer	Model	Description	Serial No.	Calibration Due Date
Sunol Sciences	SM46C	Turntable	051204-2	N/A
Sunol Sciences	TWR95	Mast	TREML0001	N/A
EMCO	6502	Loop Antenna	2016	2020-Nov-13
Sunol Sciences	JB3	Biconilog Antenna 30MHz – 3GHz	A120106	2020-Sep-24
Sunol Sciences	DRH-118	Horn Antenna 1GHz-18GHz	A050905	2019-Mar-10
ETS Lindgren	2165	Turntable	00043677	N/A
ETS Lindgren	2125	Mast	00077487	N/A
Rohde & Schwarz	ESU40	EMI Receiver	100011	2018-Sep-20
Fischer	FCC-LISN-50-25-2-08	LISN (150kHz-30MHz)	2041	2018-Nov-19
ETS Lindgren	S201	5-meter Semi-Anechoic Chamber	1030	N/A
AH Systems	PAM118	Amplifier 10KHz-18GHz	189	Conditional Use

Note: Equipment listed above have 3 years calibration interval.

The following components and equipment are calibrated as a complete signal path.

Manufacturer	Model	Description	Serial No.	Calibration Date	Calibration Due Date
AH Systems	PAM118	Amplifier 10KHz-18GHz	189	December 31, 2018	December 31, 2019
Insulated Wire Inc.	SPS-1753-1140-SPS	Yellow cable, 3m	102395		
Insulated Wire Inc.	SPS-1753-2400-SPS	Yellow cable, 6m	091096		
WEINSCHEL ENGINEERING	44	6db attenuator	665	December 31, 2018	December 31, 2019
A.H.Systems	PAM-1840VH	Preamplifier 18-40GHz	152		
A.H.Systems	2649-03	Green short input cable	395		
A.H.Systems	2649-225	Green short output cable	396		

Measurement Software List

Manufacturer	Model	Version	Description
Rhode & Schwarz	EMC 32	6.20.0	Emissions Test Software

Section III: TEST RESULTS

4.1 Antenna Requirement

Date Performed:

September 21, 2018

Test Standard:

FCC 47 CFR Part 15.203 and IC Rss-Gen Issue 4 Section 7.1.2

Applicable Regulation:

The purpose of this requirement is to make certain that no other antenna, except for that provided by the responsible party, shall be used with the Equipment-Under-Test (EUT) as defined in FCC CFR 47 Part 15.203 & RSS-Gen Issue 4:

“An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.” ... “the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.”

Modifications:

No modification was required to comply for this test.

Result:

An integrated antenna is used on this product and it is not field replaceable.

4.2 Transmission Time

Date Performed:

August 20, 2018

Test Standard:

- Title 47 CFR Part 15: Subpart C, §15.231 (a)
- RSS-210 Issue 9, A.1.1


Requirement(s):

- A manually operated transmitter shall be equipped with a push-to-operate switch and be under manual control at all times during transmission. When released, the transmitter shall cease transmission within no more than 5 seconds of being released.
- A transmitter that has been activated automatically shall cease transmission within 5 seconds of activation.


Result:

The EUT complies with the applicable standard.


Data & Plot:

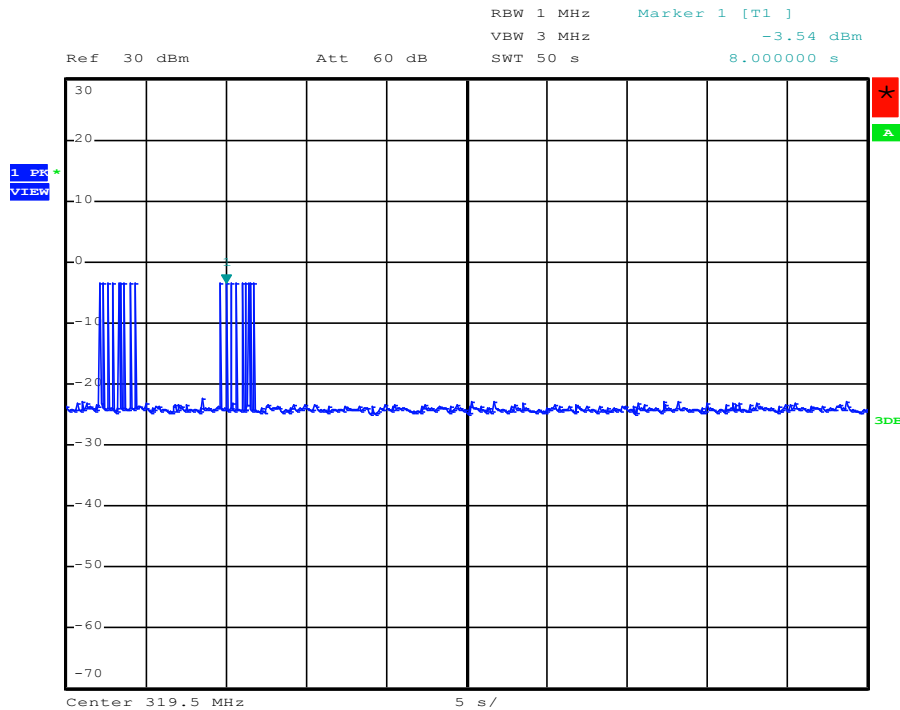


Transmission Time, 319.5MHz

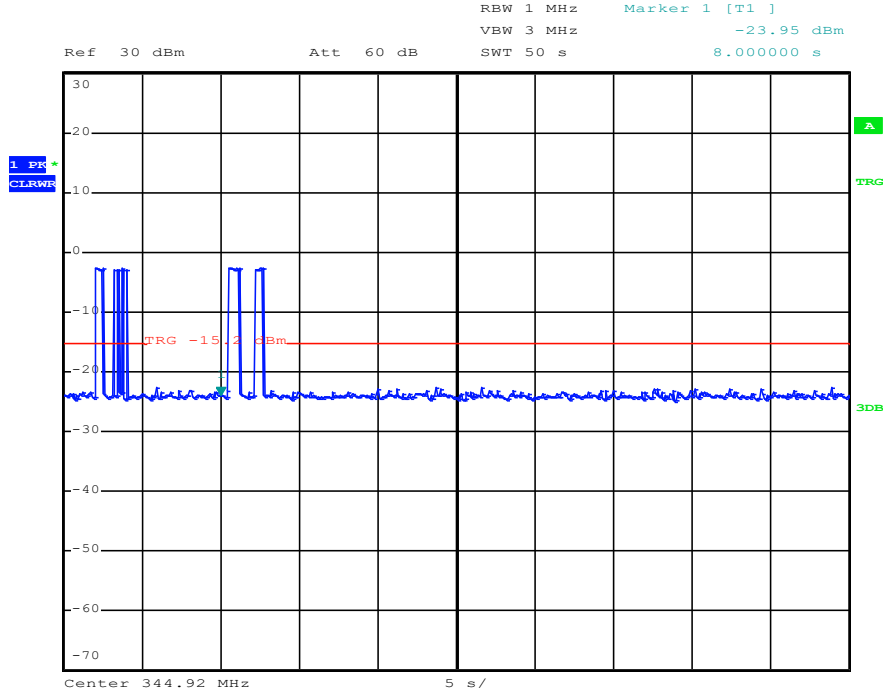


Transmission Time, 344.92MHz

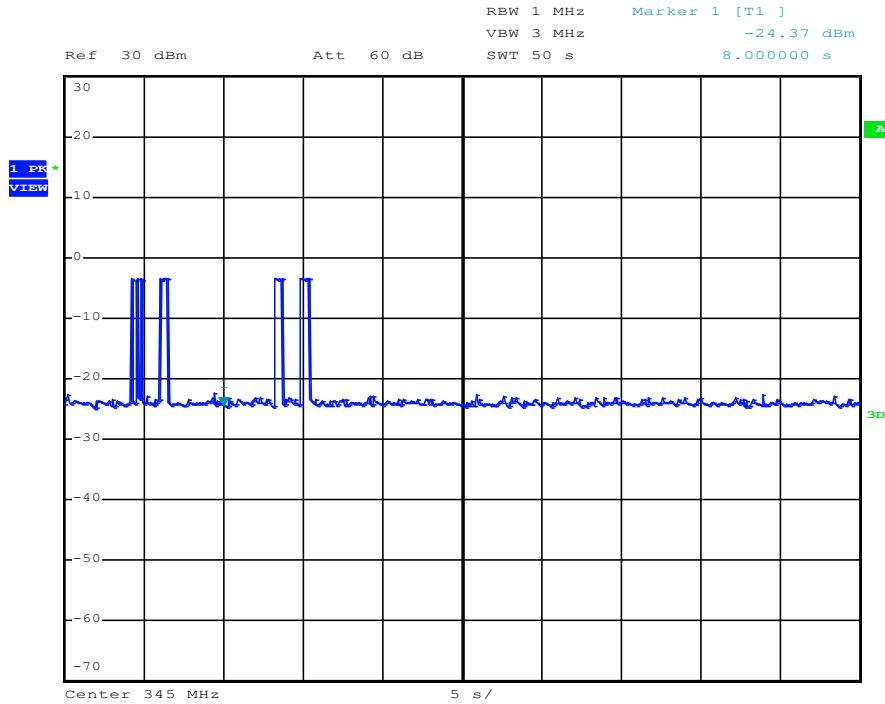

Transmission Time, 345MHz

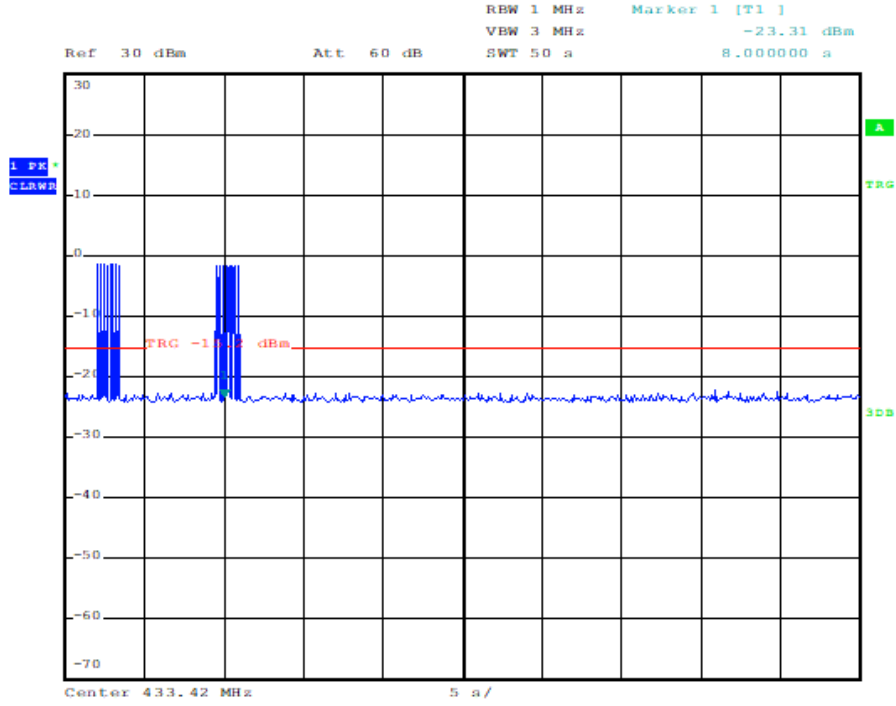

Transmission Time, 433.42MHz

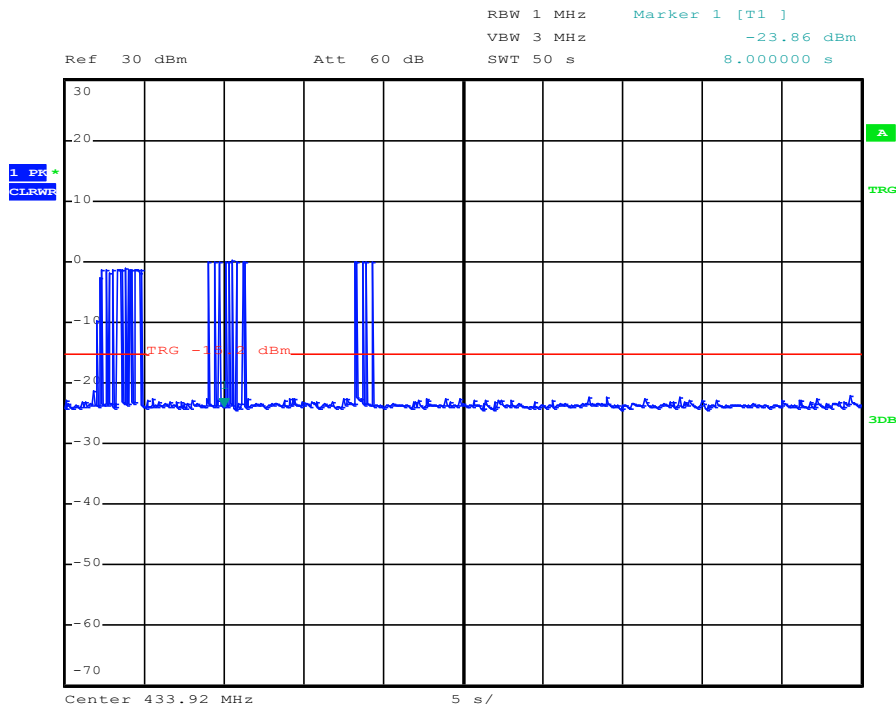

Transmission Time, 433.92MHz

4.3 Field Strength of Carrier Frequency

Date Performed:

August 9, 2018

Test Standard:

- Title 47 CFR Part 15: Subpart C, §15.231 (b)
- RSS-210 Issue 9, A.1.2
- RSS-Gen Issue 4, 8.9 & 8.10

Test Method:

- ANSI C63.10-2013

Required Limit(s):

The field strength of emissions from intentional radiators operated under this section (§15.231) shall not exceed the following:

Fundamental Frequency, <i>f</i> (MHz)	Field strength of Fundamental ($\mu\text{V/m}$)	Field strength of Fundamental ($\text{dB}\mu\text{V/m}$)
40.66 – 40.70	2250	67.0
70 – 130	1250	62.0
130 – 174	1250 – 3750*	62.0 – 71.5*
174 – 260	3750	71.5
260 – 470	3750 – 12500*	71.5 – 82.0*
above 470	12500	82.0

* - Linear interpolation with frequency, *f*, in MHz:
 For 130-174 MHz: Field Strength ($\mu\text{V/m}$) = (56.82 x *f*) – 6136
 For 260-470 MHz: Field Strength ($\mu\text{V/m}$) = (41.67 x *f*) – 7083

Note 1: The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

Data & Plot:

Freq.	Raw Peak	Ant.	System Corr	AF	Corrected Peak	Duty Cycle Corr	Avg FS	Limit Avg	Margin	EUT Orientation
MHz	dBuV		dB	dB/m	dBuV/m	dB	dBuV/m	dBuV/m	dB	
319.5	66.5	V	8.4	13.8	88.7	21.3	67.4	75.9	8.5	V
	68.5	H	8.4	13.8	90.7	21.3	69.4	75.9	6.5	
	68.2	V	8.4	13.8	90.4	21.3	69.1	75.9	6.8	H
	60.3	H	8.4	13.8	82.5	21.3	61.2	75.9	14.7	
	57.1	V	8.4	13.8	79.3	21.3	58	75.9	17.9	
	71.4	H	8.4	13.8	93.6	21.3	72.3	75.9	3.6	Flat
344.94	71	H	8.6	14.2	93.8	21.5	72.3	77.3	5.0	Flat
345	71	H	8.6	14.2	93.8	22.1	71.7	77.3	5.6	Flat
433.42	70.5	H	8.9	16.5	95.9	22.5	73.4	80.8	7.4	Flat
433.92	70.5	H	8.9	16.5	95.9	20.9	75	80.8	5.8	Flat

Result: The EUT complies with the applicable standard.

4.4 Intentional Spurious Emissions

Date Performed:

August 10, 2018

Test Standard:

- Title 47 CFR Part 15: Subpart C, §15.231 (b)
- RSS-210 Issue 9, A.1.2
- RSS-Gen Issue 4, 8.9 & 8.10

Test Method:

- ANSI C63.10-2013

Required Limit(s):

Fundamental Frequency, <i>f</i> (MHz)	Field strength of Fundamental (µV/m)	Field strength of Fundamental (dBµV/m)	Field strength of Spurious Emissions (µV/m)	Field strength of Spurious Emissions (dBµV/m)
40.66 – 40.70	2250	67.0	225	47.0
70 – 130	1250	62.0	125	62.0
130 – 174	1250 – 3750*	62.0 – 71.5*	125 – 375*	42.0 – 51.5*
174 – 260	3750	71.5	375	51.5
260 – 470	3750 – 12500*	71.5 – 82.0*	375 – 1250*	51.5 – 62.0*
above 470	12500	82.0	1250	62.0

* - Linear interpolation with frequency, *f*, in MHz:
For 130-174 MHz: Field Strength (µV/m) = (56.82 × *f*) – 6136
For 260-470 MHz: Field Strength (µV/m) = (41.67 × *f*) – 7083

Note 1: The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

Frequency, <i>f</i> (MHz)	Field strength (dBµV/m)
0.009 – 0.490	(20*log(2400/ <i>f</i> (kHz))) + 40 dB
0.490 – 1.705	(20*log(24000/ <i>f</i> (kHz))) + 20 dB
1.705 – 30.0	49.5
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
above 960	54.0

Note 1: The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

Note 2: The emissions limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

Unwanted emissions that fall into the restricted bands specified on the table below shall comply with the limits specified on the table limits above as per §15.209 and Clause 8.9 of RSS-Gen.

FCC Restricted Bands:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

IC/RSS Restricted Bands:

MHz	MHz	GHz
0.090-0.110	240-285	9.0-9.2
2.1735-2.1905	322-335.4	9.3-9.5
3.020-3.026	399.9-410	10.6-12.7
4.125-4.128	608-614	13.25-13.4
4.17725-4.17775	960-1427	14.47-14.5
4.20725-4.20775	1435-1626.5	15.35-16.2
5.677-5.683	1645.5-1646.5	17.7-21.4
6.215-6.218	1660-1710	22.01-23.12
6.26775-6.26825	1718.8-1722.2	23.6-24.0
6.31175-6.31225	2200-2300	31.2-31.8
8.291-8.294	2310-2390	36.43-36.5
8.362-8.366	2655-2900	Above 38.6
8.37625-8.38675	3260-3267	
8.41425-8.41475	3332-3339	
12.29-12.293	3345.8-3358	
12.51975-12.52025	3500-4400	
12.57675-12.57725	4500-5150	
13.36-13.41	5350-5460	
16.42-16.423	7250-7750	
16.69475-16.69525	8025-8500	
16.80425-16.80475		
25.5-25.67		
37.5-38.25		
73-74.6		
74.8-75.2		
108-138		
156.52475-156.52525		
156.7-156.9		

Method of Measurement:

The EUT was tested in our 3 m SAC and was positioned on the center of the turntable. The transmitter was set for continuous transmission. The operating frequency of the device was measured for all radiated emissions 10 kHz to 4 GHz up to the 10th harmonic of the highest fundamental frequency. The EUT was pre-scanned in 3 different orthogonal orientations and was found to radiate highest when placed flat on the table top as indicated in the test photos.

Modifications:


No modification was required to comply for this test.

Result:

The intentional spurious emissions signals at frequency range 9 kHz to 30 MHz were 20 dB below the required limit therefore need not necessary to include in the report (§15.31(o)).


The EUT complies with the applicable standard.

Data & Plot:

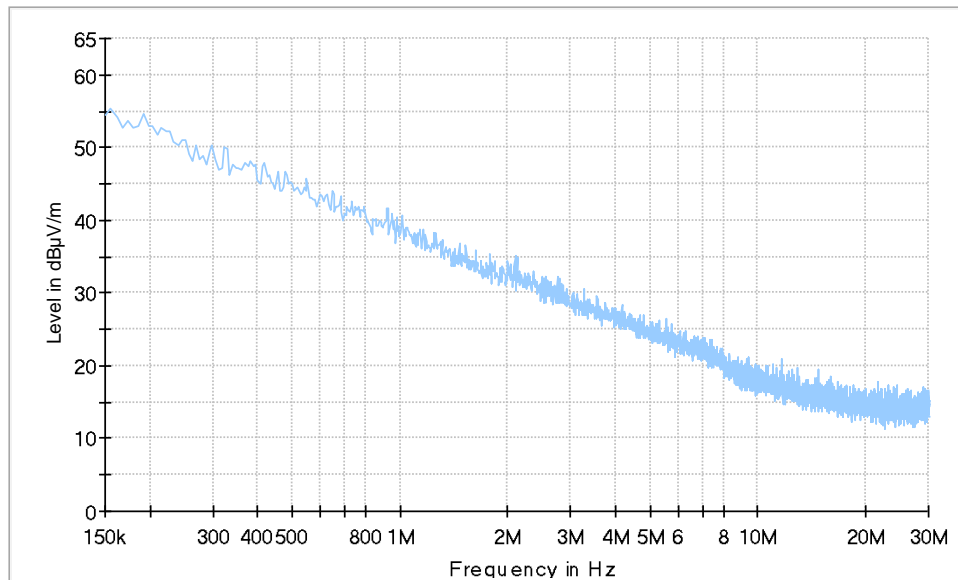


Radiated Emissions (150 kHz-30MHz) scanned at 3m SAC

Full Spectrum

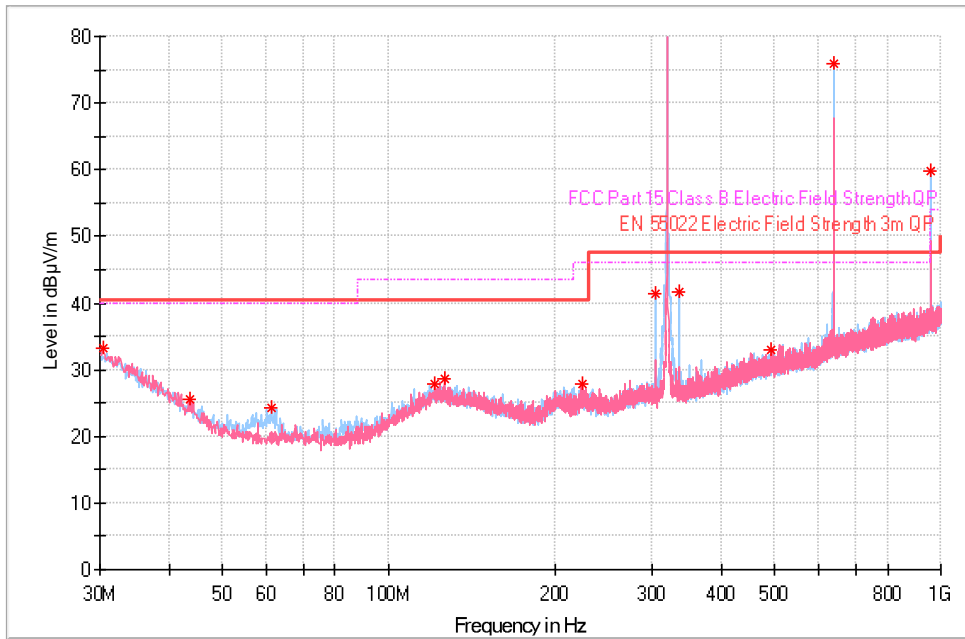

Radiated Emissions (30MHz-1GHz) scanned at 3m SAC

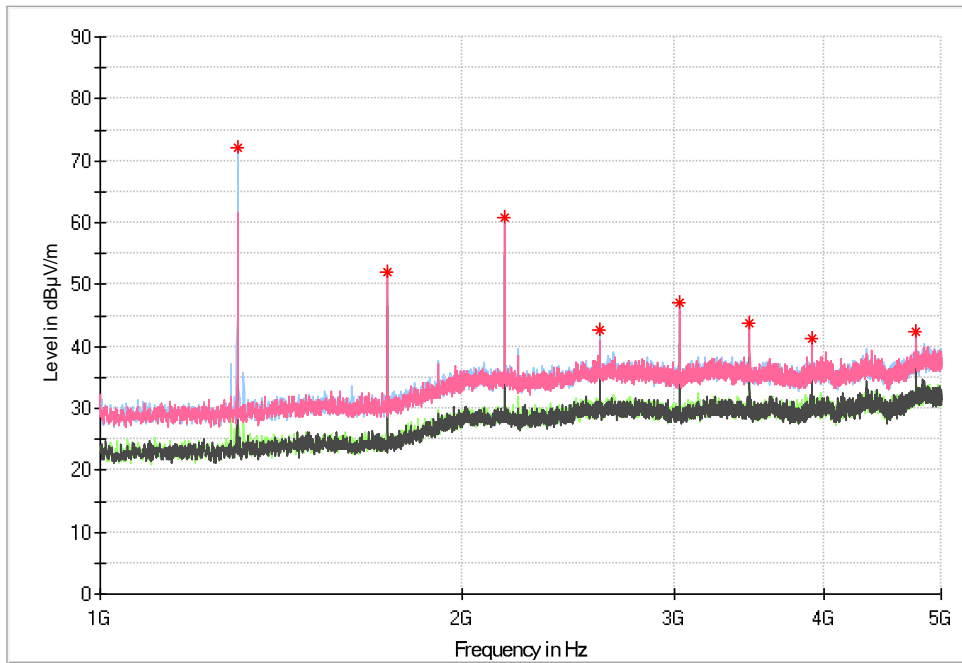

Radiated Emissions (1GHz-5GHz) scanned at 3m SAC

Measurement Data of Spurious Emissions

Carrier Frequency			319.5 MHz									
	Freq.	Raw Peak	Ave	Ant.	System dB	Antenna Factor	Corrected Peak	DCC. Factor	Avg FS	Limit Avg	Margin	
	MHz	dBuV			dB		dBuV/m	dB	dBuV/m	dBuV/m	dB	
2	639	76.2	75.8	V	28.6	19.6	67.2	-21.3	45.9	55.9	10	
		84.6	84.2	H	28.6	19.6	75.6	-21.3	54.3	55.9	1.6	
3	958.5	55.9	54.2	V	29.3	23	49.6	-21.3	28.3	55.9	27.6	
		65.9	64.7	H	29.3	23	59.6	-21.3	38.3	55.9	17.6	
4	1278	56	52	V	33.5	28.7	51.2	-21.3	29.9	54	24.1	Restricted Band
		56	53	H	33.5	28.7	51.2	-21.3	29.9	54	24.1	
5	1597.5	62	61	V	31.79	28.7	58.91	-21.3	37.61	54	16.39	Restricted Band
		63	61	H	31.79	28.7	59.91	-21.3	38.61	54	15.39	
6	1917	60	58	V	31	31.6	60.6	-21.3	39.3	55.9	16.6	Restricted Band
		58	55	H	31	31.6	58.6	-21.3	37.3	55.9	18.6	
7	2236.5	56	53	V	29.5	32.2	58.7	-21.3	37.4	54	16.6	Restricted Band
		61	58	H	29.5	32.2	63.7	-21.3	42.4	54	11.6	
8	2556	54	46	V	29.6	32.7	57.1	-21.3	35.8	55.9	20.1	Restricted Band
		55	49	H	29.6	32.7	58.1	-21.3	36.8	55.9	19.1	
9	2875.5	50	42	V	28.84	32.8	53.96	-21.3	32.66	54	21.34	Restricted Band
		51	44	H	28.84	32.8	54.96	-21.3	33.66	54	20.34	
10	3195	51	42	V	28.2	32.9	55.7	-21.3	34.4	55.9	21.5	Restricted Band
		51	42	H	28.2	32.9	55.7	-21.3	34.4	55.9	21.5	

Carrier Frequency			344.92 MHz									
	Freq.	Raw Peak	Ave	Ant.	System dB	Antenna Factor	Corrected Peak	DCC. Factor	Avg FS	Limit Avg	Margin	
	MHz	dBuV			dB		dBuV/m	dB	dBuV/m	dBuV/m	dB	
2	689.88	76.7	76.3	V	28.6	20.1	68.2	-21.5	46.7	57.3	10.6	
		86.1	85.1	H	28.6	20.1	77.6	-21.5	56.1	57.3	1.2	
3	1034.82	53.6	47	V	35.3	28.5	46.8	-21.5	25.3	54	28.7	Restricted Band
		55	50	H	35.3	28.5	48.2	-21.5	26.7	54	27.3	
4	1379.76	59	56	V	33.5	28.7	54.2	-21.5	32.7	54	21.3	
		58	55	H	33.5	28.7	53.2	-21.5	31.7	54	22.3	
5	1724.7	60	58	V	31.5	29.9	58.4	-21.5	36.9	57.3	20.4	
		57	54	H	31.5	29.9	55.4	-21.5	33.9	57.3	23.4	
6	2069.64	55	50	V	31	31.6	55.6	-21.5	34.1	57.3	23.2	
		55	50	H	31	31.6	55.6	-21.5	34.1	57.3	23.2	
7	2414.58	51	44	V	29.6	32.6	54	-21.5	32.5	57.3	24.8	
		51	45	H	29.6	32.6	54	-21.5	32.5	57.3	24.8	
8	2759.52	50	40	V	28.84	32.8	53.96	-21.5	32.46	54	21.54	Restricted Band
		53	47	H	28.84	32.8	56.96	-21.5	35.46	54	18.54	

Carrier Frequency			345 MHz									
	Freq.	Raw Peak	Ave	Ant.	System dB	Antenna Factor	Corrected Peak	DCC. Factor	Avg FS	Limit Avg	Margin	
	MHz	dBuV			dB		dBuV/m	dB	dBuV/m	dBuV/m	dB	
2	690	76.6	76.2	V	28.6	20.1	68.1	-22.1	46	57.3	11.3	
		86	85.4	H	28.6	20.1	77.5	-22.1	55.4	57.3	1.9	
3	1035	53	47	V	35.3	28.5	46.2	-22.1	24.1	54	29.9	Restricted Band
		56	52	H	35.3	28.5	49.2	-22.1	27.1	54	26.9	
4	1380	57	54	V	33.5	28.7	52.2	-22.1	30.1	54	23.9	
		59	57	H	33.5	28.7	54.2	-22.1	32.1	54	21.9	
5	1725	60	58	V	31.5	29.9	58.4	-22.1	36.3	57.3	21	
		60	58	H	31.5	29.9	58.4	-22.1	36.3	57.3	21	
6	2070	55	52	V	31	31.6	55.6	-22.1	33.5	57.3	23.8	
		56	52	H	31	31.6	56.6	-22.1	34.5	57.3	22.8	
7	2415	50	45	V	29.6	32.6	53	-22.1	30.9	57.3	26.4	
		51	44	H	29.6	32.6	54	-22.1	31.9	57.3	25.4	
8	2760	51	41	V	28.84	32.8	54.96	-22.1	32.86	54	21.14	Restricted Band
		54	47	H	28.84	32.8	57.96	-22.1	35.86	54	18.14	

Carrier Frequency			433.42 MHz									
	Freq.	Raw Peak	Ave	Ant.	System dB	Antenna Factor	Corrected Peak	DCC. Factor	Avg FS	Limit Avg	Margin	
	MHz	dBuV			dB		dBuV/m	dB	dBuV/m	dBuV/m	dB	
2	866.84	75	72	V	29	21.7	67.7	-22.5	45.2	60.8	15.6	
		83.8	80.8	H	29	21.7	76.5	-22.5	54	60.8	6.8	
3	1300.26	68	67	V	33.5	28.7	63.2	-22.5	40.7	54	13.3	Restricted Band
		79	78	H	33.5	28.7	74.2	-22.5	51.7	54	2.3	
4	1733.68	57	54	V	31.5	29.9	55.4	-22.5	32.9	60.8	27.9	
		57	55	H	31.5	29.9	55.4	-22.5	32.9	60.8	27.9	
5	2167.1	61	60	V	30.5	31.7	62.2	-22.5	39.7	60.8	21.1	
		62	60	H	30.5	31.7	63.2	-22.5	40.7	60.8	20.1	
6	2600.52	50	41	V	29.6	32.7	53.1	-22.5	30.6	60.8	30.2	
		51	44	H	29.6	32.7	54.1	-22.5	31.6	60.8	29.2	
7	3033.94	50	42	V	28.2	32.9	54.7	-22.5	32.2	60.8	28.6	
		52	46	H	28.2	32.9	56.7	-22.5	34.2	60.8	26.6	
8	3467.36	51	41	V	27.1	32.9	56.8	-22.5	34.3	60.8	26.5	
		51	39	H	27.1	32.9	56.8	-22.5	34.3	60.8	26.5	
9	3900.78	47	35	V	26	33.3	54.3	-22.5	31.8	54	22.2	Restricted Band
		49	40	H	26	33.3	56.3	-22.5	33.8	54	20.2	
10	4334.2	48	40	V	24.5	33.4	56.9	-22.5	34.4	54	19.6	Restricted Band
		47	35	H	24.5	33.4	55.9	-22.5	33.4	54	20.6	

Carrier Frequency			433.92 MHz									
	Freq.	Raw Peak	Ave	Ant.	System dB	Antenna Factor	Corrected Peak	DCC. Factor	Avg FS	Limit Avg	Margin	
	MHz	dBuV			dB		dBuV/m	dB	dBuV/m	dBuV/m	dB	
2	867.84	73.3	70.6	V	29	21.7	66	-20.9	45.1	60.8	15.7	
		86.8	83.9	H	29	21.7	79.5	-20.9	58.6	60.8	2.2	
3	1301.76	69	68	V	33.5	28.7	64.2	-20.9	43.3	54	10.7	Restricted Band
		79.5	79	H	33.5	28.7	74.7	-20.9	53.8	54	0.2	
4	1735.68	57	54	V	31.5	29.9	55.4	-20.9	34.5	60.8	26.3	
		57	55	H	31.5	29.9	55.4	-20.9	34.5	60.8	26.3	
5	2169.6	61	60	V	30.5	31.7	62.2	-20.9	41.3	60.8	19.5	
		62	60	H	30.5	31.7	63.2	-20.9	42.3	60.8	18.5	
6	2603.52	50	41	V	29.6	32.7	53.1	-20.9	32.2	60.8	28.6	
		51	44	H	29.6	32.7	54.1	-20.9	33.2	60.8	27.6	
7	3037.44	50	42	V	28.2	32.9	54.7	-20.9	33.8	60.8	27	
		52	46	H	28.2	32.9	56.7	-20.9	35.8	60.8	25	

8	3471.36	51	41	V	27.1	32.9	56.8	-20.9	35.9	60.8	24.9	
		51	39	H	27.1	32.9	56.8	-20.9	35.9	60.8	24.9	
9	3905.28	47	35	V	26	33.3	54.3	-20.9	33.4	54	20.6	Restricted Band
		49	40	H	26	33.3	56.3	-20.9	35.4	54	18.6	
10	4339.2	48	40	V	24.5	33.4	56.9	-20.9	36	54	18	
		47	35	H	24.5	33.4	55.9	-20.9	35	54	19	

4.5 Duty Cycle Correction Factor Calculation

Date Performed:

August 17, 2018

Requirement(s):


- § 15.35(c) - Unless otherwise specified, e.g. § 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

Method of Measurement: As called in the ANSI C63.10-2013 standard.


Data & Plot:

Data, Duty Cycle Correction Factor


Carrier frequency	Transmissions Burst Duration	Long Pulse Duration	Long Pulse number	Mid pulse Duration	Mid pulse number	Short pulse Duration	Short pulse number	Total Transmissions Duration	Duty Cycle Correction factor
MHz	ms	ms		ms		ms		ms	dB
319.5	18.4	1.184	1	0.48	1	0.12	58	8.624	-21.3
344.94	17.2	0.272	8			0.136	46	8.432	-21.5
345	17	0.256	12			0.12	40	7.872	-22.1
433.42	15.8	0.2	17			0.096	43	7.528	-22.5
433.92	25.2	2.512	1			0.24	27	8.992	-20.9

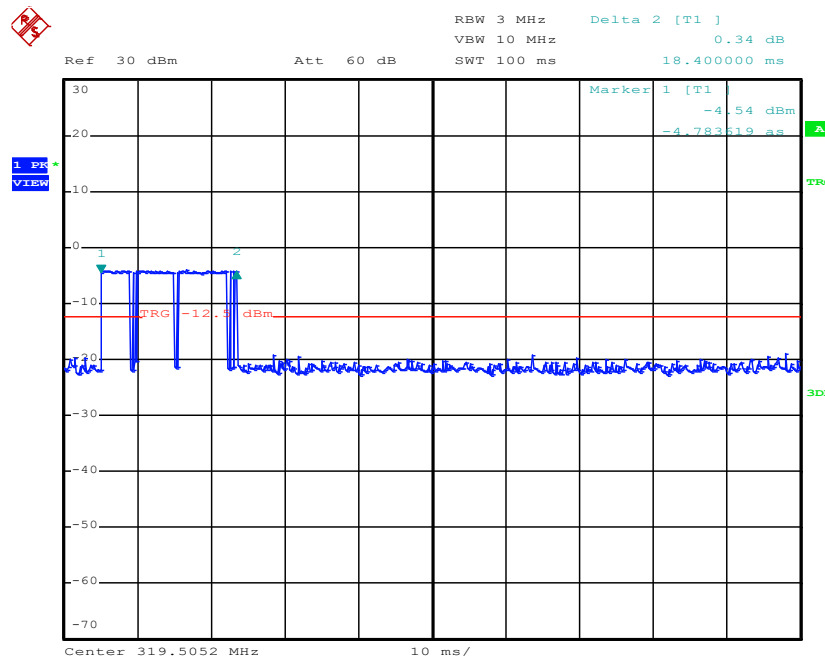


Transmissions Burst Duration In 100 ms, 319.5 MHz

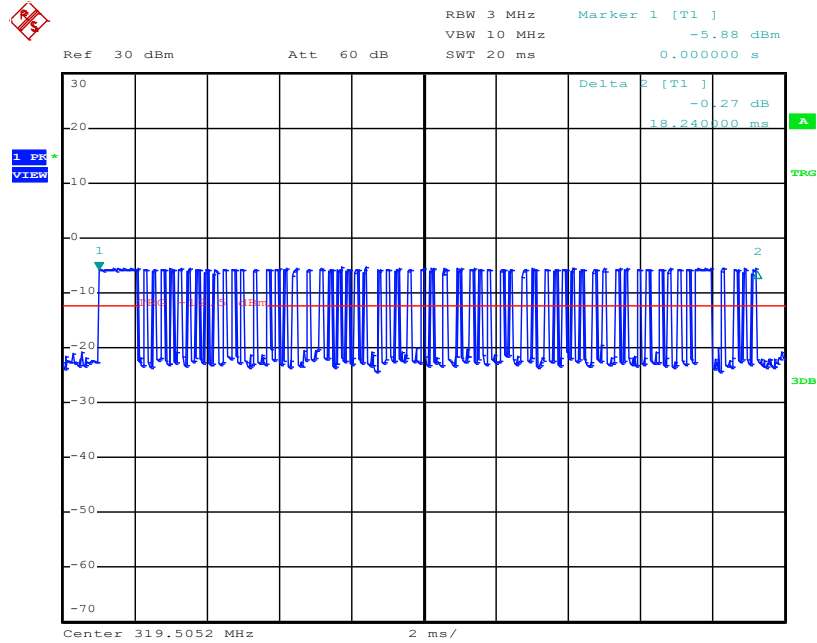


Pulse Number, 319.5MHz

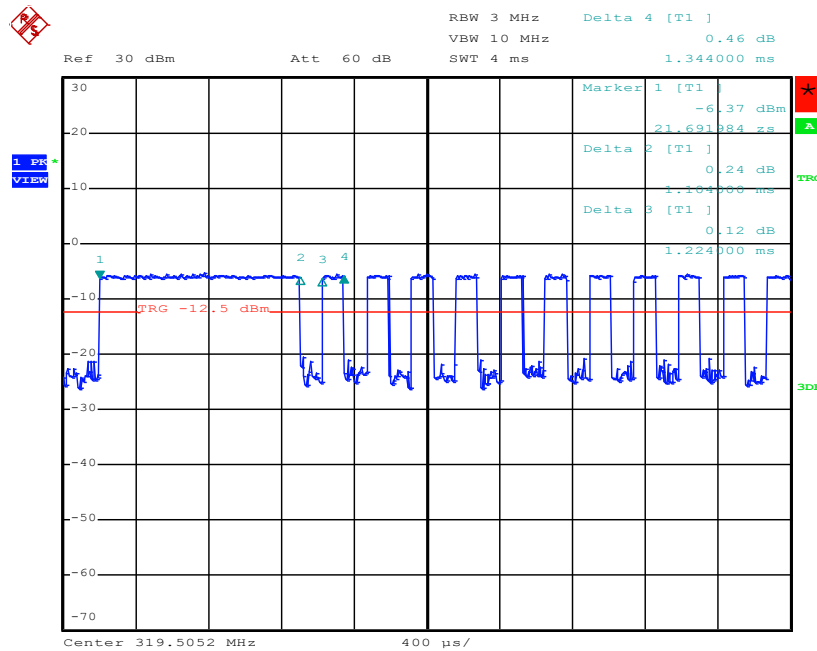


Pulse Time, 319.5MHz

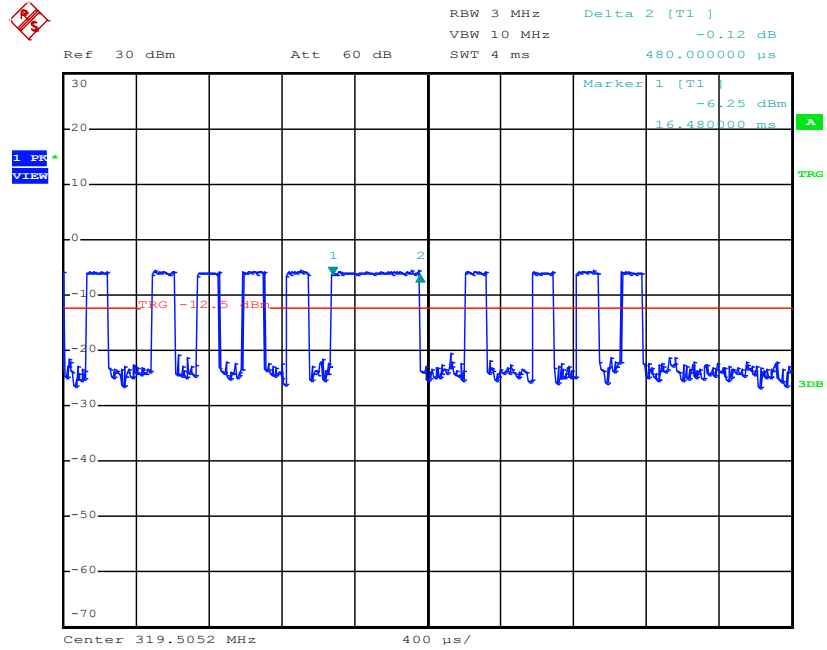


Mid Pulse Time, 319.5MHz

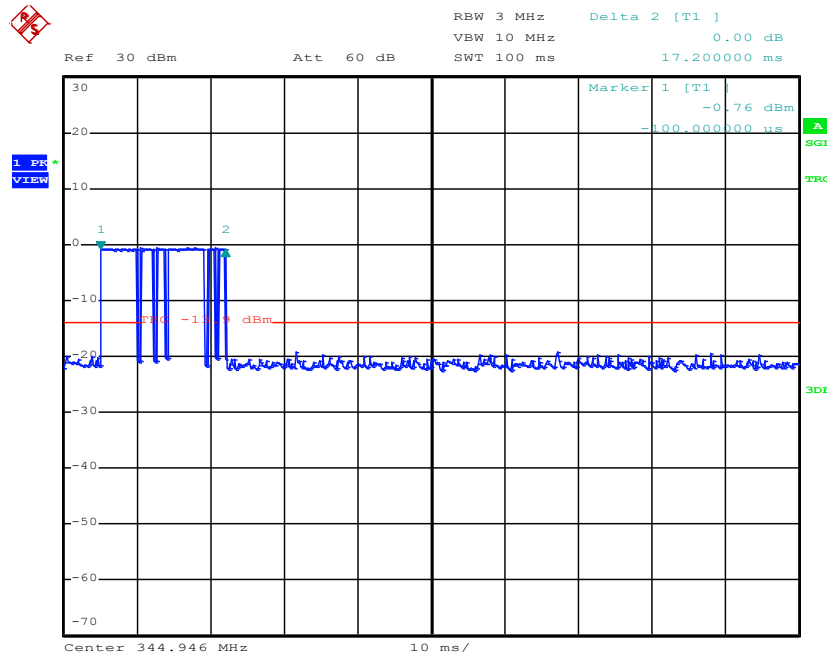


Transmissions Burst Duration In 100 ms, 344.92MHz

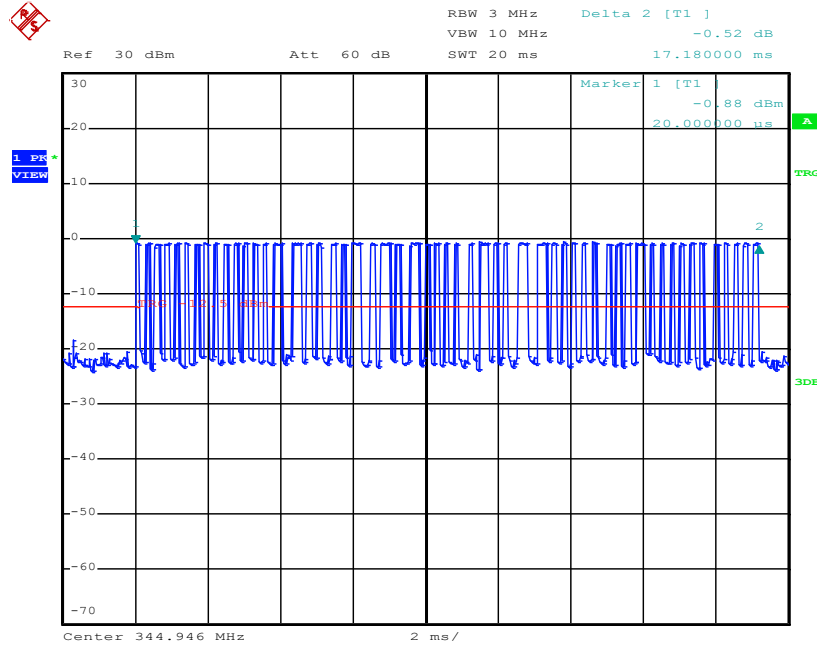


Pulse Number, 344.92MHz

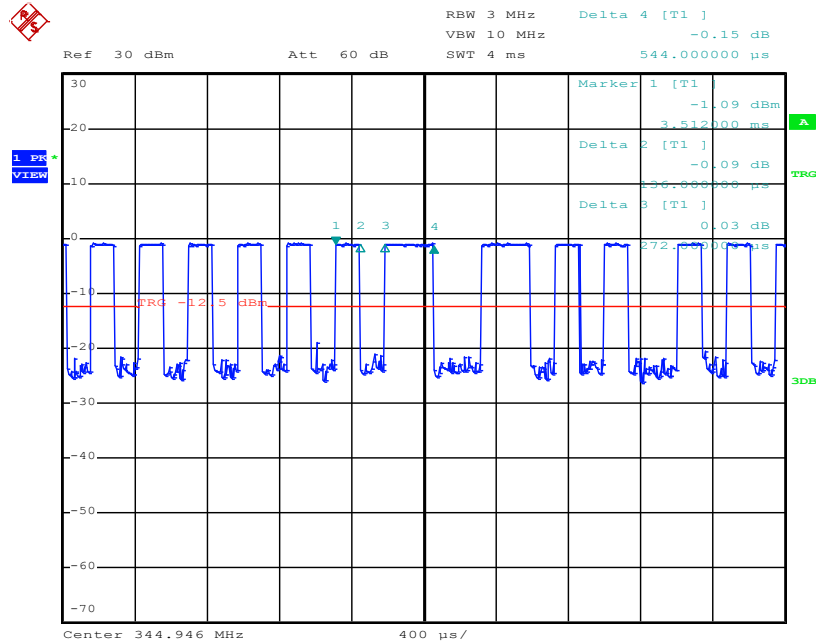


Pulse Time, 344.92MHz

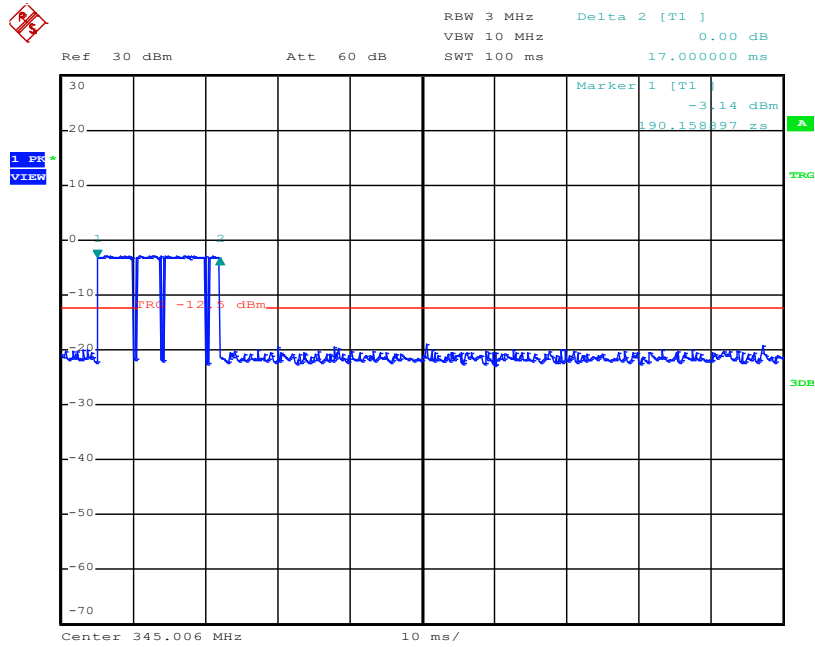


Transmissions Burst Duration In 100 ms, 345MHz

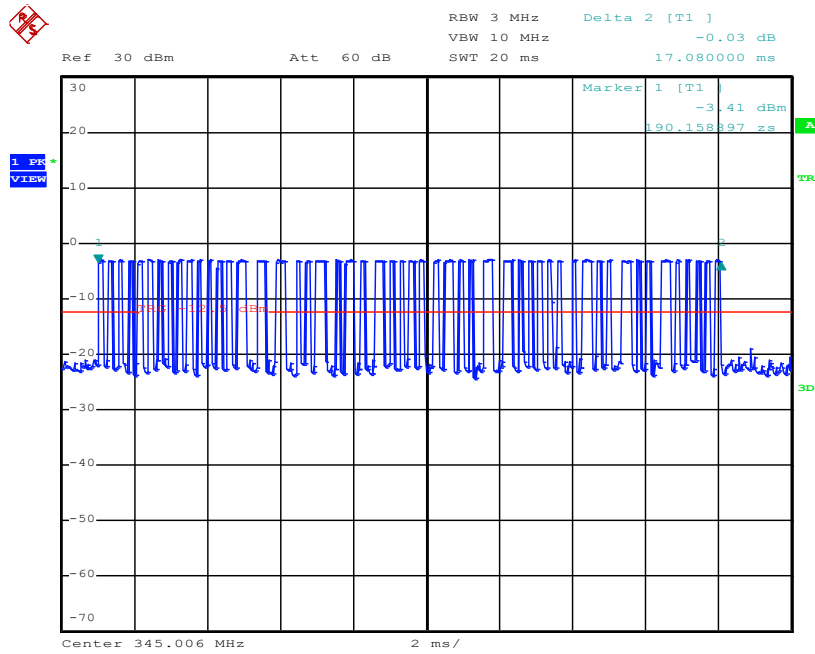


Pulse Number, 345MHz

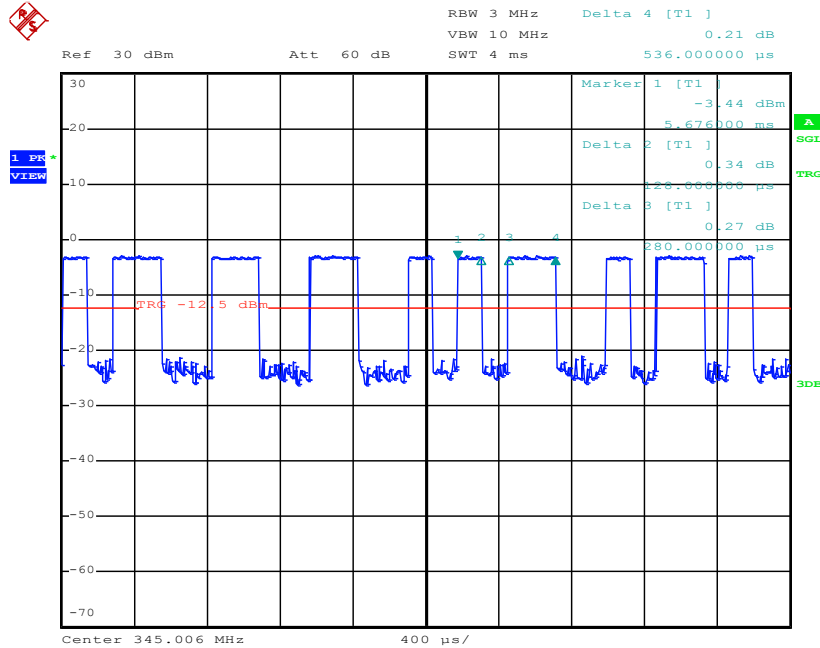


Pulse Time, 345MHz

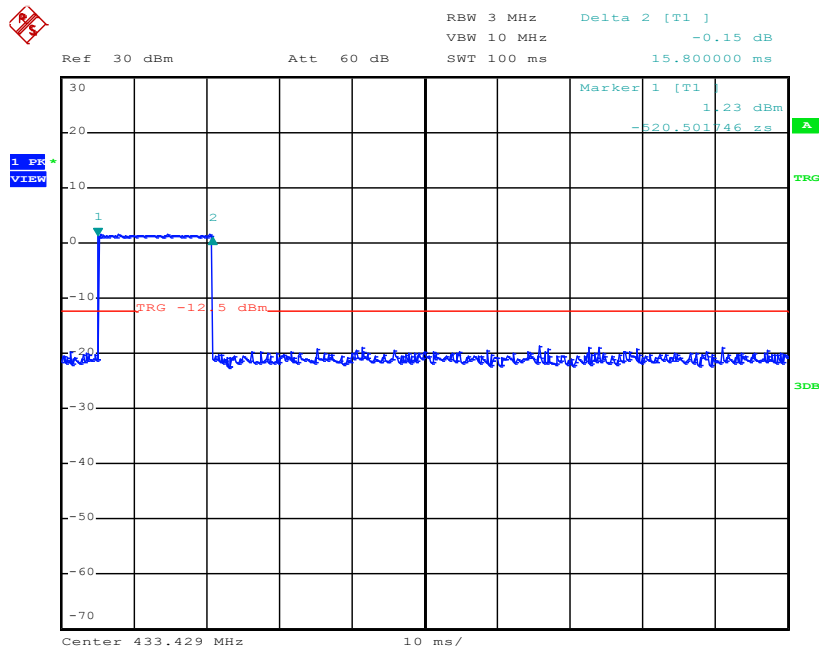


Transmissions Burst Duration In 100 ms, 433.42MHz

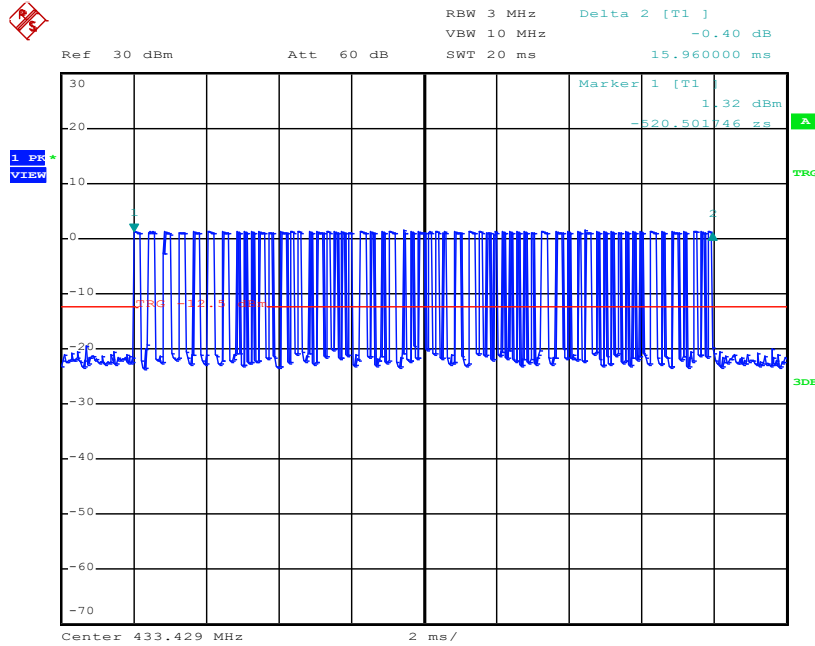


Pulse Number, 433.42MHz

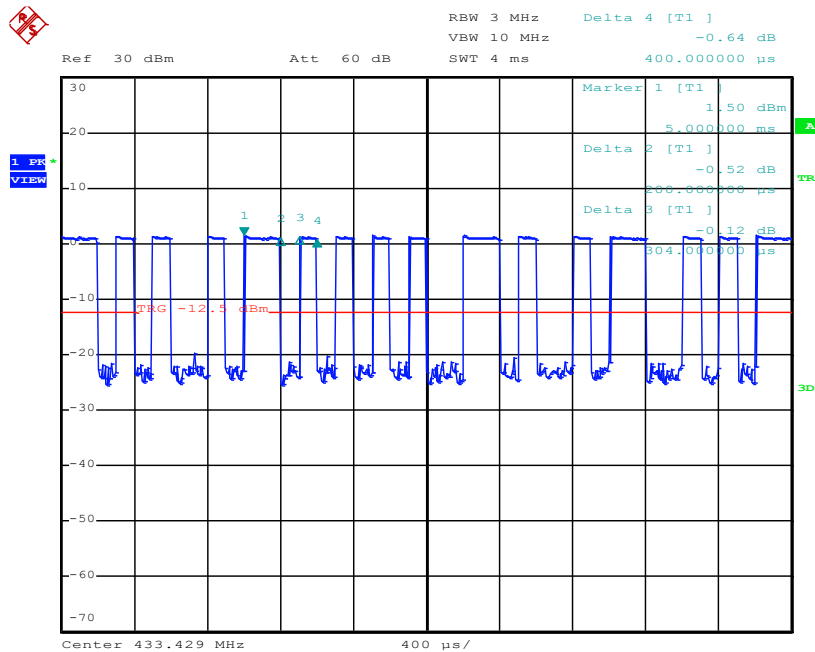


Pulse Time, 433.42MHz

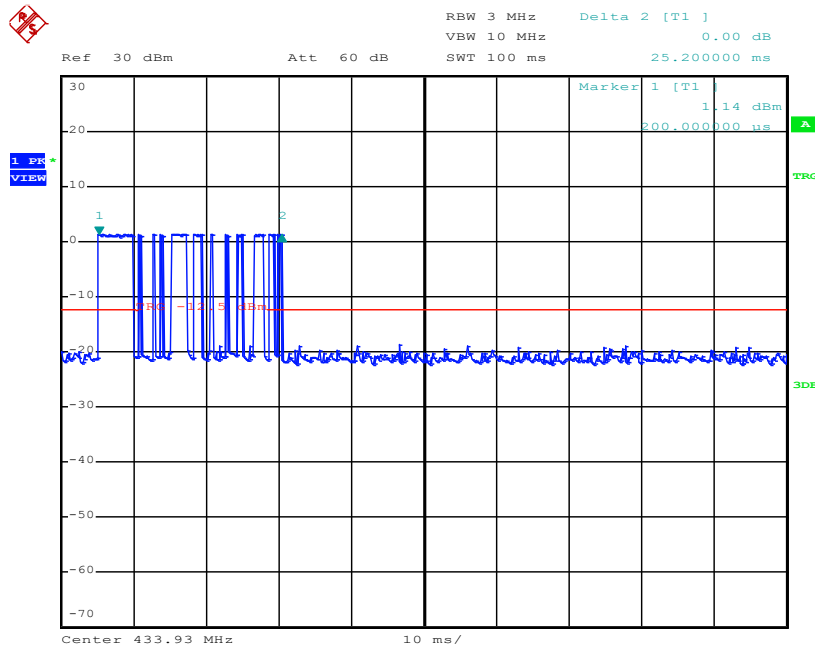

Transmissions Burst Duration In 100 ms, 433.92MHz

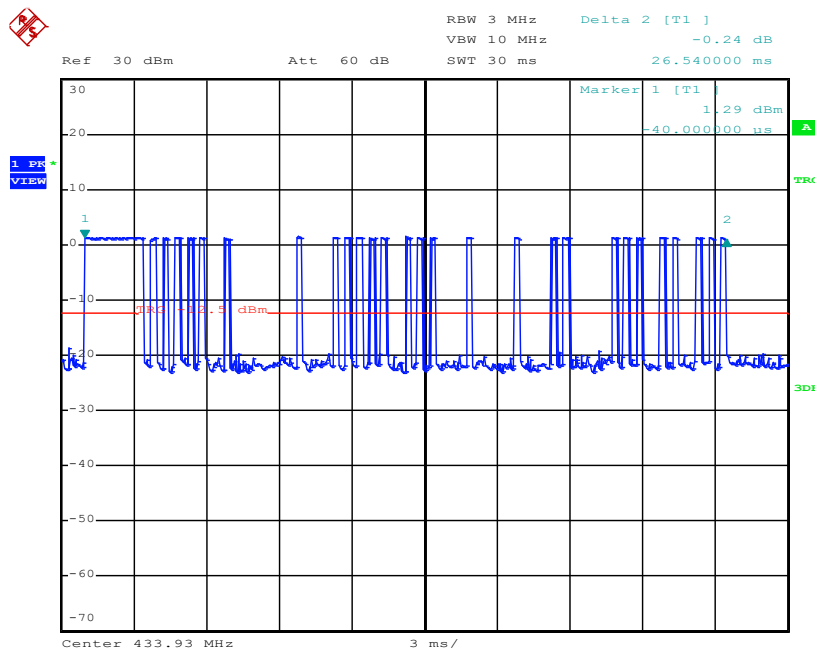

Pulse Number, 433.92MHz

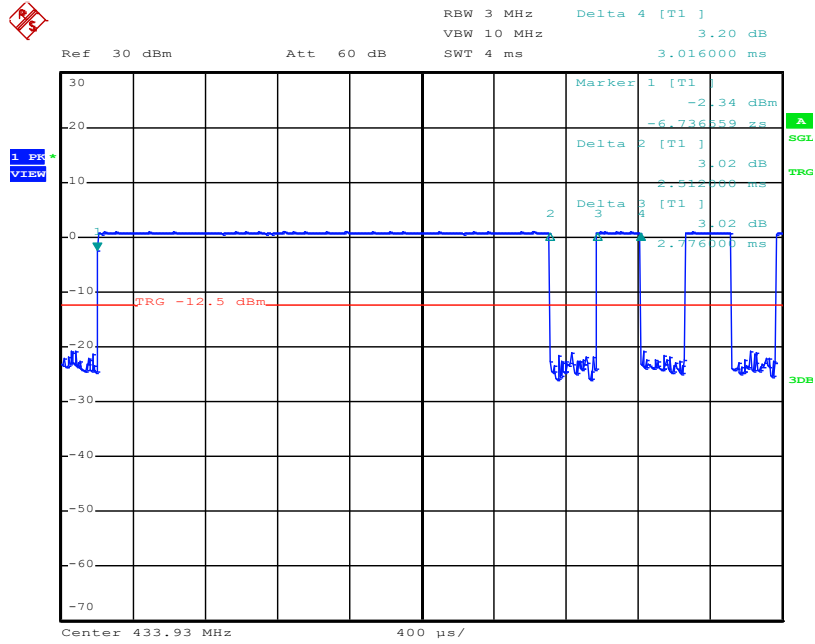

Pulse Time, 433.92MHz

4.6 20 dB Occupied Bandwidth

Date Performed:

August 20, 2018

Test Standard:

- Title 47 CFR Part 15: Subpart C, §15.231 (c)

Test Method:

- ANSI C63.10-2013

Required Limit(s):

- The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Method of Measurement:

- As called in the ANSI C63.10-2013 standard.


Result:

The EUT complies with the applicable standard.


Data & Plot:

Data, 20 dB OBW


Center frequency	0.5% of center frequency	20 dB Bandwidth	Result
MHz	kHz	kHz	
319.5	798.75	61.6	Pass
344.92	862.3	52	Pass
345	862.5	56	Pass
433.42	1083.55	67.6	Pass
433.92	1084.8	48.4	Pass

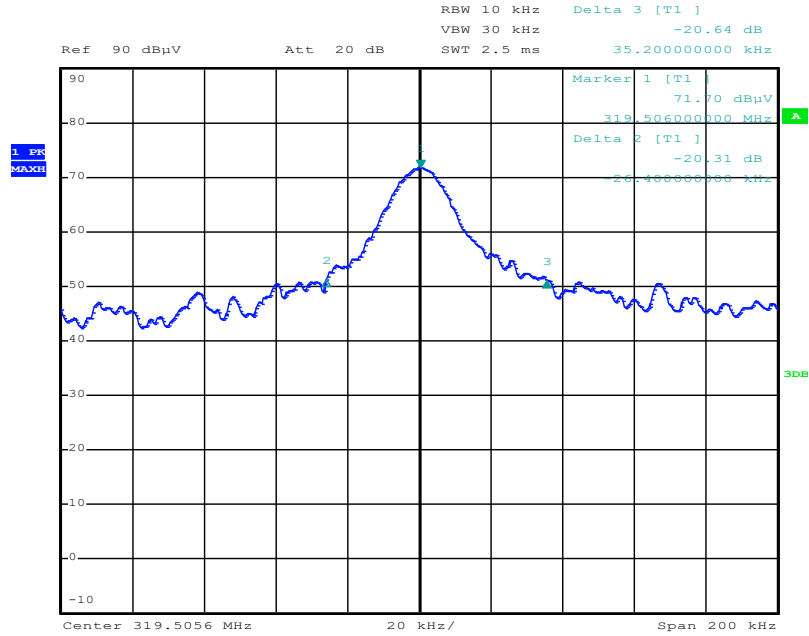


20 dB Occupied Bandwidth, 319.5 MHz

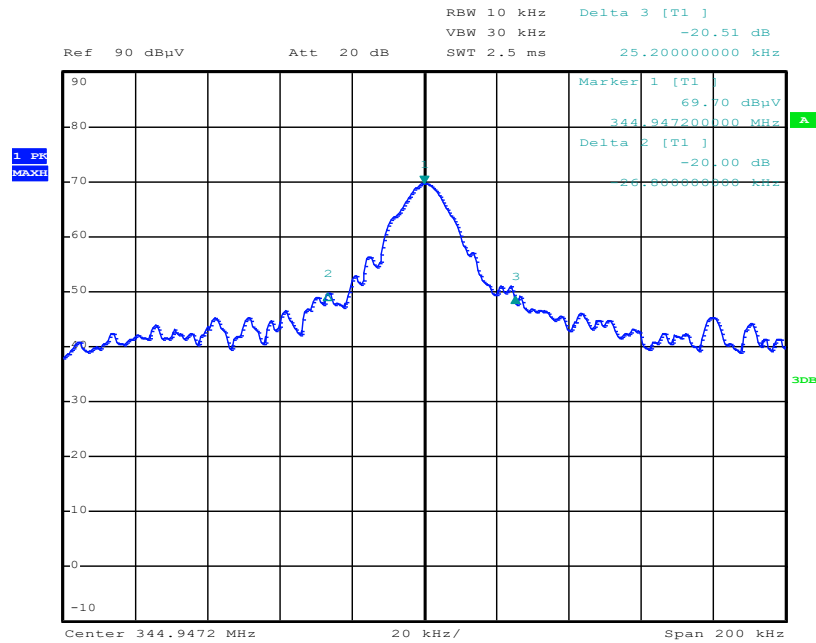


20 dB Occupied Bandwidth, 344.92 MHz

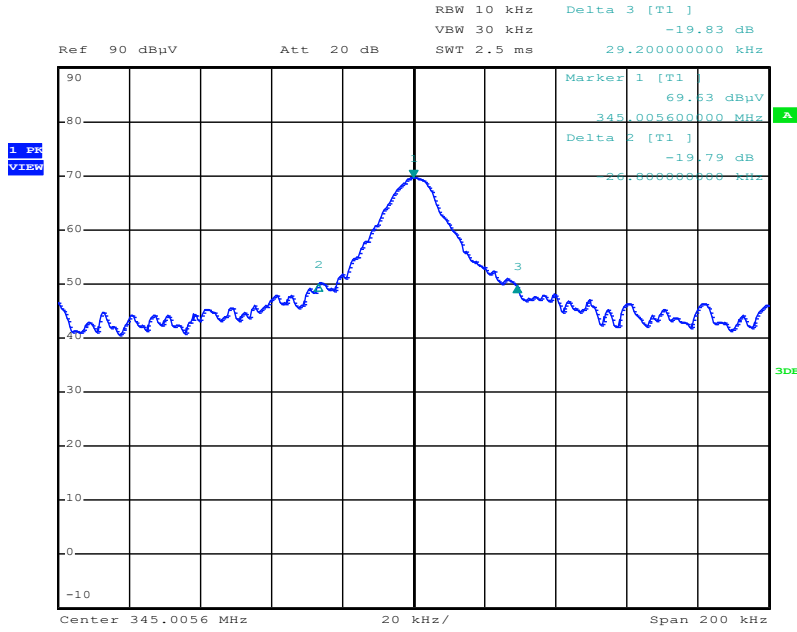

20 dB Occupied Bandwidth, 345 MHz

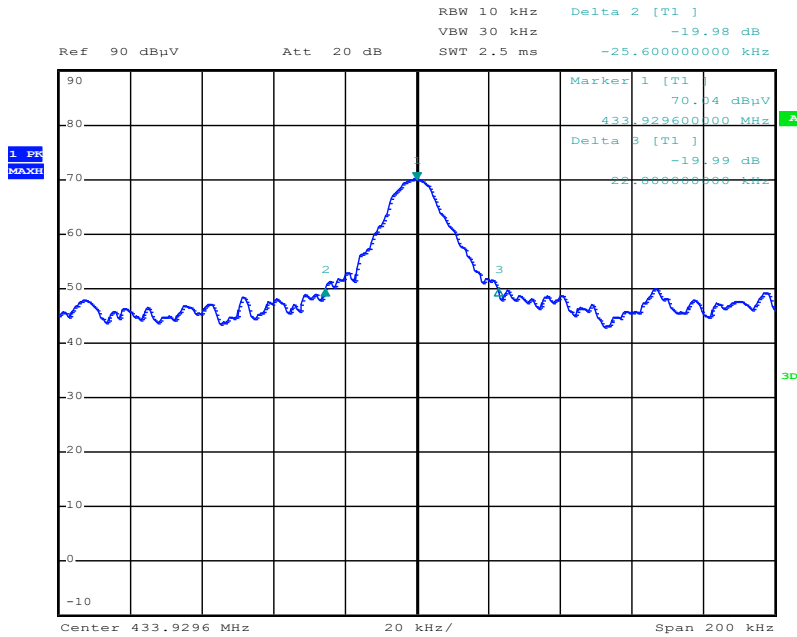

20 dB Occupied Bandwidth, 433.92 MHz

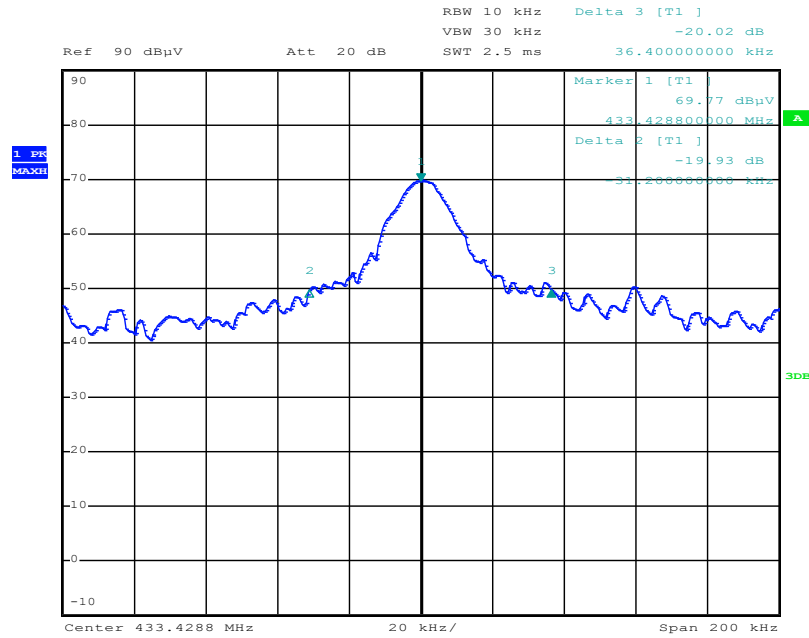

20 dB Occupied Bandwidth, 433.42 MHz

4.7 99% Occupied Bandwidth

Date Performed:

August 20, 2018

Test Standard:

- Title 47 CFR Part 15: Subpart C, §15.231 (c)
- RSS-210 Issue 9, A.1.3
- RSS-Gen Issue 4, 6.6

Test Method:

- ANSI C63.10-2013

Required Limit(s):

- The 99% bandwidth of momentarily operated devices shall be less or equal to 0.25% of the centre frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the 99% bandwidth shall be less or equal to 0.5% of the centre frequency.

Method of Measurement:

- As called in the ANSI C63.10-2013 standard.

Modifications:

No modification was required to comply for this test.


Result:

The EUT complies with the applicable standard.


Data & Plot:

Data, 99% OBW


Center frequency	0.5% of center frequency	99% Bandwidth	Result
MHz	kHz	kHz	
319.5	798.75	121.2	Pass
344.92	862.3	142.8	Pass
345	862.5	142.8	Pass
433.42	1083.55	160	Pass
433.92	1084.8	148.4	Pass

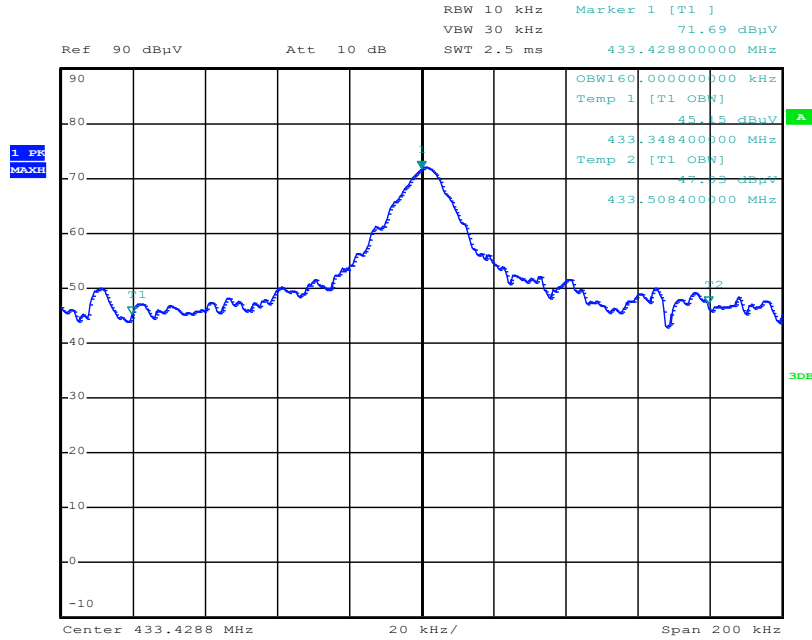


99% Occupied Bandwidth, 433.42 MHz

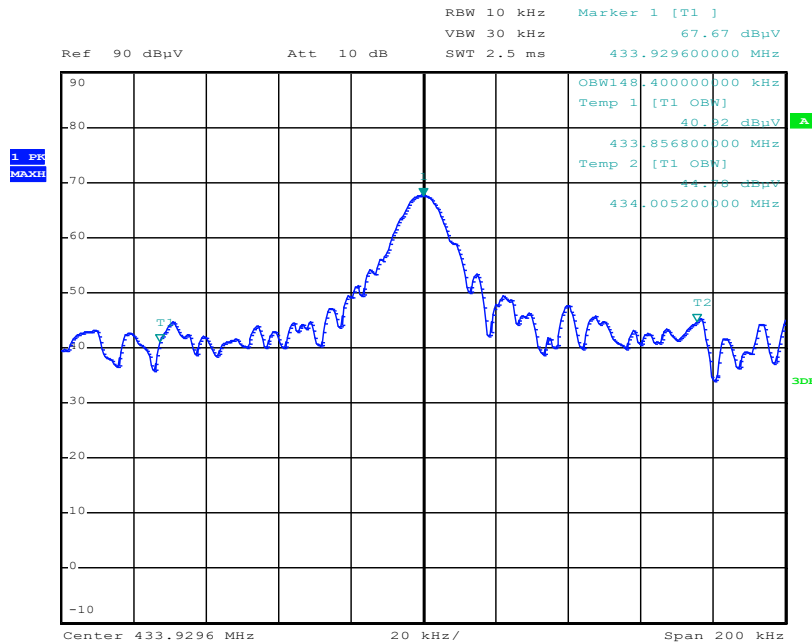


99% Occupied Bandwidth, 433.92 MHz

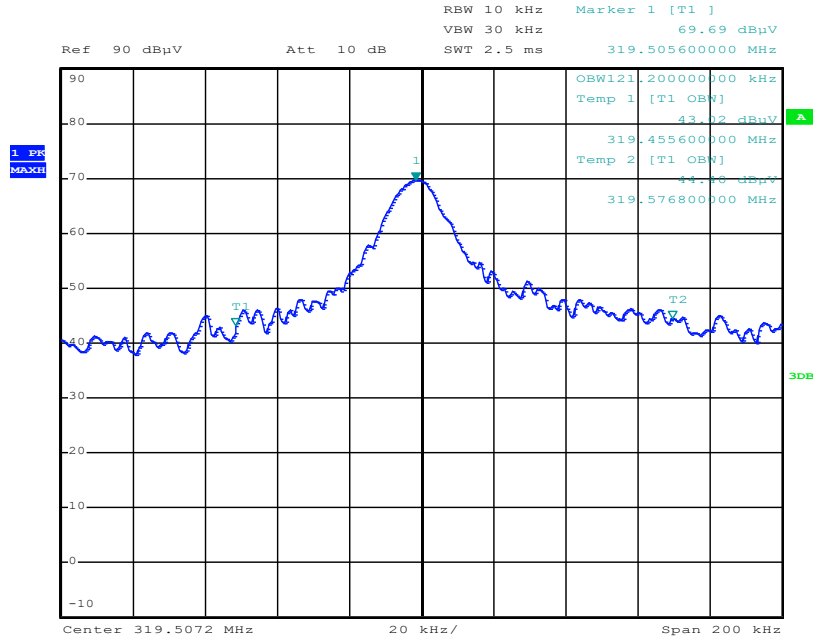

99% Occupied Bandwidth, 319.5 MHz

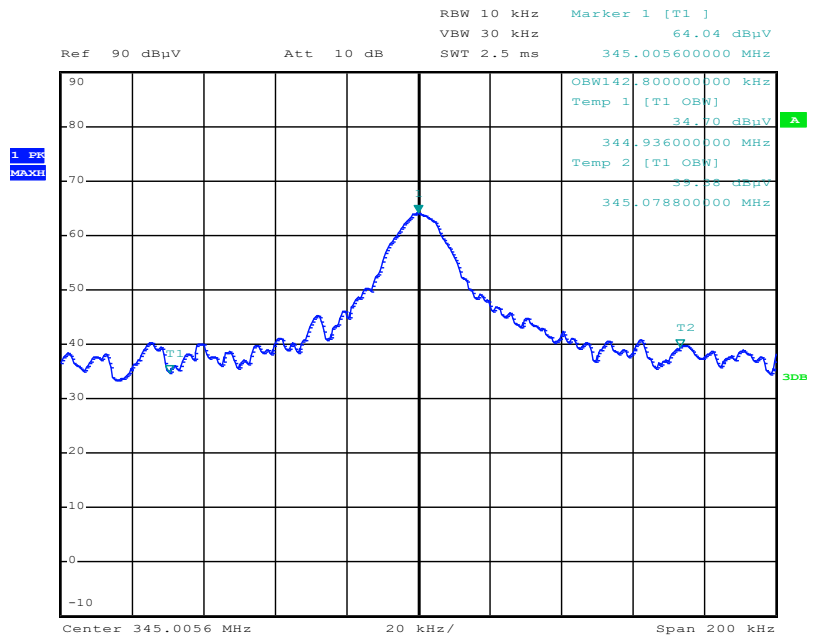

99% Occupied Bandwidth, 345 MHz

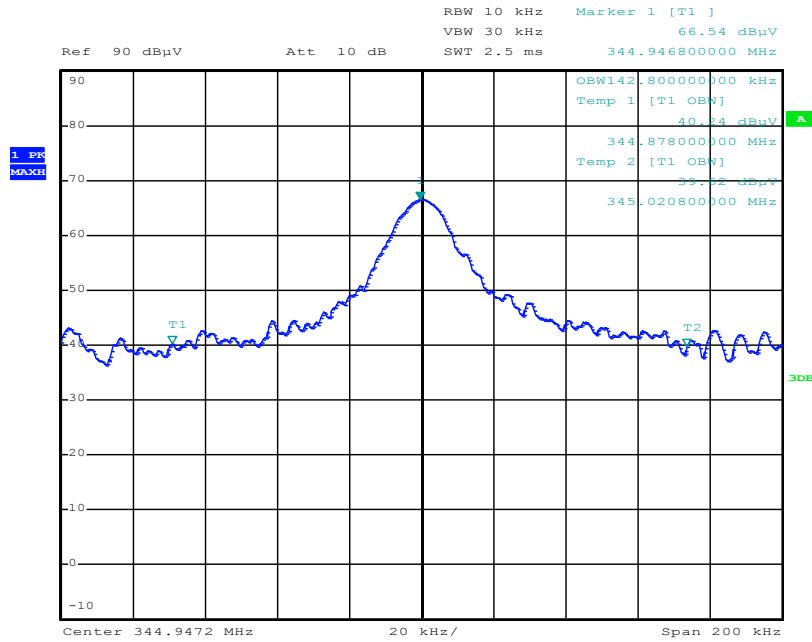

99% Occupied Bandwidth, 344.92 MHz

4.8 Receiver Radiated Emissions

Date Performed:

August 9, 2018

Test Standard:

- RSS-Gen Issue 4, 7.1

Test Method:

- ANSI C63.4-2014

Required Limit(s):

Spurious emissions from receivers shall not exceed the radiated limits shown below

Frequency, <i>f</i> (MHz)	Field strength (dB μ V/m)
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
above 960	54.0
Note 1: The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.	

Method of Measurement:

The EUT was tested in our 3 m SAC and was positioned on the center of the turntable. The transmitter was set for continuous transmission. The device was measured for all radiated emissions from 30 MHz to 1 GHz. The EUT was pre-scanned in 3 different orthogonal orientations and was found to radiate highest when placed flat on the table top as indicated in the test photos.


Modifications:

No modification was required to comply for this test.

Result:

The EUT complies with the applicable standard.


Data/Plot:

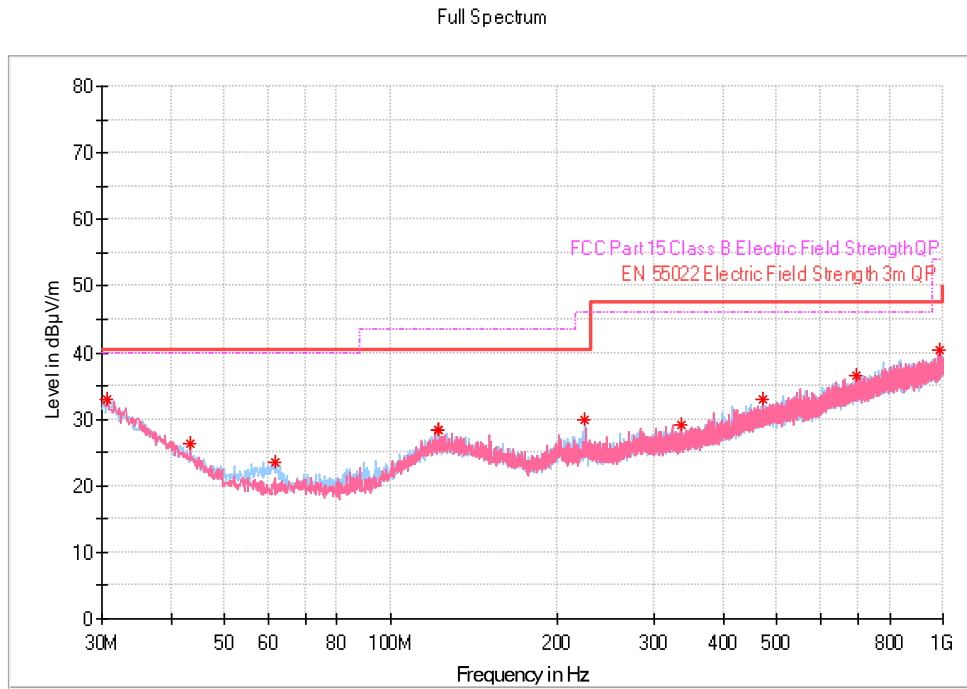

Radiated Emissions (below 1GHz) scanned at 3m SAC

Remark: All radiated emissions were at least 20dB below the required limit line.


Appendix A: TEST SETUP PHOTOS

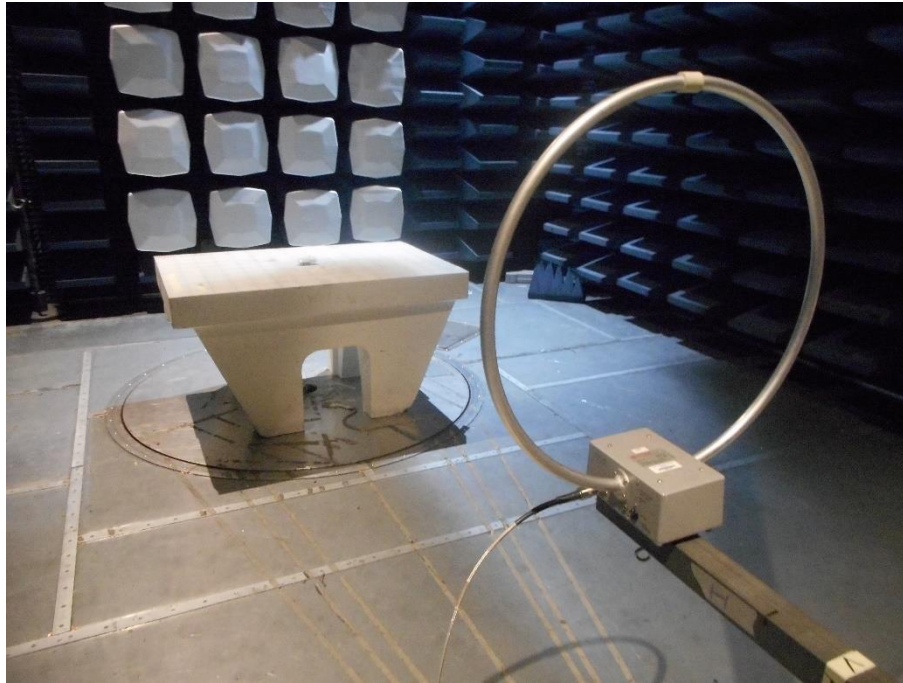


Radiated Emissions below 30 MHz at the 3m SAC



Radiated Emissions 30M – 1 GHz at the 3m SAC

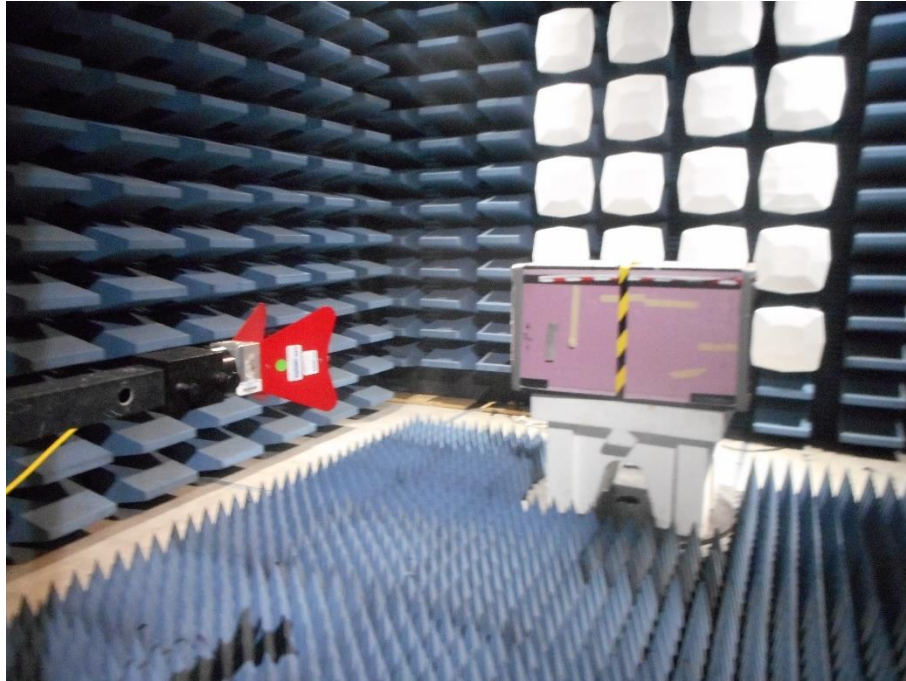

Radiated Emissions Above 1 GHz at the 3m SAC

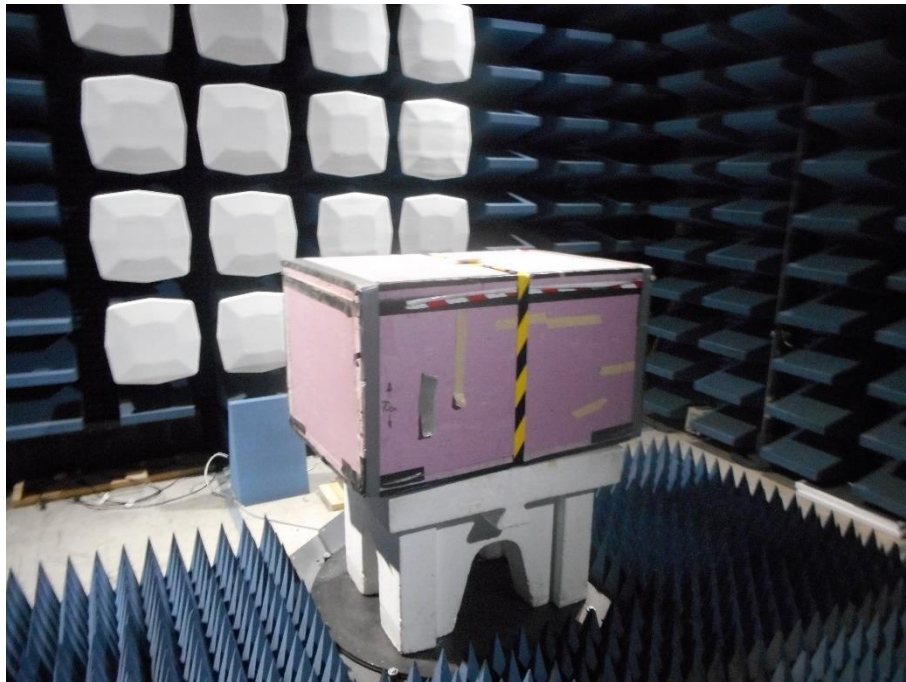

Radiated Emissions Above 1 GHz at the 3m SAC, EUT setup

Appendix B: ABBREVIATIONS

Abbreviation	Definition
AC	Alternating Current
AM	Amplitude Modulation
CE	European Conformity
CISPR	Comité International Spécial des Perturbations Radioélectriques
DC	Direct Current
EFT	Electrical Fast Transient
EMC	ElectroMagnetic Compatibility
EMI	ElectroMagnetic Interference
ESD	ElectroStatic Discharge
EUT	Equipment Under Test
FCC	Federal Communications Commission
IC	Industry Canada
ICES	Interference Causing Equipment Standard
IEC	International Electrotechnical Commission
LISN	Line Impedance Stabilizing Network
OATS	Open Area Test Site
RF	Radio Frequency
RMS	Root-Mean-Square
SAC	Semi-Anechoic Chamber



QAI Laboratories
3980 North Fraser Way
Burnaby, BC, V5J 5K5 Canada

END OF REPORT