

Date: 2017-07-10 Page 1 of 91 No.: DM123869

Applicant: Shenzhen Jiayinking Technology Holding Company

Limited

No.11-1 Anye Road, Anliang Village, Henggang Town,

Longgang District, Shenzhen, China

Manufacturer: Shenzhen Jiayinking Technology Holding Company

Limited

No.11-1 Anye Road, Anliang Village, Henggang Town,

Longgang District, Shenzhen, China

Description of Sample(s): Product: Portable Bluetooth Turntable

Brand Name: Innovative Technology, Victrola

Model Number: VSC-550BT FCC ID: 2ADA2-CS-14007

Date Sample(s) Received: 2016-05-31

Date Tested: 2016-06-06 to 2016-06-24, 2017-07-07

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 and ANSI C63.10: 2013 for

FCC Certification.

Conclusion(s): The submitted product <u>COMPLIED</u> with the requirements

of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on

Section 2.2 in this Test Report.

Remark(s): Bluetooth FHSS (GFSK/ π /4-DQPSK/8DPSK)

For additional model(s) details, please page 3.

Authorized Signatory
ElectroMagnetic Compatibility Department

For and on behalf of STC (Dongguan) Company Limited



Date: 2017-07-07 Page 2 of 91 No.: DM123869

CONTENT:

	Cover Content	Page 1 of 91 Page 2 of 91
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 3 of 91
1.2	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 91
1.3	Date of Order	Page 3 of 91
1.4	Submitted Sample	Page 3 of 91
1.5	Test Duration	Page 3 of 91
1.6	Country of Origin	Page 3 of 91
1.7	RF Module Details	Page 4 of 91
1.8	Antenna Details	Page 4 of 91
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 5 of 91
2.2	Test Standards and Results Summary	Page 5 of 91
2.3	Table for Test Modes	Page 6 of 91
<u>3.0</u>	Test Results	
3.1	Emission	Page 7 –86 of 91
	Appendix A List of Measurement Equipment	Page 87 of 91
	Appendix B Photographs	Page 88-91 of 91



Date: 2017-07-07 Page 3 of 91 No.: DM123869

1.0 General Details

1.1 Equipment Under Test [EUT] Description of Sample(s)

Product: Portable Bluetooth Turntable

Manufacturer: Shenzhen Jiayinking Technology Holding Company

Limited

No.11-1 Anye Road, Anliang Village, Henggang Town,

Longgang District, Shenzhen City, R.R.C.

Brand Name: Innovative Technology, Victrola

Model Number: VSC-550BT

Additional Model Number: ITVS-550BT, VSC-1400, ITVS-1400

Rating: Adapter 1: Input: 100-240Va.c. 50/60Hz 0.5A;

Output: 5Vd.c. 1000mA.

Adapter 2: Input: 100-240Va.c. 50/60Hz 0.4A;

Output: 5Vd.c. 1000mA.

The AC/DC adaptor was provided by the applicant with following details:

Adapter 1: Brand name: N/A; Model no.: GKYPS0100050UL1 Adapter 2: Brand name: N/A; Model no.: HB05J-0501004SPA

1.1.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Portable Bluetooth Turntable. The r.f. signal was modulated by IC and type of modulation was frequency hopping spread spectrum Modulation.

1.2 Date of Order

2016-05-31

1.3 Submitted Sample(s):

1 Sample

1.4 Test Duration

2016-06-06 to 2016-06-24, 2017-07-07

1.5 Country of Origin

China



Date: 2017-07-07 Page 4 of 91 No.: DM123869

1.7 RF Module Details

Module Model Number: BK3254

Module FCC ID:

Module Transmission Type: Bluetooth V4.1

Modulation: FHSS (GFSK / π /4-DQPSK/8DPSK)

Data Rates: 1MBps: GFSK

2 MBps: $\pi/4$ -DQPSK 3 MBps: 8DPSK

Frequency Range: 2400-2483.5MHz Carrier Frequencies: 2402MHz – 2480MHz

Module Specification (specification provided by manufacturer)

1.8 Antenna Details

Antenna Type: Inverted F antenna

Antenna Gain: -0.68dBi



Date: 2017-07-07 Page 5 of 91 No.: DM123869

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 Regulations and ANSI C63.10: 2013 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Method	Class /		est Resi		
			Severity	Pass	Fail	N/A
Maximum Peak Conducted Output Power	FCC 47CFR 15.247(b)(1)	ANSI C63.10: 2013	N/A			
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.10: 2013	N/A			
AC Mains Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10: 2013	N/A			
Number of Hopping Frequency	FCC 47CFR 15.247 (b)(1)	ANSI C63.10: 2013	N/A			
20dB Bandwidth	FCC 47CFR 15.247(a)(2)	ANSI C63.10: 2013	N/A			
Hopping Channel Separation	FCC 47CFR 15.247(a)(1)	ANSI C63.10: 2013	N/A			
Band-edge measurement (Radiated)	FCC 47CFR 15.247(d)	ANSI C63.10: 2013	N/A			
Pseudorandom Hopping Algorithm	FCC 47CFR 15.247(a)(1)	N/A	N/A			
Time of Occupancy (Dwell Time)	FCC 47CFR 15.247(a)(1)(iii)	ANSI C63.10: 2013	N/A			
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	\boxtimes		
RF Exposure	FCC 47CFR 15.247(i)	N/A	N/A			

Note: N/A – Not Applicable



Date: 2017-07-07 Page 6 of 91 No.: DM123869

2.3 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The device was realized by test software.

The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Peak Conducted Output Power	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Hopping Channel Separation	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Number of Hopping Frequency	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Time of Occupancy(Dwell Time)	8DPSK (DH1 / DH3 / DH5)	3MBps
Radiated Spurious Emissions	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Band-edge compliance of Conducted Emission	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps



Date: 2017-07-07 Page 7 of 91 No.: DM123869

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Conducted Output Power

Test Requirement: FCC 47CFR 15.247(b)(1)
Test Method: ANSI C63.10: 2013

Test Date: 2016-06-20 Mode of Operation: Tx mode


Test Method:

A temporary antenna connector was soldered to the RF output. The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in Watt.

Spectrum Analyzer Setting:

RBW = 3 MHz, VBW= 3MHz, Sweep = Auto, Span: Approximately five times the 20 dB bandwidth Detector = Peak, Trace = Max. hold

Test Setup:

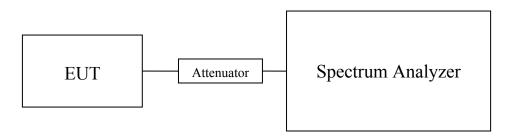

Note: a temporary antenna connector was soldered to the RF output.



Date: 2017-07-07 Page 8 of 91

No.: DM123869

Limits for Maximum Peak Conducted Output Power [FCC 47CFR 15.247]:

The maximum peak output power shall not exceeded the following limits:

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt

Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	•	Maxi	imum conducted out	tput power (Watt)
2402			0.000513	5

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000499

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000436

The maximum peak output power shall not exceeded the following limits:

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts

Results of Bluetooth Communication mode ($\pi/4$ -DQPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000514

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000497

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000435

Results of Bluetooth Communication mode (8 DPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000514

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000498

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000436

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB

1GHz to 18GHz 1.7dB

Remark:


- 1. All test data for each data rate were verified, but only the worst case was reported.
- 2. The EUT is programmed to transmit signals continuously for all testing.



Date: 2017-07-07 Page 9 of 91


No.: DM123869

Test plot of Maximum Peak Conducted Output Power: Bluetooth Communication mode (GFSK, 2402MHz)



Date: 20.JUN.2016 15:25:28

Bluetooth Communication mode (GFSK, 2441MHz)

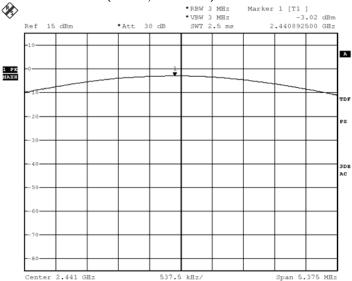

BMP


Date: 20.JUN.2016 15:25:02



Date: 2017-07-07 Page 10 of 91


No.: DM123869

Bluetooth Communication mode (GFSK, 2480MHz)

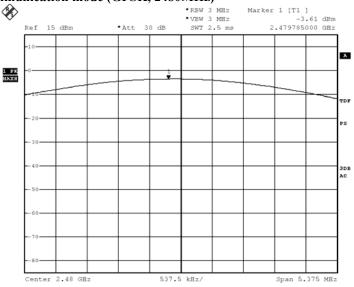

BMP Date: 20.JUN.2016 15:25:53

Bluetooth Communication mode (π/4 DQPSK, 2402MHz)

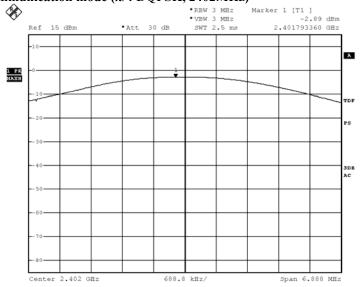


BMP Date: 20.JUN.2016 15:27:57



Date: 2017-07-07 Page 11 of 91

No.: DM123869


Bluetooth Communication mode (π/4 DQPSK, 2441MHz)

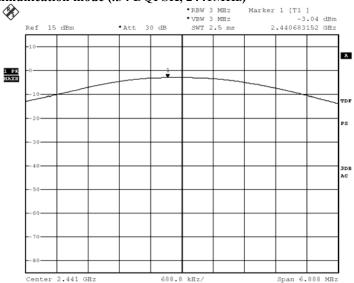

BMP

Date: 20.JUN.2016 15:27:20

Bluetooth Communication mode (π/4 DQPSK, 2480MHz)

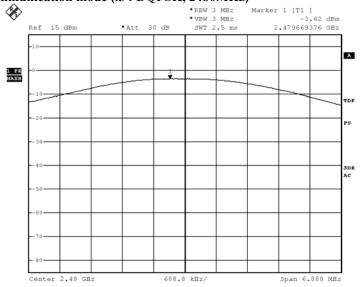


BMP

Date: 20.JUN.2016 15:26:49




Date: 2017-07-07 Page 12 of 91 No.: DM123869

Bluetooth Communication mode (8DPSK, 2402MHz)

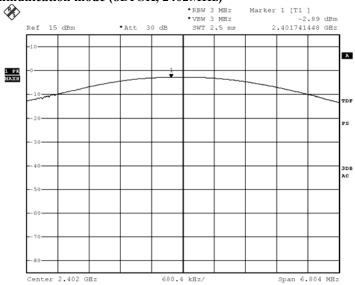

BMP Date: 20.JUN.2016 15:29:02

Bluetooth Communication mode (8DPSK, 2441MHz)

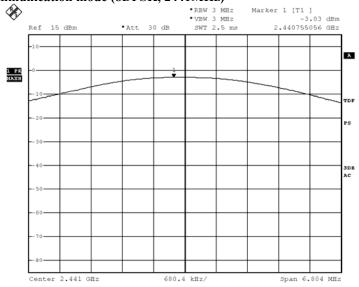


BMP Date: 20.JUN.2016 15:29:39



Date: 2017-07-07 Page 13 of 91 No.: DM123869

Bluetooth Communication mode (8DPSK, 2480MHz)

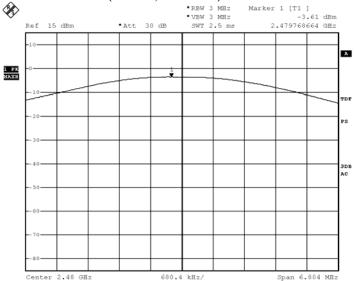

BMP

Date: 20.JUN.2016 15:30:13



Date: 2017-07-07 Page 14 of 91 No.: DM123869

3.1.2 Radiated Spurious Emissions

Test Requirement: FCC 47CFR 15.209
Test Method: ANSI C63.10: 2013
Test Date: 2016-06-06 to 2016-06-22

Mode of Operation: Tx mode / Bluetooth Communication mode

Test Method:

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-Anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.



Date: 2017-07-07 Page 15 of 91 No.: DM123869

Spectrum Analyzer Setting:

9KHz – 30MHz (Pk & Av) RBW: 10kHz

VBW: 30kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

30MHz – 1GHz (QP) RBW: 120kHz

VBW: 120kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

Above 1GHz (Pk) RBW: 1MHz

VBW: 1MHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold


Above 1GHz (Av) RBW: 1MHz

VBW: 10Hz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

Test Setup:

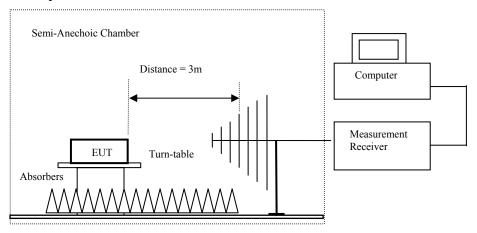

Ground Plane

- Absorbers placed on top of the ground plane are for measurements above $1000 \mathrm{MHz}$ only.
- Measurements between 30 MHz to 1000 MHz made with Bi-log antennas, above 1000 MHz horn antennas are used, 9 kHz to 30 MHz loop antennas are used.



Date: 2017-07-07 Page 16 of 91 No.: DM123869

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

mints for Radiated Emissions [1 CC 47 CT R 13.207 Class b].						
Frequency Range	Quasi-Peak Limits					
[MHz]	$[\mu V/m]$					
0.009-0.490	2400/F (kHz)					
0.490-1.705	24000/F (kHz)					
1.705-30	30					
30-88	100					
88-216	150					
216-960	200					
Above960	500					

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx mode (2402.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

Result of 1x mo	Result of 1x mode (2402.0 MHz) (GFSK mode) (9KHz – 30MHz): Pass								
Field Strength of Spurious Emissions									
	Peak Value								
Frequency	Frequency Measured Correction Field Field Limit E-Field								
	Level	Factor	Strength	Strength		Polarity			
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m								
	Emissions	detected are r	nore than 20	dB below the	FCC Limits				

Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

Result of 1 x into	Result of 1x mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass								
	Field Strength of Spurious Emissions								
			Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dΒμV	dB/m	$dB\mu V/m$	dBμV/m	dB				
4804.0	16.4	41.5	57.9	74.0	16.1	Vertical			
4804.0	15.3	42.4	57.7	74.0	16.3	Horizontal			
7206.0	12.5	45.1	57.6	74.0	16.4	Vertical			
7206.0	11.6	46.2	57.8	74.0	16.2	Horizontal			
9608.0	7.7	48.0	55.7	74.0	18.3	Vertical			
9608.0	6.6	48.8	55.4	74.0	18.6	Horizontal			
12010.0	4.0	51.5	55.5	74.0	18.5	Vertical			
12010.0	3.6	52.4	56.0	74.0	18.0	Horizontal			



Date: 2017-07-07 Page 17 of 91 No.: DM123869

Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
		A	verage Valu	e					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4804.0	0.9	41.5	42.4	54.0	11.6	Vertical			
4804.0	0.0	42.4	42.4	54.0	11.6	Horizontal			
7206.0	-3.6	45.1	41.5	54.0	12.5	Vertical			
7206.0	-5.9	46.2	40.3	54.0	13.7	Horizontal			
9608.0	-7.5	48.0	40.5	54.0	13.5	Vertical			
9608.0	-7.5	48.8	41.3	54.0	12.7	Horizontal			
12010.0	-11.3	51.5	40.2	54.0	13.8	Vertical			
12010.0	-10.1	52.4	42.3	54.0	11.7	Horizontal			

Result of Tx mode (2441.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
	Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m							
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
			Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4882.0	16.4	41.6	58.0	74.0	16.0	Vertical			
4882.0	15.7	42.5	58.2	74.0	15.8	Horizontal			
7323.0	12.6	45.2	57.8	74.0	16.2	Vertical			
7323.0	11.6	46.3	57.9	74.0	16.1	Horizontal			
9764.0	7.7	48.1	55.8	74.0	18.2	Vertical			
9764.0	5.5	48.9	54.4	74.0	19.6	Horizontal			
12205.0	3.7	51.6	55.3	74.0	18.7	Vertical			
12205.0	3.4	52.5	55.9	74.0	18.1	Horizontal			



Date: 2017-07-07 Page 18 of 91 No.: DM123869

Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
		A	verage Valu	e					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4882.0	1.1	41.6	42.7	54.0	11.3	Vertical			
4882.0	0.3	42.5	42.8	54.0	11.2	Horizontal			
7323.0	-5.2	45.2	40.0	54.0	14.0	Vertical			
7323.0	-4.0	46.3	42.3	54.0	11.7	Horizontal			
9764.0	-7.7	48.1	40.4	54.0	13.6	Vertical			
9764.0	-8.1	48.9	40.8	54.0	13.2	Horizontal			
12205.0	-11.1	51.6	40.5	54.0	13.5	Vertical			
12205.0	-10.6	52.5	41.9	54.0	12.1	Horizontal			

Result of Tx mode (2480.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions								
	Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m							
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

		Field Streng	th of Spuriou	us Emissions		
			Peak Value			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
4960.0	16.8	41.4	58.2	74.0	15.8	Vertical
4960.0	15.2	42.7	57.9	74.0	16.1	Horizontal
7440.0	12.1	45.6	57.7	74.0	16.3	Vertical
7440.0	11.1	46.5	57.6	74.0	16.4	Horizontal
9920.0	6.8	48.6	55.4	74.0	18.6	Vertical
9920.0	5.3	49.7	55.0	74.0	19.0	Horizontal
12400.0	4.3	51.7	56.0	74.0	18.0	Vertical
12400.0	3.2	52.7	55.9	74.0	18.1	Horizontal



Date: 2017-07-07 Page 19 of 91 No.: DM123869

Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4960.0	1.3	41.4	42.7	54.0	11.3	Vertical			
4960.0	-0.9	42.7	41.8	54.0	12.2	Horizontal			
7440.0	-3.0	45.6	42.6	54.0	11.4	Vertical			
7440.0	-4.3	46.5	42.2	54.0	11.8	Horizontal			
9920.0	-9.1	48.6	39.5	54.0	14.5	Vertical			
9920.0	-9.2	49.7	40.5	54.0	13.5	Horizontal			
12400.0	-10.2	51.7	41.5	54.0	12.5	Vertical			
12400.0	-11.5	52.7	41.2	54.0	12.8	Horizontal			

Result of Tx mode (2402.0 MHz) (π/4-DQPSK mode) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions							
	Peak Value						
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m						
	Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2402.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions							
	Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	$dB\mu V$	dB/m	dBμV/m	$dB\mu V/m$	dB			
4804.0	15.4	41.5	56.9	74.0	17.1	Vertical		
4804.0	14.6	42.4	57.0	74.0	17.0	Horizontal		
7206.0	12.0	45.1	57.1	74.0	16.9	Vertical		
7206.0	11.2	46.2	57.4	74.0	16.6	Horizontal		
9608.0	7.6	48.0	55.6	74.0	18.4	Vertical		
9608.0	5.8	48.8	54.6	74.0	19.4	Horizontal		
12010.0	4.6	51.5	56.1	74.0	17.9	Vertical		
12010.0	3.4	52.4	55.8	74.0	18.2	Horizontal		



Date: 2017-07-07 Page 20 of 91 No.: DM123869

Result of Tx mode (2402.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4804.0	0.5	41.5	42.0	54.0	12.0	Vertical			
4804.0	-0.9	42.4	41.5	54.0	12.5	Horizontal			
7206.0	-2.8	45.1	42.3	54.0	11.7	Vertical			
7206.0	-3.5	46.2	42.7	54.0	11.3	Horizontal			
9608.0	-7.3	48.0	40.7	54.0	13.3	Vertical			
9608.0	-7.8	48.8	41.0	54.0	13.0	Horizontal			
12010.0	-9.7	51.5	41.8	54.0	12.2	Vertical			
12010.0	-10.8	52.4	41.6	54.0	12.4	Horizontal			

Result of Tx mode (2441.0 MHz) (π/4-DQPSK mode) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions							
Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m		
	Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2441.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m	_	Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4882.0	16.2	41.6	57.8	74.0	16.2	Vertical				
4882.0	15.0	42.5	57.5	74.0	16.5	Horizontal				
7323.0	11.6	45.2	56.8	74.0	17.2	Vertical				
7323.0	11.6	46.3	57.9	74.0	16.1	Horizontal				
9764.0	7.8	48.1	55.9	74.0	18.1	Vertical				
9764.0	6.3	48.9	55.2	74.0	18.8	Horizontal				
12205.0	4.7	51.6	56.3	74.0	17.7	Vertical				
12205.0	3.6	52.5	56.1	74.0	17.9	Horizontal				



Date: 2017-07-07 Page 21 of 91 No.: DM123869

Result of Tx mode (2441.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
	Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4882.0	1.1	41.6	42.7	54.0	11.3	Vertical			
4882.0	0.1	42.5	42.6	54.0	11.4	Horizontal			
7323.0	-3.8	45.2	41.4	54.0	12.6	Vertical			
7323.0	-3.5	46.3	42.8	54.0	11.2	Horizontal			
9764.0	-6.6	48.1	41.5	54.0	12.5	Vertical			
9764.0	-8.9	48.9	40.0	54.0	14.0	Horizontal			
12205.0	-9.8	51.6	41.8	54.0	12.2	Vertical			
12205.0	-10.8	52.5	41.7	54.0	12.3	Horizontal			

Result of Tx mode (2480.0 MHz) (π/4-DQPSK mode) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions							
Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m		
	Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2480.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4960.0	15.7	41.4	57.1	74.0	16.9	Vertical				
4960.0	14.7	42.7	57.4	74.0	16.6	Horizontal				
7440.0	11.9	45.6	57.5	74.0	16.5	Vertical				
7440.0	11.2	46.5	57.7	74.0	16.3	Horizontal				
9920.0	6.9	48.6	55.5	74.0	18.5	Vertical				
9920.0	5.6	49.7	55.3	74.0	18.7	Horizontal				
12400.0	4.6	51.7	56.3	74.0	17.7	Vertical				
12400.0	3.3	52.7	56.0	74.0	18.0	Horizontal				



Date: 2017-07-07 Page 22 of 91 No.: DM123869

Result of Tx mode (2480.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4960.0	1.5	41.4	42.9	54.0	11.1	Vertical				
4960.0	-0.4	42.7	42.3	54.0	11.7	Horizontal				
7440.0	-3.7	45.6	41.9	54.0	12.1	Vertical				
7440.0	-4	46.5	42.5	54.0	11.5	Horizontal				
9920.0	-7.8	48.6	40.8	54.0	13.2	Vertical				
9920.0	-8.7	49.7	41.0	54.0	13.0	Horizontal				
12400.0	-10.2	51.7	41.5	54.0	12.5	Vertical				
12400.0	-12.5	52.7	40.2	54.0	13.8	Horizontal				

Result of Tx mode (2402.0 MHz) (8DPSK mode) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2402.0 MHz) (8DPSK mode) (Above 1GHz): Pass

Result of 1 x mod	Result of 1x mode (2402.0 MHz) (8DFSK mode) (Above 1GHz): Pass								
	Field Strength of Spurious Emissions								
	Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB				
4804.0	15.6	41.5	57.1	74.0	16.9	Vertical			
4804.0	14.5	42.4	56.9	74.0	17.1	Horizontal			
7206.0	12.3	45.1	57.4	74.0	16.6	Vertical			
7206.0	11.5	46.2	57.7	74.0	16.3	Horizontal			
9608.0	7.5	48.0	55.5	74.0	18.5	Vertical			
9608.0	6.5	48.8	55.3	74.0	18.7	Horizontal			
12010.0	4.3	51.8	56.1	74.0	17.9	Vertical			
12010.0	3.5	52.4	55.9	74.0	18.1	Horizontal			



Date: 2017-07-07 Page 23 of 91 No.: DM123869

Result of Tx mode (2402.0 MHz) (8DPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4804.0	0.5	41.5	42.0	54.0	12.0	Vertical				
4804.0	-1.0	42.4	41.4	54.0	12.6	Horizontal				
7206.0	-3.2	45.1	41.9	54.0	12.1	Vertical				
7206.0	-3.6	46.2	42.6	54.0	11.4	Horizontal				
9608.0	-7.4	48.0	40.6	54.0	13.4	Vertical				
9608.0	-8.3	48.8	40.5	54.0	13.5	Horizontal				
12010.0	-10.6	51.8	41.2	54.0	12.8	Vertical				
12010.0	-11.0	52.4	41.4	54.0	12.6	Horizontal				

Result of Tx mode (2441.0 MHz) (8DPSK mode) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2441.0 MHz) (8DPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4882.0	15.6	41.6	57.2	74.0	16.8	Vertical			
4882.0	14.4	42.5	56.9	74.0	17.1	Horizontal			
7323.0	12.3	45.2	57.5	74.0	16.5	Vertical			
7323.0	10.7	46.3	57.0	74.0	17.0	Horizontal			
9764.0	6.6	48.1	54.7	74.0	19.3	Vertical			
9764.0	5.6	48.9	54.5	74.0	19.5	Horizontal			
12205.0	4.2	51.5	55.7	74.0	18.3	Vertical			
12205.0	3.8	52.5	56.3	74.0	17.7	Horizontal			



Date: 2017-07-07 Page 24 of 91 No.: DM123869

Result of Tx mode (2441.0 MHz) (8DPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4882.0	0.6	41.6	42.2	54.0	11.8	Vertical			
4882.0	-0.6	42.5	41.9	54.0	12.1	Horizontal			
7323.0	-3.1	45.2	42.1	54.0	11.9	Vertical			
7323.0	-3.9	46.3	42.4	54.0	11.6	Horizontal			
9764.0	-8.5	48.1	39.6	54.0	14.4	Vertical			
9764.0	-8.5	48.9	40.4	54.0	13.6	Horizontal			
12205.0	-10.9	51.6	40.7	54.0	13.3	Vertical			
12205.0	-10.0	52.5	42.5	54.0	11.5	Horizontal			

Result of Tx mode (2480.0 MHz) (8DPSK mode) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2480.0 MHz) (8DPSK mode) (Above 1GHz): Pass

		Field Streng	th of Spuriou	ıs Emissions				
Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			
4960.0	15.7	41.4	57.1	74.0	16.9	Vertical		
4960.0	14.6	42.7	57.3	74.0	16.7	Horizontal		
7440.0	12.0	45.6	57.6	74.0	16.4	Vertical		
7440.0	10.5	46.5	57.0	74.0	17.0	Horizontal		
9920.0	6.3	48.6	54.9	74.0	19.1	Vertical		
9920.0	5.0	49.7	54.7	74.0	19.3	Horizontal		
12400.0	4.8	51.7	56.5	74.0	17.5	Vertical		
12400.0	3.3	52.7	56.0	74.0	18.0	Horizontal		



Date: 2017-07-07 Page 25 of 91 No.: DM123869

Result of Tx mode (2480.0 MHz) (8DPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4960.0	0.5	41.4	41.9	54.0	12.1	Vertical			
4960.0	-2.3	42.7	40.4	54.0	13.6	Horizontal			
7440.0	-2.8	45.6	42.8	54.0	11.2	Vertical			
7440.0	-4.3	46.5	42.2	54.0	11.8	Horizontal			
9920.0	-7.1	48.6	41.5	54.0	12.5	Vertical			
9920.0	-9.3	49.7	40.4	54.0	13.6	Horizontal			
12400.0	-9.4	51.7	42.3	54.0	11.7	Vertical			
12400.0	-11.3	52.7	41.4	54.0	12.6	Horizontal			

Note: Above 13GHz Emissions detected are more than 20 dB below the FCC Limits.

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 9kHz-30MHz 3.3dB

30MHz -1GHz 4.6dB 1GHz -26GHz 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date: 2017-07-07 Page 26 of 91

No.: DM123869

Radiated Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

RF Radiated Emissions (GFSK Lowest)

A Radiated Emissions (GI SIX Lowest)								
Field Strength of Band-edge Compliance								
Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB			
2390.0	15.7	36.8	52.5	74.0	21.5	Vertical		

Field Strength of Band-edge Compliance								
Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	dBμV/m	dB			
2390.0	3.6	36.8	40.4	54.0	13.6	Vertical		

RF Radiated Emissions (GFSK Highest)

Tradiated Emissions (GFSK Highest)								
Field Strength of Band-edge Compliance								
Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB			
2483.5	17.9	36.4	54.3	74.0	19.7	Horizontal		

Field Strength of Band-edge Compliance Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB		
2483.5	4.3	36.4	40.7	54.0	13.3	Horizontal	



Date: 2017-07-07 Page 27 of 91

No.: DM123869

Radiated Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

RF Radiated Emissions (π/4-DQPSK Lowest)

Field Strength of Band-edge Compliance									
Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB				
2390.0	15.4	36.8	52.2	74.0	21.8	Vertical			

Field Strength of Band-edge Compliance							
Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB		
2390.0	3.6	36.8	40.4	54.0	13.6	Vertical	

RF Radiated Emissions (π/4-DQPSK Highest)

Field Strength of Band-edge Compliance								
Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB			
2483.5	20.8	36.4	57.2	74.0	16.8	Horizontal		

Field Strength of Band-edge Compliance							
Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB		
2483.5	5.7	36.4	42.1	54.0	11.9	Horizontal	



Date: 2017-07-07 Page 28 of 91

No.: DM123869

Radiated Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

RF Radiated Emissions (8DPSK Lowest)

T Radiated Emissions (obt 5K Edwest)								
Field Strength of Band-edge Compliance								
Peak Value								
Frequency	Measured	Measured Correction Field Limit Margin E-Field						
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB			
2390.0	16.0	36.8	52.8	74.0	21.2	Vertical		

Field Strength of Band-edge Compliance Average Value								
Frequency	Measured							
1 2	Level @3m	Factor	Strength	@3m	C	Polarity		
MHz	dΒμV	dB/m	dBμV/m	$dB\mu V/m$	dB	-		
2390.0	4.9	36.8	41.7	54.0	12.3	Vertical		

RF Radiated Emissions (8DPSK Highest)

Kr Kadiated Emissions (8DFSK Highest)							
Field Strength of Band-edge Compliance							
Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB		
2483.5	21.0	36.4	57.4	74.0	16.6	Horizontal	

Field Strength of Band-edge Compliance Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB		
2483.5	6.2	36.4	42.6	54.0	11.4	Horizontal	



Date: 2017-07-07 Page 29 of 91 No.: DM123869


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Emilits for Radiated Emissions [Fee 47 erk 13.207 class b]:					
Frequency Range	Quasi-Peak Limits				
[MHz]	$[\mu V/m]$				
0.009-0.490	2400/F (kHz)				
0.490-1.705	24000/F (kHz)				
1.705-30	30				
30-88	100				
88-216	150				
216-960	200				
Above960	500				

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (2402MHz, GFSK) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

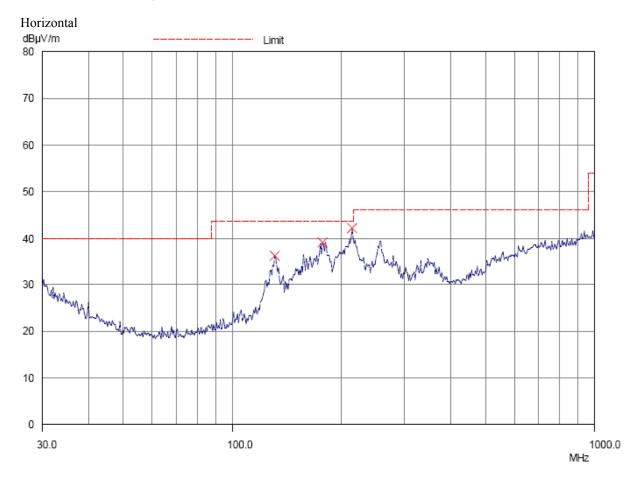



Date: 2017-07-07 Page 30 of 91

No.: DM123869

Result of Bluetooth Communication mode (2402MHz, GFSK) (30MHz - 1GHz): Pass

Radiated Emissions Quasi-Peak							
Frequency	Polarity	@3m	@3m	@3m	@3m		
MHz		dBμV/m	dBμV/m	μV/m	μV/m		
130.7	Horizontal	34.2	43.5	51.3	150		
176.3	Horizontal	37.1	43.5	71.6	150		
212.5	Horizontal	40.2	43.5	102.3	150		



Date: 2017-07-07 Page 31 of 91 No.: DM123869


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Emilits for Radiated Emissions [Fee 47 erk 13.207 class b]:					
Frequency Range	Quasi-Peak Limits				
[MHz]	$[\mu V/m]$				
0.009-0.490	2400/F (kHz)				
0.490-1.705	24000/F (kHz)				
1.705-30	30				
30-88	100				
88-216	150				
216-960	200				
Above960	500				

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (2402MHz, GFSK) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

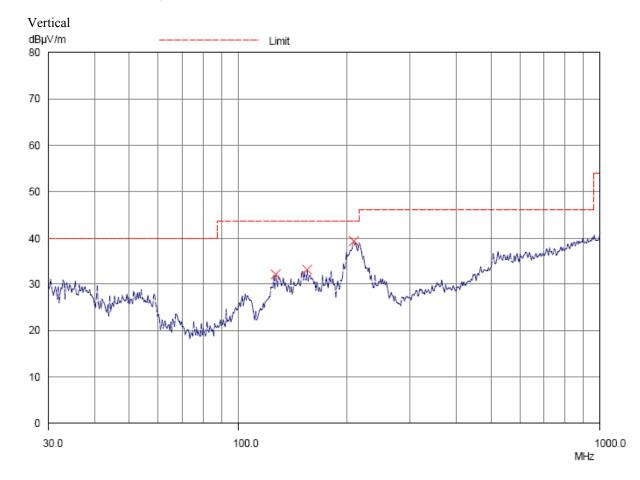



Date: 2017-07-07 Page 32 of 91 No.: DM123869

Result of Bluetooth Communication mode (2402MHz, GFSK) (30MHz - 1GHz): Pass

Radiated Emissions Quasi-Peak						
Emission E-Field Level Limit Level Limit Frequency Polarity @3m @3m @3m @3m MHz dBµV/m dBµV/m µV/m µV/m						
126.8	Vertical	30.1	43.5	32.0	150	
155.0	Vertical	31.2	43.5	36.3	150	
208.4	Vertical	37.8	43.5	77.6	150	

Remarks:

Calculated measurement uncertainty (30MHz - 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date: 2017-07-07 Page 33 of 91 No.: DM123869

3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207 Test Method: ANSI C63.10: 2013

Test Date: 2016-06-14


Mode of Operation: Bluetooth Communication mode

Test Voltage: 120Va.c. 60Hz

Test Method:

The test was performed in accordance with ANSI C63.10: 2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Test Setup:

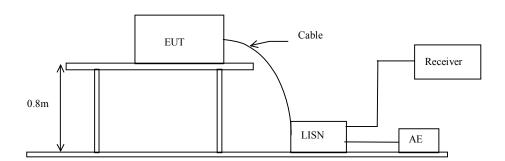



Date: 2017-07-07 Page 34 of 91

No.: DM123869

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Result of Bluetooth Communication mode (L): PASS

Please refer to the following diagram for individual results.

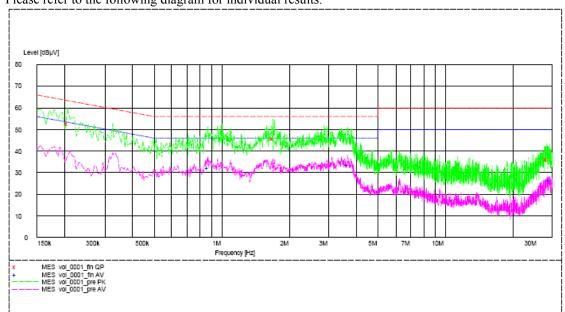

		Quasi-peak		Average	
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Live	0.205	52.5	63.0	_*_	_*_
Live	1.695	45.8	56.0	_*_	_*_
Live	28.540	36.5	60.0	_*_	_*_
Live	0.870	_*_	_*_	32.1	46.0
Live	3.655	_*_	_*_	33.3	46.0
Live	29.060	_*_	_*_	26.4	50.0



Date: 2017-07-07 Page 35 of 91 No.: DM123869

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Result of Bluetooth Communication mode (N): PASS

Please refer to the following diagram for individual results.

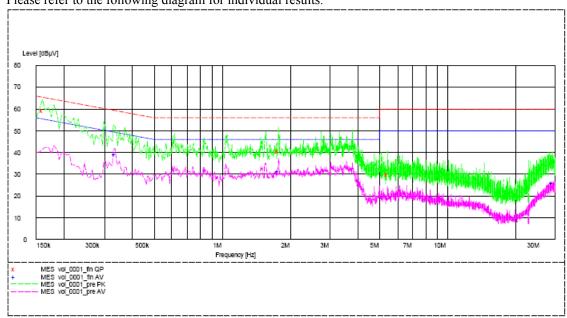

		Quasi-peak		Average	
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Neutral	0.160	59.4	66.0	_*_	_*_
Neutral	1.780	40.5	56.0	_*_	_*_
Neutral	5.400	29.9	60.0	_*_	_*_
Neutral	0.335	_*_	_*_	39.1	49.0
Neutral	1.780	_*_	_*_	31.3	46.0
Neutral	29.325	_*_	_*_	25.9	50.0

Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.2dB

^{-*-} Emission(s) that is far below the corresponding limit line.



Date: 2017-07-07 Page 36 of 91

No.: DM123869

3.1.4 Number of Hopping Frequency

Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels

Test Method:

The RF output of the EUT was connected to the spectrum analyzer by a low loss cable.

Spectrum Analyzer Setting:


RBW = 1MHz, VBW \ge RBW, Sweep = Auto, Span = the frequency band of operation Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Measurement Data:

GFSK: 79 of 79 Channel

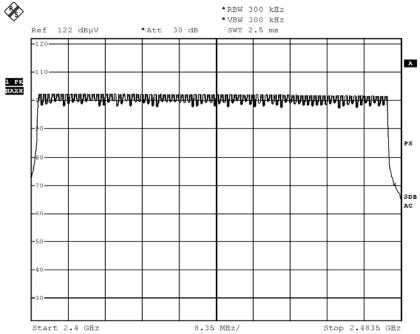


BMP

Date: 20.JUN.2016 13:15:44



Date: 2017-07-07 Page 37 of 91 No.: DM123869


π/4-DQPSK: 79 of 79 Channel

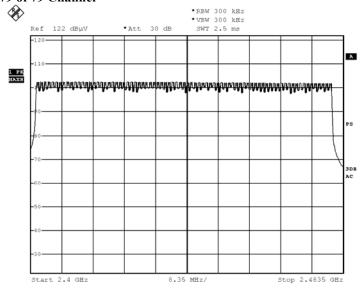

BMP

Date: 20.JUN.2016 15:18:14

8DPSK: 79 of 79 Channel

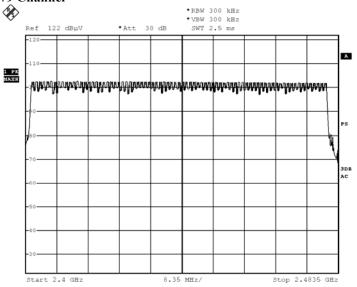

BMP

Date: 20.JUN.2016 15:10:35

STC (Dongguan) Company Limited



Date: 2017-07-07 Page 38 of 91 No.: DM123869

3.1.5 20dB Bandwidth

Test Requirement: FCC 47CFR 15.247(a)(1)
Test Method: ANSI C63.10: 2013

Test Date: 2016-06-20 Mode of Operation: TX mode

Remark:

The result has been done on all the possible configurations for searching the worst cases.

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Spectrum Analyzer Setting:

RBW = 30kHz, VBW \geq RBW, Sweep = Auto, Span = two times and five times the OBW Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.




Date: 2017-07-07 Page 39 of 91

No.: DM123869

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.075	Within 2400-2483.5



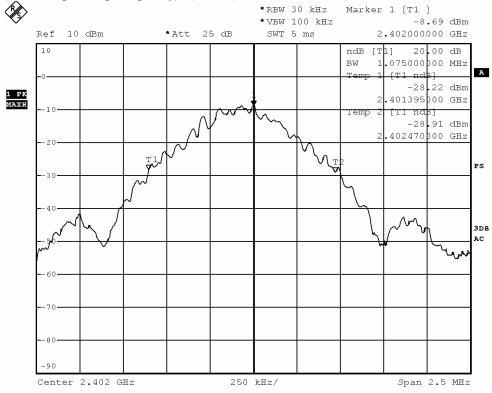

BMP

Date: 20.JUN.2016 12:30:00




Date: 2017-07-07 Page 40 of 91

No.: DM123869

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.075	Within 2400-2483.5

(Middle Operating Frequency) - (GFSK)

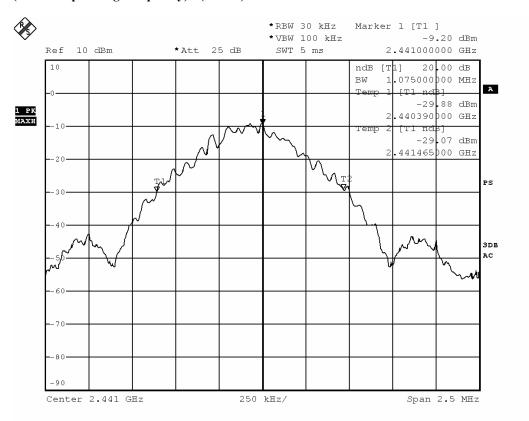

BMP


Date: 20.JUN.2016 12:30:20



Date: 2017-07-07 Page 41 of 91 No.: DM123869

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.075	Within 2400-2483.5

(Highest Operating Frequency) - (GFSK)

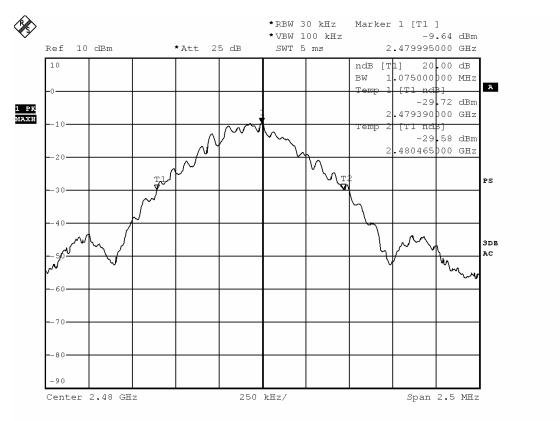

 BMP

Date: 20.JUN.2016 12:30:58




Date: 2017-07-07 Page 42 of 91

No.: DM123869

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.3776	Within 2400-2483.5

(Lowest Operating Frequency) - $(\pi/4$ -DQPSK)

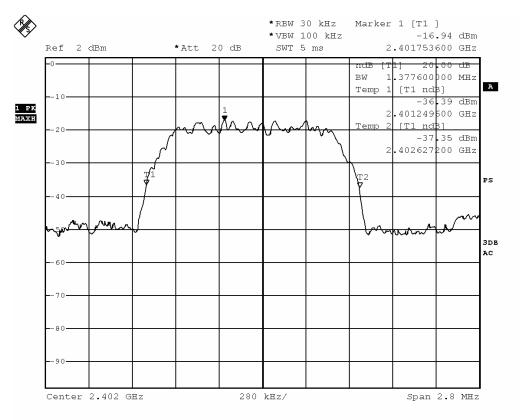

BMP

Date: 20.JUN.2016 12:32:21




Date: 2017-07-07 Page 43 of 91

No.: DM123869

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.3776	Within 2400-2483.5

(Middle Operating Frequency) - $(\pi/4 - DQPSK)$

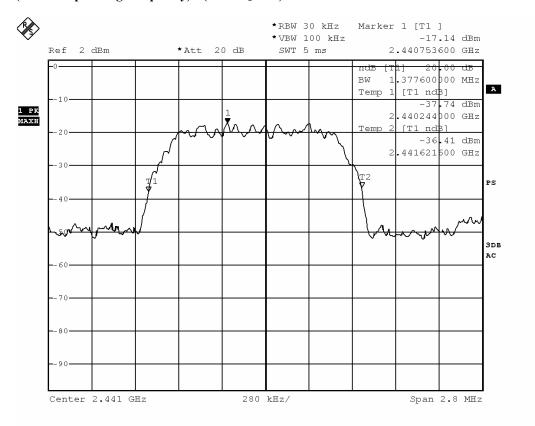

BMP

Date: 20.JUN.2016 12:31:58




Date: 2017-07-07 Page 44 of 91

No.: DM123869

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.3776	Within 2400-2483.5

(Highest Operating Frequency) - $(\pi/4 - DQPSK)$

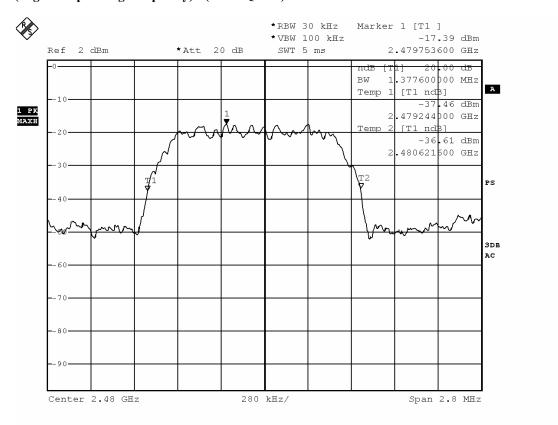

BMP

Date: 20.JUN.2016 12:31:37




Date: 2017-07-07 Page 45 of 91

No.: DM123869

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.3608	Within 2400-2483.5

(Lowest Operating Frequency) - (8DPSK)

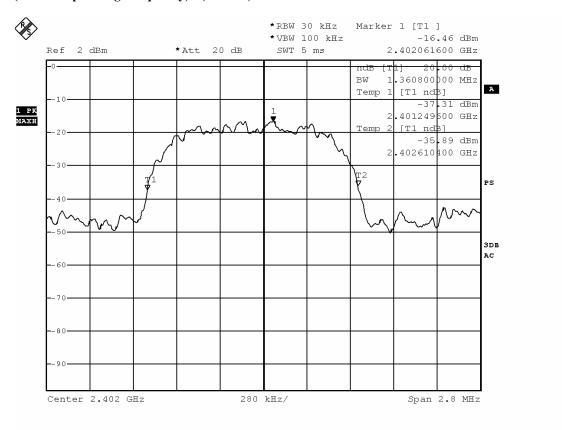

ВМР

Date: 20.JUN.2016 12:33:06




Date: 2017-07-07 Page 46 of 91

No.: DM123869

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.3608	Within 2400-2483.5

(Middle Operating Frequency) - (8DPSK)

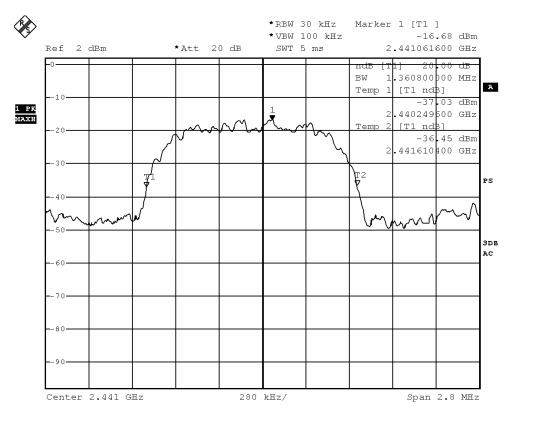

ВМР


Date: 20.JUN.2016 12:33:31



Date: 2017-07-07 Page 47 of 91 No.: DM123869

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.3608	Within 2400-2483.5

(Highest Operating Frequency) - (8DPSK)

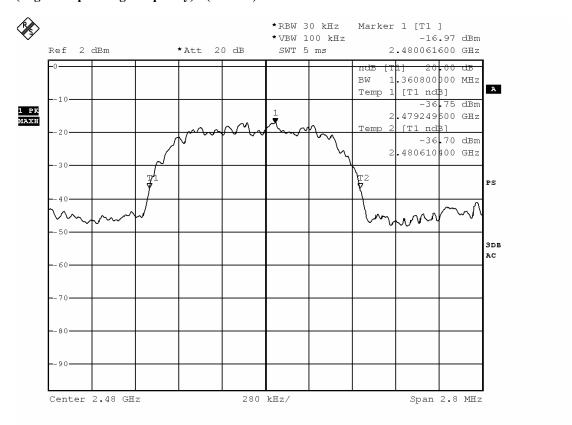

 BMP

Date: 20.JUN.2016 12:34:11



Date: 2017-07-07 Page 48 of 91 No.: DM123869

3.1.6 Hopping Channel Separation

Requirements:

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Analyzer Setting:

RBW = 300kHz, VBW ≥ RBW, Sweep = Auto, Span = Wide enough to captur the peaks of two adjacent channels Detector = Peak, Trace = Max. hold

Limit:

The measured maximum bandwidth* 2/3 = 1.075MHz * 2/3 = 716.7 kHz(GFSK)


The measured maximum bandwidth * 2/3 = 1.3776MHz * 2/3 = 918.4kHz ($\pi/4$ DQPSK, 8DPSK)



Date: 2017-07-07 Page 49 of 91

No.: DM123869

Channel separation = 1MHz (>716.7kHz) (Lowest) (GFSK)

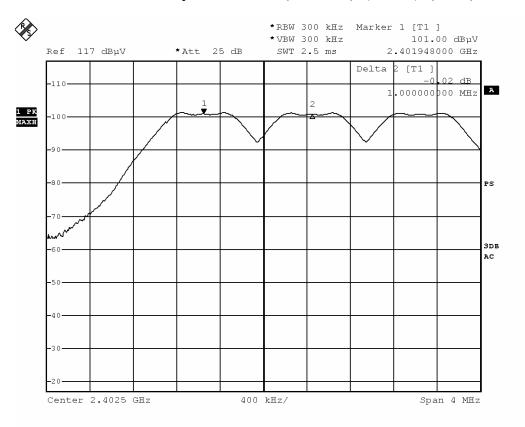

 BMP


Date: 20.JUN.2016 13:06:48



Date: 2017-07-07 Page 50 of 91

No.: DM123869

Channel separation = 1MHz (>716.7kHz) (Mid) (GFSK)

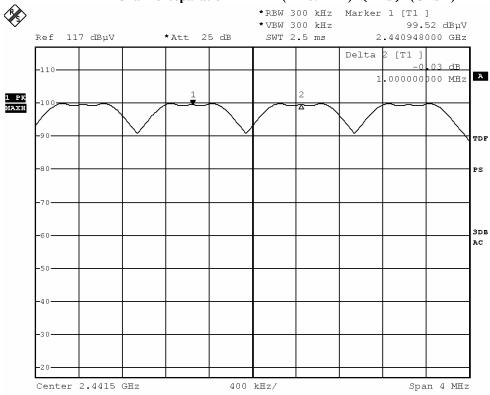


 BMP

Date: 20.JUN.2016 13:05:56



Date: 2017-07-07 Page 51 of 91 No.: DM123869

Channel separation = 1MHz (>716.7kHz) (Highest) (GFSK)

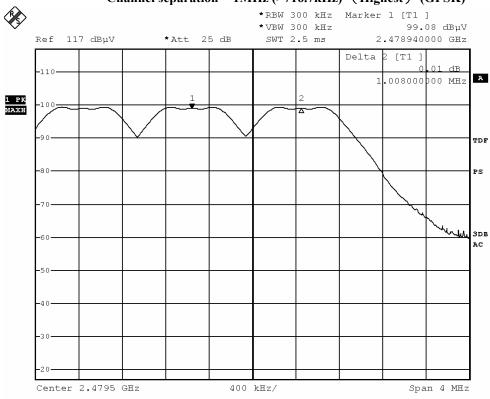


 BMP

Date: 20.JUN.2016 13:05:16



Date: 2017-07-07 Page 52 of 91 No.: DM123869

Channel separation = 1MHz (>918.4kHz) (Lowest) $(\pi/4 \text{ DQPSK})$

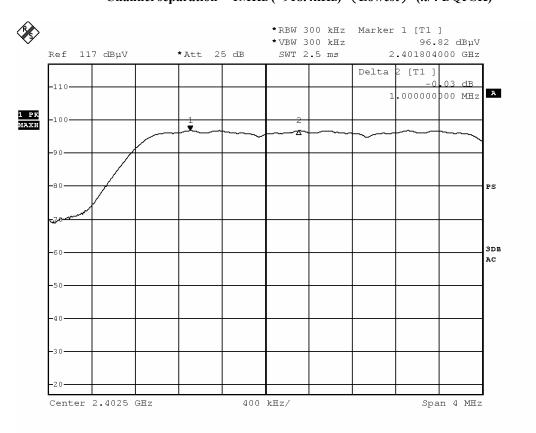


 BMP

Date: 20.JUN.2016 13:01:56



Date: 2017-07-07 Page 53 of 91 No.: DM123869

Channel separation = 1MHz (>918.4kHz) (Mid) ($\pi/4$ DQPSK)

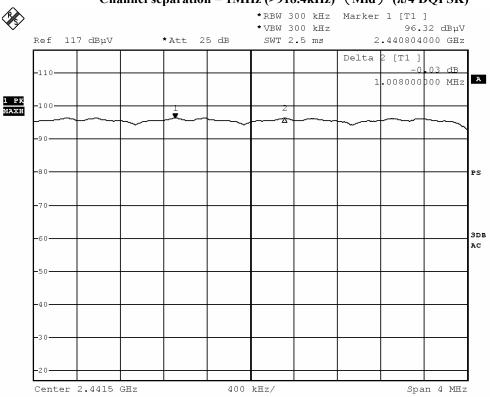


 BMP

Date: 20.JUN.2016 13:02:45



Date: 2017-07-07 Page 54 of 91 No.: DM123869

Channel separation = 1MHz (>918.4kHz) (Highest) ($\pi/4$ DQPSK)

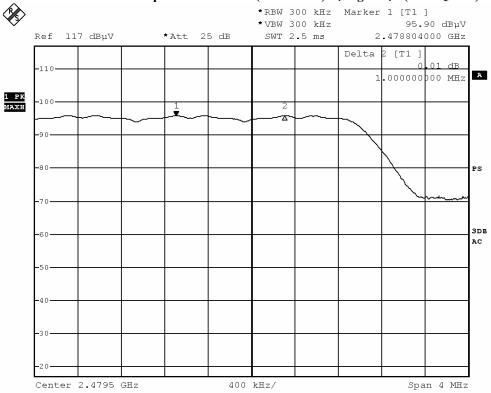


 BMP

Date: 20.JUN.2016 13:03:32



Date: 2017-07-07 Page 55 of 91 No.: DM123869

Channel separation = 1MHz (>918.4kHz) (Lowest) (8DPSK)

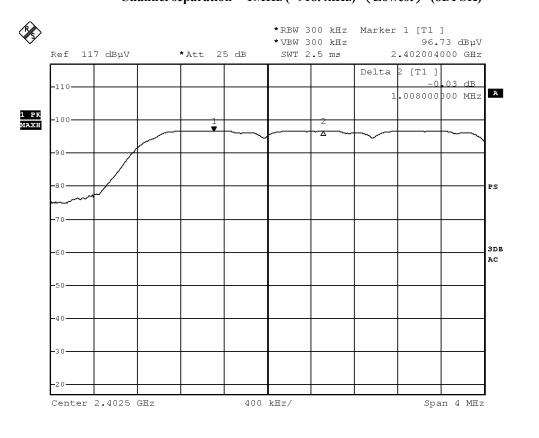


 BMP

Date: 20.JUN.2016 13:00:48



Date: 2017-07-07 Page 56 of 91 No.: DM123869

Channel separation = 1MHz (>918.4kHz) (Mid) (8DPSK)

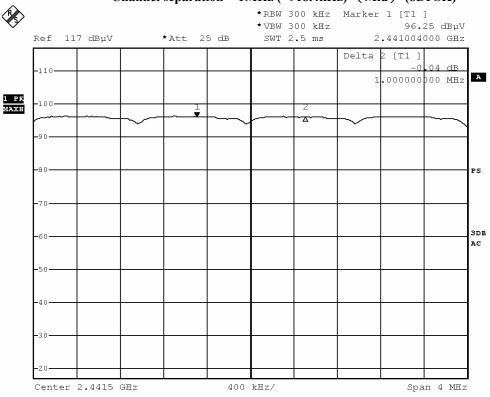


 BMP

Date: 20.JUN.2016 12:59:51



Date: 2017-07-07 Page 57 of 91 No.: DM123869

Channel separation = 1MHz (>918.4kHz) (Highest) (8DPSK)

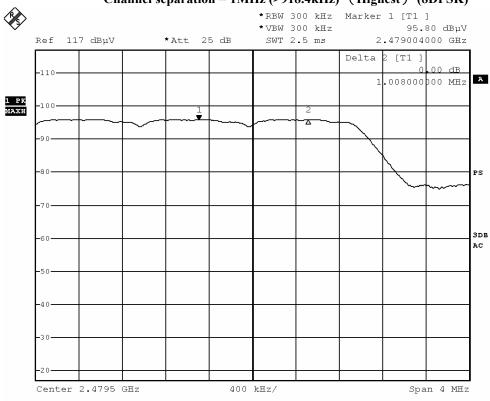

 BMP

Date: 20.JUN.2016 12:58:55



Date: 2017-07-07 Page 58 of 91 No.: DM123869

3.1.7 Band-edge Compliance of RF Conducted Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. According to the test method DA 00-705.

Spectrum Analyzer Setting:

RBW = 100kHz, VBW= 300kHz, Sweep = Coupled,

Span = Wide enough to captur the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation. Detector = Peak, Trace = Max. hold

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report




Date: 2017-07-07 Page 59 of 91

No.: DM123869

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	36.93



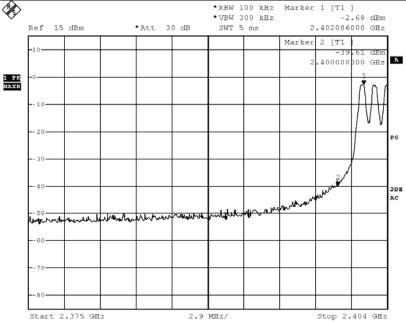




Date: 2017-07-07 Page 60 of 91 No.: DM123869

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2400 – Lowest Fundamental (2402)	27.99

Band-edge Compliance of RF Emissions – Lowest (GFSK) (Hopping off)

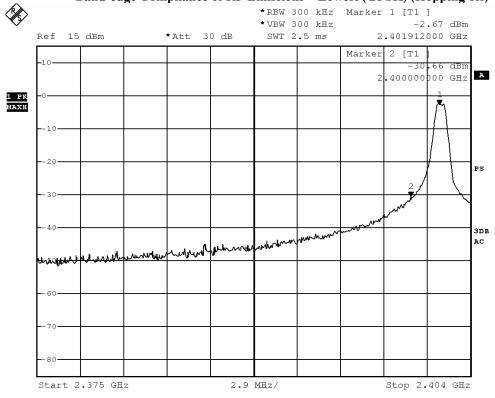




Date: 2017-07-07 Page 61 of 91 No.: DM123869

Band-edge Compliance of RF Conducted Emissions Measurement:

	Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
Г	2483.5 - Highest Fundamental (2480)	42.28

Band-edge Compliance of RF Emissions – Highest (GFSK) (Hopping on)

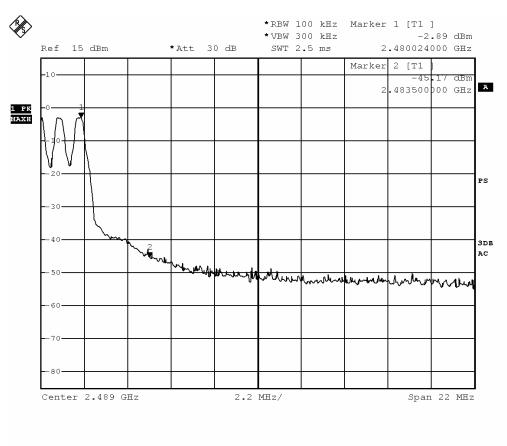




Date: 2017-07-07 Page 62 of 91 No.: DM123869

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2483.5 - Highest Fundamental (2480)	34.85

Band-edge Compliance of RF Emissions - Highest (GFSK) (Hopping off)

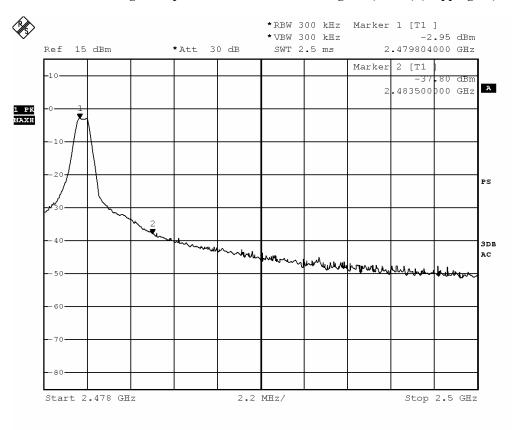




Date: 2017-07-07 Page 63 of 91 No.: DM123869

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	27.49

Band-edge Compliance of RF Emissions – Lowest (π/4 DQPSK) (Hopping on)

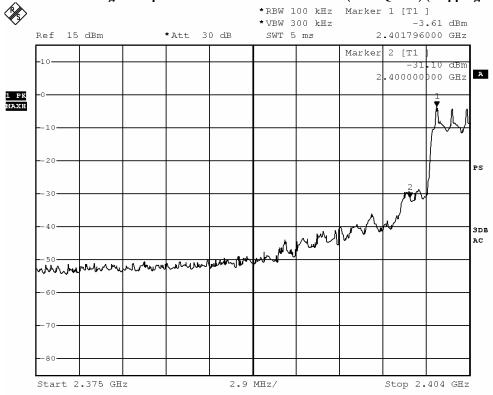




Date: 2017-07-07 Page 64 of 91 No.: DM123869

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2400 – Lowest Fundamental (2402)	2276

Band-edge Compliance of RF Emissions – Lowest ($\pi/4$ DQPSK) (Hopping off)

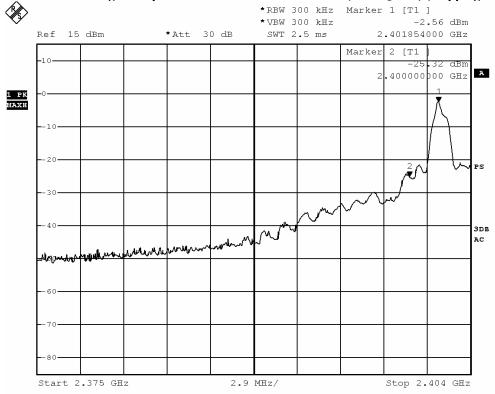




Date: 2017-07-07 Page 65 of 91

No.: DM123869

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2483.5 - Highest Fundamental (2480)	32.97

Band-edge Compliance of RF Emissions – Highest (π/4 DQPSK) (Hopping on)

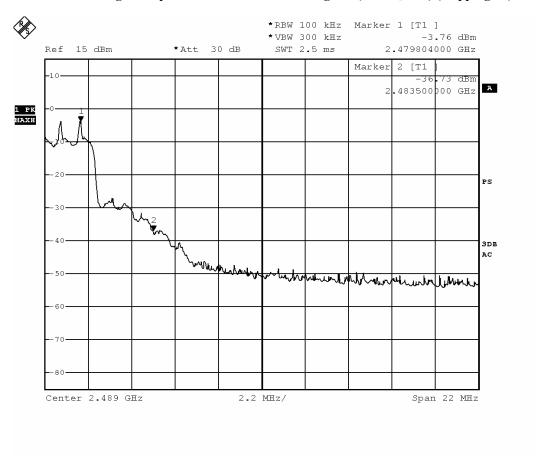




Date: 2017-07-07 Page 66 of 91 No.: DM123869

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2483.5 - Highest Fundamental (2480)	25.36

Band-edge Compliance of RF Emissions – Highest (π/4 DQPSK) (Hopping off)

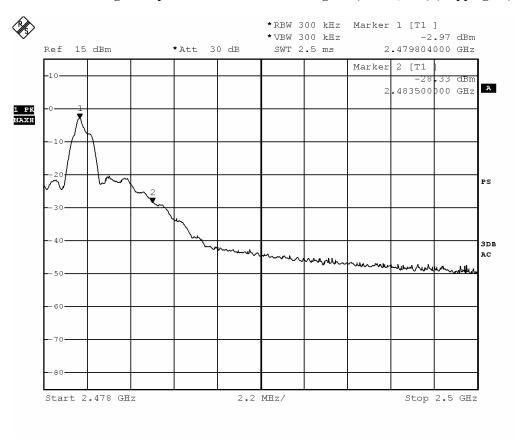




Date: 2017-07-07 Page 67 of 91 No.: DM123869

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	26.71

Band-edge Compliance of RF Emissions - Lowest (8DPSK) (Hopping on)

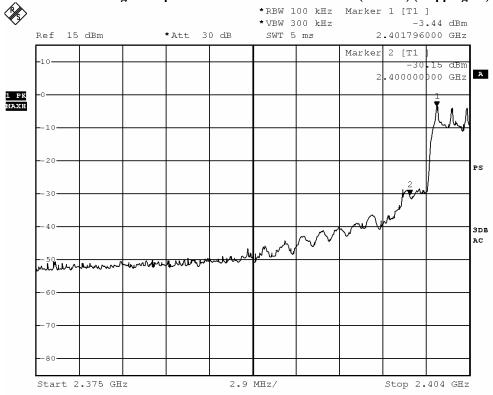




Date: 2017-07-07 Page 68 of 91 No.: DM123869

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2400 – Lowest Fundamental (2402)	24.27

Band-edge Compliance of RF Emissions - Lowest (8DPSK) (Hopping off)

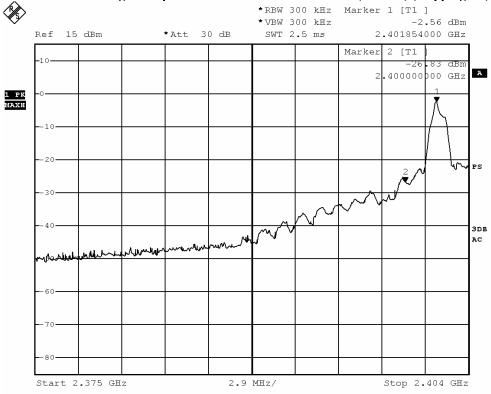




Date: 2017-07-07 Page 69 of 91 No.: DM123869

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range [MHz]	Radiated Emission Attenuated below the Fundamental [dB]
2483.5 - Highest Fundamental (2480)	32.31

Band-edge Compliance of RF Emissions - Highest (8DPSK) (Hopping on)

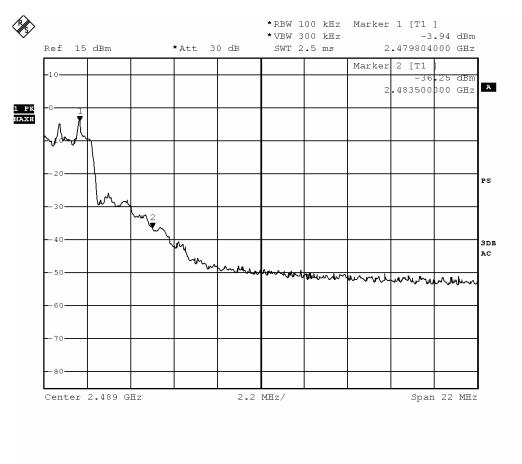




Date: 2017-07-07 Page 70 of 91

No.: DM123869

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2483.5 - Highest Fundamental (2480)	25.47

Band-edge Compliance of RF Emissions - Highest (8DPSK) (Hopping off)

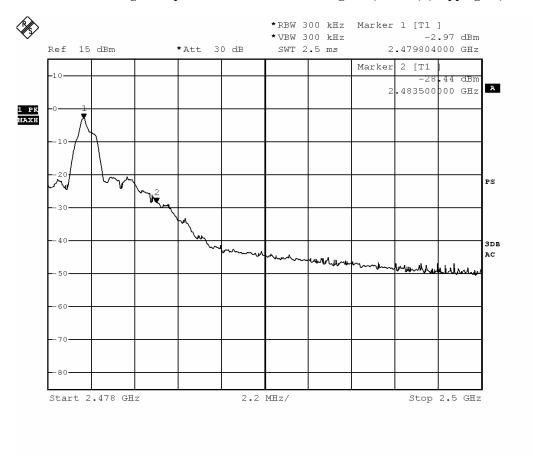



Date: 2017-07-07 Page 71 of 91 No.: DM123869

Out of Band emissions of RF Conducted Emissions Measurement:

Limit:

Date:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

Out of Band emissions of RF Emissions (GFSK 2402) (the worst case) Marker 1 [T1] RBW 100 kHz RF Att 20 dB Ref Lvl 99.76 dbyv VBW 300 kHz 117 dbyv 2.38188377 GHz SWT 6.4 s Unit dbyv [T1] 76 dBy 2.30100377 110 **v**₂ 53.15 dBy [T1] 4.78380762 GHz 100 **⊽**3 [T1] 52.89 dByV 7.18573146 GHz 90 TN1 1MAX 8 70 50 30 Start 30 MHz 2.497 GHz/ Stop 25 GHz 21.JUN.2016 02:17:05



Date: 2017-07-07 Page 72 of 91 No.: DM123869

Out of Band emissions of RF Emissions ($\pi/4$ -DQPSK 2402) (the worst case) Marker 1 [T1] RBW 100 kHz RF Att 20 dB Ref Lvl 94.11 dbyv VBW 300 kHz 117 dbyv 2.38188377 GHz SWT 6.4 s dbyv Unit 117 **v**₁ [T1] 94.11 dByV 110 38188377 GH **⊽**2 | [T1] 53.38 dByv 4.78380762 GHz 100 ∇₃ [T1] 49.04 dBYV 7.18573146 GHz 90 IN1 1MAX 1MA 80 70 60 30 Start 30 MHz 2.497 GHz/ Stop 25 GHz

21.JUN.2016 02:15:50

Date:



Date: 2017-07-07 Page 73 of 91 No.: DM123869

Out of Band emissions of RF Emissions (8DPSK 2402) (the worst case) Marker 1 [T1] RBW 100 kHz RF Att Ref Lvl 94.30 dBWV VBW 300 kHz 117 dbyv 2.38188377 GHz SWT 6.4 s Unit dByv 117 ▼1 [T1] 94.30 dByv 110 38188377 GH ∇_2 [T1] 54.37 dBy 4.78380762 GHz 100 ∇3 [T1] 48.16 dByV 7.18573146 GHz 90 IN1 1MAX 1MA 80 70 60 30 2.497 GHz/ Start 30 MHz Stop 25 GHz



Date: 2017-07-07 Page 74 of 91

No.: DM123869

3.1.8 Time of Occupancy (Dwell Time)

Requirements:

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed.

No requirements for Digital Transmission System.

Spectrum Analyzer Setting:

 $RBW = 300kHz, VBW \ge RBW,$

Sweep = A longer sweep time to show two successive hops on a channel,


Span = Zero, Detector = Peak, Trace = Max. hold

Dwell Time = Pulse Duration * hop rate / number of channel * observation duration

Observed duration: $0.4s \times 79 = 31.6s$

Measurement Data:

Channel Occupied in 8DPSK: 79 of 79 Channel

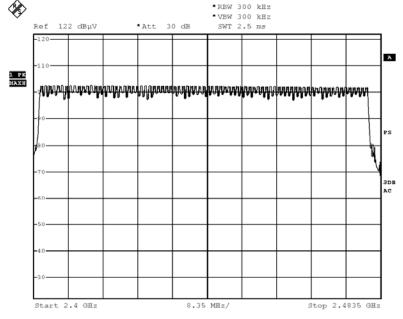

BMP

Date: 20.JUN.2016 15:10:35




Date: 2017-07-07 Page 75 of 91

No.: DM123869

DH5 Packet:

DH5 Packet permit maximum 1600/79/6 = 3.37 hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds

Fig. A
[Pulse duration of Lowest Channel]

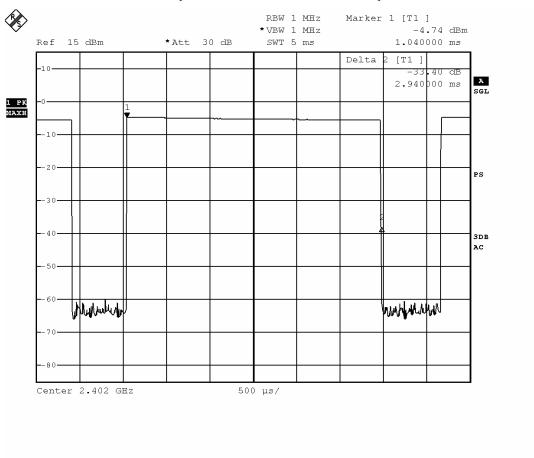


BMP

Date: 20.JUN.2016 12:43:37



Date: 2017-07-07 Page 76 of 91 No.: DM123869

Fig. B
[Pulse duration of Middle Channel]

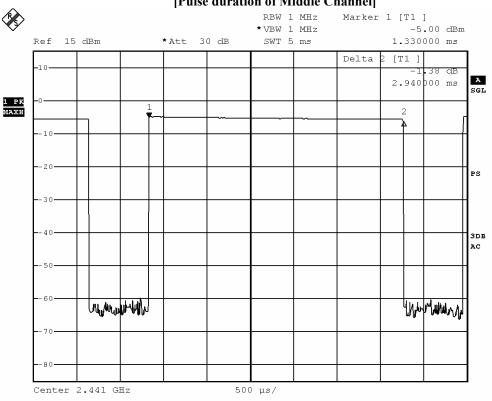


BMP

Date: 20.JUN.2016 12:43:11



Date: 2017-07-07 Page 77 of 91 No.: DM123869

Fig. C
[Pulse duration of Highest Channel]

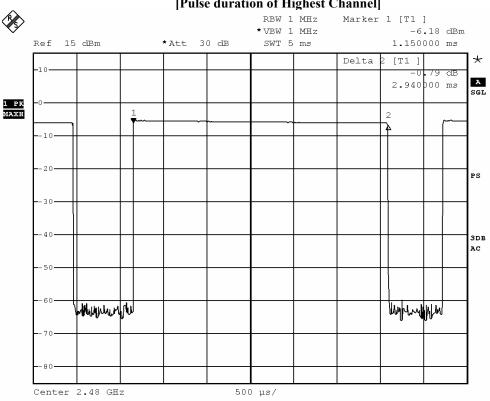

BMP

Date: 20.JUN.2016 12:42:37




Date: 2017-07-07 Page 78 of 91

No.: DM123869

DH3 Packet:

DH3 Packet permit maximum 1600/79/4 = 5.06 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds

Fig. D
[Pulse duration of Lowest Channel]

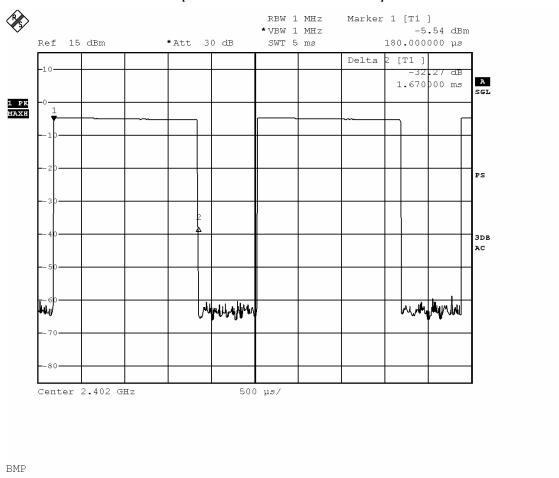


Date: 20.JUN.2016 12:44:02



Date: 2017-07-07 Page 79 of 91 No.: DM123869

Fig. E [Pulse duration of Middle Channel]

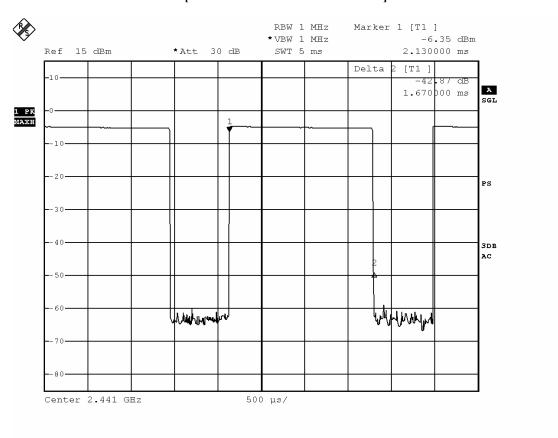


BMP

Date: 20.JUN.2016 12:44:42



Date: 2017-07-07 Page 80 of 91 No.: DM123869

Fig. F [Pulse duration of Highest Channel]

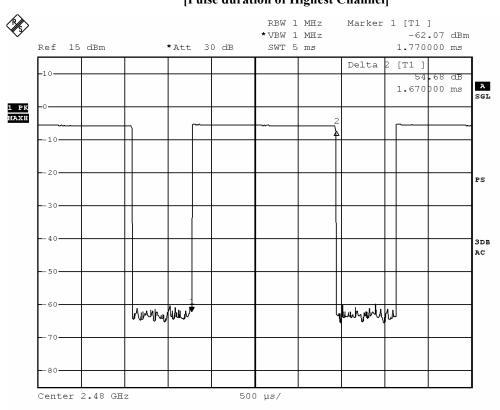

BMP

Date: 20.JUN.2016 12:45:18




Date: 2017-07-07 Page 81 of 91

No.: DM123869

DH1 Packet:

DH1 Packet permit maximum 1600/79/2 = 10.12 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds

Fig. G
[Pulse duration of Lowest Channel]

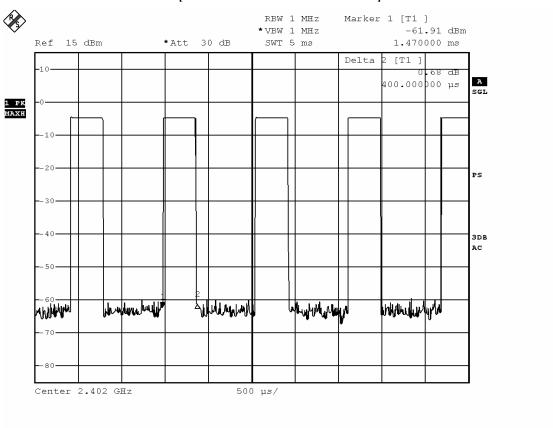


ВМР

Date: 20.JUN.2016 12:46:53



Date: 2017-07-07 Page 82 of 91 No.: DM123869

Fig. H

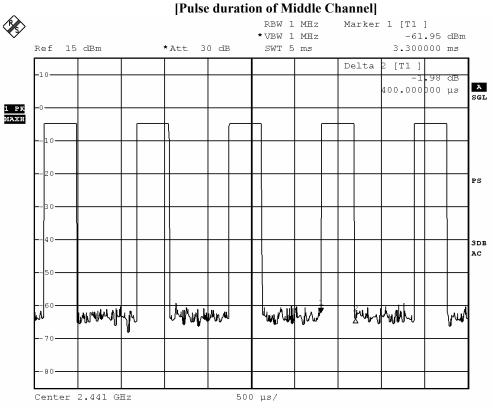


BMP

Date: 20.JUN.2016 12:46:15



Date: 2017-07-07 Page 83 of 91 No.: DM123869

Fig. I [Pulse duration of Highest Channel]

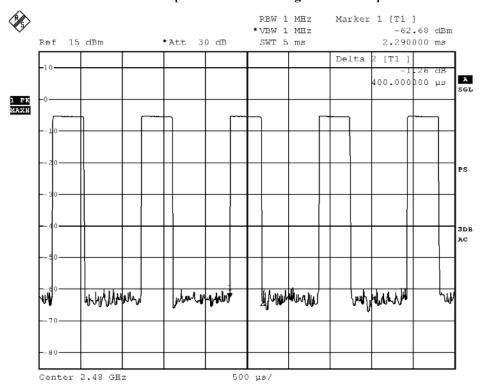

BMP

Date: 20.JUN.2016 12:45:46

Time of occupancy (Dwell Time)

Time of occupancy (Dwen Time).							
Data Packet	Frequency	Pulse	Dwell Time	Limits	Test Results		
	(MHz)	Duration (ms)	(s)	(s)			
DH5	2402	2.940	0.313	0.400	Complies		
DH5	2441	2.940	0.313	0.400	Complies		
DH5	2480	2.940	0.313	0.400	Complies		
DH3	2402	1.670	0.267	0.400	Complies		
DH3	2441	1.670	0.267	0.400	Complies		
DH3	2480	1.670	0.267	0.400	Complies		
DH1	2402	0.400	0.128	0.400	Complies		
DH1	2441	0.400	0.128	0.400	Complies		
DH1	2480	0.400	0.128	0.400	Complies		

STC (Dongguan) Company Limited



Date: 2017-07-07 Page 84 of 91 No.: DM123869

3.1.9 Channel Centre Frequency

Requirements:

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 1 to 79) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz Frequency of RF Channel = 2402+k MHz, k = 1,...,79 (Channel separation = 1MHz)



Date: 2017-07-07 Page 85 of 91 No.: DM123869

3.1.10 Pseudorandom Hopping Algorithm

Requirements:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

EUT Pseudorandom Hopping Algorithm

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.



Date: 2017-07-07 Page 86 of 91 No.: DM123869

3.1.11 Antenna Requirement

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

This is Inverted F antenna. There is no external antenna, the antenna gain = -0.68dBi. User is unable to remove or changed the Antenna.



Date: 2017-07-07 Page 87 of 91 No.: DM123869

Appendix A

List of Measurement Equipment

Radiated Emission

	_	Ttuaiutea Eimissi				
EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM299	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	3115	00114120	2016/04/27	2018/04/27
EM300	Pyramidal Standard Gain Horn Antenna	ETS-Lindgren	3160-09	00130130	2016/05/13	2018/05/13
EM301	Pyramidal Standard Gain Horn Antenna	ETS-Lindgren	3160-10	00130988	2016/05/13	2018/05/13
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-LINDGREN	FACT-3		2017/04/20	2018/04/20
EM355	Biconilog Antenna	ETS-Lindgren	3143B	00094856	2016/03/03	2018/03/03
EM353	LOOP ANTENNA	ETS_LINDGREN	6502	00206533	2016/03/16	2018/03/16
EM293	Spectrum Analyzer	Agilent Technologies	N9020A	MY50510152	2016/08/22	2017/08/22

Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM119	LISN	R & S	ESH3-Z5	0831.5518.52	2016/11/29	2017/11/29
EM145	EMI TEST RECEIVER	R & S	ESCS 30	830245/021	2017/06/01	2018/06/01
EM179	IMPULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	357-8810.52/54	2017/01/11	2018/01/11
EM154	SHIELDING ROOM	SIEMENS MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	2017/02/02	2022/02/02

Remarks:-

CM Corrective Maintenance

N/A Not Applicable TBD To Be Determined



Date: 2017-07-07 Page 88 of 91 No.: DM123869

Appendix B

Photographs of EUT

Front View of the product



Inside View of the product



Inner Circuit Top View




Rear View of the product



Inside View of the product



Inner Circuit Bottom View




STC (Dongguan) Company Limited




Date: 2017-07-07 Page 89 of 91 No.: DM123869

Photographs of EUT

L..... C'.....'4 T.... V'....










Inner Circuit Bottom View






Date: 2017-07-07 Page 90 of 91 No.: DM123869

Photographs of EUT

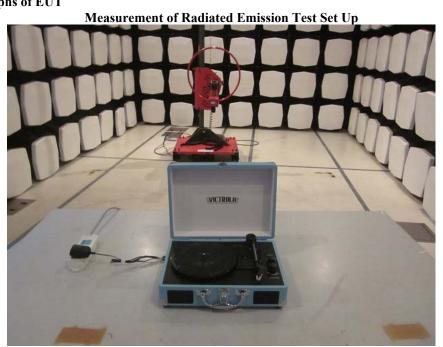

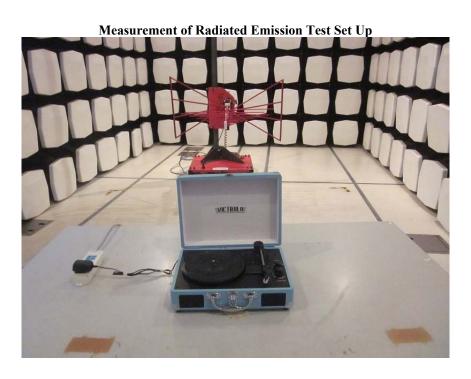


STC (Dongguan) Company Limited



Date: 2017-07-07 Page 91 of 91 No.: DM123869

Photographs of EUT

Measurement of Radiated Emission Test Set Up

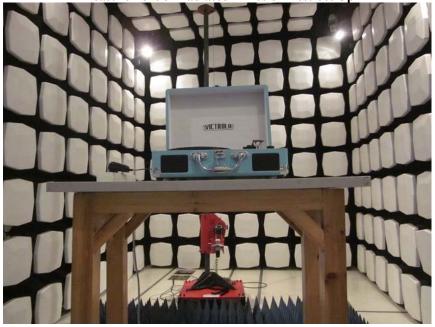

VICTROLO

Measurement of Conducted Emission Test Set Up

***** End of Test Report *****

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China. Zip Code: 523770 Tel: (86 769) 81119888 Fax: (86 769) 81116222 Email: dgstc@stc.group Website: www.stc.group This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited. For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by The STC (Dongguan) Company Limited (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The Company provides its services on the basis that such terms and conditions constitute express agreement between the Company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by the Company as a result of this application for testing service (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to his customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. The Report refers only to the sample tested and does not apply to the bulk, unless the sampling has been carried out by the Company and is stated as such in the Report.
- 5. In the event of the improper use the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Sample submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as to otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of this test report for a period of three years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after the retention period. Under no circumstances shall we be liable for damages of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.
- 10. Issuance records of the Report are available on the internet at dgstc@dgstc.org. Further enquiry of validity or verification of the Reports should be addressed to the Company.