

Date: 2016-03-29 No.: DM122619		Page 1 of 68	
Applicant:	Shenzhen Jiayinking Technology Holding Company Limited No. 11, 11-1 Anye Road, Anliang Village, Henggang Town, Longgang District, Shenzhen City, Guangdong		
Manufacturer:	Limited No. 11, 11-1 Anyo	ing Technology Holding Company e Road, Anliang Village, Henggang District, Shenzhen City, Guangdong	
Description of Sample(s):	Product: Brand Name: Model Number: FCC ID:	Portable Bluetooth Turntable Victrola VSC-550BT 2ADA2-CS-1400I	
Date Sample(s) Received:	2016-03-02		
Date Tested:	2016-03-07 to 201	16-03-28	
Investigation Requested:	accordance with	Magnetic Interference measurement in FCC 47CFR [Codes of Federal 15: 2015 and ANSI C63.10: 2013 for	
Conclusion(s):	of Federal Comm Regulations Part	oduct <u>COMPLIED</u> with the requirements unications Commission [FCC] Rules and 15. The tests were performed in the standards described above and or Test Report.	
Remark(s):		del(s) details, see page 3 LONG Yun Jian, Along Market Authorized Signatory ectroMagnetic Compatibility Department For and on behalf of STC (Dongguan) Company Limited	

STC (Dongguan) Company Limited



	2016-03-29 DM122619	Page 2 of 68
CONT	ENT:	
	Cover Content	Page 1 of 68 Page 2 of 68
<u>1.0</u>	<u>General Details</u>	
1.1	Test Laboratory	Page 3 of 68
1.2	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 68
1.3	Date of Order	Page 3 of 68
1.4	Submitted Sample	Page 3 of 68
1.5	Test Duration	Page 3 of 68
1.6	Country of Origin	Page 3 of 68
1.7	RF Module Details	Page 4 of 68
1.8	Antenna Details	Page 4 of 68
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 5 of 68
2.2	Test Standards and Results Summary	Page 5 of 68
2.3	Table for Test Modes	Page 6 of 68
<u>3.0</u>	Test Results	
3.1	Emission	Page 7 –63 of 68
	Appendix A List of Measurement Equipment	Page 64 of 68
	<u>Appendix B</u> Ancillary Equipment	Page 64 of 68
	Appendix C Photographs	Page 65-68 of 68

#### STC (Dongguan) Company Limited



Date: 2016-03-29 No.: DM122619 Page 3 of 68

#### **<u>1.0</u>** General Details

**Test Laboratory** STC (Dongguan) Company Limited EMC Laboratory
68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China Telephone: (86 769) 81119888 Fax: (86 769) 81116222

#### 1.2 Equipment Under Test [EUT] Description of Sample(s)

Product: Portable Bluetooth Turntable Manufacturer: Shenzhen Jiayinking Technology Holding Company Limited No. 11, 11-1 Anye Road, Anliang Village, Henggang Town, Longgang District, Shenzhen City, Guangdong Brand Name: Victrola Additional Brand Name: Innovative Technology, JYK Model Number: VSC-550BT ITVS-550BT, ST14012-15, ST14012-18, ST14012-19 Additional Model Number: Input: 100-240Va.c. 50/60Hz 0.5A; Rating: Output: 5Vd.c. 1000mA. The AC/DC adaptor was provided by the applicant with following details:

Brand name: N/A; Model no.: GKYPS0100050UL1

#### 1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Portable Bluetooth Turntable. The r.f. signal was modulated by IC and type of modulation was frequency hopping spread spectrum Modulation.

#### 1.3 Date of Order

2016-03-02

#### 1.4 Submitted Sample(s):

1 Sample

#### 1.5 Test Duration

2016-03-07 to 2016-03-28

#### 1.6 Country of Origin

China

#### STC (Dongguan) Company Limited



## Date: 2016-03-29 No.: DM122619

Page 4 of 68

#### 1.7 **RF Module Details**

Module Model Number:	AC4601
Module FCC ID:	
Module Transmission Type:	Bluetooth V2.1+EDR
Modulation:	FHSS (GFSK / π/4-DQPSK)
Data Rates:	1MBps: GFSK
	2 MBps: $\pi/4$ -DQPSK
Frequency Range:	2400-2483.5MHz
Carrier Frequencies:	2402MHz – 2480MHz

Module Specification (specification provided by manufacturer)

#### 1.8 Antenna Details

Antenna	Type:
Antenna	Gain:

Inverted F Antenna -0.68dBi

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 5 of 68

### 2.0 <u>Technical Details</u>

## 2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 Regulations and ANSI C63.10: 2013 for FCC Certification.

#### 2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class /	T	est Resi	ılt
	-		Severity	Pass	Fail	N/A
Maximum Peak Conducted Output Power	FCC 47CFR 15.247(b)(1)	FCC Pubic Notice DA 00-705	N/A	$\square$		
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.10: 2013	N/A			
AC Mains Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10: 2013	N/A	$\square$		
Number of Hopping Frequency	FCC 47CFR 15.247 (b)(1)	FCC Pubic Notice DA 00-705	N/A	$\square$		
20dB Bandwidth	FCC 47CFR 15.247(a)(2)	FCC Pubic Notice DA 00-705	N/A	$\square$		
Hopping Channel Separation	FCC 47CFR 15.247(a)(1)	FCC Pubic Notice DA 00-705	N/A			
Band-edge measurement (Radiated)	FCC 47CFR 15.247(d)	FCC Pubic Notice DA 00-705	N/A			
Pseudorandom Hopping Algorithm	FCC 47CFR 15.247(a)(1)	N/A	N/A	$\square$		
Time of Occupancy (Dwell Time)	FCC 47CFR 15.247(a)(1)(iii)	FCC Pubic Notice DA 00-705	N/A	$\boxtimes$		
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	$\square$		
RF Exposure	FCC 47CFR 15.247(i)	N/A	N/A	$\square$		

Note: N/A - Not Applicable

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 6 of 68

#### 2.3 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The device was realized by test software.

The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Peak Conducted Output Power	GFSK / π/4-DQPSK	1MBps / 2MBps
Hopping Channel Separation	GFSK / π/4-DQPSK	1MBps / 2MBps
Number of Hopping Frequency	GFSK / π/4-DQPSK	2MBps
Time of Occupancy(Dwell Time)	π/4-DQPSK (DH1 / DH3 / DH5)	2MBps
Radiated Spurious Emissions	GFSK / π/4-DQPSK	1MBps / 2MBps
Band-edge compliance of Conducted Emission	GFSK / π/4-DQPSK	2MBps

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 7 of 68

### 3.0 Test Results

3.1 Emission

#### 3.1.1 Maximum Peak Conducted Output Power

Test Requirement:	FCC 47CFR 15.247(b)(1)
Test Method:	FCC Pubic Notice DA 00-705
Test Date:	2016-03-09
Mode of Operation:	Tx mode


#### **Test Method:**

A temporary antenna connector was soldered to the RF output. The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in dBm.

#### **Spectrum Analyzer Setting:**

RBW = 3 MHz, VBW= 3MHz, Sweep = Auto, Span = 10MHz Detector = Peak, Trace = Max. hold

Test Setup:

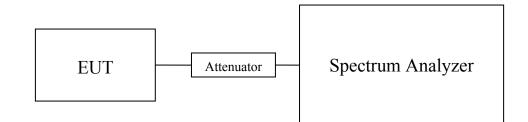

Note: a temporary antenna connector was soldered to the RF output.

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 8 of 68

#### Limits for Maximum Peak Conducted Output Power [FCC 47CFR 15.247]:

The maximum peak output power shall not exceeded the following limits: For frequency hopping systems employing at least 75 hopping channels: 1 Watt For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt

#### Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000600
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000662
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000729

#### Results of Bluetooth Communication mode (π/4-DQPSK) (Fundamental Power): Pass

Maximum conducted output power (Watt)	
0.000643	
Maximum conducted output newson (Wett)	
Maximum conducted output power (Watt)	
0.000735	
Maximum conducted output power (Watt)	
0.000800	

Calculated measurement uncertainty : 3	30MHz to 1GHz	1.7dB
1	1GHz to 18GHz	1.7dB

Remark:

1. All test data for each data rate were verified, but only the worst case was reported.


2. The EUT is programmed to transmit signals continuously for all testing.

STC (Dongguan) Company Limited




Date: 2016-03-29 No.: DM122619 Page 9 of 68

#### Test plot of Maximum Peak Conducted Output Power : Bluetooth Communication mode (GFSK, 2402MHz)

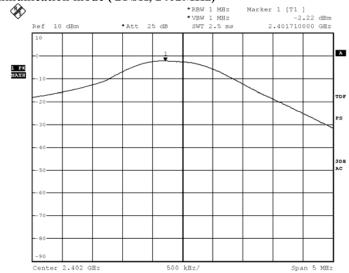

BMP Date: 9.MAR.2016 17:36:09

#### Bluetooth Communication mode (GFSK, 2441MHz)

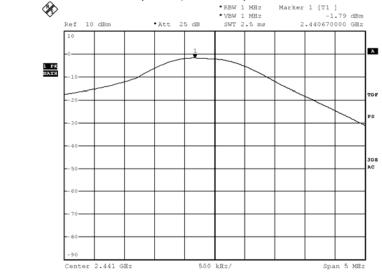

BMP Date: 9.MAR.2016 17:37:56

#### STC (Dongguan) Company Limited


68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 10 of 68


### Bluetooth Communication mode (GFSK, 2480MHz)

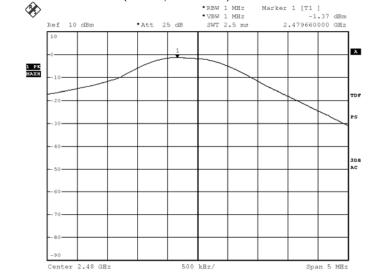

BMP

Date: 9.MAR.2016 17:41:17

#### Bluetooth Communication mode (π/4-DQPSK, 2402MHz)

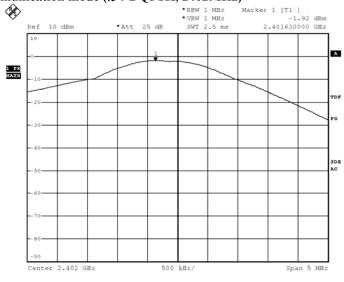

BMP Date: 9.MAR.2016 17:34:59


#### STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




## Date: 2016-03-29 No.: DM122619

Page 11 of 68

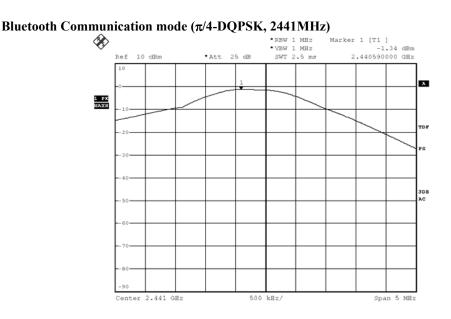

BMP Date: 9.MAR.2016 17:38:57

### Bluetooth Communication mode ( $\pi$ /4-DQPSK, 2480MHz)

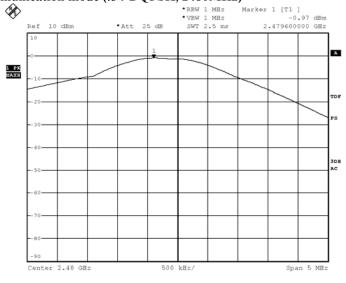

BMP Date: 9.MAR.2016 17:40:38

#### STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 12 of 68

#### 3.1.2 Radiated Spurious Emissions

FCC 47CFR 15.209
ANSI C63.10: 2013
2016-03-21
Tx mode

#### **Test Method:**

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber\*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: Semi-anechoic chamber located on the STC (Dongguan) Company Ltd. 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, PRC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.

STC (Dongguan) Company Limited




## Date: 2016-03-29 No.: DM122619

Page 13 of 68

#### **Spectrum Analyzer Setting:**

9KHz – 30MHz (Pk & Av)	RBW: VBW: Sweep: Span: Trace:	10kHz 30kHz Auto Fully capture the emissions being measured Max. hold
30MHz – 1GHz (QP)	RBW: VBW: Sweep: Span: Trace:	120kHz 120kHz Auto Fully capture the emissions being measured Max. hold
Above 1GHz (Pk & Av)	RBW: VBW: Sweep: Span: Trace:	1MHz 3MHz Auto Fully capture the emissions being measured Max. hold

#### **Test Setup:**

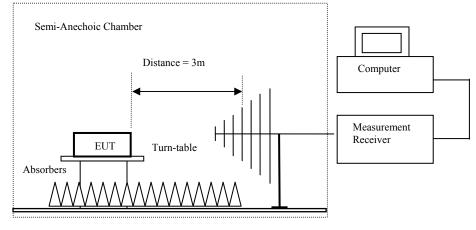

Ground Plane

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.

- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used, 9kHz to 30MHz loop antennas are used.

#### STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 14 of 68

#### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range	Quasi-Peak Limits
[MHz]	[µV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of 1X mo	Xesuit of 1x mode (2402.0 MHz) (GFSK mode) (9KHz – 30MHz): Pass							
Field Strength of Spurious Emissions								
			Peak Value					
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m							
	Emissions	detected are 1	nore than 20	dB below the	FCC Limits			

## Result of Tx mode (2402.0 MHz) (GFSK mode) (9kHz – 30MHz): Pass

#### Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
	Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m				
4804.0	15.6	41.5	57.1	74.0	16.9	Vertical			
4804.0	11.1	42.4	53.5	74.0	20.5	Horizontal			
7206.0	11.5	45.1	56.6	74.0	17.4	Vertical			
7206.0	7.5	46.2	53.7	74.0	20.3	Horizontal			
9608.0	7.5	48.0	55.5	74.0	18.5	Vertical			
9608.0	3.4	48.8	52.2	74.0	21.8	Horizontal			
12010.0	2.3	51.8	54.1	74.0	19.9	Vertical			
12010.0	-1.2	52.4	51.2	74.0	22.8	Horizontal			

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 15 of 68

	Field Strength of Spurious Emissions								
		A	verage Valu	e					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4804.0	0.4	41.5	41.9	54.0	12.1	Vertical			
4804.0	-4.1	42.4	38.3	54.0	15.7	Horizontal			
7206.0	-3.8	45.1	41.3	54.0	12.7	Vertical			
7206.0	-7.6	46.2	38.6	54.0	15.4	Horizontal			
9608.0	-7.7	48.0	40.3	54.0	13.7	Vertical			
9608.0	-11.8	48.8	37.0	54.0	17.0	Horizontal			
12010.0	-13.0	51.8	38.8	54.0	15.2	Vertical			
12010.0	-16.3	52.4	36.1	54.0	17.9	Horizontal			

#### Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

## Result of Tx mode (2441.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions							
			Peak Value				
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m	-	
	Emissions detected are more than 20 dB below the FCC Limits						

## Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4882.0	15.7	41.6	57.3	74.0	16.7	Vertical			
4882.0	11.9	42.5	54.4	74.0	19.6	Horizontal			
7323.0	2.5	53.2	55.7	74.0	18.3	Vertical			
7323.0	6.3	46.3	52.6	74.0	21.4	Horizontal			
9764.0	7.9	48.1	56.0	74.0	18.0	Vertical			
9764.0	4.2	48.9	53.1	74.0	20.9	Horizontal			
12205.0	4.3	51.6	55.9	74.0	18.1	Vertical			
12205.0	0.4	52.5	52.9	74.0	21.1	Horizontal			

#### STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 16 of 68

	Field Strength of Spurious Emissions								
		A	verage Valu	e					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4882.0	0.5	41.6	42.1	54.0	11.9	Vertical			
4882.0	-3.3	42.5	39.2	54.0	14.8	Horizontal			
7323.0	-4.8	45.2	40.4	54.0	13.6	Vertical			
7323.0	-8.8	46.3	37.5	54.0	16.5	Horizontal			
9764.0	-7.2	48.1	40.9	54.0	13.1	Vertical			
9764.0	-11.0	48.9	37.9	54.0	16.1	Horizontal			
12205.0	-10.9	51.6	40.7	54.0	13.3	Vertical			
12205.0	-14.7	52.5	37.8	54.0	16.2	Horizontal			

### Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

## Result of Tx mode (2480.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions							
			Peak Value				
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m						
	Emissions detected are more than 20 dB below the FCC Limits						

#### Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4960.0	15.6	41.4	57.0	74.0	17.0	Vertical			
4960.0	11.2	42.7	53.9	74.0	20.1	Horizontal			
7440.0	8.6	45.6	54.2	74.0	19.8	Vertical			
7440.0	4.6	46.5	51.1	74.0	22.9	Horizontal			
9920.0	6.7	48.6	55.3	74.0	18.7	Vertical			
9920.0	2.4	49.7	52.1	74.0	21.9	Horizontal			
12400.0	3.0	51.7	54.7	74.0	19.3	Vertical			
12400.0	-1	52.7	51.7	74.0	22.3	Horizontal			

#### STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

### Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
		Α	verage Valu	e					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4960.0	0.5	41.4	41.9	54.0	12.1	Vertical			
4960.0	-4.0	42.7	38.7	54.0	15.3	Horizontal			
7440.0	-6.7	45.6	38.9	54.0	15.1	Vertical			
7440.0	-10.5	46.5	36.0	54.0	18.0	Horizontal			
9920.0	-8.4	48.6	40.2	54.0	13.8	Vertical			
9920.0	-12.8	49.7	36.9	54.0	17.1	Horizontal			
12400.0	-12.3	51.7	39.4	54.0	14.6	Vertical			
12400.0	-16.1	52.7	36.6	54.0	17.4	Horizontal			

### Result of Tx mode (2402.0 MHz) (*π*/4-DQPSK mode) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions							
	Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m							
	Emissions detected are more than 20 dB below the FCC Limits							

#### Result of Tx mode (2402.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4804.0	15.7	41.5	57.2	74.0	16.8	Vertical				
4804.0	11.3	42.4	53.7	74.0	20.3	Horizontal				
7206.0	11.6	45.1	56.7	74.0	17.3	Vertical				
7206.0	7.6	46.2	53.8	74.0	20.2	Horizontal				
9608.0	6.5	48.0	54.5	74.0	19.5	Vertical				
9608.0	2.5	48.8	51.3	74.0	22.7	Horizontal				
12010.0	2.4	51.8	54.2	74.0	19.8	Vertical				
12010.0	-1.2	52.4	51.2	74.0	22.8	Horizontal				

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 18 of 68

## Result of Tx mode (2402.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value							
Frequency Measured Correction Field Limit Margin E-Field								
1 5	Level @3m	Factor	Strength	@3m	e	Polarity		
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m	2		
4804.0	0.6	41.5	42.1	54.0	11.9	Vertical		
4804.0	-4.0	42.4	38.4	54.0	15.6	Horizontal		
7206.0	-3.7	45.1	41.4	54.0	12.6	Vertical		
7206.0	-7.5	46.2	38.7	54.0	15.3	Horizontal		
9608.0	-8.6	48.0	39.4	54.0	14.6	Vertical		
9608.0	-12.7	48.8	36.1	54.0	17.9	Horizontal		
12010.0	-13.0	51.8	38.8	54.0	15.2	Vertical		
12010.0	-16.3	52.4	36.1	54.0	17.9	Horizontal		

#### Result of Tx mode (2441.0 MHz) (π/4-DQPSK mode) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured	Correction	Field	Field	Limit	E-Field
	Level	Factor	Strength	Strength		Polarity
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m	
Emissions detected are more than 20 dB below the FCC Limits						

#### Result of Tx mode (2441.0 MHz) (*π*/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions							
Ensauran	Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m			
4882.0	15.8	41.6	57.4	74.0	16.6	Vertical		
4882.0	12.0	42.5	54.5	74.0	19.5	Horizontal		
7323.0	2.8	53.2	56.0	74.0	18.0	Vertical		
7323.0	6.7	46.3	53.0	74.0	21.0	Horizontal		
9764.0	7.7	48.1	55.8	74.0	18.2	Vertical		
9764.0	3.9	48.9	52.8	74.0	21.2	Horizontal		
12205.0	3.7	51.6	55.3	74.0	18.7	Vertical		
12205.0	-0.1	52.5	52.4	74.0	21.6	Horizontal		

#### STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

#### Result of Tx mode (2441.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

Field Strength of Spurious Emissions								
	Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m			
4882.0	0.6	41.6	42.2	54.0	11.8	Vertical		
4882.0	-3.2	42.5	39.3	54.0	14.7	Horizontal		
7323.0	-4.5	45.2	40.7	54.0	13.3	Vertical		
7323.0	-8.4	46.3	37.9	54.0	16.1	Horizontal		
9764.0	-7.4	48.1	40.7	54.0	13.3	Vertical		
9764.0	-11.3	48.9	37.6	54.0	16.4	Horizontal		
12205.0	-11.4	51.6	40.2	54.0	13.8	Vertical		
12205.0	-15.2	52.5	37.3	54.0	16.7	Horizontal		

#### Result of Tx mode (2480.0 MHz) (π/4-DQPSK mode) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured	Correction	Field	Field	Limit	E-Field
	Level	Factor	Strength	Strength		Polarity
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m	-
	Emissions detected are more than 20 dB below the FCC Limits					

#### Result of Tx mode (2480.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

Field Strength of Spurious Emissions Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m	_	Polarity	
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m		
4960.0	15.8	41.4	57.2	74.0	16.8	Vertical	
4960.0	11.5	42.7	54.2	74.0	19.8	Horizontal	
7440.0	9.2	45.6	54.8	74.0	19.2	Vertical	
7440.0	5.2	46.5	51.7	74.0	22.3	Horizontal	
9920.0	7.2	48.6	55.8	74.0	18.2	Vertical	
9920.0	3	49.7	52.7	74.0	21.3	Horizontal	
12400.0	3.4	51.7	55.1	74.0	18.9	Vertical	
12400.0	-0.6	52.7	52.1	74.0	21.9	Horizontal	

#### STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

### Page 20 of 68

	Field Strength of Spurious Emissions							
		A	verage Valu	e				
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m			
4960.0	0.7	41.4	42.1	54.0	11.9	Vertical		
4960.0	-3.7	42.7	39.0	54.0	15.0	Horizonta		
7440.0	-6.1	45.6	39.5	54.0	14.5	Vertical		
7440.0	-9.9	46.5	36.6	54.0	17.4	Horizonta		
9920.0	-7.9	48.6	40.7	54.0	13.3	Vertical		
9920.0	-12.2	49.7	37.5	54.0	16.5	Horizonta		
12400.0	-11.9	51.7	39.8	54.0	14.2	Vertical		
12400.0	-15.7	52.7	37.0	54.0	17.0	Horizonta		

## Result of Tx mode (2480.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

Remarks:

<sup>\*</sup> Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: (9kHz - 30MHz): 3.3dB

(30MHz - 1GHz): 4.6dB

(1GHz - 26GHz): 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

STC (Dongguan) Company Limited



## Date: 2016-03-29 No.: DM122619

Page 21 of 68


#### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range	Quasi-Peak Limits
[MHz]	[µV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Result of TX mode (2402MHz, pi/4DQPSK) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

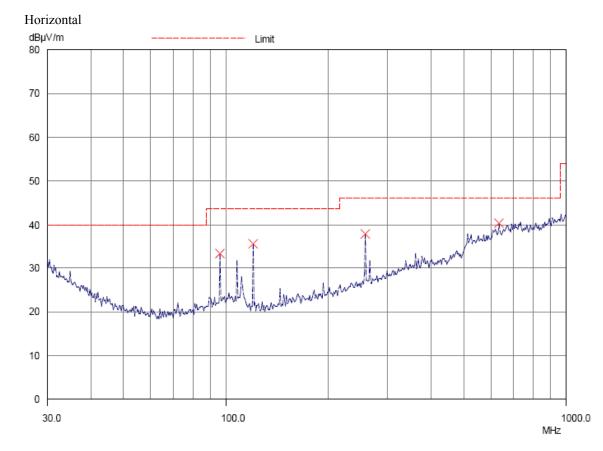

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 22 of 68

### Result of TX mode (2402MHz, pi/4DQPSK) (30MHz - 1GHz): Pass

Radiated Emissions							
	Quasi-Peak						
Emission	E-Field	Level	Limit	Level	Limit		
Frequency	Polarity	@3m	@3m	@3m	@3m		
MHz		dBµV/m	dBµV/m	μV/m	μV/m		
96.0	Horizontal	33.2	43.5	45.7	100		
120.0	Horizontal	35.6	43.5	60.3	150		
256.0	Horizontal	37.8	46.0	77.6	200		
630.2	Horizontal	38.2	46.0	81.3	200		

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 23 of 68


#### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range	Quasi-Peak Limits
[MHz]	[µV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Result of TX mode (2402MHz, pi/4DQPSK) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

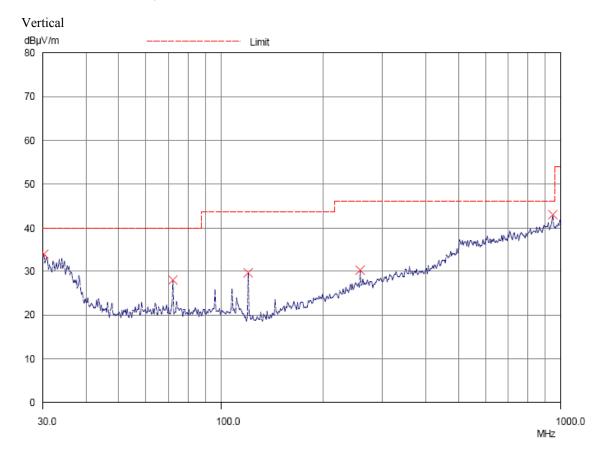

#### STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 24 of 68

#### Result of TX mode (2402MHz, pi/4DQPSK) (30MHz - 1GHz): Pass

Radiated Emissions Quasi-Peak						
Emission	E-Field	Level	Limit	Level	Limit	
Frequency	Polarity	@3m	@3m	@3m	@3m	
MHz		dBµV/m	dBµV/m	μV/m	μV/m	
30.1	Vertical	31.8	40.0	38.9	100	
72.0	Vertical	27.9	40.0	24.8	100	
120.0	Vertical	29.7	43.0	30.5	150	
256.0	Vertical	30.2	46.0	32.4	200	
946.3	Vertical	41.0	46.0	112.2	200	

Remarks:

Calculated measurement uncertainty (30MHz – 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

STC (Dongguan) Company Limited



## Date: 2016-03-29 No.: DM122619

Page 25 of 68


#### 3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)

Test Requirement:	FCC 47CFR 15.207
Test Method:	ANSI C63.10: 2013
Test Date:	2016-03-28
Mode of Operation:	TX mode
Test Voltage:	120Va.c. 60Hz
1	

#### **Test Method:**

The test was performed in accordance with ANSI C63.10: 2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

#### **Test Setup:**

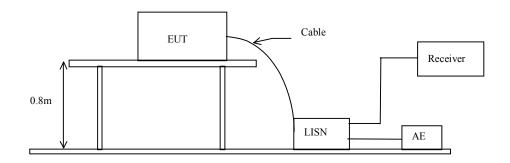

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 26 of 68

#### Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

\* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

#### Result of TX mode (L): PASS

Please refer to the following diagram for individual results.

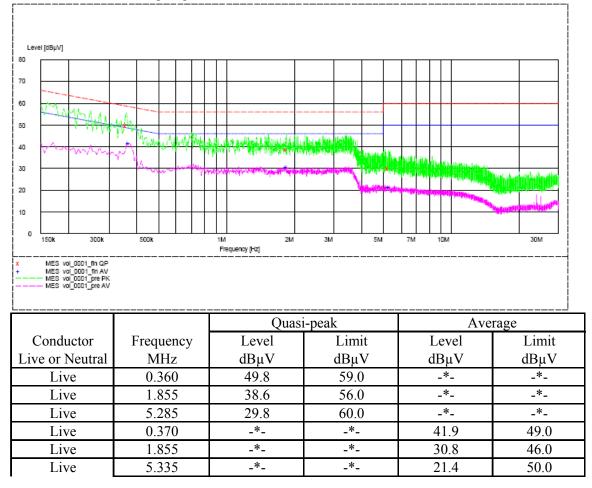

#### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 27 of 68

#### Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

\* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

#### Result of TX mode (N): PASS

Please refer to the following diagram for individual results.

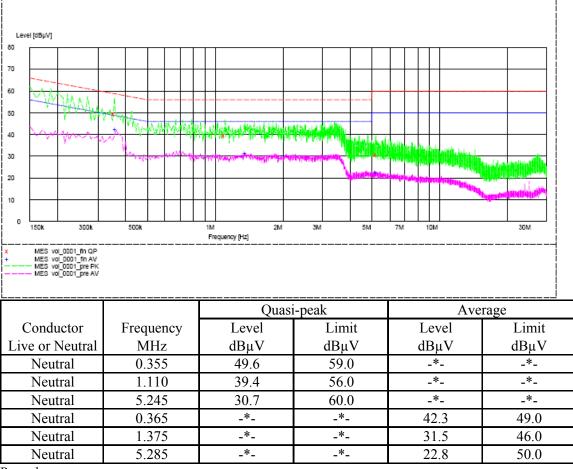

Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.2dB

-\*- Emission(s) that is far below the corresponding limit line.

#### STC (Dongguan) Company Limited



## Date: 2016-03-29 No.: DM122619

Page 28 of 68

#### 3.1.4 Number of Hopping Frequency

#### Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

#### **Test Method:**

The RF output of the EUT was connected to the spectrum analyzer by a low loss cable.

#### Spectrum Analyzer Setting:


RBW = 1MHz,  $VBW \ge RBW$ , Sweep = Auto, Span = the frequency band of operation Detector = Peak, Trace = Max. hold

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

### Measurement Data:

GFSK: 79 of 79 Channel

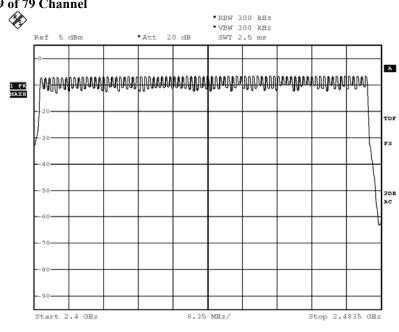

BMP Date: 9.MAR.2016 11:52:28


#### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 29 of 68

#### Pi/4 DQPSK: 79 of 79 Channel

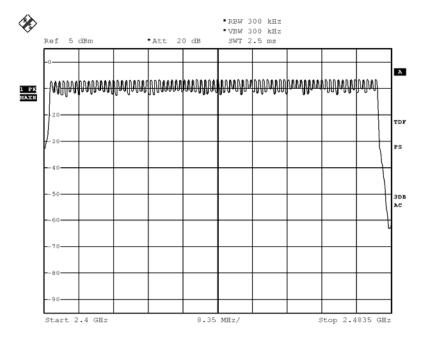

BMP Date: 9.MAR.2016 11:52:28

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 30 of 68

### 3.1.5 20dB Bandwidth

Test Requirement:	FCC 47CFR 15.247(a)(1)
Test Method:	ANSI C63.10: 2013
Test Date:	2016-03-09
Mode of Operation:	Communication mode

#### Remark:

The result has been done on all the possible configurations for searching the worst cases.

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

STC (Dongguan) Company Limited




## Date: 2016-03-29 No.: DM122619

Page 31 of 68

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[kHz]	[MHz]
2402	870	Within 2400-2483.5

### (Lowest Operating Frequency) - (GFSK)

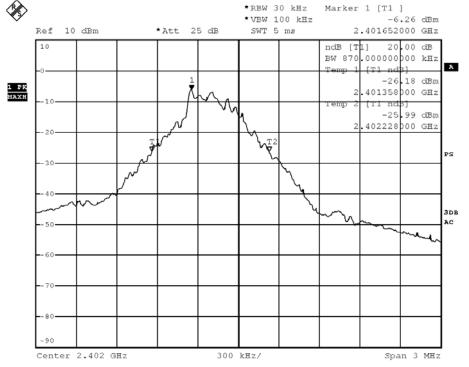

BMP

Date: 9.MAR.2016 15:53:04

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




## Date: 2016-03-29 No.: DM122619

Page 32 of 68

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[kHz]	[MHz]
2441	858	Within 2400-2483.5

### (Middle Operating Frequency) - (GFSK)

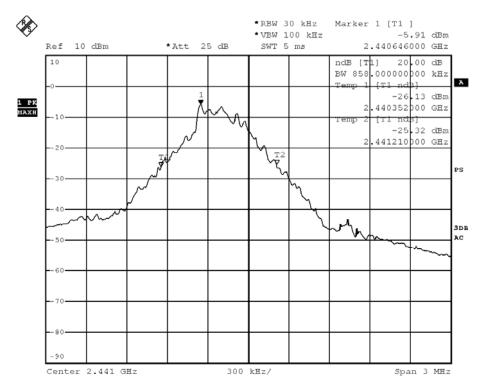

BMP Date: 9.MAR.2016 16:43:17

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




## Date: 2016-03-29 No.: DM122619

Page 33 of 68

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[kHz]	[MHz]
2480	864	Within 2400-2483.5

### (Highest Operating Frequency) - (GFSK)

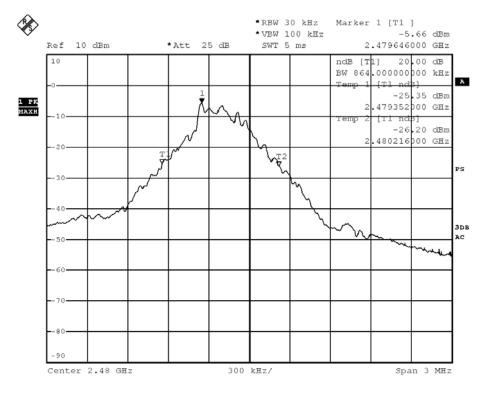

BMP Date: 9.MAR.2016 16:45:33

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




## Date: 2016-03-29 No.: DM122619

Page 34 of 68

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.236	Within 2400-2483.5

#### (Lowest Operating Frequency) - (π/4-DQPSK)

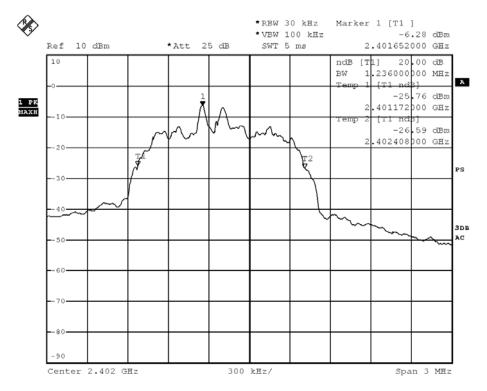

BMP

Date: 9.MAR.2016 16:31:49

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




## Date: 2016-03-29 No.: DM122619

Page 35 of 68

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.236	Within 2400-2483.5

### (Middle Operating Frequency) - ( $\pi/4$ -DQPSK)

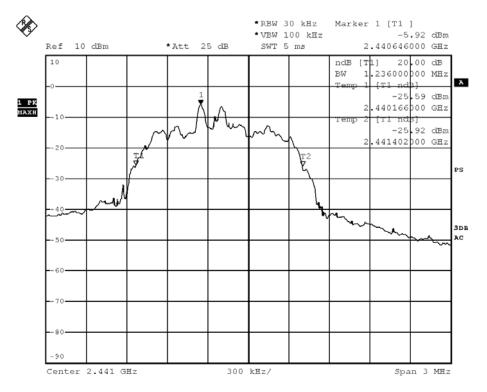

BMP Date: 9.MAR.2016 16:41:21

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




## Date: 2016-03-29 No.: DM122619

### Page 36 of 68

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.230	Within 2400-2483.5

#### (Highest Operating Frequency) - ( $\pi/4$ -DQPSK)

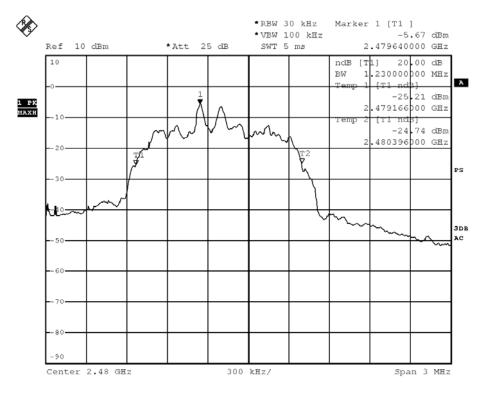

BMP Date: 9.MAR.2016 16:50:07

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 37 of 68

### 3.1.6 Hopping Channel Separation

## **Requirements:**

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Limit:


The measured maximum bandwidth \* 2/3 = 1.236MHz \* 2/3 = 824kHz

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 38 of 68

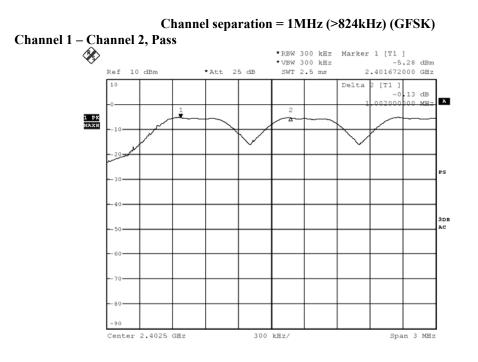

BMP Date: 9.MAR.2016 16:57:34


STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 39 of 68

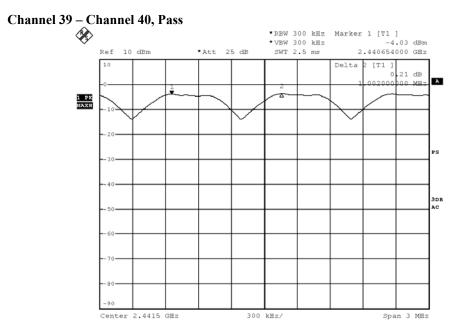

BMP Date: 10.MAR.2016 12:15:40


STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 40 of 68

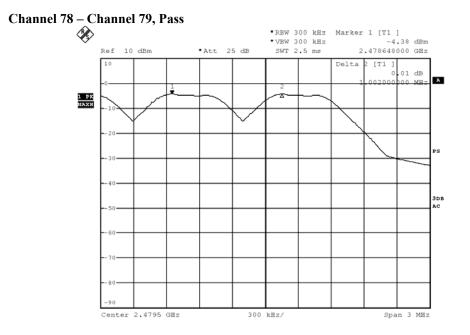


BMP Date: 9.MAR.2016 17:19:08

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 41 of 68

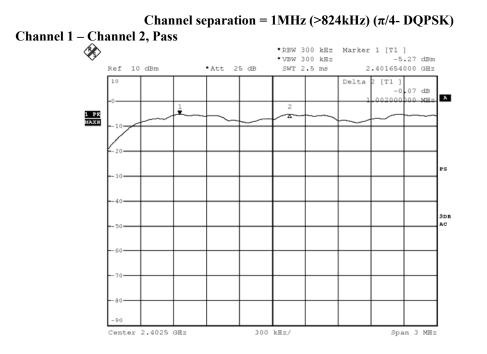

BMP Date: 9.MAR.2016 17:03:20


STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 42 of 68

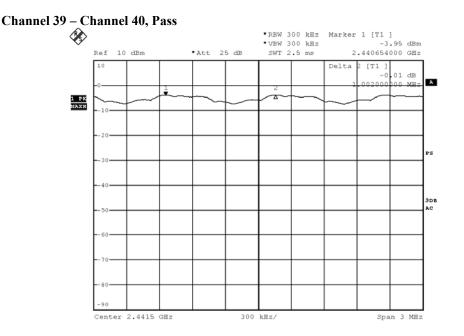

BMP Date: 10.MAR.2016 12:21:13


STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 43 of 68

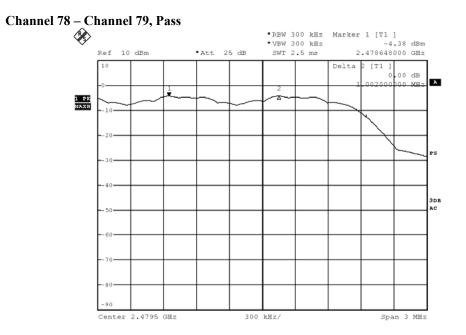

BMP Date: 9.MAR.2016 17:10:51

#### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 44 of 68


### 3.1.7 Band-edge Compliance of RF Conducted Emissions Measurement:

### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. According to the test method DA 00-705.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	31.12

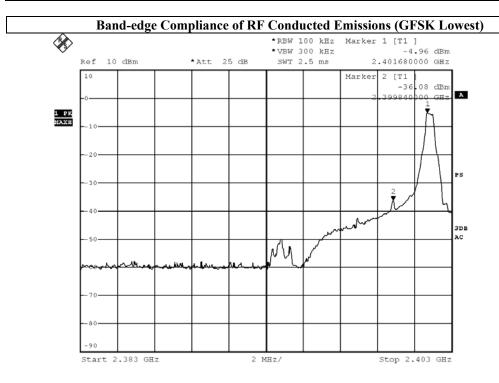

BMP

Date: 9.MAR.2016 17:30:43

#### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




## Date: 2016-03-29 No.: DM122619

Page 45 of 68

## Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	54.03

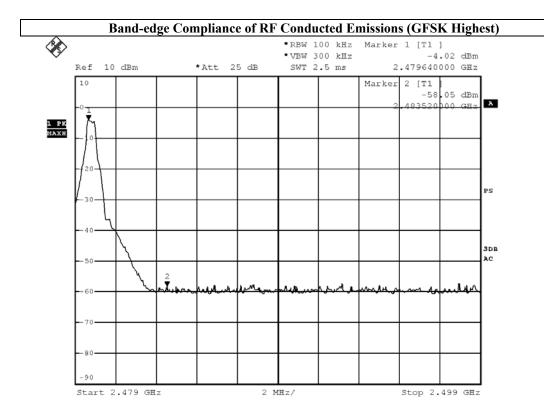

BMP Date: 9.MAR.2016 17:22:07

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




## Date: 2016-03-29 No.: DM122619

Page 46 of 68

## Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 - Lowest Fundamental (2402)	30.79

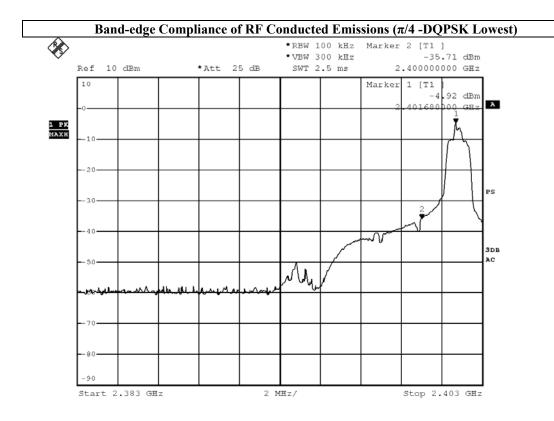

BMP Date: 9.MAR.2016 17:29:27

STC (Dongguan) Company Limited


68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

### Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	54.86

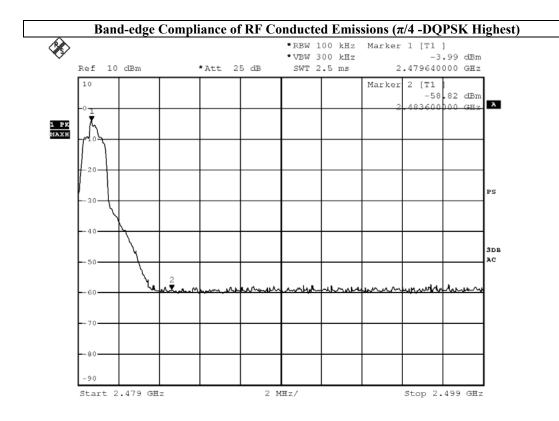

BMP Date: 9.MAR.2016 17:24:53

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619

Band-edge Compliance of RF Radiated Emissions Measurement:

### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

### Result: Band-edge Compliance of RF Radiated Emissions (GFSK Lowest)

	Field Strength of Band-edge Compliance							
			Peak Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBµV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBµV/m			
2390.0	13.4	36.8	50.2	74.0	23.8	Vertical		
2390.0	15.4	36.4	51.8	74.0	22.2	Horizontal		

Field Strength of Band-edge Compliance Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBµV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBµV/m		
2390.0	3.0	36.8	39.8	54.0	14.2	Vertical	
2390.0	4.9	36.4	41.3	54.0	12.7	Horizontal	

### Result: Band-edge Compliance of RF Radiated Emissions (GFSK Highest)

Field Strength of Band-edge Compliance							
	Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m		
2483.5	8.9	36.8	45.7	74.0	28.3	Vertical	
2483.5	10.9	36.4	47.3	74.0	26.7	Horizontal	

Field Strength of Band-edge Compliance							
		A	verage Valu	e			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m		
2483.5	-1.3	36.8	35.5	54.0	18.5	Vertical	
2483.5	0.6	36.4	37.0	54.0	17.0	Horizontal	

#### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited. For Conditions of Issuance of this test report, please refer to the overleaf or Homepage. Page 48 of 68



## Date: 2016-03-29 No.: DM122619

Page 49 of 68

## Result: Band-edge Compliance of RF Radiated Emissions (*π*/4 -DQPSK Lowest)

Field Strength of Band-edge Compliance							
			Peak Value				
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m		
2390.0	14.6	36.8	51.4	74.0	22.6	Vertical	
2390.0	16.5	36.4	52.9	74.0	21.1	Horizontal	

Field Strength of Band-edge Compliance							
		A	verage Valu	e			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m		
2390.0	4.2	36.8	41.0	54.0	13.0	Vertical	
2390.0	6.0	36.4	42.4	54.0	11.6	Horizontal	

## Result: Band-edge Compliance of RF Radiated Emissions ( $\pi/4$ -DQPSK Highest)

Field Strength of Band-edge Compliance							
			Peak Value				
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBµV	dB/m	dBµV/m	$dB\mu V/m$	dBµV/m		
2483.5	8.0	36.8	44.8	74.0	29.2	Vertical	
2483.5	10.0	36.4	46.4	74.0	27.6	Horizontal	

Field Strength of Band-edge Compliance							
		A	verage Valu	e			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m		
2483.5	-2.2	36.8	34.6	54.0	19.4	Vertical	
2483.5	-0.2	36.4	36.2	54.0	17.8	Horizontal	

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 50 of 68

### 3.1.8 Time of Occupancy (Dwell Time)

### **Requirements:**


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed. No requirements for Digital Transmission System.

## **Dwell Time = Pulse Duration \* hop rate / number of channel \* observation duration**

**Observed duration: 0.4s x 79 = 31.6s** 

Measurement Data:

## Channel Occupied in $\pi$ /4-DQPSK: 79 of 79 Channel

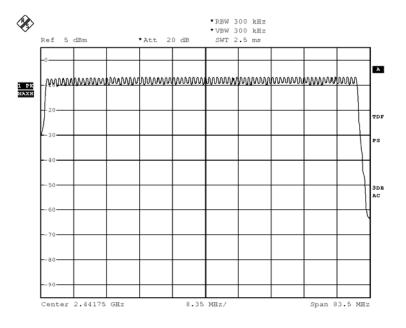

BMP Date: 9.MAR.2016 11:58:48

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




## Date: 2016-03-29 No.: DM122619

Page 51 of 68

### **DH5 Packet:**

DH5 Packet permit maximum 1600/79/6 = 3.37 hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds

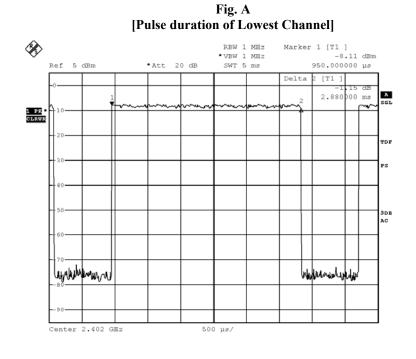


BMP Date: 9.MAR.2016 12:03:34

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 52 of 68

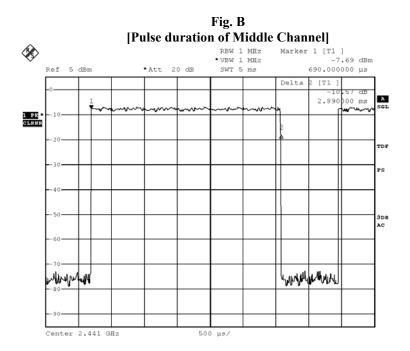


BMP Date: 9.MAR.2016 12:06:49

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 53 of 68

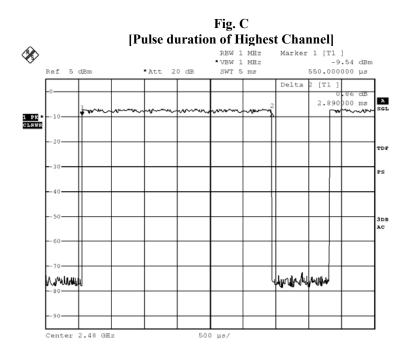

BMP Date: 9.MAR.2016 12:10:58

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




## Date: 2016-03-29 No.: DM122619

Page 54 of 68

### **DH3 Packet:**

DH3 Packet permit maximum 1600/79/4 = 5.06 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds

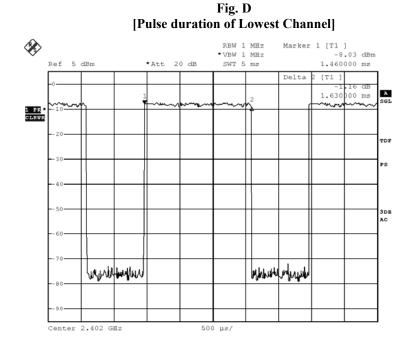


BMP Date: 9.MAR.2016 12:03:05

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 55 of 68

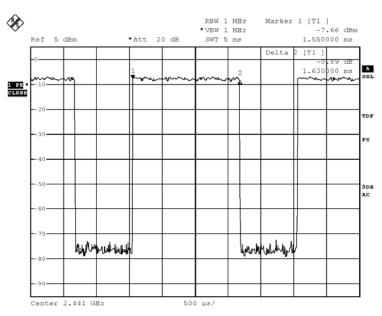

## Fig. E [Pulse duration of Middle Channel]

BMP Date: 9.MAR.2016 12:07:30


STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 56 of 68

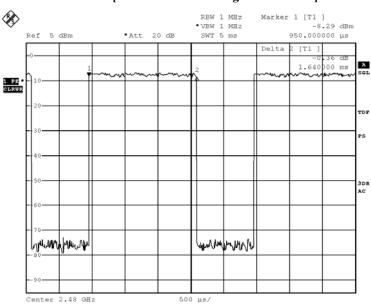

### Fig. F [Pulse duration of Highest Channel]

BMP Date: 9.MAR.2016 12:10:27

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




## Date: 2016-03-29 No.: DM122619

Page 57 of 68

### **DH1 Packet:**

DH1 Packet permit maximum 1600/79/2 = 10.12 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds

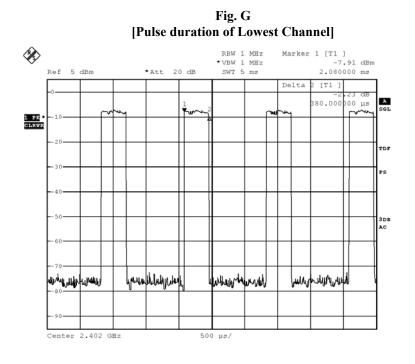


BMP Date: 9.MAR.2016 12:02:30

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 58 of 68

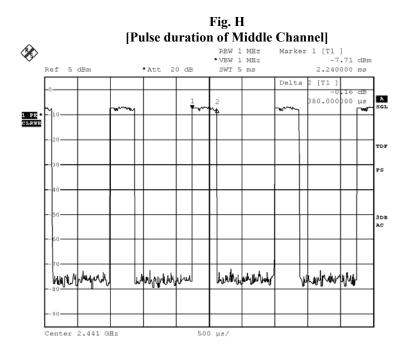

BMP Date: 9.MAR.2016 12:09:10


STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 59 of 68

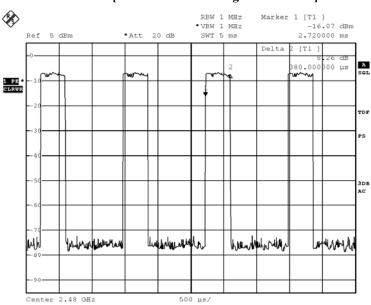

### Fig. I [Pulse duration of Highest Channel]

BMP

Date: 9.MAR.2016 12:09:50

## Time of occupancy (Dwell Time):

Data Packet	Frequency	Pulse	Dwell Time	Limits	Test Results
	(MHz)	Duration (ms)	<b>(s)</b>	<b>(s)</b>	
DH5	2402	2.88	0.273	0.400	Complies
DH5	2441	2.88	0.273	0.400	Complies
DH5	2480	2.89	0.274	0.400	Complies
DH3	2402	1.63	0.258	0.400	Complies
DH3	2441	1.63	0.258	0.400	Complies
DH3	2480	1.64	0.259	0.400	Complies
DH1	2402	0.38	0.120	0.400	Complies
DH1	2441	0.38	0.120	0.400	Complies
DH1	2480	0.38	0.120	0.400	Complies

#### STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 60 of 68

### 3.1.9 Channel Centre Frequency

### **Requirements:**

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 0 to 78) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz Frequency of RF Channel = 2402+k MHz, k = 0,...,78 (Channel separation = 1MHz)

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 61 of 68

### 3.1.10 Pseudorandom Hopping Algorithm

#### **Requirements:**

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

### **EUT Pseudorandom Hopping Algorithm**

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 62 of 68

3.1.11 Antenna Requirement

Test Requirements: § 15.203

**Test Specification:** 

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Test Results:**

This is Inverted F Antenna. There is no external antenna, the antenna gain = -0.68dBi. User is unable to remove or changed the Antenna.

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 63 of 68

3.1.12 RF Exposure

Test Requirement: Test Date: Mode of Operation: FCC 47CFR 15.247(i) 2016-03-11 Tx mode

### **Test Method:**

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

#### **Test Results:**

The EUT complied with the requirement(s) of this section. EUT meets the requirements of these sections as proven through MPE calculation The MPE calculation for EUT @ 20cm Based on the highest P = 0.800 mW

 $Pd = PG/4pi*R^{2} = (0.800 \times 0.855)/12.566* (20)^{2}$ = (0.684)/12.566x 400= 0.684 /5026.4 = 0.00014mW/cm^{2}

where:

\*Pd = power density in mW/cm2

\* G = Antenna numeric gain (0.855); Log G = g/10 (g = -0.68dBi).

- \* P = Conducted RF power to antenna (0.800 mW).
- \* R = Minimum allowable distance.(20 cm)

\*The power density  $Pd = 0.14 \text{ mW/cm}^2$  is less than 1 mW/cm<sup>2</sup> (listed MPE limit)

\*The SAR evaluation is not needed ( this is a desk top device, R>20 cm )

\* The EUT( antenna ) must be 0.2 meters away from the General Population.

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



## Date: 2016-03-29 No.: DM122619

Page 64 of 68

### Appendix A

## List of Measurement Equipment

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EMD004	LISN	ROHDE & SCHWARZ	ESH3-Z5	100102	2015.03.29	2016.03.29
EMD022	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100314	2015.03.29	2016.03.29
EMD035	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100441	2015.03.29	2016.03.29
EMD036	EMI Test Receiver	ROHDE & SCHWARZ	ESIB 26	100388	2015.03.29	2016.03.29
EMD041	TWO-LINE V- NETWORK	ROHDE & SCHWARZ	ENV216	100261	2015.03.29	2016.03.29
EMD061	Biconilog Antenna	ETS.LINDGREN	3142C	00060439	2014.11.29	2016.11.29
EMD062	Double-Ridged Waveguide (1GHz – 18GHz)	ETS.LINDGREN	3117	00075933	2014.11.15	2016.11.15
EMD084	MULTI-DVICE CONTROLLER	ETS.LINDGREN	2090	00060107	N/A	N/A
EMD088	Video Contol Unit	ETS.LINDGREN	Y21953A	2601073	N/A	N/A
EMD093	Monitor	ViewSonic	VA9036	Q8X064201876	N/A	N/A
EMD102	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707454	N/A	N/A
EMD103	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707455	N/A	N/A
EMD105	FACT-3 EMC Chamber	ETS.LINDGREN	FACT-3	3803	N/A	N/A
EMD106	Shielding Room #1	ETS.LINDGREN	RFD-100	3802	N/A	N/A
EMD111	Power meter	ROHDE & SCHWARZ	NRVD	102051	2015.03.29	2016.03.29
	100V Insertion Unit	ROHDE & SCHWARZ	URV5-Z4	100464	2015.03.29	2016.03.29
EMD113	Pre-Amplifier	ROHDE & SCHWARZ	N/A	1129588	2015.03.29	2016.03.29
EMD124	Loop Antenna	ETS-Lindgren	6502	00104905	2014.04.28	2016.04.28
EMD131	Standard Gain Horn Antenna (18GHz – 26.5GHz)	Chengdu AINFO Inc.	JXTXLB-42- 15-C-KF	J2021100721001	2015.04.09	2017.04.09
RE01	RF cable	N/A	N/A	N/A	2014-9-28	2016-9-27
RE02	RF cable	N/A	N/A	N/A	2014-9-28	2016-9-27

Remarks:-

N/A Not Applicable or Not Available

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 65 of 68

Appendix **B** 

**Photographs of EUT** 




#### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2016-03-29 No.: DM122619 Page 66 of 68

Photographs of EUT

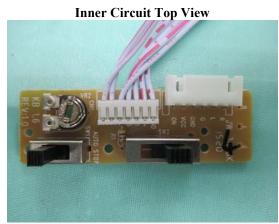


**Inner Circuit Top View** 



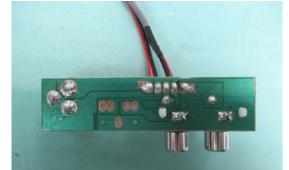

**Inner Circuit Bottom View** 

**Inner Circuit Bottom View** 

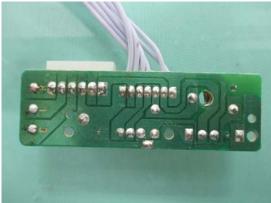


STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 67 of 68

Photographs of EUT

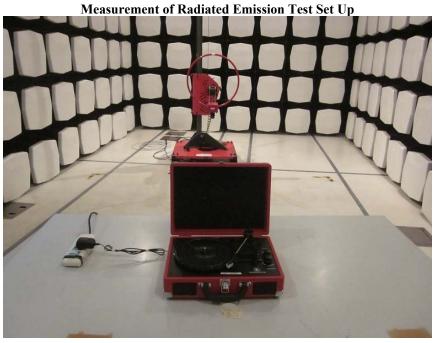

Measurement of Radiated Emission Test Set Up




### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-03-29 No.: DM122619 Page 68 of 68

Photographs of EUT

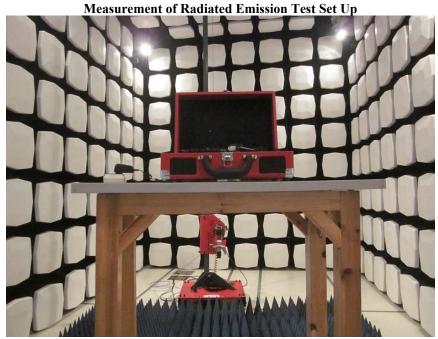

Measurement of Conducted Emission Test Set Up



\*\*\*\*\* End of Test Report \*\*\*\*\*

#### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org