

Date: 2016-06-24 Page 1 of 91

No.: DM123906

Applicant: Shenzhen Jiayinking Technology Holding Company

Limited

No.11-1 Anye Road, Anliang Village, Henggang Town,

Longgang District, Shenzhen City, R.R.C.

Manufacturer: Shenzhen Jiayinking Technology Holding Company

Limited

No.11, 11-1 Anye Road, Anliang Village, Henggang Town,

Longgang District, Shenzhen City, R.R.C.

Description of Sample(s): Product: Modern Bluetooth Turntable w/Speaker

Brand Name: Victrola Model Number: ITUT-420

FCC ID: 2ADA2-ITUT-420

Date Sample(s) Received: 2016-06-01

Date Tested: 2016-06-01 to 2016-06-23

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 and ANSI C63.10: 2013 for

FCC Certification.

Conclusion(s): The submitted product COMPLIED with the requirements

of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on

Section 2.2 in this Test Report.

Remark(s): Bluetooth FHSS (GFSK/ π/4-DQPSK/ 8DPSK)

For additional model(s) details, please

ONG Yun Jian, Along Authorized Signatory

ElectroMagnetic Compatibility Department

For and on behalf of

STC (Dongguan) Company Limited



Date: 2016-06-24	Page 2 of 91
No.: DM123906	_

CONTENT:

	Cover Content	Page 1 of 91 Page 2 of 91
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 3 of 91
1.2	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 91
1.3	Date of Order	Page 3 of 91
1.4	Submitted Sample	Page 3 of 91
1.5	Test Duration	Page 3 of 91
1.6	Country of Origin	Page 3 of 91
1.7	RF Module Details	Page 4 of 91
1.8	Antenna Details	Page 4 of 91
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 5 of 91
2.2	Test Standards and Results Summary	Page 5 of 91
2.3	Table for Test Modes	Page 6 of 91
<u>3.0</u>	Test Results	
3.1	Emission	Page 7 –86 of 91
	Appendix A List of Measurement Equipment	Page 87 of 91
	Appendix B Photographs	Page 88-91 of 91



Date: 2016-06-24 Page 3 of 91

No.: DM123906

1.0 General Details

1.1 Test Laboratory

STC (Dongguan) Company Limited

EMC Laboratory

68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China

Telephone: (86 769) 81119888 Fax: (86 769) 81116222

1.2 Equipment Under Test [EUT] Description of Sample(s)

Product: Modern Bluetooth Turntable w/Speaker

Manufacturer: Shenzhen Jiayinking Technology Holding Company

Limited

No.11, 11-1 Anye Road, Anliang Village, Henggang Town,

Longgang District, Shenzhen City, R.R.C.

Brand Name: Victrola Model Number: ITUT-420

Additional Brand Name: Innovative Technology

Additional Model Number: EP-33, TT15075-2, TT15075-3, TT15075-5

Rating: Input: 100-240Va.c. 50/60Hz 0.8A;

Output: 12Vd.c. 2A.

The AC/DC adaptor was provided by the applicant with following details:

Brand name: N/A; Model no.: GKYPB0200120US

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Modern Bluetooth Turntable w/Speaker. The r.f. signal was modulated by IC and type of modulation was frequency hopping spread spectrum Modulation.

1.3 Date of Order

2016-06-01

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2016-06-01 to 2016-06-23

1.6 Country of Origin

China



Date: 2016-06-24 Page 4 of 91

No.: DM123906

1.7 RF Module Details

Module Model Number: F-6888

Module FCC ID:

Module Transmission Type: Bluetooth V4.1

Modulation: FHSS (GFSK / π /4-DQPSK/ 8DPSK)

Data Rates: 1MBps: GFSK

2 MBps: π/4-DQPSK

3 MBps: 8DPSK

Frequency Range: 2400-2483.5MHz Carrier Frequencies: 2402MHz – 2480MHz

Module Specification (specification provided by manufacturer)

1.8 Antenna Details

Antenna Type: Monoploe antenna

Antenna Gain: 0dBi



Date: 2016-06-24 Page 5 of 91 No.: DM123906

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 Regulations and ANSI C63.10: 2013 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary								
Test Condition Test Requirement Test Method Class / Test Result								
			Severity	Pass	Fail	N/A		
Maximum Peak Conducted Output Power	FCC 47CFR 15.247(b)(1)	ANSI C63.10: 2013	N/A					
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.10: 2013	N/A					
AC Mains Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10: 2013	N/A	\boxtimes				
Number of Hopping Frequency	FCC 47CFR 15.247 (b)(1)	ANSI C63.10: 2013	N/A					
20dB Bandwidth	FCC 47CFR 15.247(a)(2)	ANSI C63.10: 2013	N/A					
Hopping Channel Separation	FCC 47CFR 15.247(a)(1)	ANSI C63.10: 2013	N/A					
Band-edge measurement (Radiated)	FCC 47CFR 15.247(d)	ANSI C63.10: 2013	N/A					
Pseudorandom Hopping Algorithm	FCC 47CFR 15.247(a)(1)	N/A	N/A					
Time of Occupancy (Dwell Time)	FCC 47CFR 15.247(a)(1)(iii)	ANSI C63.10: 2013	N/A					
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	\boxtimes				
RF Exposure	FCC 47CFR 15.247(i)	N/A	N/A	\boxtimes				

Note: N/A – Not Applicable



Date: 2016-06-24 Page 6 of 91

No.: DM123906

2.3 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The device was realized by test software.

The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Peak Conducted Output Power	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Hopping Channel Separation	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Number of Hopping Frequency	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Time of Occupancy(Dwell Time)	8DPSK (DH1 / DH3 / DH5)	3MBps
Radiated Spurious Emissions	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Band-edge compliance of Conducted Emission	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps



Date: 2016-06-24 Page 7 of 91

No.: DM123906

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Conducted Output Power

Test Requirement: FCC 47CFR 15.247(b)(1)
Test Method: ANSI C63.10: 2013

Test Date: 2016-06-06 Mode of Operation: Tx mode


Test Method:

A temporary antenna connector was soldered to the RF output. The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in Watt.

Spectrum Analyzer Setting:

RBW = 3 MHz, VBW= 3MHz, Sweep = Auto, Span = 10MHz Detector = Peak, Trace = Max. hold

Test Setup:

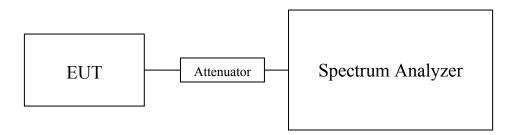

Note: a temporary antenna connector was soldered to the RF output.



Date: 2016-06-24 Page 8 of 91

No.: DM123906

Limits for Maximum Peak Conducted Output Power [FCC 47CFR 15.247]:

The maximum peak output power shall not exceeded the following limits:

For frequency hopping systems employing at least 75 hopping channels: 1 Watt For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt

Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000611
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000557
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000592

Results of Bluetooth Communication mode (π/4-DQPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)		
2402	0.000390		
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)		
2441	0.000352		
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)		
2480	0.000367		

Results of Bluetooth Communication mode (8 DPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000447
_	
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000317
·	
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000356

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB 1GHz to 18GHz 1.7dB

Remark:


- 1. All test data for each data rate were verified, but only the worst case was reported.
- 2. The EUT is programmed to transmit signals continuously for all testing.



Date: 2016-06-24 Page 9 of 91

No.: DM123906


Test plot of Maximum Peak Conducted Output Power: Bluetooth Communication mode (GFSK, 2402MHz)



BMP

Date: 6.JUN.2016 16:50:59

Bluetooth Communication mode (GFSK, 2441MHz)



BMP


Date: 6.JUN.2016 16:51:18



Date: 2016-06-24 Page 10 of 91

No.: DM123906


Bluetooth Communication mode (GFSK, 2480MHz)



BMP

Date: 6.JUN.2016 16:49:57

Bluetooth Communication mode (π/4 DQPSK, 2402MHz)

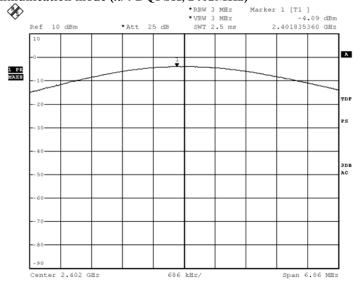


BMP

Date: 6.JUN.2016 16:48:22




Date: 2016-06-24 Page 11 of 91 No.: DM123906

Bluetooth Communication mode (π/4 DQPSK, 2441MHz)



Date: 6.JUN.2016 16:48:50

Bluetooth Communication mode (π/4 DQPSK, 2480MHz)

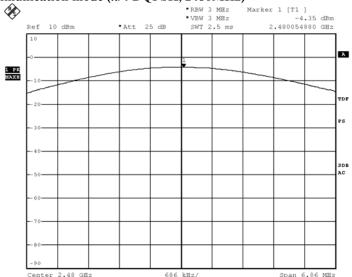


BMP

Date: 6.JUN.2016 16:49:31




Date: 2016-06-24 Page 12 of 91 No.: DM123906

Bluetooth Communication mode (8DPSK, 2402MHz)

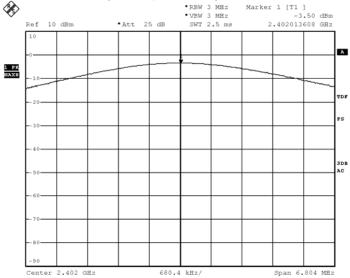

Date: 6.JUN.2016 16:47:57

Bluetooth Communication mode (8DPSK, 2441MHz)

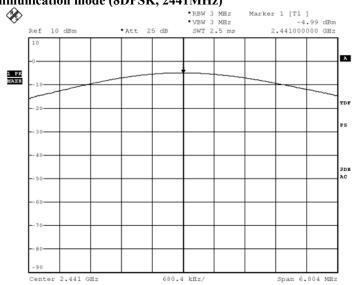

BMP


Date: 6.JUN.2016 16:47:16



Date: 2016-06-24 Page 13 of 91

No.: DM123906

Bluetooth Communication mode (8DPSK, 2480MHz)

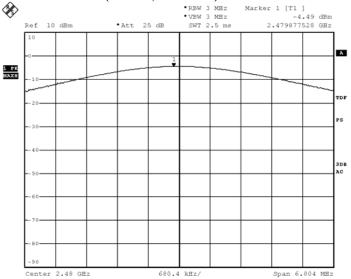

BMP

Date: 6.JUN.2016 16:46:31



Date: 2016-06-24 Page 14 of 91

No.: DM123906

3.1.2 Radiated Spurious Emissions

Test Requirement: FCC 47CFR 15.209
Test Method: ANSI C63.10: 2013
Test Date: 2016-06-08 to 2016-06-14

Mode of Operation: Tx mode / Bluetooth Communication mode

Test Method:

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-anechoic chamber located on the STC (Dongguan) Company Ltd. 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, PRC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.



Date: 2016-06-24 Page 15 of 91

No.: DM123906

Spectrum Analyzer Setting:

9KHz – 30MHz (Pk & Av) RBW: 10kHz

VBW: 30kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

30MHz – 1GHz (QP) RBW: 120kHz

VBW: 120kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold


Above 1GHz (Pk & Av) RBW: 1MHz

VBW: 1MHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

Test Setup:

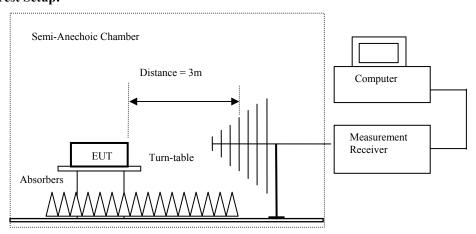

Ground Plane

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used, 9kHz to 30MHz loop antennas are used.



Date: 2016-06-24 Page 16 of 91

No.: DM123906

Limits for Radiated Emissions IFCC 47 CFR 15.209 Class Bl:

Elimits for Radiated Emissions [Fee 47 CFR 13.207 Class D].					
Frequency Range	Quasi-Peak Limits				
[MHz]	$[\mu V/m]$				
0.009-0.490	2400/F (kHz)				
0.490-1.705	24000/F (kHz)				
1.705-30	30				
30-88	100				
88-216	150				
216-960	200				
Above960	500				

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of 1x mode (2402.0 MHz) (GFSK mode) (9KHz – 30MHz): Pass								
	Field Strength of Spurious Emissions							
	Peak Value							
Frequency	Frequency Measured Correction Field Field Limit E-Field							
	Level Factor Strength Strength Polarity							
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m							
	Emissions	detected are r	nore than 20	dB below the	FCC Limits			

Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions							
	Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	dBμV/m	$dB\mu V/m$			
4804.0	15.6	41.5	57.1	74.0	16.9	Vertical		
4804.0	14.1	42.4	56.5	74.0	17.5	Horizontal		
7206.0	8.8	45.1	53.9	74.0	20.1	Vertical		
7206.0	10.3	46.2	56.5	74.0	17.5	Horizontal		
9608.0	7.4	48.0	55.4	74.0	18.6	Vertical		
9608.0	7.2	48.8	56.0	74.0	18.0	Horizontal		
12010.0	3.8	51.5	55.3	74.0	18.7	Vertical		
12010.0	4.1	52.4	56.5	74.0	17.5	Horizontal		



Date: 2016-06-24 Page 17 of 91

No.: DM123906

Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
Frequency	Frequency Measured Correction Field Limit Margin E-Field								
1 1 1 4	Level @3m	Factor	Strength	@3m	5.2.2.8.2.2	Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4804.0	0.7	41.5	42.2	54.0	11.8	Vertical			
4804.0	-1.6	42.4	40.8	54.0	13.2	Horizontal			
7206.0	-4.7	45.1	40.4	54.0	13.6	Vertical			
7206.0	-6.4	46.2	39.8	54.0	14.2	Horizontal			
9608.0	-7.9	48.0	40.1	54.0	13.9	Vertical			
9608.0	-7.3	48.8	41.5	54.0	12.5	Horizontal			
12010.0	-11.2	51.5	40.3	54.0	13.7	Vertical			
12010.0	-10.5	52.4	41.9	54.0	12.1	Horizontal			

Result of Tx mode (2441.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions								
	Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level Factor Strength Strength Polarity							
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions									
	Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	15.2	41.6	56.8	74.0	17.2	Vertical				
4882.0	14.4	42.5	56.9	74.0	17.1	Horizontal				
7323.0	12.6	45.2	57.8	74.0	16.2	Vertical				
7323.0	11.0	46.3	57.3	74.0	16.7	Horizontal				
9764.0	7.6	48.1	55.7	74.0	18.3	Vertical				
9764.0	5.6	48.9	54.5	74.0	19.5	Horizontal				
12205.0	3.7	51.6	55.3	74.0	18.7	Vertical				
12205.0	3.4	52.5	55.9	74.0	18.1	Horizontal				



Date: 2016-06-24 Page 18 of 91

No.: DM123906

Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	-1.2	41.6	40.4	54.0	13.6	Vertical				
4882.0	-1.7	42.5	40.8	54.0	13.2	Horizontal				
7323.0	-5.2	45.2	40.0	54.0	14.0	Vertical				
7323.0	-6.4	46.3	39.9	54.0	14.1	Horizontal				
9764.0	-7.6	48.1	40.5	54.0	13.5	Vertical				
9764.0	-8.4	48.9	40.5	54.0	13.5	Horizontal				
12205.0	-11.6	51.6	40.0	54.0	14.0	Vertical				
12205.0	-11.1	52.5	41.4	54.0	12.6	Horizontal				

Result of Tx mode (2480.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
	Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	15.6	41.4	57.0	74.0	17.0	Vertical				
4960.0	13.7	42.7	56.4	74.0	17.6	Horizontal				
7440.0	11.6	45.6	57.2	74.0	16.8	Vertical				
7440.0	10.3	46.5	56.8	74.0	17.2	Horizontal				
9920.0	7	48.6	55.6	74.0	18.4	Vertical				
9920.0	5.6	49.7	55.3	74.0	18.7	Horizontal				
12400.0	4.0	51.7	55.7	74.0	18.3	Vertical				
12400.0	3.1	52.7	55.8	74.0	18.2	Horizontal				



Date: 2016-06-24 Page 19 of 91

No.: DM123906

Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	0.7	41.4	42.1	54.0	11.9	Vertical				
4960.0	-1.2	42.7	41.5	54.0	12.5	Horizontal				
7440.0	-5.4	45.6	40.2	54.0	13.8	Vertical				
7440.0	-5.3	46.5	41.2	54.0	12.8	Horizontal				
9920.0	-8.5	48.6	40.1	54.0	13.9	Vertical				
9920.0	-9.7	49.7	40.0	54.0	14.0	Horizontal				
12400.0	-10.0	51.7	41.7	54.0	12.3	Vertical				
12400.0	-11.8	52.7	40.9	54.0	13.1	Horizontal				

Result of Tx mode (2402.0 MHz) (π/4-DQPSK mode) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m				
Emissions detected are more than 20 dB below the FCC Limits									

Result of Tx mode (2402.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

Result of 1 x mod	Field Strength of Spurious Emissions									
	Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$					
4804.0	15.7	41.5	57.2	74.0	16.8	Vertical				
4804.0	14.3	42.4	56.7	74.0	17.3	Horizontal				
7206.0	11.8	45.1	56.9	74.0	17.1	Vertical				
7206.0	10.5	46.2	56.7	74.0	17.3	Horizontal				
9608.0	7.5	48.0	55.5	74.0	18.5	Vertical				
9608.0	6.6	48.8	55.4	74.0	18.6	Horizontal				
12010.0	4.5	51.5	56.0	74.0	18.0	Vertical				
12010.0	3.5	52.4	55.9	74.0	18.1	Horizontal				



Date: 2016-06-24 Page 20 of 91

No.: DM123906

Result of Tx mode (2402.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
1	Level @3m	Factor	Strength	@3m	8	Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4804.0	0.3	41.5	41.8	54.0	12.2	Vertical				
4804.0	-2.3	42.4	40.1	54.0	13.9	Horizontal				
7206.0	-5.3	45.1	39.8	54.0	14.2	Vertical				
7206.0	-6.1	46.2	40.1	54.0	13.9	Horizontal				
9608.0	-7.3	48.0	40.7	54.0	13.3	Vertical				
9608.0	-7.6	48.8	41.2	54.0	12.8	Horizontal				
12010.0	-10.0	51.5	41.5	54.0	12.5	Vertical				
12010.0	-11.4	52.4	41.0	54.0	13.0	Horizontal				

Result of Tx mode (2441.0 MHz) (π/4-DQPSK mode) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2441.0 MHz) (π /4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	15.3	41.6	56.9	74.0	17.1	Vertical				
4882.0	15.2	42.5	57.7	74.0	16.3	Horizontal				
7323.0	12.4	53.2	65.6	74.0	8.4	Vertical				
7323.0	11.2	46.3	57.5	74.0	16.5	Horizontal				
9764.0	7.7	48.1	55.8	74.0	18.2	Vertical				
9764.0	6.6	48.9	55.5	74.0	18.5	Horizontal				
12205.0	4.5	51.6	56.1	74.0	17.9	Vertical				
12205.0	2.9	52.5	55.4	74.0	18.6	Horizontal				



Date: 2016-06-24 Page 21 of 91

No.: DM123906

Result of Tx mode (2441.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4882.0	0.2	41.6	41.8	54.0	12.2	Vertical			
4882.0	-1.4	42.5	41.1	54.0	12.9	Horizontal			
7323.0	-4.2	45.2	41.0	54.0	13.0	Vertical			
7323.0	-5.7	46.3	40.6	54.0	13.4	Horizontal			
9764.0	-6.7	48.1	41.4	54.0	12.6	Vertical			
9764.0	-8.9	48.9	40.0	54.0	14.0	Horizontal			
12205.0	-10.1	51.6	41.5	54.0	12.5	Vertical			
12205.0	-11.2	52.5	41.3	54.0	12.7	Horizontal			

Result of Tx mode (2480.0 MHz) (π/4-DQPSK mode) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2480.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
1 ,	Level @3m	Factor	Strength	@3m	C	Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	15.4	41.4	56.8	74.0	17.2	Vertical				
4960.0	14.4	42.7	57.1	74.0	16.9	Horizontal				
7440.0	11.5	45.6	57.1	74.0	16.9	Vertical				
7440.0	10.4	46.5	56.9	74.0	17.1	Horizontal				
9920.0	6.9	48.6	55.5	74.0	18.5	Vertical				
9920.0	5.5	49.7	55.2	74.0	18.8	Horizontal				
12400.0	4.7	51.7	56.4	74.0	17.6	Vertical				
12400.0	3.2	52.7	55.9	74.0	18.1	Horizontal				



Date: 2016-06-24 Page 22 of 91

No.: DM123906

Result of Tx mode (2480.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
1 3	Level @3m	Factor	Strength	@3m	C	Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	0.6	41.4	42.0	54.0	12.0	Vertical				
4960.0	-1.5	42.7	41.2	54.0	12.8	Horizontal				
7440.0	-4.6	45.6	41.0	54.0	13.0	Vertical				
7440.0	-5.8	46.5	40.7	54.0	13.3	Horizontal				
9920.0	-7.8	48.6	40.8	54.0	13.2	Vertical				
9920.0	-8.2	49.7	41.5	54.0	12.5	Horizontal				
12400.0	-10.0	51.7	41.7	54.0	12.3	Vertical				
12400.0	-12.1	52.7	40.6	54.0	13.4	Horizontal				

Result of Tx mode (2402.0 MHz) (8DPSK mode) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m				
	Emissions detected are more than 20 dB below the FCC Limits								

Result of Tx mode (2402.0 MHz) (8DPSK mode) (Above 1GHz): Pass

tesuit of 1x mode (2402.0 MHz) (8DFSK mode) (Above 1GHz): Pass									
	Field Strength of Spurious Emissions								
			Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$				
4804.0	16.1	41.5	57.6	74.0	16.4	Vertical			
4804.0	14.6	42.4	57.0	74.0	17.0	Horizontal			
7206.0	12.7	45.1	57.8	74.0	16.2	Vertical			
7206.0	10.4	46.2	56.6	74.0	17.4	Horizontal			
9608.0	7	48.0	55.0	74.0	19.0	Vertical			
9608.0	6.6	48.8	55.4	74.0	18.6	Horizontal			
12010.0	4.7	51.8	56.5	74.0	17.5	Vertical			
12010.0	4.0	52.4	56.4	74.0	17.6	Horizontal			



Date: 2016-06-24 Page 23 of 91

No.: DM123906

Result of Tx mode (2402.0 MHz) (8DPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
	Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4804.0	0.3	41.5	41.8	54.0	12.2	Vertical			
4804.0	-1.0	42.4	41.4	54.0	12.6	Horizontal			
7206.0	-5.2	45.1	39.9	54.0	14.1	Vertical			
7206.0	-5.5	46.2	40.7	54.0	13.3	Horizontal			
9608.0	-7.2	48.0	40.8	54.0	13.2	Vertical			
9608.0	-8.1	48.8	40.7	54.0	13.3	Horizontal			
12010.0	-10.6	51.8	41.2	54.0	12.8	Vertical			
12010.0	-10.5	52.4	41.9	54.0	12.1	Horizontal			

Result of Tx mode (2441.0 MHz) (8DPSK mode) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2441.0 MHz) (8DPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
	Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4882.0	15.1	41.6	56.7	74.0	17.3	Vertical			
4882.0	15.4	42.5	57.9	74.0	16.1	Horizontal			
7323.0	11.7	45.2	56.9	74.0	17.1	Vertical			
7323.0	11.3	46.3	57.6	74.0	16.4	Horizontal			
9764.0	7.4	48.1	55.5	74.0	18.5	Vertical			
9764.0	6.4	48.9	55.3	74.0	18.7	Horizontal			
12205.0	4.2	51.5	55.7	74.0	18.3	Vertical			
12205.0	3.8	52.5	56.3	74.0	17.7	Horizontal			



Date: 2016-06-24 Page 24 of 91

No.: DM123906

Result of Tx mode (2441.0 MHz) (8DPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	0.3	41.6	41.9	54.0	12.1	Vertical				
4882.0	-2.0	42.5	40.5	54.0	13.5	Horizontal				
7323.0	-5.0	45.2	40.2	54.0	13.8	Vertical				
7323.0	-5.9	46.3	40.4	54.0	13.6	Horizontal				
9764.0	-8.2	48.1	39.9	54.0	14.1	Vertical				
9764.0	-8.4	48.9	40.5	54.0	13.5	Horizontal				
12205.0	-11.0	51.6	40.6	54.0	13.4	Vertical				
12205.0	-10.6	52.5	41.9	54.0	12.1	Horizontal				

Result of Tx mode (2480.0 MHz) (8DPSK mode) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2480.0 MHz) (8DPSK mode) (Above 1GHz): Pass

		Field Streng	th of Spuriou	us Emissions				
Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m			
4960.0	15.8	41.4	57.2	74.0	16.8	Vertical		
4960.0	13.8	42.7	56.5	74.0	17.5	Horizontal		
7440.0	12.0	45.6	57.6	74.0	16.4	Vertical		
7440.0	10.7	46.5	57.2	74.0	16.8	Horizontal		
9920.0	7	48.6	55.6	74.0	18.4	Vertical		
9920.0	5.7	49.7	55.4	74.0	18.6	Horizontal		
12400.0	4.9	51.7	56.6	74.0	17.4	Vertical		
12400.0	3.5	52.7	56.2	74.0	17.8	Horizontal		



Date: 2016-06-24 Page 25 of 91

No.: DM123906

Result of Tx mode (2480.0 MHz) (8DPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m	_	Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	0.7	41.4	42.1	54.0	11.9	Vertical				
4960.0	-2.5	42.7	40.2	54.0	13.8	Horizontal				
7440.0	-3.8	45.6	41.8	54.0	12.2	Vertical				
7440.0	-7.2	46.5	39.3	54.0	14.7	Horizontal				
9920.0	-7.5	48.6	41.1	54.0	12.9	Vertical				
9920.0	-9.3	49.7	40.4	54.0	13.6	Horizontal				
12400.0	-9.7	51.7	42.0	54.0	12.0	Vertical				
12400.0	-11.0	52.7	41.7	54.0	12.3	Horizontal				

Remarks:

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: (9kHz - 30MHz): 3.3dB

(30MHz - 1GHz): 4.6Db (1GHz - 26GHz): 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

Date: 2016-06-24 Page 26 of 91

No.: DM123906

Radiated Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: Band-edge Compliance of RF Radiated Emissions (GFSK Lowest)

	Field Strength of Band-edge Compliance								
Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$				
2390.0	20.4	35.4	55.8	74.0	18.2	Vertical			

	Field Strength of Band-edge Compliance					
		A	verage Valu	e		
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$	
2390.0	5.5	35.4	40.9	54.0	13.1	Vertical

Result: Band-edge Compliance of RF Radiated Emissions (GFSK Highest)

Field Strength of Band-edge Compliance						
			Peak Value			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$	
2483.5	31.2	35.4	66.6	74.0	7.4	Horizontal

Field Strength of Band-edge Compliance						
		A	verage Valu	e		
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBμV/m	
2483.5	6.7	35.4	42.1	54.0	11.9	Horizontal

Date: 2016-06-24 Page 27 of 91

No.: DM123906

Radiated Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: Band-edge Compliance of RF Radiated Emissions (π/4-DQPSK Lowest)

	Field Strength of Band-edge Compliance					
			Peak Value			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$	
2390.0	19.8	35.4	55.2	74.0	18.8	Vertical

	Field Strength of Band-edge Compliance						
		A	verage Valu	e			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBμV/m		
2390.0	4.9	35.4	40.3	54.0	13.7	Vertical	

Result: Band-edge Compliance of RF Radiated Emissions (π/4-DOPSK Highest)

	Field Strength of Band-edge Compliance						
			Peak Value				
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBμV/m		
2483.5	30.2	35.4	65.6	74.0	8.4	Horizontal	

Field Strength of Band-edge Compliance						
		A	verage Valu	e		
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBμV/m	
2483.5	6.3	35.4	41.7	54.0	12.3	Horizontal

Date: 2016-06-24 Page 28 of 91

No.: DM123906

Radiated Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: Band-edge Compliance of RF Radiated Emissions (8DPSK Lowest)

	Field Strength of Band-edge Compliance						
		-	Peak Value	,			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	dBμV/m	$dB\mu V/m$	$dB\mu V/m$		
2390.0	19.8	35.4	55.2	74.0	18.8	Vertical	

	Field Strength of Band-edge Compliance					
		A	verage Valu	e		
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBμV/m	
2390.0	5.2	35.4	40.6	54.0	13.4	Vertical

Result: Band-edge Compliance of RF Radiated Emissions (8DPSK Highest)

	Field Strength of Band-edge Compliance						
			Peak Value	,			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	dBμV/m	$dB\mu V/m$	$dB\mu V/m$	-	
2483.5	30.5	35.4	65.9	74.0	8.1	Horizontal	

Field Strength of Band-edge Compliance						
		A	verage Valu	e		
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$	
2483.5	6.4	35.4	41.8	54.0	12.2	Horizontal



Date: 2016-06-24 Page 29 of 91

No.: DM123906


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Quasi-Peak Limits
$[\mu V/m]$
2400/F (kHz)
24000/F (kHz)
30
100
150
200
500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (2402MHz, GFSK) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

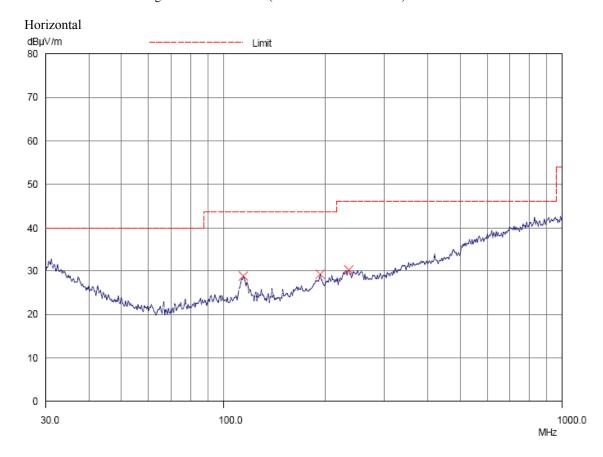



Date: 2016-06-24 Page 30 of 91

No.: DM123906

Result of Bluetooth Communication mode (2402MHz, GFSK) (30MHz - 1GHz): Pass

Result of Biactotti Communication mode (2 1021/1112), G1 511) (501/1112 1 G112), 1 ass						
Radiated Emissions						
Quasi-Peak						
Emission	E-Field	Level	Limit	Level	Limit	
Frequency	Polarity	@3m	@3m	@3m	@3m	
MHz		dBμV/m	dBμV/m	μV/m	μV/m	
114.3	Horizontal	28.9	43.5	27.9	150	
192.1	Horizontal	29.3	43.5	29.2	150	
233.5	Horizontal	30.3	46.0	32.7	200	



Date: 2016-06-24 Page 31 of 91

No.: DM123906

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


Elilits for Radiated Elilissions [FCC 47 CFR 15,207 Class D].					
Frequency Range	Quasi-Peak Limits				
[MHz]	$[\mu V/m]$				
0.009-0.490	2400/F (kHz)				
0.490-1.705	24000/F (kHz)				
1.705-30	30				
30-88	100				
88-216	150				
216-960	200				
Above960	500				

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (2402MHz, GFSK) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

Vertical

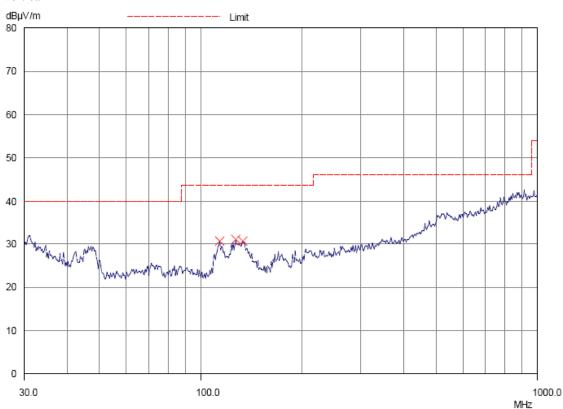



Date: 2016-06-24 Page 32 of 91

No.: DM123906

Result of Bluetooth Communication mode (2402MHz, GFSK) (30MHz - 1GHz): Pass

Radiated Emissions Quasi-Peak					
Emission	E-Field	Level	Limit	Level	Limit
Frequency MHz	Polarity	@3m dBµV/m	@3m dBµV/m	@3m µV/m	@3m µV/m
113.9	Vertical	30.7	43.5	34.3	150
126.7	Vertical	31.0	43.5	35.5	150
133.7	Vertical	30.7	43.5	34.3	150

Remarks:

Calculated measurement uncertainty (30MHz - 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date: 2016-06-24 Page 33 of 91

No.: DM123906

3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207 Test Method: ANSI C63.10: 2013

Test Date: 2016-06-23


Mode of Operation: Bluetooth Communication mode

Test Voltage: 120Va.c. 60Hz

Test Method:

The test was performed in accordance with ANSI C63.10: 2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Test Setup:

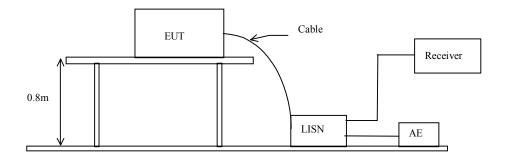



Date: 2016-06-24 Page 34 of 91

No.: DM123906

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average	
[MHz]	[dBµV]	[dBµV]	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5.0	56	46	
5.0-30.0	60	50	

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Result of Bluetooth Communication mode (L): PASS

Please refer to the following diagram for individual results.

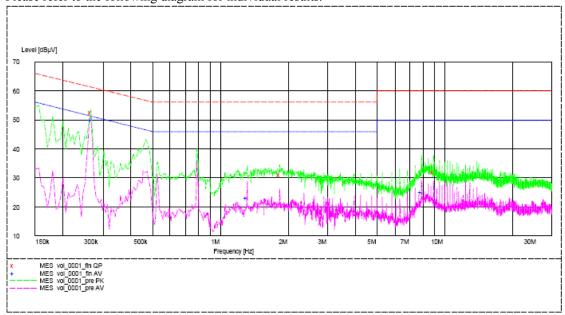

		Quasi-peak		Average	
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Live	0.265	52.4	61.0	_*_	_*_
Live	1.845	31.1	56.0	_*_	_*_
Live	8.955	31.9	60.0	_*_	_*_
Live	0.265	_*_	_*_	50.1	51.0
Live	1.315	_*_	_*_	23.3	46.0
Live	7.900	_*_	_*_	24.9	50.0



Date: 2016-06-24 Page 35 of 91

No.: DM123906

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average	
[MHz]	[dBµV]	[dBµV]	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5.0	56	46	
5.0-30.0	60	50	

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Result of Bluetooth Communication mode (N): PASS

Please refer to the following diagram for individual results.

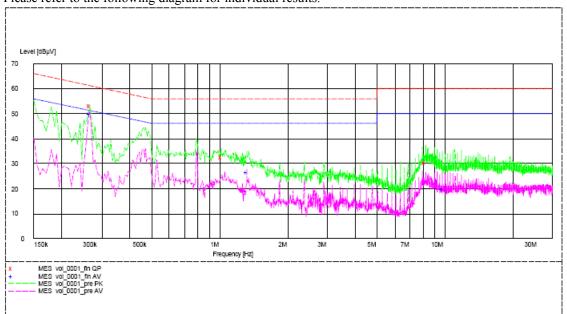

		Quasi-peak		Average	
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Neutral	0.265	53.1	61.0	_*_	_*_
Neutral	1.020	32.9	56.0	_*_	_*_
Neutral	8.190	30.2	60.0	_*_	_*_
Neutral	0.265	_*_	_*_	50.0	51.0
Neutral	1.320	_*_	_*_	26.7	46.0
Neutral	9.770	_*_	_*_	20.0	50.0

Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.2dB

-*- Emission(s) that is far below the corresponding limit line.



Date: 2016-06-24 Page 36 of 91

No.: DM123906

3.1.4 Number of Hopping Frequency

Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

Test Method:

The RF output of the EUT was connected to the spectrum analyzer by a low loss cable.

Spectrum Analyzer Setting:


RBW = 1MHz, VBW \ge RBW, Sweep = Auto, Span = the frequency band of operation Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Measurement Data:

GFSK: 79 of 79 Channel

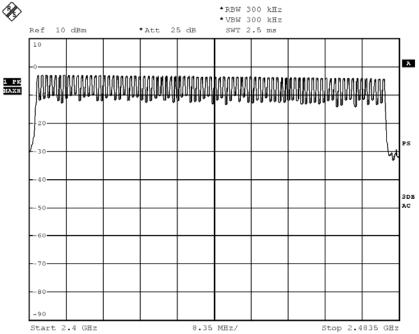

BMP


Date: 6.JUN.2016 16:07:30



Date: 2016-06-24 Page 37 of 91

No.: DM123906


π/4-DQPSK: 79 of 79 Channel

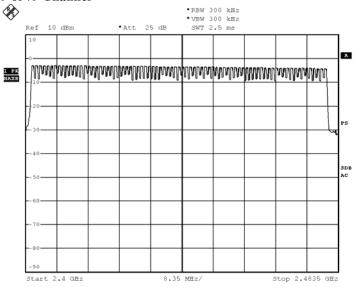

BMP

Date: 6.JUN.2016 16:16:28

8DPSK: 79 of 79 Channel

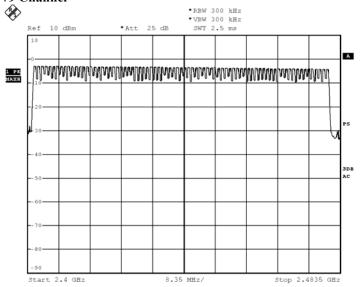

BMP

Date: 6.JUN.2016 16:20:04

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2016-06-24 Page 38 of 91

No.: DM123906

3.1.5 20dB Bandwidth

Test Requirement: FCC 47CFR 15.247(a)(1)
Test Method: ANSI C63.10: 2013

Test Date: 2016-06-06 Mode of Operation: TX mode

Remark:

The result has been done on all the possible configurations for searching the worst cases.

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:


As Test Setup of clause 3.1.1 in this test report.




Date: 2016-06-24 Page 39 of 91

No.: DM123906

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.070	Within 2400-2483.5



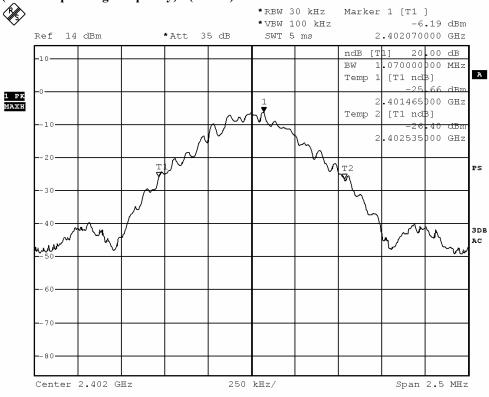

BMP

Date: 6.JUN.2016 15:25:12




Date: 2016-06-24 Page 40 of 91

No.: DM123906

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.065	Within 2400-2483.5

(Middle Operating Frequency) - (GFSK)

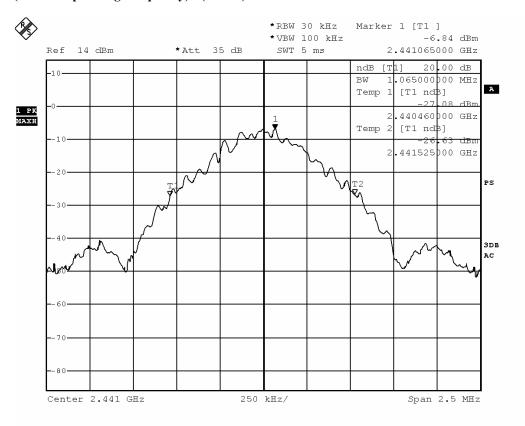

BMP

Date: 6.JUN.2016 15:25:38




Date: 2016-06-24 Page 41 of 91

No.: DM123906

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.070	Within 2400-2483.5

(Highest Operating Frequency) - (GFSK)

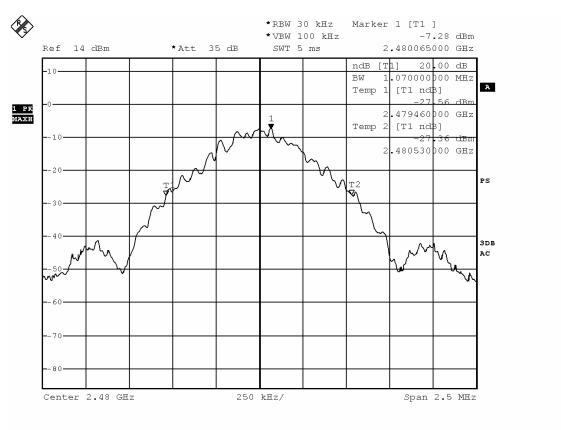

 BMP

Date: 6.JUN.2016 15:26:07




Date: 2016-06-24 Page 42 of 91

No.: DM123906

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.3720	Within 2400-2483.5

(Lowest Operating Frequency) - (π/4-DQPSK)

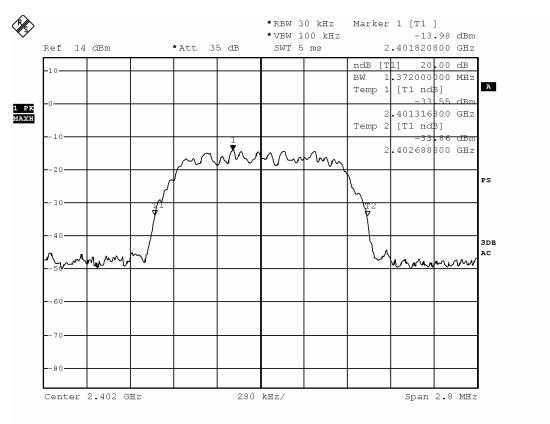

ВМР

Date: 6.JUN.2016 15:27:28




Date: 2016-06-24 Page 43 of 91

No.: DM123906

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.3720	Within 2400-2483.5

(Middle Operating Frequency) - $(\pi/4 - DQPSK)$

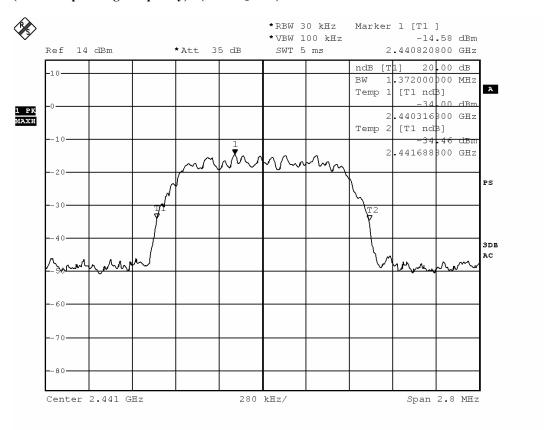

BMP

Date: 6.JUN.2016 15:27:04




Date: 2016-06-24 Page 44 of 91

No.: DM123906

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.3720	Within 2400-2483.5

(Highest Operating Frequency) - $(\pi/4 - DQPSK)$

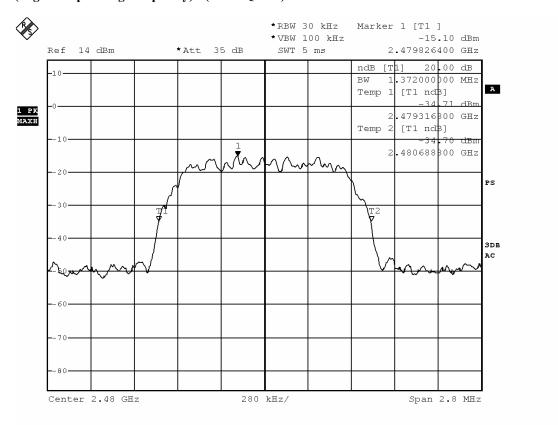

 BMP

Date: 6.JUN.2016 15:26:39




Date: 2016-06-24 Page 45 of 91

No.: DM123906

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.3608	Within 2400-2483.5

(Lowest Operating Frequency) - (8DPSK)

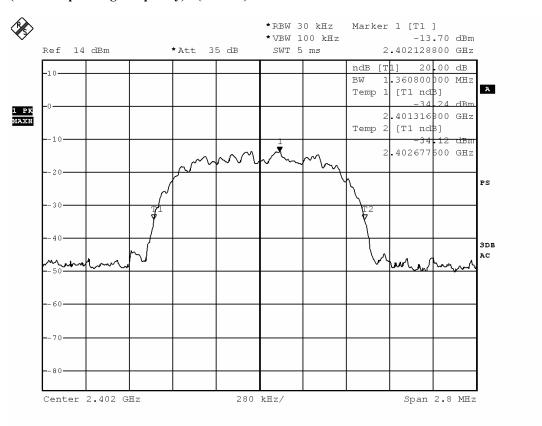

BMP

Date: 6.JUN.2016 15:27:57




Date: 2016-06-24 Page 46 of 91

No.: DM123906

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.3608	Within 2400-2483.5

(Middle Operating Frequency) - (8DPSK)

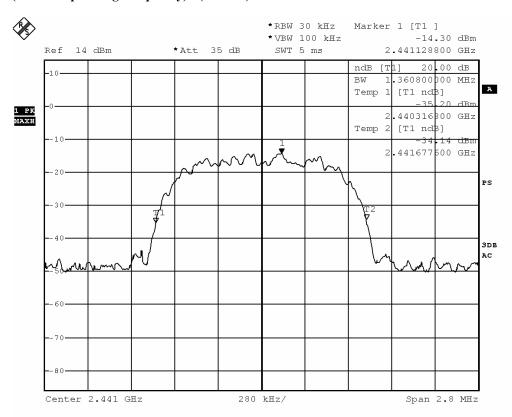

BMP

Date: 6.JUN.2016 15:28:23




Date: 2016-06-24 Page 47 of 91

No.: DM123906

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.3608	Within 2400-2483.5

(Highest Operating Frequency) - (8DPSK)

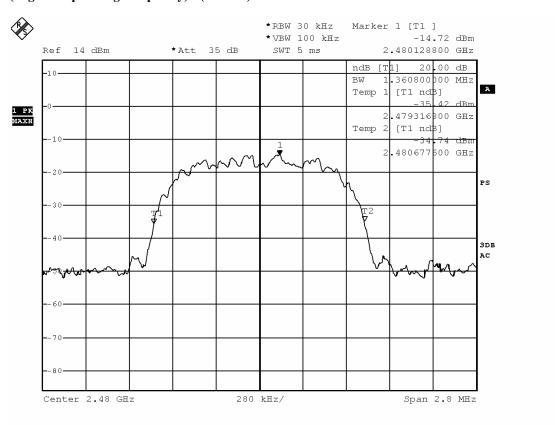

 BMP

Date: 6.JUN.2016 15:28:47



Date: 2016-06-24 Page 48 of 91

No.: DM123906

3.1.6 Hopping Channel Separation

Requirements:

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit:


The measured maximum bandwidth * 2/3 = 1.372MHz * 2/3 = 914.7kHz



Date: 2016-06-24 Page 49 of 91

No.: DM123906

Channel separation = 1MHz (>914.7kHz) (Lowest) (GFSK)

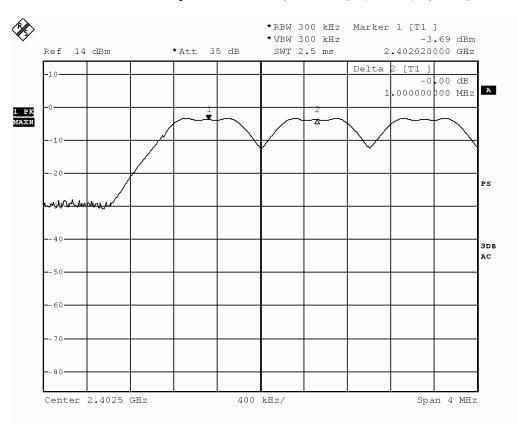

 BMP


Date: 6.JUN.2016 15:32:27



Date: 2016-06-24 Page 50 of 91

No.: DM123906

Channel separation = 1MHz (>914.7kHz) (Mid) (GFSK)

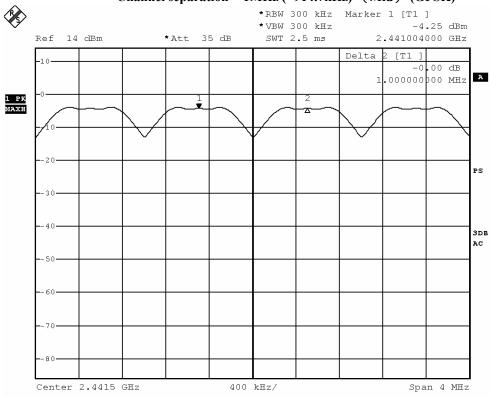

 BMP


Date: 6.JUN.2016 15:31:43



Date: 2016-06-24 Page 51 of 91

No.: DM123906

Channel separation = 1MHz (>914.7kHz) (Highest) (GFSK)

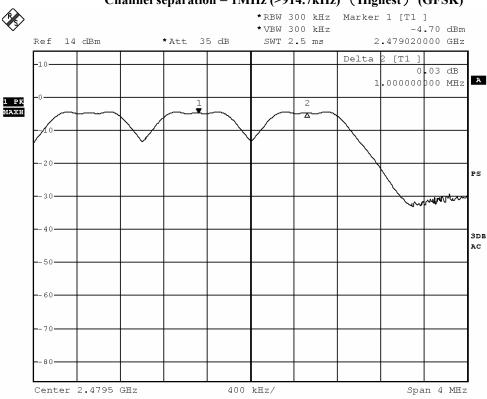

ВМР


Date: 6.JUN.2016 15:30:56



Date: 2016-06-24 Page 52 of 91

No.: DM123906

Channel separation = 1MHz (>914.7kHz) (Lowest) ($\pi/4$ DQPSK)

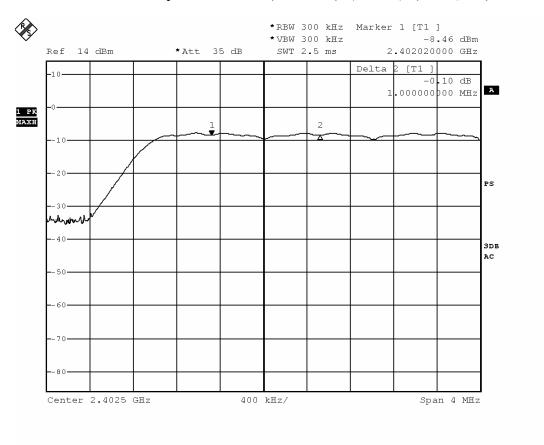

 BMP


Date: 6.JUN.2016 15:33:18



Date: 2016-06-24 Page 53 of 91

No.: DM123906

Channel separation = 1MHz (>914.7kHz) (Mid) ($\pi/4$ DQPSK)

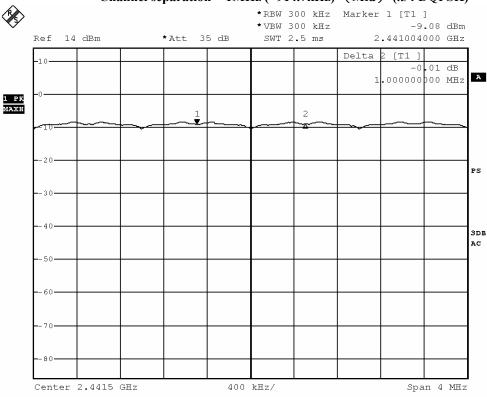

BMP


Date: 6.JUN.2016 15:34:08



Date: 2016-06-24 Page 54 of 91

No.: DM123906

Channel separation = 1MHz (>914.7kHz) (Highest) ($\pi/4$ DQPSK)

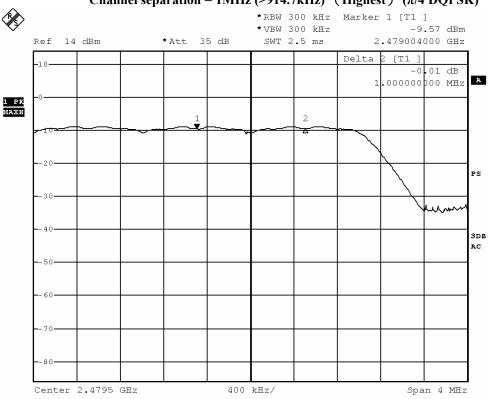

 BMP


Date: 6.JUN.2016 15:35:04



Date: 2016-06-24 Page 55 of 91

No.: DM123906

Channel separation = 1MHz (>914.7kHz) (Lowest) (8DPSK)

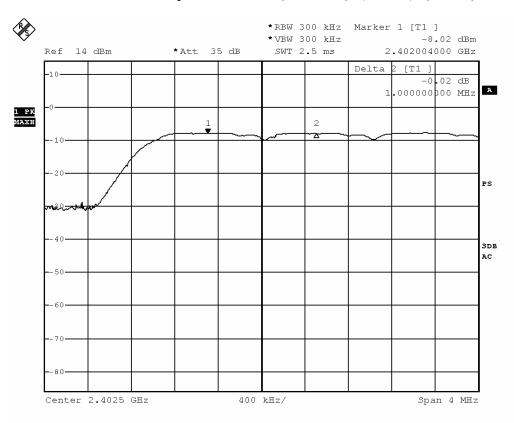

 BMP


Date: 6.JUN.2016 15:37:54



Date: 2016-06-24 Page 56 of 91

No.: DM123906

Channel separation = 1MHz (>914.7kHz) (Mid) (8DPSK)

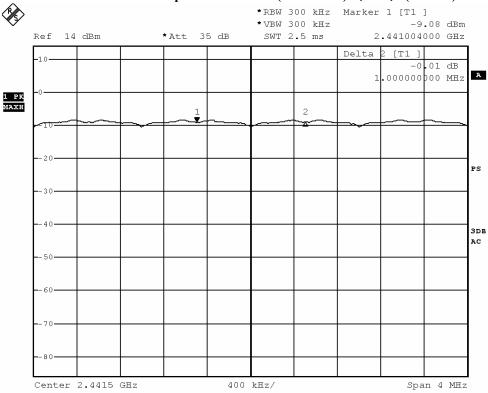

 BMP


Date: 6.JUN.2016 15:34:08



Date: 2016-06-24 Page 57 of 91

No.: DM123906

Channel separation = 1MHz (>914.7kHz) (Highest) (8DPSK)

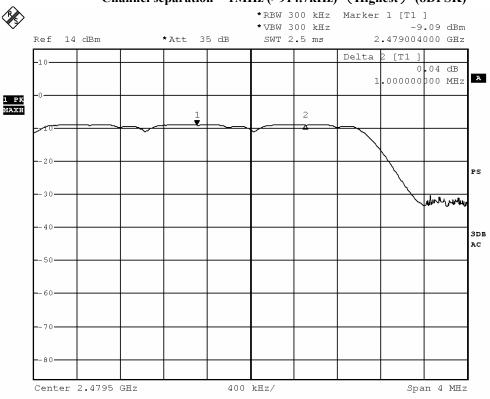

 BMP

Date: 6.JUN.2016 15:35:43



Date: 2016-06-24 Page 58 of 91

No.: DM123906

3.1.7 Band-edge Compliance of RF Conducted Emissions Measurement:


Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. According to the test method DA 00-705.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	30.22

Band-edge Compliance of RF Conducted Emissions (GFSK Lowest)(hopping on)

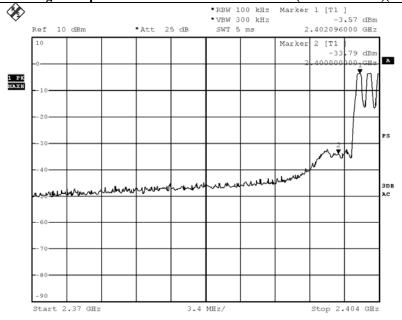

BMP

Date: 6.JUN.2016 16:32:22




Date: 2016-06-24 Page 59 of 91

No.: DM123906

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	35.34

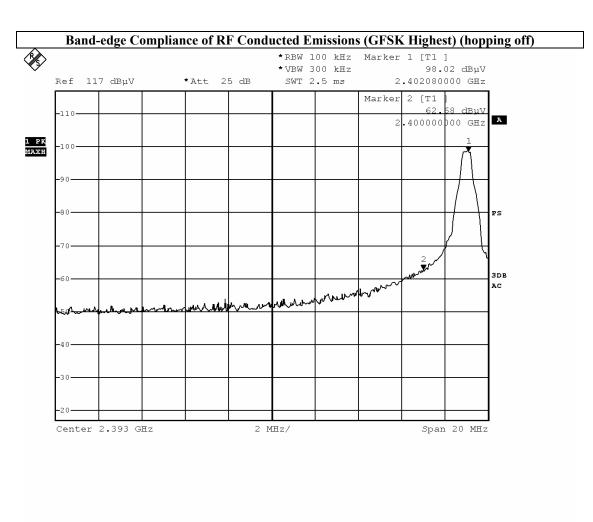





Date: 2016-06-24 Page 60 of 91

No.: DM123906

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	31.66



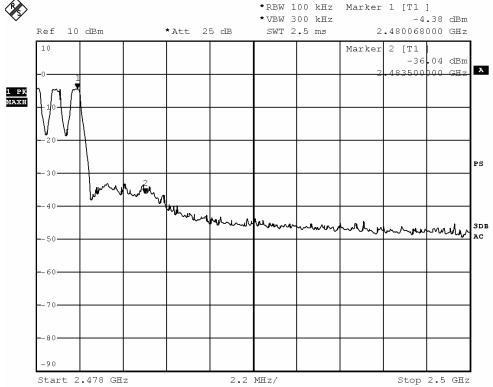

ВМР

Date: 6.JUN.2016 16:33:49




Date: 2016-06-24 Page 61 of 91

No.: DM123906

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	39.85

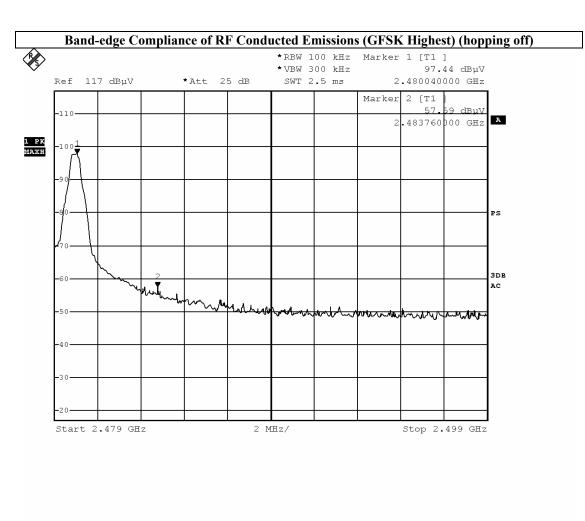




Date: 2016-06-24 Page 62 of 91

No.: DM123906

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	29.49

Band-edge Compliance of RF Conducted Emissions (π/4 DQPSK Lowest) (hopping on)

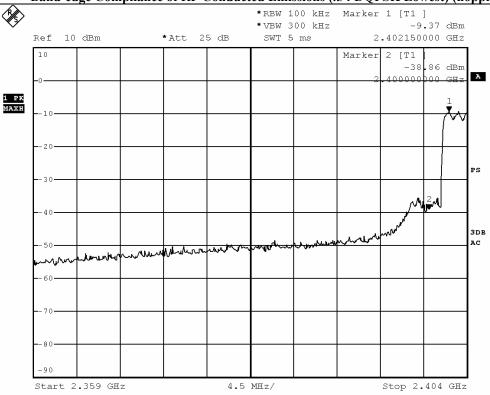

ВМР

Date: 6.JUN.2016 16:38:07




Date: 2016-06-24 Page 63 of 91

No.: DM123906

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	25.97

Band-edge Compliance of RF Conducted Emissions (π/4 DQPSK Lowest) (hopping off)

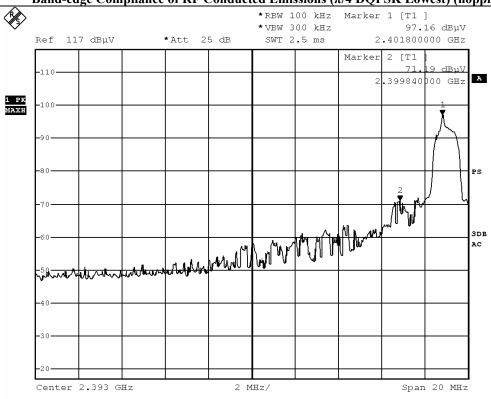




Date: 2016-06-24 Page 64 of 91

No.: DM123906

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	27.60

Band-edge Compliance of RF Conducted Emissions (π/4 DQPSK Highest) (hopping on)

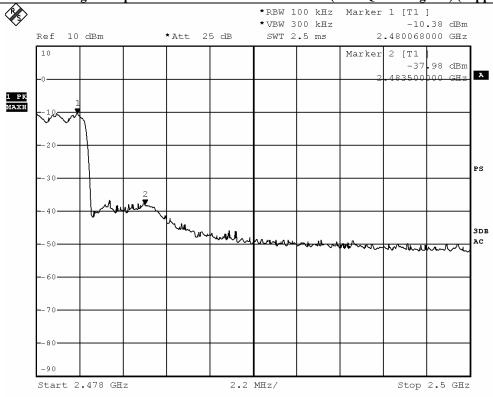

ВМР

Date: 6.JUN.2016 16:35:17




Date: 2016-06-24 Page 65 of 91

No.: DM123906

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	31.35

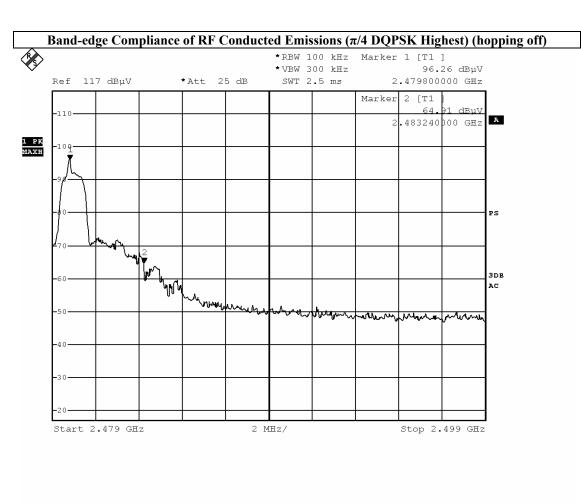




Date: 2016-06-24 Page 66 of 91

No.: DM123906

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	26.31

Band-edge Compliance of RF Conducted Emissions (8DPSK Lowest) (hopping on)

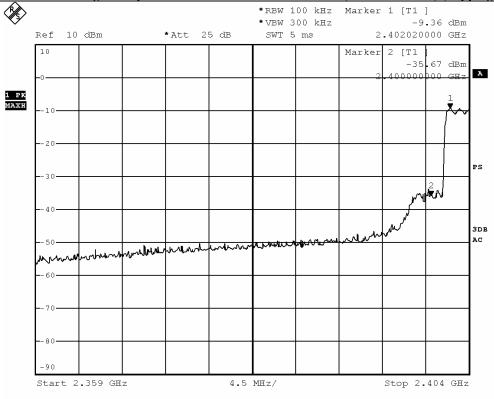

BMP

Date: 6.JUN.2016 16:39:21




Date: 2016-06-24 Page 67 of 91

No.: DM123906

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	24.73

Band-edge Compliance of RF Conducted Emissions (8DPSK Lowest) (hopping off)

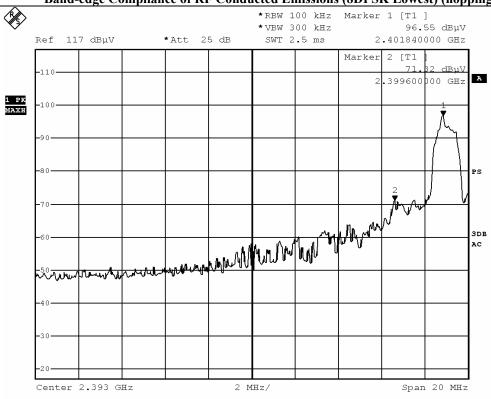




Date: 2016-06-24 Page 68 of 91

No.: DM123906

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	26.05

Band-edge Compliance of RF Conducted Emissions (8DPSK Highest) (hopping on)

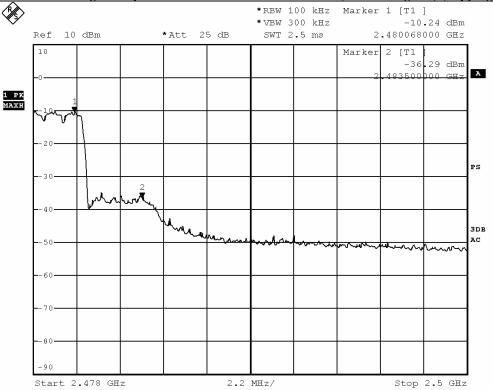

ВМР

Date: 6.JUN.2016 16:41:22




Date: 2016-06-24 Page 69 of 91

No.: DM123906

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	31.41

Band-edge Compliance of RF Conducted Emissions (8DPSK Highest) (hopping off)

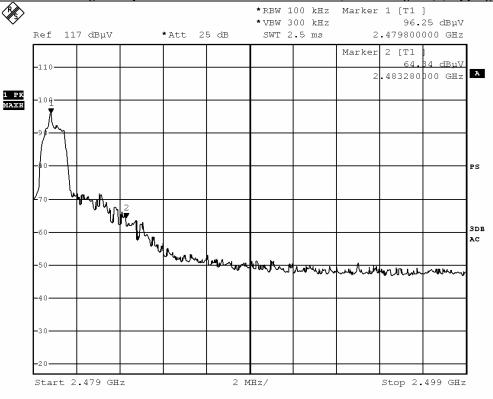



Date: 2016-06-24 Page 70 of 91


No.: DM123906

Band-edge Compliance of RF Conducted Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. According to the test method DA 00-705.


Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

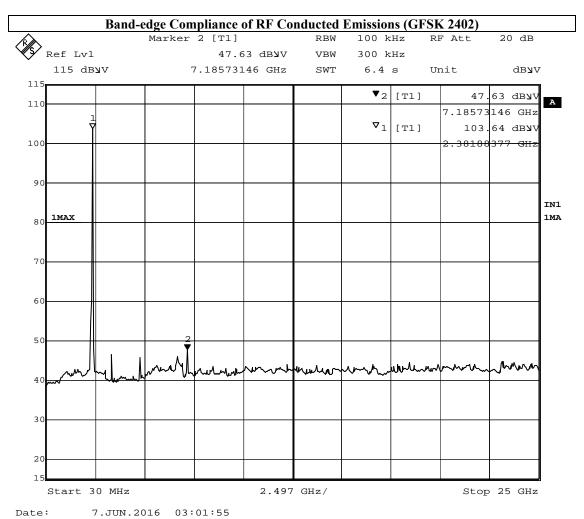



Date: 2016-06-24 Page 71 of 91


No.: DM123906

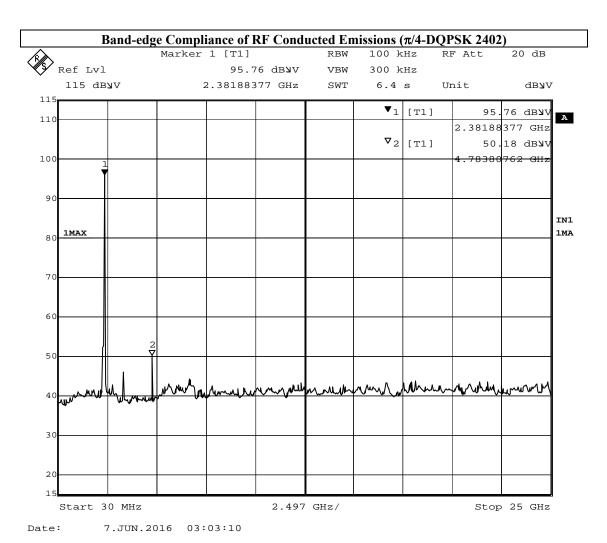



Date: 2016-06-24 Page 72 of 91

No.: DM123906

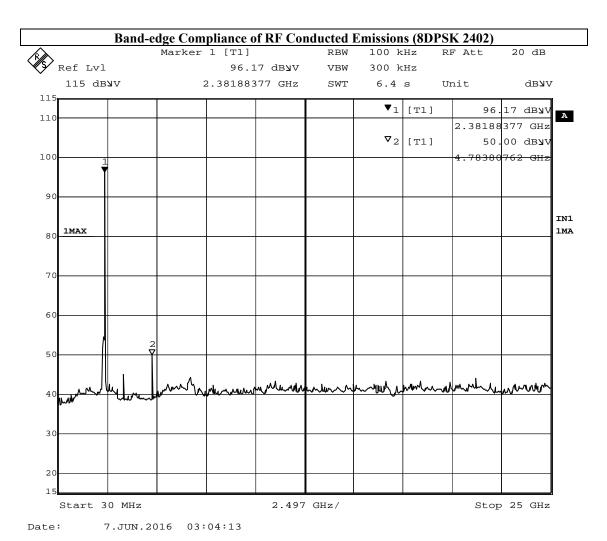



Date: 2016-06-24 Page 73 of 91

No.: DM123906

3.1.8 Time of Occupancy (Dwell Time)

Requirements:


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed. No requirements for Digital Transmission System.

Dwell Time = Pulse Duration * hop rate / number of channel * observation duration

Observed duration: $0.4s \times 79 = 31.6s$

Measurement Data:

Channel Occupied in 8DPSK: 79 of 79 Channel

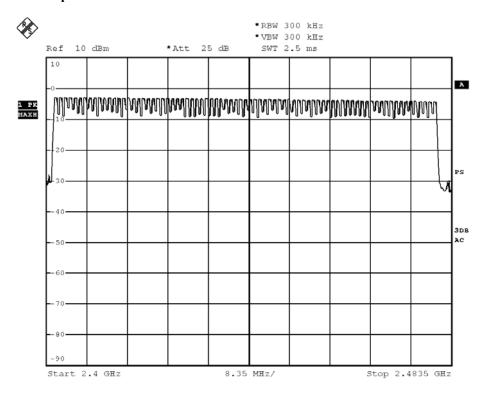

ВМР

Date: 6.JUN.2016 16:20:04




Date: 2016-06-24 Page 74 of 91

No.: DM123906

DH5 Packet:

DH5 Packet permit maximum 1600/79/6 = 3.37 hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds

Fig. A [Pulse duration of Lowest Channel]

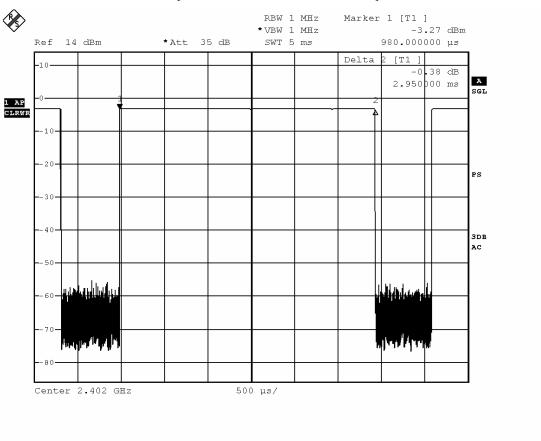

BMP


Date: 6.JUN.2016 15:55:55



Date: 2016-06-24 Page 75 of 91

No.: DM123906

Fig. B [Pulse duration of Middle Channel]

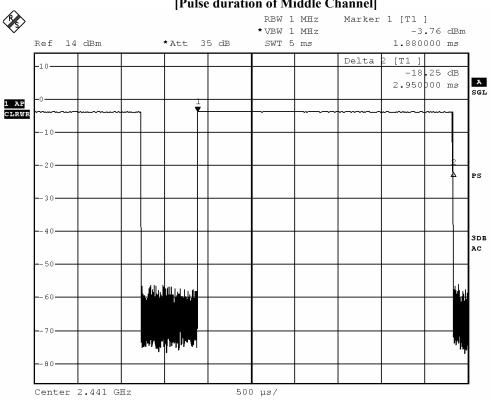

ВМР


Date: 6.JUN.2016 15:54:05



Date: 2016-06-24 Page 76 of 91

No.: DM123906

Fig. C
[Pulse duration of Highest Channel]

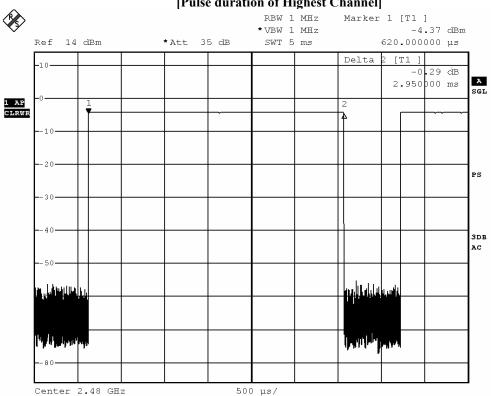

ВМР

Date: 6.JUN.2016 15:53:25




Date: 2016-06-24 Page 77 of 91

No.: DM123906

DH3 Packet:

DH3 Packet permit maximum 1600/79/4 = 5.06 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds

Fig. D [Pulse duration of Lowest Channel]

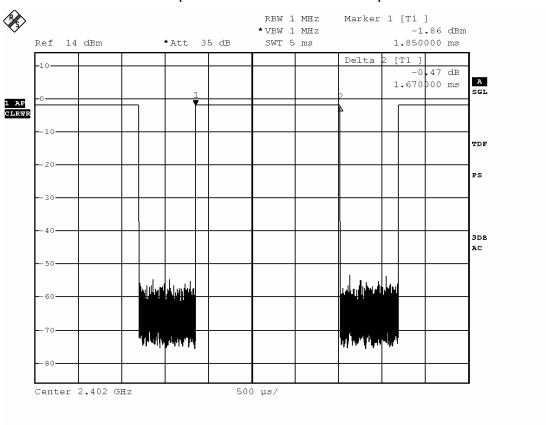

BMP


Date: 6.JUN.2016 18:30:18



Date: 2016-06-24 Page 78 of 91

No.: DM123906

Fig. E [Pulse duration of Middle Channel]

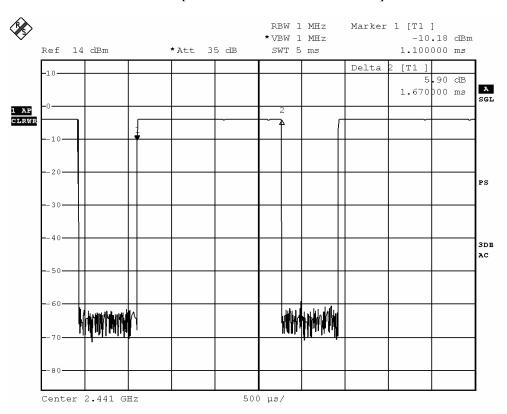

ВМР


Date: 6.JUN.2016 15:46:21



Date: 2016-06-24 Page 79 of 91

No.: DM123906

Fig. F
[Pulse duration of Highest Channel]

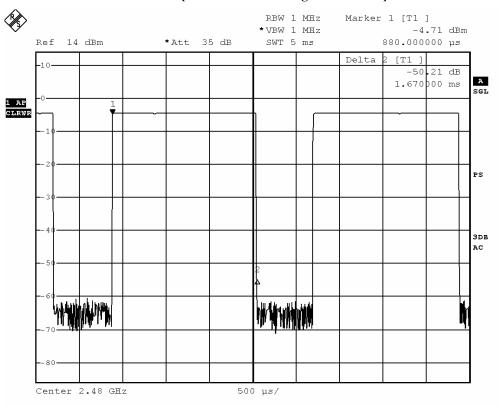

 BMP

Date: 6.JUN.2016 15:45:45




Date: 2016-06-24 Page 80 of 91

No.: DM123906

DH1 Packet:

DH1 Packet permit maximum 1600/79/2 = 10.12 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds

Fig. G
[Pulse duration of Lowest Channel]

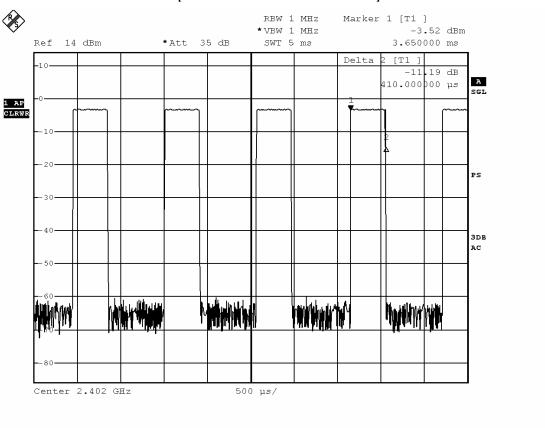

 BMP


Date: 6.JUN.2016 15:43:30



Date: 2016-06-24 Page 81 of 91

No.: DM123906

Fig. H [Pulse duration of Middle Channel]

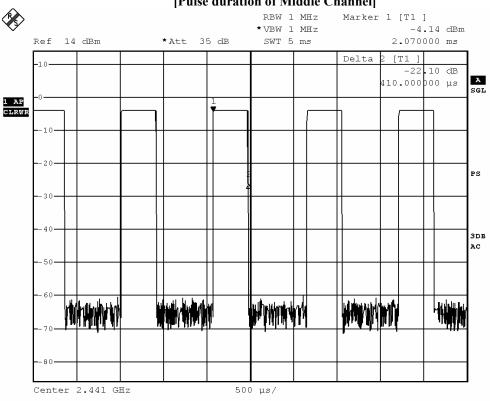

ВМР


Date: 6.JUN.2016 15:44:09



Date: 2016-06-24 Page 82 of 91

No.: DM123906

Fig. I [Pulse duration of Highest Channel]

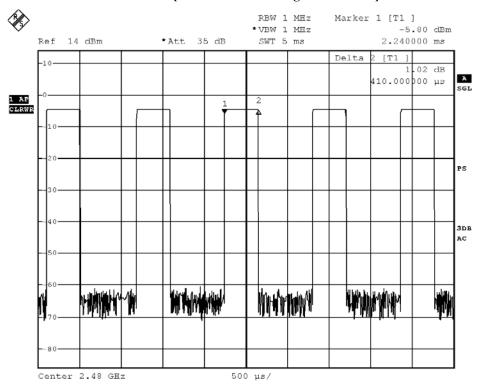

BMP

Date: 6.JUN.2016 15:45:22

Time of occupancy (Dwell Time):

Data Packet	Frequency	Pulse	Dwell Time	Limits	Test Results
	(MHz)	Duration (ms)	(s)	(s)	
DH5	2402	2.950	0.314	0.400	Complies
DH5	2441	2.950	0.314	0.400	Complies
DH5	2480	2.950	0.314	0.400	Complies
DH3	2402	1.670	0.267	0.400	Complies
DH3	2441	1.670	0.267	0.400	Complies
DH3	2480	1.670	0.267	0.400	Complies
DH1	2402	0.410	0.131	0.400	Complies
DH1	2441	0.410	0.131	0.400	Complies
DH1	2480	0.410	0.131	0.400	Complies

STC (Dongguan) Company Limited

Date: 2016-06-24 Page 83 of 91

No.: DM123906

3.1.9 Channel Centre Frequency

Requirements:

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 1 to 79) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz Frequency of RF Channel = 2402+k MHz, k = 1,...,79 (Channel separation = 1MHz)



Date: 2016-06-24 Page 84 of 91

No.: DM123906

3.1.10 Pseudorandom Hopping Algorithm

Requirements:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

EUT Pseudorandom Hopping Algorithm

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.



Date: 2016-06-24 Page 85 of 91

No.: DM123906

3.1.11 Antenna Requirement

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

This is Monoploe antenna. There is no external antenna, the antenna gain = 0dBi. User is unable to remove or changed the Antenna.



Date: 2016-06-24 Page 86 of 91

No.: DM123906

3.1.12 RF Exposure

Test Requirement: FCC 47CFR 15.247(i)

Test Date: 2016-06-14 Mode of Operation: Tx mode

Test Method:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

Test Results:

The EUT complied with the requirement(s) of this section. EUT meets the requirements of these sections as proven through MPE calculation The MPE calculation for EUT @ 20 cm Based on the highest P = 0.611 mW

```
Pd = PG/4pi*R^2 = (0.611 \times 1.0)/12.566 \times (20)^2
= (0.611)/12.566 \times 400 = 0.611/5026.4
= 0.000122mW/cm<sup>2</sup>
```

where:

- *Pd = power density in mW/cm2
- * G = Antenna numeric gain (1.0); Log G = g/10 (g = 0dBi).
- * P = Conducted RF power to antenna (0.611 mW).
- * R = Minimum allowable distance.(20 cm)
- *The power density $Pd = 0.000122 \text{mW/cm}^2$ is less than 1 mW/cm² (listed MPE limit)
- *The SAR evaluation is not needed (this is a desk top device, R> 20 cm)
- * The EUT(antenna) must be 0.2 meters away from the General Population.



Date: 2016-06-24 Page 87 of 91

No.: DM123906

Appendix A

List of Measurement Equipment

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EMD004	LISN	ROHDE & SCHWARZ	ESH3-Z5	100102	2016.3.29	2017.3.29
EMD022	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100314	2016.3.29	2017.3.29
EMD035	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100441	2016.3.29	2017.3.29
EMD036	EMI Test Receiver	ROHDE & SCHWARZ	ESIB 26	100388	2016.3.29	2017.3.29
EMD041	TWO-LINE V- NETWORK	ROHDE & SCHWARZ	ENV216	100261	2016.3.29	2017.3.29
EMD061	Biconilog Antenna	ETS.LINDGREN	3142C	00060439	2014.11.29	2016.11.29
EMD062	Double-Ridged Waveguide (1GHz – 18GHz)	ETS.LINDGREN	3117	00075933	2014.11.15	2016.11.15
EMD084	MULTI-DVICE CONTROLLER	ETS.LINDGREN	2090	00060107	N/A	N/A
EMD088	Video Contol Unit	ETS.LINDGREN	Y21953A	2601073	N/A	N/A
EMD093	Monitor	ViewSonic	VA9036	Q8X064201876	N/A	N/A
EMD102	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707454	N/A	N/A
EMD103	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707455	N/A	N/A
EMD105	FACT-3 EMC Chamber	ETS.LINDGREN	FACT-3	3803	N/A	N/A
EMD106	Shielding Room #1	ETS.LINDGREN	RFD-100	3802	N/A	N/A
EMD111	Power meter	ROHDE & SCHWARZ	NRVD	102051	2016.3.29	2017.3.29
	100V Insertion Unit	ROHDE & SCHWARZ	URV5-Z4	100464	2016.3.29	2017.3.29
EMD113	Pre-Amplifier	ROHDE & SCHWARZ	N/A	1129588	2016.3.29	2017.3.29
EMD124	Loop Antenna	ETS-Lindgren	6502	00104905	2015.04.28	2017.04.28
EMD131	Standard Gain Horn Antenna (18GHz – 26.5GHz)	Chengdu AINFO Inc.	JXTXLB-42- 15-C-KF	J2021100721001	2015.04.09	2017.04.09
RE01	RF cable	N/A	N/A	N/A	2014-9-28	2016-9-27
RE02	RF cable	N/A	N/A	N/A	2014-9-28	2016-9-27

Remarks:-

N/A Not Applicable or Not Available



Date: 2016-06-24 Page 88 of 91

No.: DM123906

Appendix B

Photographs of EUT


Front View of the product



Inside View of the product



Inner Circuit Bottom View



Rear View of the product



Inner Circuit Top View



Inner Circuit Top View



STC (Dongguan) Company Limited



Page 89 of 91 Date: 2016-06-24

No.: DM123906

Photographs of EUT

Inner Circuit Bottom View



Inner Circuit Bottom View






Inner Circuit Top View



Inner Circuit Bottom View








Date: 2016-06-24 Page 90 of 91

No.: DM123906

Photographs of EUT

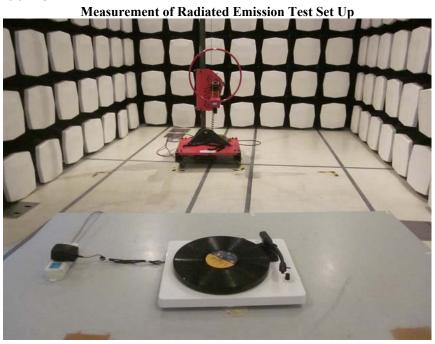




STC (Dongguan) Company Limited



Date: 2016-06-24 Page 91 of 91

No.: DM123906

Photographs of EUT

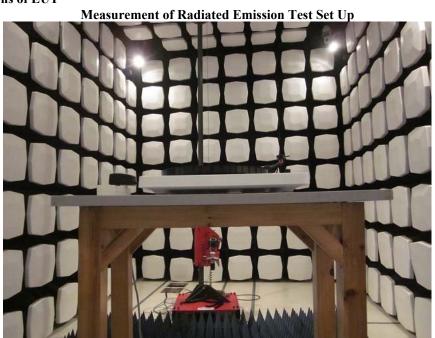

Measurement of Conducted Emission Test Set Up

WWW.stc-group.org

***** End of Test Report *****

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org