

FCC TEST REPORT

For

MINIX TECHNOLOGY LIMITED

Mini PC with Android OS

Test Model: NEO U9-H

Additional Model No.:/

Prepared for : MINIX TECHNOLOGY LIMITED
Address : Unit 01, 15/F, Chevalier Commercial Center, No.8 Wang Hoi Road, Kowloon Bay, Kowloon, Hong Kong

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : Jan 09, 2017
Number of tested samples : 1
Serial number : Prototype
Date of Test : Jan 09, 2017~Feb 14, 2017
Date of Report : Feb 14, 2017

FCC TEST REPORT
FCC CFR 47 PART 15 E(15.407)

Report Reference No. : LCS1701090941E

Date of Issue..... : Feb 14, 2017

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards [checked]
Partial application of Harmonised standards [unchecked]
Other standard testing method [unchecked]

Applicant's Name..... : MINIX TECHNOLOGY LIMITED

Address..... : Unit 01, 15/F, Chevalier Commercial Center, No.8 Wang Hoi Road, Kowloon Bay, Kowloon, Hong Kong

Test Specification

Standard : FCC CFR 47 PART 15 E(15.407) / ANSI C63.10: 2013

Test Report Form No..... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : Mini PC with Android OS

Trade Mark..... : MINIX

Test Model : NEO U9-H

Ratings : DC 5V/3A by adapter
Adapter input:100~240VAC, 50/60Hz, 0.5A

Result : Positive

Compiled by:

Calvin Weng

Calvin Weng/ Administrators

Supervised by:

Glin Lu

Glin Lu/ Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS1701090941E	<u>Feb 14, 2017</u> Date of issue
---	--------------------------------------

Test Model.....	: NEO U9-H
EUT.....	: Mini PC with Android OS
Applicant..... : MINIX TECHNOLOGY LIMITED	
Address.....	: Unit 01, 15/F, Chevalier Commercial Center, No.8 Wang Hoi Road, Kowloon Bay, Kowloon, Hong Kong
Telephone.....	: /
Fax.....	: /
Manufacturer..... : XIANGUAN ELECTRONICS LIMITED	
Address.....	: 13F, Building B, Haisong Edifice, Tairan 9th Rd, Futian District, Shenzhen, China
Telephone.....	: /
Fax.....	: /
Factory..... : XIANGUAN ELECTRONICS LIMITED	
Address.....	: 13F, Building B, Haisong Edifice, Tairan 9th Rd, Futian District, Shenzhen, China
Telephone.....	: /
Fax.....	: /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.
 It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
00	Feb 14, 2017	Initial Issue	Gavin Liang

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. DESCRIPTION OF DEVICE (EUT)	6
1.2. SUPPORT EQUIPMENT LIST	7
1.3. EXTERNAL I/O	7
1.4. DESCRIPTION OF TEST FACILITY	7
1.5. LIST OF MEASURING EQUIPMENT	8
1.6. STATEMENT OF THE MEASUREMENT UNCERTAINTY	10
1.7. MEASUREMENT UNCERTAINTY	10
1.8. DESCRIPTION OF TEST MODES	10
2. TEST METHODOLOGY	12
2.1. EUT CONFIGURATION	12
2.2. EUT EXERCISE	12
2.3. GENERAL TEST PROCEDURES	12
3. SYSTEM TEST CONFIGURATION	13
3.1. JUSTIFICATION	13
3.2. EUT EXERCISE SOFTWARE	13
3.3. SPECIAL ACCESSORIES	13
3.4. BLOCK DIAGRAM/SCHEMATICS	13
3.5. EQUIPMENT MODIFICATIONS	13
3.6. TEST SETUP	13
4. SUMMARY OF TEST RESULTS.....	14
5. TEST RESULT	15
5.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	15
5.2. POWER SPECTRAL DENSITY MEASUREMENT	17
5.3. 6dB & 26dB BANDWIDTH MEASUREMENT	25
5.4. RADIATED EMISSIONS MEASUREMENT	33
5.6. POWER LINE CONDUCTED EMISSIONS	52
5.7. ANTENNA REQUIREMENTS.....	54

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: Mini PC with Android OS
Test Model	: NEO U9-H
Hardware Version	: JX912AV1.1
Software Version	: V1.0
Power Supply	: DC 5V/3A by adapter Adapter input:100~240VAC, 50/60Hz, 0.5A
EUT Supports	: 2.4GHz WIFI/5G WIFI/Bluetooth 4.1
Radios Application	
Bluetooth	:
Operating Frequency	: 2.402-2.480GHz
Channel Number	: 40 channels for Bluetooth V4.1 (DTS)
Channel Spacing	: 2MHz for Bluetooth V4.1 (DTS)
Modulation Type	: GFSK for Bluetooth V4.1 (DTS)
Bluetooth Version	: V4.1
Antenna Description	: R-SMA Antenna, 2.5dBi(Max.)
WIFI(2.4GHz Band)	:
Operating Frequency	: 2412-2462MHz
Channel Spacing	: 5MHz
Channel Number	: 11 Channel for 20MHz bandwidth(2412~2462MHz) 7 channels for 40MHz bandwidth(2422~2452MHz)
Modulation Type	: 802.11b: DSSS; 802.11g/n: OFDM
Antenna Description	: R-SMA Antenna, 2.5dBi(Max.) FPC Antenna, 2.5dBi(Max.)
WIFI(5GHz Band)	:
Operating Frequency	: 5180.00-5240.00MHz
Channel Number	: 4 Channel for 20MHz Bandwidth 2 channels for 40MHz Bandwidth 1 channels for 80MHz Bandwidth
Modulation Type	: 802.11a/n/ac: OFDM
Antenna Description	: R-SMA Antenna, 2.5dBi(Max.) FPC Antenna, 2.5dBi(Max.)

1.2. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Shenzhen City Yunsheng Plastic Electronics Co., Ltd	Power Adapter	YS03-050300U	---	FCC VoC

1.3. External I/O

I/O Port Description	Quantity	Cable
USB Port	3	0.5m, unshielded
TF Card Port	1	N/A
OTG Port	1	0.2m, unshielded
RJ45 Port	1	N/A
HDMI Port	1	0.5m, unshielded
DC in Port	1	1.2m, unshielded
Earphone Port	1	N/A
Mic Port	1	N/A

1.4. Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

There is one 3m semi-anechoic chamber and one line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.10: 2013, CISPR 22/EN 55022 and CISPR16-1-4 SVSWR requirements.

1.5. List Of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Jun 18, 2016	Jun 17, 2017
Signal analyzer	Agilent	E4448A(External mixers to	US44300469	9kHz~40GHz	Jul 16, 2016	Jul 15, 2017
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	Jun 18, 2016	Jun 17, 2017
LISN	EMCO	3819/2NM	9703-1839	9KHz-30MHz	Jun 18, 2016	Jun 17, 2017
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	Jun 18, 2016	Jun 17, 2017
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	Jun 18, 2016	Jun 17, 2017
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-18GHz	Jun 18, 2016	Jun 17, 2017
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	Apr 18, 2016	Apr 17, 2017
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	Apr 18, 2016	Apr 17, 2017
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	Apr 18, 2016	Apr 17, 2017
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	Apr 18, 2016	Apr 17, 2017
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	Apr 18, 2016	Apr 17, 2017
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	Apr 18, 2016	Apr 17, 2017
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	Apr 18, 2016	Apr 17, 2017
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	Jun 18, 2016	Jun 17, 2017
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	Jun 18, 2016	Jun 17, 2017
Power Meter	R&S	NRVS	100444	DC-40GHz	Jun 18, 2016	Jun 17, 2017
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	Jun 18, 2016	Jun 17, 2017
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	Jun 18, 2016	Jun 17, 2017
AC Power Source	HPC	HPA-500E	HPA-9100024	AC 0~300V	Jun 18, 2016	Jun 17, 2017
DC power Source	GW	GPC-6030D	C671845	DC 1V-60V	Jun 18, 2016	Jun 17, 2017
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-00	N/A	Jun 18, 2016	Jun 17, 2017
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	Jun 18, 2016	Jun 17, 2017
RF CABLE-2m	JYE Bao	RG142	CB035-2m	20MHz-1GHz	Jun 18, 2016	Jun 17, 2017
Signal Generator	R&S	SMR40	10016	10MHz~40GHz	Jul 16, 2016	Jul 15, 2017
Universal Radio Communication Tester	R&S	CMU200	112012	N/A	Oct 27, 2016	Oct 26, 2017
Wideband Radio Communication Tester	R&S	CMW500	1201.0002K50	N/A	Nov 19, 2016	Nov 18, 2017

MXG Vector Signal Generator	Agilent	N5182A	MY470711 51	250KHz~6GHz	Oct 27, 2016	Oct 26, 2017
MXG Vector Signal Generator	Agilent	E4438C	MY420813 96	250KHz~6GHz	Oct 27, 2016	Oct 26, 2017
PSG Analog Signal Generator	Agilent	N8257D	MY465205 21	250KHz~20GHz	Nov 19, 2016	Nov 18, 2017
MXA Signal Analyzer	Agilent	N9020A	MY505101 40	10Hz~26.5GHz	Oct 27, 2016	Oct 26, 2017
DC Power Supply	Agilent	E3642A	/	0-8V,5A/0-20V,2 .5A	May 20, 2016	May 19, 2017
RF Control Unit	Tonscend	JS0806-1	/	/	Nov 19, 2016	Nov 18, 2017
LTE Test Software	Tonscend	JS1120-1	/	Version: 2.5.7.0	N/A	N/A
X-series USB Peak and Average Power Sensor Agilent	Agilent	U2021XA	MY540800 22	/	Oct 27, 2016	Oct 26, 2017
4 Ch.Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	MY540800 16	/	Oct 27, 2016	Oct 26, 2017
Test Software	Ascentest	AT890-SW	20141230	Version: 20160630	N/A	N/A
Splitter/Combiner(Qty: 2)	Mini-Circuits	ZAPD-50W 4.2-6.0 GHz	NN256400 424	/	Oct 27, 2016	Oct 26, 2017
Splitter/Combine(Qty: 2)	MCLI	PS3-7	4463/4464	/	Oct 27, 2016	Oct 26, 2017
ATT (Qty: 1)	Mini-Circuits	VAT-30+	30912	/	Oct 27, 2016	Oct 26, 2017
Radiated Emission test software	Audix	e3	/	/	N/A	N/A

1.6. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.7. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty :	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty :	150kHz~30MHz	1.63dB	(1)
Power disturbance :	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.8. Description Of Test Modes

The EUT has been tested under operating condition.

The EUT was set to transmit at 100% duty cycle. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in Y position.

For pre-testing, when performed power line conducted emission measurement, the input Voltage/Frequency AC 120V/60Hz and AC 240V/60Hz were used. Only recorded the worst case in this report.

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was determined to be 802.11a mode(High Channel).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was determined to be 802.11a mode(High Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

- 802.11a Mode: 6 Mbps, OFDM.
- 802.11n(HT20) Mode: MCS0, OFDM.
- 802.11n(HT40) Mode: MCS0, OFDM.
- 802.11ac(VHT20) Mode: MCS0, OFDM.
- 802.11ac(VHT40) Mode: MCS0, OFDM.
- 802.11ac(VHT80) Mode: MCS0, OFDM.

Support Bandwidth For 5G WIFI Part:

Bandwidth Mode	20MHz	40MHz	80MHz
802.11a	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
802.11n(HT20)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
802.11n(HT40)	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
802.11ac(VHT20)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
802.11ac(VHT40)	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
802.11ac(VHT80)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Channel & Frequency:

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
5180~5240MHz	36	5180	44	5220
	38	5190	46	5230
	40	5200	48	5240
	42	5210	/	/

For 802.11a/n(HT20)/ac(VHT20), Channel 36, 44 and 48 were tested.
 For 802.11n(HT40)/ac(VHT40), Channel 38 and 46 were tested.
 For 802.11ac(VHT80), Channel 42 was tested.

Note: for BLE, only R-SMA antenna is used, for 2.4G & 5G Wi-Fi, both the R-SMA and FPC antenna are used.

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure 789033 D02 General UNII Test Procedures New Rules v01r03 is required to be used for this kind of FCC 15.407 UII device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E

2.3. General Test Procedures

2.3.1 Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmit condition.

3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (RF test tool) provided by applicant.

3.3. Special Accessories

No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/ unshielded	Notes
1	PC	Lenovo	Ideapad	A131101550	/	/	DOC
2	Power adapter	Lenovo	CPA-A090	36200414	1.00m	unshielded	DOC

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart E		
FCC Rules	Description of Test	Result
§15.407(a)	Maximum Conducted Output Power	Compliant
§15.407(a)	Power Spectral Density	Compliant
§15.407(e)	6dB & 26dB Bandwidth	Compliant
§15.205, §15.407(b)	Radiated Spurious Emissions and Band Edge	Compliant
§15.407(g)	Frequency Stability	N/A
§15.407(h)	Transmit Power Control (TPC)	N/A
§15.207(a)	Line Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant

Note: The customer declared frequency stability is better than 20ppm which ensures that the signal remains in the allocated bands under all operational conditions stated in the user manual.

5. TEST RESULT

5.1. Maximum Conducted Output Power Measurement

5.1.1. Standard Applicable

According to §15.407(a)(1)(i), For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

According to §15.407(a)(1)(ii), For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.


According to §15.407(a)(1)(iv), For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

According to §15.407(a)(3), For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

5.1.2. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

5.1.3. Test Setup Layout

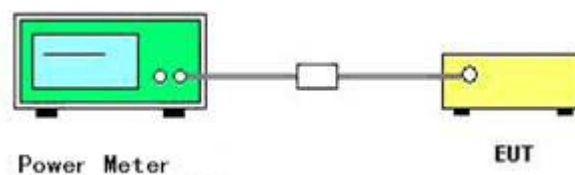

5.1.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.5. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	60%
Test Engineer	Chaz Liu	Configurations	802.11a/n/ac

Maximum Conducted Output Power Measurement Result For 5180~5240MHz Band

Mode	Channel	Frequency (MHz)	Conducted Power (dBm, Average)			Max. Limit (dBm)	Result
			Ant 0	Ant 1	Sum		
802.11a	36	5180	14.78	14.82	/	24	Complies
	44	5220	14.76	14.19	/	24	Complies
	48	5240	15.09	14.54	/	24	Complies
802.11n(HT20)	36	5180	14.12	13.87	17.01	24	Complies
	44	5220	14.02	13.73	16.89	24	Complies
	48	5240	14.25	13.60	16.95	24	Complies
802.11n(HT40)	38	5190	14.31	13.97	17.16	24	Complies
	46	5230	14.25	13.71	17.00	24	Complies
802.11ac(VHT20)	36	5180	14.06	13.79	16.94	24	Complies
	44	5220	14.10	13.49	16.82	24	Complies
	48	5240	14.70	13.98	17.36	24	Complies
802.11ac(VHT40)	38	5190	14.27	13.92	17.11	24	Complies
	46	5230	14.23	14.16	17.21	24	Complies
802.11ac(VHT80)	42	5210	14.07	13.55	16.83	24	Complies

5.2. Power Spectral Density Measurement

5.2.1. Standard Applicable

According to §15.407(a)(1)(i), For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

According to §15.407(a)(1)(ii), For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.


According to §15.407(a)(1)(iv), For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

According to §15.407(a)(3), For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

5.2.2. Test Procedures

- 1) The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
- 2) The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
- 3) Set the RBW/VBW = 1MHz/3MHz For the 5.15-5.25GHz band;
Set the RBW/VBW = 100KHz/300KHz For the 5.725-5.85GHz band.
- 4) Set the span to encompass the entire emission bandwidth of the signal.
- 5) Detector = RMS.
- 6) Sweep time = auto couple.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.

5.2.3. Test Setup Layout

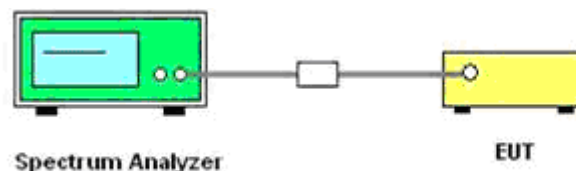

5.2.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.5. Test Result of Power Spectral Density


Temperature	25°C	Humidity	60%
Test Engineer	Chaz Liu	Configurations	802.11a/n/ac

Power Spectral Density Measurement Result For 5180~5240MHz Band

Mode	Channel	Frequency (MHz)	Power Density (dBm/MHz)			Max. Limit (dBm/MHz)	Result
			Ant 0	Ant 1	Sum		
802.11a	36	5180	4.870	4.475	/	11	Complies
	44	5220	4.472	4.433	/	11	Complies
	48	5240	4.767	4.957	/	11	Complies
802.11n(HT20)	36	5180	4.474	3.767	7.15	11	Complies
	44	5220	4.095	3.582	6.86	11	Complies
	48	5240	4.971	3.585	7.34	11	Complies
802.11n(HT40)	38	5190	2.654	1.934	5.32	11	Complies
	46	5230	2.707	2.239	5.49	11	Complies
802.11ac(VHT20)	36	5180	4.480	3.542	7.05	11	Complies
	44	5220	4.689	3.391	7.10	11	Complies
	48	5240	4.536	3.825	7.21	11	Complies
802.11ac(VHT40)	38	5190	2.455	1.732	5.12	11	Complies
	46	5230	2.900	1.596	5.31	11	Complies
802.11ac(VHT80)	42	5210	1.025	-1.156	3.08	11	Complies


The measured power density (dBm) has the offset with cable loss already.

Test Result of Power Spectral Density-ant 0

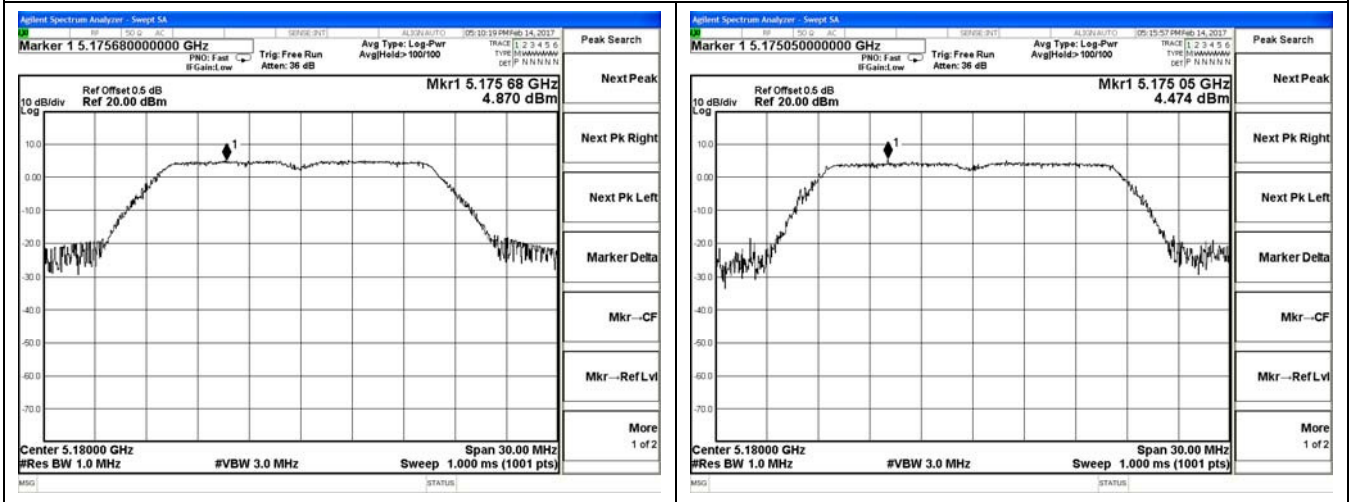


802.11a_Low Channel / 5180MHz

802.11n HT20_Low Channel / 5180MHz

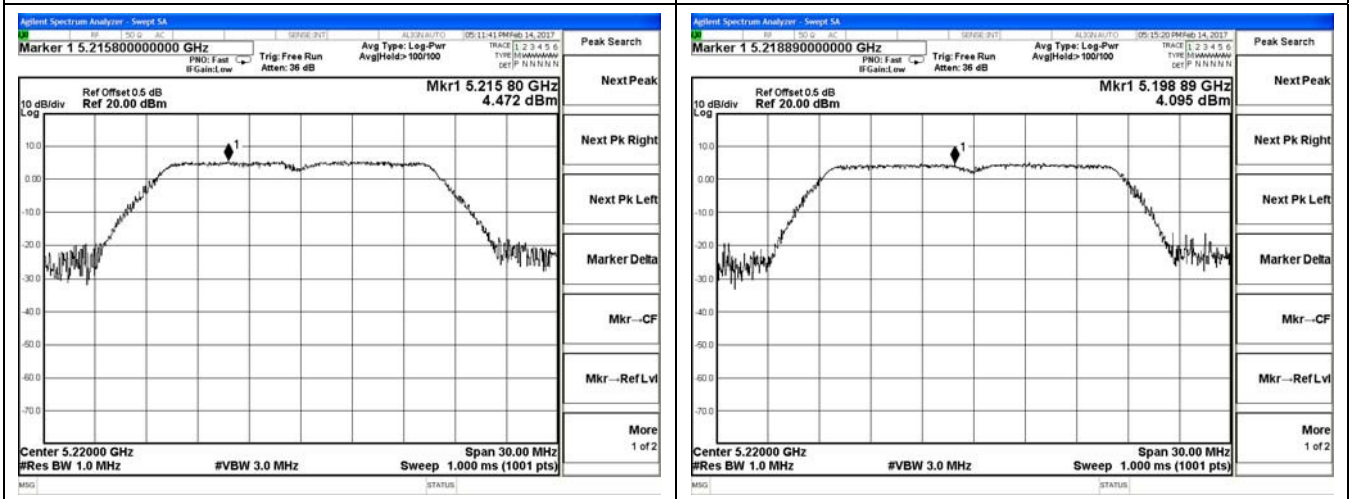

802.11a_Middle Channel / 5220MHz



802.11n HT20_Middle Channel / 5220MHz

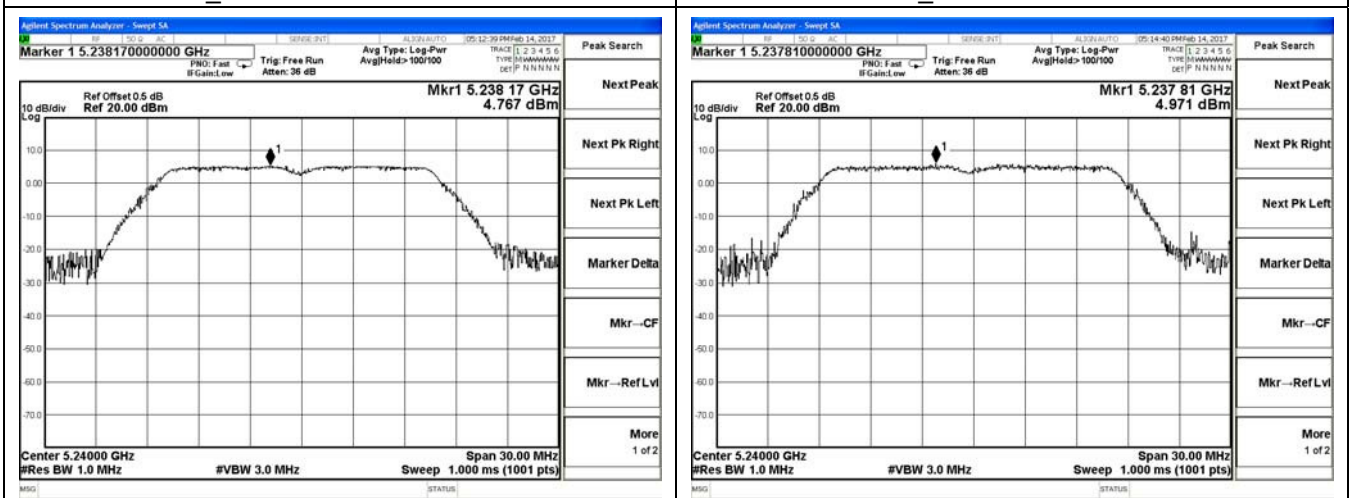

802.11a_High Channel / 5240MHz



802.11n HT20_High Channel / 5240MHz

Test Result of Power Spectral Density-ant 0

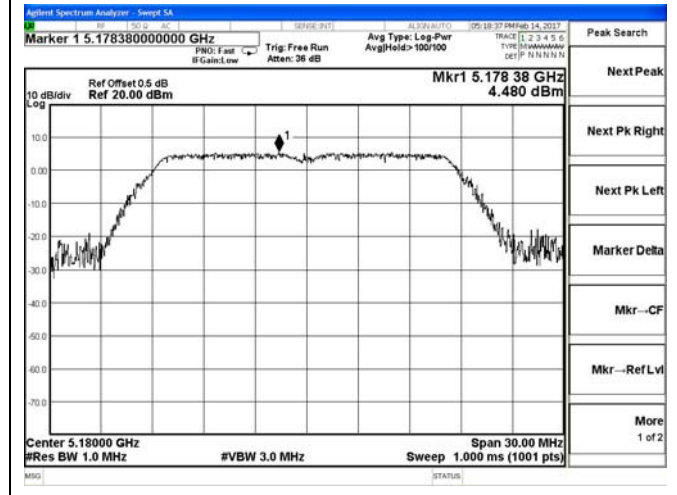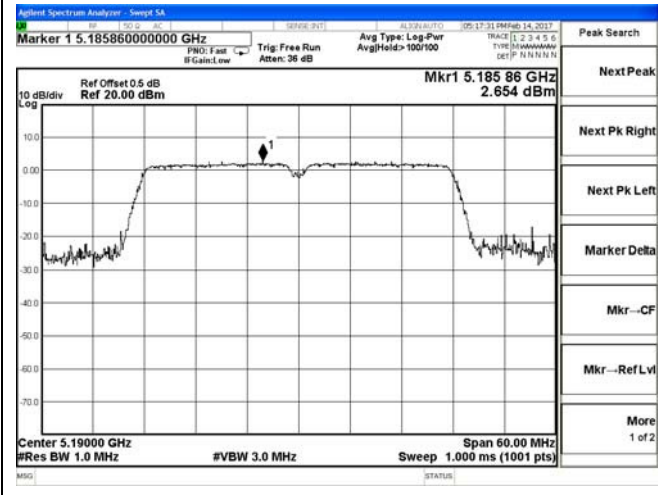


802.11n HT40_Low Channel / 5190MHz

802.11ac VHT20_Low Channel / 5180MHz

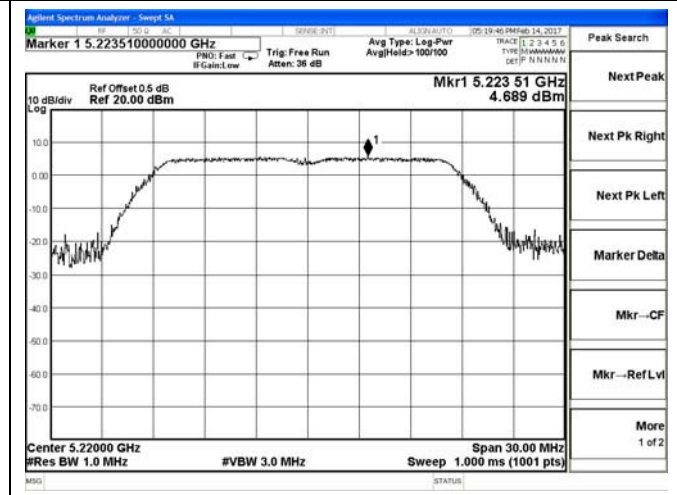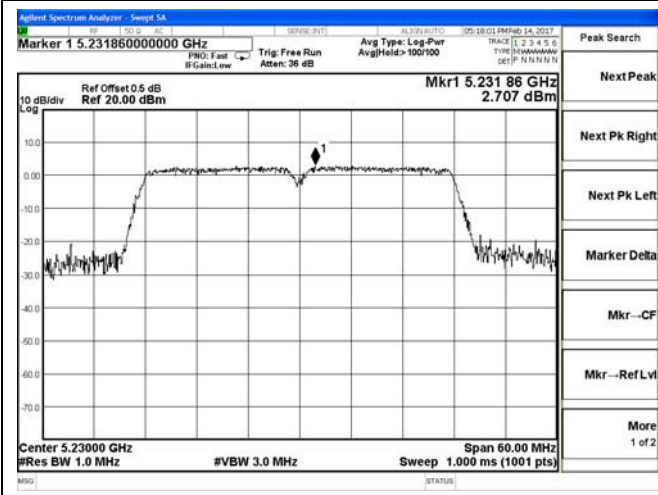



802.11n HT40_High Channel / 5230MHz

802.11ac VHT20_Mid Channel / 5220MHz

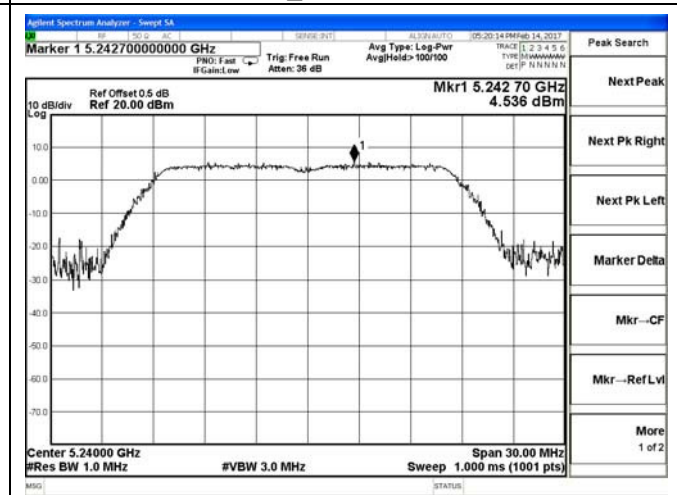


802.11ac VHT20_High Channel / 5240MHz

Test Result of Power Spectral Density-ant 0

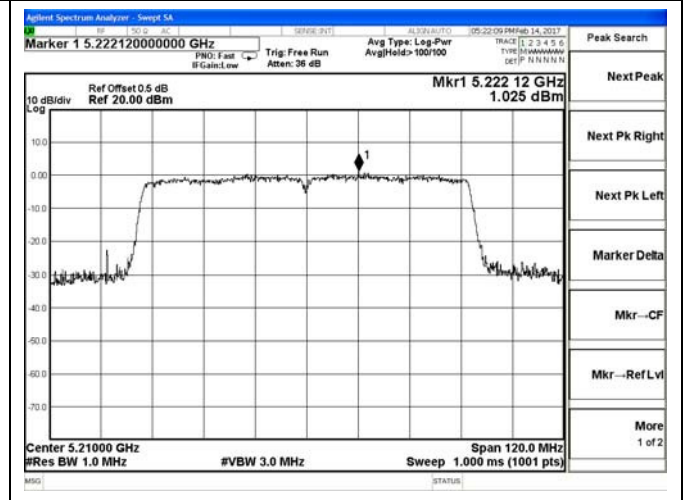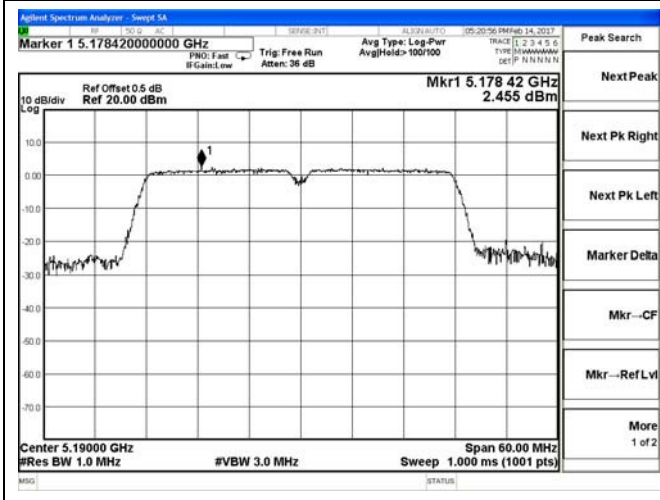



802.11ac VHT40_Low Channel / 5190MHz

802.11ac VHT80_5210MHz

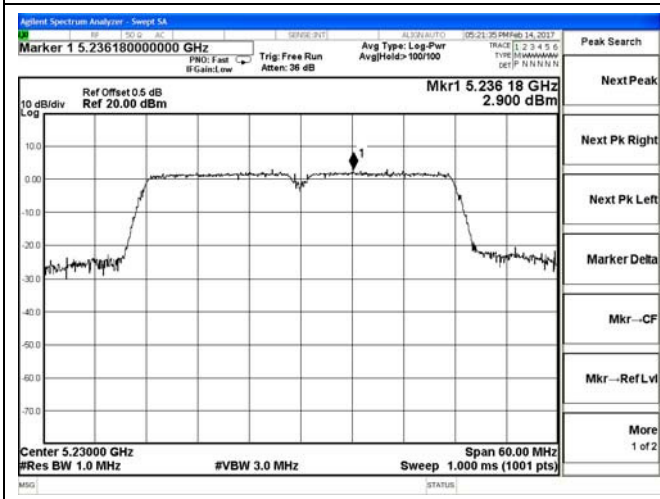



802.11ac VHT40_High Channel / 5230MHz

Test Result of Power Spectral Density-ant 1

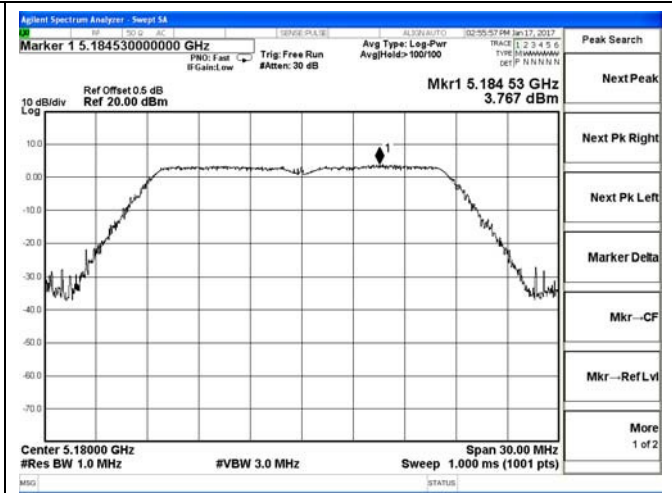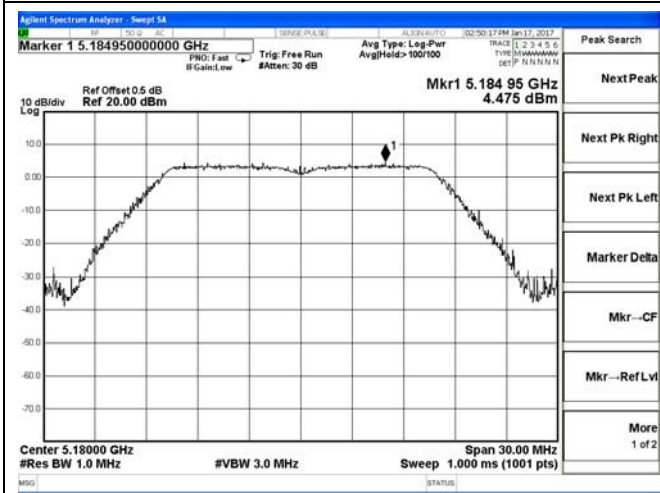



802.11a_Low Channel / 5180MHz

802.11n HT20_Low Channel / 5180MHz

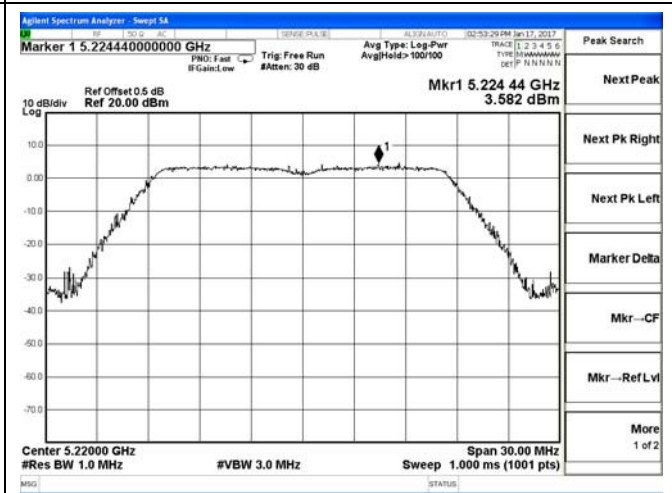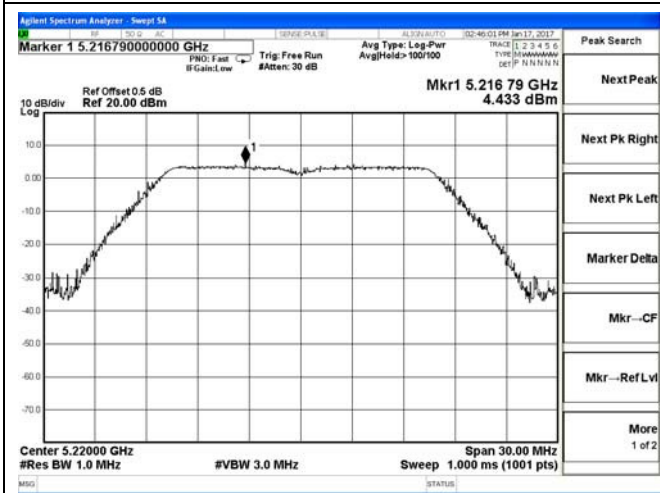

802.11a_Middle Channel / 5220MHz



802.11n HT20_Middle Channel / 5220MHz

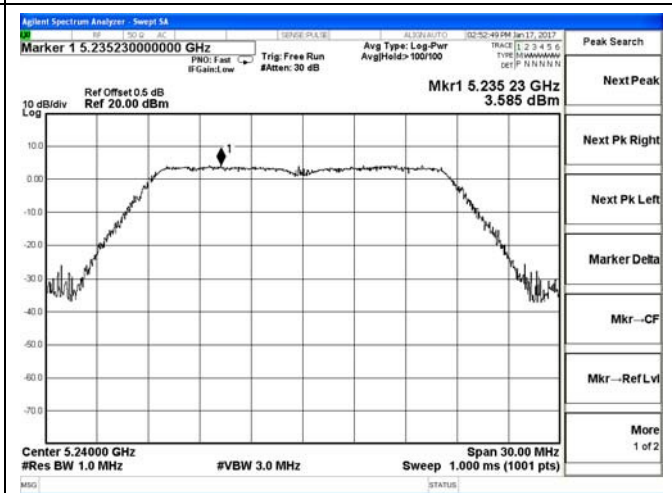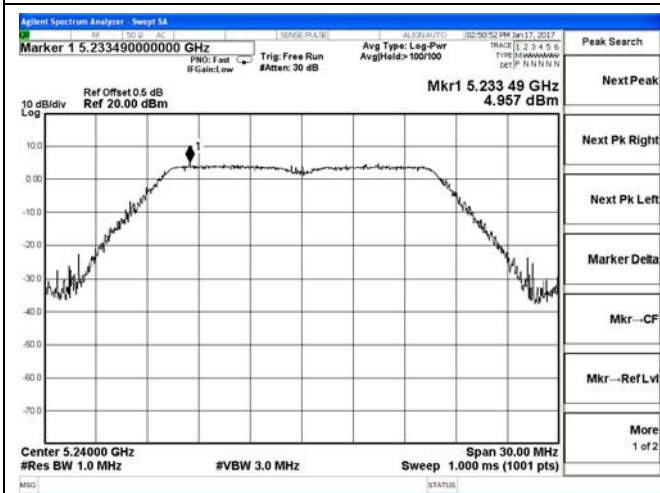

802.11a_High Channel / 5240MHz



802.11n HT20_High Channel / 5240MHz

Test Result of Power Spectral Density-ant 1

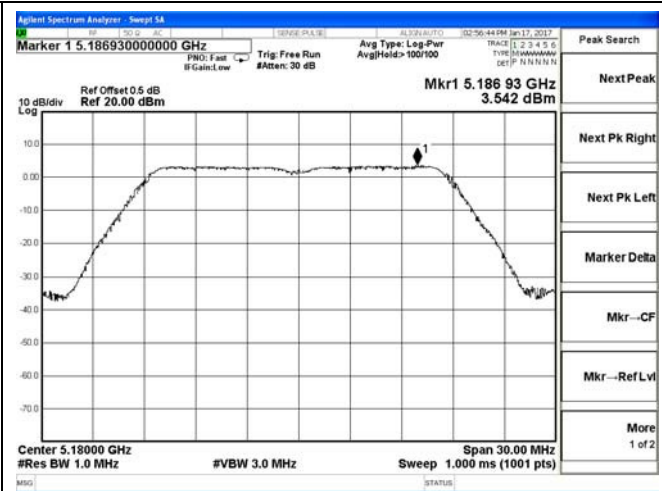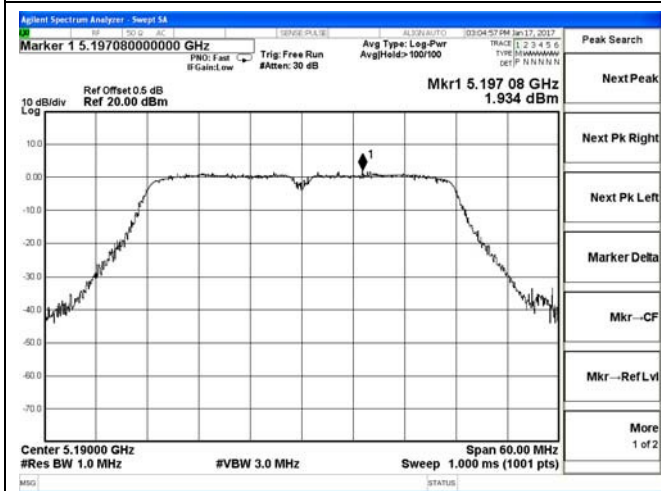


802.11n HT40_Low Channel / 5190MHz

802.11ac VHT20_Low Channel / 5180MHz

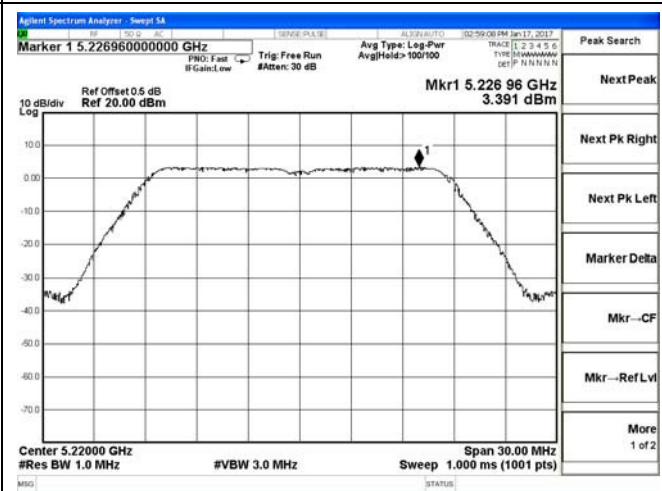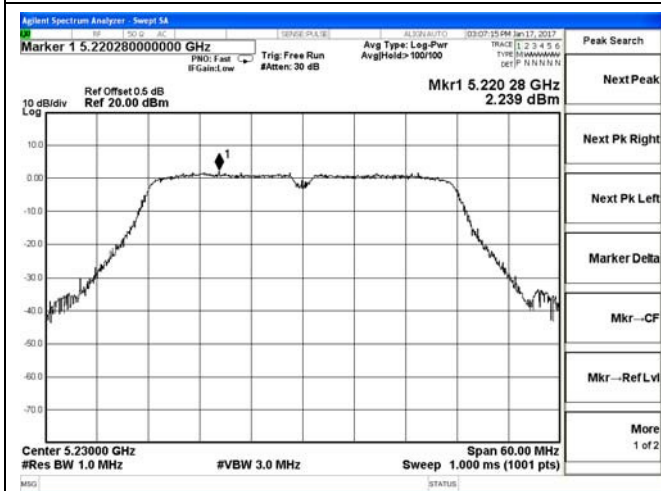



802.11n HT40_High Channel / 5230MHz

802.11ac VHT20_Mid Channel / 5220MHz

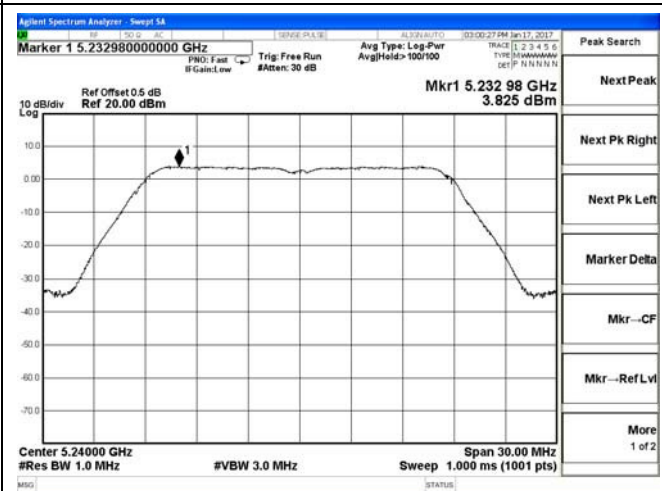


802.11ac VHT20_High Channel / 5240MHz

Test Result of Power Spectral Density-ant 1

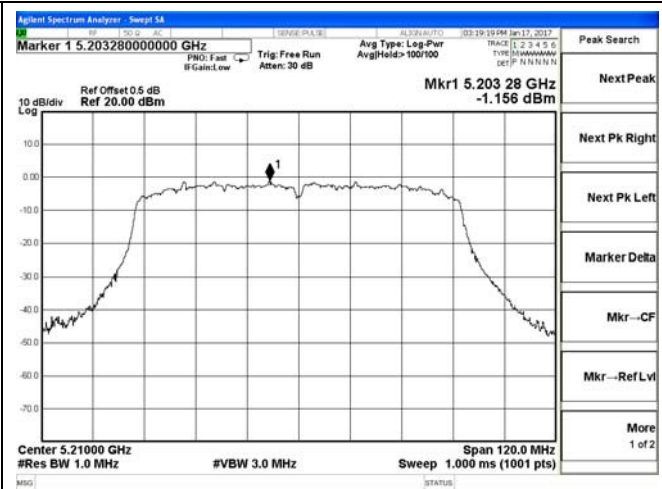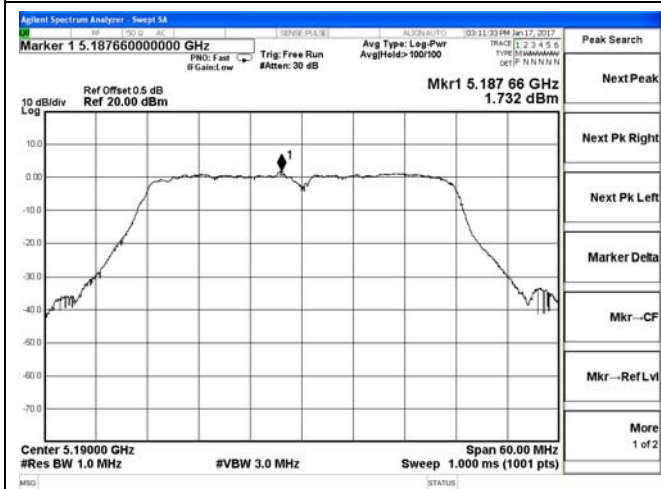

802.11ac VHT40_Low Channel / 5190MHz

802.11ac VHT80_5210MHz

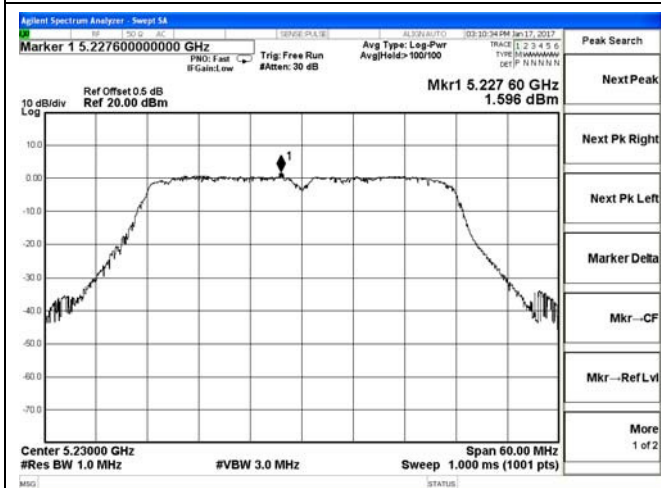

802.11ac VHT40_High Channel / 5230MHz

5.3. 6dB & 26dB Bandwidth Measurement

5.3.1. Standard Applicable

According to §15.407(e): Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

There is no restriction limits for 26dB & 99% occupied bandwidth, report only for reference.

5.3.2. Instruments Setting

The following table is the setting of the Spectrum Analyzer.

6dB Bandwidth Measurement (Only For 5745~5825MHz Band)	
Spectrum Parameter	Setting
Attenuation	Auto
RBW	100KHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold


26dB & 99%Bandwidth Measurement (Only For 5180~5240MHz Band)	
Spectrum Parameter	Setting
Attenuation	Auto
RBW	approximately 1% of the emission bandwidth
VBW	$\geq \text{RBW}$
Detector	Peak
Trace	Max Hold

5

5.3.3. Test Procedures

- 1) The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- 2) The resolution bandwidth and the video bandwidth were set according to KDB 789033 D02 General UNII Test Procedures New Rules v01r03
- 3) For 5745~5825MHz Band, Measured the maximum width of the emission that is 6dB down from the peak of the emission.
- 4) For 5180~5240MHz Band, Measured the maximum width of the emission that is 26dB down from the peak of the emission. Record the 26dB & 99% Bandwidth.

5.3.4. Test Setup Layout

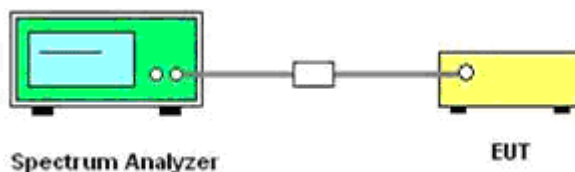

5.3.5. EUT Operation during Test



The EUT was programmed to be in continuously transmitting mode.

5.3.6. Test Result of Spectrum Bandwidth

Temperature	25°C	Humidity	60%
Test Engineer	Chaz Liu	Configurations	802.11a/n/ac



Mode	Channel	Frequency (MHz)	26dB BW (MHz)		99% BW (MHz)		Limit
			Ant 0	Ant 1	Ant 0	Ant 1	
802.11a	36	5180	22.66	21.56	17.054	17.074	Non-specified
	44	5220	22.42	21.71	17.119	17.086	
	48	5240	22.16	21.76	17.022	17.077	
802.11n(HT20)	36	5180	22.39	25.70	18.051	18.126	
	44	5220	22.25	25.99	18.024	18.202	
	48	5240	22.41	26.24	18.061	18.180	
802.11n(HT40)	38	5190	43.85	49.49	36.207	36.426	
	46	5230	42.72	48.21	36.205	36.412	
802.11ac(VHT20)	36	5180	22.34	23.23	18.065	17.183	
	44	5220	22.16	23.11	18.067	18.096	
	48	5240	22.18	22.36	18.026	18.049	
802.11ac(VHT40)	38	5190	42.28	40.38	36.191	36.412	
	46	5230	42.40	48.34	36.211	36.368	
802.11ac(VHT80)	38	5190	84.36	91.58	74.674	75.956	

Test Result of 26dB Bandwidth & 99% Bandwidth-ant 0

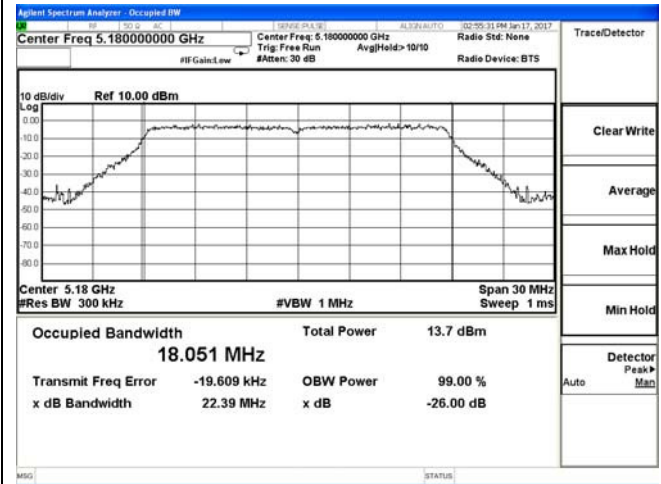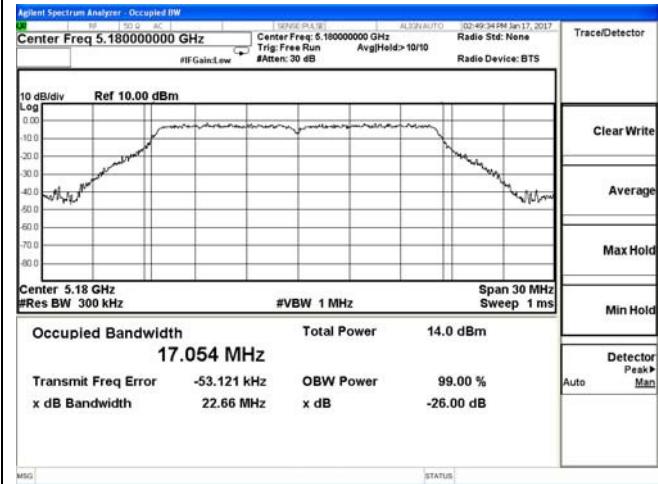



802.11a_Low Channel / 5180MHz

802.11n HT20_Low Channel / 5180MHz

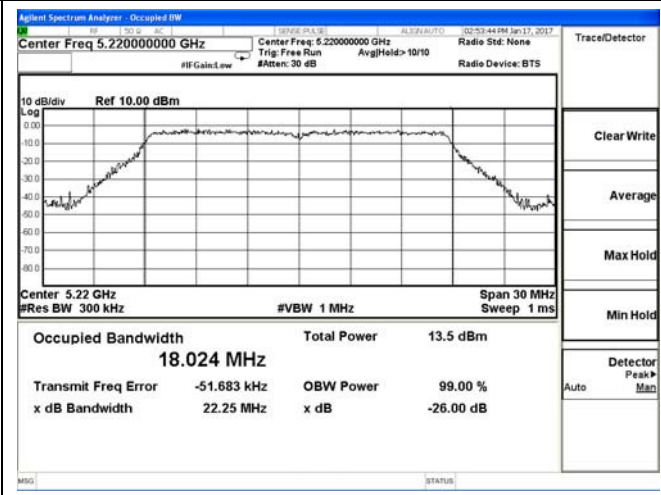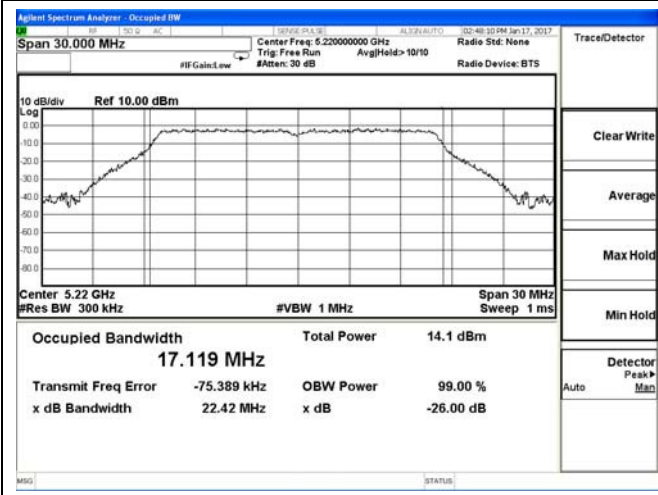

802.11a_Middle Channel / 5220MHz



802.11n HT20_Middle Channel / 5220MHz

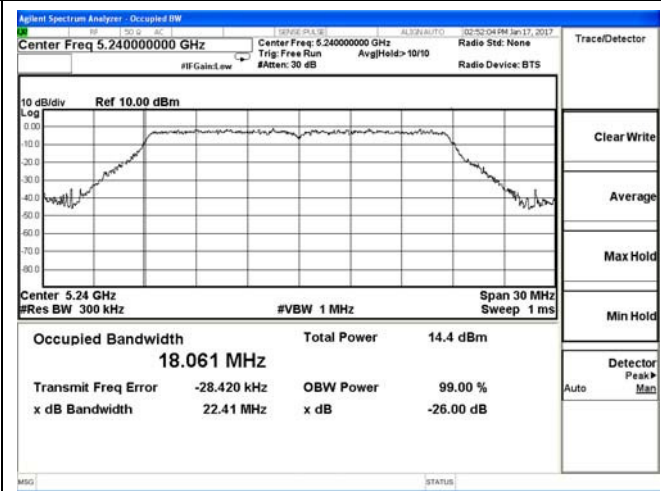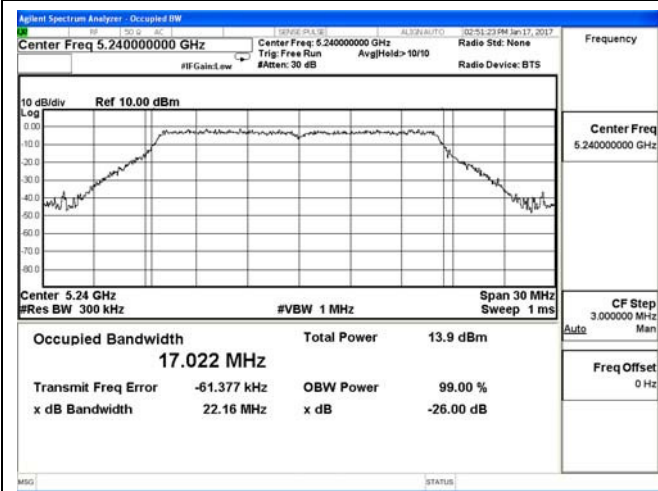

802.11a_High Channel / 5240MHz



802.11n HT20_High Channel / 5240MHz

Test Result of 26dB Bandwidth & 99% Bandwidth-ant 0

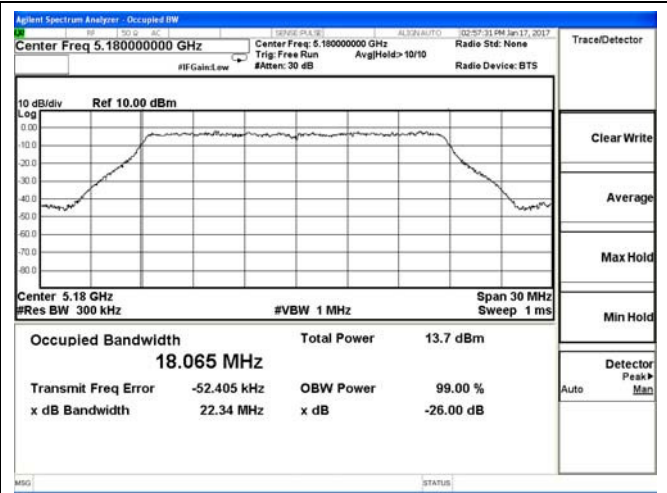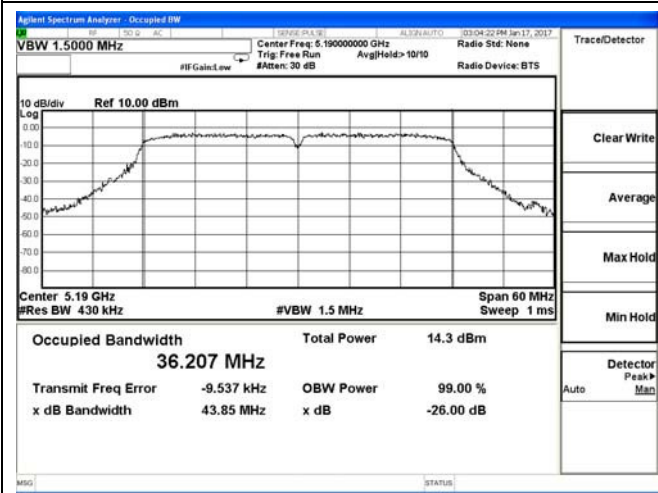

802.11n HT40_Low Channel / 5190MHz

802.11ac_VHT20_Low Channel / 5180MHz

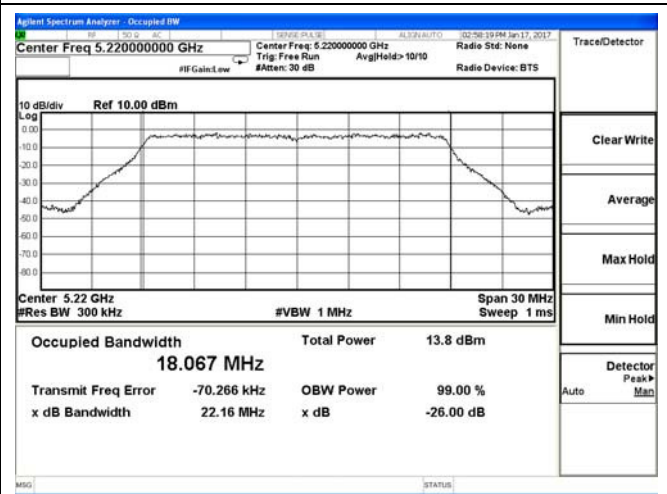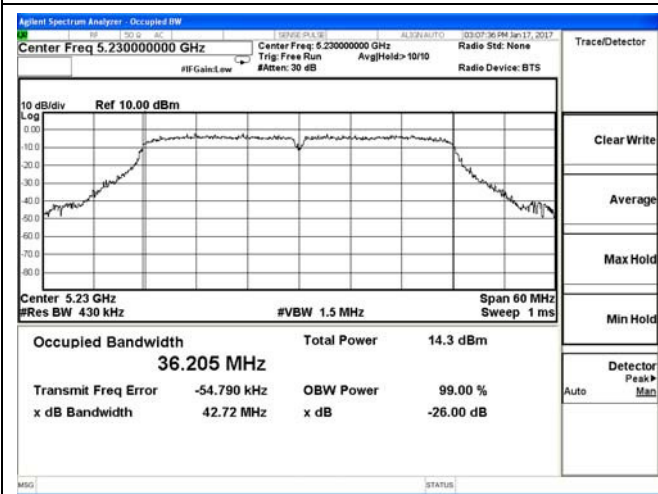



802.11n HT40_High Channel / 5230MHz

802.11ac_VHT20_Middle Channel / 5220MHz




802.11ac_VHT20_High Channel / 5240MHz

Test Result of 26dB Bandwidth & 99% Bandwidth-ant 0

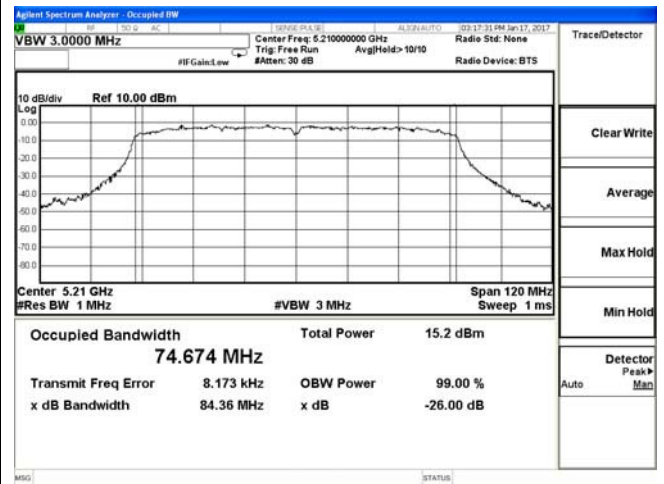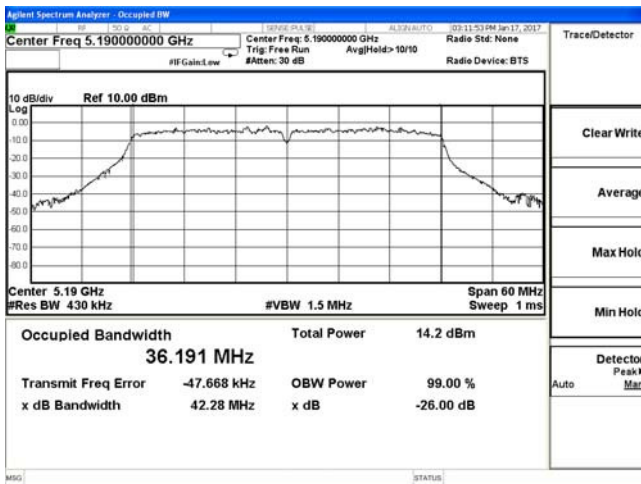



802.11ac_VHT40_Low Channel / 5190MHz

802.11ac_VHT80_5210MHz

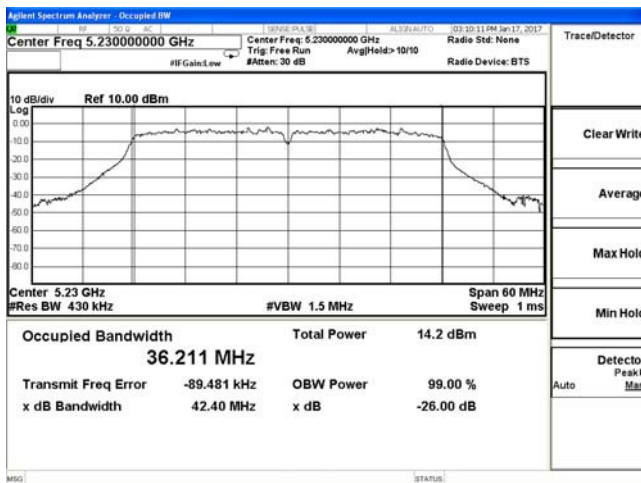



802.11ac_VHT40_High Channel / 5230MHz

Test Result of 26dB Bandwidth & 99% Bandwidth-ant 1

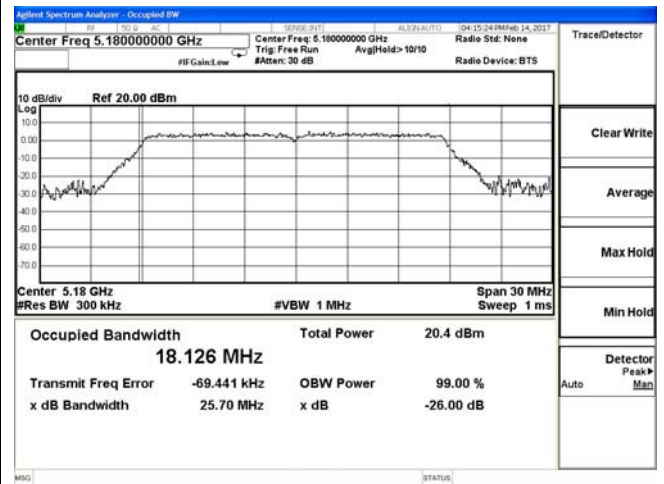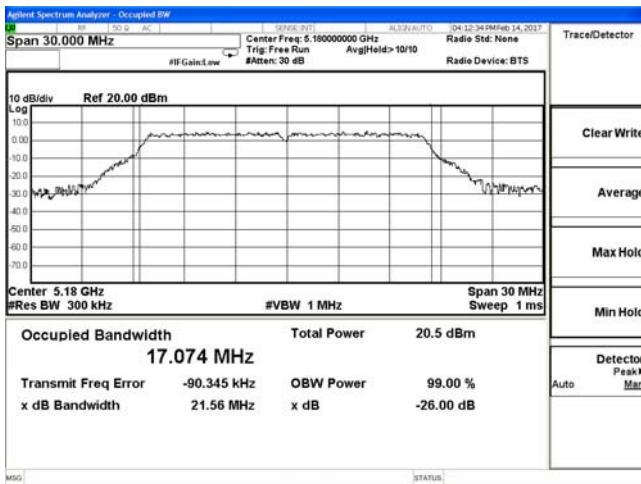



802.11a_Low Channel / 5180MHz

802.11n HT20_Low Channel / 5180MHz

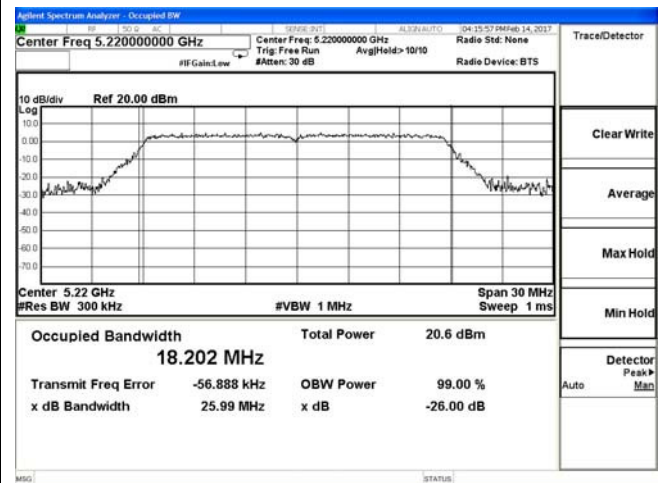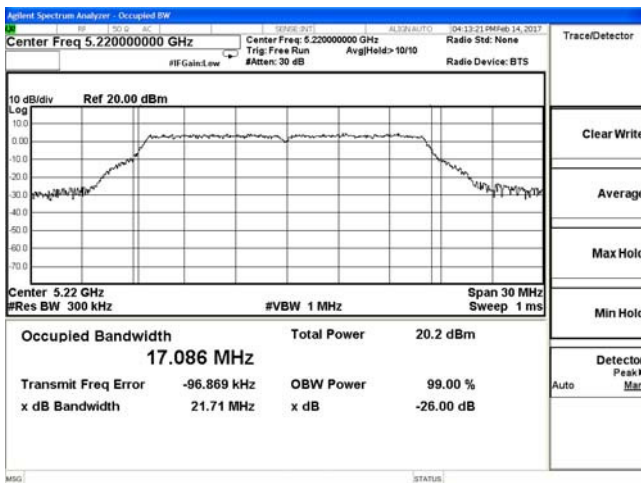

802.11a_Middle Channel / 5220MHz



802.11n HT20_Middle Channel / 5220MHz

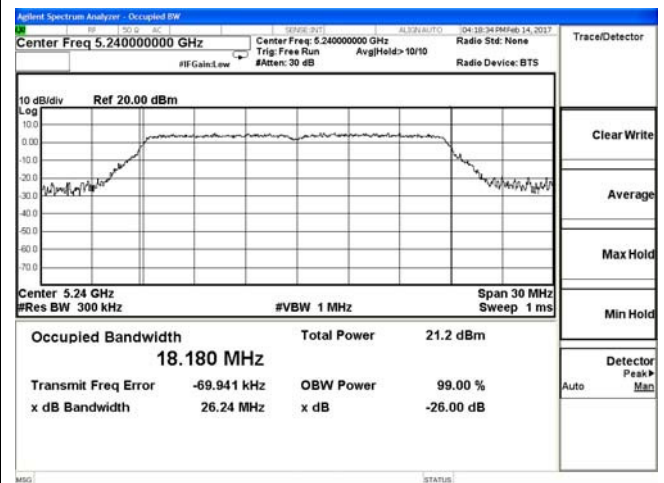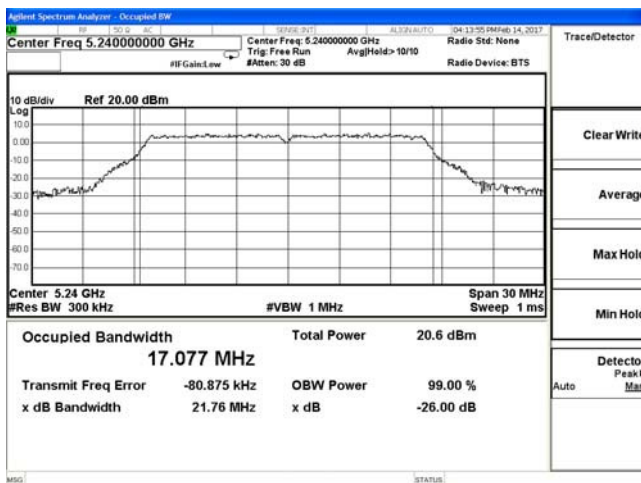

802.11a_High Channel / 5240MHz



802.11n HT20_High Channel / 5240MHz

Test Result of 26dB Bandwidth & 99% Bandwidth-ant 1

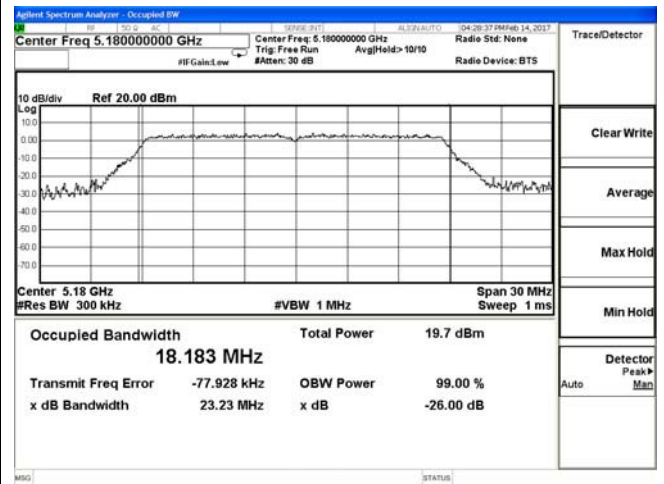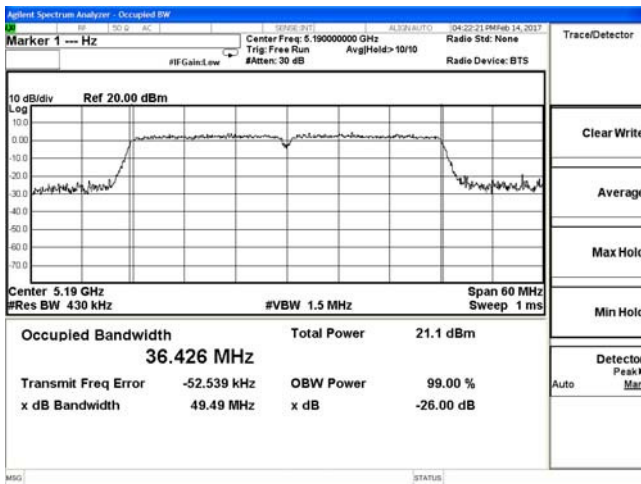


802.11n HT40_Low Channel / 5190MHz

802.11ac_VHT20_Low Channel / 5180MHz

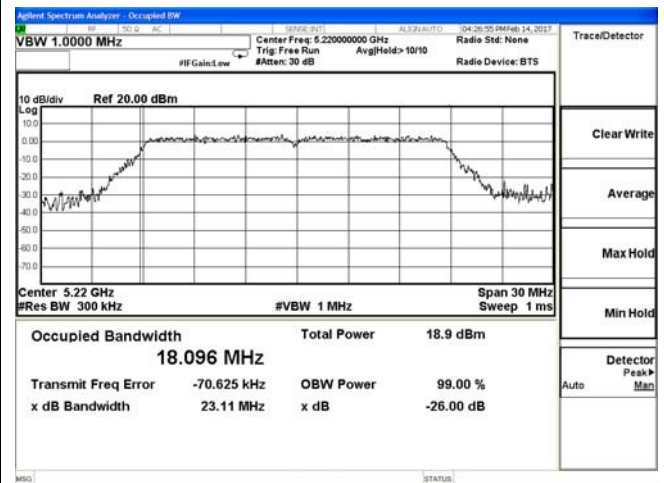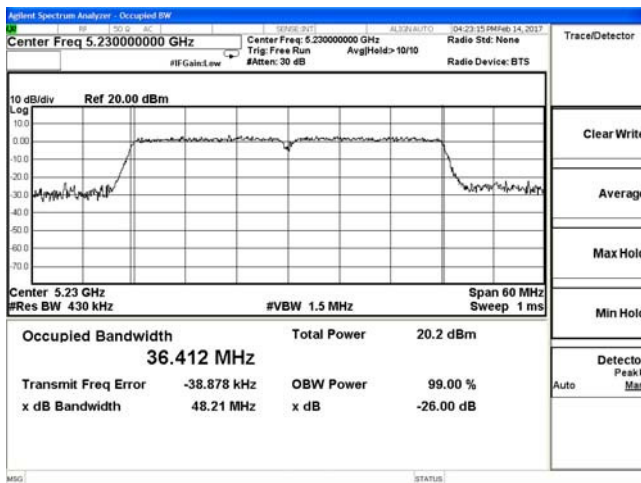



802.11n HT40_High Channel / 5230MHz

802.11ac_VHT20_Middle Channel / 5220MHz

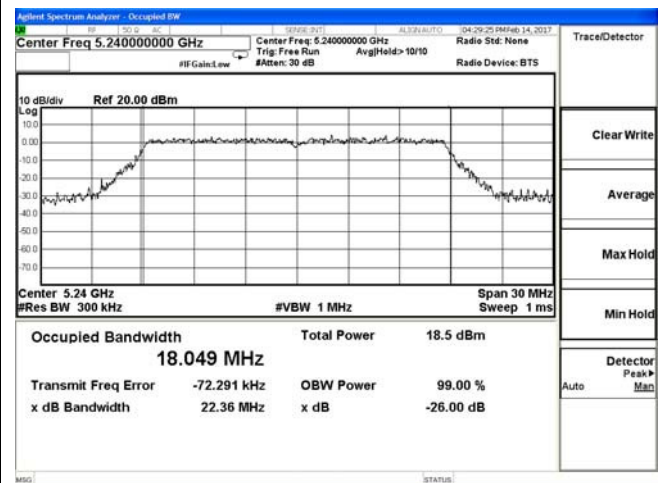


802.11ac_VHT20_High Channel / 5240MHz

Test Result of 26dB Bandwidth & 99% Bandwidth-ant 1

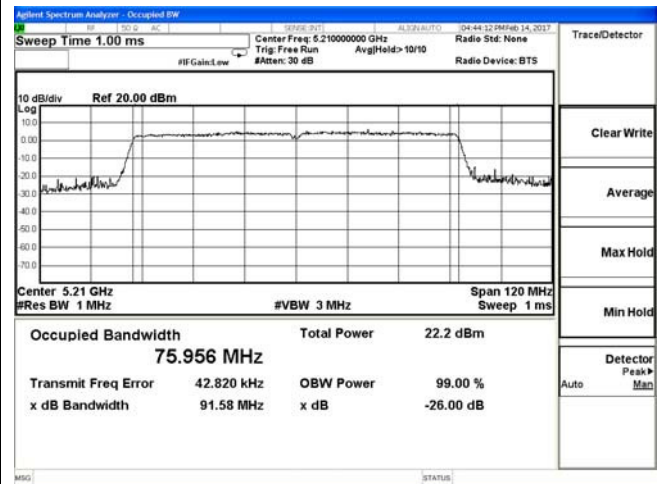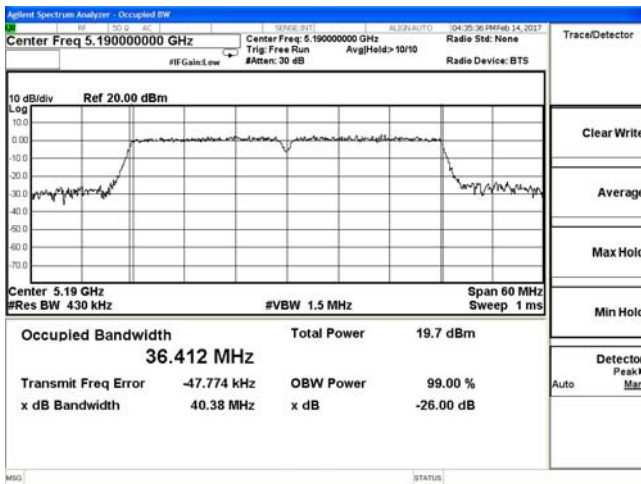

802.11ac_VHT40_Low Channel / 5190MHz

802.11ac_VHT80_5210MHz

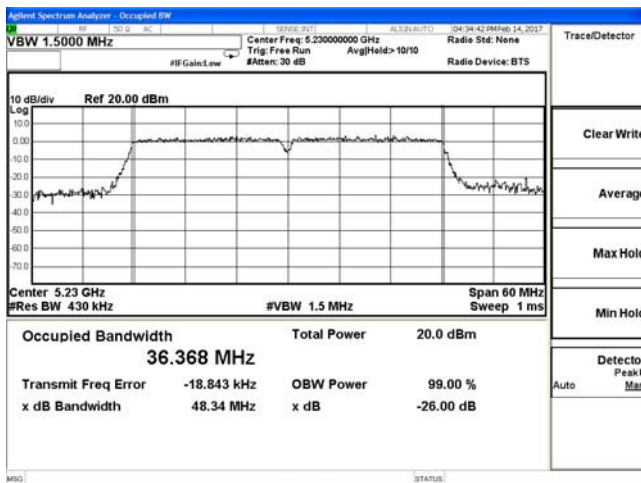

802.11ac_VHT40_High Channel / 5230MHz

5.4. Radiated Emissions Measurement

5.4.1. Standard Applicable

According to §15.407 (b)(1) to (6):

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m at 3m).

For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz (78.2dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m at 3m).

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies(MHz)	Field Strength(microvolts/meter)	Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

5.4.2. Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

5.4.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarisations of the antenna.


Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


5.4.4. Test Setup Layout

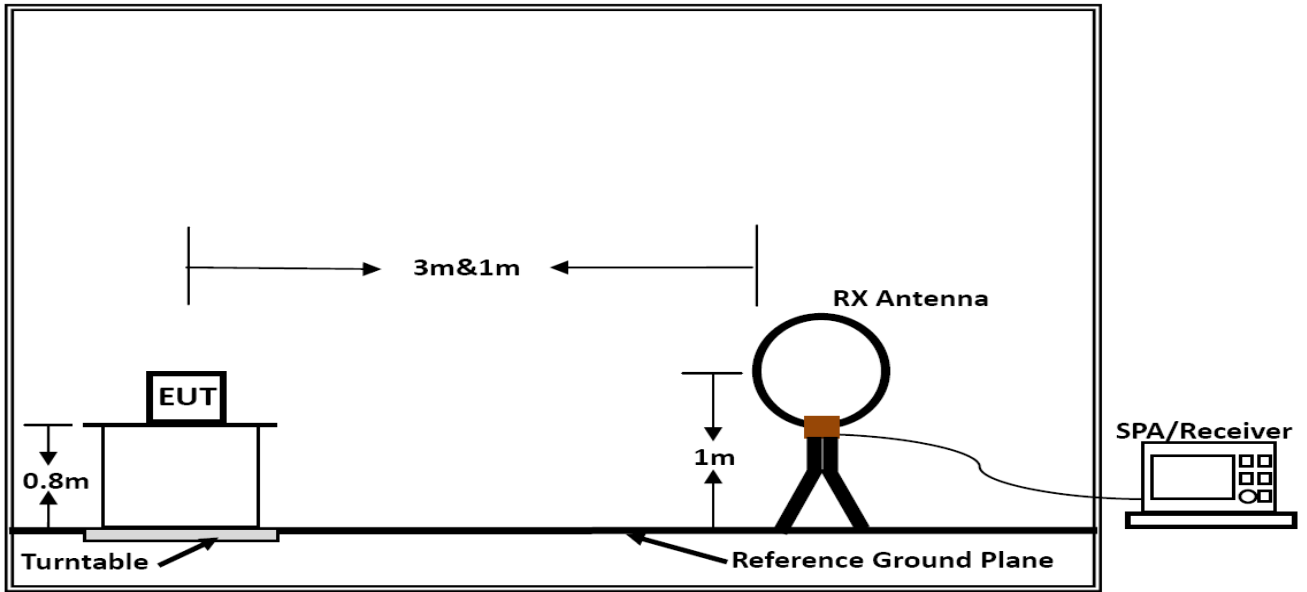

Below 30MHz

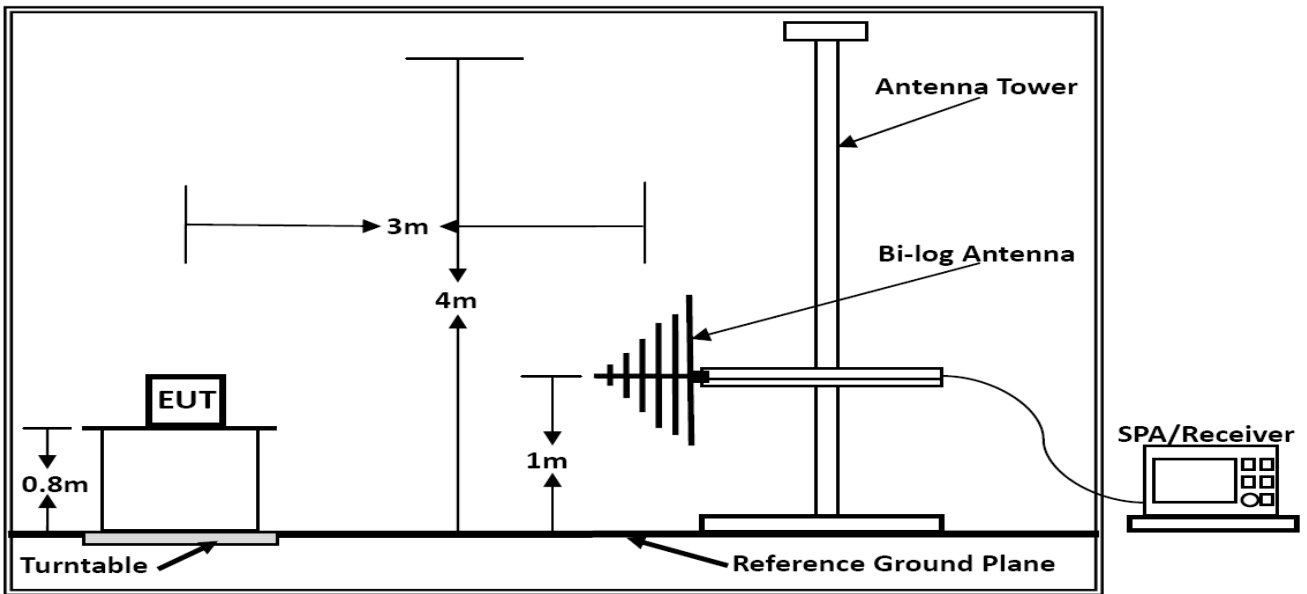

Below 1GHz

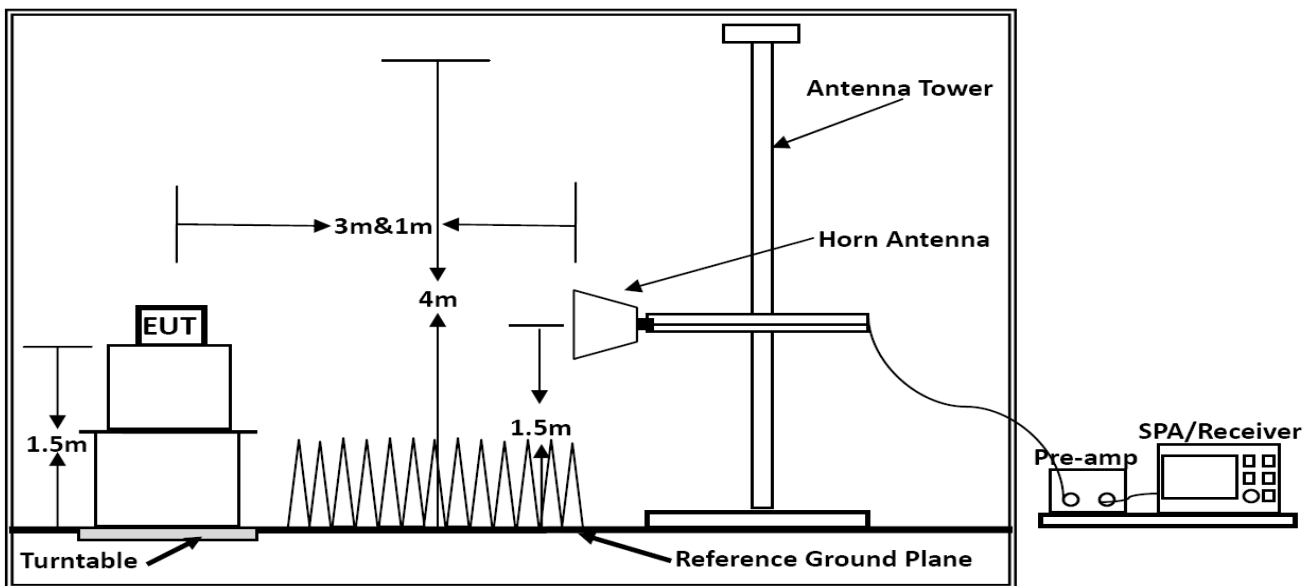

Above 1GHz

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	60%
Test Engineer	Chaz Liu	Configurations	802.11a/n

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note


Note:

The radiated emissions from 9kHz to 30MHz are at least 20dB below the official limit and no need to report.

5.4.7. Results of Radiated Emissions (30MHz~1GHz)

Note: Only record the worst test result in this report.


Horizontal:

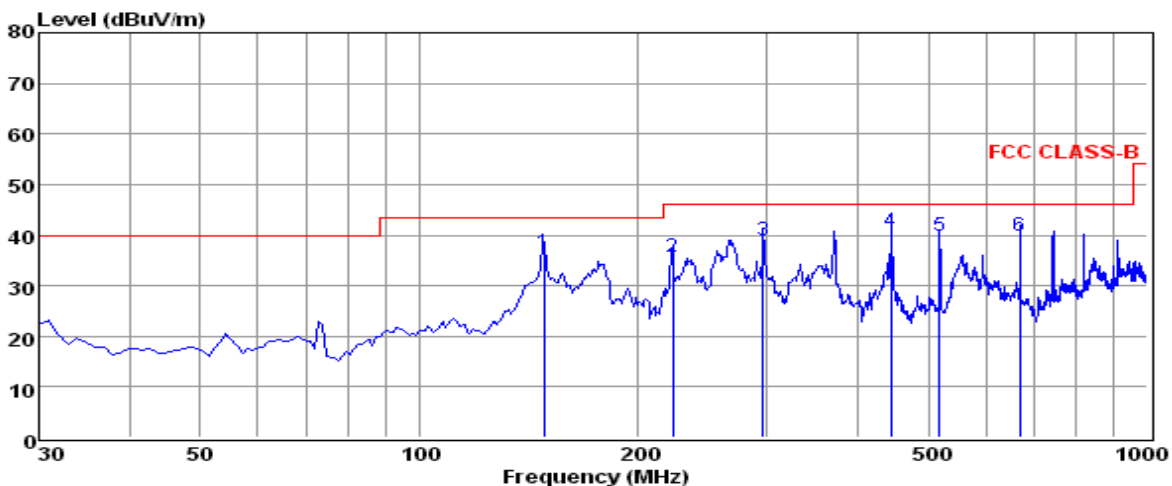

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	148.34	27.47	0.86	8.25	36.58	43.50	-6.92	QP
2	223.03	23.44	0.95	11.33	35.72	46.00	-10.28	QP
3	296.75	24.92	1.12	13.00	39.04	46.00	-6.96	QP
4	445.16	23.68	1.42	15.57	40.67	46.00	-5.33	QP
5	518.88	21.37	1.47	16.93	39.77	46.00	-6.23	QP
6	668.26	19.44	1.71	18.70	39.85	46.00	-6.15	QP

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

Vertical:

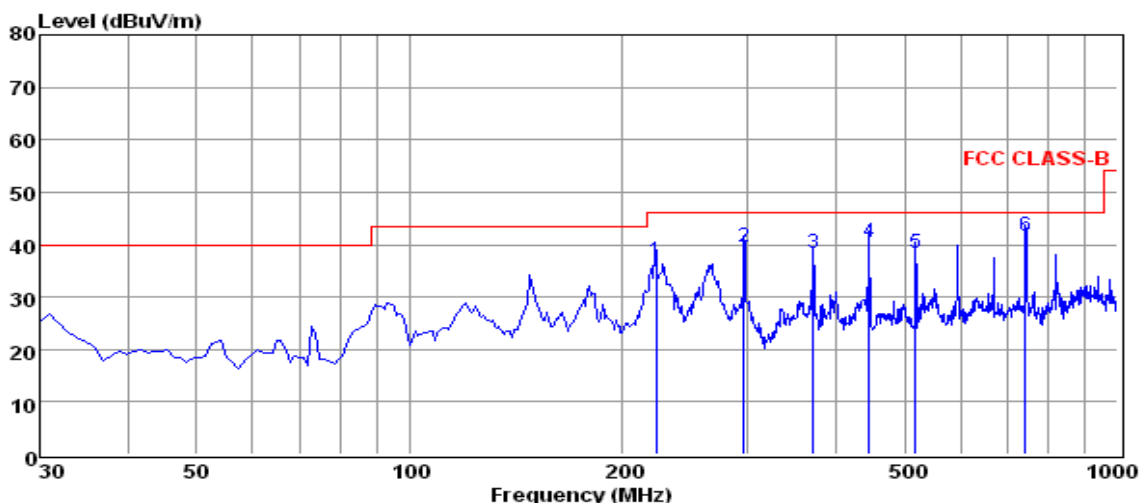

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	223.03	24.57	0.95	11.33	36.85	46.00	-9.15	QP
2	296.75	25.42	1.12	13.00	39.54	46.00	-6.46	QP
3	371.44	22.72	1.20	14.52	38.44	46.00	-7.56	QP
4	446.13	23.58	1.42	15.57	40.57	46.00	-5.43	QP
5	518.88	20.00	1.47	16.93	38.40	46.00	-7.60	QP
6	741.98	20.55	1.78	19.33	41.66	46.00	-4.34	QP

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

***Note:

Pre-scan all mode and recorded the worst case results in this report (802.11a mode(High Channel)@AC120V).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Only recorded the worst test case in this report.

5.4.8. Results for Radiated Emissions (Above 1GHz)

Note: Only recorded the worst test result of ant 0 in this report.

The Worst Test Result For 5180~5240MHz Band.

802.11a / Channel 36

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
10.36	45.56	33.21	35.82	9.52	52.47	68.20	-15.73	Peak	Horizontal
10.36	34.84	33.21	35.82	9.52	41.75	54.00	-12.25	Average	Horizontal
10.36	46.57	32.82	35.82	9.52	53.09	68.20	-15.11	Peak	Vertical
10.36	35.12	32.82	35.82	9.52	41.64	54.00	-12.36	Average	Vertical

802.11a / Channel 44

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
10.44	46.12	33.21	35.82	9.52	53.03	68.20	-15.17	Peak	Horizontal
10.44	35.38	33.21	35.82	9.52	42.29	54.00	-11.71	Average	Horizontal
10.44	47.24	32.82	35.82	9.52	53.76	68.20	-14.44	Peak	Vertical
10.44	35.65	32.82	35.82	9.52	42.17	54.00	-11.83	Average	Vertical

802.11a / Channel 48

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
10.48	46.54	33.21	35.82	9.52	53.45	68.20	-14.75	Peak	Horizontal
10.48	35.86	33.21	35.82	9.52	42.77	54.00	-11.23	Average	Horizontal
10.48	47.86	32.82	35.82	9.52	54.38	68.20	-13.82	Peak	Vertical
10.48	36.32	32.82	35.82	9.52	42.84	54.00	-11.16	Average	Vertical

802.11n(HT20) / Channel 36

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
10.36	45.24	33.21	35.82	9.52	52.15	68.20	-16.05	Peak	Horizontal
10.36	34.40	33.21	35.82	9.52	41.31	54.00	-12.69	Average	Horizontal
10.36	46.38	32.82	35.82	9.52	52.90	68.20	-15.30	Peak	Vertical
10.36	34.90	32.82	35.82	9.52	41.42	54.00	-12.58	Average	Vertical

802.11n(HT20) / Channel 44

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
10.44	45.98	33.21	35.82	9.52	52.89	68.20	-15.31	Peak	Horizontal
10.44	34.80	33.21	35.82	9.52	41.71	54.00	-12.29	Average	Horizontal
10.44	46.86	32.82	35.82	9.52	53.38	68.20	-14.82	Peak	Vertical
10.44	35.41	32.82	35.82	9.52	41.93	54.00	-12.07	Average	Vertical

802.11n(HT20) / Channel 48

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
10.48	46.35	33.21	35.82	9.52	53.26	68.20	-14.94	Peak	Horizontal
10.48	35.32	33.21	35.82	9.52	42.23	54.00	-11.77	Average	Horizontal
10.48	47.35	32.82	35.82	9.52	53.87	68.20	-14.33	Peak	Vertical
10.48	35.95	32.82	35.82	9.52	42.47	54.00	-11.53	Average	Vertical

802.11n(HT40) / Channel 38

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
10.38	45.75	33.21	35.82	9.52	52.66	68.20	-15.54	Peak	Horizontal
10.38	34.91	33.21	35.82	9.52	41.82	54.00	-12.18	Average	Horizontal
10.38	47.20	32.82	35.82	9.52	53.72	68.20	-14.48	Peak	Vertical
10.38	35.71	32.82	35.82	9.52	42.23	54.00	-11.77	Average	Vertical

802.11n(HT40) / Channel 46

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
10.46	46.14	33.21	35.82	9.52	53.05	68.20	-15.15	Peak	Horizontal
10.46	35.59	33.21	35.82	9.52	42.50	54.00	-11.50	Average	Horizontal
10.46	47.18	32.82	35.82	9.52	53.70	68.20	-14.50	Peak	Vertical
10.46	35.66	32.82	35.82	9.52	42.18	54.00	-11.82	Average	Vertical

802.11ac VHT20 / Channel 36

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
10.36	45.23	33.21	35.82	9.52	52.14	68.20	-16.06	Peak	Horizontal
10.36	34.53	33.21	35.82	9.52	41.44	54.00	-12.56	Average	Horizontal
10.36	46.34	32.82	35.82	9.52	52.86	68.20	-15.34	Peak	Vertical
10.36	35.14	32.82	35.82	9.52	41.66	54.00	-12.34	Average	Vertical

802.11ac VHT20 / Channel 44

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
10.44	45.82	33.21	35.82	9.52	52.73	68.20	-15.47	Peak	Horizontal
10.44	35.02	33.21	35.82	9.52	41.93	54.00	-12.07	Average	Horizontal
10.44	47.05	32.82	35.82	9.52	53.57	68.20	-14.63	Peak	Vertical
10.44	35.63	32.82	35.82	9.52	42.15	54.00	-11.85	Average	Vertical

802.11ac VHT20 / Channel 48

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
10.48	46.40	33.21	35.82	9.52	53.31	68.20	-14.89	Peak	Horizontal
10.48	35.45	33.21	35.82	9.52	42.36	54.00	-11.64	Average	Horizontal
10.48	47.51	32.82	35.82	9.52	54.03	68.20	-14.17	Peak	Vertical
10.48	36.16	32.82	35.82	9.52	42.68	54.00	-11.32	Average	Vertical

802.11ac VHT40 / Channel 38

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
10.38	45.34	33.21	35.82	9.52	52.25	68.20	-15.95	Peak	Horizontal
10.38	34.54	33.21	35.82	9.52	41.45	54.00	-12.55	Average	Horizontal
10.38	46.60	32.82	35.82	9.52	53.12	68.20	-15.08	Peak	Vertical
10.38	34.93	32.82	35.82	9.52	41.45	54.00	-12.55	Average	Vertical

802.11ac VHT40 / Channel 46

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
10.46	45.94	33.21	35.82	9.52	52.85	68.20	-15.35	Peak	Horizontal
10.46	35.11	33.21	35.82	9.52	42.02	54.00	-11.98	Average	Horizontal
10.46	47.37	32.82	35.82	9.52	53.89	68.20	-14.31	Peak	Vertical
10.46	35.79	32.82	35.82	9.52	42.31	54.00	-11.69	Average	Vertical

802.11ac VHT80 / Channel 42

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
10.42	45.09	33.21	35.82	9.52	52.00	68.20	-16.20	Peak	Horizontal
10.42	34.19	33.21	35.82	9.52	41.10	54.00	-12.90	Average	Horizontal
10.42	46.54	32.82	35.82	9.52	53.06	68.20	-15.14	Peak	Vertical
10.42	34.59	32.82	35.82	9.52	41.11	54.00	-12.89	Average	Vertical

Notes:

1. Measuring frequencies from 9k~40GHz, No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 30MHz~40GHz were made with an instrument using Peak detector mode.
3. The radiated emissions from 18GHz to 40GHz are at least 20dB below the official limit and no need to report.

5.4.9. Results of Band Edges Test (Restricted Band)

Note: Only recorded the worst test result of ant 0 in this report.

IEEE 802.11a						
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Converted Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
4500.000	-50.818	2.50	46.88	Peak	68.20	PASS
4500.000	-61.769	2.50	35.93	Avg	54.00	PASS
5150.000	-51.034	2.50	46.67	Peak	68.20	PASS
5150.000	-59.266	2.50	38.43	Avg	54.00	PASS
5350.000	-49.777	2.50	47.92	Peak	68.20	PASS
5350.000	-60.064	2.50	37.64	Avg	54.00	PASS
5460.000	-50.995	2.50	46.71	Peak	68.20	PASS
5460.000	-60.818	2.50	36.88	Avg	54.00	PASS

IEEE 802.11n HT20						
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Converted Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
4500.000	-52.279	2.50	45.42	Peak	68.20	PASS
4500.000	-61.355	2.50	36.35	Avg	54.00	PASS
5150.000	-49.655	2.50	48.05	Peak	68.20	PASS
5150.000	-60.051	2.50	37.65	Avg	54.00	PASS
5350.000	-52.754	2.50	44.95	Peak	68.20	PASS
5350.000	-60.409	2.50	37.29	Avg	54.00	PASS
5460.000	-52.927	2.50	44.77	Peak	68.20	PASS
5460.000	-60.512	2.50	37.19	Avg	54.00	PASS

IEEE 802.11n HT40						
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Converted Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
4500.000	-51.455	2.50	46.25	Peak	68.20	PASS
4500.000	-61.179	2.50	36.52	Avg	54.00	PASS
5150.000	-46.367	2.50	51.33	Peak	68.20	PASS
5150.000	-57.504	2.50	40.20	Avg	54.00	PASS
5350.000	-51.972	2.50	45.73	Peak	68.20	PASS
5350.000	-60.325	2.50	37.38	Avg	54.00	PASS
5460.000	-52.814	2.50	44.89	Peak	68.20	PASS
5460.000	-60.857	2.50	36.84	Avg	54.00	PASS

IEEE 802.11ac VHT20						
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Converted Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
4500.000	-51.353	2.50	46.35	Peak	68.20	PASS
4500.000	-61.396	2.50	36.30	Avg	54.00	PASS
5150.000	-50.859	2.50	46.84	Peak	68.20	PASS
5150.000	-59.463	2.50	38.24	Avg	54.00	PASS
5350.000	-52.182	2.50	45.52	Peak	68.20	PASS
5350.000	-60.525	2.50	37.18	Avg	54.00	PASS
5460.000	-52.122	2.50	45.58	Peak	68.20	PASS
5460.000	-61.057	2.50	36.64	Avg	54.00	PASS



IEEE 802.11ac VHT40						
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Converted Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
4500.000	-52.131	2.50	45.57	Peak	68.20	PASS
4500.000	-61.357	2.50	36.34	Avg	54.00	PASS
5150.000	-43.237	2.50	54.46	Peak	68.20	PASS
5150.000	-57.384	2.50	40.32	Avg	54.00	PASS
5350.000	-49.867	2.50	47.83	Peak	68.20	PASS
5350.000	-60.607	2.50	37.09	Avg	54.00	PASS
5460.000	-50.929	2.50	46.77	Peak	68.20	PASS
5460.000	-61.021	2.50	36.68	Avg	54.00	PASS

IEEE 802.11ac VHT80						
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Convert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
4500.000	-51.287	2.50	46.41	Peak	68.20	PASS
4500.000	-61.316	2.50	36.38	Avg	54.00	PASS
5150.000	-44.157	2.50	53.54	Peak	68.20	PASS
5150.000	-57.815	2.50	39.89	Avg	54.00	PASS
5350.000	-52.516	2.50	45.18	Peak	68.20	PASS
5350.000	-60.614	2.50	37.09	Avg	54.00	PASS
5460.000	-51.592	2.50	46.11	Peak	68.20	PASS
5460.000	-60.702	2.50	37.00	Avg	54.00	PASS

Remark:



1. $EIRP [dBm] = E [dB\mu V/m] - 95.23$
2. Measured undesirable emission at difference data rate for each mode and recorded worst case for each mode.
3. Test results including cable loss;
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Undesirable Emissions-Peak

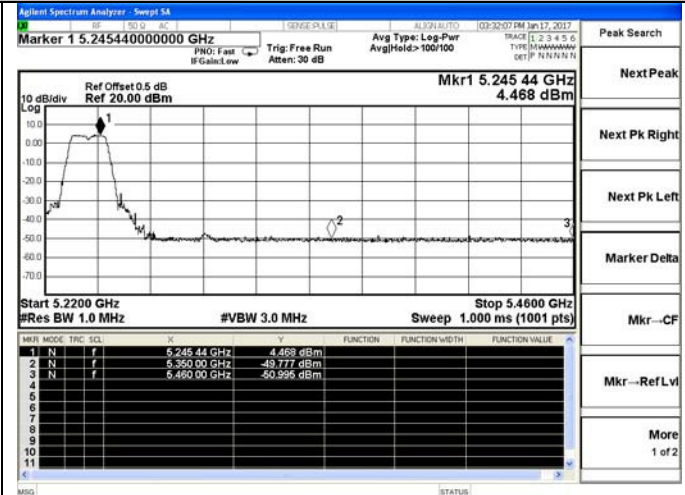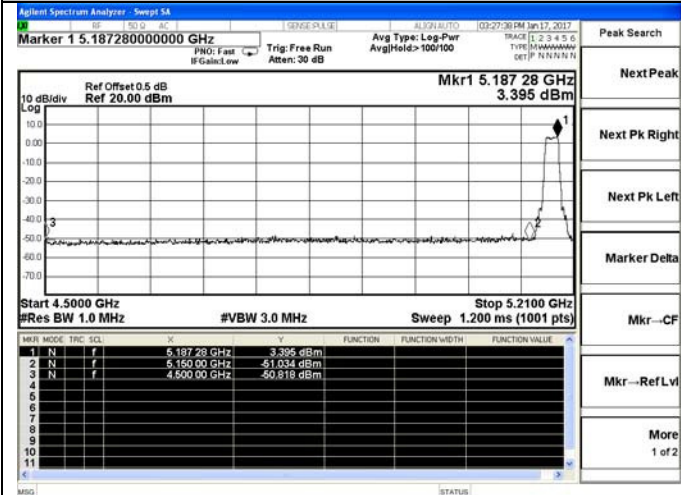



802.11a Channel 36 / 5180 MHz – Peak

802.11a Channel 48 / 5240 MHz – Peak

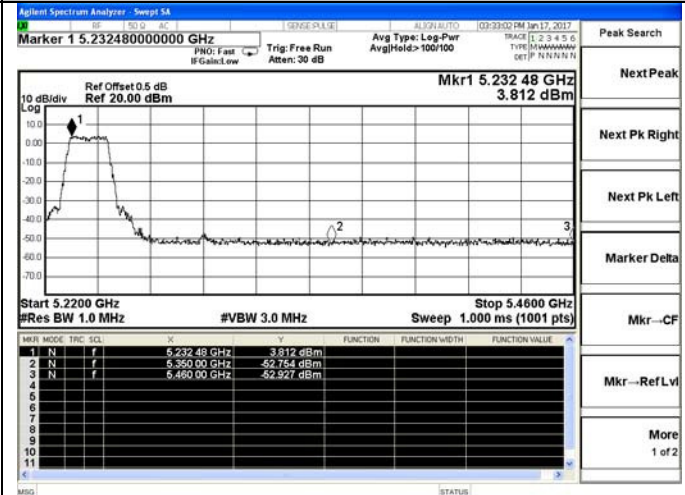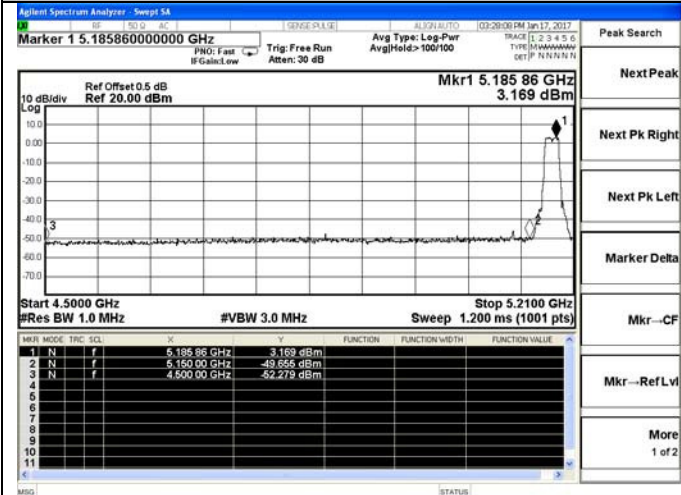

802.11n HT20 Channel 36 / 5180 MHz – Peak



802.11n HT20 Channel 48 / 5240 MHz – Peak

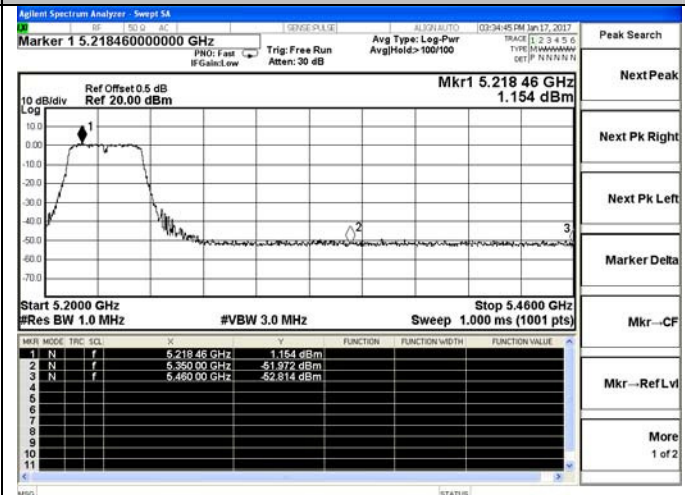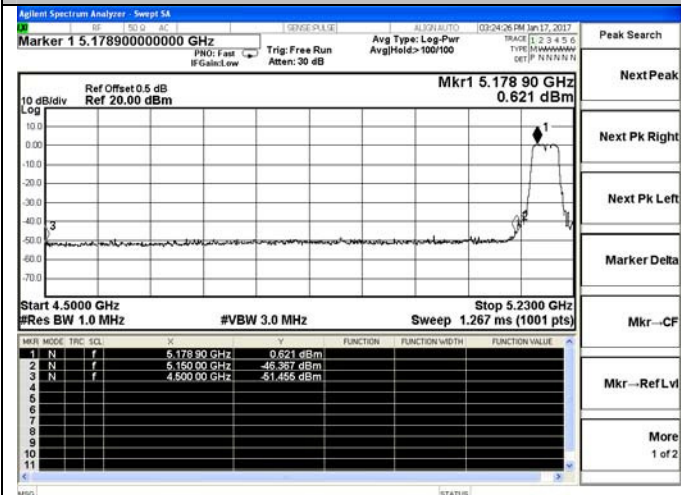

802.11n HT40 Channel 38 / 5190 MHz – Peak



802.11n HT40 Channel 46 / 5230 MHz – Peak

Undesirable Emissions-Peak

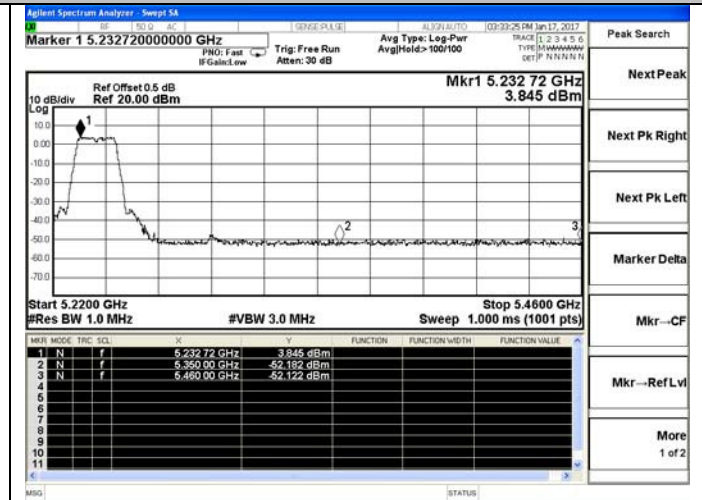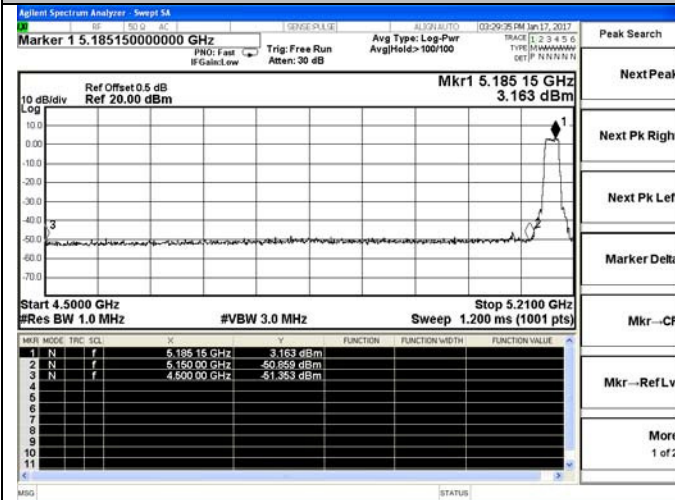



802.11ac VHT20 Channel 36 / 5180 MHz - Peak

802.11ac VHT20 Channel 48 / 5240 MHz - Peak

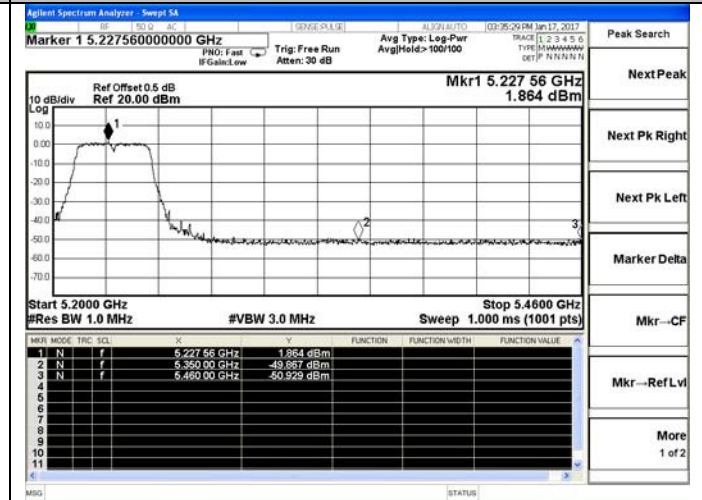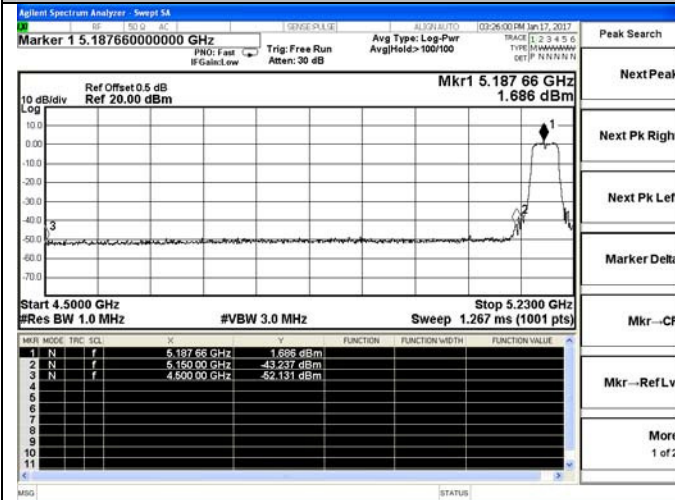

802.11ac VHT40 Channel 38 / 5190 MHz - Peak



802.11ac VHT40 Channel 46 / 5230 MHz - Peak

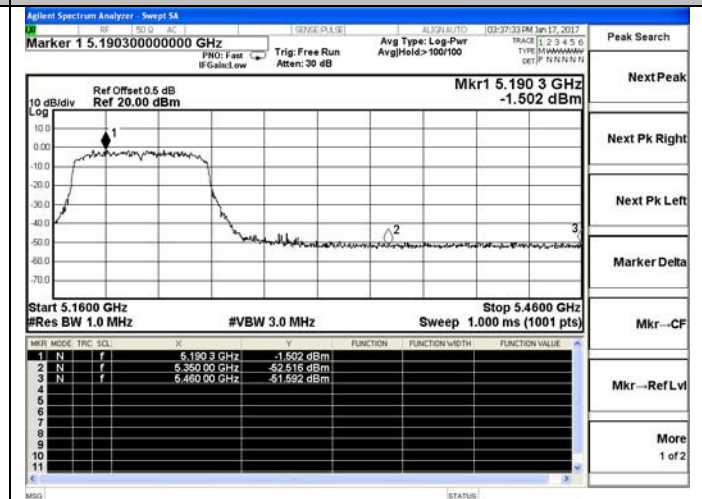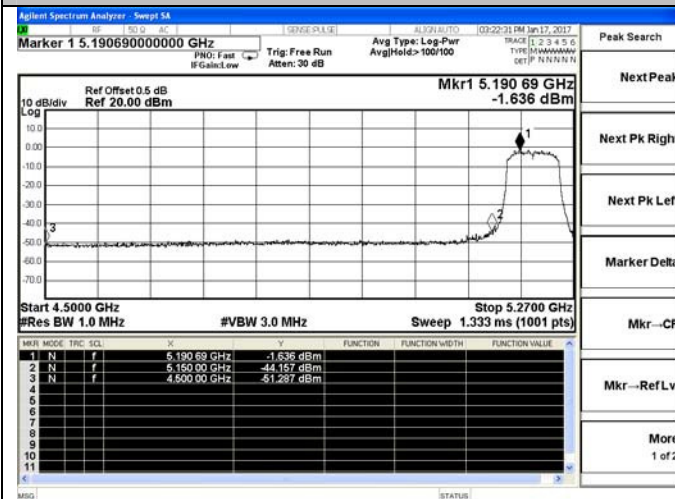

802.11ac VHT80 Channel 42 / 5210 MHz - Peak



802.11ac VHT80 Channel 42 / 5210 MHz - Peak

Undesirable Emissions-Avg

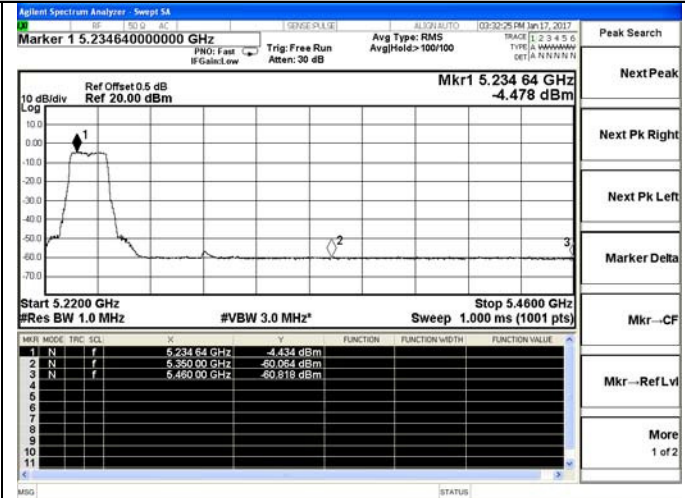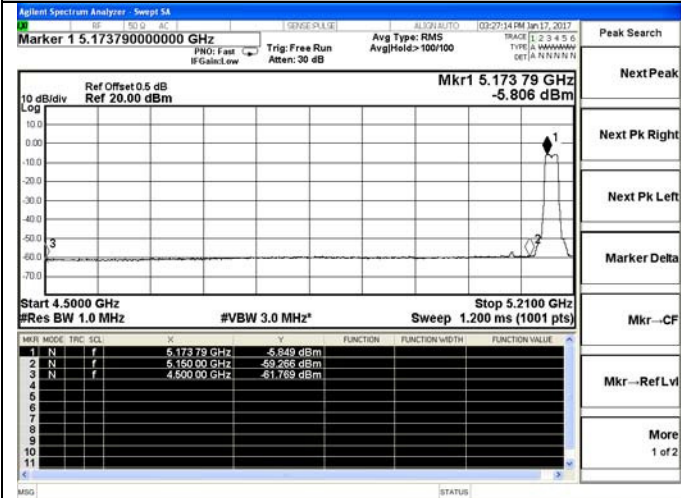



802.11a Channel 36 / 5180 MHz – Avg

802.11a Channel 48 / 5240 MHz – Avg

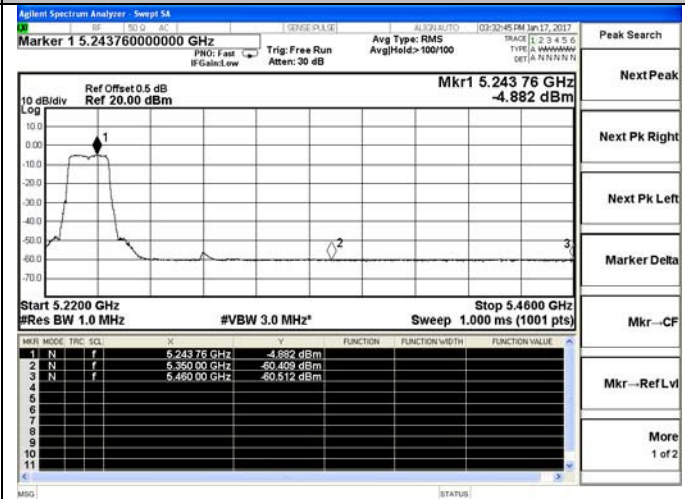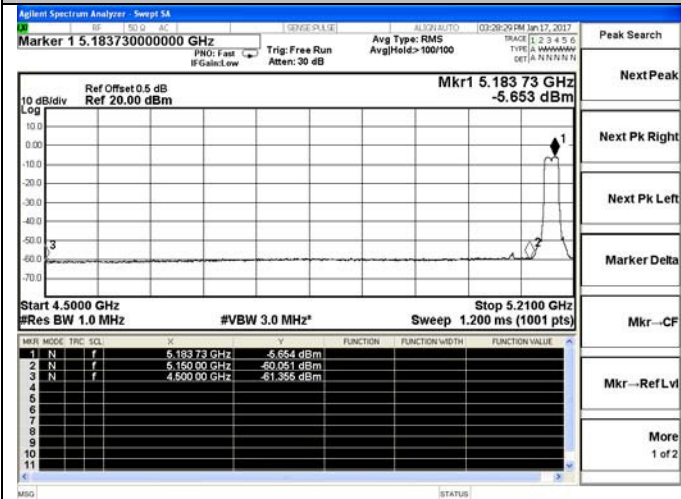

802.11n HT20 Channel 36 / 5180 MHz – Avg



802.11n HT20 Channel 48 / 5240 MHz – Avg

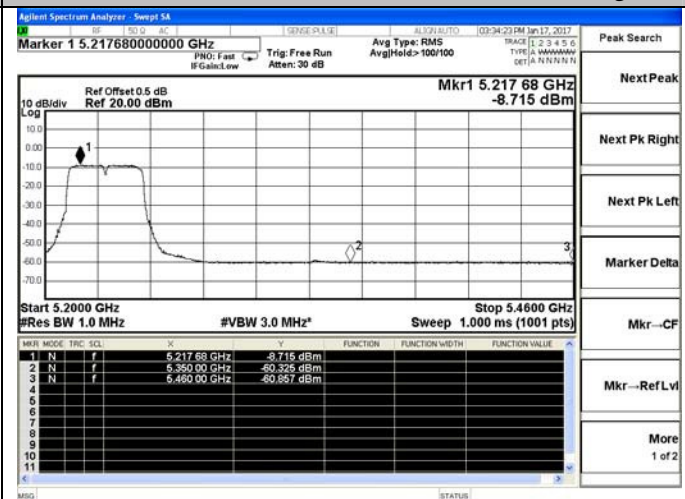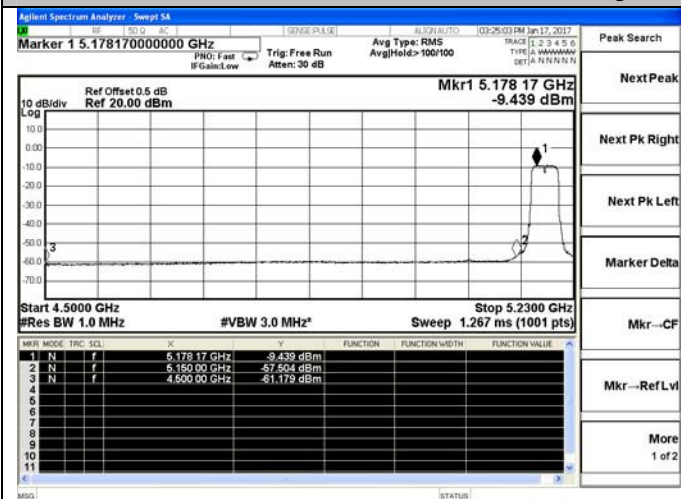

802.11n HT40 Channel 38 / 5190 MHz – Avg



802.11n HT40 Channel 46 / 5230 MHz – Avg

Undesirable Emissions-Avg

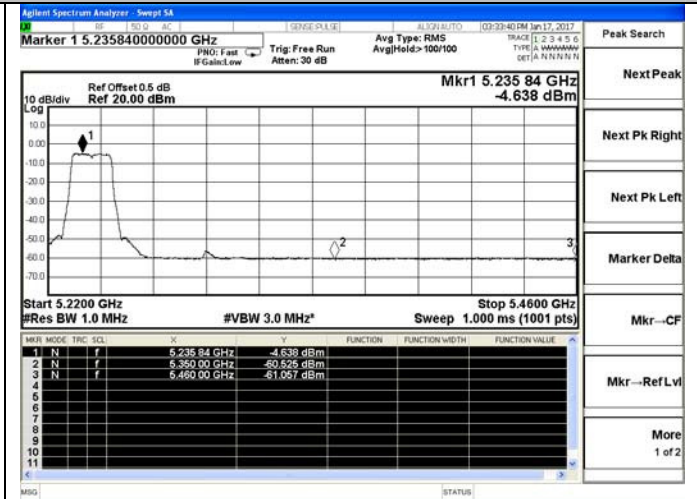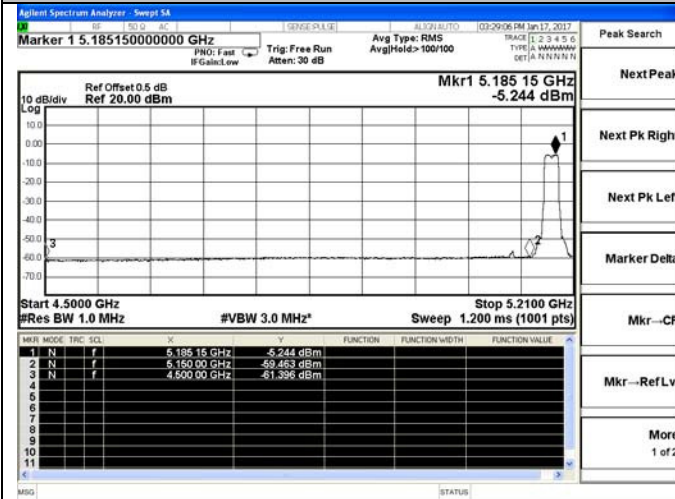



802.11ac VHT20 Channel 36 / 5180 MHz - Avg

802.11ac VHT20 Channel 48 / 5240 MHz - Avg

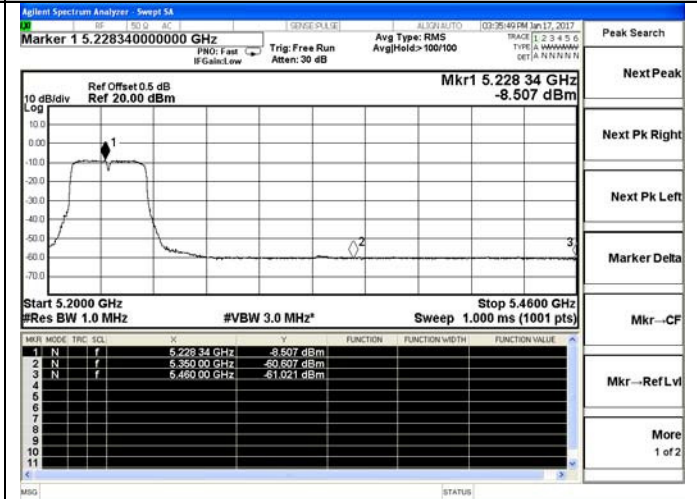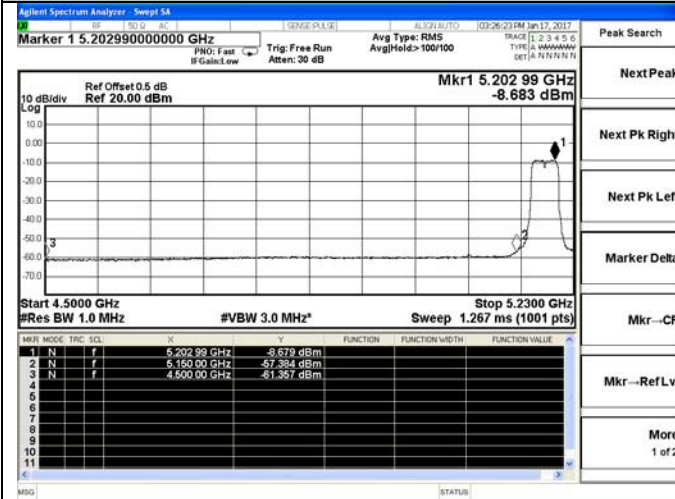

802.11ac VHT40 Channel 38 / 5190 MHz - Avg

802.11ac VHT40 Channel 46 / 5230 MHz - Avg

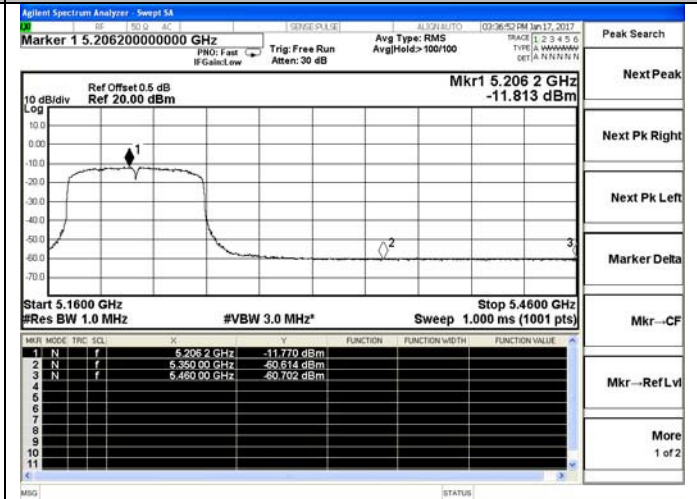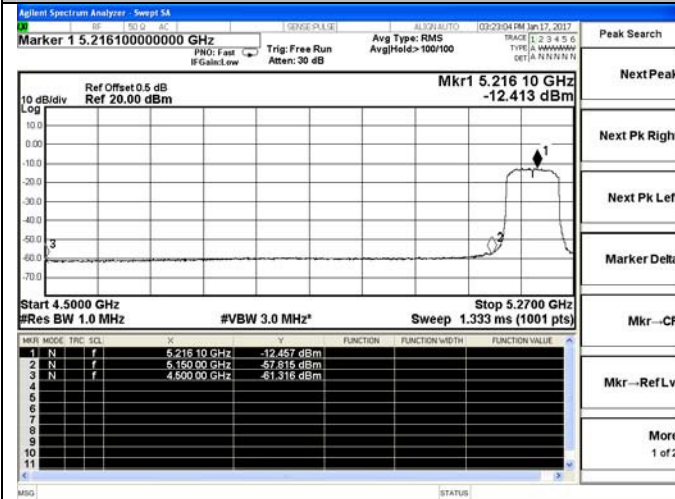

802.11ac VHT80 Channel 42 / 5210 MHz - Avg

802.11ac VHT80 Channel 42 / 5210 MHz - Avg


5.6. Power line conducted emissions

5.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

5.6.2 Block Diagram of Test Setup

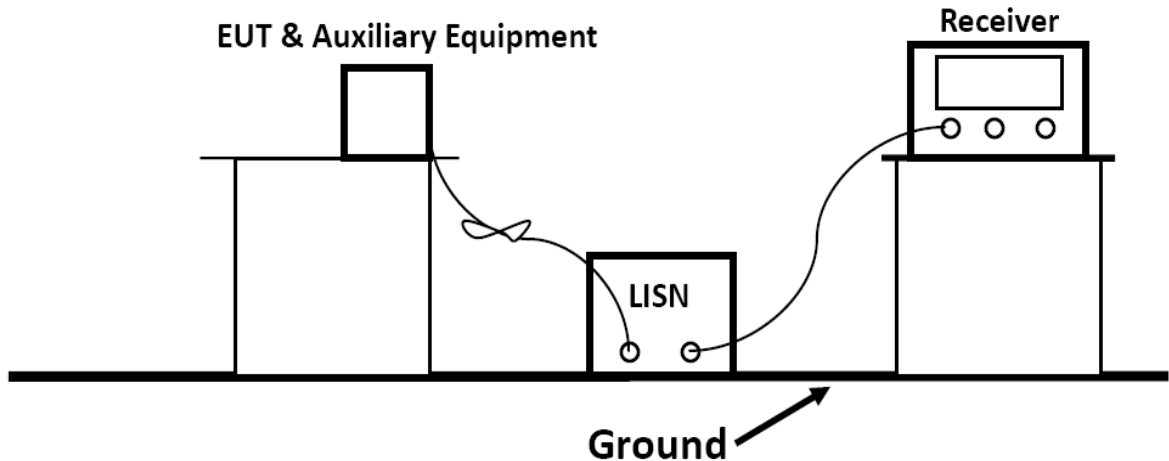

5.6.3 Test Results


PASS.

Only recorded the worst test case in this report.

The test data please refer to following page.

Test Result For Line Power Input AC 120V/60Hz (Worst Case)


Live Line:

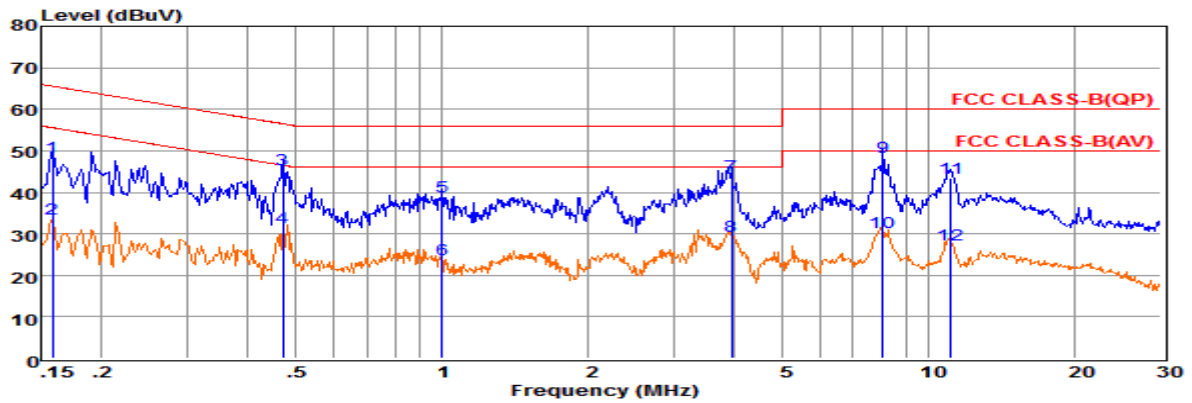

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dBuV/m	dBuV/m	dBuV/m	
1	0.16	28.91	9.58	0.02	48.51	65.56	-17.05	QP
2	0.16	13.95	9.58	0.02	33.55	55.55	-22.00	Average
3	0.47	25.92	9.62	0.04	45.58	56.49	-10.91	QP
4	0.47	11.94	9.62	0.04	31.60	46.49	-14.89	Average
5	1.00	19.17	9.63	0.05	38.85	56.00	-17.15	QP
6	1.00	4.03	9.63	0.05	23.71	46.00	-22.29	Average
7	3.94	24.42	9.65	0.06	44.13	56.00	-11.87	QP
8	3.94	9.72	9.65	0.06	29.43	46.00	-16.57	Average
9	8.06	28.86	9.68	0.07	48.61	60.00	-11.39	QP
10	8.06	10.66	9.68	0.07	30.41	50.00	-19.59	Average
11	11.14	23.67	9.70	0.09	43.46	60.00	-16.54	QP
12	11.14	7.70	9.70	0.09	27.49	50.00	-22.51	Average

Remarks: 1. C.F (Correction Factor) = Insertion loss + Cable loss.
 2. Measured = Reading + Lisn Factor +Cable Loss.

Neutral:

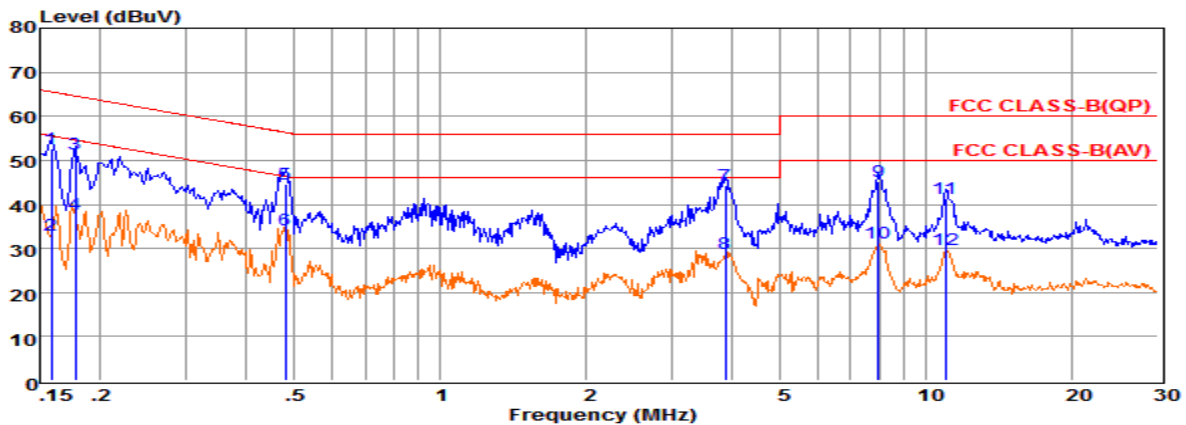

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dBuV/m	dBuV/m	dBuV/m	
1	0.16	33.02	9.68	0.02	52.72	65.56	-12.84	QP
2	0.16	13.28	9.68	0.02	32.98	55.55	-22.57	Average
3	0.18	31.71	9.64	0.02	51.37	64.59	-13.22	QP
4	0.18	17.98	9.63	0.02	37.63	54.59	-16.96	Average
5	0.48	25.07	9.62	0.04	44.73	56.32	-11.59	QP
6	0.48	14.66	9.62	0.04	34.32	46.32	-12.00	Average
7	3.86	24.49	9.65	0.06	44.20	56.00	-11.80	QP
8	3.86	9.09	9.65	0.06	28.80	46.00	-17.20	Average
9	7.98	25.39	9.70	0.07	45.16	60.00	-14.84	QP
10	7.98	11.59	9.70	0.07	31.36	50.00	-18.64	Average
11	10.96	21.47	9.73	0.09	41.29	60.00	-18.71	QP
12	10.96	9.99	9.73	0.09	29.81	50.00	-20.19	Average

Remarks: 1. C.F (Correction Factor) = Insertion loss + Cable loss.
 2. Measured = Reading + Lisn Factor +Cable Loss.

Note: Pre-scan all modes and recorded the worst case results in this report.

5.7. Antenna Requirements

5.7.1. Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

5.7.2. Antenna Connector Construction

The antenna used for transmitting is permanently attached and no consideration of replacement. Please see EUT photo for details.

The 5.2GHz WLAN use a R-SMA antenna and FPC antenna, the maximum gain is 2.5dBi for each antenna.

5.7.3. Results: Compliance.

Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep Time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the IEEE 802.11a mode is used.

Limits

FCC	IC
Antenna Gain	
6 dBi	

Tnom	Vnom	lowest channel 5180 MHz		middle channel 5220 MHz		highest channel 5240 MHz	
		Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
Conducted power [dBm] Measured with OFDM modulation		14.78	14.82	14.76	14.19	15.09	14.54
Radiated power [dBm] Measured with OFDM modulation		15.91	16.03	16.27	15.72	17.06	15.89
Gain [dBi] Calculated		1.13	1.21	1.51	1.53	1.20	1.35
Measurement uncertainty				± 1.6 dB (cond.) / ± 3.8 dB (rad.)			

Result: -/-

-----THE END OF REPORT-----