



# Compliance Testing, LLC

Previously Flom Test Lab

EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268

fax: (480) 926-3598

<http://www.ComplianceTesting.com>

[info@ComplianceTesting.com](mailto:info@ComplianceTesting.com)

## Test Report

Prepared for: Etherstack

Model: SFFR6UH2

Description: Small Form Factor Repeater

Serial Number: 17050005

FCC ID: 2ADAKSFFR6UH2

IC: 9487A-SFFR6UH2

To

FCC Part 22, 74, 80, 90

and

IC RSS-119 (Issue 12)

Date of Issue: June 21, 2018

On the behalf of the applicant:

Etherstack Inc.  
1115 Broadway  
Suite 1276  
New York, NY 10010

Attention of:

Doug Chapman, V.P. Business Development N.A.  
Ph: (917)661-4110  
E-Mail: [doug.chapman@etherstack.com](mailto:doug.chapman@etherstack.com)

Prepared By  
Compliance Testing, LLC  
1724 S. Nevada Way  
Mesa, AZ 85204  
(480) 926-3100 phone / (480) 926-3598 fax  
[www.compliancetesting.com](http://www.compliancetesting.com)  
Project No: p1780015

**Greg Corbin**  
**Project Test Engineer**

This report may not be reproduced, except in full, without written permission from Compliance Testing.  
All results contained herein relate only to the sample tested.



### Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	October 9, 2017	Greg Corbin	Original Document
2.0	November 28, 2017	Greg Corbin	Corrected attenuator value on page 13. Added Table 2 on page 7 listing FCC test frequencies used. Added power limits to page 9. Added ANSI C63.26 reference to page 6.
3.0	December 17, 2017	Greg Corbin	Updated Model and Description, manufacturer address. Added emission designators 8K10F7D, 8K10F7E, 8K10F1W, 8K10F7W. Removed emission designator 20k0F3E. Updated test modulation description on pages 11,13,14,16,18,20. Updated the following test data, emission masks, occupied bandwidth, audio low pass filter, audio frequency response, modulation limiting, updated frequency stability limit and added frequency stability for DC voltage Updated transient frequency behavior and moved test data to Annex E
4.0	June 8, 2018	Greg Corbin	Updated FCC and IC IDs, Removed all references to internal duplexer and associated losses, Updated Output power tables, pg 9 - 11
5.0	June 21, 2018	Greg Corbin	Added 8K10F1E to page 6. Updated notes on pages 11, 12. Updated channel spacing for C4FM in table on page 13 Updated FM narrowband and FM wideband plots in Annex D Removed 8K10F1E from necessary BW calculation page 24 Added 8K10F1E,8K10F1W, 8K10F7D, 8K10F7E, 8K10F7W to necessary BW calculations Added audio source to test setup on page 11 and 14. Replaced repeater with basestation Replaced channel spacing with channel bandwidth



## Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions and Engineering Practices	6
Test Result Summary	8
Conducted Output Power	9
Conducted Spurious Emissions	12
Radiated Spurious Emissions	13
Emission Masks	14
Occupied Bandwidth	15
Transient Frequency Behavior	16
Audio Low Pass Filter (Voice Input)	17
Audio Frequency Response	18
Modulation Limiting	19
Frequency Stability (Temperature Variation)	21
Frequency Stability (Voltage Variation)	23
Necessary Bandwidth Calculations	25
Test Equipment Utilized	26

**ILAC / A2LA**

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



**FCC Site Reg. #349717**

**IC Site Reg. #2044A-2**

**Non-accredited tests contained in this report:**

**N/A**

**The Applicant has been cautioned as to the following:**

**15.21: Information to the User**

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**15.27(a): Special Accessories**

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

## Test and Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II, Part 2, Subpart J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, and the following individual Parts: FCC Parts 22,74, 80, 90 and ANSI C63.26.

## Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing.

In accordance with ANSI/TIA 603E, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F) unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Environmental Conditions		
Temp (°C)	Humidity (%)	Pressure (mbar)
26.3 – 30.0	33.6 – 46.2	963.8 – 965.3

Measurement results, unless otherwise noted, are worst-case measurements.

### EUT Description

**Model:** SFFR6UH2

**Description:** Small Form Factor Repeater

**Firmware:** 2.04.000

**Software:** N/A

**Serial Number:** 17060005

### Additional Information:

The EUT is a UHF small form factor tactical repeater and base station operating from 440 - 520 MHz per Table 1 below.

The EUT is AC or DC powered, with 2 battery packs for battery power.

The emission designators used are 8K10F1E, 8K10F1D, 8K10F7D, 8K10F7E, 8K10F1W, 8K10F7W, 11K0F3E, 16K0F3E.

**Table 1 Frequency Allocation**

Repeater Frequency Range (440 - 520 MHz)					
Rule Part	Frequency Range (MHz)	Sub-Bands (MHz)			Extended Frequency
<b>FCC Part 90</b>	440 - 512	N/A	N/A	N/A	512 - 520
<b>FCC Part 22</b>	454 - 460	454 - 455	456 - 460	N/A	N/A
<b>FCC Part 74</b>	450 - 456	450 - 454	455 - 456	N/A	N/A
<b>FCC Part 80</b>	454 - 470	454 - 455	456 - 460	462.7375 - 470	N/A
<b>RSS 119</b>	450 - 470	N/A	N/A	N/A	N/A



**Table 2 - FCC Test Frequencies**

Test Frequency (MHz)	FCC Rule Part
450.1025	74, 90, RSS-119
459.9875	22, 80, 90, RSS-119
469.9875	80, 90, RSS-119
511.9875	90

**EUT Operation during Tests**

Throughout the test report, there are references to narrowband, wideband, and digital signals. Narrowband (NB) utilizes analog FM test signals with 12.5 kHz channel spacing. Wideband (WB) utilizes analog FM test signals with 25 kHz channel spacing. Digital utilizes C4FM test signals.

**Accessories:**

Qty	Description	Manufacturer	Model	S/N
1	Audio breakout box	Etherstack	N/A	N/A

**Cables:**

Qty	Description	Length (M)	Shielding Y/N	Shielded Hood Y/N	Termination
1	AC Power cord	1	N	N	N/A
1	DC Power cord	1	N	N	N/A

**Modifications:** None



**Test Result Summary**

Specification	Test Name	Pass, Fail, N/A	Comments
2.1046 RSS-119 (5.4) 22.565 (a) 80.215 (f)(g) 74.461	Conducted Output Power	Pass	
2.1051 RSS-119 (5.8) 22.359 (a) 80.211 (f) 74.462(C)	Conducted Spurious Emissions	Pass	
2.1053 Rss-119 (5.8) 22.359 (a) 80.211 (f) 74.462(C)	Radiated Spurious Emissions	Pass	
90.210 2.1049 RSS-119 (5.5) 80.211 (f) 74.462(C)	Emission Masks (Occupied Bandwidth)	Pass	
2.1047	Audio Low Pass Filter (Voice Input)	Pass	
2.1047	Audio Frequency Response	Pass	
2.1047(a)	Modulation Limiting	Pass	
90.213 RSS-119 (5.3) 22.355 80.209 (a)(7) 74.464	Frequency Stability (Temperature Variation)	Pass	
90.213 RSS-119 (5.3) 22.355 80.209 (a)(7) 74.464	Frequency Stability (Voltage Variation)	Pass	
90.214 RSS-119 (5.9)	Transient Frequency Behavior	Pass	
2.202 (g)	Necessary Bandwidth Calculation	Pass	



## Conducted Output Power

**Engineer:** Greg Corbin

**Test Date:** 8/28/17

### Measurement Procedure

The Equipment Under Test (EUT) was connected to a spectrum analyzer through a 30 dB Power attenuator. All cable and attenuator losses were input into the spectrum analyzer as a reference level offset to ensure accurate readings were obtained.

For narrowband and wideband signals a CW signal and peak detector was used for performing output power measurements.

For digital signals a C4FM signal and average detector was used for performing output power measurements. Output power was recorded for both the lowest and highest power setting.

The output power limits are as follows for each FCC rule part.


Part 22: 22.565(a)\_150 watts

Part 74: 74.461\_100 watts

Part 80: 80.215(l)\_For operational fixed stations using frequencies in the 72-76 MHz band and for other classes of stations operating above 162.025 MHz, the transmitter power must be specified in the station authorization.

Part 90: 90.205(h)\_450-470 MHz. (1) The maximum allowable station effective radiated power (ERP) is dependent upon the station's antenna HAAT and required service area and will be authorized in accordance with table 2 in part 90.205(h).

### Test Setup



### Peak Output Power – Narrowband - Low Power setting

Tuned Frequency (MHz)	Measured Output Power		Result
	(dBm)	(watts)	
450.1025	32.6	1.820	Pass
459.9875	32.6	1.820	Pass
469.9875	32.7	1.862	Pass
511.9875	32.7	1.862	Pass



**Peak Output Power – Narrowband - High power setting**

Tuned Frequency (MHz)	Measured Output Power		Result
	(dBm)	(watts)	
450.1025	44.4	27.542	Pass
459.9875	44.5	28.814	Pass
469.9875	44.5	28.814	Pass
511.9875	44.5	28.814	Pass

**Peak Output Power – Wideband - Low Power setting**

Tuned Frequency (MHz)	Measured Output Power		Result
	(dBm)	(watts)	
450.1025	32.6	1.820	Pass
459.9875	32.6	1.820	Pass
469.9875	32.7	1.862	Pass
511.9875	32.7	1.862	Pass

**Peak Output Power – Wideband - High power setting**

Tuned Frequency (MHz)	Measured Output Power		Result
	(dBm)	(watts)	
450.1025	44.4	27.542	Pass
459.9875	44.5	28.814	Pass
469.9875	44.5	28.814	Pass
511.9875	44.5	28.814	Pass



**Peak Output Power – Digital - Low Power setting**

Tuned Frequency (MHz)	Measured Output Power		Result
	(dBm)	(watts)	
450.1025	32.6	1.820	Pass
459.9875	32.6	1.820	Pass
469.9875	32.6	1.820	Pass
511.9875	32.6	1.820	Pass

**Peak Output Power – Digital - High power setting**

Tuned Frequency (MHz)	Measured Output Power		Result
	(dBm)	(watts)	
450.1025	44.4	27.542	Pass
459.9875	44.5	28.814	Pass
469.9875	44.5	28.814	Pass
511.9875	44.5	28.814	Pass

## Conducted Spurious Emissions

**Engineer:** Greg Corbin

**Test Date:** 9/18/17

### Test Procedure

The EUT was connected directly to a spectrum analyzer to verify that the UUT met the requirements for spurious emissions. A tunable notch filter was utilized to ensure the fundamental did not put the spectrum analyzer into compression. The resolution bandwidth set for 100 kHz and the reference level was adjusted to ensure the system had sufficient dynamic range to measure spurious emissions. The frequency range from 30 MHz to the 10<sup>th</sup> harmonic of the fundamental transmitter was observed and plotted

The EUT was tested in 3 modes of operation, Wideband (WB), Narrowband (NB), and Digital.


The high power output was used for all conducted spurious tests.

For analog modulation, a 2.5 kHz tone was used, set to 50% modulation (NB 50% of 2.5 kHz = 1.125 kHz, WB 50% of 5 kHz is 2.5 kHz).

The input level was then set to 16 dB above the level used for 50 % modulation.

For digital modulation, the EUT internal C4FM modulation was used.

### Test Setup

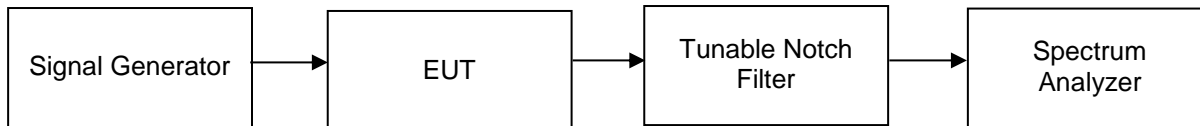

**Refer to Annex A for Conducted Spurious Emission test data.**

#### Notes:

The limit line on the graphs is set to -13dBm.

The test limit for 25 kHz channels is -13dBm.

The test limit is for 12.5 kHz channels is -20dBm.

All spurious measurements were below -20 dBm.

## Radiated Spurious Emissions

**Engineer:** Greg Corbin

**Test Date:** 9/18/2017

### Test Procedure

The EUT was tested in a semi-anechoic chamber with the turntable set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360 degrees with the antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure that the signal levels were maximized. All cable and antenna correction factors were input into the spectrum analyzer ensuring an accurate measurement in ERP/EIRP with the resultant power in dBm. A signal generator was used to provide a modulated signal as required. The EUT output was terminated into a 50 Ohm non-radiating load.

The RBW was set to 100 kHz for measurements below 1 GHz and 1 MHz for measurements above 1 GHz. The VBW was set to 3 times the RBW.

The following formula was used for calculating the limits:


Radiated Spurious Emissions Limit

Wideband =  $P1 - (43 + 10\text{Log}(P2)) = -13\text{dBm}$

Narrowband =  $P1 - (50 + 10\text{Log}(P2)) = -20\text{dBm}$

P1 = power in dBm

P2 = power in Watts

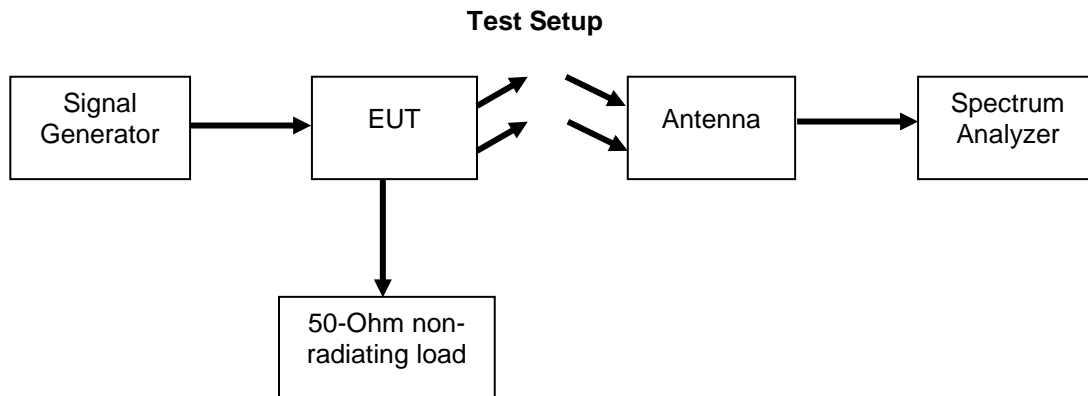

### Test Results

**Refer to Annex B for the Radiated Spurious Emissions test data.**

**Notes:**

The limit line on the graphs is set to -13dBm.

The test limit for 25 kHz channels is -13dBm.

The test limit is for 12.5 kHz channels is -20dBm.

All spurious measurements were below -20 dBm.

No other emissions were detected.

**Emission Masks**

**Engineer:** Greg Corbin

**Test Date:** 10/18/2017

**Test Procedure**

The EUT was connected directly to a spectrum analyzer to verify that the EUT meets the required emissions mask.

A reference level plot is provided to verify that the peak power was established prior to testing the mask.

The modulation settings are listed in the table below.


For analog modulation, a 2.5 kHz tone was used, set to 50% modulation (NB 50% of 2.5 kHz = 1.125 kHz, WB 50% of 5 kHz is 2.5 kHz).

The input level was then set to 16 dB above the level used for 50 % modulation.

For digital modulation, the EUT internal C4FM modulation was used.

Channel Spacing (kHz)	Emission Mask	Emission Bandwidth	Type of Modulation	Audio Frequency (kHz)	Deviation (kHz)	RBW (Hz)
25	B	16k0	FM	2.5	50%	300
12.5	D	11k0	FM	2.5	50%	100
12.5	D	8k10	C4FM	N/A	N/A	100

**Test Setup**

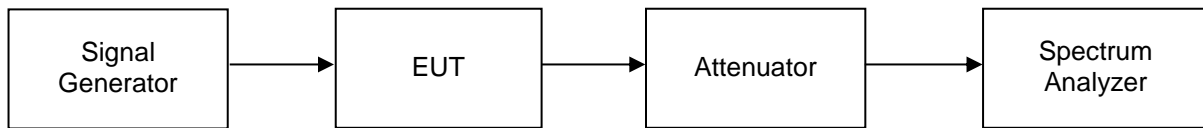

Refer to Annex C for Emission Mask test data.

## Occupied Bandwidth

**Engineer:** Greg Corbin

**Test Date:** 8/29/2017

### Test Procedure

The EUT was connected directly to a spectrum analyzer. The Span was set wide enough to capture the entire transmit spectrum and the resolution bandwidth was set to at least 1% of the span. The Occupied Bandwidth tool on the spectrum analyzer was used to measure the -26 dB (99%) occupied bandwidth.

For analog modulation, a 2.5 kHz tone was used, set to 50% modulation (NB 50% of 2.5 kHz = 1.125 kHz, WB 50% of 5 kHz is 2.5 kHz).

The input level was then set to 16 dB above the level used for 50 % modulation.

For digital modulation, the EUT internal C4FM modulation was used.

### Test Setup



**Refer to Annex D for Occupied Bandwidth test data.**

## Transient Frequency Behavior


**Engineer:** Greg Corbin

**Test Date:** 10/18/2017

### Measurement Procedure

The EUT was connected directly to a modulation analyzer through a 30 dB attenuator to verify that the EUT meets the required Transient Frequency Behavior response per the specification. The modulation analyzer is a real time spectrum analyzer with integrated demodulation, audio measurement capabilities, and timing analysis. The turn on and turn off transient timing was measured and recorded.

### Test Setup



Refer to Annex E for Transient Frequency Behaviour test data.



**Audio Low Pass Filter (Voice Input)**


**Engineer:** Greg Corbin

**Test Date:** 12/11/2017

**Measurement Procedure**


The EUT was connected directly to a modulation analyzer through an attenuator. Set the audio frequency generator to 1 kHz and adjust the level per manufacturer's specifications. The audio source was tuned from 100 Hz to 20 kHz and the audio frequency response was measured and plotted. The modulation analyzer is a real time spectrum analyzer with integrated demodulation, audio measurement capabilities, and timing analysis. The Audio Low Pass Filter test data was recorded for 12.5 kHz and 25 kHz channel spacing.

**Test Setup**

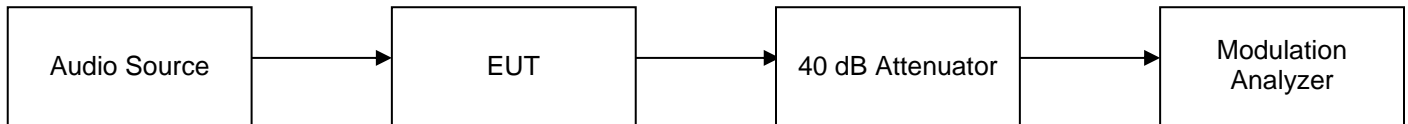


**Test Results**

**12.5 kHz Channel Spacing**

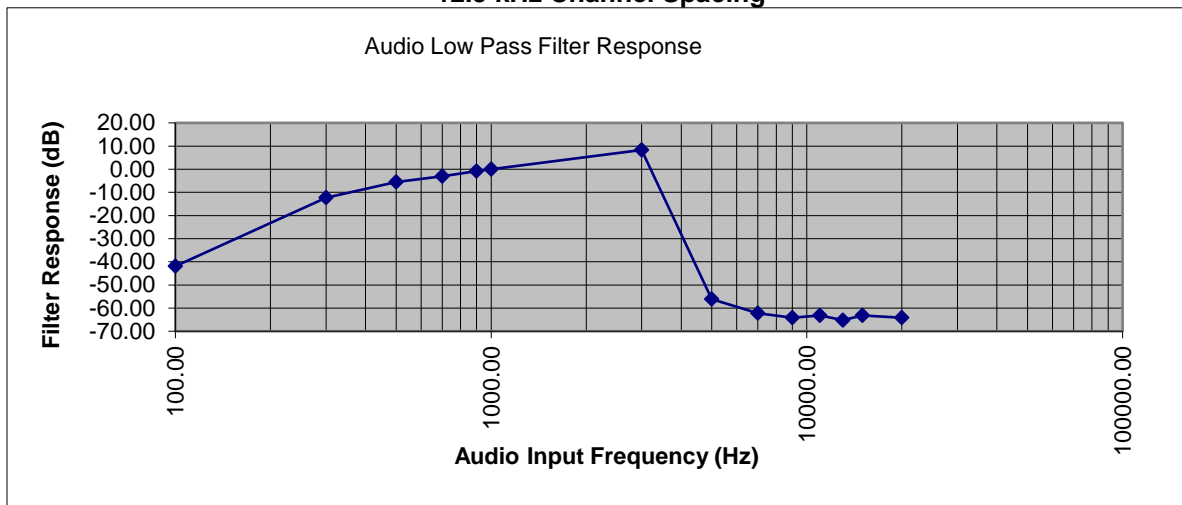

**25 kHz Channel spacing**

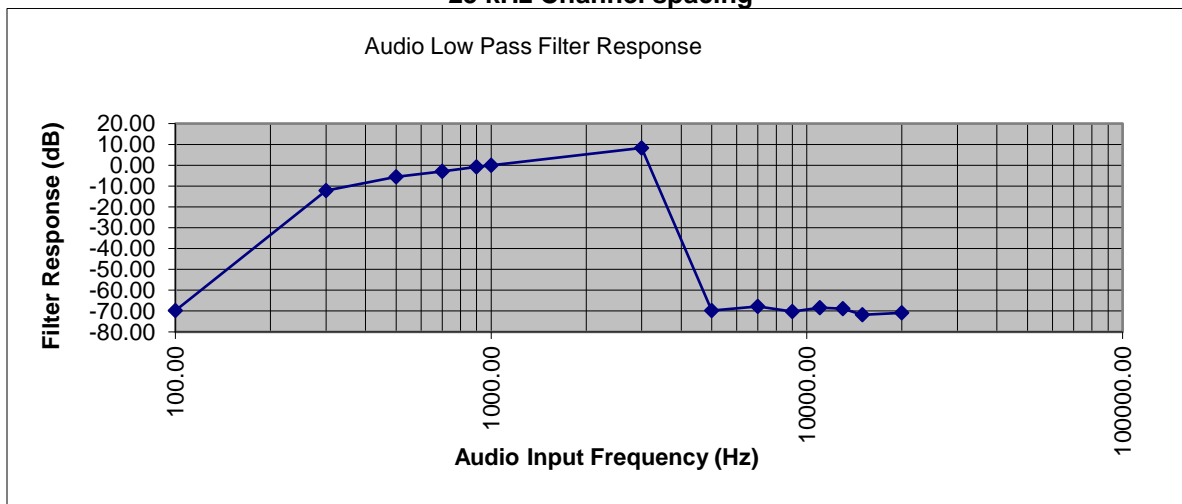



## Audio Frequency Response

Engineer: Greg Corbin

Test Date: 12/11/2017

### Measurement Procedure

The EUT was connected directly to a modulation analyzer through an attenuator.


The audio frequency was set to 1 kHz and the level was adjusted for 20% deviation according to the manufacturer's instructions.

The audio source was tuned from 100 Hz to 5000 Hz and the audio frequency response was measured and plotted.


The modulation analyzer is a real time spectrum analyzer with integrated demodulation, audio measurement capabilities, and timing analysis.

The Audio Frequency Response test data was recorded for 12.5 kHz and 25 kHz channel spacing.


### Test Setup

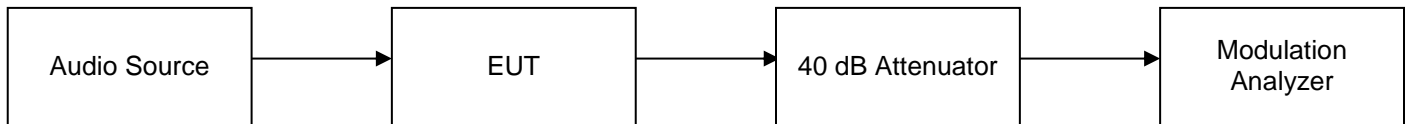

### Test Results 12.5 kHz Channel Spacing

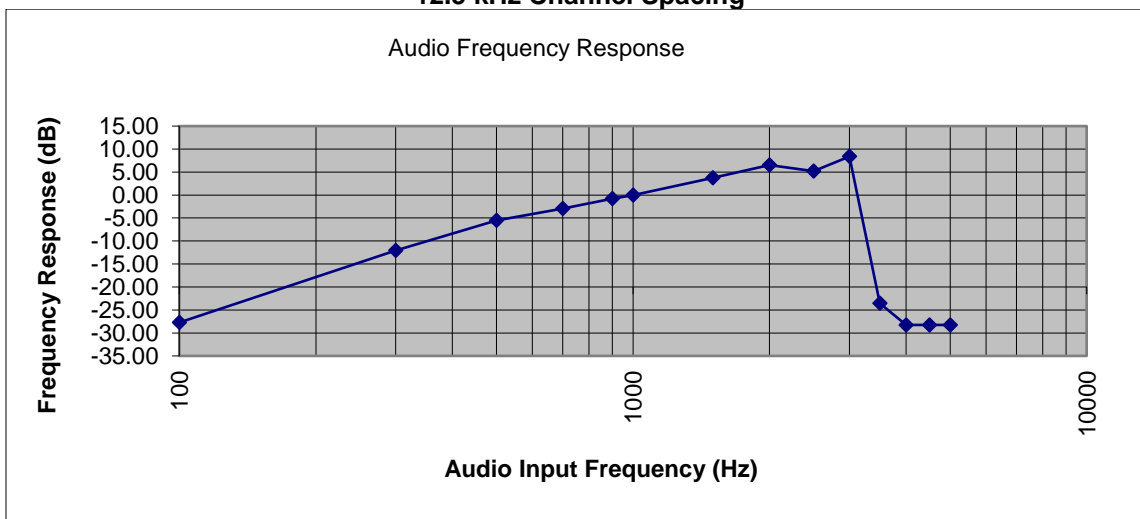

### 25 kHz Channel Spacing

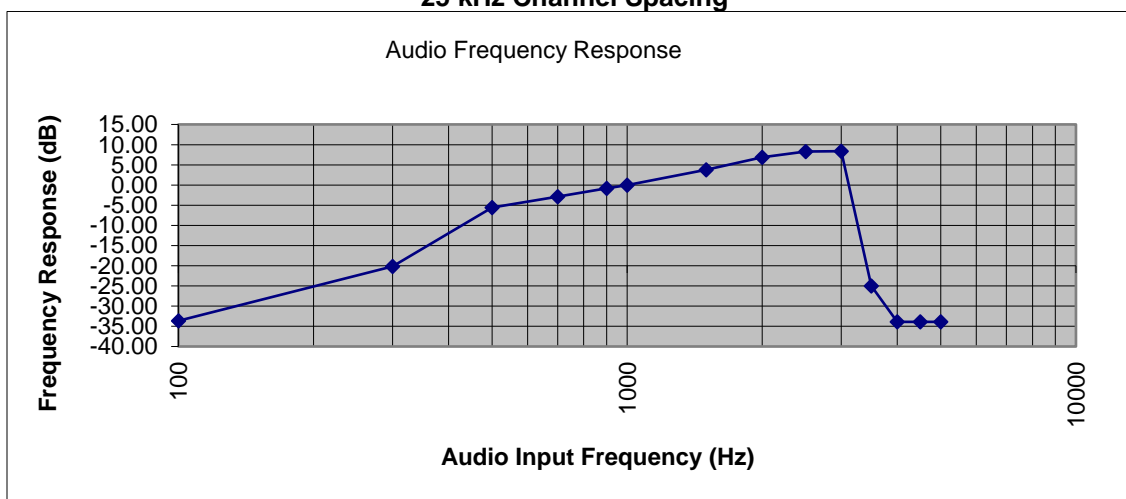

**Modulation Limiting**


**Engineer:** Greg Corbin

**Test Date:** 12/11/2017


**Measurement Procedure**

The EUT was connected directly to a modulation analyzer through an attenuator. The audio frequency was set to 1 kHz and the level was adjusted for 60% deviation according to the manufacturer's instructions. The input level was then set to 16 dB above the level used for 50 % modulation. The audio source was tuned from 100 Hz to 5000 Hz and the audio frequency response was measured and plotted. The modulation analyzer is a real time spectrum analyzer with integrated demodulation, audio measurement capabilities, and timing analysis. The Modulation Limiting test data was recorded for 12.5 kHz and 25 kHz channel spacing.


**Test Setup**

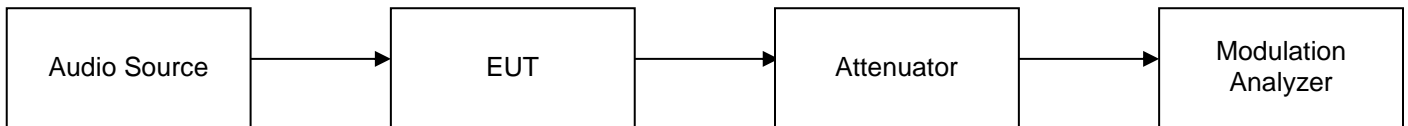

**Narrowband Positive Peaks**

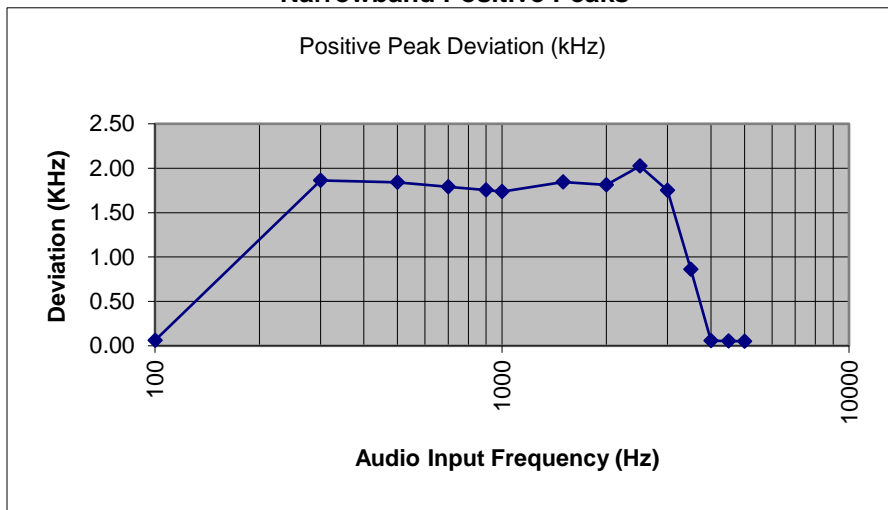


**Narrowband Negative Peaks**

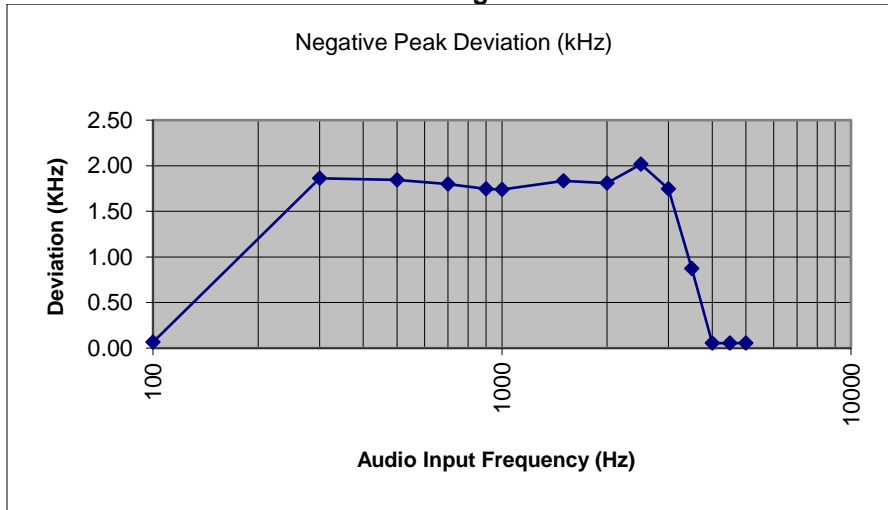




### Wideband Positive Peaks

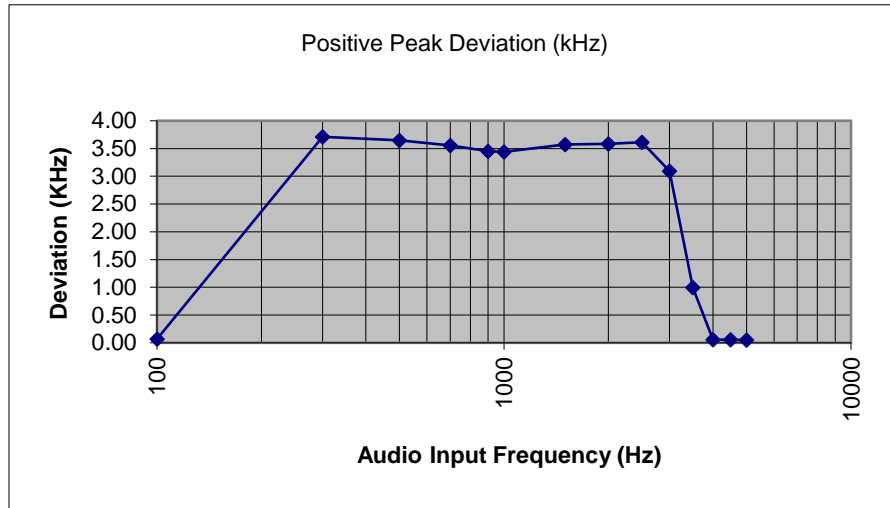

### Wideband Negative Peaks

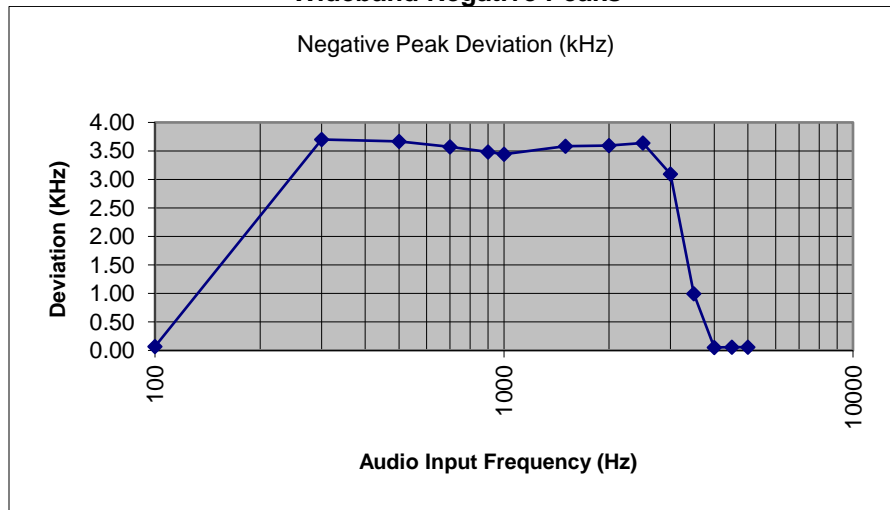

## Frequency Stability (Temperature Variation)


Engineer: Greg Corbin

Test Date: 9/12/2017

### Measurement Procedure

The EUT was placed in an environmental test chamber and the RF output was connected directly to a spectrum analyzer. The temperature was varied from -30°C to 50°C in 10°C increments. After a sufficient time for temperature stabilization the RF output frequency was measured. At 20°C the power supply voltage to the EUT was varied from 85% to 115% of the nominal value and the RF output was measured.


### Measurement Setup



### Measurement Results

Frequency Stability vs. Temperature \_120 VAC


Tuned Frequency (MHz)	Frequency Tolerance (PPM)	Temperature centigrade	Measured Frequency (MHz)	Upper Limit (MHz)	Lower Limit (MHz)	Upper Margin (MHz)	Lower Margin (MHz)
459.9875	1.5	-30	459.987531	459.988190	459.986810	-0.000659	0.000721
459.9875	1.5	-20	459.987594	459.988190	459.986810	-0.000596	0.000784
459.9875	1.5	-10	459.987594	459.988190	459.986810	-0.000596	0.000784
459.9875	1.5	0	459.987593	459.988190	459.986810	-0.000597	0.000783
459.9875	1.5	10	459.987594	459.988190	459.986810	-0.000596	0.000784
459.9875	1.5	20	459.987594	459.988190	459.986810	-0.000596	0.000784
459.9875	1.5	30	459.987531	459.988190	459.986810	-0.000659	0.000721
459.9875	1.5	40	459.987531	459.988190	459.986810	-0.000659	0.000721
459.9875	1.5	50	459.987514	459.988190	459.986810	-0.000676	0.000704

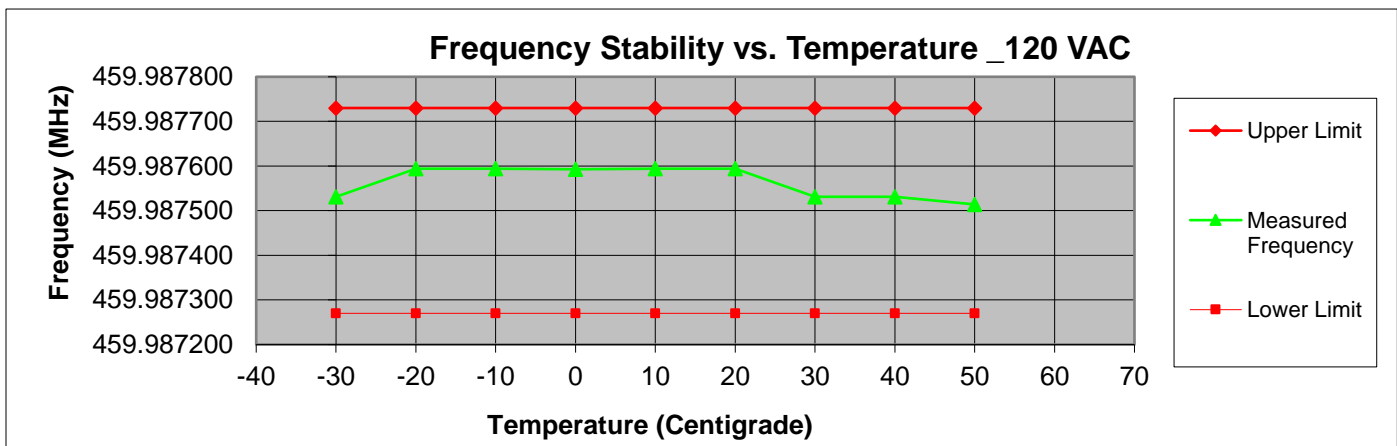



### Frequency Stability vs. Temperature\_+ 12 VDC

Tuned Frequency (MHz)	Frequency Tolerance (PPM)	Temperature centigrade	Measured Frequency (MHz)	Upper Limit (MHz)	Lower Limit (MHz)	Upper Margin (MHz)	Lower Margin (MHz)
469.9875	1.5	-30	469.987504	469.988205	469.986795	-0.000701	0.000709
469.9875	1.5	-20	469.987449	469.988205	469.986795	-0.000756	0.000654
469.9875	1.5	-10	469.987512	469.988205	469.986795	-0.000693	0.000717
469.9875	1.5	0	469.987425	469.988205	469.986795	-0.000780	0.000630
469.9875	1.5	10	469.987495	469.988205	469.986795	-0.000710	0.000700
469.9875	1.5	20	469.987487	469.988205	469.986795	-0.000718	0.000692
469.9875	1.5	30	469.987487	469.988205	469.986795	-0.000718	0.000692
469.9875	1.5	40	469.987450	469.988205	469.986795	-0.000755	0.000655
469.9875	1.5	50	469.987412	469.988205	469.986795	-0.000793	0.000617

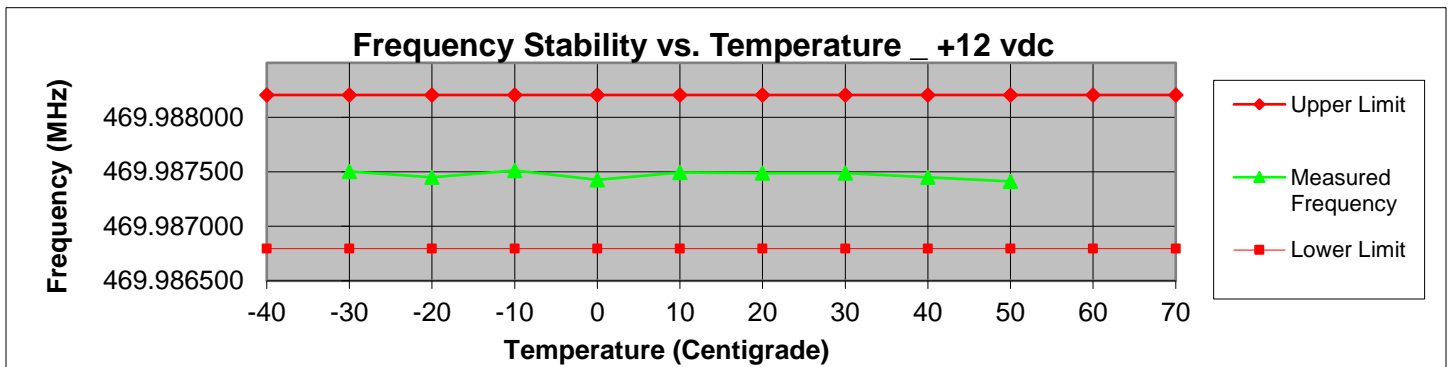

**Frequency Stability (Voltage Variation)**

**Engineer:** Greg Corbin


**Test Date:** 12/17/2017

The EUT was placed in an environmental test chamber and the RF output was connected directly to a spectrum analyzer. At 20°C the power supply voltage to the EUT was varied from 85% to 115% of the nominal value and the RF output was measured.

Tests were performed for both 120 VAC and +12 VDC supply voltages.


**Frequency Stability vs. Voltage\_120 VAC**

Tuned Frequency (MHz)	Frequency Tolerance (PPM)	Upper Limit (MHz)	Lower Limit (MHz)	Nominal Voltage	Measured Voltage	Measured Frequency (MHz)	Upper Margin (MHz)	Lower Margin (MHz)
459.9875	1.5	459.988190	459.986810	120	102.00	459.987562	-0.000628	0.000752
459.9875	1.5	459.988190	459.986810	120	120.00	459.987594	-0.000596	0.000784
459.9875	1.5	459.988190	459.986810	120	138.00	459.987532	-0.000658	0.000722

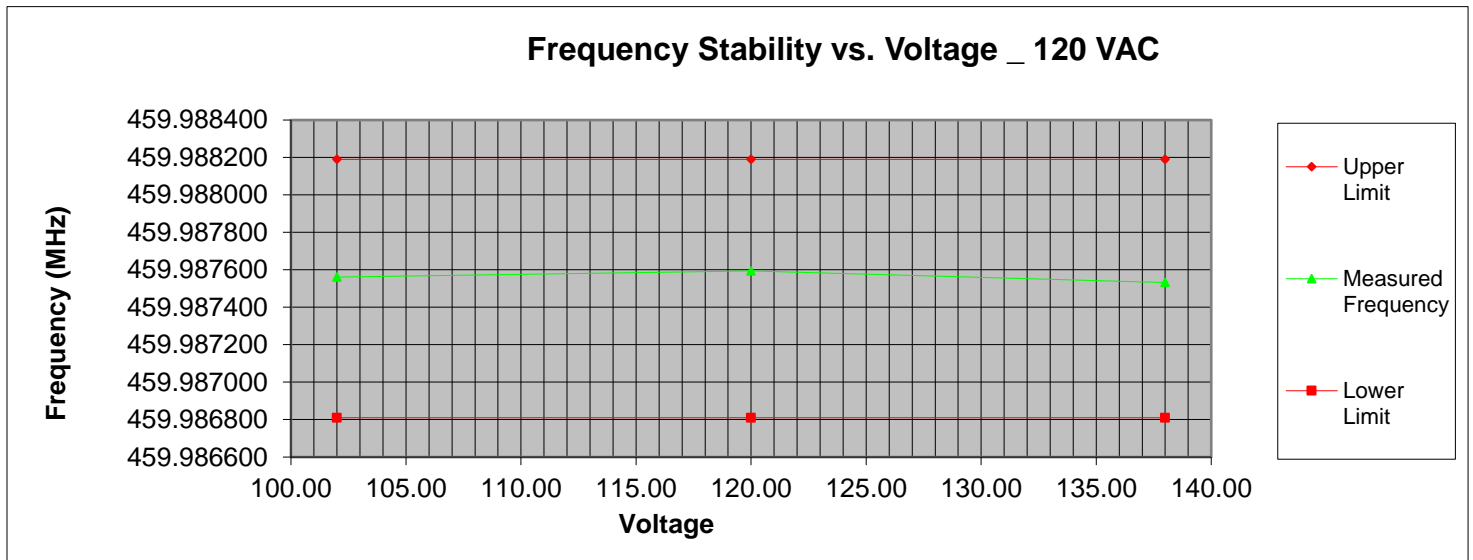

**Frequency Stability vs. Voltage\_+12 VDC**

Tuned Frequency (MHz)	Frequency Tolerance (PPM)	Upper Limit (MHz)	Lower Limit (MHz)	Nominal Voltage	Measured Voltage	Measured Frequency (MHz)	Upper Margin (MHz)	Lower Margin (MHz)
469.9875	1.5	469.988205	469.986795	12.00	10.20	469.987487	-0.000718	0.000692
469.9875	1.5	469.988205	469.986795	12.00	12.00	469.987487	-0.000718	0.000692
469.9875	1.5	469.988205	469.986795	12.00	13.80	469.987487	-0.000718	0.000692

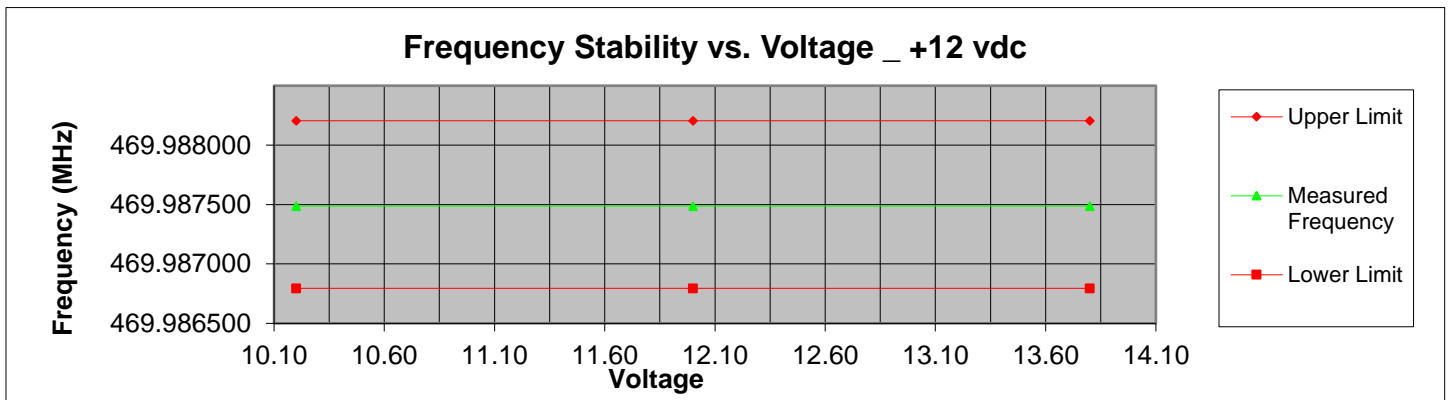





**Necessary Bandwidth Calculations**

**Engineer:** Greg Corbin

**Test Date:** 10/18/2017

Modulation = 11K0F3E		
<b>Necessary Bandwidth Calculation:</b>		
Maximum Modulation (M), kHz	=	3
Maximum Deviation (D), kHz	=	2.5
Constant Factor (K)	=	1
Necessary Bandwidth (B <sub>N</sub> ), kHz	=	(2xM)+(2xDxK)
	=	11.0

Modulation = 16K0F3E		
<b>Necessary Bandwidth Calculation:</b>		
Maximum Modulation (M) kHz	=	3
Maximum Deviation (D), kHz	=	5
Constant Factor (K)	=	1
Necessary Bandwidth (B <sub>N</sub> ), kHz	=	(2xM)+(2xDxK)
	=	16.0

Modulation = 8K10F1E, 8K10F1W, 8K10F7D, 8K10F7E, 8K10F7W, 8K10F1D		
<b>Necessary Bandwidth Calculation:</b>		
Data Rate (R) Kbps	=	9.6
Maximum Deviation (D), kHz	=	3.111
Signaling States	=	4
Constant Factor (K)	=	0.531
Necessary Bandwidth (B <sub>N</sub> ), kHz	=	(R/log <sub>2</sub> S)+2DK
	=	8.1



### Test Equipment Utilized

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Horn Antenna	ARA	DRG-118/A	i00271	6/16/16	6/16/18
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	6/9/17	6/9/18
Bi-Log Antenna	Schaffner	CBL 6111D	i00349	8/3/16	8/3/18
EMI Analyzer	Agilent	E7405A	i00379	2/22/17	2/22/18
Signal Generator	Rohde & Schwarz	SMU200A	i00405	5/5/17	5/5/18
Spectrum Analyzer	Textronix	RSA5126A	i00424	5/3/17	5/3/18
3 Meter Semi-Anechoic Chamber	Panashield	3 Meter Semi-Anechoic Chamber	i00428	8/15/16	8/15/19
Signal Generator	Agilent	E4438C	i00457	10/19/16	10/19/18
Preamplifier for 1-18GHz horn antenna	Miteq	AFS44 00101 400 23-10P-44	i00509	N/A	N/A

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT