



REGULATORY COMPLIANCE TEST REPORT

FCC Part 15 Subpart F 15.519, 15.521 - UWB Device

Report No.: CATA011-U2 Rev A

Company: Catapult Sports Pty Ltd

Model Name: B001

REGULATORY COMPLIANCE TEST REPORT

Company: Catapult Sports Pty Ltd

Model Name: B001

To: FCC CFR 47 Part 15 Subpart F 15.519, 15.521

Test Report Serial No.: CATA011-U2 Rev A

This report supersedes: NONE

Applicant: Catapult Sports Pty Ltd Company
75-83 High St Prahran
Melbourne, Victoria 3181
Australia

Issue Date: 21st July 2022

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION	4
1.1. TESTING ACCREDITATION	4
1.2. RECOGNITION	5
1.3. PRODUCT CERTIFICATION	6
2. DOCUMENT HISTORY	7
3. TEST RESULT CERTIFICATE	8
4. REFERENCES AND MEASUREMENT UNCERTAINTY	9
4.1. Normative References	9
4.2. Test and Uncertainty Procedure	10
5. PRODUCT DETAILS AND TEST CONFIGURATIONS	11
5.1. Technical Details	11
5.2. Scope Of Test Program	12
5.3. Equipment Model(s) and Serial Number(s).....	13
5.4. Antenna Details	13
5.5. Cabling and I/O Ports	13
5.6. Test Configurations	13
5.7. Equipment Modifications	13
5.8. Deviations from the Test Standard	13
6. TEST SUMMARY	14
7. TEST EQUIPMENT CONFIGURATION(S).....	15
7.1. Conducted Test Setup	15
7.2. Radiated Emissions - 3m Chamber	17
8. MEASUREMENT AND PRESENTATION OF TEST DATA	20
9. TEST RESULTS	21
9.1. UWB Bandwidth	21
9.2. Transmit Power	23
9.3. Peak Power Density	25
9.4. Transmitter Spurious Band Emissions	27
9.5. Shutoff Timing Requirements.....	35
A. Appendix A - Graphical Images	37
A.1. Occupied Bandwidth	38
A.2. Transmit Power	41
A.3. Peak Power Density	44
A.4. Transmitter Spurious Emissions	47

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



Accredited Product Certification Body

A2LA has accredited

MiCOM LABS

Pleasanton, CA

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 *Requirements for bodies certifying products, processes and services*. This product certification body also meets the A2LA R322 – *Specific Requirements – Notified Body Accreditation Requirements* and A2LA R308 - *Specific Requirements - ISO-IEC 17065 - Telecommunication Certification Body Accreditation Program*. This accreditation demonstrates technical competence for a defined scope and the operation of a management system.



Presented this 14th day of January 2022



Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 2381.02
Valid to November 30, 2023

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
UK – Approved Body (AB), AB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

1.2. RECOGNITION

MiCOM Labs, Inc is widely recognized for its wireless testing and certification capabilities. In addition to being recognized for Testing and Certification under Phase 2 Mutual Recognition Agreements (MRA) with Canada, Europe, United Kingdom and Japan, our international recognition includes Conformity Assessment Body (CAB) designation status under agreements with Asia Pacific (APEC) MRA Phase 1 countries giving acceptance of MiCOM test reports. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	MRA Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Test Site Designation #: US1084
Canada	Industry Canada (ISED)	FCB	APEC MRA 2	US0159 Test Company #: 4143A
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	Japan MRA 2	RCB 210
	Japan Approvals Institute for Telecommunication Equipment (JATE)			
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA 2	NB 2280
United Kingdom	Department for Business, Energy & Industrial Strategy (BEIS)	AB	UK MRA 2	AB 2280
Mexico	Instituto Federal de Telecomunicaciones (IFT)	CAB	Mexico MRA 1	US0159
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)			
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)			
Singapore	Infocomm Development Authority (IDA)			
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)			
Vietnam	Ministry of Communication (MIC)			

TCB- Telecommunications Certification Bodies (TCB)

FCB – Foreign Certification Body

CAB – Conformity Assessment Body

NB – Notified Body;

AB – Approved Body

MRA – Mutual Recognition Agreement

MRA Phases

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



Accredited Product Certification Body

A2LA has accredited

MiCOM LABS

Pleasanton, CA

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 *Requirements for bodies certifying products, processes and services*. This product certification body also meets the A2LA R322 – *Specific Requirements – Notified Body Accreditation Requirements* and A2LA R308 - *Specific Requirements - ISO-IEC 17065 - Telecommunication Certification Body Accreditation Program*. This accreditation demonstrates technical competence for a defined scope and the operation of a management system.



Presented this 14th day of January 2022



Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 2381.02
Valid to November 30, 2023

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier – 2280
UK – Approved Body (AB), AB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	19 th July 2022	Draft for comment
Rev A	21 st July 2022	Initial Release

In the above table the latest report revision will replace all earlier versions.

3. TEST RESULT CERTIFICATE

Manufacturer: Catapult Sports Pty Ltd 75-83 High St Prahran Melbourne, Victoria 3181 Australia	Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Model: B001	Telephone: +1 925 462 0304
Equipment Type: UWB (Smart Football)	Fax: +1 925 462 0306
S/N's: None	
Test Date(s): 24 th – 28 th May 2021 14 th July 2022	Website: www.micomlabs.com


STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart F 15.519, 15.521	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:

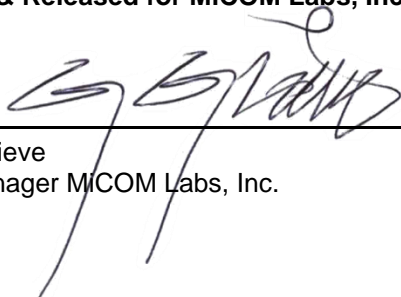

Graeme Grieve
Quality Manager MiCOM Labs, Inc.



Gordon Hurst
President & CEO MiCOM Labs, Inc.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	FCC CFR 47 Part 15 F	2018	Radio Frequency Devices; Subpart F –Ultra Wide Band Devices
II	FCC CFR 47 Part 15.519	2002	Technical requirements for hand-held UWB systems.
III	FCC 47 CFR Part 15.521	2005	Technical requirements applicable to all UWB devices.
IV	A2LA	June 2022	R105 - Requirement's When Making Reference to A2LA Accreditation Status
V	ANSI C63.10	2020	American National Standard for Testing Unlicensed Wireless Devices
VI	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VII	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VIII	M 3003	Edition 4 Oct.2019	Expression of Uncertainty and Confidence in Measurements
IX	FCC 47 CFR Part 2.1033	2021	FCC requirements and rules regarding photographs and test setup diagrams.
X	KDB 393764 D01 UWB FAQ v02	January 29, 2018	Ultra-Wideband (UWB) Devices frequently asked questions

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the Catapult Sports Pty Ltd B001 (Smart Football) to FCC CFR 47 Part 15 Subpart F 15.519, 15.521.
Applicant:	Catapult Sports Pty Ltd 75-83 High St Prahran Melbourne, Victoria 3181 Australia
Manufacturer:	As applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	CATA011-U2
Date EUT received:	12th May 2021
Standard(s) applied:	FCC Part 15 Subpart F 15.519, 15.521
Dates of test (from - to):	24 th – 28 th May 2021 & 15 th July 2022
No of Units Tested:	2
Product Family Name:	Smart Football
Model(s):	B001
Location for use:	Indoors and Outdoors
Declared Frequency Range(s):	3993.6 GHz 4492.8 GHz 6489.6 GHz
Type of Modulation:	BPM/BPSK
EUT Modes of Operation:	UWB
Declared Nominal Output Power (dBm):	-7 dBm
Rated Input Voltage and Current:	3.7Vdc (Li-ion Battery)
Operating Temperature Range:	-20 to 60°C
Equipment Dimensions:	175 x 130 x 59.5 mm
Weight:	520 g
Hardware Rev:	MP
Software Rev:	1.1.0
Product Application:	Mobile & Portable Client Devices

5.2. Scope Of Test Program

Catapult Sports Pty Ltd Company B001

The scope of the test program was to test the Catapult Sports Pty Ltd Company B001 Smart Football configurations operating within the frequency ranges 3100 - 10600 MHz for compliance against the following specification:

FCC CFR 47 Part 15 Subpart F – Ultra-Wideband Operation; 15.519, 15.521

Compliance Measurement Procedures for Unlicensed National Information Infrastructure devices operating in the 3100 - 10600 MHz bands.

15.519 Technical requirements for hand-held UWB systems.

15.521 Technical requirements applicable to all UWB devices.

5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description	Manufacturer	Model No.	Serial No.
EUT	Smart Football	Catapult Sports Pty Ltd	B001	N/A
Support	Charging Cradle	Energous	--	--

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	Catapult Sports Pty Ltd	TaoGlas UWC.21	Bespoke	-0.15	--	--	--	3750-7500
BF Gain - Beamforming Gain Dir BW - Directional BeamWidth X-Pol - Cross Polarization								

5.5. Cabling and I/O Ports

The EUT has no I/O Ports, it connects to the charger wirelessly.

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
3100-10600 MHz				
UWB	--	3993.6	4492.8	6489.6

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

- NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

- NONE

6. TEST SUMMARY


List of Measurements

Test Header	Result	Data Link
UWB Bandwidth	Complies	View Data
Average Output Power	Complies	View Data
Peak Power Density	Complies	View Data
Transmitter Spurious Radiated Emissions	Complies	View Data
Shutoff Timing Requirements	Complies	View Data
Digital Emissions	Complies, see MiCOM Labs CATA08-U2 Emissions Report	
AC Wire Line Emissions	Complies, see MiCOM Labs CATA08-U2 Emissions Report	
Comments: None		

7. TEST EQUIPMENT CONFIGURATION(S)

7.1. Conducted Test Setup

MiTest Automated Test System

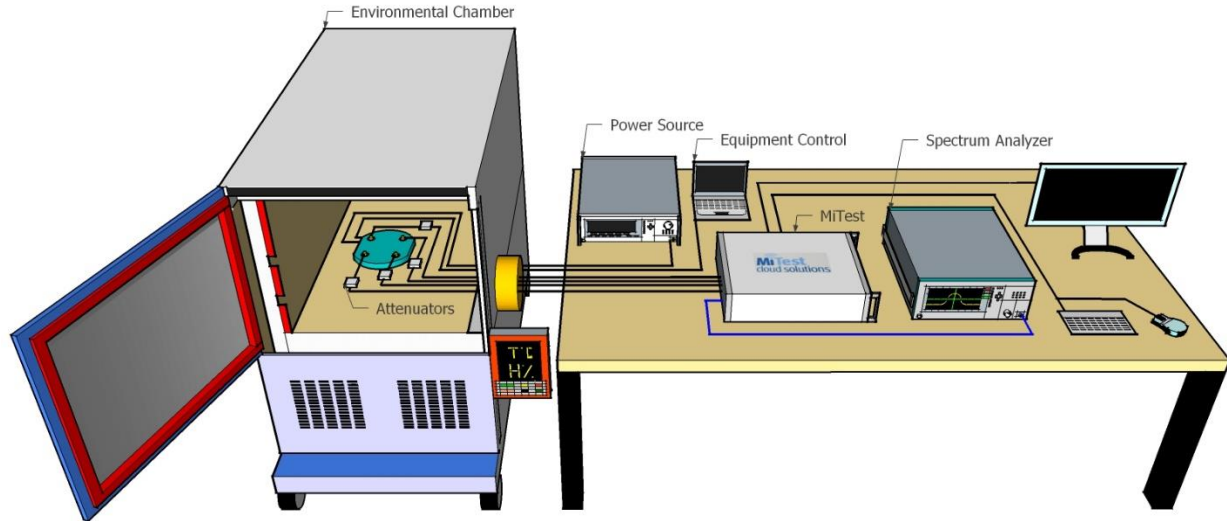

A full system calibration was performed on the test station and any resulting system losses (or gains) were considered in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
#3 SA	MiTest Box to SA	Fairview Microwave	SCA1814-0101-72	#3 SA	7 Oct 2022
#3P1	EUT to MiTest box port 1	Fairview Microwave	SCA1814-0101-72	#3P1	7 Oct 2022
#3P2	EUT to MiTest box port 2	Fairview Microwave	SCA1814-0101-72	#3P2	7 Oct 2022
#3P3	EUT to MiTest box port 3	Fairview Microwave	SCA1814-0101-72	#3P3	7 Oct 2022
#3P4	EUT to MiTest box port 4	Fairview Microwave	SCA1812-0101-72	#3P4	7 Oct 2022
249	Thermocouple; Resistance Thermometer	Thermotronics	GR2105-02	9340 #2	30 Oct 2022
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	8 Oct 2022
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.2.3.0	Not Required
405	DC Power Supply 0-60V	Agilent	6654A	MY4001826	Cal when used
408	USB to GPIB interface	National Instruments	GPIB-USB HS	14C0DE9	Not Required
441	USB Wideband Power Sensor	Boonton	55006	9179	20 Sep 2022

442	USB Wideband Power Sensor	Boonton	55006	9181	19 Oct 2022
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
461	Spectrum Analyzer	Agilent	E4440A	MY46185537	27 Sep 2023
493	USB Wideband Power Sensor	Boonton	55006	9634	8 Oct 2022
494	USB Wideband Power Sensor	Boonton	55006	9726	19 Oct 2022
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2023
512	MiTest Cloud Solutions RF Test Box	MiCOM	2nd Gen with DFS	512	29 Jun 2023
555	Rhode & Schwarz Receiver (Firmware Version : 2.00 SP1)	Rhode & Schwarz	ESW 44	101893	28 Jun 2023
75	Environmental Chamber	Thermatron	SE-300-2-2	27946	20 Feb 2023

Rented Equipment


ISO17025 Accredited Calibration
 Calibrated By: Rohde & Schwarz

Description	Manufacturer	Model#	Serial#	Calibration Date
Signal Analyzer	Rohde & Schwarz	ESW44	101892	12 May 2021


7.2. Radiated Emissions - 3m Chamber

The following tests were performed using the radiated test set-up shown in the diagram below. Radiated emissions above and below 1GHz.

Radiated Emissions Above 1GHz Test Setup

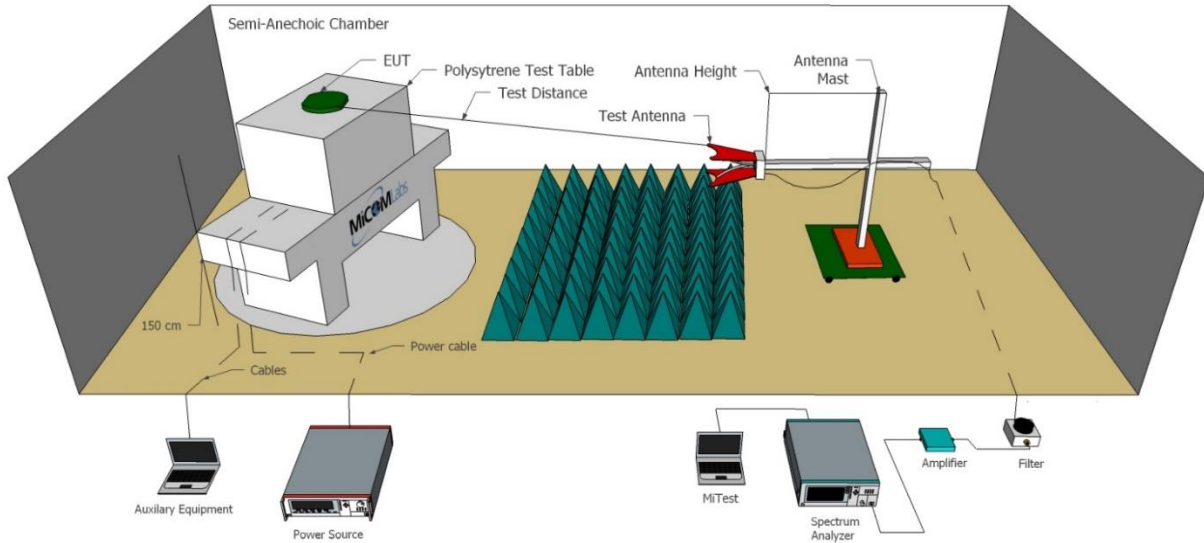

Radiated Emissions Below 1GHz Test Setup

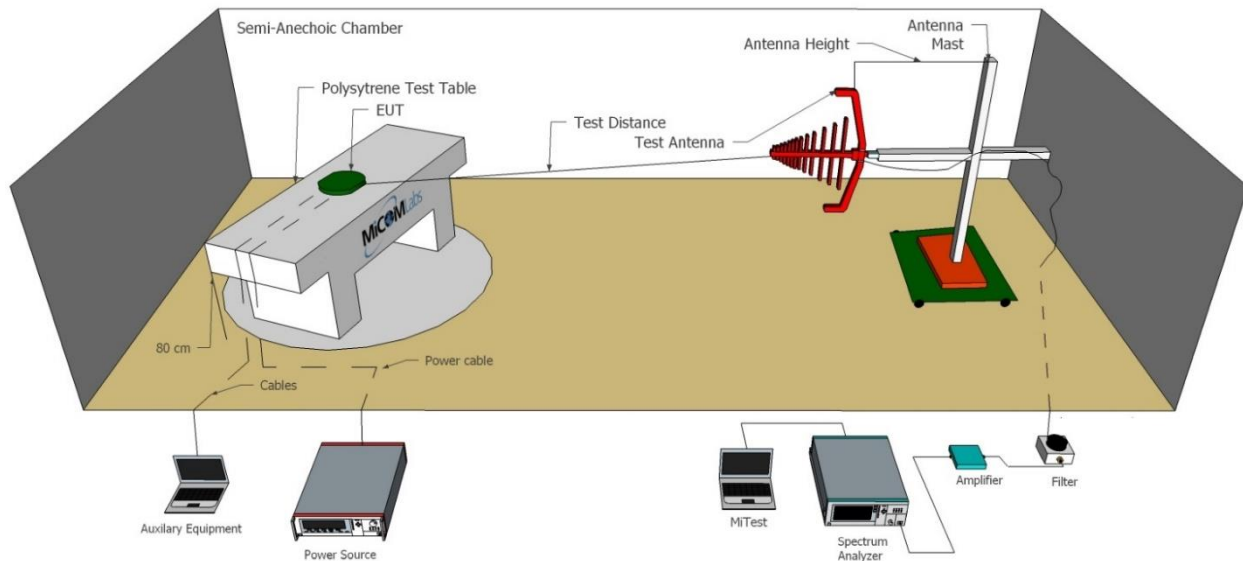

A full system calibration was performed on the test station and any resulting system losses (or gains) were considered in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	8 Oct 2022
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	24 Sep 2022
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
336	Active loop Ant 10kHz to 30 MHz	EMCO	EMCO 6502	00060498	29 Nov 2022
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	29 Sep 2023
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	29 Sep 2022
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	6 Oct 2022
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	6 Oct 2022
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	27 Oct 2022
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	30 Sep 2023
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	2 Nov 2022
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	27 Oct 2022
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	27 Oct 2022
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	27 Oct 2022
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	6 Oct 2022

481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	6 Oct 2022
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2023
554	Precision SMA Cable	Fairview Microwave	SCE18060101-400CM	554	6 Oct 2022
555	Rhode & Schwarz Receiver (Firmware Version : 2.00 SP1)	Rhode & Schwarz	ESW 44	101893	28 Jun 2023
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC05	Confidence Check	MiCOM	CC05	None	27 Feb 2023

Rented Equipment

ISO17025 Accredited Calibration
 Calibrated By: Rohde & Schwarz

Description	Manufacturer	Model#	Serial#	Calibration Date
Signal Analyzer	Rohde & Schwarz	ESW44	101892	12 May 2021

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

9. TEST RESULTS

9.1. UWB Bandwidth

Conducted Test Conditions for UWB Bandwidth			
Standard:	FCC CFR 47:15.519(b)	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	UWB Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	ANSI C63.10 Section 10.1	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		
Test Procedure for Bandwidth Measurement			
15.519 (b) The UWB bandwidth of a device operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.			
The Resolution Bandwidth was set to 1MHz RBW IAW ANSI C63.10. Testing was performed under ambient conditions at nominal voltage.			
Test configuration and setup used for the measurement was per the Radiated/conducted Test Set-up section specified in this document.			

Equipment Configuration for UWB Bandwidth

Variant:	UWB	Duty Cycle (%):	100
Data Rate:	-	Antenna Gain (dBi):	-0.15
Modulation:	--	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Frequency	Measurement Technique 10 dB Bandwidth (MHz)	10 dB Bandwidth (MHz)			
		Highest	Lowest		
MHz	Port A				
3993.6	813.627	813.627	813.627		
4492.8	725.451	725.451	725.451		
6489.6	718.680	718.680	718.680		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above values are representative of the worst-case value between polarities and based on the power measurements.

9.2. Transmit Power

Conducted Test Conditions for Maximum Radiated Output Power							
Standard:	FCC CFR 47:15.519 (c)	Ambient Temp. (°C):	24.0 - 27.5				
Test Heading:	Radiated Emissions UWB Transmission	Rel. Humidity (%):	32 - 45				
Standard Section(s):	ANSI C63.10 Section 10.3.5	Pressure (mBars):	999 - 1001				
Reference Document(s):	None						
<p>Test Procedure for UWB Transmission</p> <p>Testing was performed under ambient conditions nominal voltage.</p> <p>Test configuration and setup used for the measurement was per the Radiated Test Set-up section specified in this document. Supporting KDB's referenced below.</p> <p>15.519 (c) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:</p> <p>Operating Frequency Band: 3100-10600 MHz</p> <p>Limits Maximum EIRP (dBm)</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>EIRP Limit (dBm)</th> </tr> </thead> <tbody> <tr> <td>3100 - 10600</td> <td>-41.3</td> </tr> </tbody> </table>				Frequency (MHz)	EIRP Limit (dBm)	3100 - 10600	-41.3
Frequency (MHz)	EIRP Limit (dBm)						
3100 - 10600	-41.3						

Equipment Configuration for RF Output Power
--

Variant: UWB	Duty Cycle (%): 99
Data Rate: -	Antenna Gain (dBi): -0.15
Modulation: -	Beam Forming Gain (Y)(dB): Not Applicable
TPC: Not Applicable	Tested By: JK
Engineering Test Notes:	

Test Measurement Results

Test Frequency MHz	Measured Radiated Output Power (dBm)	EIRP + Duty Cycle Correction Factor (99%)	Limit (dBm)	Margin (dB)	EUT Power Setting
3993.6	-42.05	-42.05	-41.3	-0.75	16.0
4492.8	-42.64	-42.64	-41.3	-1.34	16.0
6489.6	-41.79	-41.94	-41.3	-0.64	16.0

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

9.3. Peak Power Density

Test Conditions for Maximum Peak Power Density									
Standard:	FCC CFR 47:15.519(e), 15.521	Ambient Temp. (°C):	24.0 - 27.5						
Test Heading:	Radiated Emissions UWB Transmission	Rel. Humidity (%):	32 - 45						
Standard Section(s):	ANSI C63.10 Section 10.3.6	Pressure (mBars):	999 - 1001						
Reference Document(s):	None								
<p>Test Procedure for UWB Transmission</p> <p>15.519 (e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M. That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures described in §15.521.</p> <p>Testing was performed under ambient conditions at nominal voltage.</p> <p>Test configuration and setup used for the measurement was per the Radiated Test Set-up section specified in this document.</p> <p>Operating Frequency Band: 3100-10600 MHz</p> <p>Limits Maximum EIRP (dBm)</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>EIRP Limit (dBm/50MHz)</th> <th>EIRP Limit (dBm/1MHz)</th> </tr> </thead> <tbody> <tr> <td>3100 - 10600</td> <td>0</td> <td>-34</td> </tr> </tbody> </table>				Frequency (MHz)	EIRP Limit (dBm/50MHz)	EIRP Limit (dBm/1MHz)	3100 - 10600	0	-34
Frequency (MHz)	EIRP Limit (dBm/50MHz)	EIRP Limit (dBm/1MHz)							
3100 - 10600	0	-34							

Equipment Configuration for Peak Power Density

Variant:	UWB	Duty Cycle (%):	99
Data Rate:	-	Antenna Gain (dBi):	-0.15
Modulation:	--	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Peak Power Density (dBm)	EIRP + Duty Cycle Correction Factor (99%)	Limit (dBm)	Margin (dB)	EUT Power Setting
3993.6	-16.98	-17.13	0	-16.98	16.0
4492.8	-14.69	-14.84	0	-14.69	16.0
6489.6	-7.41	-7.56	0	-7.41	16.0

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

9.4. Transmitter Spurious Band Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47 15.519(c) (d) (e) , 15.521(d)	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	ANSI C63.10 Section 10.2 + 10.3	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in max hold mode. Depending on the frequency band spanned a notch filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Limits for Restricted Bands (15.205, 15.209)

Peak emission: 68.23 dBuV/m

Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss

Measurements made at 1 meter to meet noise floor to limit requirements

Radiated Spurious Emissions in the GPS Bands 15.519 (c), 15.521 (d)

15.519 (c) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency Range		Average Limit	
MHz	MHz	EIRP (dBm)	EIRP at 1 Meters (dBuV/m)
960	1610	-75.3	29.4
1610	1990	-63.3	41.4
1990	3100	-61.3	43.4
3100	10600	-41.3	63.4
10600	18000	-61.3	43.4

Radiated Spurious Emissions in the GPS Bands 15.519(d), 15.521 (d)

15.519 (d) In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency Range		Average Limit	
MHz	MHz	EIRP (dBm)	EIRP at 1 Meters (dBuV/m)
1164	1240	-85.3	19.47
1559	1610	-85.3	19.47

50 MHz Peak Emissions 15.519, 15.521

15.519 (e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures described in §15.521

Within 50 MHz bandwidth centered on highest radiated emissions f_M , Limit is 0.0 dBm EIRP. At 1-meter distance the equivalent level is 104.77 dBuV/m

Equipment Configuration for Transmitter Spurious Emissions

Variant:	UWB	Duty Cycle (%):	99
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	-0.15
Modulation:	BPSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JK
Engineering Test Notes:			

Test Measurement Results

HORIZONTAL					
Temperature	20.0 °C	Maximum Observed Spurious Emission		Limit	Margin
Voltage	12.00 Vdc	Amplitude	Emission Frequency		
Test Frequency	Frequency Range	dBuV/m	MHz	dBuV/m	dB
3993.6 MHz	960 - 1000 MHz	24.07	999.04	29.40	-5.33
	1000 - 1610 MHz	26.18	1309.28	29.40	-3.22
	1164 - 1240 MHz	6.66	1214.41	19.47	-12.81
	1559 - 1610 MHz	5.85	1599.98	19.47	-13.62
	1610 - 1990 MHz	27.64	1951.92	41.40	-13.76
	1990 - 3100 MHz	28.92	3082.20	43.40	-14.48
	3100 - 10600 MHz	59.05	3852.51	63.40	-4.35
	10600 - 18000 MHz	40.73	16413.00	43.40	-2.67
4492.8 MHz	960 - 1000 MHz	24.08	999.52	29.40	-5.32
	1000 - 1610 MHz	25.76	1309.28	29.40	-3.64
	1164 - 1240 MHz	6.59	1189.44	19.47	-12.89
	1559 - 1610 MHz	5.84	1562.88	19.47	-13.63
	1610 - 1990 MHz	27.39	1949.64	41.40	-14.01
	1990 - 3100 MHz	28.43	2688.48	43.40	-14.97
	3100 - 10600 MHz	58.37	4512.83	63.40	-5.03
	10600 - 18000 MHz	40.60	16458.00	43.40	-2.80

VERTICAL					
Temperature	20.0 °C	Maximum Observed Spurious Emission		Limit	Margin
Voltage	12.00 Vdc	Amplitude	Emission Frequency		
Test Frequency	Frequency Range	dBuV/m	MHz	dBuV/m	dB
3993.6 MHz	960 - 1000 MHz	24.06	997.80	29.40	-5.34
	1000 - 1610 MHz	25.99	1310.50	29.40	-3.41
	1164 - 1240 MHz	6.68	1240.00	19.47	-12.79
	1559 - 1610 MHz	5.50	1597.74	19.47	-13.97
	1610 - 1990 MHz	28.49	1881.86	41.40	-12.92
	1990 - 3100 MHz	29.10	3084.43	43.40	-14.31
	3100 - 10600 MHz	62.99	3936.67	63.40	-0.41
	10600 - 18000 MHz	40.66	16413.00	43.40	-2.74
4492.8 MHz	960 - 1000 MHz	24.05	998.40	29.40	-5.35
	1000 - 1610 MHz	25.68	1310.50	29.40	-3.72
	1164 - 1240 MHz	6.67	1239.09	19.47	-12.80
	1559 - 1610 MHz	5.48	1574.43	19.47	-13.99
	1610 - 1990 MHz	29.30	1881.86	41.40	-12.10
	1990 - 3100 MHz	28.62	2572.81	43.40	-14.78
	3100 - 10600 MHz	62.42	4437.68	63.40	-0.98
	10600 - 18000 MHz	40.60	16428.00	43.40	-2.80

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB


Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Spurious Emissions 960MHz - 10600GHz

Antenna:	Integral	Variant:	UWB
Antenna Gain (dBi):	-0.15	Modulation:	BPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	6489.6	Data Rate:	Not Applicable
Power Setting:	16	Tested By:	SB

Test Measurement Results

FCC Spurious 960MHz - 10600GHz

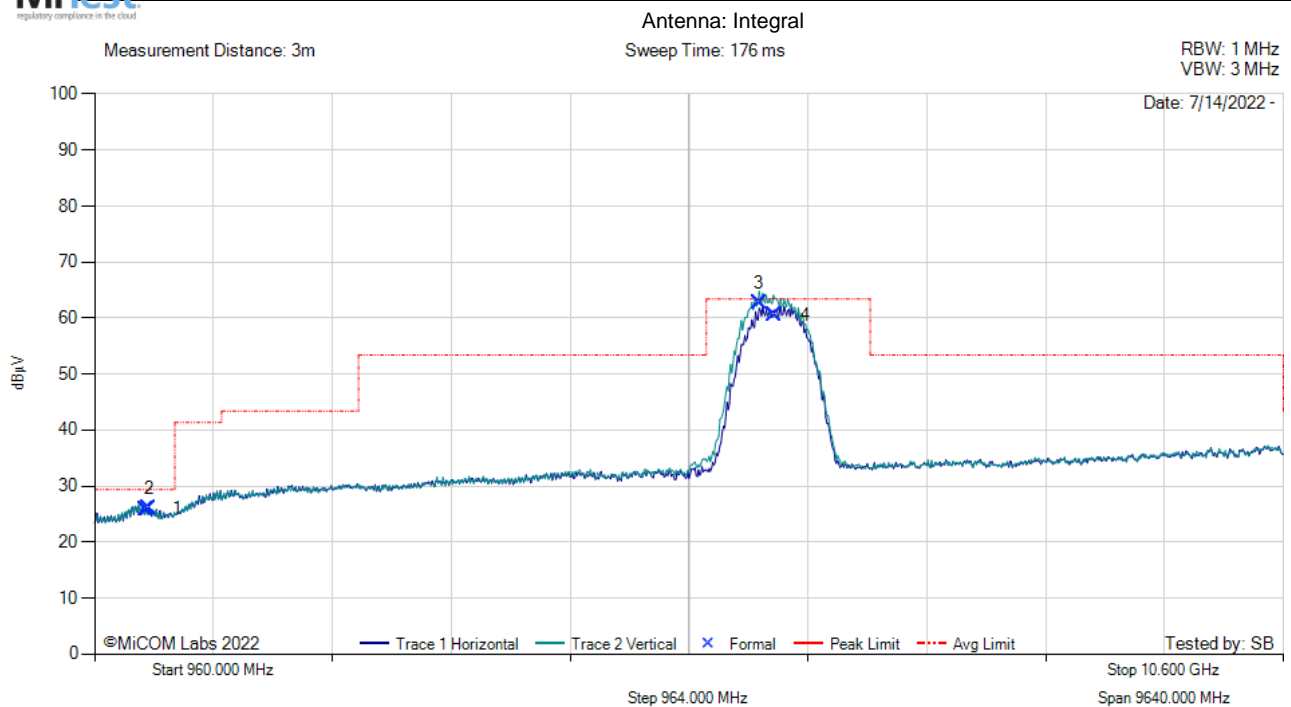

960.00 - 10600.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1374.53	40.30	1.51	-15.89	25.92	AVG	Horizontal	59	149	29.4	-3.5	Pass
2	1403.43	40.55	1.52	-16.07	26.00	AVG	Vertical	36	149	29.4	-3.4	Pass
3	6348.86	68.17	3.34	-8.76	62.75	AVG	Vertical	220	149	63.4	-0.6	Pass
4	6473.98	65.93	3.38	-8.72	60.59	AVG	Horizontal	219	149	63.4	-2.8	Pass


Test Notes: EUT operating at 3.7VDC

Equipment Configuration for Spurious Emissions 10600 - 18000MHz

Antenna:	Integral	Variant:	UWB
Antenna Gain (dBi):	-0.15	Modulation:	BPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	6489.6	Data Rate:	Not Applicable
Power Setting:	16	Tested By:	SB

Test Measurement Results

FCC Spurious 10600 - 18000MHz

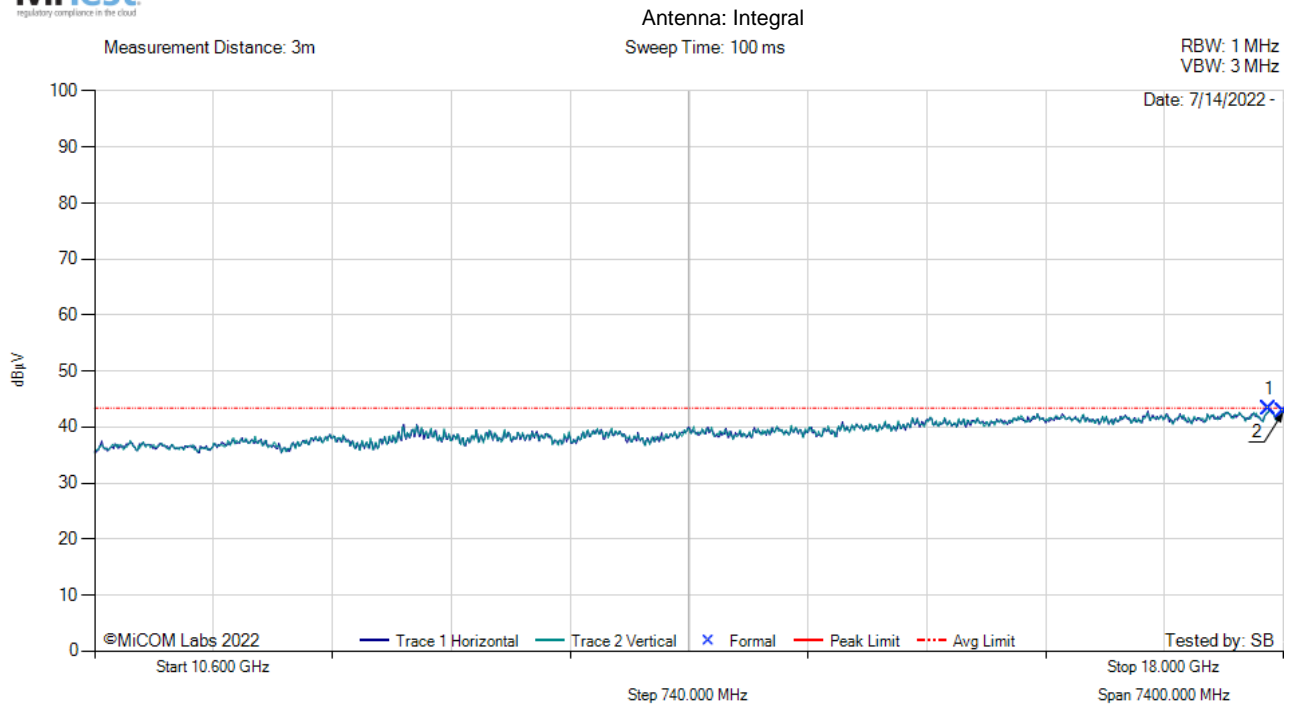

10600.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	17911.29	36.16	6.76	0.44	43.35	AVG	Horizontal	308	149	43.4	-0.05	Pass
2	17999.91	36.25	6.43	0.08	42.76	AVG	Vertical	99	149	43.4	-0.6	Pass


Test Notes: EUT operating at 3.7VDC

Equipment Configuration for Spurious Emissions for GPS 1164MHz - 1240MHz

Antenna:	Integral	Variant:	UWB
Antenna Gain (dBi):	-0.15	Modulation:	BPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	6489.6	Data Rate:	Not Applicable
Power Setting:	16	Tested By:	SB

Test Measurement Results

FCC GPS Spurious 1164MHz - 1240MHz

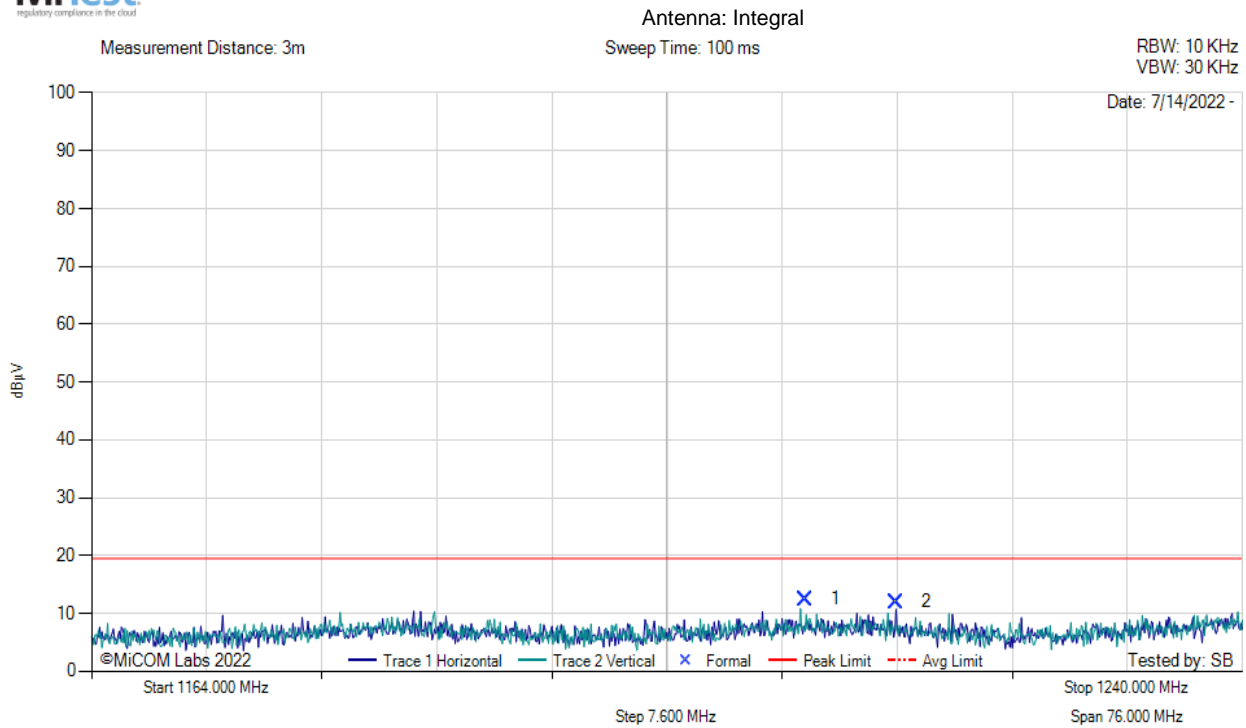

1164.00 - 1240.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1211.10	27.79	1.41	-16.70	12.50	AVG	Vertical	32	149	19.5	-7.0	Pass
2	1217.15	27.23	1.40	-16.62	12.01	AVG	Horizontal	119	149	19.5	-7.5	Pass


Test Notes: EUT operating at 3.7VDC

Equipment Configuration for Spurious Emissions for GPS 1559MHz - 1610MHz

Antenna:	Integral	Variant:	UWB
Antenna Gain (dBi):	-0.15	Modulation:	BPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	6489.6	Data Rate:	Not Applicable
Power Setting:	16	Tested By:	SB

Test Measurement Results

FCC GPS Spurious 1559MHz - 1610MHz

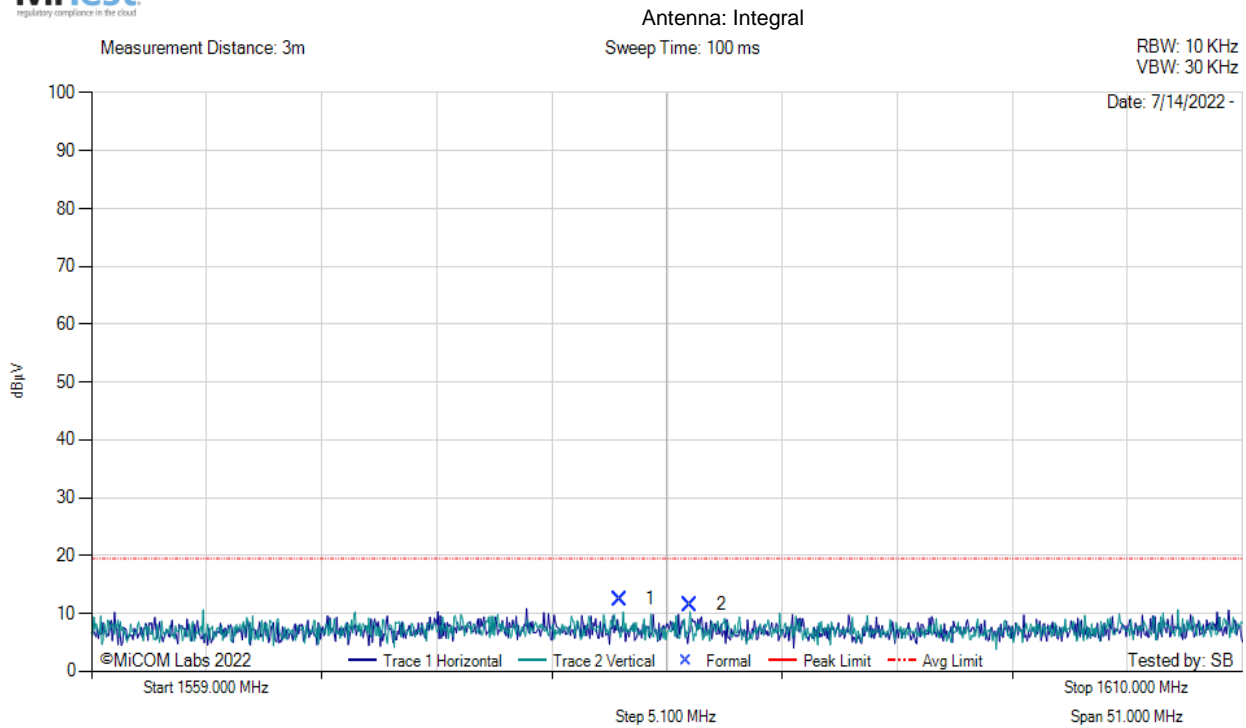

1559.00 - 1610.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1582.39	27.78	1.59	-16.86	12.51	AVG	Horizontal	262	149	19.5	-7.0	Pass
2	1585.54	26.84	1.61	-16.88	11.57	AVG	Vertical	6	149	19.5	-7.9	Pass

Test Notes: EUT operating at 3.7VDC

9.5. Shutoff Timing Requirements

Radiated Test Conditions for Shutoff Timing Requirements			
Standard:	FCC CFR 47:15.519 (a) (1)	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Shutoff Timing Requirements	Rel. Humidity (%):	32 - 45
Standard Section(s):	ANSI C63.10 Section 10	Pressure (mBars):	999 - 1001
Reference Document(s):	None		
<p>Test Procedure for UWB Transmission</p> <p>15.519 (a) (1) A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting</p> <p>Testing was performed under ambient conditions at nominal voltage.</p> <p>Test configuration and setup used for the measurement was per the Radiated Test Set-up section specified in this document.</p> <p>Operating Frequency Band: 3100-10600 MHz</p> <p>Limits The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received.</p>			

Operational Markers M1, M2, M3

The graphical representation on the next page contains 3 markers, marker M1 indicates the start of a 10 second window at the point when the associated receiver is removed from the network. Marker M2 marks when the transmitter ceases transmissions, and marker M3 indicates the end of the 10 second window

Equipment Configuration for Shutdown Timing Requirements

Variant:	UWB	Duty Cycle (%):	99
Data Rate:	-	Antenna Gain (dBi):	-0.15
Modulation:	-	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JK
Engineering Test Notes:			


Test Measurement Results

Frequency (MHz)	Shutdown Time	Limit	Margin	EUT Power Setting
	(s)	(s)	(s)	Numeric
3993.60	8.867	10	-1.23	16

Shutdown Timing



Variant: UWB, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

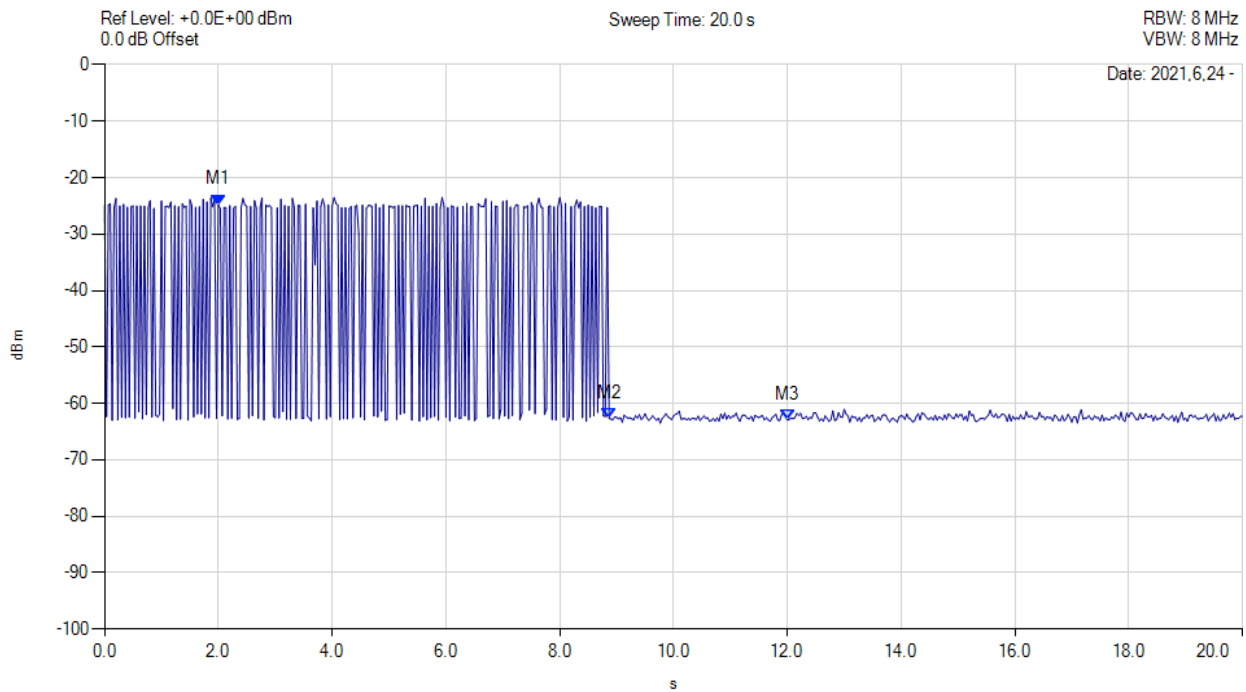


Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = WRIT	M1(3993.60 MHz) : 2.000 s : -24.814 dBm M2(3993.60 MHz) : 8.867 s : -62.621 dBm M3(3993.60 MHz) : 12.000 s : -62.947 dBm	Channel Frequency: 3993.60 MHz

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Uncertainty:	±1.33 dB

A. Appendix A - Graphical Images

A.1. Occupied Bandwidth

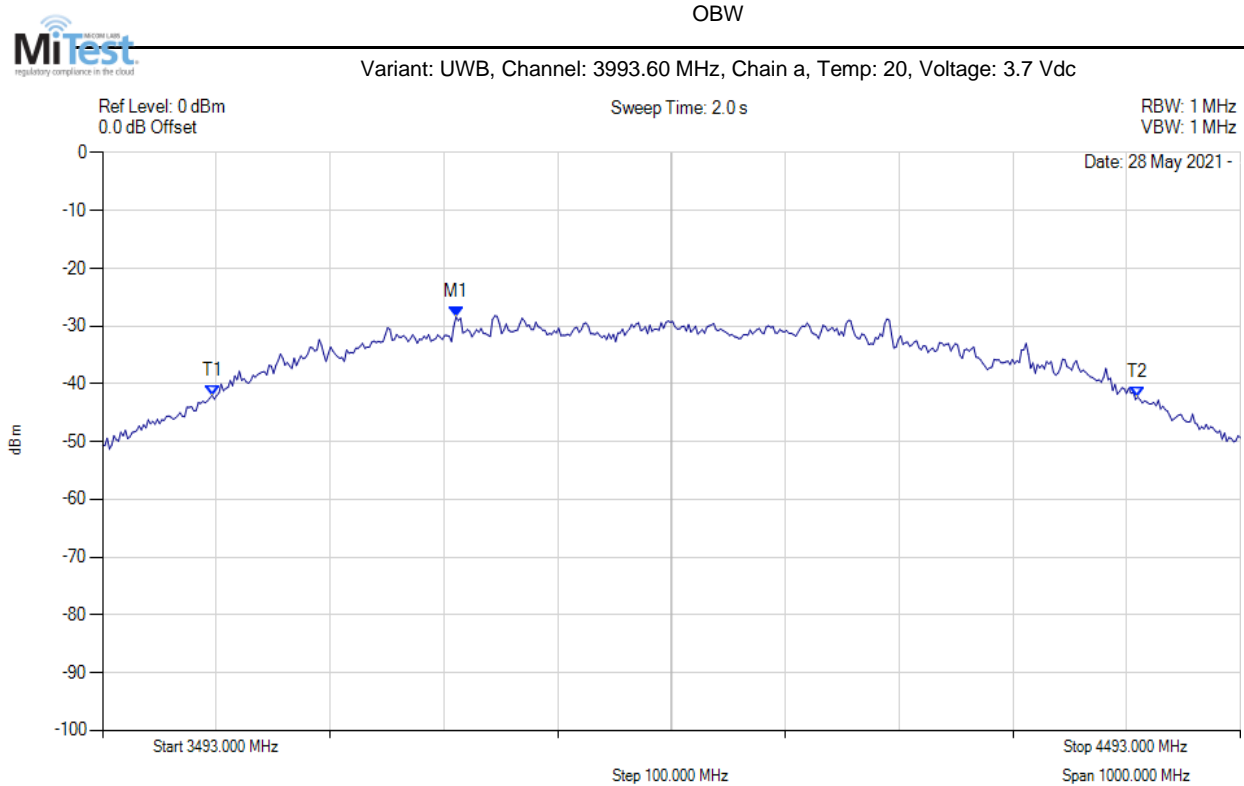


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = CLR/WRITE	M1 : 3803.621 MHz : -28.420 dBm T1 : 3589.192 MHz : -41.995 dBm T2 : 4402.820 MHz : -42.304 dBm OBW : 813.627 MHz	Channel Frequency: 3993.60 MHz

[back to matrix](#)

OBW



Variant: UWB, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

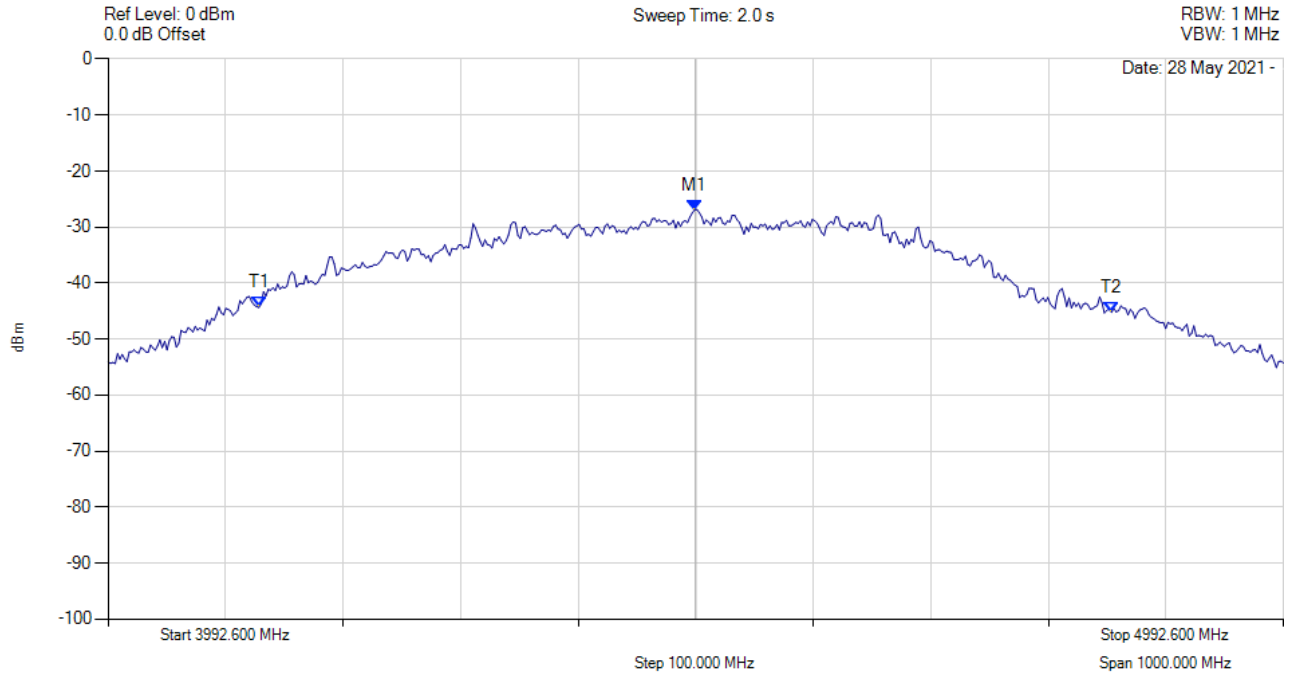


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = CLR/WRITE	M1 : 4491.598 MHz : -26.904 dBm T1 : 4120.857 MHz : -44.340 dBm T2 : 4846.307 MHz : -45.208 dBm OBW : 725.451 MHz	Channel Frequency: 4492.80 MHz

[back to matrix](#)

OBW



Variant: UWB, Channel: 6489.6 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

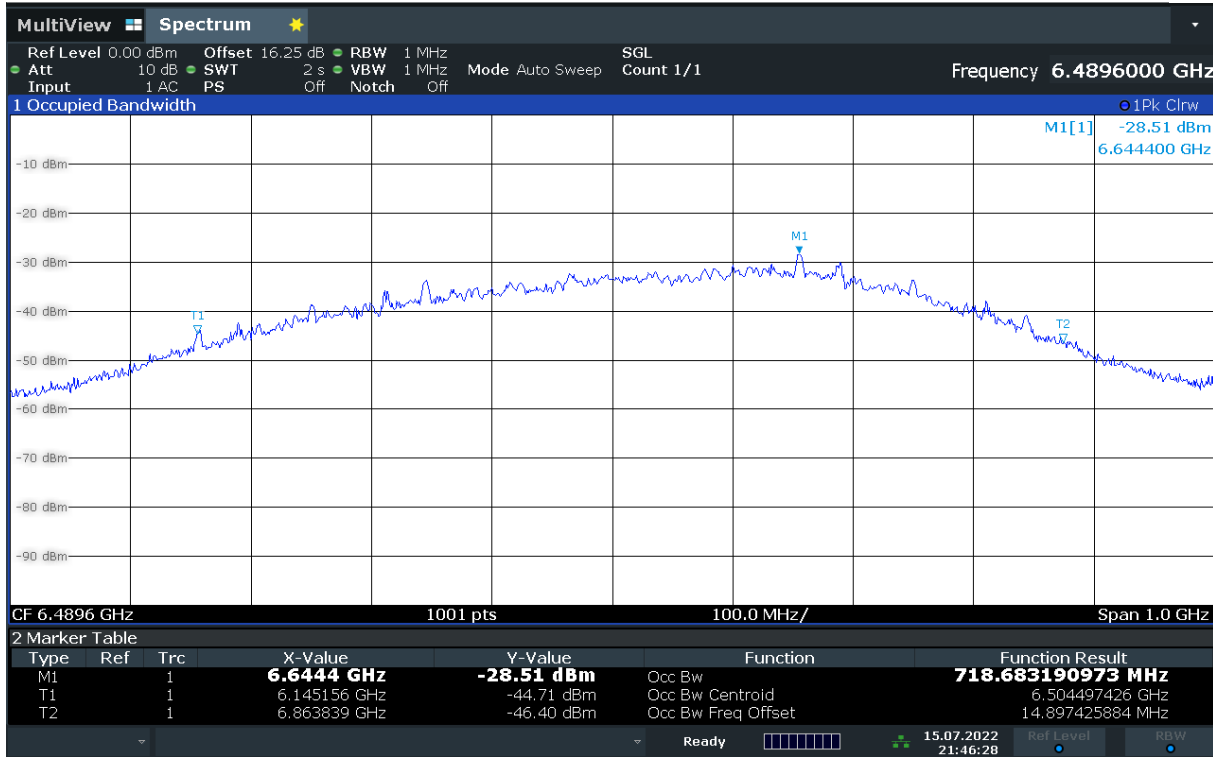

Date: 15.JUL.2022 21:46:28

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = CLR/WRITE	M1 : 4491.598 MHz : -28.51 dBm T1 : 6145.156 MHz : -44.71 dBm T2 : 6863.830 MHz : -46.40 dBm OBW : 718.681 MHz	Pass


[back to matrix](#)

A.2. Transmit Power



TRANSMIT POWER

Variant: UWB, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

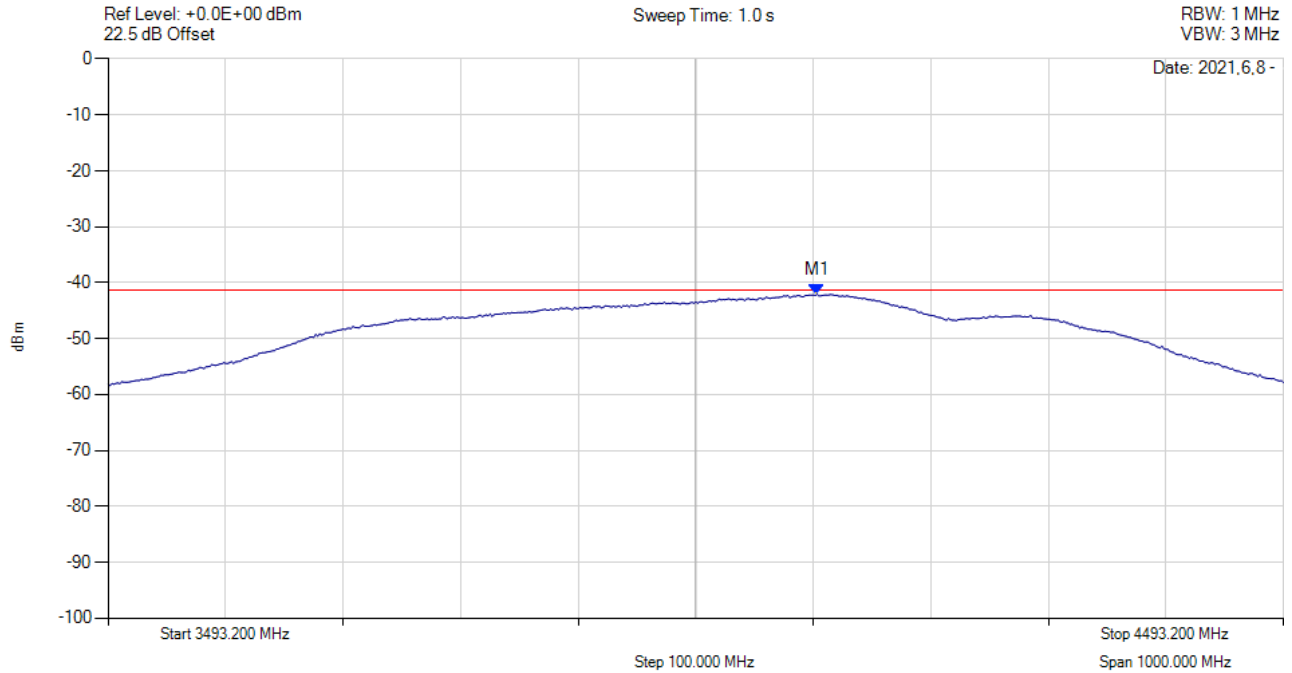


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 1 RF Atten (dB) = 10 Trace Mode = CLR/WRITE	M1 : 4096.500 MHz : -42.053 dBm	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMIT POWER



Variant: UWB, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

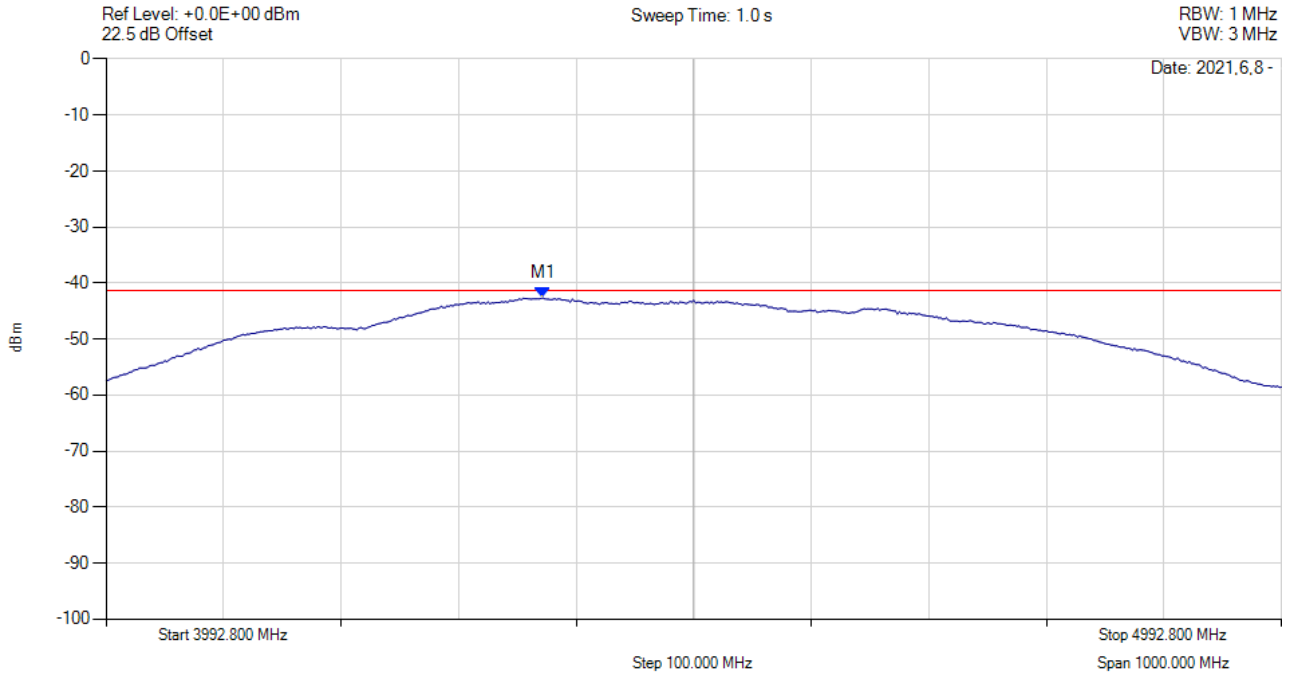


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 1 RF Atten (dB) = 10 Trace Mode = CLR/WRITE	M1 : 4364.500 MHz : -42.638 dBm	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMIT POWER



Variant: UWB, Channel: 6489.6 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

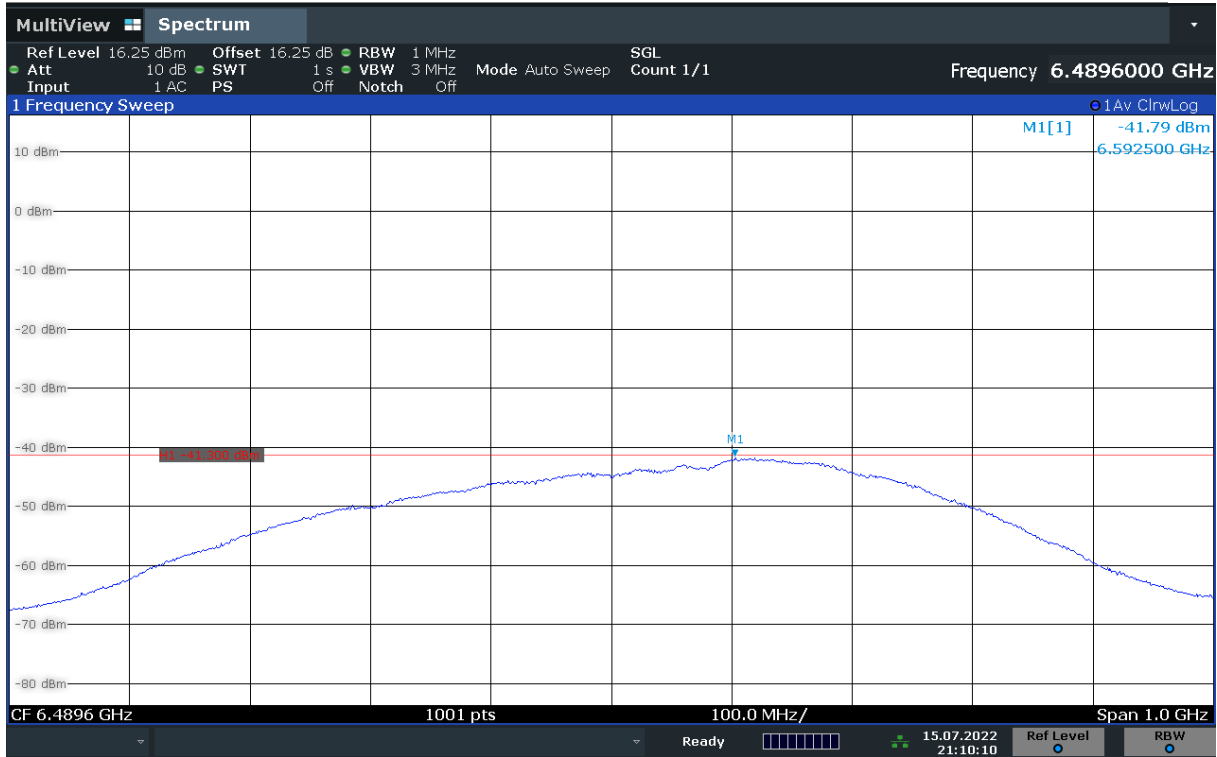

Date: 15.JUL.2022 21:10:10

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 1 RF Atten (dB) = 10 Trace Mode = CLR/WRITE	M1 : 6489.6 MHz : -41.79 dBm	Pass


[back to matrix](#)

A.3. Peak Power Density

PEAK POWER DENSITY



Variant: UWB, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

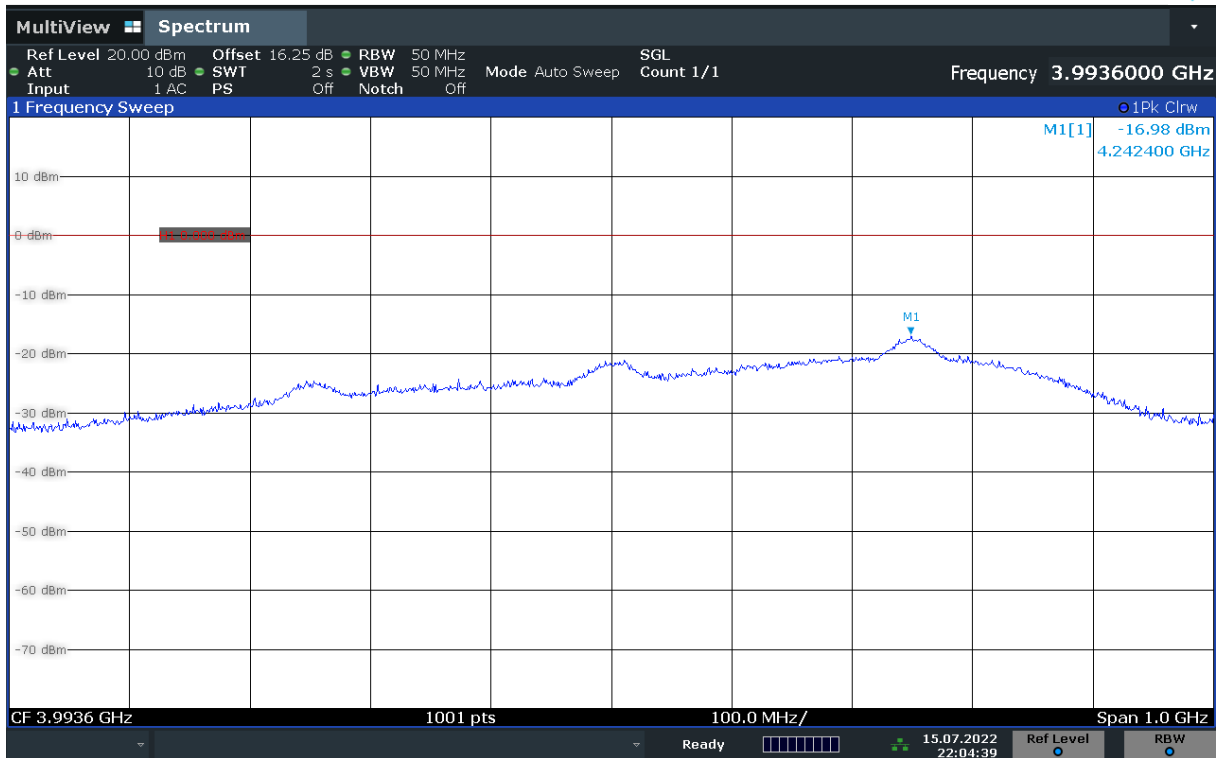

Date: 15.JUL.2022 22:04:39


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = PEAK Sweep Count = 1 RF Atten (dB) = 10 Trace Mode = CLR/WRITE	M1 : 3995.6 MHz : -16.98 dBm	Pass

[back to matrix](#)

PEAK POWER DENSITY



Variant: UWB, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

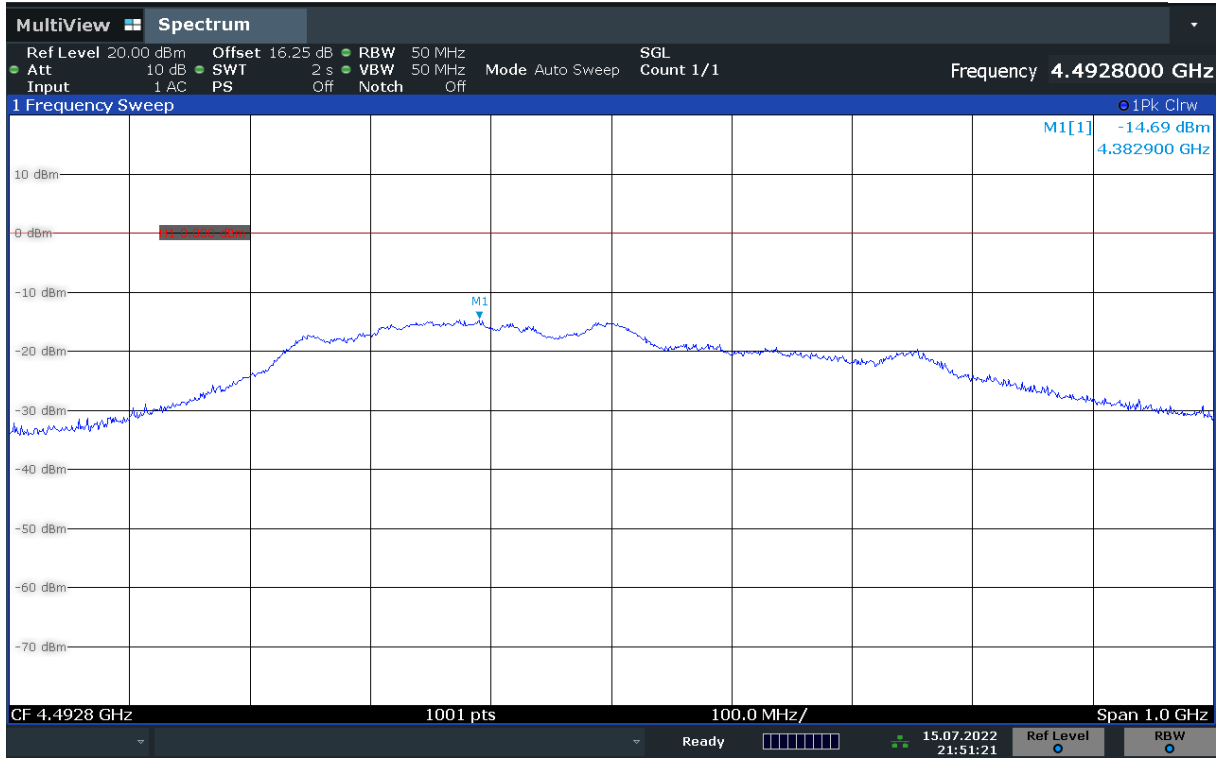

Date: 15.JUL.2022 21:51:21


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = PEAK Sweep Count = 1 RF Atten (dB) = 10 Trace Mode = CLR/WRITE	M1 : 4492.800 MHz : -14.69 dBm	Channel Frequency: 4492.80 MHz

[back to matrix](#)

PEAK POWER DENSITY



Variant: UWB, Channel: 6489.6 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

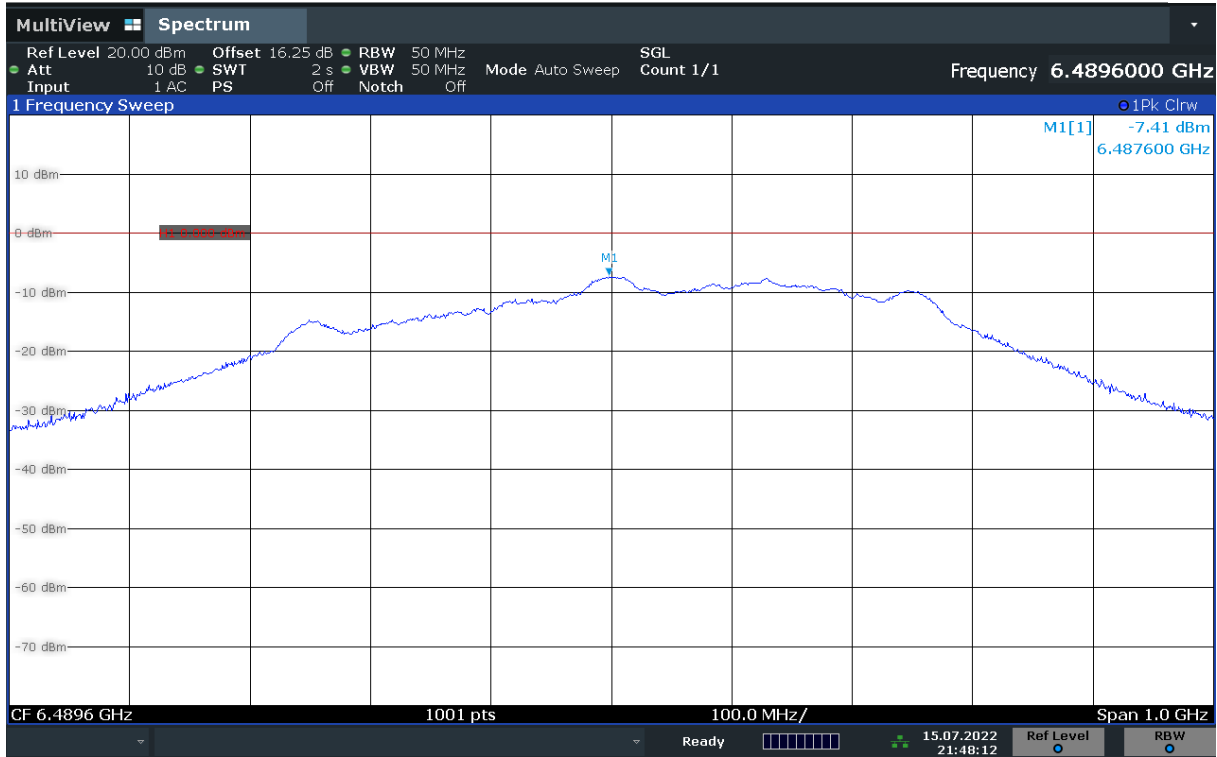

Date: 15.JUL.2022 21:48:12

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = PEAK Sweep Count = 1 RF Atten (dB) = 10 Trace Mode = CLR/WRITE	M1 : 6489.6 MHz : -7.41 dBm	Channel Frequency: 6489.6 MHz


[back to matrix](#)

A.4. Transmitter Spurious Emissions

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

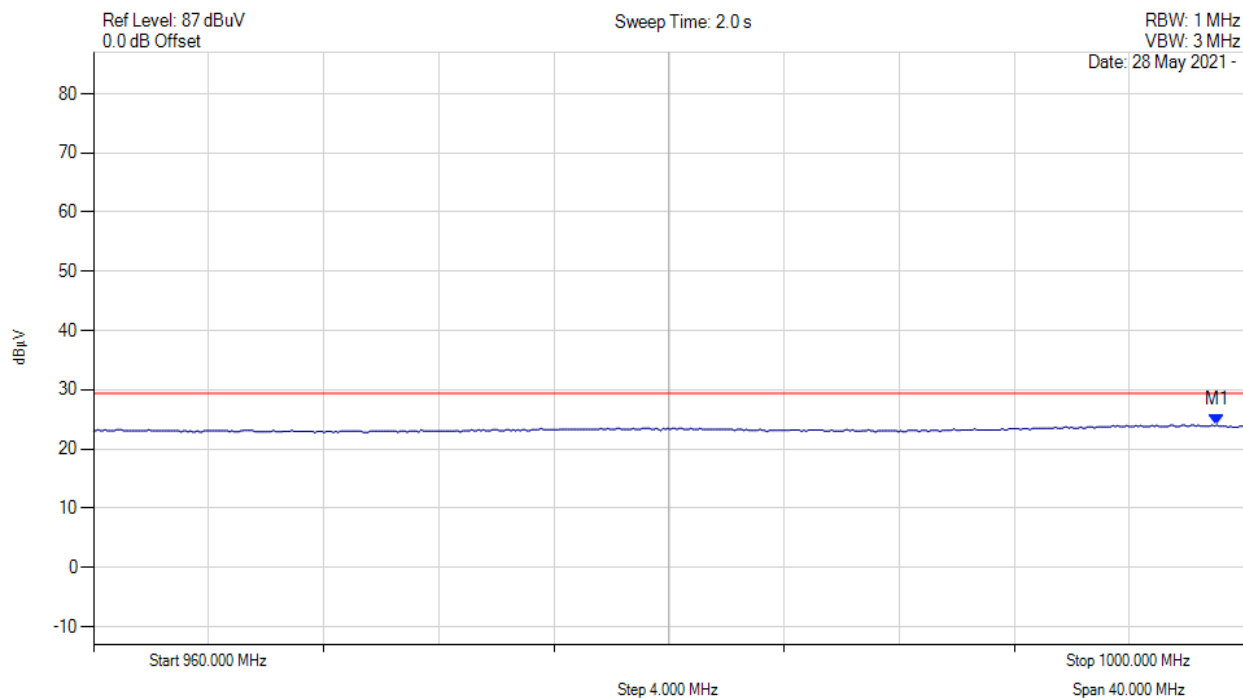


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 999.038 MHz : 24.067 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

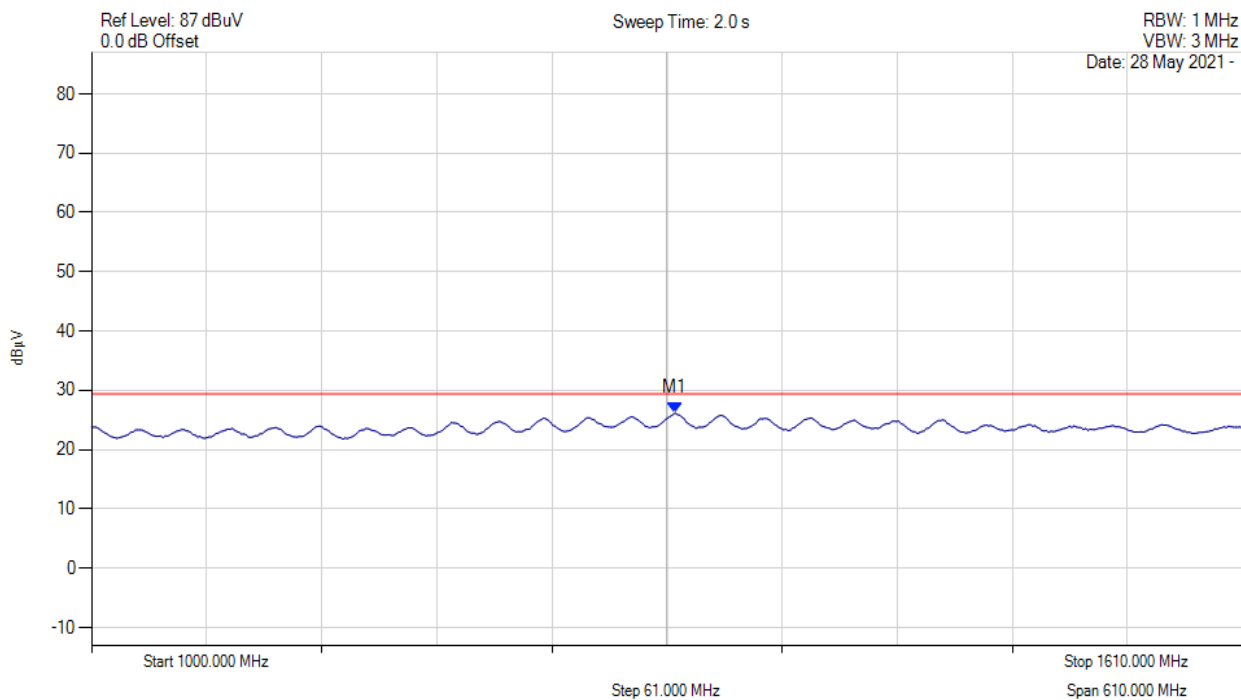


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1309.279 MHz : 26.179 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

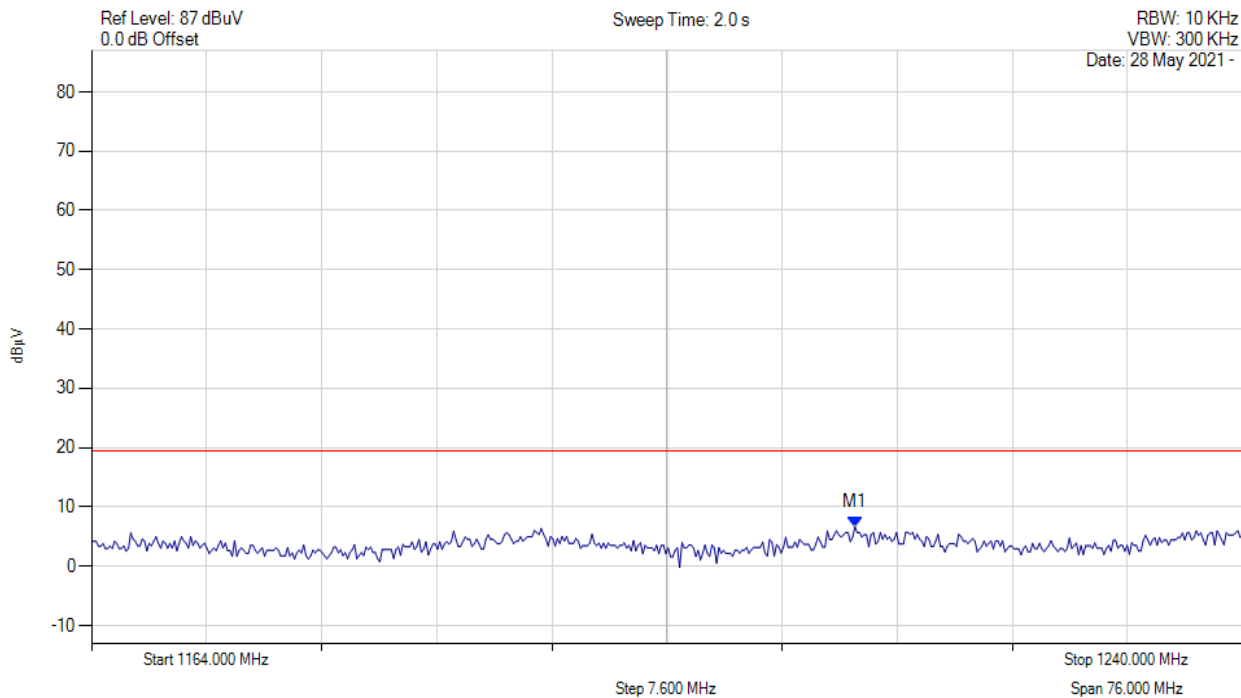


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1214.413 MHz : 6.656 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

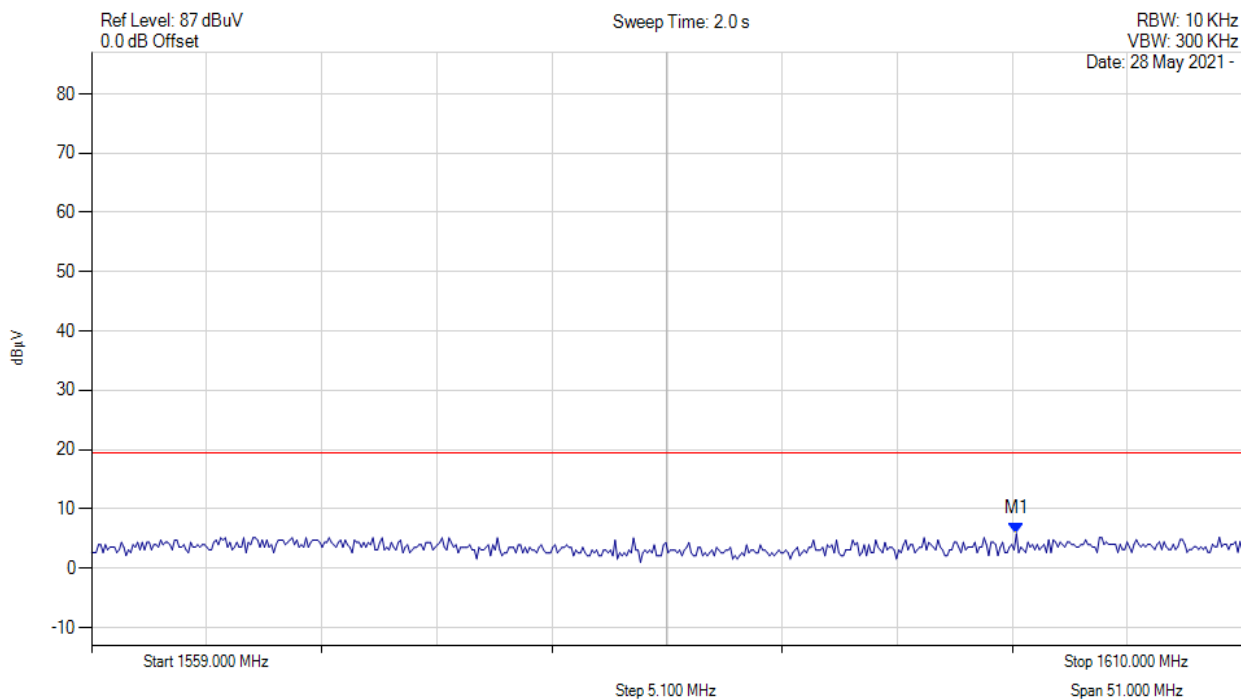


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1599.984 MHz : 5.854 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

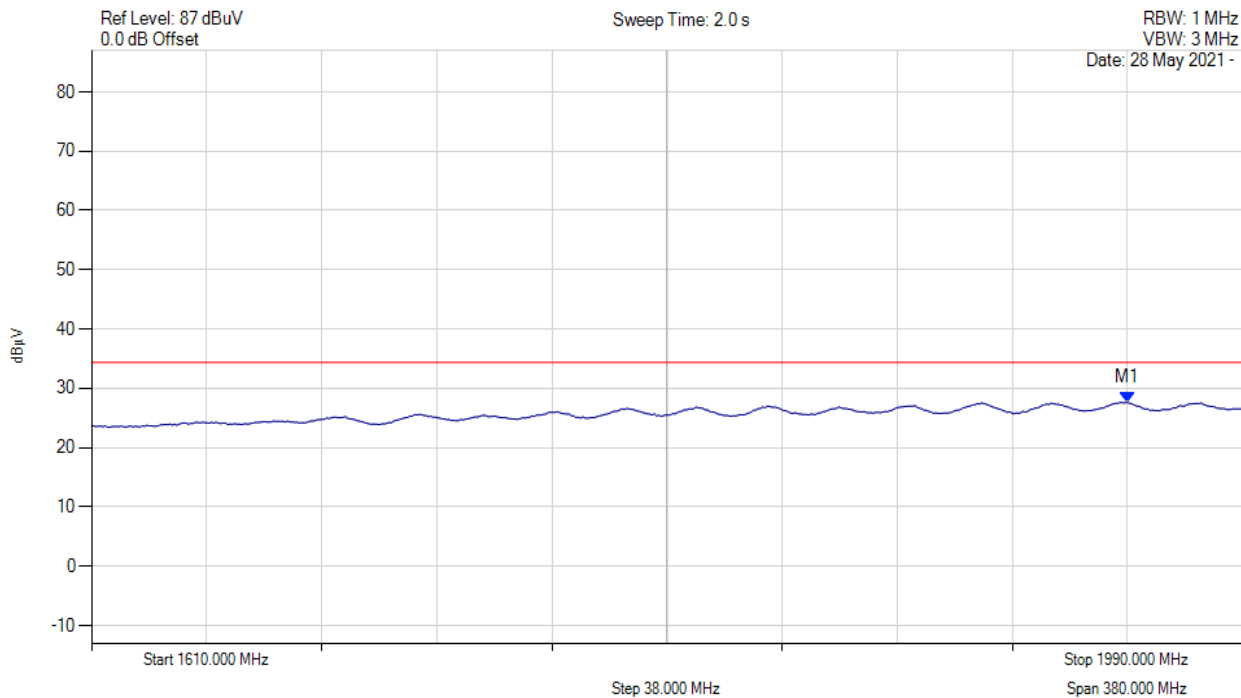


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1951.924 MHz : 27.642 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

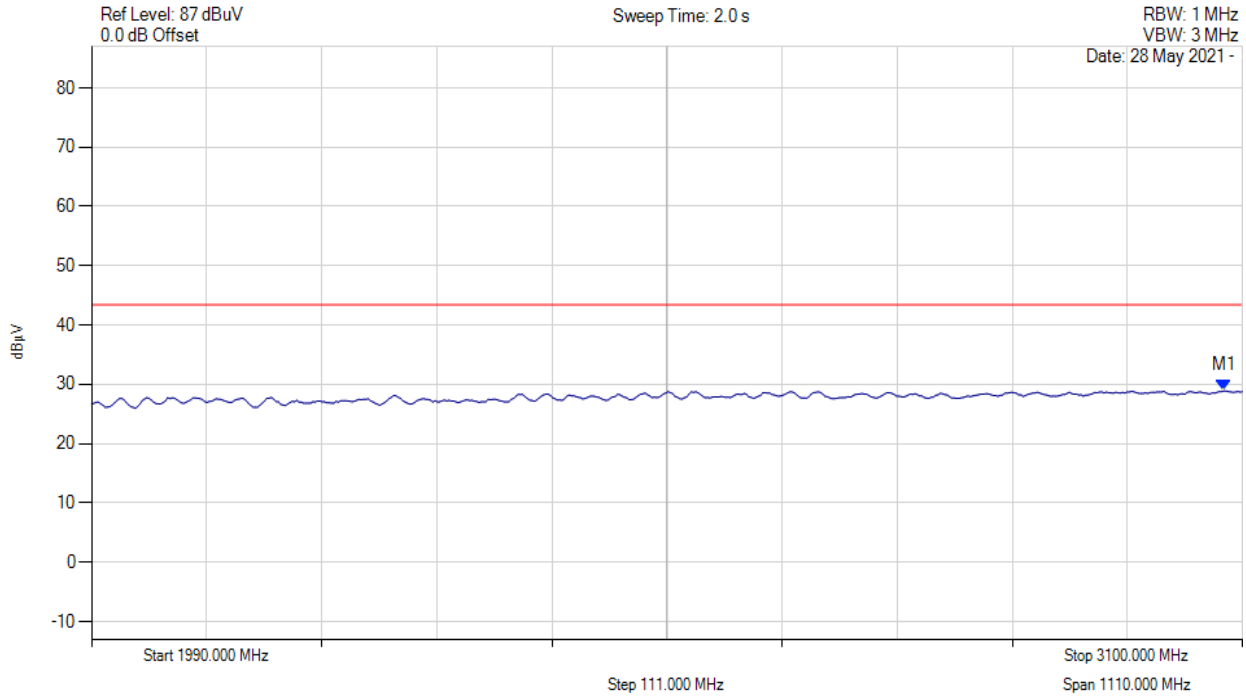


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 3082.204 MHz : 28.920 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

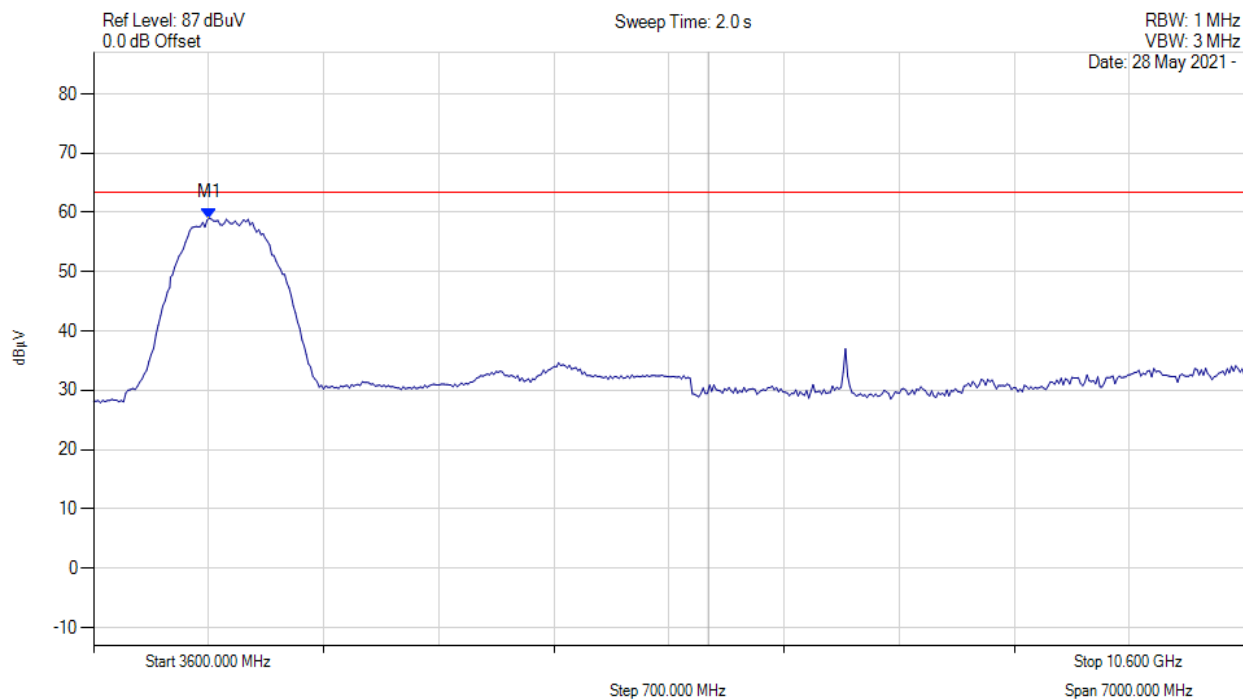


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 3852.505 MHz : 59.051 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

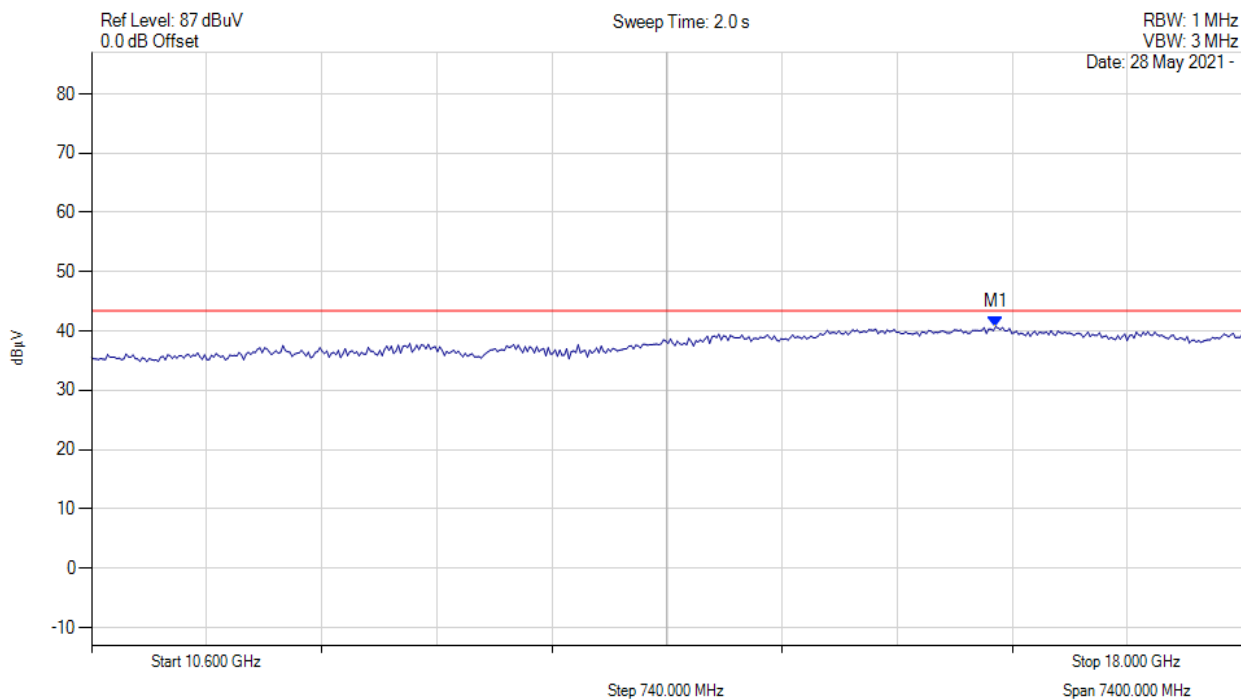


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 16.413 GHz : 40.734 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

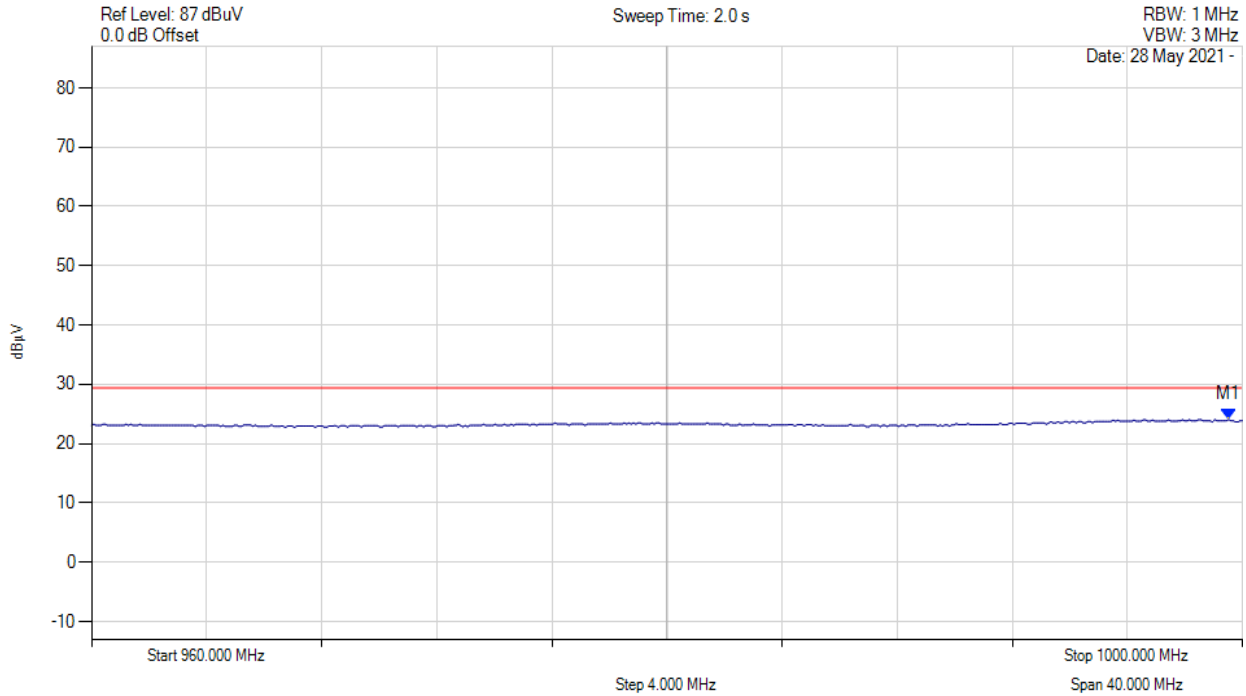


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 999.519 MHz : 24.079 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

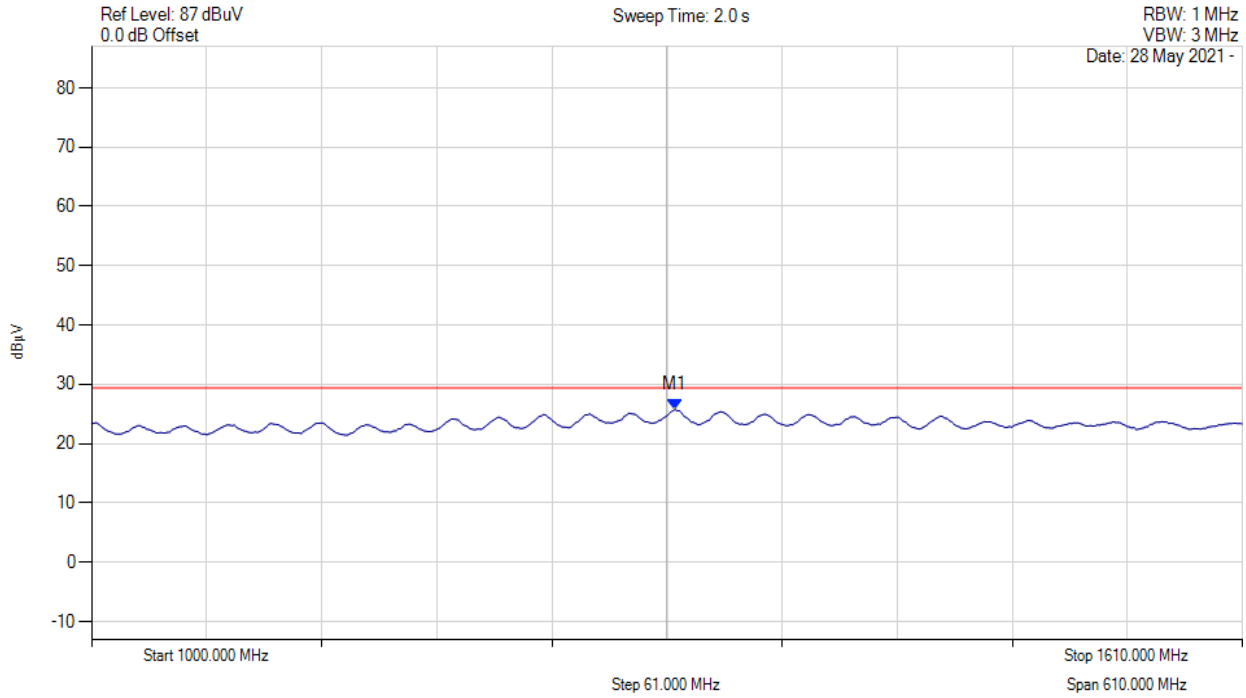


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1309.279 MHz : 25.761 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

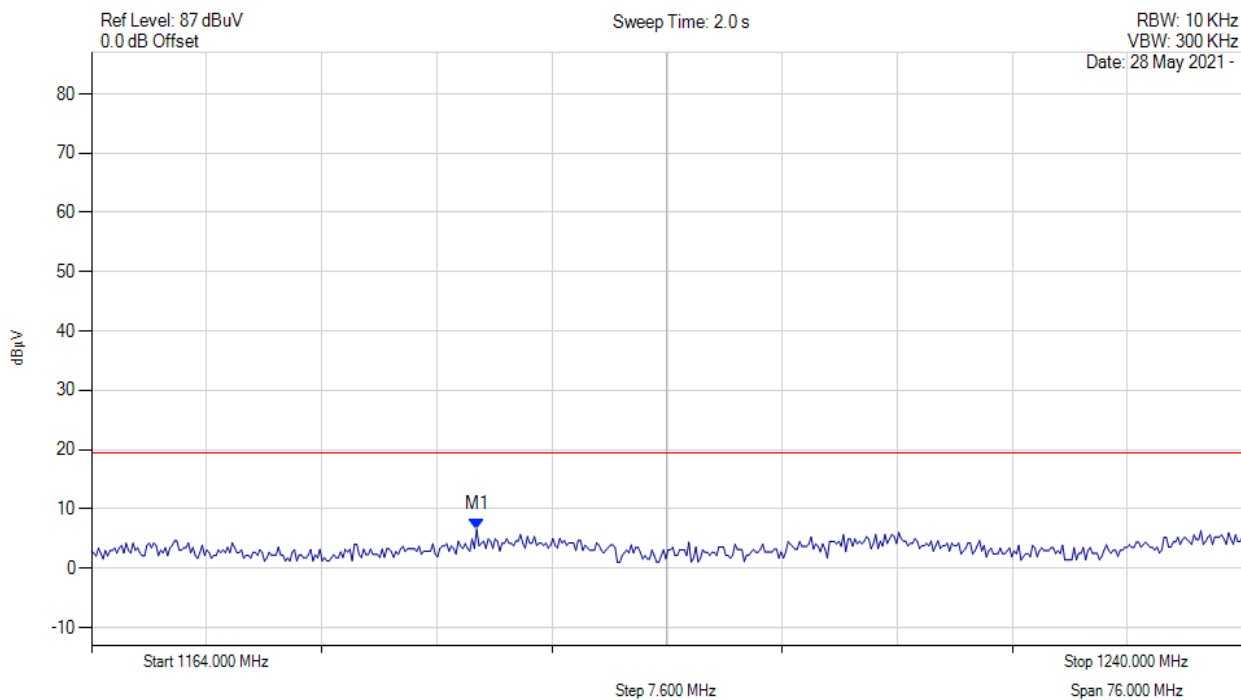


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1189.435 MHz : 6.585 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

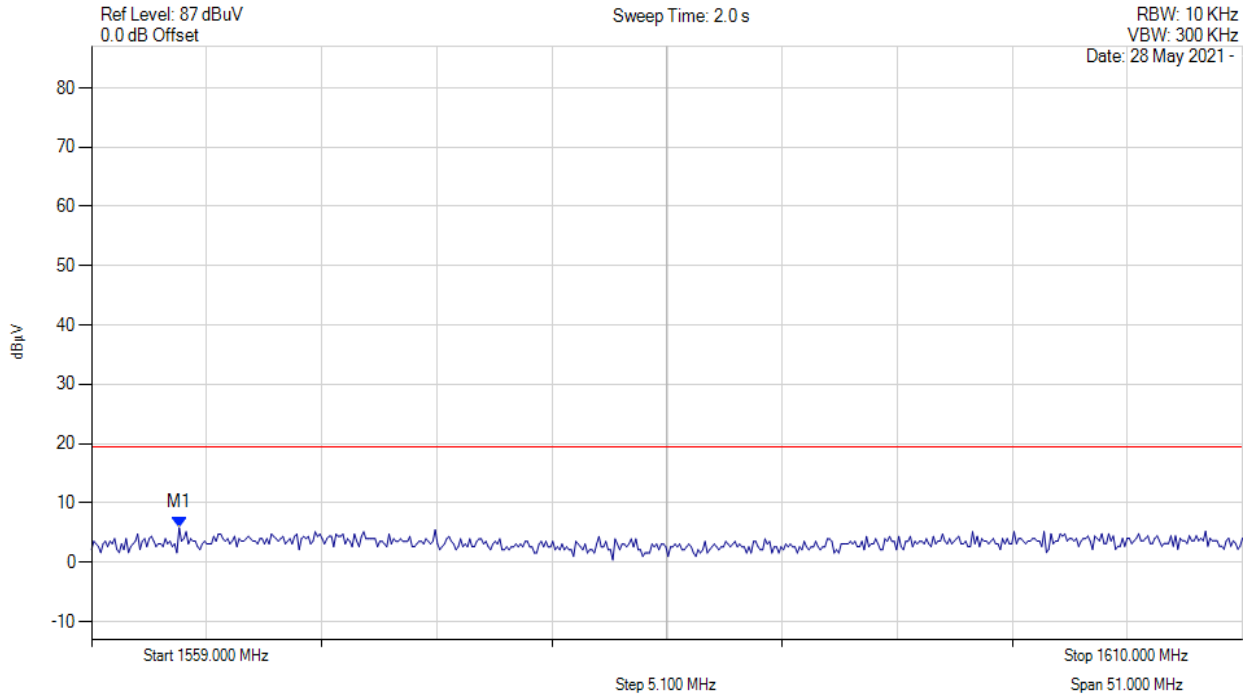


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1562.884 MHz : 5.842 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

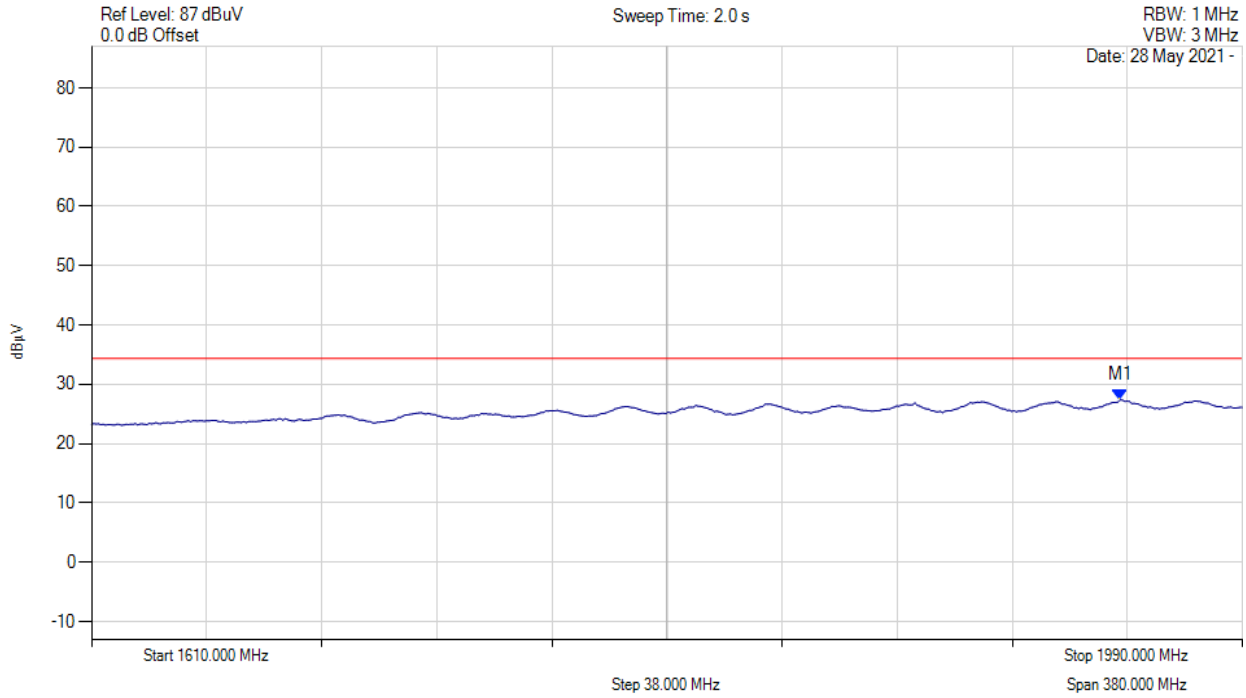


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1949.639 MHz : 27.387 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

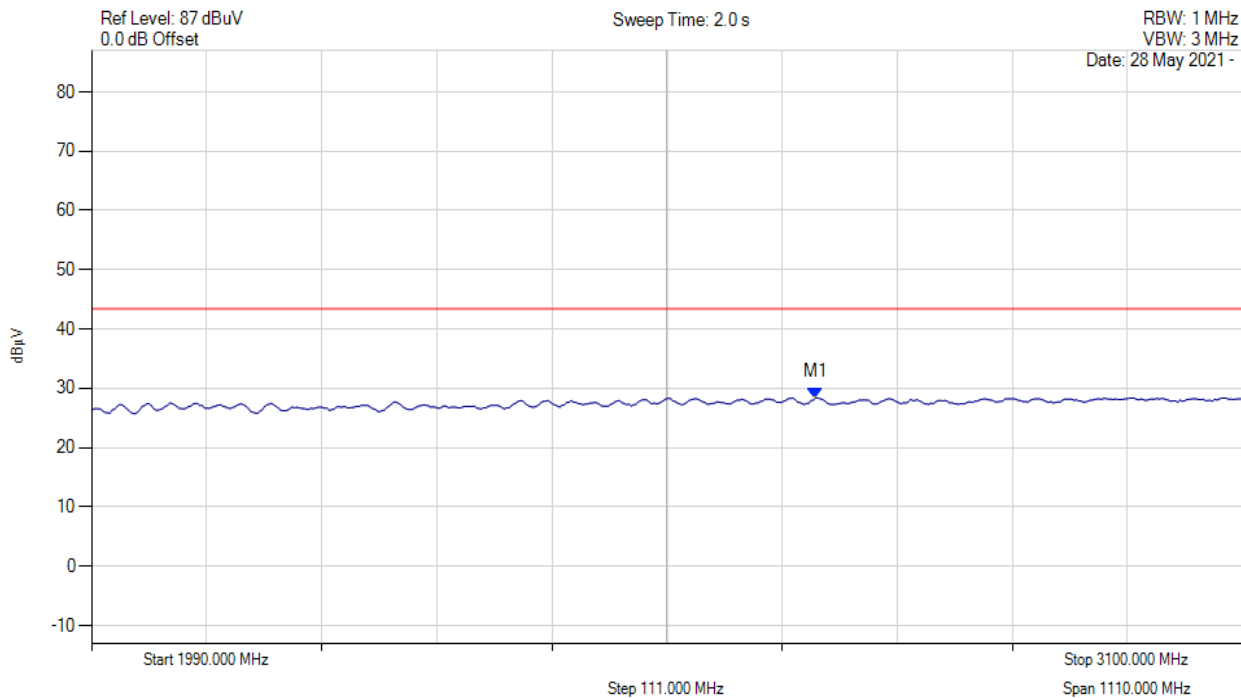


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 2688.477 MHz : 28.431 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

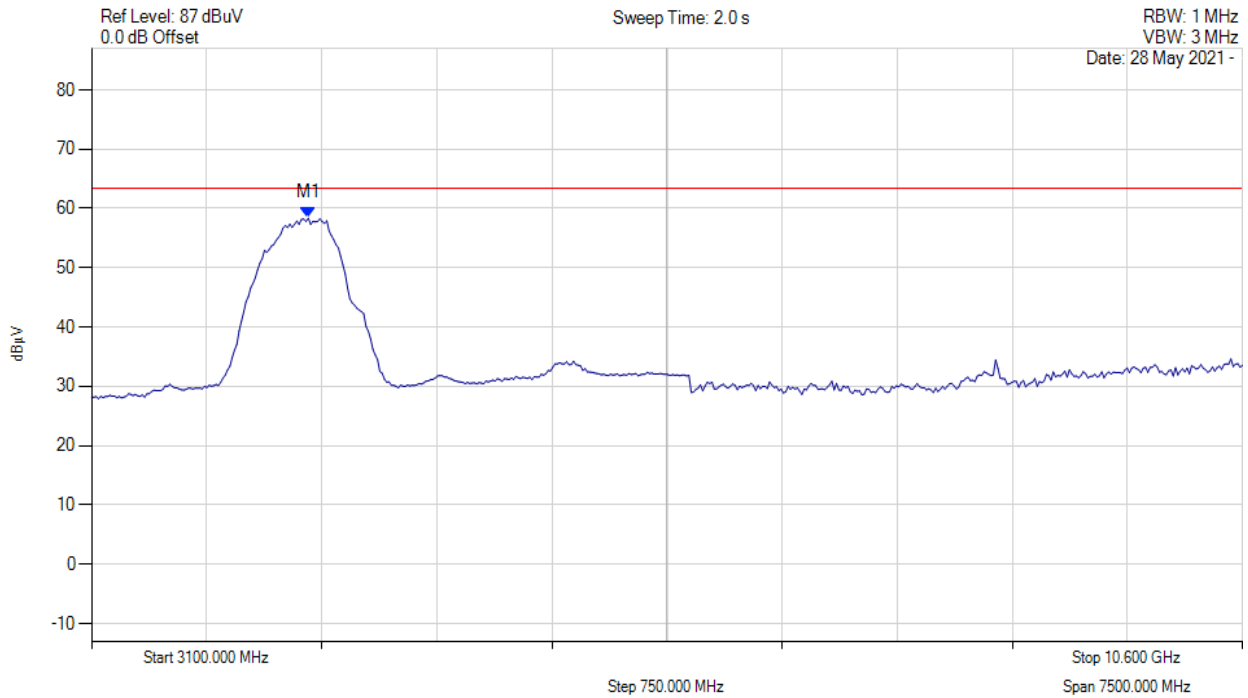


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 4512.826 MHz : 58.369 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Horizontal, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

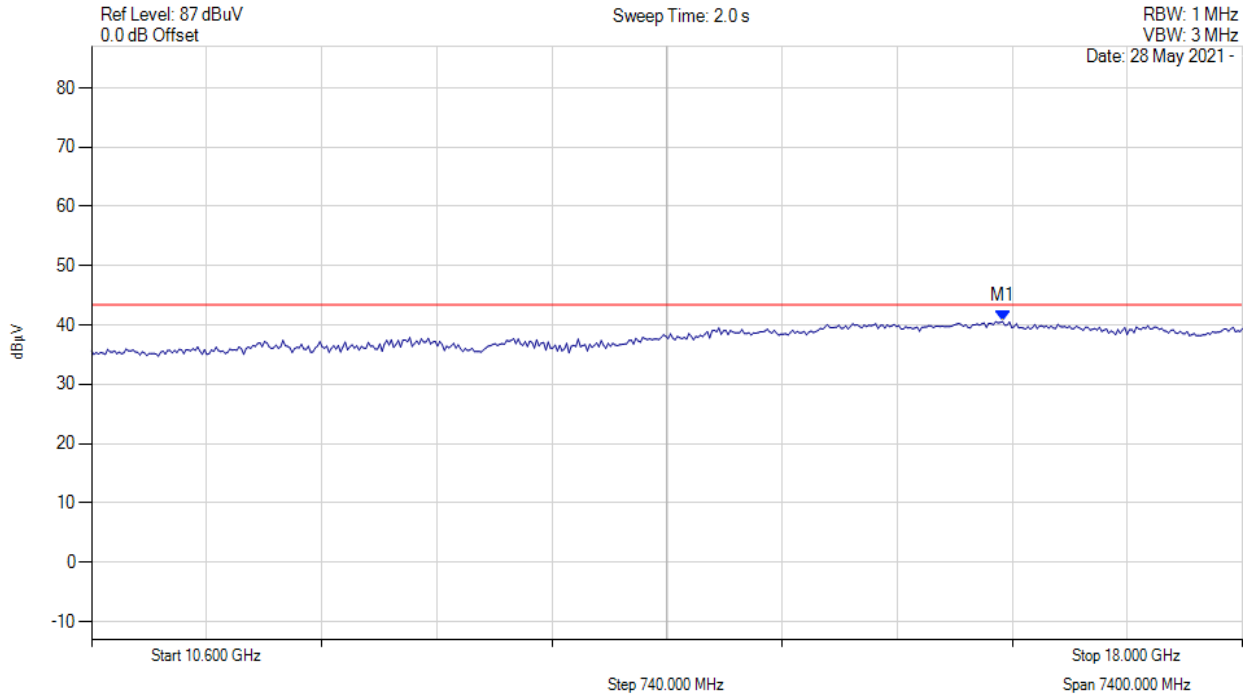


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 16.458 GHz : 40.598 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variation: Vertical, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

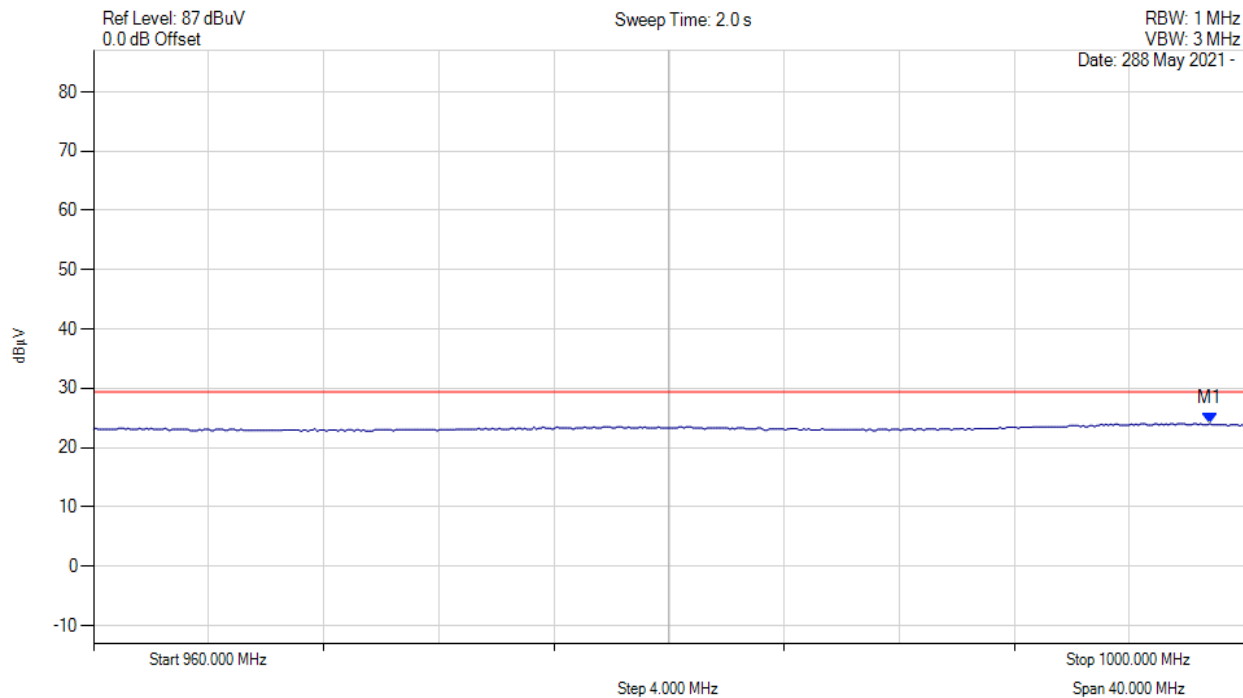


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 998.798 MHz : 24.062 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variation: Vertical, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

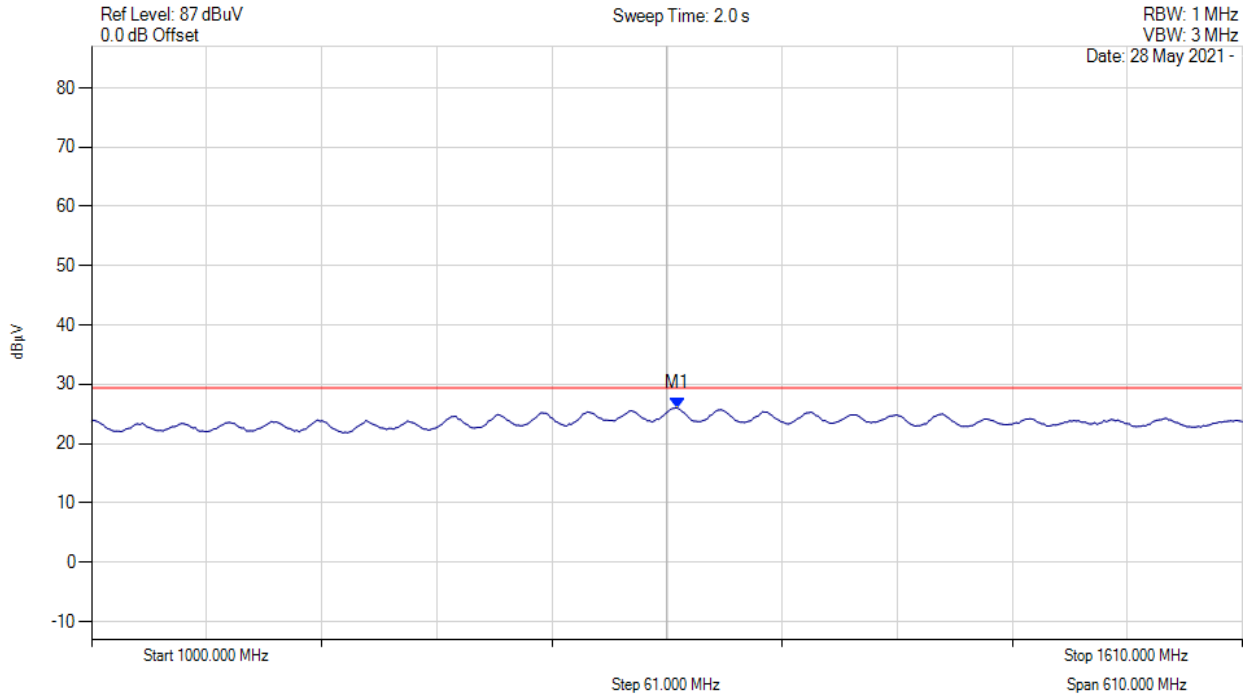


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1310.501 MHz : 25.992 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Vertical, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

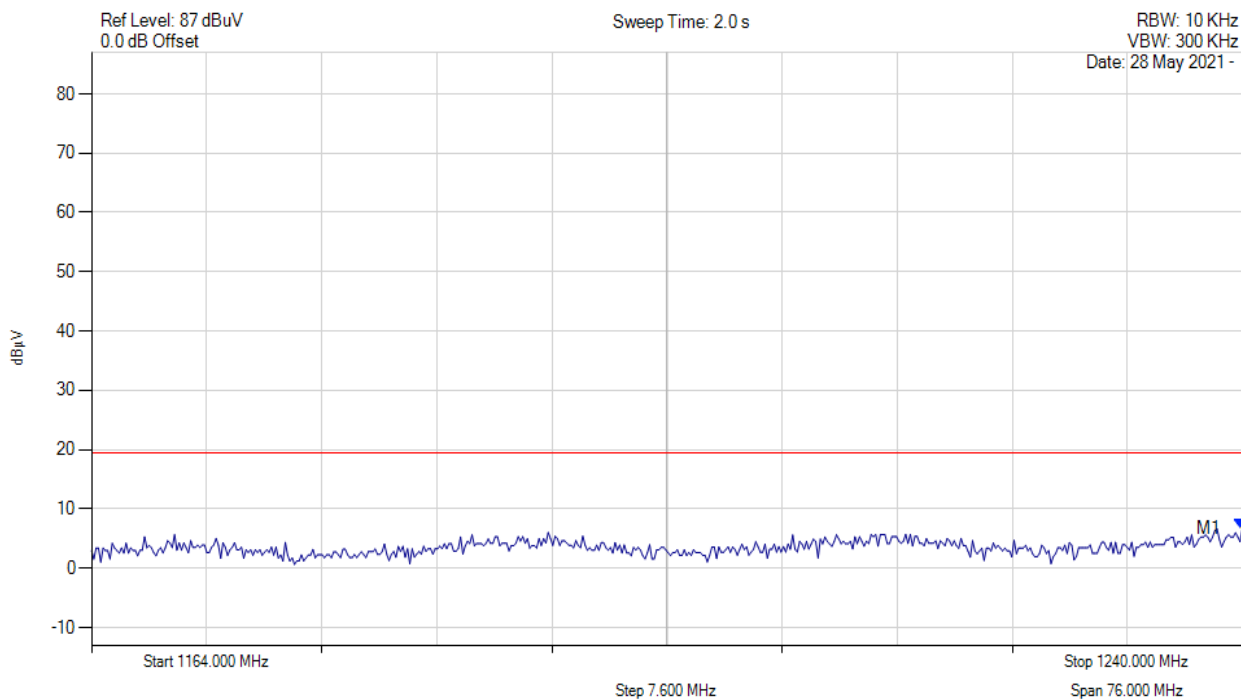


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1240.000 MHz : 6.681 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Vertical, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

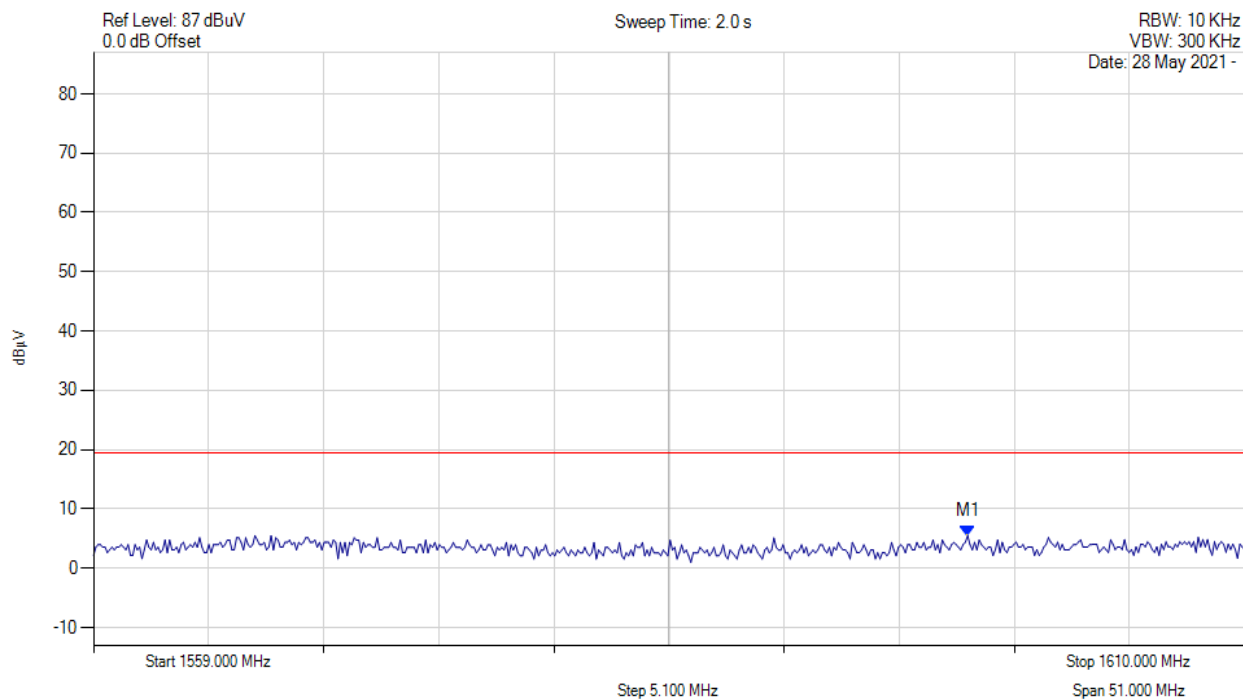


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1597.735 MHz : 5.499 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Vertical, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

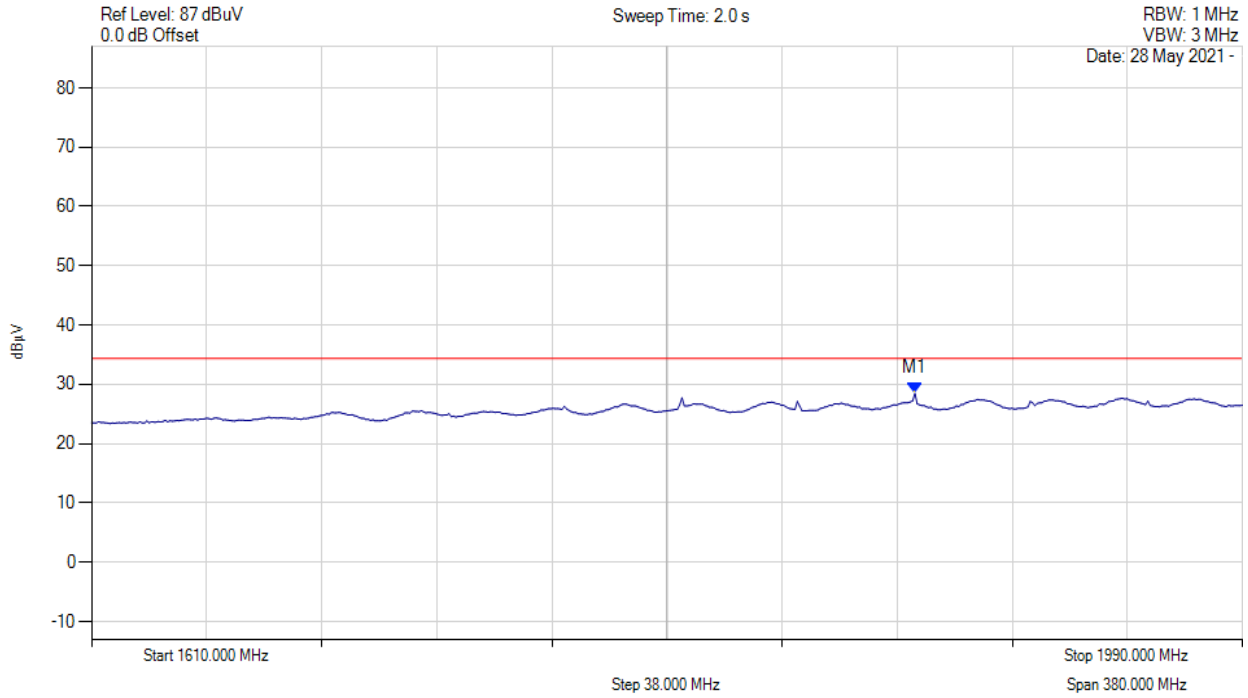


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1881.864 MHz : 28.485 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Vertical, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

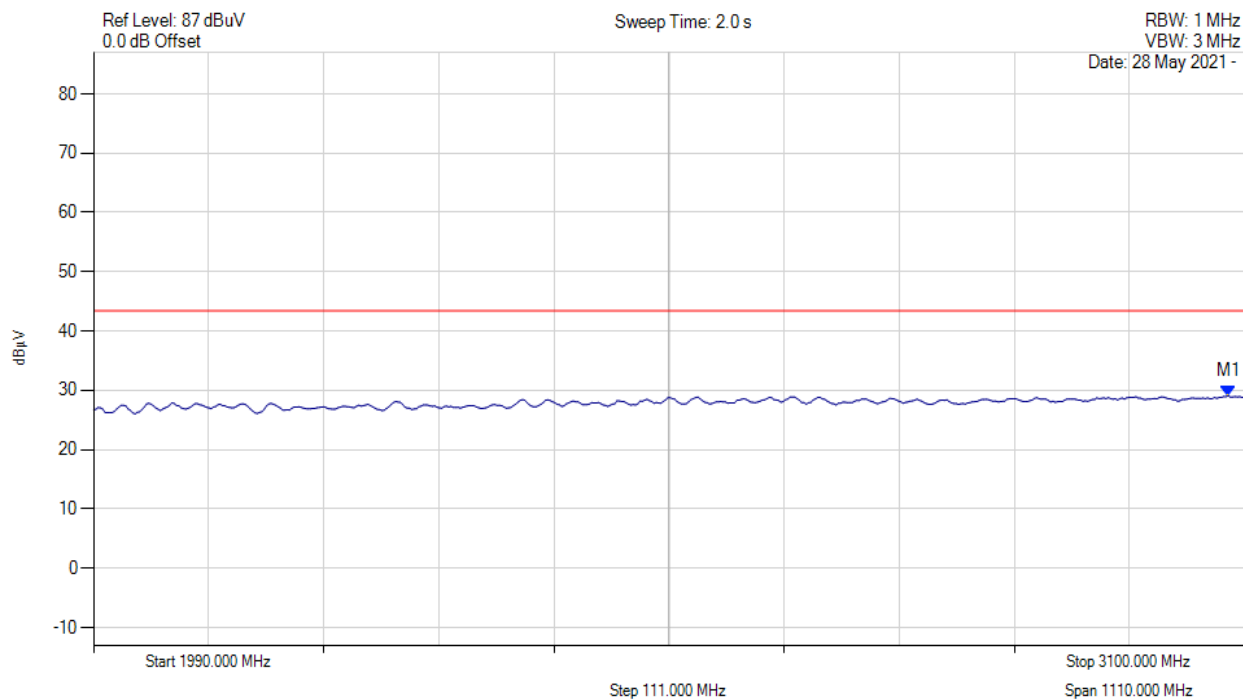


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 3084.429 MHz : 29.095 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Vertical, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

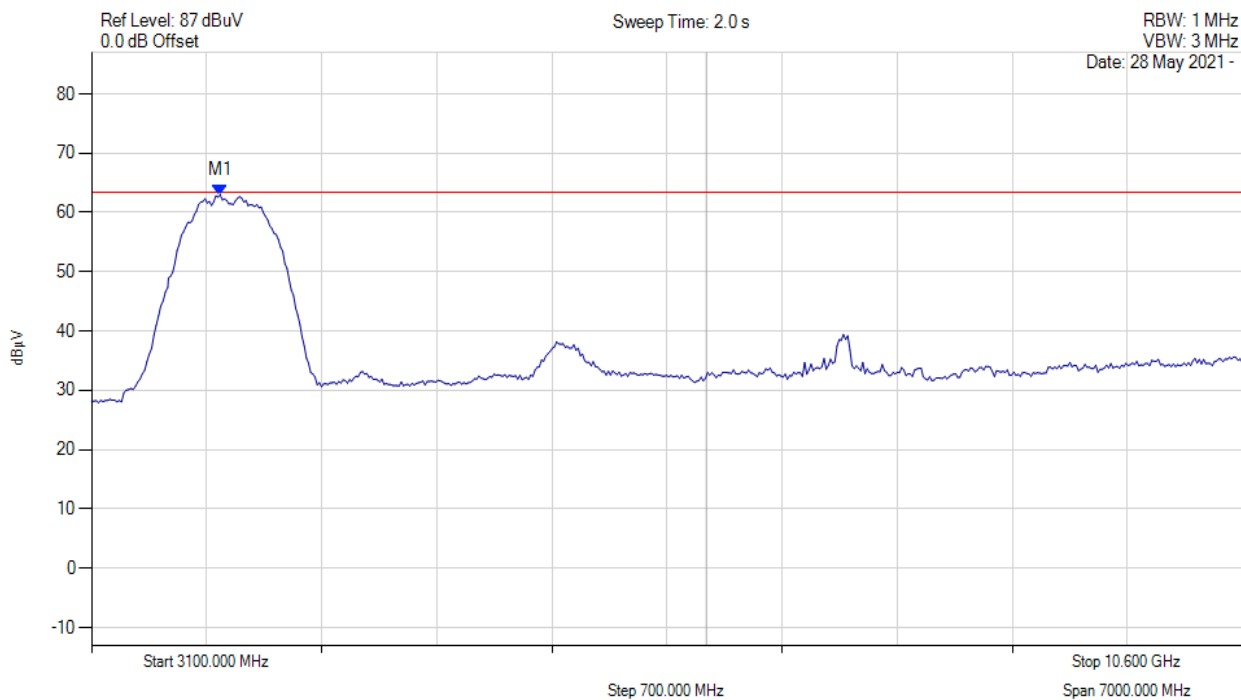


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 3936.673 MHz : 62.988 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variation: Vertical, Channel: 3993.60 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

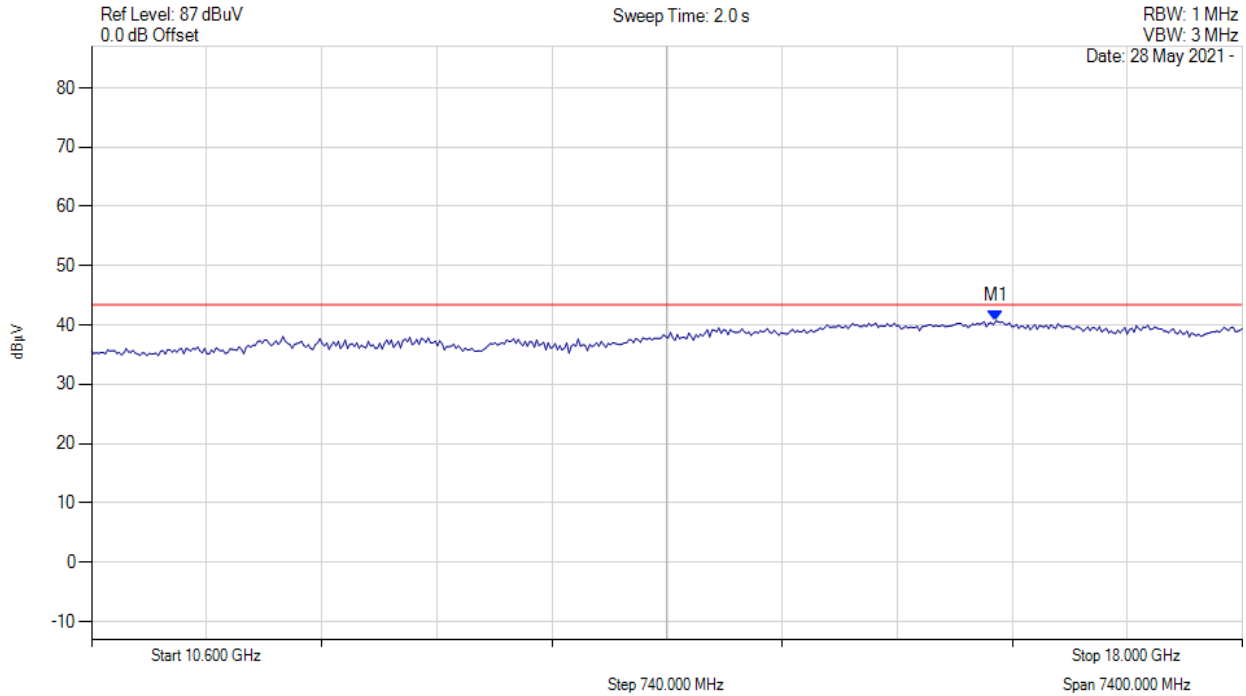


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 16.413 GHz : 40.662 dBµV	Channel Frequency: 3993.60 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Vertical, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

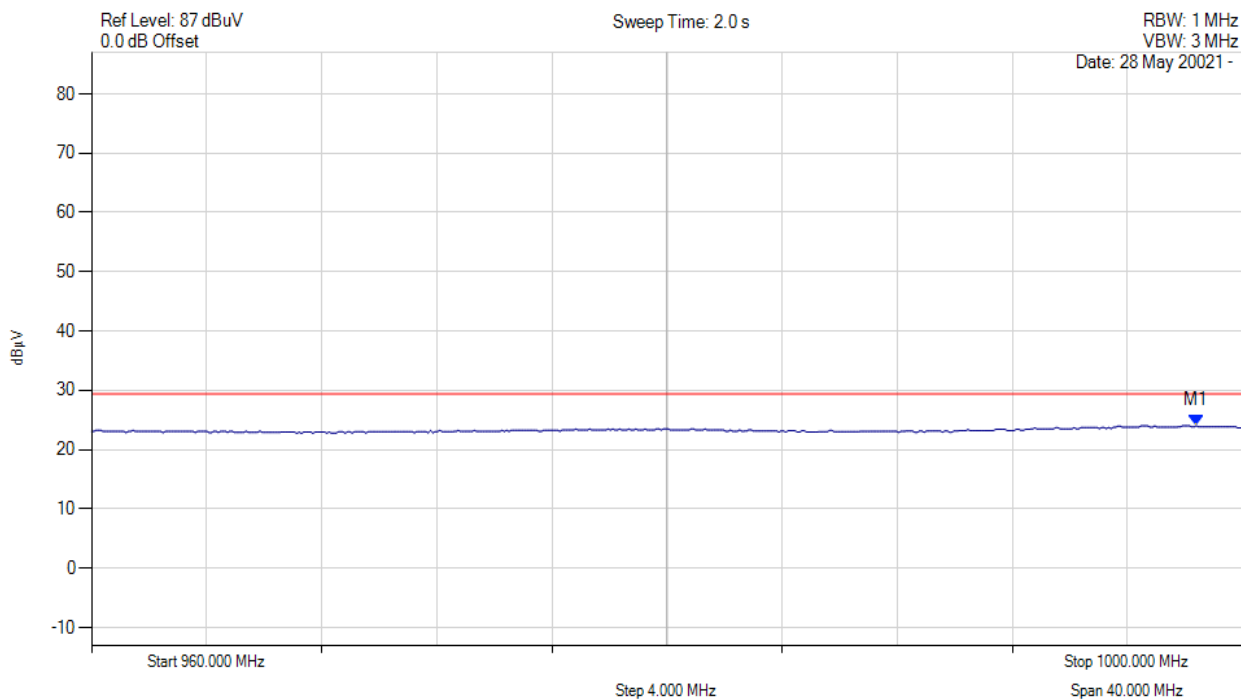


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 998.397 MHz : 24.052 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variation: Vertical, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

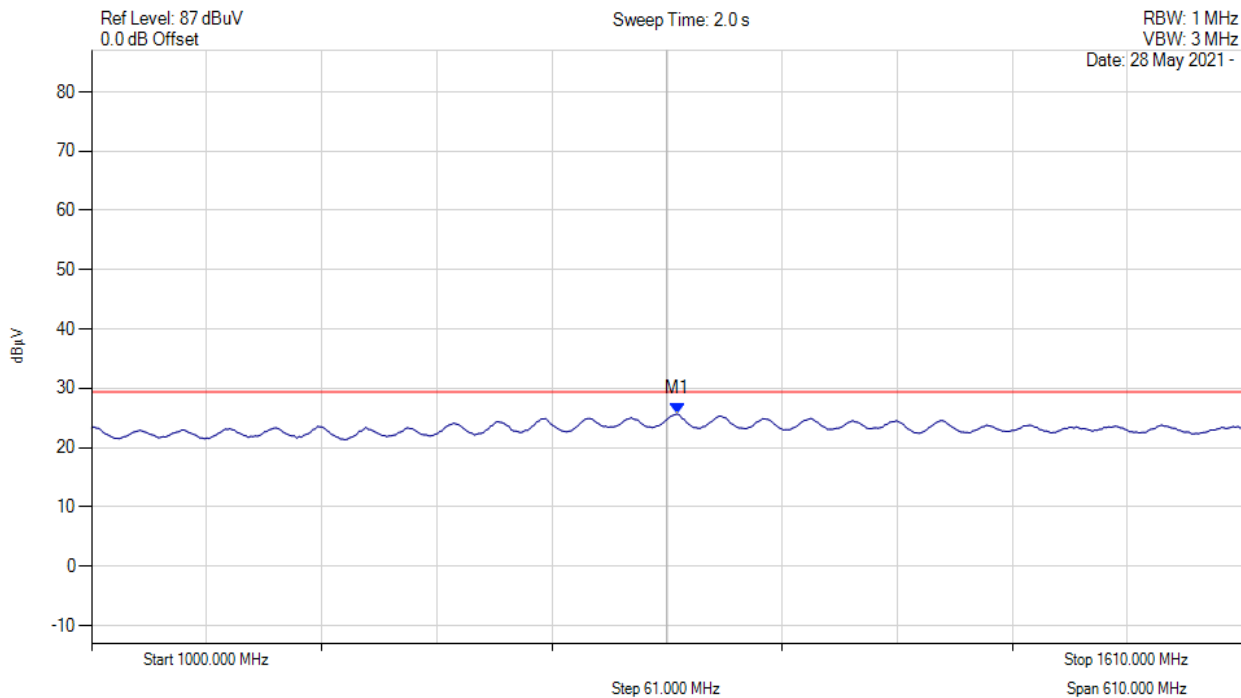


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1310.501 MHz : 25.683 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variation: Vertical, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

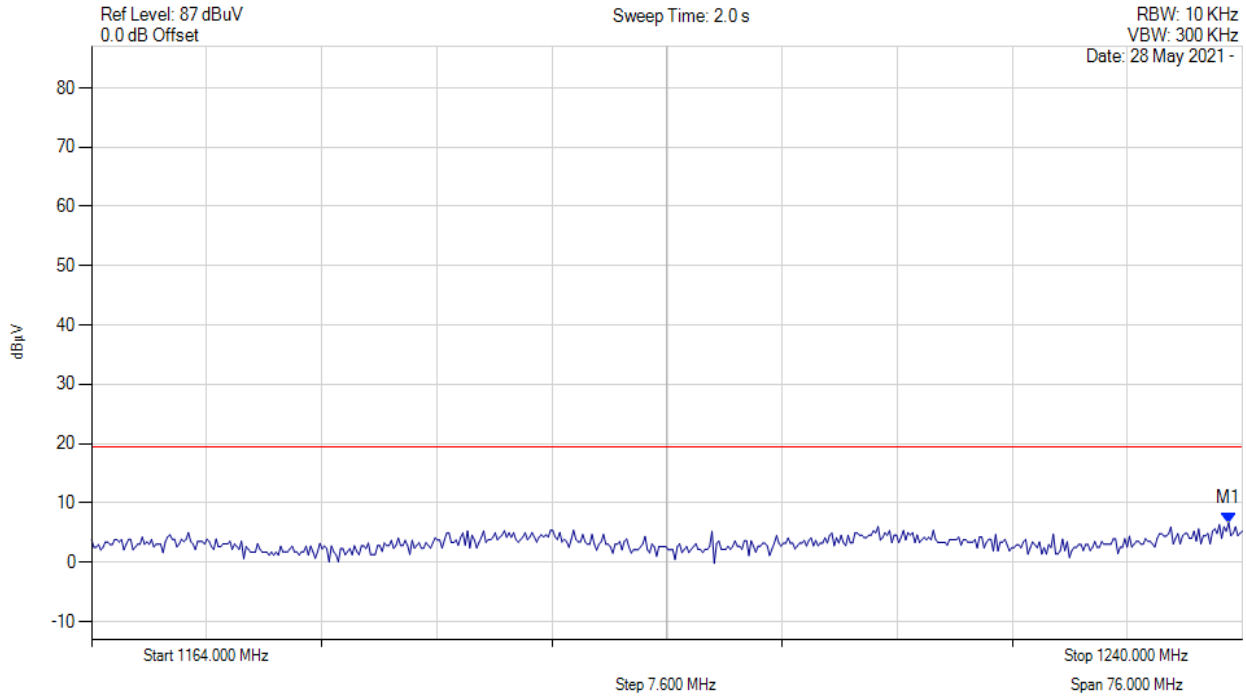


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1239.086 MHz : 6.669 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Vertical, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

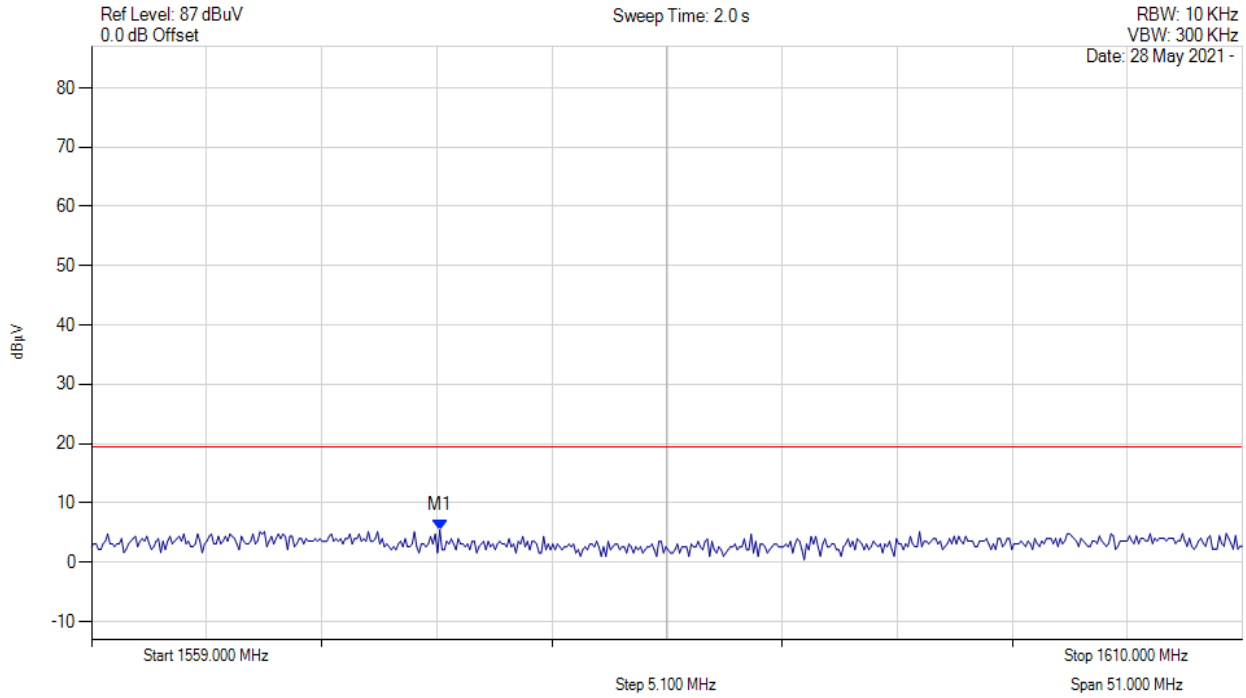


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1574.433 MHz : 5.479 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Vertical, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

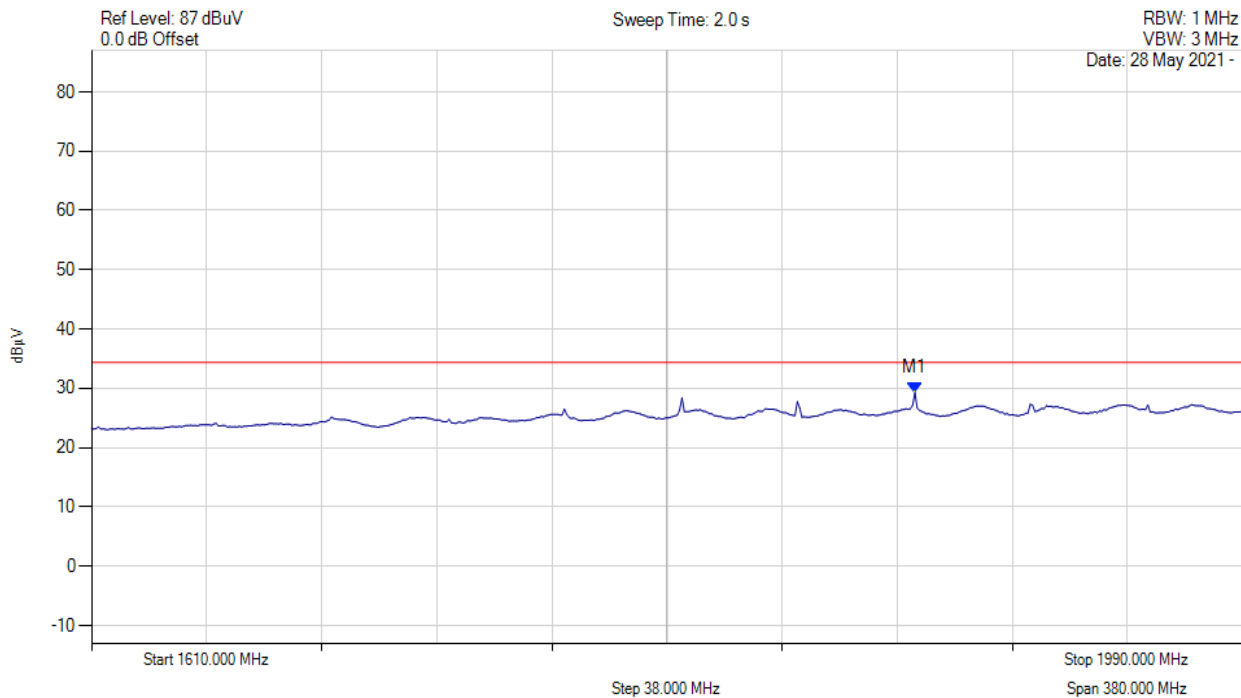


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 1881.864 MHz : 29.297 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Vertical, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

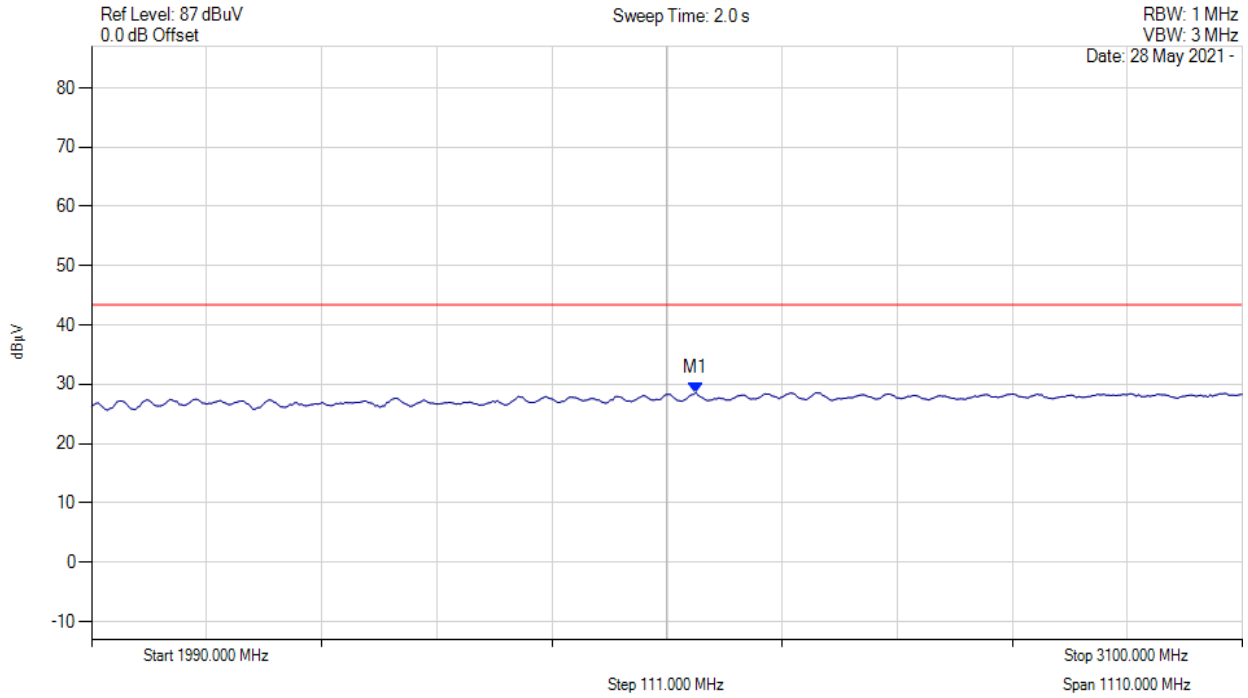


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 2572.806 MHz : 28.621 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Vertical, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

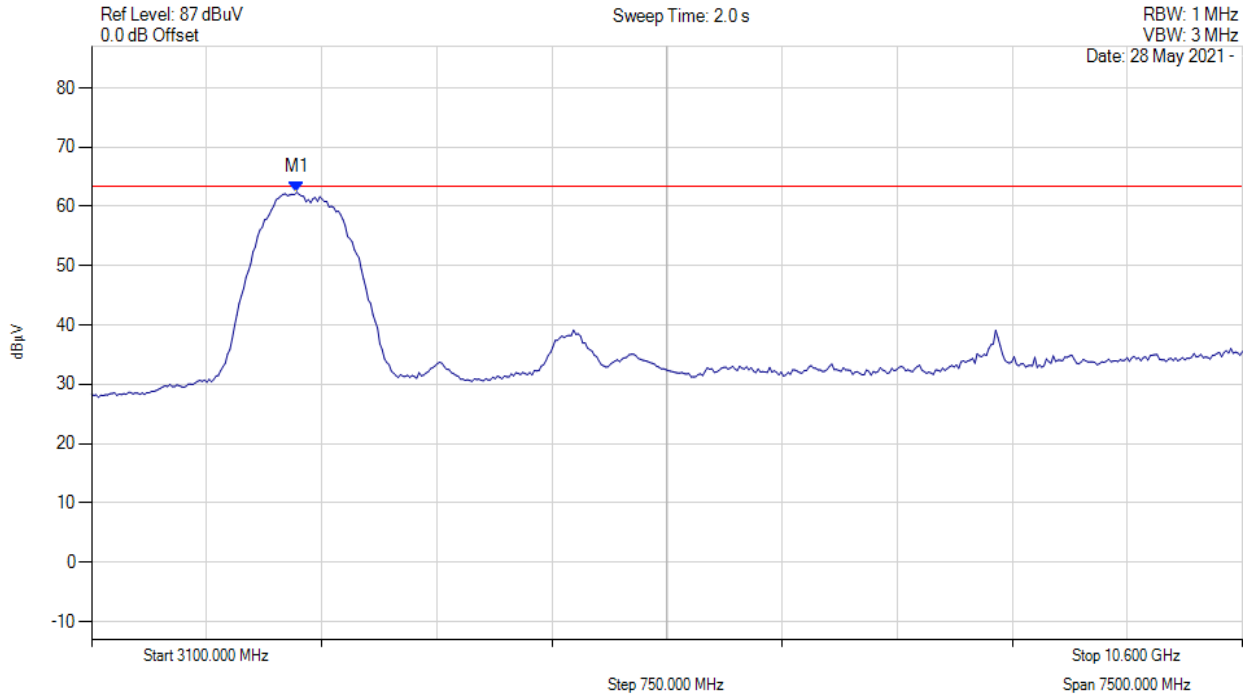


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 4437.675 MHz : 62.416 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)

TRANSMITTER SPURIOUS EMISSIONS



Variant: Vertical, Channel: 4492.80 MHz, Chain a, Temp: 20, Voltage: 3.7 Vdc

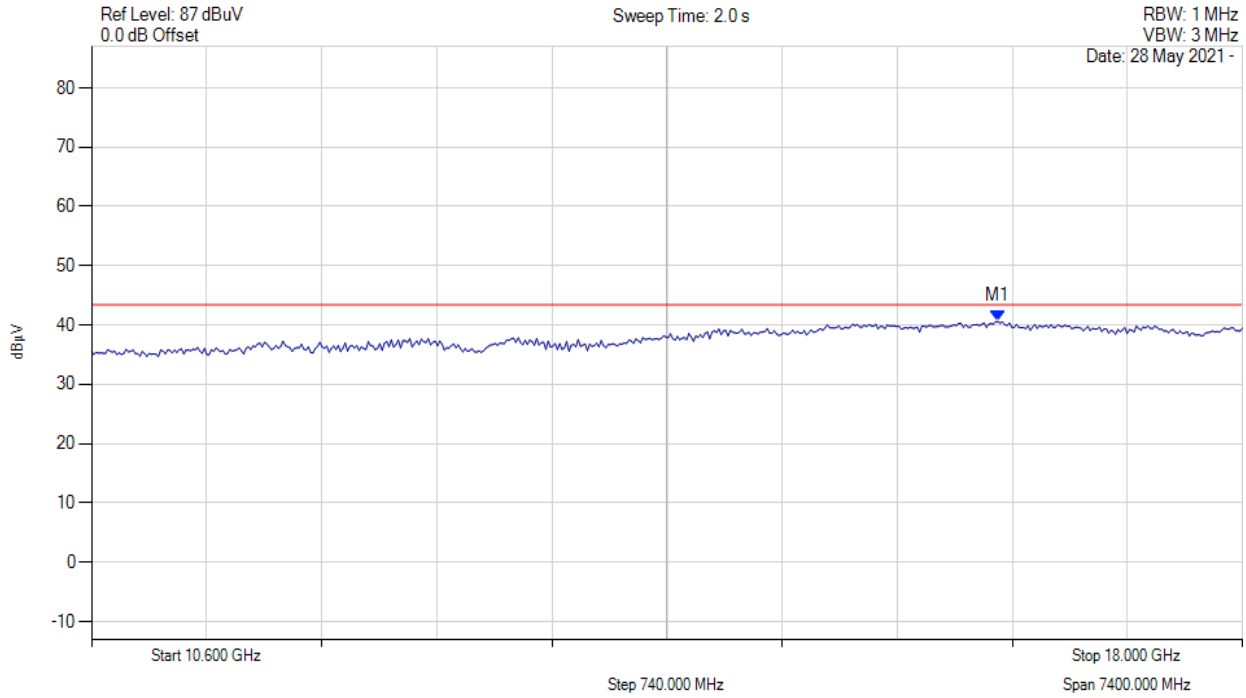

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 16.428 GHz : 40.600 dBµV	Channel Frequency: 4492.80 MHz

[back to matrix](#)



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com