



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM180300235002
Page: 1 of 40

TEST REPORT

Application No.: SZEM1803002350CR(GZEM1803001481IT)
Applicant: Gree Electric Appliances, Inc. of Zhuhai
Address of Applicant: Jinji West Rd, Qianshan, Zhuhai, 519070, Guangdong P.R. China
Manufacturer: Gree Electric Appliances, Inc. of Zhuhai
Address of Manufacturer: Jinji West Rd, Qianshan, Zhuhai, 519070, Guangdong P.R. China
Factory: Gree Electric Appliances, Inc. of Zhuhai
Address of Factory: Jinji West Rd, Qianshan, Zhuhai, 519070, Guangdong P.R. China
Equipment Under Test (EUT):
EUT Name: LTE DTU
Model No.: IE60-33/CF2
FCC ID: 2ADAP-IE6033CF2
IC: 12478A-IE6033CF2
Standard(s) : 47 CFR Part 2(2017); 47 CFR Part 22 subpart H
47 CFR Part 24 subpart E; 47 CFR Part 27 subpart C
RSS-Gen Issue 4; RSS-132 Issue 3
RSS-133 Issue 6; RSS-139 Issue 3
(only for Effective (Isotropic) Radiated Power Output Data and Field strength
of spurious radiation)
Date of Receipt: 2018-03-29
Date of Test: 2018-04-26
Date of Issue: 2018-05-02

Test Result:	Pass
---------------------	-------------

* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.





**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

Report No.: SZEM180300235002

Page: 2 of 40

<i>Revision Record</i>				
<i>Version</i>	<i>Chapter</i>	<i>Date</i>	<i>Modifier</i>	<i>Remark</i>
01		2018-05-02		Original

Authorized for issue by:				
				
		<hr/>		
		Vincent Chen/Project Engineer		
				
		<hr/>		
		Eric Fu /Reviewer		

2 Test Summary

Test Item	FCC Rule No.	IC Rule No.	Requirements	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913, §24.232 §27.50(c) §27.50(d)	RSS-132 §5.4, RSS-133 §6.4 RSS-139 §6.5	FCC: ERP≤7W(LTE Band 5) EIRP≤ 2W(LTE Band 2) ERP≤30W(LTE Band 17) EIRP≤1W(LTE Band 4) IC: EIRP≤11.5W(LTE Band 5) EIRP≤ 2 W(LTE Band 2) EIRP≤1W(LTE Band 4)	PASS
Field strength of spurious radiation	§2.1051, §22.917, §24.238 §27.53(h) §27.53(g)	RSS-132 §5.5, RSS-133 §6.5, RSS-139 §6.6	≤ -13dBm	PASS
LTE Band 17 only for FCC application				

Remark:

Model No.: IE60-33/CF2

This test report (Ref. No.: SZEM180300235002) is only valid with the original test report (Ref. No.: SZEM171201265902).

Compared with the original report, this report just changed the information of the power supply part of the component replacement, the surface screen printing and the line fine tuning, this change does not involve the module's RF circuit, and the RF circuit principle part has not changed. As below show:

- 1.Components replacement: replace the flake capacitor 0805 10uF \pm 10%/16V in the schematic diagram by electrolytic capacitor 220uF \pm 20%/6.3V (C13 and C59) , adjustment purpose: increase the capacitor value of power circuit output side, and to provide sufficient power supply to ensure energy dissipation while the main board is switching frequency range, thus avoiding any risks. It is related to power supply only, RF circuit of module is not involved, the RF circuit principle is unchanged.
- 2.Components shift: shift the flake electrolytic capacitor 1210 100uF \pm 20%/6.3V (C39) from the reverse side of PCB board to the front. Adjustment purpose: according to the production craft requirements of the company, this location will interfere the usage of tin carrier, therefore, please shift it to avoid interference. It will not involve the RF circuit of module, and the RF circuit principle is unchanged.
- 3.Other alterations are minor adjustments about the silk print on the surface and circuit. Adjustment purpose: for the convenience of production and installation debugging. RF circuit of module is not involved, and the RF circuit principle is unchanged.

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report Effective (Isotropic) Radiated Power Output Data and Field strength of spurious radiation were fully retested on model IE60-33/CF2 and shown the data in this report, other tests data please refer to original report SZEM171201265902.

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	5
4 GENERAL INFORMATION	6
4.1 DETAILS OF E.U.T.....	6
4.2 TEST FREQUENCY	7
4.3 DESCRIPTION OF SUPPORT UNITS.....	8
4.4 MEASUREMENT UNCERTAINTY	8
4.5 TEST LOCATION	9
4.6 TEST FACILITY	9
4.7 DEVIATION FROM STANDARDS	9
4.8 ABNORMALITIES FROM STANDARD CONDITIONS	9
5 EQUIPMENT LIST	10
6 RADIO SPECTRUM MATTER TEST RESULTS	13
6.1 EFFECTIVE (ISOTROPIC) RADIATED POWER OUTPUT DATA	13
6.1.1 <i>E.U.T. Operation</i>	13
6.1.2 <i>Test Setup Diagram</i>	13
6.1.3 <i>Measurement Data</i>	13
6.2 FIELD STRENGTH OF SPURIOUS RADIATION	36
6.2.1 <i>E.U.T. Operation</i>	36
6.2.2 <i>Test Setup Diagram</i>	36
6.2.3 <i>Measurement Procedure and Data</i>	37
7 PHOTOGRAPHS	40
7.1 RADIATED EMISSIONS (ABOVE 1GHZ) TEST SETUP	40
7.2 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	40

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 12V
Sample Type:	Fixed production
LTE Operation Frequency Band:	LTE FDD Band 2, 4, 5, 17
Modulation Type:	QPSK, 16QAM
LTE Release Version:	R8
LTE Power Class:	Level 3
Antenna Type:	Detachable Antenna
Antenna Gain:	2.5dBi
Extreme temp. Tolerance:	-30°C to +50°C
Extreme vol. Limits:	10.2VDC to 13.80VDC (nominal: 12.0VDC)

4.2 Test Frequency

Test Mode	Nominal Bandwidth (MHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
		MHz	MHz	MHz
LTE FDD Band 2	1.4	1850.7	1880	1909.3
	3	1851.5	1880	1908.5
	5	1852.5	1880	1907.5
	10	1855.0	1880	1905.0
	15	1857.5	1880	1902.5
	20	1860.0	1880	1900.0
Test Mode	Nominal Bandwidth (MHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
		MHz	MHz	MHz
LTE FDD Band 4	1.4	1710.7	1732.5	1754.3
	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715.0	1732.5	1750.0
	15	1717.5	1732.5	1747.5
	20	1720.0	1732.5	1745.0
Test Mode	Nominal Bandwidth (MHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
		MHz	MHz	MHz
LTE FDD Band 5	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829.0	836.5	844.0
Test Mode	Nominal Bandwidth (MHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
		MHz	MHz	MHz
LTE FDD Band 17	5	706.5	710.0	713.5
	10	709.0	710.0	711.0

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Adapter	GREE Electric Appliances, Inc. of Zhuhai	GPE-12125	/

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.25×10^{-8}
2	Duty cycle	0.37%
3	Occupied Bandwidth	3%
4	RF conducted power	0.75dB
5	RF power density	2.84dB
6	Conducted Spurious emissions	0.75dB
7	RF Radiated power	4.5dB (below 1GHz)
		4.8dB (above 1GHz)
8	Radiated Spurious emission test	4.5dB (Below 1GHz)
		4.8dB (Above 1GHz)
9	Temperature test	1 °C
10	Humidity test	3%
11	Supply voltages	1.5%
12	Time	3%

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

RF Conducted Test					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2017-09-27	2018-09-26
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-02	2017-07-13	2018-07-12
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2017-09-27	2018-09-26
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2017-09-27	2018-09-26
Audio Analyzer	Rohde & Schwarz	UPL	SEM0093	2017-09-27	2018-09-26
Universal Radio Communication Tester	Rohde & Schwarz	CMU200	W005-02	2016-03-06	2017-03-06
Wireless Communication Tester	Rohde & Schwarz	CMW500	W005-03	2016-03-06	2017-03-06
Splitter	MACOM	2090-6214-00	SEL0226	2016-03-06	2017-03-06

Radiated Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2017-05-02	2020-05-01
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2017-07-13	2018-07-12
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-13
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2017-09-27	2018-09-26
Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2017-09-27	2018-09-27
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2017-12-04	2018-12-03
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2017-04-14	2018-04-13
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A
Universal Radio Communication Tester	Rohde & Schwarz	CMU200	W005-02	2016-03-06	2017-03-06
Wireless Communication Tester	Rohde & Schwarz	CMW500	W005-03	2016-03-06	2017-03-06

RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017-08-05	2020-08-04
MXE EMI Receiver (20Hz-8.4GHz)	Agilent Technologies	N9038A	SEM004-05	2017-09-27	2018-09-26
BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2017-06-27	2020-06-26
Trilog-Broadband Antenna(30M-1GHz)	Schwarzbeck	VULB9168	SEM003-18	2016-06-29	2019-06-28
Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2017-04-14	2018-04-13
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2017-07-13	2018-07-12

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2017-09-29	2018-09-28
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2017-09-29	2018-09-28
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2017-09-29	2018-09-28
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2017-04-18	2018-04-17

6 Radio Spectrum Matter Test Results

6.1 Effective (Isotropic) Radiated Power Output Data

Test Requirement: §2.1046, §22.913, §24.232, §27.50(c), §27.50(d), RSS-132 §5.4, RSS-133 §6.4, RSS-139 §6.5

Test Method: ANSI C63.26, KDB 971168 D01 v03

Limit:

FCC:

ERP≤7W(LTE Band 5)
EIRP ≤ 2W(LTE Band 2)
ERP≤30W(LTE Band 17)
EIRP≤1W(LTE Band 4)

IC:


EIRP≤11.5W(LTE Band 5)
EIRP ≤ 2 W(LTE Band 2)
EIRP≤1W(LTE Band 4)

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 18.6 °C Humidity: 29.1 % RH Atmospheric Pressure: 1025 mbar
Test mode b: Tx mode, Keep the EUT in transmitting mode.

6.1.2 Test Setup Diagram

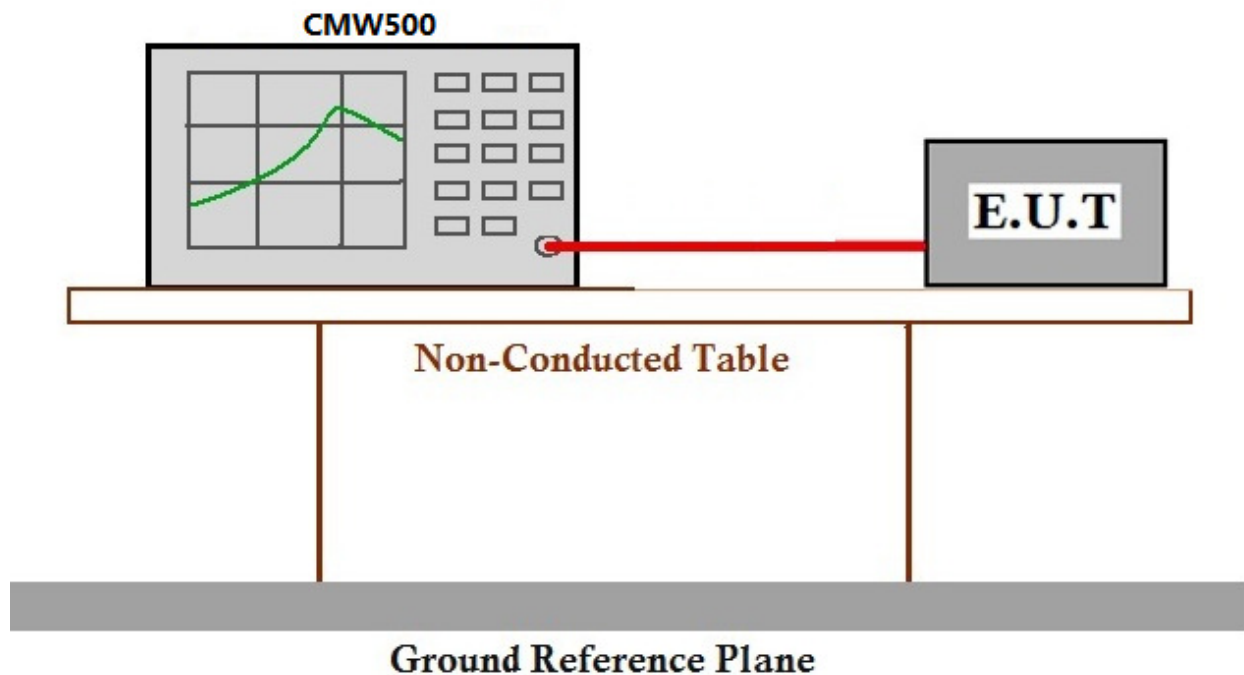

6.1.3 Measurement Data

LTE FDD Band 2, Nominal Bandwidth: 1.4MHz								
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBi)	FCC: EIRP (dBm)	IC: EIRP (dBm)	
		Size	Offset					
QPSK	LCH	1	0	20.52	2.50	23.02	23.02	
		1	3	19.99	2.50	22.49	22.49	
		1	5	20.01	2.50	22.51	22.51	
		3	0	19.8	2.50	22.30	22.30	
		3	2	19.8	2.50	22.30	22.30	
		3	3	19.76	2.50	22.26	22.26	
		6	0	18.68	2.50	21.18	21.18	
	MCH	1	0	21.46	2.50	23.96	23.96	
		1	3	21.4	2.50	23.90	23.90	
		1	5	21.5	2.50	24.00	24.00	
		3	0	21.38	2.50	23.88	23.88	
		3	2	21.37	2.50	23.87	23.87	
		3	3	21.37	2.50	23.87	23.87	
		6	0	20.35	2.50	22.85	22.85	
	HCH	1	0	20.82	2.50	23.32	23.32	
		1	3	20.82	2.50	23.32	23.32	
		1	5	20.82	2.50	23.32	23.32	
		3	0	20.73	2.50	23.23	23.23	
		3	2	20.77	2.50	23.27	23.27	
		3	3	20.73	2.50	23.23	23.23	
		6	0	19.77	2.50	22.27	22.27	
	16QAM	LCH	1	0	20.52	2.50	23.02	23.02
			1	3	19.99	2.50	22.49	22.49
			1	5	20.01	2.50	22.51	22.51
3			0	19.8	2.50	22.30	22.30	
3			2	19.8	2.50	22.30	22.30	
3			3	19.76	2.50	22.26	22.26	
6			0	18.68	2.50	21.18	21.18	
MCH		1	0	20.39	2.50	22.89	22.89	
		1	3	20.3	2.50	22.80	22.80	
		1	5	20.11	2.50	22.61	22.61	
		3	0	20.4	2.50	22.90	22.90	
		3	2	20.36	2.50	22.86	22.86	
		3	3	20.25	2.50	22.75	22.75	
		6	0	19.34	2.50	21.84	21.84	
HCH		1	0	19.65	2.50	22.15	22.15	
		1	3	19.91	2.50	22.41	22.41	
		1	5	19.32	2.50	21.82	21.82	
		3	0	19.82	2.50	22.32	22.32	
		3	2	19.8	2.50	22.30	22.30	
		3	3	19.7	2.50	22.20	22.20	
		6	0	18.48	2.50	20.98	20.98	
Conclusion: EIRP limit for FCC and IC is 2W(33.01dBm), so the test is pass								

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

LTE FDD Band 2, Nominal Bandwidth: 3MHz								
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBi)	FCC: EIRP (dBm)	IC: EIRP (dBm)	
		Size	Offset					
QPSK	LCH	1	0	20.68	2.50	23.18	23.18	
		1	7	20.71	2.50	23.21	23.21	
		1	14	20.75	2.50	23.25	23.25	
		8	0	19.63	2.50	22.13	22.13	
		8	4	19.7	2.50	22.20	22.20	
		8	7	19.76	2.50	22.26	22.26	
		15	0	19.64	2.50	22.14	22.14	
	MCH	1	0	21.29	2.50	23.79	23.79	
		1	7	21.33	2.50	23.83	23.83	
		1	14	21.28	2.50	23.78	23.78	
		8	0	20.27	2.50	22.77	22.77	
		8	4	20.27	2.50	22.77	22.77	
		8	7	20.32	2.50	22.82	22.82	
		15	0	20.28	2.50	22.78	22.78	
	HCH	1	0	20.85	2.50	23.35	23.35	
		1	7	20.62	2.50	23.12	23.12	
		1	14	20.63	2.50	23.13	23.13	
		8	0	19.73	2.50	22.23	22.23	
		8	4	19.66	2.50	22.16	22.16	
		8	7	19.65	2.50	22.15	22.15	
		15	0	19.62	2.50	22.12	22.12	
	16QAM	LCH	1	0	19.65	2.50	22.15	22.15
			1	7	19.93	2.50	22.43	22.43
			1	14	19.43	2.50	21.93	21.93
8			0	18.57	2.50	21.07	21.07	
8			4	18.57	2.50	21.07	21.07	
8			7	18.69	2.50	21.19	21.19	
15			0	18.66	2.50	21.16	21.16	
MCH		1	0	20.51	2.50	23.01	23.01	
		1	7	20.56	2.50	23.06	23.06	
		1	14	20.34	2.50	22.84	22.84	
		8	0	19.17	2.50	21.67	21.67	
		8	4	19.19	2.50	21.69	21.69	
		8	7	19.23	2.50	21.73	21.73	
		15	0	19.23	2.50	21.73	21.73	
HCH		1	0	20.44	2.50	22.94	22.94	
		1	7	20.61	2.50	23.11	23.11	
		1	14	19.96	2.50	22.46	22.46	
		8	0	18.73	2.50	21.23	21.23	
		8	4	18.57	2.50	21.07	21.07	
		8	7	18.52	2.50	21.02	21.02	
		15	0	18.65	2.50	21.15	21.15	
Conclusion: EIRP limit for FCC and IC is 2W(33.01dBm), so the test is pass								

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

LTE FDD Band 2, Nominal Bandwidth: 5MHz								
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBi)	FCC: EIRP (dBm)	IC: EIRP (dBm)	
		Size	Offset					
QPSK	LCH	1	0	20.62	2.50	23.12	23.12	
		1	12	20.61	2.50	23.11	23.11	
		1	24	20.58	2.50	23.08	23.08	
		12	0	19.62	2.50	22.12	22.12	
		12	6	19.65	2.50	22.15	22.15	
		12	13	19.53	2.50	22.03	22.03	
		25	0	19.59	2.50	22.09	22.09	
	MCH	1	0	21.20	2.50	23.70	23.70	
		1	12	21.33	2.50	23.83	23.83	
		1	24	21.23	2.50	23.73	23.73	
		12	0	20.22	2.50	22.72	22.72	
		12	6	20.27	2.50	22.77	22.77	
		12	13	20.18	2.50	22.68	22.68	
		25	0	20.10	2.50	22.60	22.60	
	HCH	1	0	20.82	2.50	23.32	23.32	
		1	12	20.77	2.50	23.27	23.27	
		1	24	20.44	2.50	22.94	22.94	
		12	0	19.73	2.50	22.23	22.23	
		12	6	19.71	2.50	22.21	22.21	
		12	13	19.55	2.50	22.05	22.05	
		25	0	19.58	2.50	22.08	22.08	
	16QAM	LCH	1	0	19.56	2.50	22.06	22.06
			1	12	19.91	2.50	22.41	22.41
			1	24	19.54	2.50	22.04	22.04
12			0	18.59	2.50	21.09	21.09	
12			6	18.7.0	2.50	21.20	21.20	
12			13	18.6.0	2.50	21.10	21.10	
25			0	18.6.0	2.50	21.10	21.10	
MCH		1	0	20.45	2.50	22.95	22.95	
		1	12	20.46	2.50	22.96	22.96	
		1	24	20.00	2.50	22.50	22.50	
		12	0	19.21	2.50	21.71	21.71	
		12	6	19.28	2.50	21.78	21.78	
		12	13	19.29	2.50	21.79	21.79	
		25	0	18.99	2.50	21.49	21.49	
HCH		1	0	19.90	2.50	22.40	22.40	
		1	12	19.93	2.50	22.43	22.43	
		1	24	19.57	2.50	22.07	22.07	
		12	0	18.64	2.50	21.14	21.14	
		12	6	18.77	2.50	21.27	21.27	
		12	13	18.68	2.50	21.18	21.18	
		25	0	18.74	2.50	21.24	21.24	
Conclusion: EIRP limit for FCC and IC is 2W(33.01dBm), so the test is pass								

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

LTE FDD Band 2, Nominal Bandwidth: 10MHz								
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBi)	FCC: EIRP (dBm)	IC: EIRP (dBm)	
		Size	Offset					
QPSK	LCH	1	0	20.56	2.50	23.06	23.06	
		1	24	20.47	2.50	22.97	22.97	
		1	49	20.64	2.50	23.14	23.14	
		25	0	19.6	2.50	22.10	22.10	
		25	12	19.43	2.50	21.93	21.93	
		25	25	19.39	2.50	21.89	21.89	
		50	0	19.34	2.50	21.84	21.84	
	MCH	1	0	21.21	2.50	23.71	23.71	
		1	24	21.22	2.50	23.72	23.72	
		1	49	21.00	2.50	23.50	23.50	
		25	0	20.13	2.50	22.63	22.63	
		25	12	20.21	2.50	22.71	22.71	
		25	25	20.14	2.50	22.64	22.64	
		50	0	20.01	2.50	22.51	22.51	
	HCH	1	0	20.48	2.50	22.98	22.98	
		1	24	20.71	2.50	23.21	23.21	
		1	49	19.95	2.50	22.45	22.45	
		25	0	19.54	2.50	22.04	22.04	
		25	12	19.48	2.50	21.98	21.98	
		25	25	19.57	2.50	22.07	22.07	
		50	0	19.41	2.50	21.91	21.91	
	16QAM	LCH	1	0	19.21	2.50	21.71	21.71
			1	24	19.4	2.50	21.90	21.90
			1	49	19.31	2.50	21.81	21.81
25			0	18.64	2.50	21.14	21.14	
25			12	18.36	2.50	20.86	20.86	
25			25	18.37	2.50	20.87	20.87	
50			0	18.38	2.50	20.88	20.88	
MCH		1	0	20.00	2.50	22.50	22.50	
		1	24	20.56	2.50	23.06	23.06	
		1	49	19.86	2.50	22.36	22.36	
		25	0	19.09	2.50	21.59	21.59	
		25	12	19.25	2.50	21.75	21.75	
		25	25	18.93	2.50	21.43	21.43	
		50	0	18.84	2.50	21.34	21.34	
HCH		1	0	20.82	2.50	23.32	23.32	
		1	24	20.17	2.50	22.67	22.67	
		1	49	19.14	2.50	21.64	21.64	
		25	0	18.46	2.50	20.96	20.96	
		25	12	18.48	2.50	20.98	20.98	
		25	25	18.61	2.50	21.11	21.11	
		50	0	18.42	2.50	20.92	20.92	
Conclusion: EIRP limit for FCC and IC is 2W(33.01dBm), so the test is pass								

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

LTE FDD Band 2, Nominal Bandwidth: 15MHz							
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBi)	FCC: EIRP (dBm)	IC: EIRP (dBm)
		Size	Offset				
QPSK	LCH	1	0	20.64	2.50	23.14	23.14
		1	37	20.47	2.50	22.97	22.97
		1	74	20.58	2.50	23.08	23.08
		37	0	19.37	2.50	21.87	21.87
		37	18	19.33	2.50	21.83	21.83
		37	38	19.38	2.50	21.88	21.88
		75	0	19.29	2.50	21.79	21.79
	MCH	1	0	21.19	2.50	23.69	23.69
		1	37	21.19	2.50	23.69	23.69
		1	74	20.80	2.50	23.30	23.30
		37	0	19.97	2.50	22.47	22.47
		37	18	19.92	2.50	22.42	22.42
		37	38	19.80	2.50	22.30	22.30
		75	0	19.91	2.50	22.41	22.41
	HCH	1	0	20.41	2.50	22.91	22.91
		1	37	20.54	2.50	23.04	23.04
		1	74	19.74	2.50	22.24	22.24
		37	0	19.2	2.50	21.70	21.70
		37	18	19.28	2.50	21.78	21.78
		37	38	19.37	2.50	21.87	21.87
		75	0	19.27	2.50	21.77	21.77
16QAM	LCH	1	0	19.84	2.50	22.34	22.34
		1	37	19.70	2.50	22.20	22.20
		1	74	19.62	2.50	22.12	22.12
		37	0	18.34	2.50	20.84	20.84
		37	18	18.3	2.50	20.80	20.80
		37	38	18.35	2.50	20.85	20.85
		75	0	18.21	2.50	20.71	20.71
	MCH	1	0	19.86	2.50	22.36	22.36
		1	37	20.08	2.50	22.58	22.58
		1	74	20.06	2.50	22.56	22.56
		37	0	19.05	2.50	21.55	21.55
		37	18	19.08	2.50	21.58	21.58
		37	38	18.75	2.50	21.25	21.25
		75	0	18.87	2.50	21.37	21.37
	HCH	1	0	19.13	2.50	21.63	21.63
		1	37	19.40	2.50	21.90	21.90
		1	74	19.32	2.50	21.82	21.82
		37	0	18.17	2.50	20.67	20.67
		37	18	18.37	2.50	20.87	20.87
		37	38	18.46	2.50	20.96	20.96
		75	0	18.23	2.50	20.73	20.73
Conclusion: EIRP limit for FCC and IC is 2W(33.01dBm), so the test is pass							

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

LTE FDD Band 2, Nominal Bandwidth: 20MHz								
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBi)	FCC: EIRP (dBm)	IC: EIRP (dBm)	
		Size	Offset					
QPSK	LCH	1	0	20.62	2.50	23.12	23.12	
		1	49	20.64	2.50	23.14	23.14	
		1	99	20.82	2.50	23.32	23.32	
		50	0	19.34	2.50	21.84	21.84	
		50	25	19.25	2.50	21.75	21.75	
		50	50	19.38	2.50	21.88	21.88	
		100	0	19.32	2.50	21.82	21.82	
	MCH	1	0	20.94	2.50	23.44	23.44	
		1	49	21.13	2.50	23.63	23.63	
		1	99	20.56	2.50	23.06	23.06	
		50	0	19.88	2.50	22.38	22.38	
		50	25	19.81	2.50	22.31	22.31	
		50	50	19.67	2.50	22.17	22.17	
		100	0	19.85	2.50	22.35	22.35	
	HCH	1	0	20.45	2.50	22.95	22.95	
		1	49	20.45	2.50	22.95	22.95	
		1	99	19.71	2.50	22.21	22.21	
		50	0	19.06	2.50	21.56	21.56	
		50	25	19.15	2.50	21.65	21.65	
		50	50	19.25	2.50	21.75	21.75	
		100	0	19.28	2.50	21.78	21.78	
	16QAM	LCH	1	0	19.31	2.50	21.81	21.81
			1	49	19.63	2.50	22.13	22.13
			1	99	19.66	2.50	22.16	22.16
50			0	18.34	2.50	20.84	20.84	
50			25	18.33	2.50	20.83	20.83	
50			50	18.33	2.50	20.83	20.83	
100			0	18.28	2.50	20.78	20.78	
MCH		1	0	20.05	2.50	22.55	22.55	
		1	49	20.07	2.50	22.57	22.57	
		1	99	19.78	2.50	22.28	22.28	
		50	0	18.81	2.50	21.31	21.31	
		50	25	18.8	2.50	21.30	21.30	
		50	50	18.62	2.50	21.12	21.12	
		100	0	18.8	2.50	21.30	21.30	
HCH		1	0	19.39	2.50	21.89	21.89	
		1	49	19.56	2.50	22.06	22.06	
		1	99	18.93	2.50	21.43	21.43	
		50	0	18.09	2.50	20.59	20.59	
		50	25	18.18	2.50	20.68	20.68	
		50	50	18.31	2.50	20.81	20.81	
		100	0	18.26	2.50	20.76	20.76	
Conclusion: EIRP limit for FCC and IC is 2W(33.01dBm), so the test is pass								



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

Report No.: SZEM180300235002

Page: 20 of 40

Note:

1) EIRP= Conducted output power + Antenna gain (dBi)

LTE FDD Band 4, Nominal Bandwidth: 1.4MHz							
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBi)	FCC: EIRP (dBm)	IC: EIRP (dBm)
		Size	Offset				
QPSK	LCH	1	0	21.9	2.50	24.40	24.40
		1	3	21.68	2.50	24.18	24.18
		1	5	21.63	2.50	24.13	24.13
		3	0	21.72	2.50	24.22	24.22
		3	2	21.69	2.50	24.19	24.19
		3	3	21.55	2.50	24.05	24.05
		6	0	21.06	2.50	23.56	23.56
	MCH	1	0	19.58	2.50	22.08	22.08
		1	3	19.59	2.50	22.09	22.09
		1	5	19.65	2.50	22.15	22.15
		3	0	19.65	2.50	22.15	22.15
		3	2	19.57	2.50	22.07	22.07
		3	3	19.59	2.50	22.09	22.09
		6	0	18.6	2.50	21.10	21.10
	HCH	1	0	19.58	2.50	22.08	22.08
		1	3	19.48	2.50	21.98	21.98
		1	5	19.52	2.50	22.02	22.02
		3	0	19.47	2.50	21.97	21.97
		3	2	19.45	2.50	21.95	21.95
		3	3	19.46	2.50	21.96	21.96
		6	0	19.46	2.50	21.96	21.96
16QAM	LCH	1	0	21.22	2.50	23.72	23.72
		1	3	21.14	2.50	23.64	23.64
		1	5	21.18	2.50	23.68	23.68
		3	0	20.71	2.50	23.21	23.21
		3	2	20.79	2.50	23.29	23.29
		3	3	20.64	2.50	23.14	23.14
		6	0	20.63	2.50	23.13	23.13
	MCH	1	0	18.52	2.50	21.02	21.02
		1	3	18.92	2.50	21.42	21.42
		1	5	18.96	2.50	21.46	21.46
		3	0	18.71	2.50	21.21	21.21
		3	2	18.57	2.50	21.07	21.07
		3	3	18.69	2.50	21.19	21.19
		6	0	17.63	2.50	20.13	20.13
	HCH	1	0	18.96	2.50	21.46	21.46
		1	3	18.95	2.50	21.45	21.45
		1	5	18.97	2.50	21.47	21.47
		3	0	18.53	2.50	21.03	21.03
		3	2	18.57	2.50	21.07	21.07
		3	3	18.5	2.50	21.00	21.00
		6	0	18.49	2.50	20.99	20.99
Conclusion: EIRP limit for FCC and IC is 1W(30.0dBm), so the test is pass							

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

LTE FDD Band 4, Nominal Bandwidth: 3MHz								
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBi)	FCC: EIRP (dBm)	IC: EIRP (dBm)	
		Size	Offset					
QPSK	LCH	1	0	21.64	2.50	24.14	24.14	
		1	8	21.52	2.50	24.02	24.02	
		1	14	21.06	2.50	23.56	23.56	
		8	0	21.08	2.50	23.58	23.58	
		8	4	20.9	2.50	23.40	23.40	
		8	7	20.96	2.50	23.46	23.46	
		15	0	20.95	2.50	23.45	23.45	
	MCH	1	0	19.58	2.50	22.08	22.08	
		1	8	19.64	2.50	22.14	22.14	
		1	14	19.77	2.50	22.27	22.27	
		8	0	18.57	2.50	21.07	21.07	
		8	4	18.72	2.50	21.22	21.22	
		8	7	18.7	2.50	21.20	21.20	
		15	0	18.66	2.50	21.16	21.16	
	HCH	1	0	19.37	2.50	21.87	21.87	
		1	8	19.58	2.50	22.08	22.08	
		1	14	19.2	2.50	21.70	21.70	
		8	0	19.47	2.50	21.97	21.97	
		8	4	19.51	2.50	22.01	22.01	
		8	7	19.4	2.50	21.90	21.90	
		15	0	19.42	2.50	21.92	21.92	
	16QAM	LCH	1	0	21.11	2.50	23.61	23.61
			1	8	21.05	2.50	23.55	23.55
			1	14	20.53	2.50	23.03	23.03
8			0	20.63	2.50	23.13	23.13	
8			4	20.58	2.50	23.08	23.08	
8			7	20.37	2.50	22.87	22.87	
15			0	20.51	2.50	23.01	23.01	
MCH		1	0	18.72	2.50	21.22	21.22	
		1	8	18.74	2.50	21.24	21.24	
		1	14	18.73	2.50	21.23	21.23	
		8	0	17.6	2.50	20.10	20.10	
		8	4	17.78	2.50	20.28	20.28	
		8	7	17.69	2.50	20.19	20.19	
		15	0	17.59	2.50	20.09	20.09	
HCH		1	0	18.41	2.50	20.91	20.91	
		1	8	18.63	2.50	21.13	21.13	
		1	14	18.67	2.50	21.17	21.17	
		8	0	18.46	2.50	20.96	20.96	
		8	4	18.51	2.50	21.01	21.01	
		8	7	18.5	2.50	21.00	21.00	
		15	0	18.4	2.50	20.90	20.90	
Conclusion: EIRP limit for FCC and IC is 1W(30.0dBm), so the test is pass								

LTE FDD Band 4, Nominal Bandwidth: 5MHz								
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBi)	FCC: EIRP (dBm)	IC: EIRP (dBm)	
		Size	Offset					
QPSK	LCH	1	0	21.56	2.50	24.06	24.06	
		1	12	21.39	2.50	23.89	23.89	
		1	24	20.69	2.50	23.19	23.19	
		12	0	20.93	2.50	23.43	23.43	
		12	7	20.93	2.50	23.43	23.43	
		12	13	20.8	2.50	23.30	23.30	
		25	0	20.81	2.50	23.31	23.31	
	MCH	1	0	19.5	2.50	22.00	22.00	
		1	12	19.59	2.50	22.09	22.09	
		1	24	19.72	2.50	22.22	22.22	
		12	0	18.51	2.50	21.01	21.01	
		12	7	18.59	2.50	21.09	21.09	
		12	13	18.67	2.50	21.17	21.17	
		25	0	18.57	2.50	21.07	21.07	
	HCH	1	0	19.45	2.50	21.95	21.95	
		1	12	19.54	2.50	22.04	22.04	
		1	24	19.09	2.50	21.59	21.59	
		12	0	19.55	2.50	22.05	22.05	
		12	7	19.57	2.50	22.07	22.07	
		12	13	19.34	2.50	21.84	21.84	
		25	0	19.44	2.50	21.94	21.94	
	16QAM	LCH	1	0	20.69	2.50	23.19	23.19
			1	12	20.81	2.50	23.31	23.31
			1	24	20.19	2.50	22.69	22.69
12			0	20.48	2.50	22.98	22.98	
12			7	20.31	2.50	22.81	22.81	
12			13	20.07	2.50	22.57	22.57	
25			0	20.16	2.50	22.66	22.66	
MCH		1	0	18.86	2.50	21.36	21.36	
		1	12	18.81	2.50	21.31	21.31	
		1	24	18.43	2.50	20.93	20.93	
		12	0	17.48	2.50	19.98	19.98	
		12	7	17.63	2.50	20.13	20.13	
		12	13	17.78	2.50	20.28	20.28	
		25	0	17.58	2.50	20.08	20.08	
HCH		1	0	18.57	2.50	21.07	21.07	
		1	12	18.67	2.50	21.17	21.17	
		1	24	18.6	2.50	21.10	21.10	
		12	0	18.55	2.50	21.05	21.05	
		12	7	18.49	2.50	20.99	20.99	
		12	13	18.27	2.50	20.77	20.77	
		25	0	18.41	2.50	20.91	20.91	
Conclusion: EIRP limit for FCC and IC is 1W(30.0dBm), so the test is pass								

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

LTE FDD Band 4, Nominal Bandwidth: 10MHz								
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBi)	FCC: EIRP (dBm)	IC: EIRP (dBm)	
		Size	Offset					
QPSK	LCH	1	0	21.09	2.50	23.59	23.59	
		1	25	20.94	2.50	23.44	23.44	
		1	49	20.05	2.50	22.55	22.55	
		25	0	20.76	2.50	23.26	23.26	
		25	12	20.6	2.50	23.10	23.10	
		25	25	20.46	2.50	22.96	22.96	
		50	0	20.36	2.50	22.86	22.86	
	MCH	1	0	19.69	2.50	22.19	22.19	
		1	25	19.55	2.50	22.05	22.05	
		1	49	19.86	2.50	22.36	22.36	
		25	0	18.45	2.50	20.95	20.95	
		25	12	18.44	2.50	20.94	20.94	
		25	25	18.62	2.50	21.12	21.12	
		50	0	18.37	2.50	20.87	20.87	
	HCH	1	0	20.13	2.50	22.63	22.63	
		1	25	19.76	2.50	22.26	22.26	
		1	49	18.74	2.50	21.24	21.24	
		25	0	20.02	2.50	22.52	22.52	
		25	12	19.81	2.50	22.31	22.31	
		25	25	19.30	2.50	21.80	21.80	
		50	0	19.67	2.50	22.17	22.17	
	16QAM	LCH	1	0	20.56	2.50	23.06	23.06
			1	25	20.37	2.50	22.87	22.87
			1	49	19.46	2.50	21.96	21.96
25			0	19.95	2.50	22.45	22.45	
25			12	19.92	2.50	22.42	22.42	
25			25	19.45	2.50	21.95	21.95	
50			0	19.72	2.50	22.22	22.22	
MCH		1	0	18.87	2.50	21.37	21.37	
		1	25	18.82	2.50	21.32	21.32	
		1	49	19.04	2.50	21.54	21.54	
		25	0	17.48	2.50	19.98	19.98	
		25	12	17.33	2.50	19.83	19.83	
		25	25	17.65	2.50	20.15	20.15	
		50	0	17.39	2.50	19.89	19.89	
HCH		1	0	19.49	2.50	21.99	21.99	
		1	25	18.71	2.50	21.21	21.21	
		1	49	18.24	2.50	20.74	20.74	
		25	0	18.99	2.50	21.49	21.49	
		25	12	18.78	2.50	21.28	21.28	
		25	25	18.23	2.50	20.73	20.73	
		50	0	18.63	2.50	21.13	21.13	
Conclusion: EIRP limit for FCC and IC is 1W(30.0dBm), so the test is pass								

LTE FDD Band 4, Nominal Bandwidth: 15MHz								
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBi)	FCC: EIRP (dBm)	IC: EIRP (dBm)	
		Size	Offset					
QPSK	LCH	1	0	21.00	2.50	23.50	23.50	
		1	37	20.7	2.50	23.20	23.20	
		1	74	20.13	2.50	22.63	22.63	
		37	0	20.65	2.50	23.15	23.15	
		37	18	20.16	2.50	22.66	22.66	
		37	38	19.49	2.50	21.99	21.99	
		75	0	19.92	2.50	22.42	22.42	
	MCH	1	0	19.97	2.50	22.47	22.47	
		1	37	19.70	2.50	22.20	22.20	
		1	74	20.18	2.50	22.68	22.68	
		37	0	18.46	2.50	20.96	20.96	
		37	18	18.54	2.50	21.04	21.04	
		37	38	18.76	2.50	21.26	21.26	
		75	0	18.57	2.50	21.07	21.07	
	HCH	1	0	20.54	2.50	23.04	23.04	
		1	37	20.22	2.50	22.72	22.72	
		1	74	18.54	2.50	21.04	21.04	
		37	0	19.79	2.50	22.29	22.29	
		37	18	20.23	2.50	22.73	22.73	
		37	38	19.41	2.50	21.91	21.91	
		75	0	20.17	2.50	22.67	22.67	
	16QAM	LCH	1	0	19.88	2.50	22.38	22.38
			1	37	20.24	2.50	22.74	22.74
			1	74	19.57	2.50	22.07	22.07
37			0	19.62	2.50	22.12	22.12	
37			18	19.14	2.50	21.64	21.64	
37			38	19.36	2.50	21.86	21.86	
75			0	19.54	2.50	22.04	22.04	
MCH		1	0	19.24	2.50	21.74	21.74	
		1	37	18.55	2.50	21.05	21.05	
		1	74	19.06	2.50	21.56	21.56	
		37	0	17.51	2.50	20.01	20.01	
		37	18	17.49	2.50	19.99	19.99	
		37	38	17.88	2.50	20.38	20.38	
		75	0	17.56	2.50	20.06	20.06	
HCH		1	0	20.49	2.50	22.99	22.99	
		1	37	19.22	2.50	21.72	21.72	
		1	74	18.13	2.50	20.63	20.63	
		37	0	18.77	2.50	21.27	21.27	
		37	18	19.20	2.50	21.70	21.70	
		37	38	18.38	2.50	20.88	20.88	
		75	0	19.13	2.50	21.63	21.63	
Conclusion: EIRP limit for FCC and IC is 1W(30.0dBm), so the test is pass								

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

LTE FDD Band 4, Nominal Bandwidth: 20MHz								
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBi)	FCC: EIRP (dBm)	IC: EIRP (dBm)	
		Size	Offset					
QPSK	LCH	1	0	20.89	2.50	23.39	23.39	
		1	49	20.50	2.50	23.00	23.00	
		1	99	19.48	2.50	21.98	21.98	
		50	0	20.40	2.50	22.90	22.90	
		50	25	19.54	2.50	22.04	22.04	
		50	50	18.71	2.50	21.21	21.21	
		100	0	19.50	2.50	22.00	22.00	
	MCH	1	0	20.12	2.50	22.62	22.62	
		1	49	19.64	2.50	22.14	22.14	
		1	99	20.42	2.50	22.92	22.92	
		50	0	18.46	2.50	20.96	20.96	
		50	25	18.45	2.50	20.95	20.95	
		50	50	18.79	2.50	21.29	21.29	
		100	0	18.68	2.50	21.18	21.18	
	HCH	1	0	20.02	2.50	22.52	22.52	
		1	49	20.81	2.50	23.31	23.31	
		1	99	18.44	2.50	20.94	20.94	
		50	0	19.24	2.50	21.74	21.74	
		50	25	19.72	2.50	22.22	22.22	
		50	50	19.71	2.50	22.21	22.21	
		100	0	19.71	2.50	22.21	22.21	
	16QAM	LCH	1	0	20.25	2.50	22.75	22.75
			1	49	20.03	2.50	22.53	22.53
			1	99	20.09	2.50	22.59	22.59
50			0	19.42	2.50	21.92	21.92	
50			25	18.49	2.50	20.99	20.99	
50			50	17.80	2.50	20.30	20.30	
100			0	18.59	2.50	21.09	21.09	
MCH		1	0	19.43	2.50	21.93	21.93	
		1	49	18.58	2.50	21.08	21.08	
		1	99	19.78	2.50	22.28	22.28	
		50	0	17.47	2.50	19.97	19.97	
		50	25	17.46	2.50	19.96	19.96	
		50	50	17.83	2.50	20.33	20.33	
		100	0	17.67	2.50	20.17	20.17	
HCH		1	0	20.57	2.50	23.07	23.07	
		1	49	19.72	2.50	22.22	22.22	
		1	99	18.05	2.50	20.55	20.55	
		50	0	18.15	2.50	20.65	20.65	
		50	25	18.68	2.50	21.70	21.70	
		50	50	18.72	2.50	20.88	20.88	
		100	0	19.69	2.50	21.63	21.63	
Conclusion: EIRP limit for FCC and IC is 1W(30.0dBm), so the test is pass								



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

Report No.: SZEM180300235002

Page: 27 of 40

Note:

1) EIRP= Conducted output power + Antenna gain (dBi)

LTE FDD Band 5, Nominal Bandwidth: 1.4MHz									
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBd)	Antenna gain (dBi)	FCC: ERP (dBm)	IC: EIRP (dBm)	
		Size	Offset						
QPSK	LCH	1	0	22.17	0.35	2.50	22.52	24.67	
		1	3	22.25	0.35	2.50	22.6	24.75	
		1	5	22.21	0.35	2.50	22.56	24.71	
		3	0	22.22	0.35	2.50	22.57	24.72	
		3	1	22.21	0.35	2.50	22.56	24.71	
		3	3	22.14	0.35	2.50	22.49	24.64	
		6	0	21.17	0.35	2.50	21.52	23.67	
	MCH	1	0	21.85	0.35	2.50	22.2	24.35	
		1	3	22.18	0.35	2.50	22.53	24.68	
		1	5	22.17	0.35	2.50	22.52	24.67	
		3	0	22.16	0.35	2.50	22.51	24.66	
		3	1	21.79	0.35	2.50	22.14	24.29	
		3	3	22.13	0.35	2.50	22.48	24.63	
		6	0	21.03	0.35	2.50	21.38	23.53	
	HCH	1	0	21.96	0.35	2.50	22.31	24.46	
		1	3	21.89	0.35	2.50	22.24	24.39	
		1	5	21.82	0.35	2.50	22.17	24.32	
		3	0	21.87	0.35	2.50	22.22	24.37	
		3	1	21.91	0.35	2.50	22.26	24.41	
		3	3	21.80	0.35	2.50	22.15	24.30	
		6	0	20.96	0.35	2.50	21.31	23.46	
	16QAM	LCH	1	0	20.89	0.35	2.50	21.24	23.39
			1	3	21.20	0.35	2.50	21.55	23.70
			1	5	21.19	0.35	2.50	21.54	23.69
3			0	21.23	0.35	2.50	21.58	23.73	
3			1	21.10	0.35	2.50	21.45	23.60	
3			3	21.21	0.35	2.50	21.56	23.71	
6			0	20.17	0.35	2.50	20.52	22.67	
MCH		1	0	21.16	0.35	2.50	21.51	23.66	
		1	3	20.89	0.35	2.50	21.24	23.39	
		1	5	20.80	0.35	2.50	21.15	23.30	
		3	0	21.24	0.35	2.50	21.59	23.74	
		3	1	21.30	0.35	2.50	21.65	23.80	
		3	3	21.23	0.35	2.50	21.58	23.73	
		6	0	20.24	0.35	2.50	20.59	22.74	
HCH		1	0	21.07	0.35	2.50	21.42	23.57	
		1	3	21.05	0.35	2.50	21.4	23.55	
		1	5	20.43	0.35	2.50	20.78	22.93	
		3	0	21.12	0.35	2.50	21.47	23.62	
		3	1	20.90	0.35	2.50	21.25	23.40	
		3	3	20.70	0.35	2.50	21.05	23.20	
		6	0	20.13	0.35	2.50	20.48	22.63	
Conclusion: ERP limit for FCC is 7W(38.45dBm) and EIRP limit for IC is 11.5W(40.61dBm), so the test is pass									

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

LTE FDD Band 5, Nominal Bandwidth: 3MHz									
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBd)	Antenna gain (dBi)	FCC: ERP (dBm)	IC: EIRP (dBm)	
		Size	Offset						
QPSK	LCH	1	0	22.22	0.35	2.50	22.57	24.72	
		1	7	22.10	0.35	2.50	22.45	24.60	
		1	14	22.17	0.35	2.50	22.52	24.67	
		8	0	21.11	0.35	2.50	21.46	23.61	
		8	4	21.22	0.35	2.50	21.57	23.72	
		8	7	21.09	0.35	2.50	21.44	23.59	
		15	0	21.11	0.35	2.50	21.46	23.61	
	MCH	1	0	22.03	0.35	2.50	22.38	24.53	
		1	7	22.25	0.35	2.50	22.60	24.75	
		1	14	22.09	0.35	2.50	22.44	24.59	
		8	0	20.92	0.35	2.50	21.27	23.42	
		8	4	21.00	0.35	2.50	21.35	23.50	
		8	7	21.02	0.35	2.50	21.37	23.52	
		15	0	21.01	0.35	2.50	21.36	23.51	
	HCH	1	0	22.10	0.35	2.50	22.45	24.60	
		1	7	22.05	0.35	2.50	22.40	24.55	
		1	14	21.81	0.35	2.50	22.16	24.31	
		8	0	21.21	0.35	2.50	21.56	23.71	
		8	4	21.20	0.35	2.50	21.55	23.70	
		8	7	21.01	0.35	2.50	21.36	23.51	
		15	0	20.69	0.35	2.50	21.04	23.19	
	16QAM	LCH	1	0	21.38	0.35	2.50	21.73	23.88
			1	7	21.59	0.35	2.50	21.94	24.09
			1	14	20.96	0.35	2.50	21.31	23.46
8			0	20.08	0.35	2.50	20.43	22.58	
8			4	20.04	0.35	2.50	20.39	22.54	
8			7	20.20	0.35	2.50	20.55	22.70	
15			0	20.07	0.35	2.50	20.42	22.57	
MCH		1	0	20.75	0.35	2.50	21.10	23.25	
		1	7	20.84	0.35	2.50	21.19	23.34	
		1	14	21.00	0.35	2.50	21.35	23.50	
		8	0	19.97	0.35	2.50	20.32	22.47	
		8	4	19.99	0.35	2.50	20.34	22.49	
		8	7	20.07	0.35	2.50	20.42	22.57	
		15	0	19.89	0.35	2.50	20.24	22.39	
HCH		1	0	21.36	0.35	2.50	21.71	23.86	
		1	7	21.18	0.35	2.50	21.53	23.68	
		1	14	20.51	0.35	2.50	20.86	23.01	
		8	0	19.89	0.35	2.50	20.24	22.39	
		8	4	19.77	0.35	2.50	20.12	22.27	
		8	7	20.06	0.35	2.50	20.41	22.56	
		15	0	19.67	0.35	2.50	20.02	22.17	

Conclusion: ERP limit for FCC is 7W(38.45dBm) and EIRP limit for IC is 11.5W(40.61dBm), so the test is pass

LTE FDD Band 5, Nominal Bandwidth: 5MHz									
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBd)	Antenna gain (dBi)	FCC: ERP (dBm)	IC: EIRP (dBm)	
		Size	Offset						
QPSK	LCH	1	0	22.42	0.35	2.50	22.77	24.92	
		1	12	22.22	0.35	2.50	22.57	24.72	
		1	24	21.92	0.35	2.50	22.27	24.42	
		12	0	21.12	0.35	2.50	21.47	23.62	
		12	6	21.01	0.35	2.50	21.36	23.51	
		12	13	21.06	0.35	2.50	21.41	23.56	
		25	0	20.81	0.35	2.50	21.16	23.31	
	MCH	1	0	22.02	0.35	2.50	22.37	24.52	
		1	12	21.89	0.35	2.50	22.24	24.39	
		1	24	22.34	0.35	2.50	22.69	24.84	
		12	0	21.02	0.35	2.50	21.37	23.52	
		12	6	21.02	0.35	2.50	21.37	23.52	
		12	13	21.11	0.35	2.50	21.46	23.61	
		25	0	20.93	0.35	2.50	21.28	23.43	
	HCH	1	0	22.20	0.35	2.50	22.55	24.70	
		1	12	21.84	0.35	2.50	22.19	24.34	
		1	24	21.73	0.35	2.50	22.08	24.23	
		12	0	21.25	0.35	2.50	21.60	23.75	
		12	6	21.35	0.35	2.50	21.70	23.85	
		12	13	20.97	0.35	2.50	21.32	23.47	
		25	0	21.11	0.35	2.50	21.46	23.61	
	16QAM	LCH	1	0	20.78	0.35	2.50	21.13	23.28
			1	12	20.68	0.35	2.50	21.03	23.18
			1	24	20.98	0.35	2.50	21.33	23.48
12			0	20.11	0.35	2.50	20.46	22.61	
12			6	19.95	0.35	2.50	20.30	22.45	
12			13	19.93	0.35	2.50	20.28	22.43	
25			0	19.99	0.35	2.50	20.34	22.49	
MCH		1	0	20.65	0.35	2.50	21.00	23.15	
		1	12	21.22	0.35	2.50	21.57	23.72	
		1	24	21.45	0.35	2.50	21.80	23.95	
		12	0	20.00	0.35	2.50	20.35	22.50	
		12	6	20.05	0.35	2.50	20.40	22.55	
		12	13	20.18	0.35	2.50	20.53	22.68	
		25	0	19.91	0.35	2.50	20.26	22.41	
HCH		1	0	21.04	0.35	2.50	21.39	23.54	
		1	12	21.32	0.35	2.50	21.67	23.82	
		1	24	20.99	0.35	2.50	21.34	23.49	
		12	0	20.23	0.35	2.50	20.58	22.73	
		12	6	20.30	0.35	2.50	20.65	22.80	
		12	13	20.09	0.35	2.50	20.44	22.59	
		25	0	20.05	0.35	2.50	20.40	22.55	
Conclusion: ERP limit for FCC is 7W(38.45dBm) and EIRP limit for IC is 11.5W(40.61dBm), so the test is pass									

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

LTE FDD Band 5, Nominal Bandwidth: 10MHz								
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBd)	Antenna gain (dBi)	FCC: ERP (dBm)	IC: EIRP (dBm)
		Size	Offset					
QPSK	LCH	1	0	22.14	0.35	2.50	22.49	24.64
		1	25	21.92	0.35	2.50	22.27	24.42
		1	49	21.94	0.35	2.50	22.29	24.44
		25	0	20.89	0.35	2.50	21.24	23.39
		25	12	20.86	0.35	2.50	21.21	23.36
		25	25	20.84	0.35	2.50	21.19	23.34
		50	0	20.71	0.35	2.50	21.06	23.21
	MCH	1	0	21.93	0.35	2.50	22.28	24.43
		1	25	22.27	0.35	2.50	22.62	24.77
		1	49	22.06	0.35	2.50	22.41	24.56
		25	0	20.87	0.35	2.50	21.22	23.37
		25	12	20.92	0.35	2.50	21.27	23.42
		25	25	21.04	0.35	2.50	21.39	23.54
		50	0	20.71	0.35	2.50	21.06	23.21
	HCH	1	0	21.98	0.35	2.50	22.33	24.48
		1	25	22.06	0.35	2.50	22.41	24.56
		1	49	21.83	0.35	2.50	22.18	24.33
		25	0	20.93	0.35	2.50	21.28	23.43
		25	12	20.99	0.35	2.50	21.34	23.49
		25	25	20.78	0.35	2.50	21.13	23.28
		50	0	20.82	0.35	2.50	21.17	23.32
16QAM	LCH	1	0	21.48	0.35	2.50	21.83	23.98
		1	25	20.9	0.35	2.50	21.25	23.40
		1	49	20.74	0.35	2.50	21.09	23.24
		25	0	19.82	0.35	2.50	20.17	22.32
		25	12	19.87	0.35	2.50	20.22	22.37
		25	25	19.83	0.35	2.50	20.18	22.33
		50	0	19.66	0.35	2.50	20.01	22.16
	MCH	1	0	20.73	0.35	2.50	21.08	23.23
		1	25	21.15	0.35	2.50	21.50	23.65
		1	49	20.92	0.35	2.50	21.27	23.42
		25	0	19.81	0.35	2.50	20.16	22.31
		25	12	19.95	0.35	2.50	20.30	22.45
		25	25	20.05	0.35	2.50	20.40	22.55
		50	0	19.73	0.35	2.50	20.08	22.23
	HCH	1	0	21.33	0.35	2.50	21.68	23.83
		1	25	20.84	0.35	2.50	21.19	23.34
		1	49	21.12	0.35	2.50	21.47	23.62
		25	0	20.06	0.35	2.50	20.41	22.56
		25	12	19.94	0.35	2.50	20.29	22.44
		25	25	20.23	0.35	2.50	20.58	22.73
		50	0	19.83	0.35	2.50	20.18	22.33

Conclusion: ERP limit for FCC is 7W(38.45dBm), EIRP limit for IC is 11.5W(40.61dBm), so the test is pass

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

Report No.: SZEM180300235002

Page: 32 of 40

Note:

- 1) dBd= dBi-2.15
- 2) ERP= Conducted output power+Antenna gain (dBd)
- 3) EIRP= Conducted output power+Antenna gain (dBi)

LTE FDD Band 17, Nominal Bandwidth: 5MHz								
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBd)	Antenna gain (dBi)	FCC: ERP (dBm)	IC: ERP (dBm)
		Size	Offset					
QPSK	LCH	1	0	22.00	0.35	2.50	22.35	/
		1	12	21.92	0.35	2.50	22.27	/
		1	24	22.05	0.35	2.50	22.40	/
		12	0	20.91	0.35	2.50	21.26	/
		12	7	20.76	0.35	2.50	21.11	/
		12	13	20.91	0.35	2.50	21.26	/
		25	0	20.86	0.35	2.50	21.21	/
	MCH	1	0	22.01	0.35	2.50	22.36	/
		1	12	22.02	0.35	2.50	22.37	/
		1	24	22.14	0.35	2.50	22.49	/
		12	0	20.97	0.35	2.50	21.32	/
		12	7	21.15	0.35	2.50	21.50	/
		12	13	21.16	0.35	2.50	21.51	/
		25	0	20.95	0.35	2.50	21.30	/
	HCH	1	0	22.23	0.35	2.50	22.58	/
		1	12	22.12	0.35	2.50	22.47	/
		1	24	21.52	0.35	2.50	21.87	/
		12	0	21.12	0.35	2.50	21.47	/
		12	7	20.97	0.35	2.50	21.32	/
		12	13	20.92	0.35	2.50	21.27	/
		25	0	20.97	0.35	2.50	21.32	/
16QAM	LCH	1	0	20.86	0.35	2.50	21.21	/
		1	12	20.80	0.35	2.50	21.15	/
		1	24	21.30	0.35	2.50	21.65	/
		12	0	19.90	0.35	2.50	20.25	/
		12	7	19.76	0.35	2.50	20.11	/
		12	13	19.95	0.35	2.50	20.30	/
		25	0	19.91	0.35	2.50	20.26	/
	MCH	1	0	21.17	0.35	2.50	21.52	/
		1	12	20.96	0.35	2.50	21.31	/
		1	24	21.38	0.35	2.50	21.73	/
		12	0	20.02	0.35	2.50	20.37	/
		12	7	20.15	0.35	2.50	20.50	/
		12	13	20.22	0.35	2.50	20.57	/
		25	0	19.93	0.35	2.50	20.28	/
	HCH	1	0	21.35	0.35	2.50	21.70	/
		1	12	21.03	0.35	2.50	21.38	/
		1	24	20.29	0.35	2.50	20.64	/
		12	0	20.10	0.35	2.50	20.45	/
		12	7	20.04	0.35	2.50	20.39	/
		12	13	19.99	0.35	2.50	20.34	/
		25	0	19.94	0.35	2.50	20.29	/
Conclusion: ERP limit for FCC is 30W(44.77dBm), so the test is pass								

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

LTE FDD Band 17, Nominal Bandwidth: 10MHz								
Modulation	Channel	RB Configuration		Conducted output power (dBm)	Antenna gain (dBd)	Antenna gain (dBi)	FCC: ERP (dBm)	IC: ERP (dBm)
		Size	Offset					
QPSK	LCH	1	0	22.01	0.35	2.50	22.36	/
		1	24	22.20	0.35	2.50	22.55	/
		1	49	22.02	0.35	2.50	22.37	/
		25	0	20.69	0.35	2.50	21.04	/
		25	12	20.98	0.35	2.50	21.33	/
		25	25	21.16	0.35	2.50	21.51	/
		50	0	20.80	0.35	2.50	21.15	/
	MCH	1	0	21.90	0.35	2.50	22.25	/
		1	24	21.99	0.35	2.50	22.34	/
		1	49	21.96	0.35	2.50	22.31	/
		25	0	20.79	0.35	2.50	21.14	/
		25	12	20.97	0.35	2.50	21.32	/
		25	25	21.00	0.35	2.50	21.35	/
		50	0	20.82	0.35	2.50	21.17	/
	HCH	1	0	21.79	0.35	2.50	22.14	/
		1	24	22.09	0.35	2.50	22.44	/
		1	49	21.59	0.35	2.50	21.94	/
		25	0	20.82	0.35	2.50	21.17	/
		25	12	21.12	0.35	2.50	21.47	/
		25	25	21.05	0.35	2.50	21.40	/
		50	0	20.80	0.35	2.50	21.15	/
16QAM	LCH	1	0	20.74	0.35	2.50	21.09	/
		1	24	21.31	0.35	2.50	21.66	/
		1	49	20.96	0.35	2.50	21.31	/
		25	0	19.64	0.35	2.50	19.99	/
		25	12	19.85	0.35	2.50	20.20	/
		25	25	20.03	0.35	2.50	20.38	/
		50	0	19.80	0.35	2.50	20.15	/
	MCH	1	0	21.16	0.35	2.50	21.51	/
		1	24	21.04	0.35	2.50	21.39	/
		1	49	21.30	0.35	2.50	21.65	/
		25	0	19.70	0.35	2.50	20.05	/
		25	12	19.92	0.35	2.50	20.27	/
		25	25	20.01	0.35	2.50	20.36	/
		50	0	19.86	0.35	2.50	20.21	/
	HCH	1	0	21.05	0.35	2.50	21.40	/
		1	24	20.81	0.35	2.50	21.16	/
		1	49	20.37	0.35	2.50	20.72	/
		25	0	19.77	0.35	2.50	20.12	/



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

Report No.: SZEM180300235002

Page: 35 of 40

		25	12	19.92	0.35	2.50	20.27	/
		25	25	19.88	0.35	2.50	20.23	/
		50	0	19.76	0.35	2.50	20.11	/

Conclusion: ERP limit for FCC is 30W(44.77dBm), so the test is pass

Note:

1) dBd= dBi-2.15

2) ERP= Conducted output power+Antenna gain (dBd)


6.2 Field strength of spurious radiation

Test Requirement: §2.1051, §22.917, §24.238, RSS-132 §5.5, RSS-133 §6.5
 Test Method: ANSI C63.26, KDB 971168 D01 v03
 Limit: $\leq -13\text{dBm}$

6.2.1 E.U.T. Operation

Operating Environment:
 Temperature: 18.6 °C Humidity: 29.1 % RH Atmospheric Pressure: 1025 mbar
 Test mode a: Tx mode, Keep the EUT in transmitting mode.

6.2.2 Test Setup Diagram

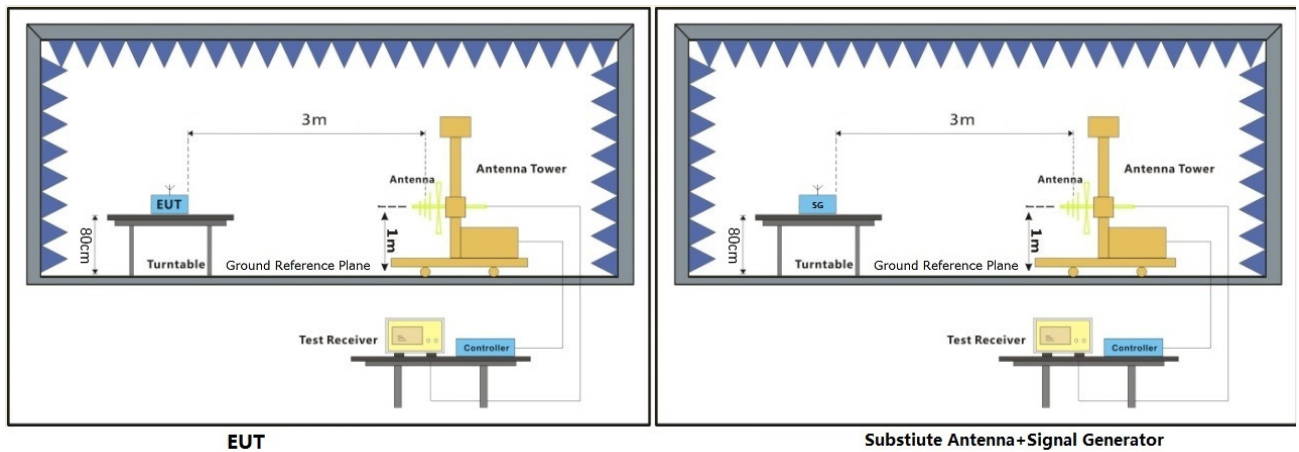

6.2.3 Measurement Procedure and Data

Test Procedure:

- (1) On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

LTE Band 2-1.4M QPSK Middle Channel								
Frequency (MHz)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization (H/V)	Result
3758.74	-41.71	0.71	7.6	-34.82	-13	-21.82	Horizontal	Pass
5638.11	-45.97	0.85	10.3	-36.52	-13	-23.52	Horizontal	Pass
7517.48	-53.81	0.99	13.2	-41.6	-13	-28.6	Horizontal	Pass
3758.74	-41.94	0.71	7.6	-35.05	-13	-22.05	Vertical	Pass
5638.11	-41.56	0.85	10.3	-32.11	-13	-19.11	Vertical	Pass
7517.48	-51.94	0.99	13.2	-39.73	-13	-26.73	Vertical	Pass

LTE Band 4 - 20M QPSK Low Channel								
Frequency (MHz)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization (H/V)	Result
3422	-52.94	0.65	6.2	-47.39	-13	-34.39	Horizontal	Pass
5133	-52.75	0.82	9.6	-43.97	-13	-30.97	Horizontal	Pass
6844	-52.92	0.95	11.8	-42.07	-13	-29.07	Horizontal	Pass
3422	-55.05	0.65	6.2	-49.5	-13	-36.5	Vertical	Pass
5133	-50.95	0.82	9.6	-42.17	-13	-29.17	Vertical	Pass
6844	-52.51	0.95	11.8	-41.66	-13	-28.66	Vertical	Pass

LTE Band 5 - 3M QPSK Middle Channel								
Frequency (MHz)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization (H/V)	Result
1670.3	-50.76	0.52	6	-45.28	-13	-32.28	Horizontal	Pass
2505.45	-48.14	0.59	5.3	-43.43	-13	-30.43	Horizontal	Pass
3340.6	-50.11	0.65	6.2	-44.56	-13	-31.56	Horizontal	Pass
1670.3	-53.74	0.52	6	-48.26	-13	-35.26	Vertical	Pass
2505.45	-49.07	0.59	5.3	-44.36	-13	-31.36	Vertical	Pass
3340.6	-48.3	0.65	6.2	-42.75	-13	-29.75	Vertical	Pass



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

Report No.: SZEM180300235002


Page: 39 of 40

LTE Band 17 - 10M QPSK Low Channel								
Frequency (MHz)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization (H/V)	Result
1409	-42.07	0.43	1.9	-40.6	-13	-27.6	Horizontal	Pass
2113.5	-61.62	0.53	5.8	-56.35	-13	-43.35	Horizontal	Pass
2818	-45.72	0.59	5.3	-41.01	-13	-28.01	Horizontal	Pass
1409	-41.96	0.43	1.9	-40.49	-13	-27.49	Vertical	Pass
2113.5	-58.26	0.53	5.8	-52.99	-13	-39.99	Vertical	Pass
2818	-42.93	0.59	5.3	-38.22	-13	-25.22	Vertical	Pass

Note: All modes have been tested and we found RMC test mode has the worst test result. Only record the worst test result.

7 Photographs

7.1 Radiated Emissions (Above 1GHz) Test Setup

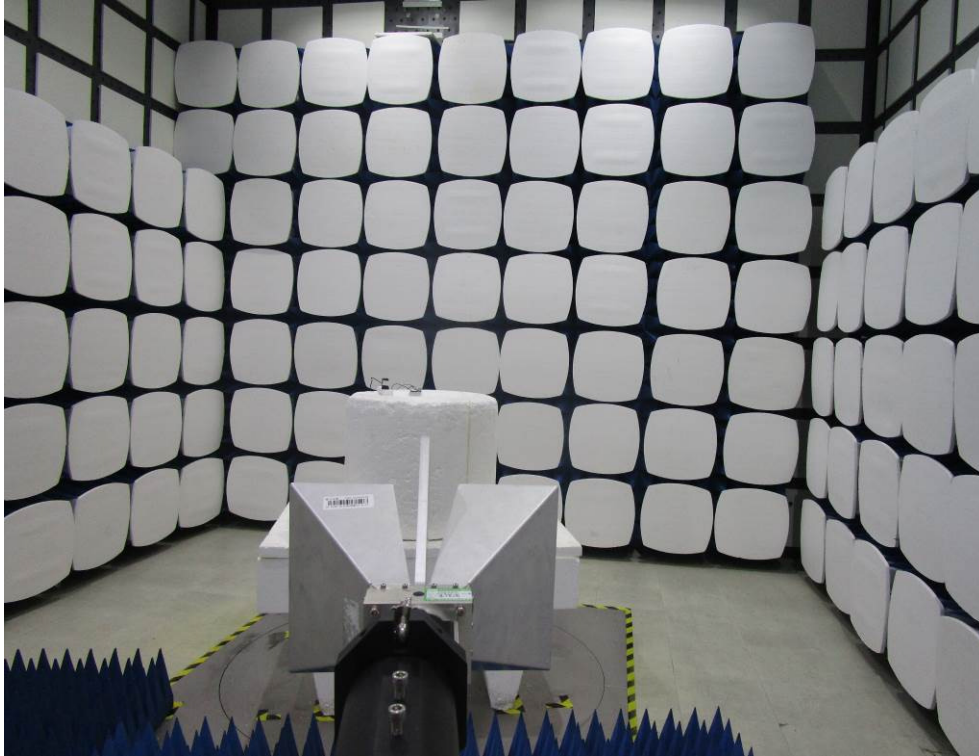

7.2 EUT Constructional Details (EUT Photos)

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1712012659CR.

- End of the Report -