




LABEL

FCC ID: 2ADAT-T40S0TOS1

IC ID: 12438A-T40S0TOS1

Position: - on the Stator unit of the System

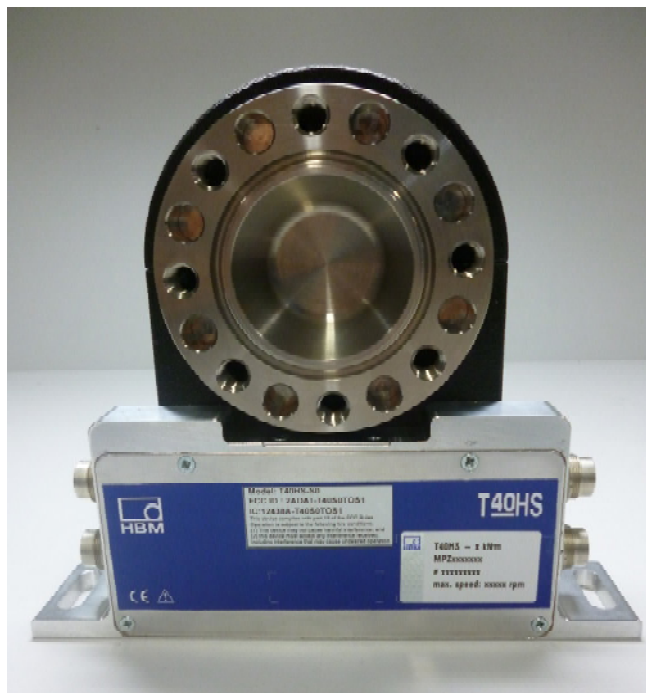



$$1 \text{ pt} = \frac{1}{72} \cdot 25,4 \text{ mm}$$

Schriftgröße/n - Font size/s

FCC ID bzw. CI Code

min. 8 Punkte [*pt] = ~2,8 mm

Stellungnahme - Statement Text

min. 5 Punkte [*pt] = ~1,8 mm

*DTO-Punkte / 1 pt = 0,35²⁷ mm

Model: T40HS-S0
FCC ID: 2ADAT-T40S0TOS1
IC: 12438A-T40S0TOS1

This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired operation.

8

5

Model: T40HS-S0-MPZ1402023
FCC ID: 2ADAT-T40S0TOS1
IC: 12438A-T40S0TOS1

This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired operation.

Model: T40HS-S1
FCC ID: 2ADAT-T40S0TOS1
IC: 12438A-T40S0TOS1

This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired operation.

Abmessungen – Dimension [mm]

B = 46.0 ⁺²

H = 21.0 ⁺²

R = 1.0 ^{±0,2}

Material: self-adhesive polyester security film, 60 µm

Color: silver, matt coated

Adhesive: Permanent adhesive

Temperature range: -40 ° C to +150 ° C

Characteristics: weather resistant,
sea water,
resistant to many solvents,
weak acids and alkalis

