


TEST REPORT

Applicant: Libre Wireless Technologies, Inc.
Address: 17835 Newhope Street, Ste A, Fountain Valley, CA 92708, US
Equipment Type: High Performance Wireless Media Module
Model Name: LS8 (refer to section 2.3)
Brand Name: LIBRE
FCC ID: 2ADBM-LS8
ISED Number: 20276-LS8
47 CFR Part 15 Subpart C
Test Standard: RSS-Gen Issue 5
RSS-247 Issue 3
(refer to section 3.1)
Sample Arrival Date: Sep. 09, 2024
Test Date: Sep. 19, 2024 - Oct. 21, 2024
Date of Issue: Nov. 04, 2024

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie Zhu




Checked by: Ye Hongji



Approved by: Sunny Zou

(Technical Director)



Revision History		
Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Nov. 04, 2024</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information.....	5
2.3	General Description for Equipment under Test (EUT).....	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Test Verdict	9
4	GENERAL TEST CONFIGURATIONS	10
4.1	Test Environments.....	10
4.2	Test Equipment List.....	10
4.3	Test Software List.....	10
4.4	Measurement Uncertainty.....	11
4.5	Description of Test Setup	11
4.6	Measurement Results Explanation Example.....	14
5	TEST ITEMS	15
5.1	Antenna Requirements	15
5.2	Output Power	16
5.3	Occupied Bandwidth.....	18
5.4	Conducted Spurious Emission.....	19
5.5	Band Edge (Authorized-band band-edge).....	21

5.6	Conducted Emission.....	23
5.7	Radiated Spurious Emission.....	24
5.8	Band Edge (Restricted-band band-edge).....	29
5.9	Power Spectral density (PSD)	30
ANNEX A	TEST RESULT	31
A.1	Output Power, E.I.R.P, Duty Cycle	31
A.2	Occupied Bandwidth.....	35
A.3	Conducted Spurious Emissions	40
A.4	Band Edge (Authorized-band band-edge).....	45
A.5	Conducted Emissions	48
A.6	Radiated Spurious Emission.....	54
A.7	Band Edge (Restricted-band band-edge).....	68
A.8	Power Spectral Density (PSD).....	70
ANNEX B	TEST SETUP PHOTOS	73
ANNEX C	EUT EXTERNAL PHOTOS.....	73
ANNEX D	EUT INTERNAL PHOTOS.....	73

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input checked="" type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	<input type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Libre Wireless Technologies, Inc.
Address	17835 Newhope Street, Ste A, Fountain Valley, CA 92708, US

2.2 Manufacturer Information

Manufacturer	Libre Wireless Technologies, Inc.
Address	17835 Newhope Street, Ste A, Fountain Valley, CA 92708, US

2.3 General Description for Equipment under Test (EUT)

EUT Name	High Performance Wireless Media Module
Model Name Under Test	LS8
Series Model Name	LS8-NFK-22G-S, LS8-NFK-24G-S, LS8-NFK-44G-S, LS8-NFK-22G-R, LS8-NFK-24G-R, LS8-NFK-44G-R, LS8-NFK-11G-R, LS8-NFK-12G-R, LS8-NFK-21G-R, LS8-NFK-42G-R
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in model name and memory, the R series WIFI only has one IPEX port. (this information provided by the applicant)
Serial Number	20240902LS8
Hardware Version	MP1.0
Software Version	8118
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

Antenna Information:

Antenna Manufacturer	Model	Antenna Type	Antenna Gain
AUDEN COMMUNICATIONS & MULTIMEDIA TECHNO (KUNSHAN) CO., LTD	LSANT-1C-180	PCB	3.5 dBi
Suzhou Point Positive Electronic Technology Co., Ltd	RC1WFI0886A	Rod	2.6651 dBi
AUDEN COMMUNICATIONS & MULTIMEDIA TECHNO (KUNSHAN) CO., LTD	AUK01966B-2.4&5.8G	FPC	3.0 dBi
Note: Antenna model AUK01966B-2.4&5.8G and RC1WFI0886A are alternative antennas, the max gain antenna is chosen for all test.			

2.4 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n and 802.11ac
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	DSS
Modulation Type	GFSK
Product Type	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Transfer Rate	1 Mbps, 2 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	40 (at intervals of 2 MHz) ^{Note 1}
Tested Channel	1 Mbps: 0 (2402 MHz), 19 (2440 MHz), 39 (2480 MHz) 2 Mbps: 1 (2404 MHz), 19 (2440 MHz), 38 (2478 MHz)
Antenna Type	PCB Antenna
Antenna Gain	3.5 dBi
Antenna Impedance	50Ω
Antenna System (MIMO Smart Antenna)	N/A
Note 1: 2 Mbps does not support Channel 0, Channel 12, and Channel 39.	

All channel was listed on the following table:

BLE 1M:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

BLE 2M:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
\	\	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	\	\	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	\	\

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
3	RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems(FHSs) and Licence-Exemp Local Area Network (LE-LAN) Devices
4	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
5	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Test Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-247, 5.4 (f)	N/A	--	Pass ^{Note1}
2	Output Power	15.247(b)	RSS-247, 5.4 (d)	Low/Middle/High	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247(a)	RSS-GEN, 6.7; RSS-247, 5.2 (a)	Low/Middle/High	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247(d)	RSS-247, 5.5;	Low/High	ANNEX A.4	Pass
6	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/High	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	Low/High	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	RSS-247, 5.2 (b)	Low/Middle/High	ANNEX A.8	Pass
10	Receiver Spurious Emissions	--	RSS-Gen, 7.4	--	N/A	N/A ^{Note2}

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	33% to 68%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+20.3°C to +26.9°C
Working Voltage of the EUT	NV (Normal Voltage)	5 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY50330200	2024.05.08	2025.05.07
Spectrum Analyzer	KEYSIGHT	N9020A	MY46471071	2024.07.04	2025.07.03
Spectrum Analyzer	KEYSIGHT	N9020A	MY50531259	2024.08.01	2025.07.31
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	02460	2024.05.16	2027.05.15
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2024.06.15	2027.06.14
Anechoic Chamber	RAINFORD	9m*6m*6m	140	2024.07.28	2027.07.27
Amplifier	COM-MV	LSCX_LNA1-12G-01	7210214	2024.08.01	2025.07.31
Amplifier	COM-MV	XKu_LNA7-18G-01	7210209	2024.08.01	2025.07.31
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2024.08.01	2025.07.31
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-01162	2023.08.04	2026.08.03
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2025.01.22
Amplifier	COM-MV	ZT30-1000M	B2018054558	2023.12.05	2024.12.04
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2024.07.13	2027.07.12
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2024.08.01	2025.07.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2024.05.09	2025.05.08
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2022.02.19	2025.02.18

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

$$\text{Conducted value (dBm)} = \text{Measurement value (dBm)} + \text{cable loss (dB)}$$

For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

$$\text{Conducted value (dBm)} = 10 \text{ dBm} + 0.5 \text{ dB} = 10.5 \text{ dBm}$$

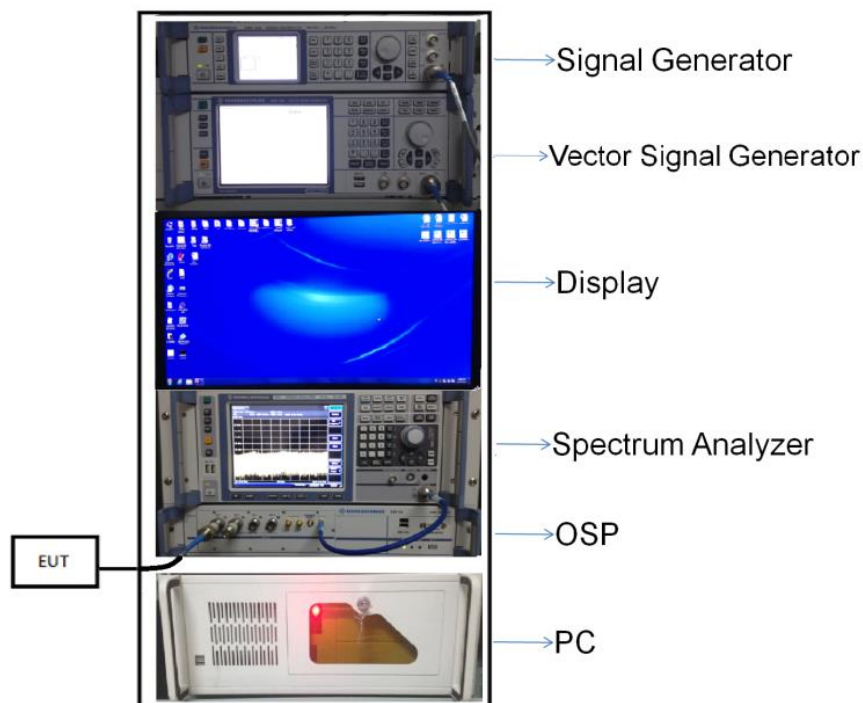


(Diagram 1)

4.5.2 For AC Power Supply Port Test




(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

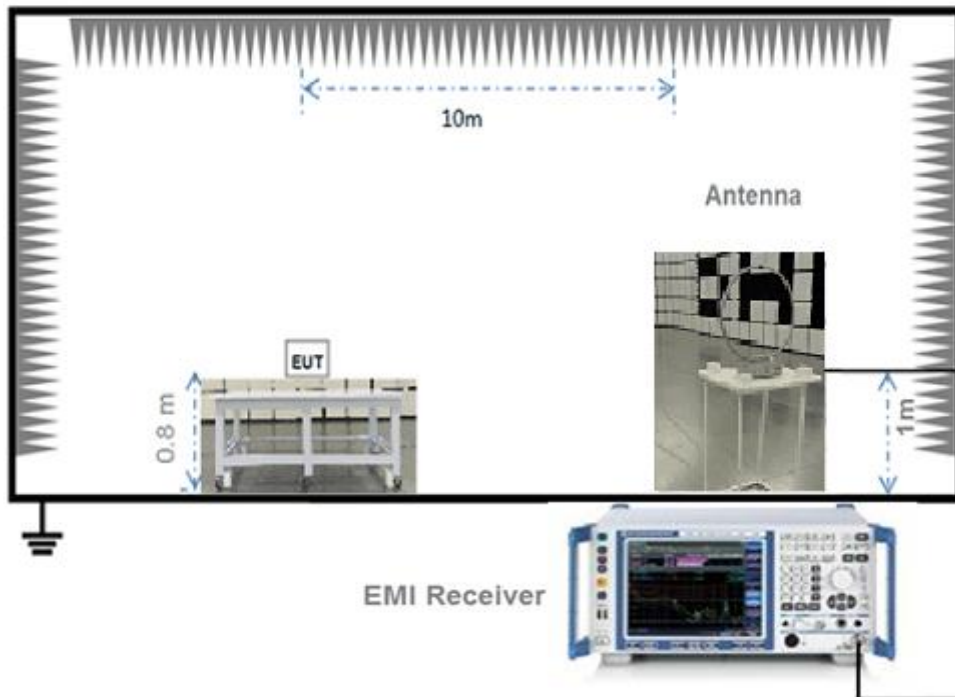


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

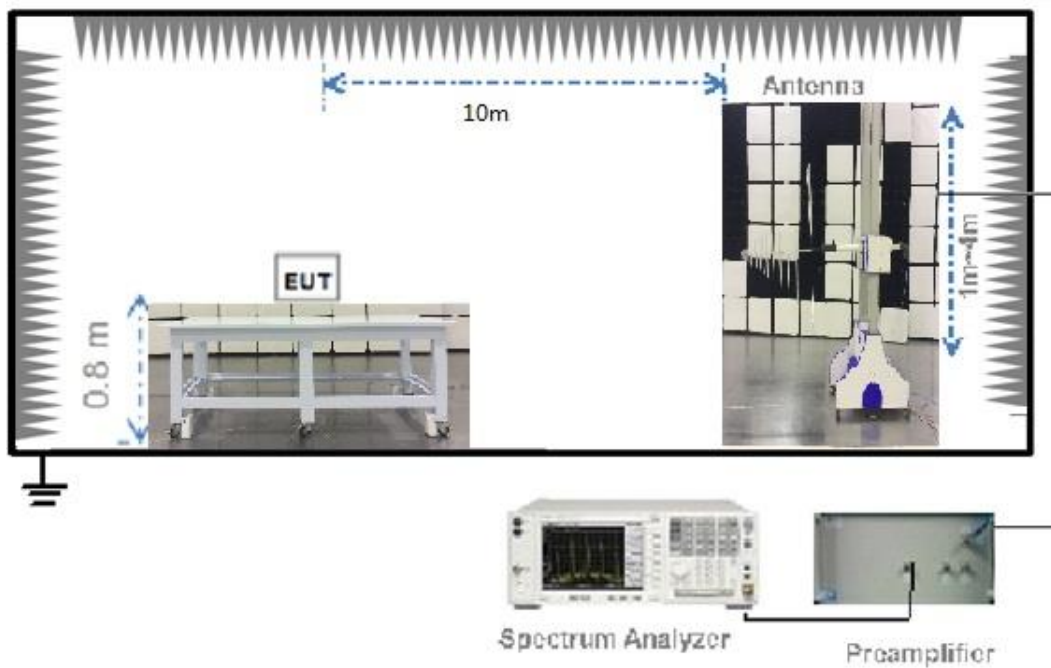

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

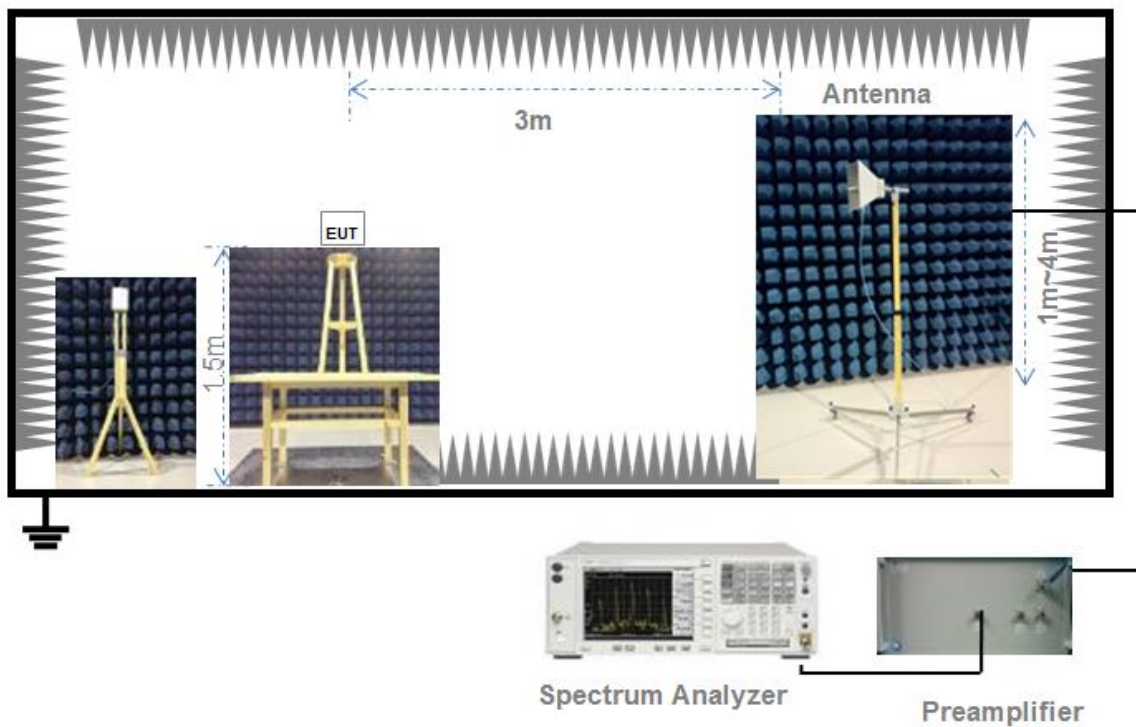

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

RSS-247, 5.4 (d)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.

5.2.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

a) Maximum peak conducted output power

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

Set the RBW \geq DTS bandwidth.

Set VBW \geq 3 x RBW.

Set span \geq 3 x RBW

Sweep time = auto couple.

Detector = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

EIRP= conducted RF output peak power +Antenna Gain.

b) Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a); RSS-247, 5.2 (a); RSS-GEN, 6.7

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement:

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dB $\mu\text{V}/\text{m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V}/\text{m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dB $\mu\text{V}/\text{m}$ @3m (AV) and 74dB $\mu\text{V}/\text{m}$ @3m (PK).

5.7.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements

for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands:

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure:

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.

- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction:

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:

- 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
- 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
- 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain:

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test:

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the

Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.10; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e); RSS-247, 5.2 (b)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

5.9.2 Test Setup

See section 4.5.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW ≥ 3 RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power, E.I.R.P, Duty Cycle

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK (BLE 1Mbps)		dBm	mW	
	dBm	mW			
Low Channel	6.96	4.97	30	1000	Pass
Middle Channel	6.95	4.95			Pass
High Channel	6.85	4.84			Pass

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK (BLE 2Mbps)		dBm	mW	
	dBm	mW			
Low Channel	6.39	4.36	30	1000	Pass
Middle Channel	6.39	4.36			Pass
High Channel	6.48	4.45			Pass

E.I.R.P Test Data (For ISED)

Channel	E.I.R.P		Limit		Verdict
	GFSK (BLE 1Mbps)		dBm	mW	
	dBm	mW			
Low Channel	10.46	11.12	36	4000	Pass
Middle Channel	10.45	11.09			Pass
High Channel	10.35	10.84			Pass

Channel	E.I.R.P		Limit		Verdict
	GFSK (BLE 2Mbps)		dBm	mW	
	dBm	mW			
Low Channel	9.89	9.75	36	4000	Pass
Middle Channel	9.89	9.75			Pass
High Channel	9.98	9.95			Pass

Test Plots

GFSK (BLE 1Mbps) LOW CHANNEL



GFSK (BLE 1Mbps) MIDDLE CHANNEL





GFSK (BLE 1Mbps) HIGH CHANNEL




GFSK (BLE 2Mbps) LOW CHANNEL

GFSK (BLE 2Mbps) MIDDLE CHANNEL

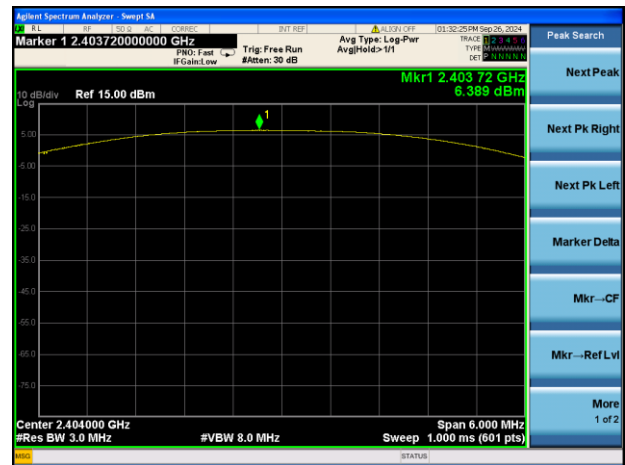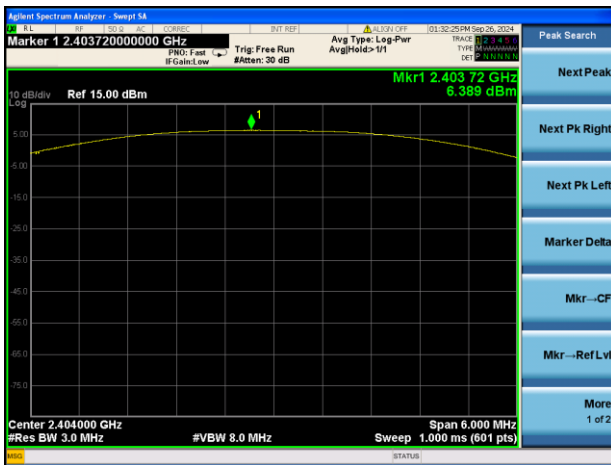

GFSK (BLE 2Mbps) HIGH CHANNEL

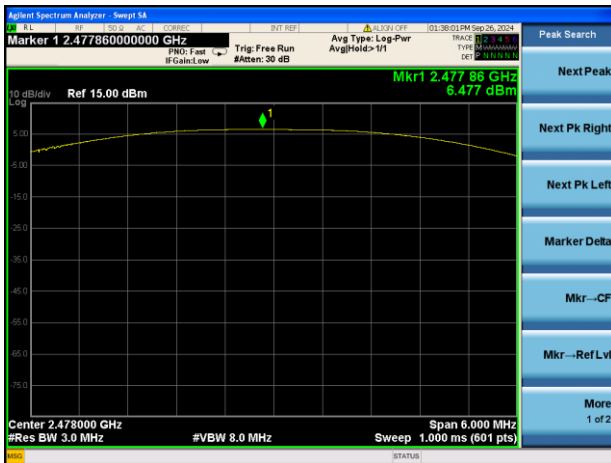


Duty Cycle Test Data


Band	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)
GFSK (BLE 1Mbps)	0.4011	1.254	31.99%
GFSK (BLE 2Mbps)	0.2048	1.246	16.44%

Test Plots

GFSK (BLE 1Mbps)

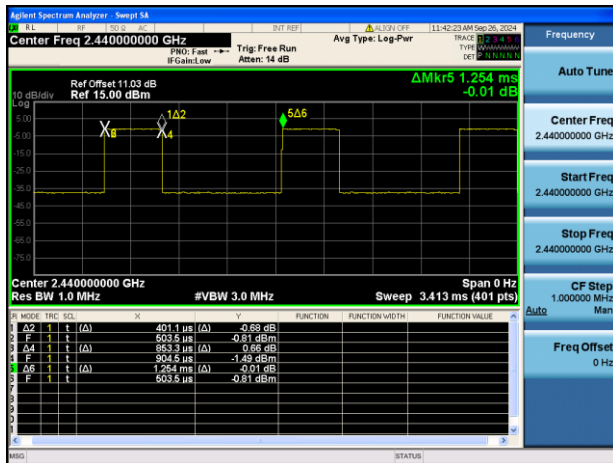

GFSK (BLE 2Mbps)

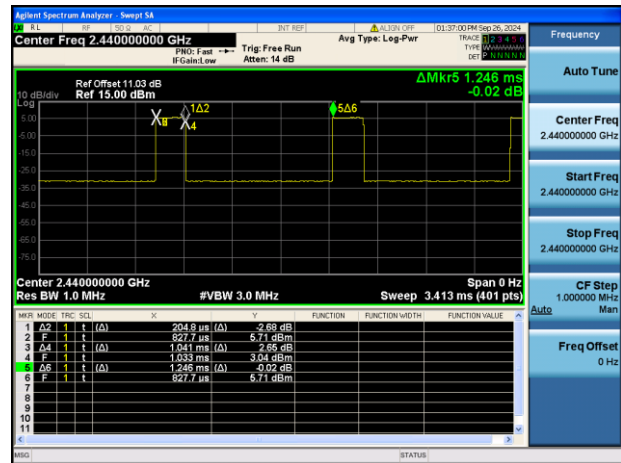

A.2 Occupied Bandwidth

Test Data


Test Mode	GFSK (BLE 1Mbps)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	682.400	1053.100	≥500
Middle Channel	675.000	1075.400	≥500
High Channel	682.400	1068.000	≥500

Test Mode	GFSK (BLE 2Mbps)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	1140.000	2122.900	≥500
Middle Channel	1140.000	2113.300	≥500
High Channel	1155.000	2136.200	≥500

Test Plots

6 dB Bandwidth

GFSK (BLE 1Mbps) LOW CHANNEL

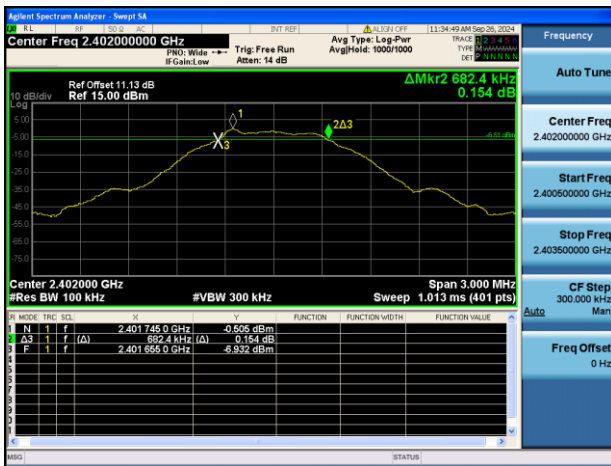

GFSK (BLE 1Mbps) MIDDLE CHANNEL



GFSK (BLE 1Mbps) HIGH CHANNEL



GFSK (BLE 2Mbps) LOW CHANNEL

GFSK (BLE 2Mbps) MIDDLE CHANNEL



GFSK (BLE 2Mbps) HIGH CHANNEL



99% Bandwidth

GFSK (BLE 1Mbps) LOW CHANNEL




GFSK (BLE 1Mbps) MIDDLE CHANNEL




GFSK (BLE 1Mbps) HIGH CHANNEL




GFSK (BLE 2Mbps) LOW CHANNEL

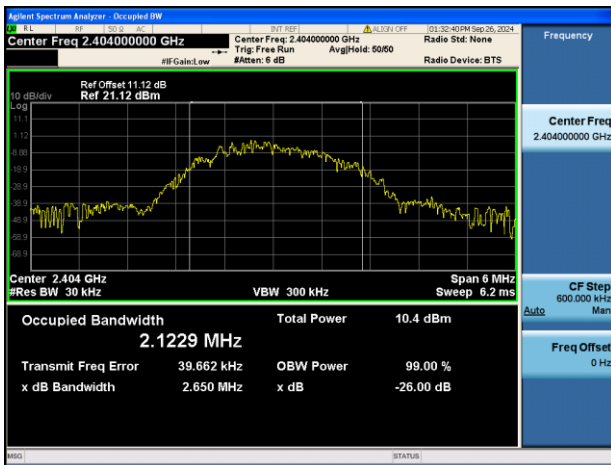

GFSK (BLE 2Mbps) MIDDLE CHANNEL

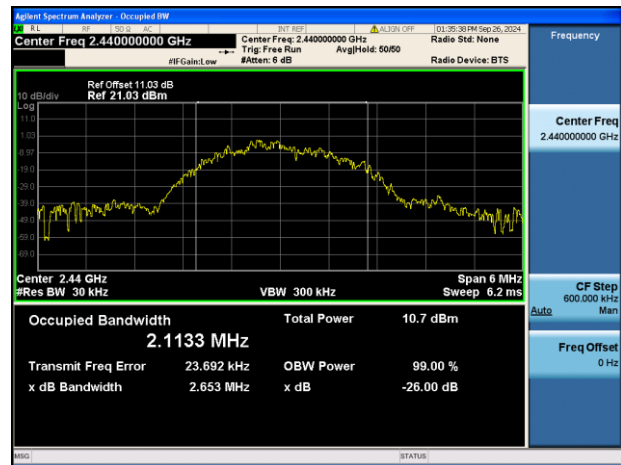

GFSK (BLE 2Mbps) HIGH CHANNEL

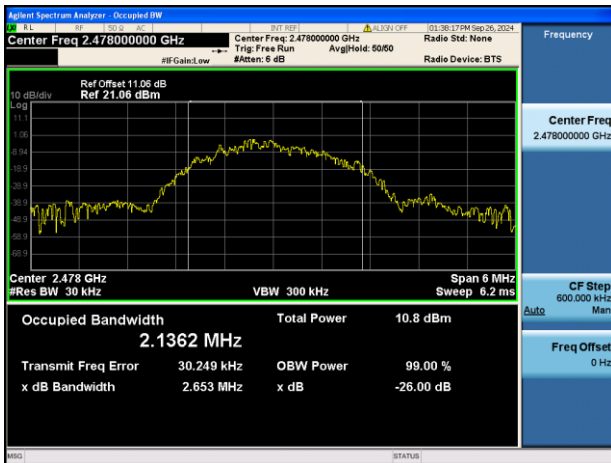

A.3 Conducted Spurious Emissions

Test Data

GFSK (BLE 1Mbps)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-38.36	6.06	-13.95	Pass
Middle Channel	-34.08	6.53	-13.47	Pass
High Channel	-37.14	6.45	-13.55	Pass


GFSK (BLE 2Mbps)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-37.35	5.42	-14.58	Pass
Middle Channel	-35.65	5.22	-14.79	Pass
High Channel	-35.72	5.57	-14.43	Pass

Test Plots


GFSK (BLE 1Mbps) LOW CHANNEL, CARRIER LEVEL



GFSK (BLE 1Mbps) LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

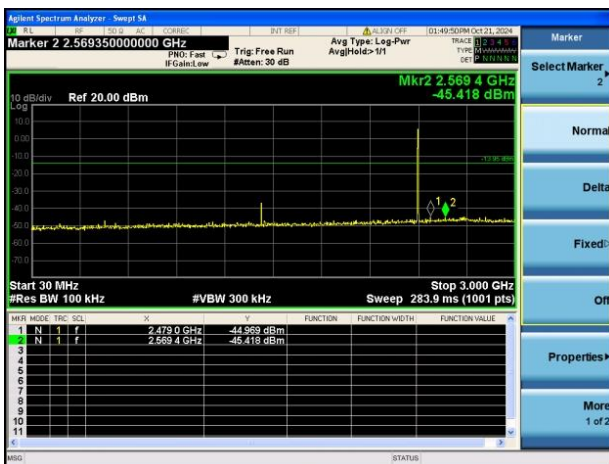


GFSK (BLE 1Mbps) LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

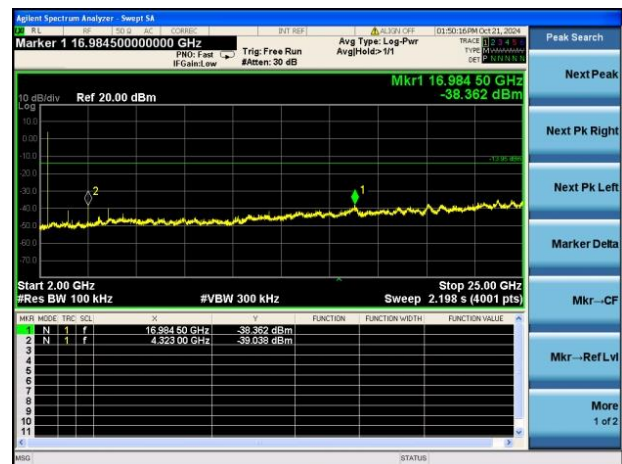


GFSK (BLE 1Mbps) MIDDLE CHANNEL, CARRIER LEVEL



GFSK (BLE 1Mbps) MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

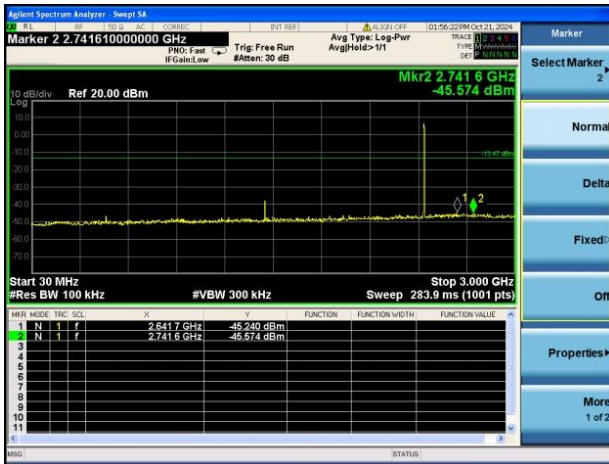


GFSK (BLE 1Mbps) MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

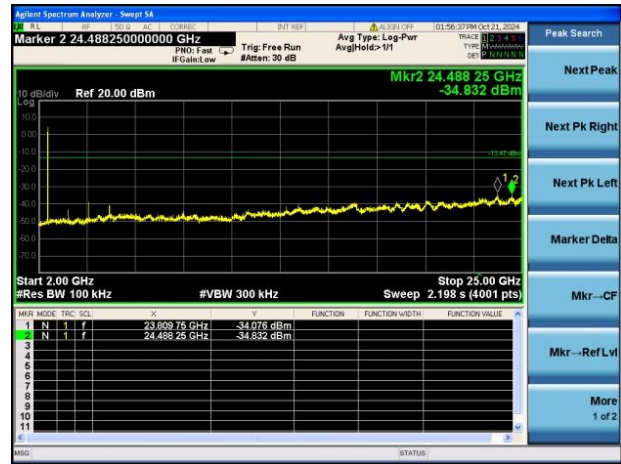


GFSK (BLE 1Mbps) HIGH CHANNEL, CARRIER LEVEL




GFSK (BLE 1Mbps) HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

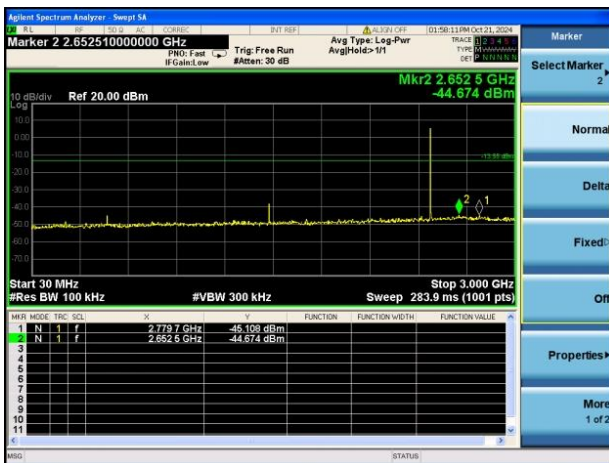


GFSK (BLE 1Mbps) HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

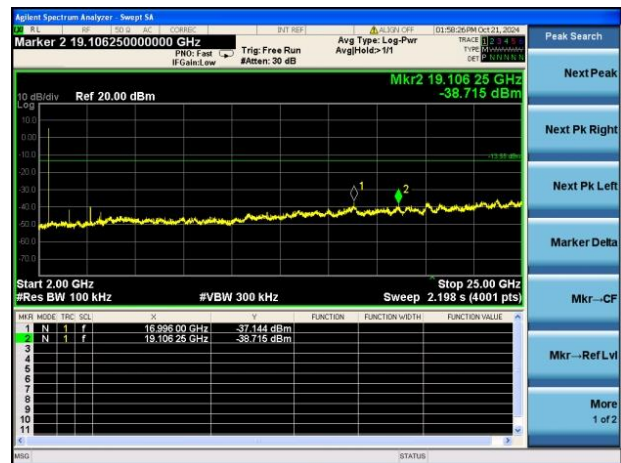


GFSK (BLE 2Mbps) LOW CHANNEL, CARRIER LEVEL

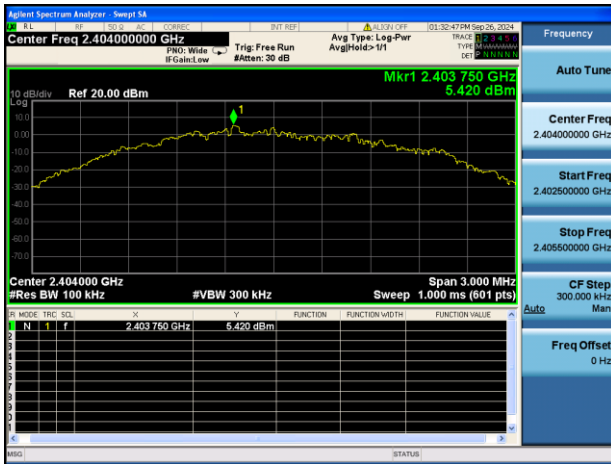


GFSK (BLE 2Mbps) LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

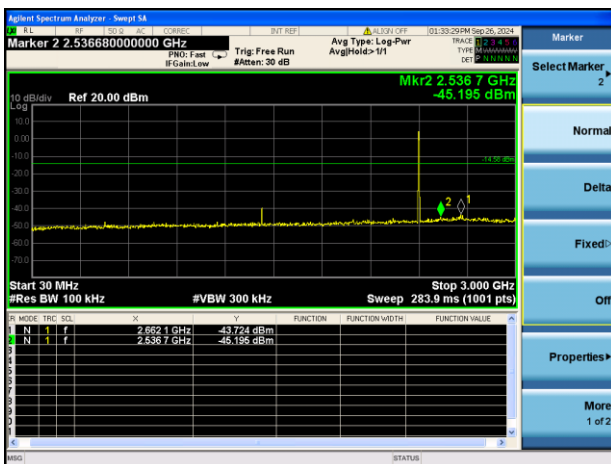


GFSK (BLE 2Mbps) LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

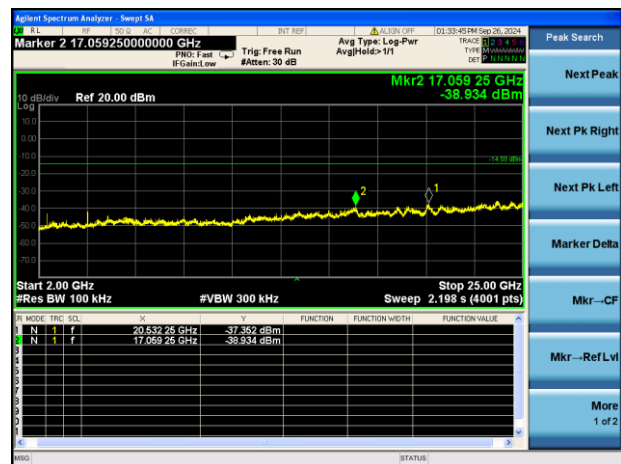


GFSK (BLE 2Mbps) MIDDLE CHANNEL, CARRIER LEVEL

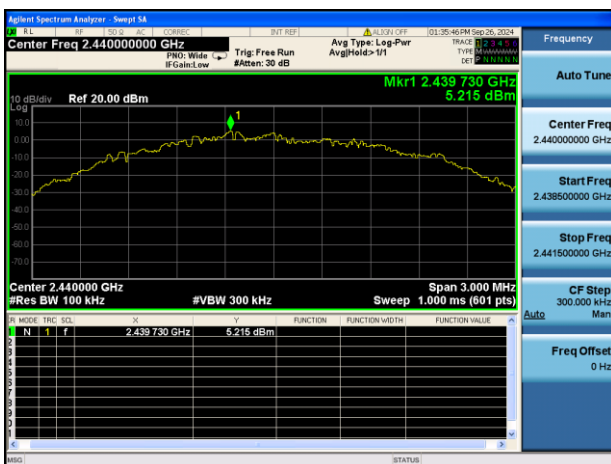


GFSK (BLE 2Mbps) MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

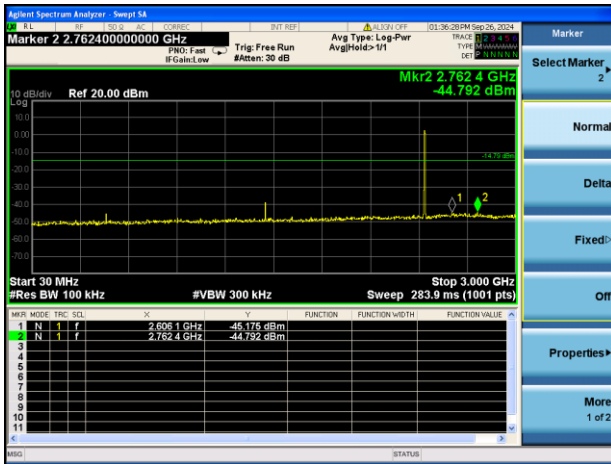


GFSK (BLE 2Mbps) MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

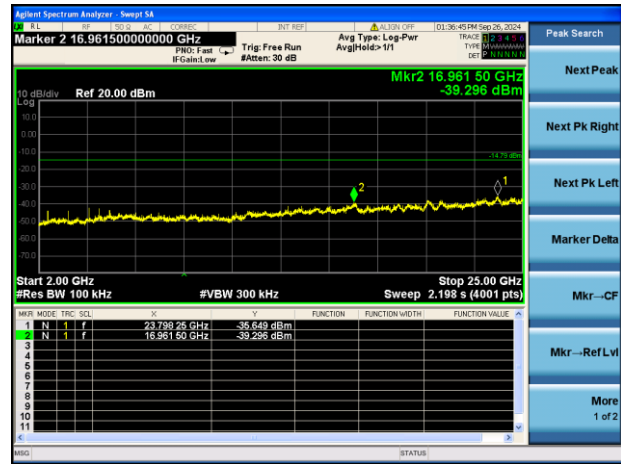


GFSK (BLE 2Mbps) HIGH CHANNEL, CARRIER LEVEL

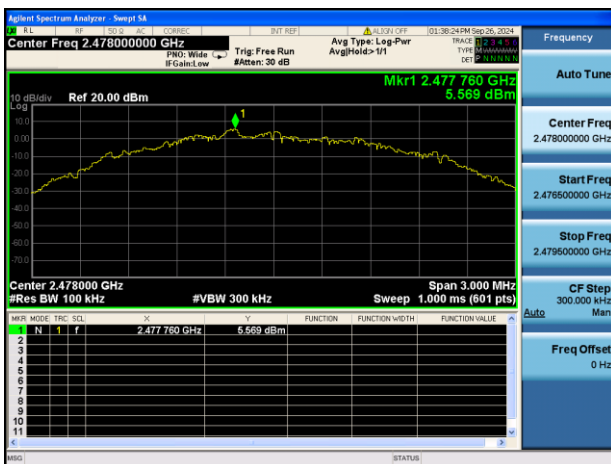

GFSK (BLE 2Mbps) HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

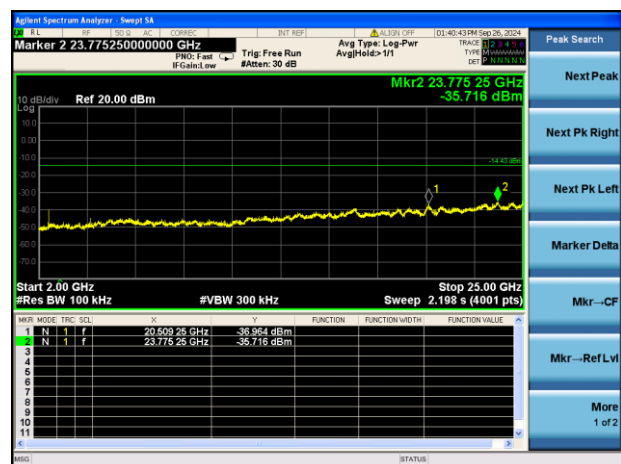

GFSK (BLE 2Mbps) HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

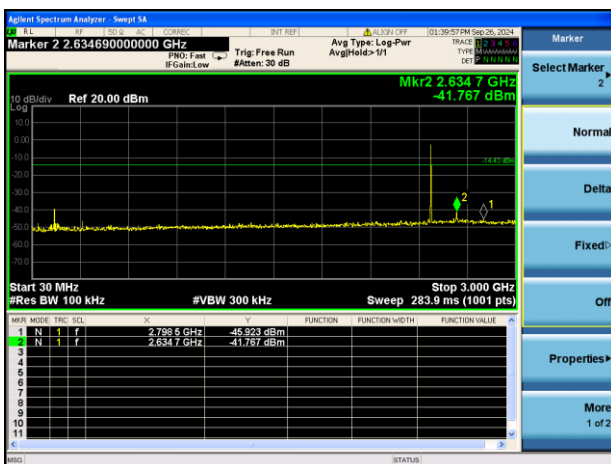

A.4 Band Edge (Authorized-band band-edge)

Note: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Test Data

GFSK (BLE 1Mbps)				
Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-47.14	6.06	-13.95	Pass
High Channel	-49.19	6.45	-13.55	Pass


GFSK (BLE 2Mbps)				
Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-35.62	5.42	-14.58	Pass
High Channel	-45.25	5.57	-14.43	Pass

Test Plots

GFSK (BLE 1Mbps) LOW CHANNEL, CARRIER LEVEL



GFSK (BLE 1Mbps) LOW CHANNEL, BAND EDGE

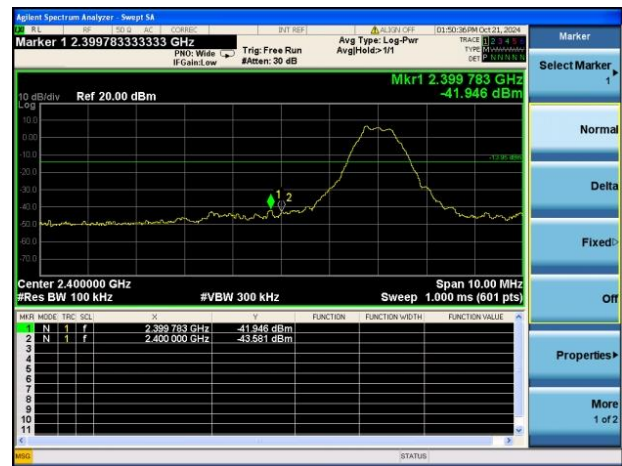

GFSK (BLE 1Mbps) HIGH CHANNEL, CARRIER LEVEL



GFSK (BLE 1Mbps) HIGH CHANNEL, BAND EDGE




GFSK (BLE 2Mbps) LOW CHANNEL, CARRIER LEVEL




GFSK (BLE 2Mbps) LOW CHANNEL, BAND EDGE



GFSK (BLE 2Mbps) HIGH CHANNEL, CARRIER LEVEL

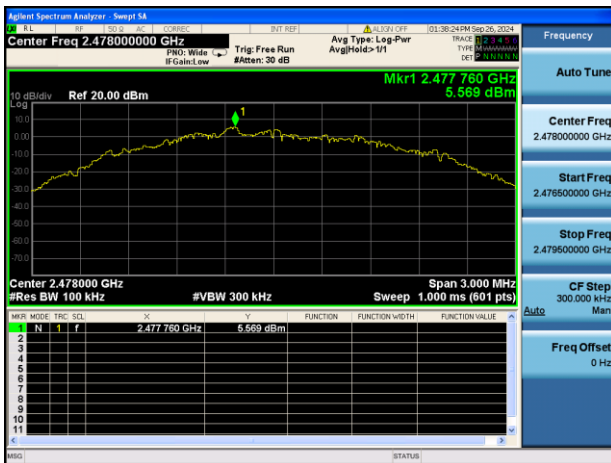

GFSK (BLE 2Mbps) HIGH CHANNEL, BAND EDGE

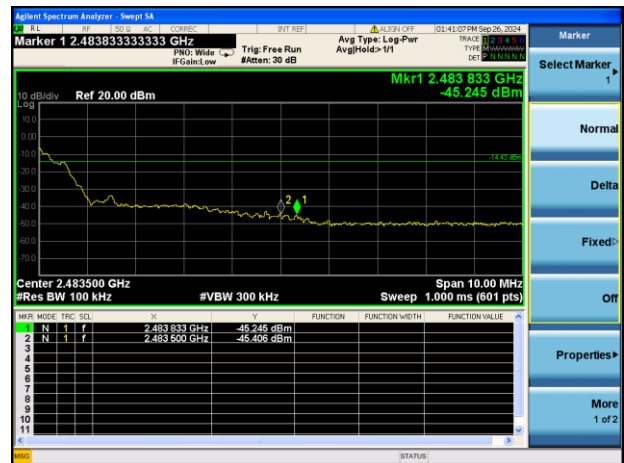

A.5 Conducted Emissions

Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 50 Hz) shown here.


Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PCB Antenna

PHASE L


CE Test case_FCC_CE_FCC PART 15C

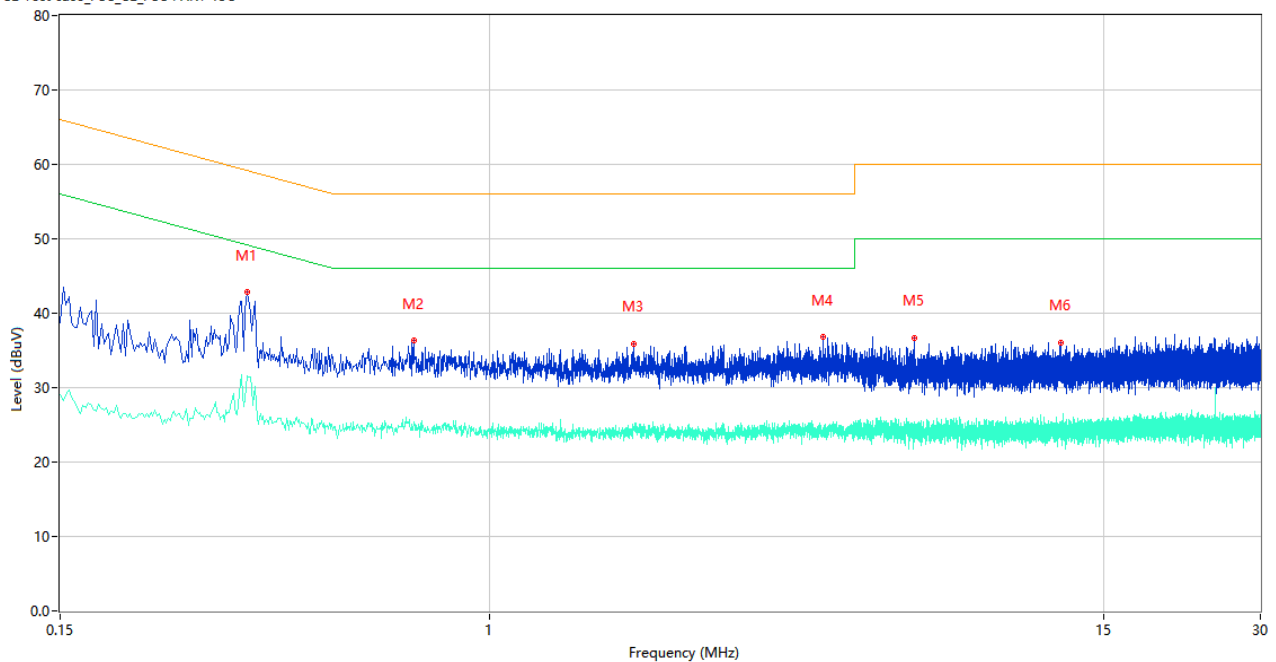

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.342	42.84	10.60	59.15	16.31	Peak	L	Pass
1**	0.342	31.51	10.60	49.15	17.64	AV	L	Pass
2	0.714	36.33	10.52	56.00	19.67	Peak	L	Pass
2**	0.714	25.43	10.52	46.00	20.57	AV	L	Pass
3	1.884	35.89	10.57	56.00	20.11	Peak	L	Pass
3**	1.884	24.32	10.57	46.00	21.68	AV	L	Pass
4	4.358	36.76	10.10	56.00	19.24	Peak	L	Pass
4**	4.358	24.49	10.10	46.00	21.51	AV	L	Pass
5	6.512	36.68	10.17	60.00	23.32	Peak	L	Pass
5**	6.512	23.95	10.17	50.00	26.05	AV	L	Pass
6	12.412	36.05	10.66	60.00	23.95	Peak	L	Pass
6**	12.412	23.81	10.66	50.00	26.19	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

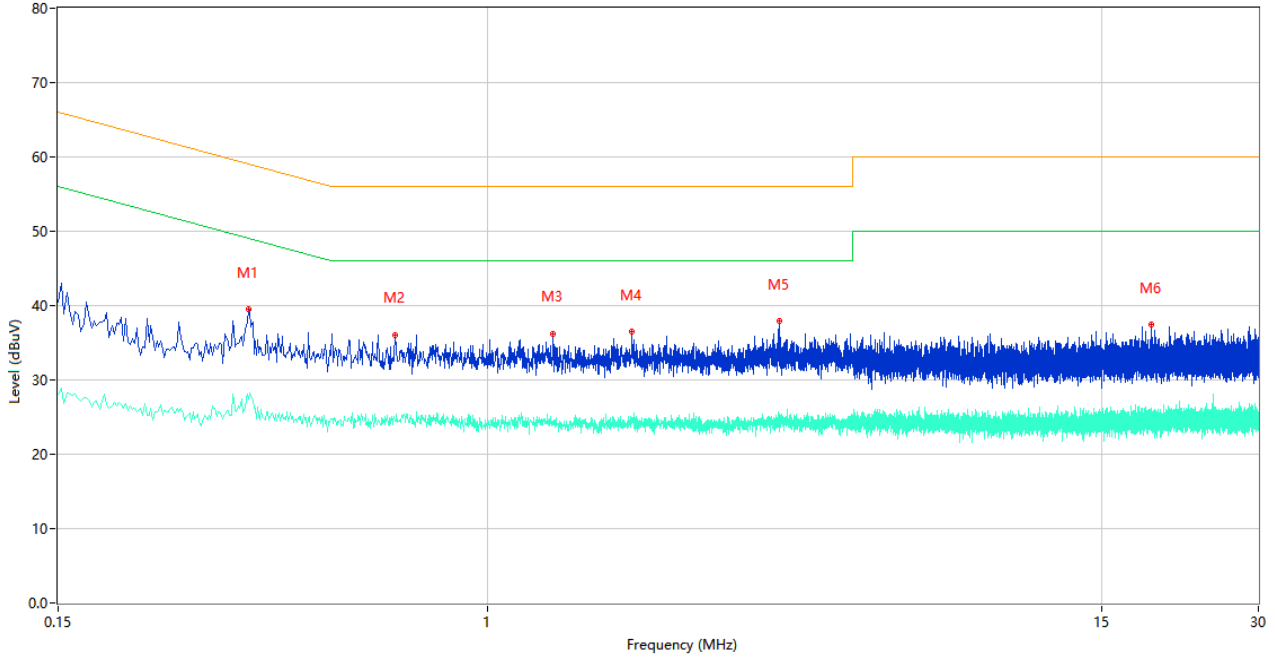


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.348	39.46	10.72	59.01	19.55	Peak	N	Pass
1**	0.348	27.48	10.72	49.01	21.53	AV	N	Pass
2	0.664	36.06	10.34	56.00	19.94	Peak	N	Pass
2**	0.664	24.47	10.34	46.00	21.53	AV	N	Pass
3	1.334	36.26	10.16	56.00	19.74	Peak	N	Pass
3**	1.334	24.48	10.16	46.00	21.52	AV	N	Pass
4	1.890	36.48	10.65	56.00	19.52	Peak	N	Pass
4**	1.890	24.87	10.65	46.00	21.13	AV	N	Pass
5	3.614	37.88	10.38	56.00	18.12	Peak	N	Pass
5**	3.614	25.19	10.38	46.00	20.81	AV	N	Pass
6	18.744	37.45	10.95	60.00	22.55	Peak	N	Pass
6**	18.744	25.02	10.95	50.00	24.98	AV	N	Pass

Rod Antenna

PHASE L


CE Test case_FCC_CE_FCC PART 15C

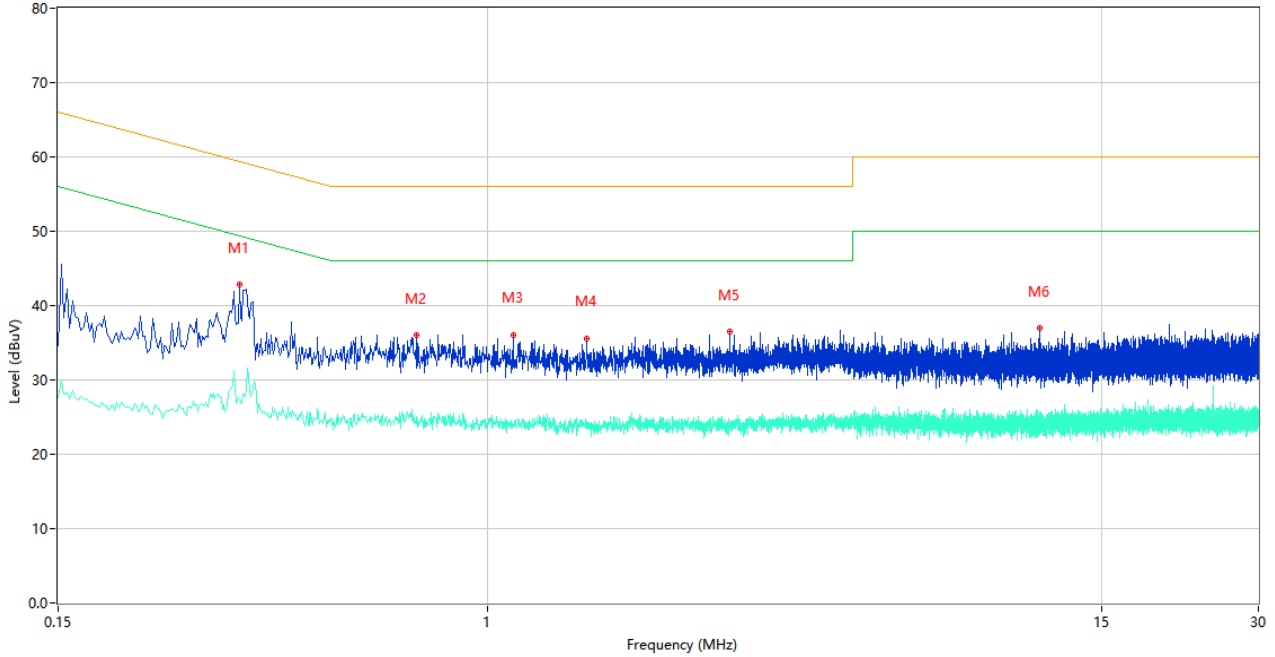

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.334	42.81	10.44	59.35	16.54	Peak	L	Pass
1**	0.334	27.31	10.44	49.35	22.04	AV	L	Pass
2	0.730	35.96	10.36	56.00	20.04	Peak	L	Pass
2**	0.730	25.10	10.36	46.00	20.90	AV	L	Pass
3	1.118	36.07	10.15	56.00	19.93	Peak	L	Pass
3**	1.118	23.79	10.15	46.00	22.21	AV	L	Pass
4	1.548	35.56	10.16	56.00	20.44	Peak	L	Pass
4**	1.548	24.03	10.16	46.00	21.97	AV	L	Pass
5	2.914	36.48	10.05	56.00	19.52	Peak	L	Pass
5**	2.914	23.81	10.05	46.00	22.19	AV	L	Pass
6	11.406	36.92	10.66	60.00	23.08	Peak	L	Pass
6**	11.406	22.75	10.66	50.00	27.25	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

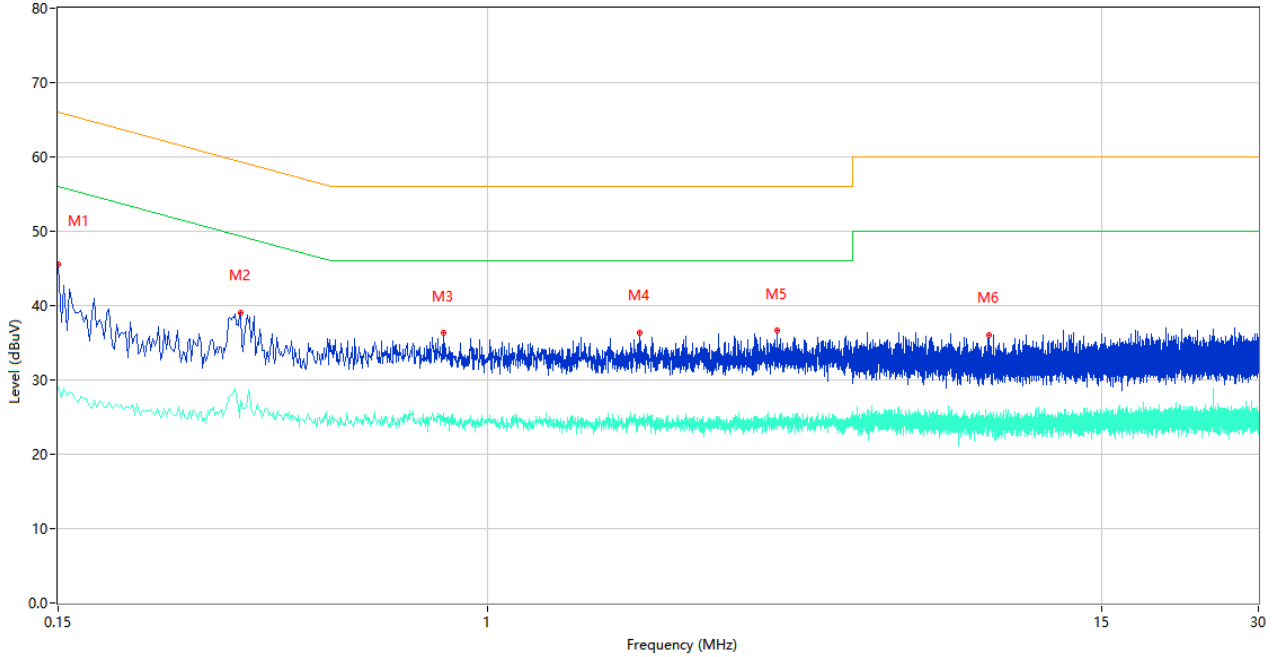


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.150	45.56	9.78	66.00	20.44	Peak	N	Pass
1**	0.150	28.97	9.78	56.00	27.03	AV	N	Pass
2	0.336	39.05	10.48	59.30	20.25	Peak	N	Pass
2**	0.336	27.26	10.48	49.30	22.04	AV	N	Pass
3	0.822	36.28	10.57	56.00	19.72	Peak	N	Pass
3**	0.822	25.54	10.57	46.00	20.46	AV	N	Pass
4	1.950	36.38	10.17	56.00	19.62	Peak	N	Pass
4**	1.950	25.06	10.17	46.00	20.94	AV	N	Pass
5	3.592	36.63	10.35	56.00	19.37	Peak	N	Pass
5**	3.592	24.23	10.35	46.00	21.77	AV	N	Pass
6	9.148	36.06	10.45	60.00	23.94	Peak	N	Pass
6**	9.148	23.69	10.45	50.00	26.31	AV	N	Pass

FPC Antenna

PHASE L


CE Test case_FCC_CE_FCC PART 15C

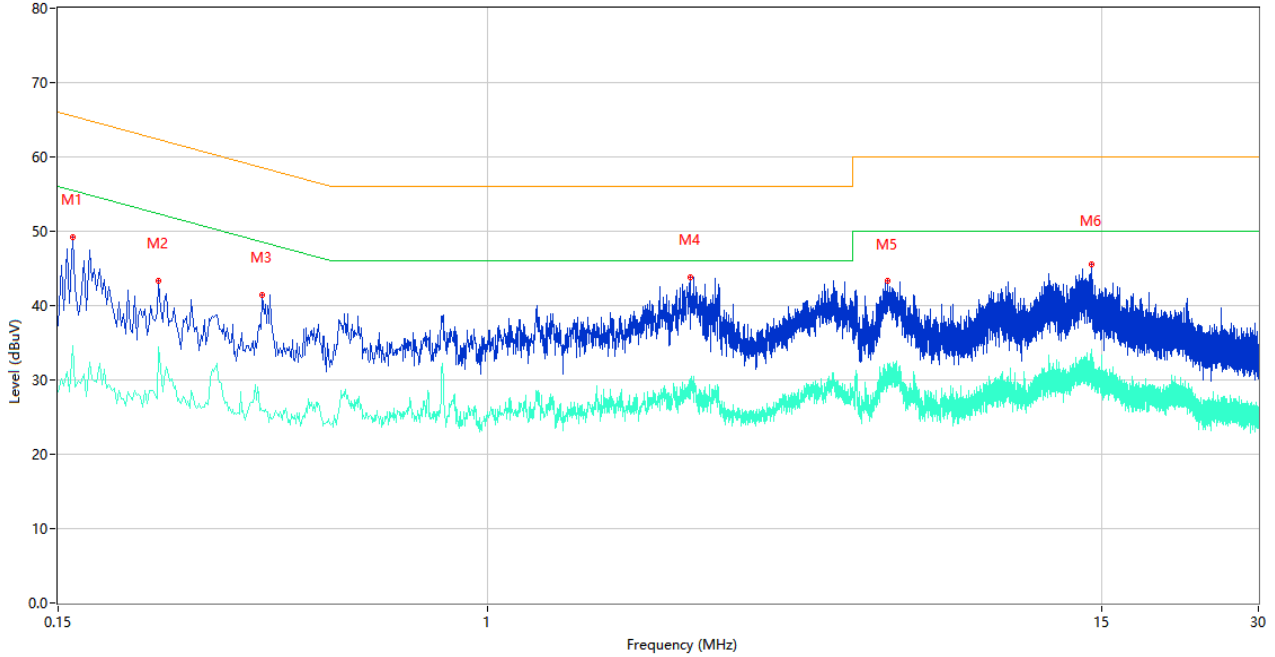

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.160	49.27	9.78	65.46	16.19	Peak	L	Pass
1**	0.160	34.66	9.78	55.46	20.80	AV	L	Pass
2	0.234	43.37	9.77	62.31	18.94	Peak	L	Pass
2**	0.234	34.49	9.77	52.31	17.82	AV	L	Pass
3	0.370	41.43	10.68	58.50	17.07	Peak	L	Pass
3**	0.370	25.88	10.68	48.50	22.62	AV	L	Pass
4	2.444	43.83	10.19	56.00	12.17	Peak	L	Pass
4**	2.444	30.11	10.19	46.00	15.89	AV	L	Pass
5	5.834	43.29	10.18	60.00	16.71	Peak	L	Pass
5**	5.834	30.74	10.18	50.00	19.26	AV	L	Pass
6	14.338	45.58	10.78	60.00	14.42	Peak	L	Pass
6**	14.338	31.36	10.78	50.00	18.64	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

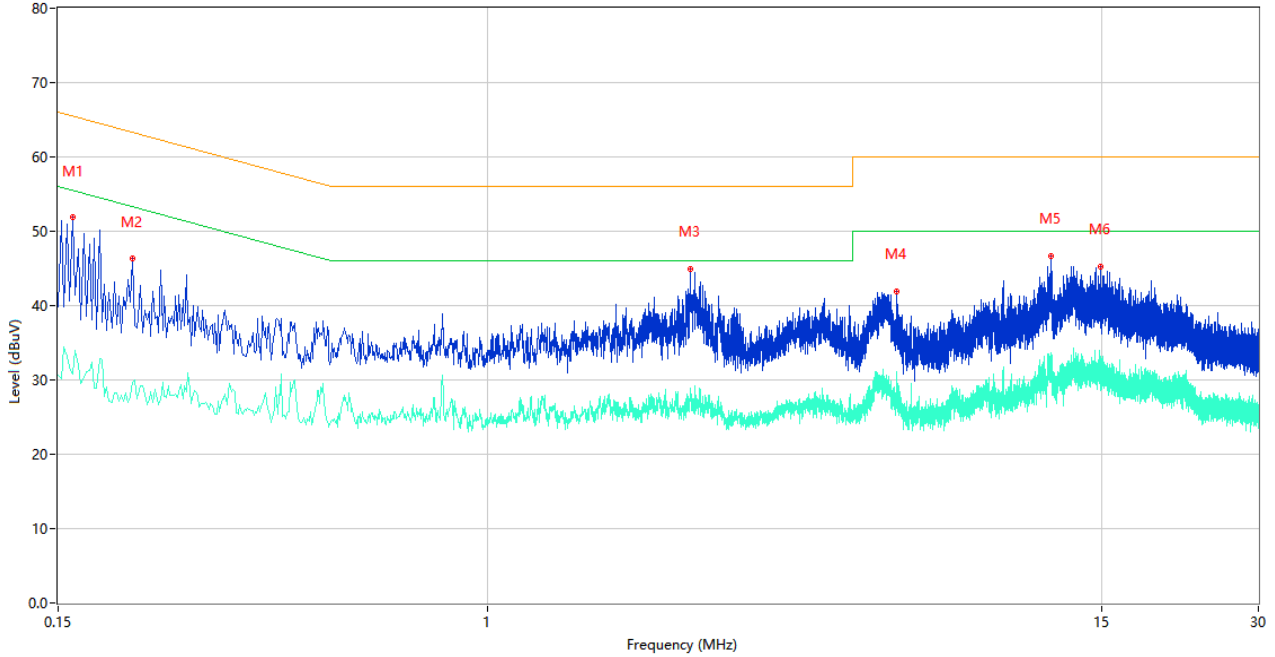

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.160	51.83	9.78	65.46	13.63	Peak	N	Pass
1**	0.160	30.74	9.78	55.46	24.72	AV	N	Pass
2	0.208	46.32	9.77	63.28	16.96	Peak	N	Pass
2**	0.208	29.70	9.77	53.28	23.58	AV	N	Pass
3	2.446	44.98	10.19	56.00	11.02	Peak	N	Pass
3**	2.446	28.92	10.19	46.00	17.08	AV	N	Pass
4	6.078	41.92	10.25	60.00	18.08	Peak	N	Pass
4**	6.078	29.46	10.25	50.00	20.54	AV	N	Pass
5	11.986	46.65	10.45	60.00	13.35	Peak	N	Pass
5**	11.986	33.72	10.45	50.00	16.28	AV	N	Pass
6	14.940	45.30	10.90	60.00	14.70	Peak	N	Pass
6**	14.940	32.57	10.90	50.00	17.43	AV	N	Pass

A.6 Radiated Spurious Emission

Note ¹: The symbol of "--" in the table which means not application.

Note ²: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note ⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and BLE 2M-High channel mode is the worst.

Note ⁵: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

Test Data and Plots

PCB Antenna


30 MHz to 1 GHz, ANT H

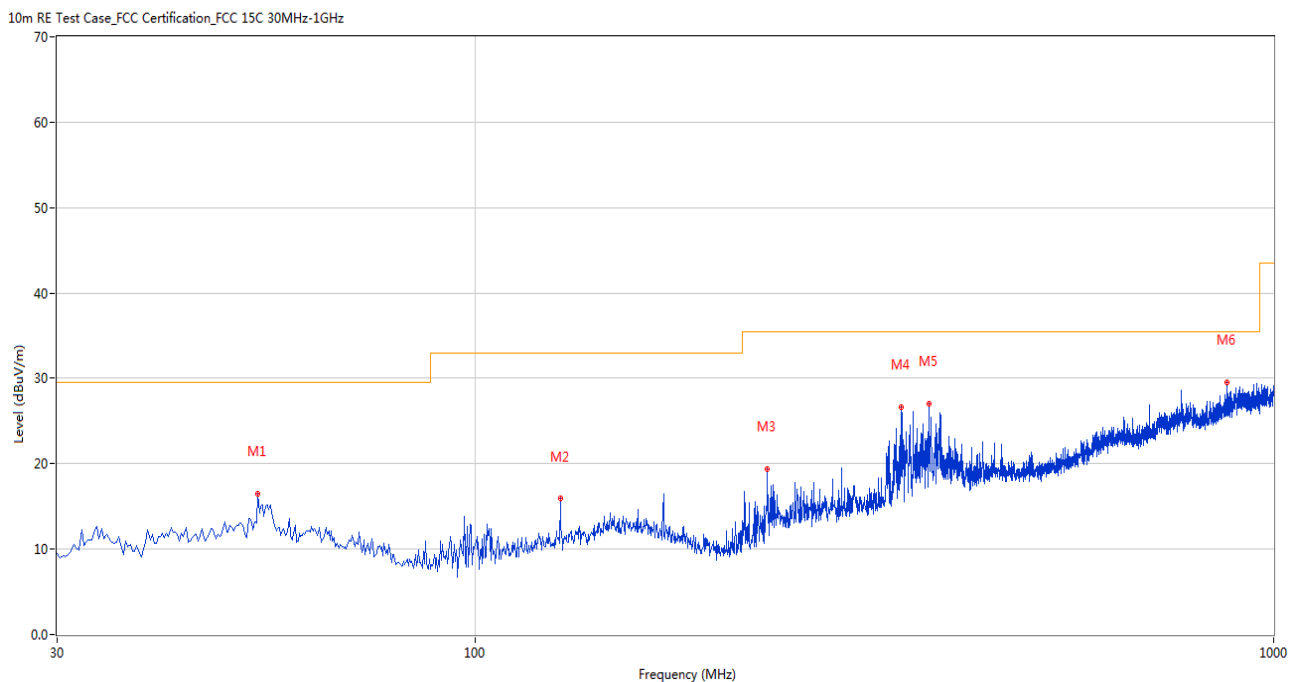

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	53.517	16.45	-26.07	29.5	13.05	Peak	0.00	200	Horizontal	Pass
2	127.946	15.97	-27.27	33.0	17.03	Peak	220.00	100	Horizontal	Pass
3	232.437	19.34	-28.04	35.5	16.16	Peak	97.00	200	Horizontal	Pass
4	342.262	26.61	-23.82	35.5	8.89	Peak	165.00	200	Horizontal	Pass
5	370.142	27.02	-23.02	35.5	8.48	Peak	264.00	200	Horizontal	Pass
6	874.659	29.56	-11.18	35.5	5.94	Peak	167.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

10m RE Test Case_FCC Certification_FCC 15C 30MHz-1GHz

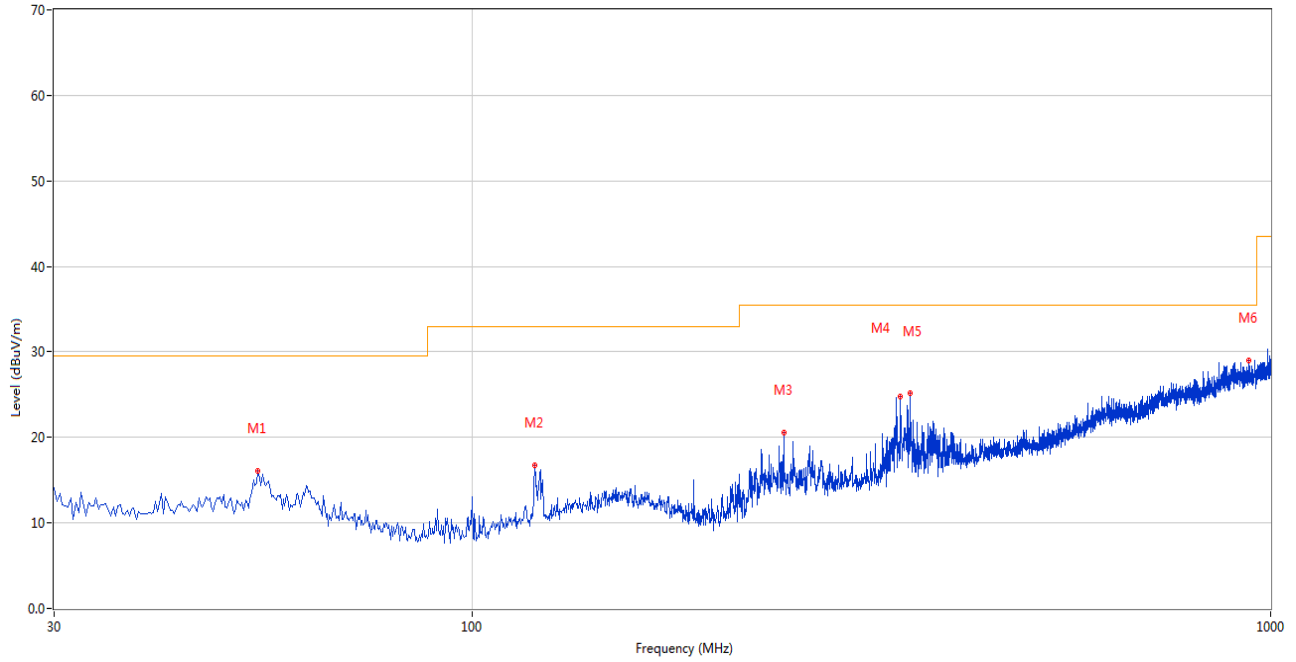


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	54.002	16.05	-26.08	29.5	13.45	Peak	270.00	200	Vertical	Pass
2	119.945	16.76	-28.11	33.0	16.24	Peak	96.00	100	Vertical	Pass
3	245.771	20.63	-27.03	35.5	14.87	Peak	0.00	200	Vertical	Pass
4	344.201	24.83	-23.71	35.5	10.67	Peak	358.00	100	Vertical	Pass
5	353.657	25.15	-23.76	35.5	10.35	Peak	276.00	100	Vertical	Pass
6	939.633	29.05	-10.53	35.5	6.45	Peak	0.00	200	Vertical	Pass

Rod Antenna

30 MHz to 1 GHz, ANT H


10m RE Test Case_FCC Certification_FCC 15C 30MHz-1GHz

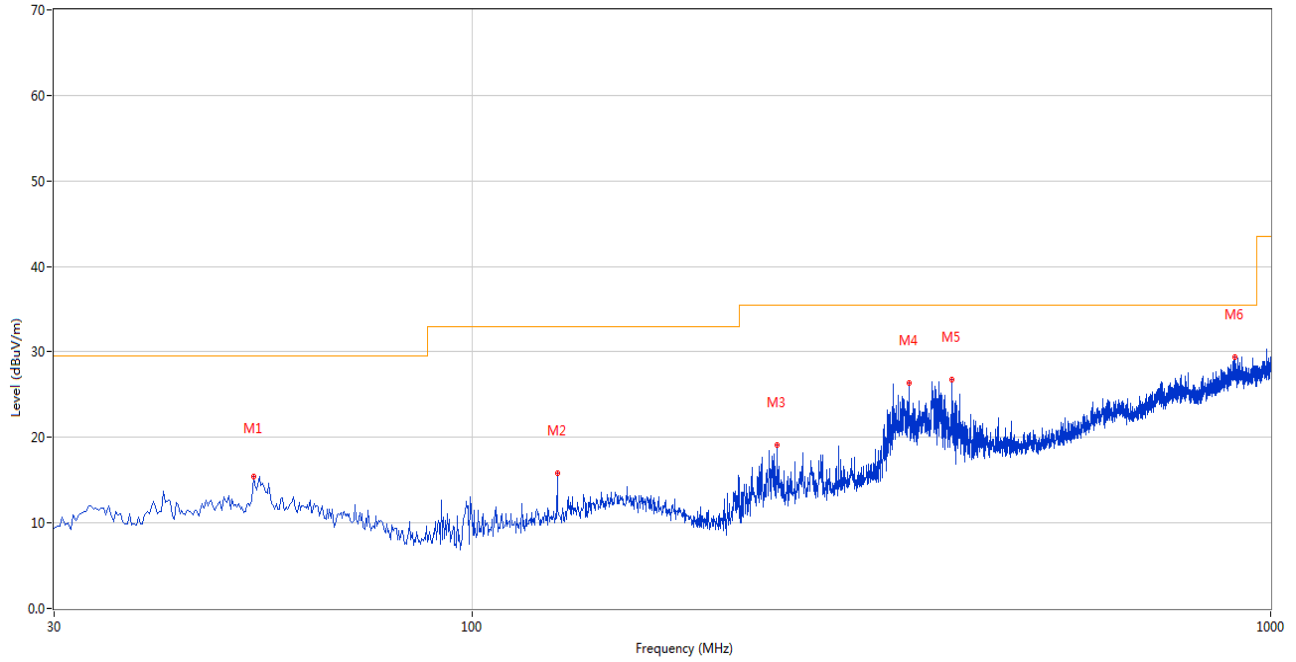

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	53.274	15.38	-26.06	29.5	14.12	Peak	90.00	100	Horizontal	Pass
2	127.946	15.82	-27.27	33.0	17.18	Peak	301.00	200	Horizontal	Pass
3	241.407	19.13	-27.00	35.5	16.37	Peak	127.00	200	Horizontal	Pass
4	352.687	26.32	-23.83	35.5	9.18	Peak	152.00	200	Horizontal	Pass
5	399.478	26.78	-22.38	35.5	8.72	Peak	0.00	200	Horizontal	Pass
6	902.054	29.37	-10.58	35.5	6.13	Peak	167.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

10m RE Test Case_FCC Certification_FCC 15C 30MHz-1GHz

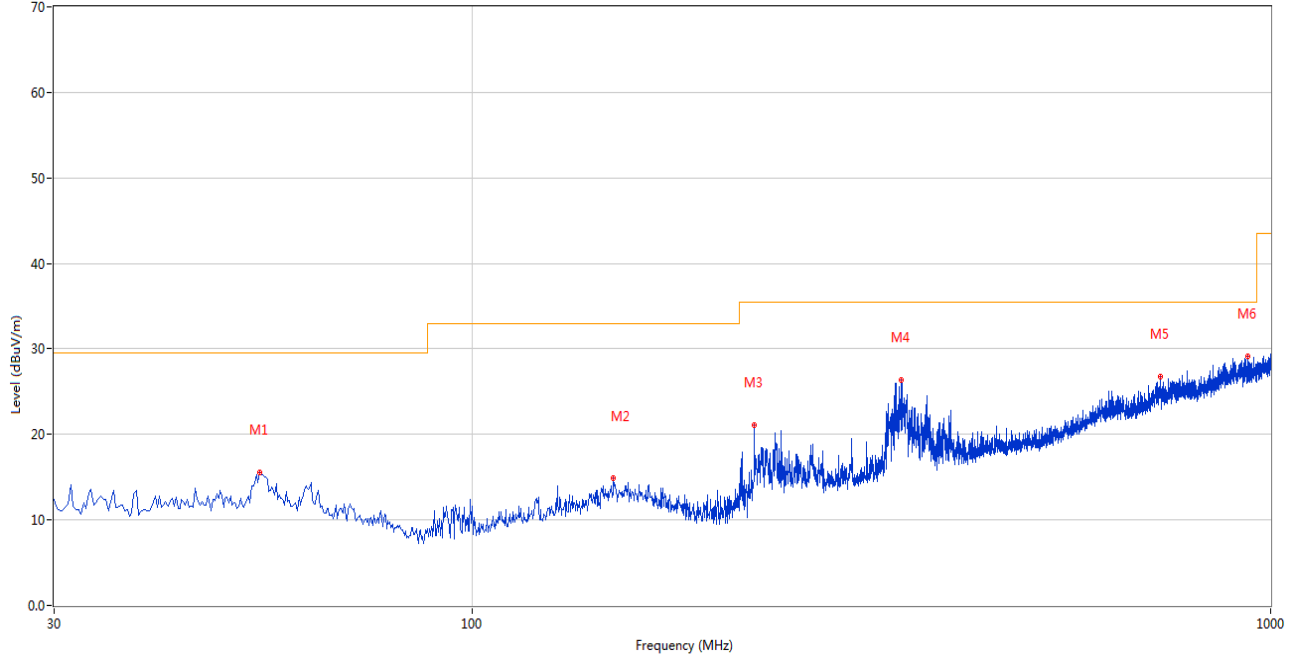


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	54.244	15.50	-26.09	29.5	14.00	Peak	114.00	100	Vertical	Pass
2	150.492	14.85	-25.60	33.0	18.15	Peak	151.00	100	Vertical	Pass
3	225.649	21.13	-28.77	35.5	14.37	Peak	360.00	100	Vertical	Pass
4	345.171	26.42	-23.76	35.5	9.08	Peak	1.00	100	Vertical	Pass
5	727.013	26.71	-13.67	35.5	8.79	Peak	260.00	100	Vertical	Pass
6	936.966	29.13	-10.54	35.5	6.37	Peak	248.00	200	Vertical	Pass

FPC Antenna

30 MHz to 1 GHz, ANT H


10m RE Test Case_FCC Certification_FCC 15C 30MHz-1GHz

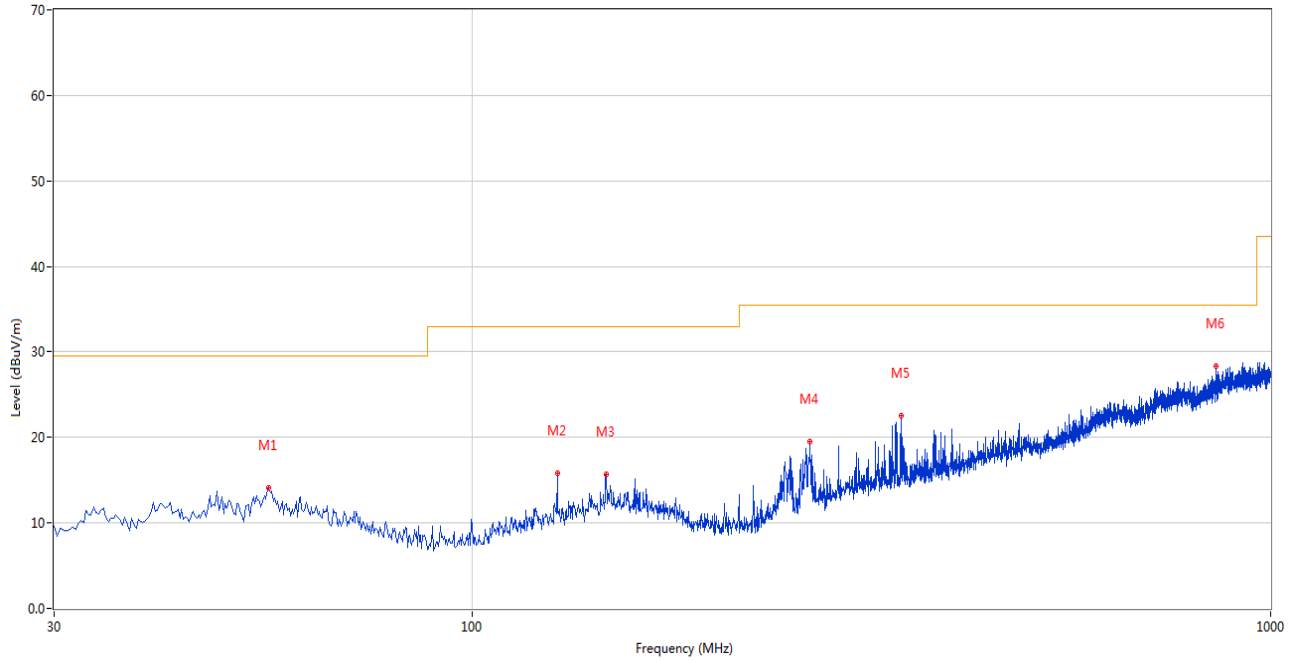

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	55.699	14.06	-26.18	29.5	15.44	Peak	340.00	100	Horizontal	Pass
2	127.946	15.77	-27.27	33.0	17.23	Peak	199.00	100	Horizontal	Pass
3	147.341	15.75	-25.58	33.0	17.25	Peak	1.00	200	Horizontal	Pass
4	265.166	19.46	-26.37	35.5	16.04	Peak	329.00	200	Horizontal	Pass
5	344.929	22.52	-23.73	35.5	12.98	Peak	118.00	200	Horizontal	Pass
6	855.264	28.41	-11.76	35.5	7.09	Peak	74.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

10m RE Test Case_FCC Certification_FCC 15C 30MHz-1GHz

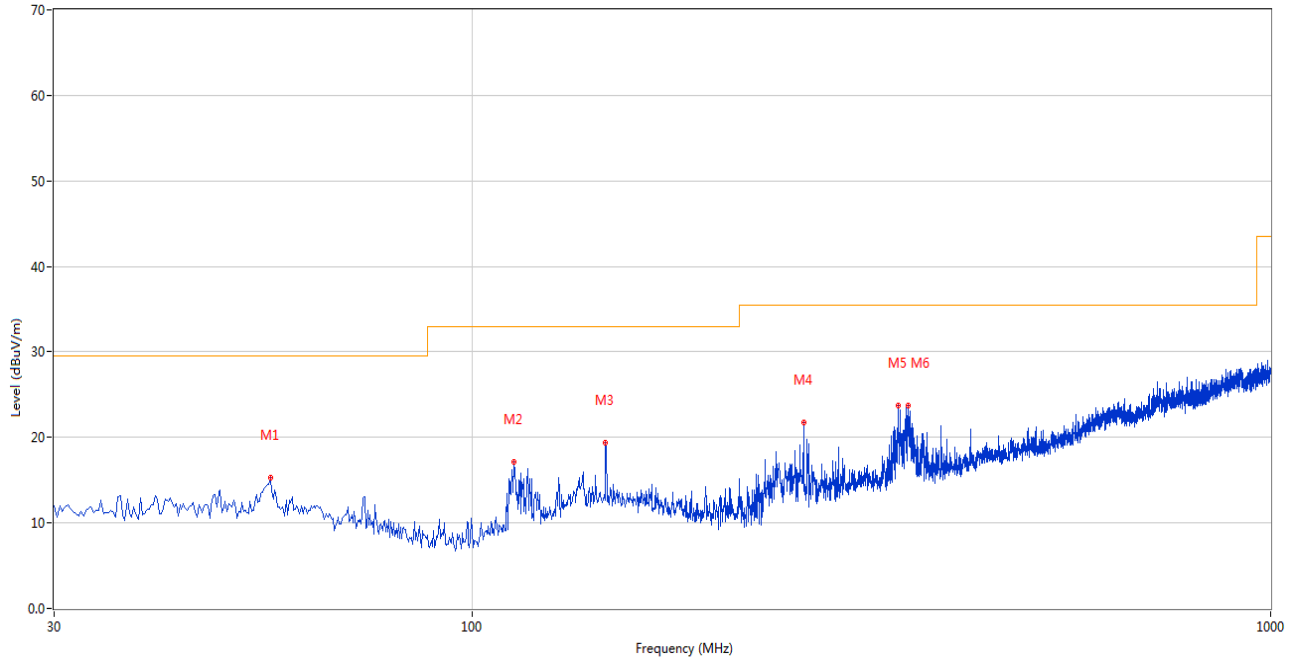

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	55.941	15.26	-26.20	29.5	14.24	Peak	360.00	200	Vertical	Pass
2	112.914	17.18	-28.74	33.0	15.82	Peak	275.00	100	Vertical	Pass
3	147.098	19.34	-25.56	33.0	13.66	Peak	96.00	200	Vertical	Pass
4	260.075	21.77	-26.51	35.5	13.73	Peak	350.00	100	Vertical	Pass
5	341.777	23.70	-23.79	35.5	11.80	Peak	58.00	100	Vertical	Pass
6	351.717	23.73	-23.97	35.5	11.77	Peak	150.00	100	Vertical	Pass

Note ¹: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note ²: The spurious from 18GHz-25GHz is noise only, do not show on the report.

PCB Antenna

GFSK (BLE 1Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1284.246	44.91	74.0	29.09	Peak	205.00	400	Horizontal	Pass
1**	1284.246	30.14	54.0	23.86	AV	205.00	400	Horizontal	Pass
2	1981.611	47.56	74.0	26.44	Peak	122.00	100	Horizontal	Pass
2**	1981.611	37.24	54.0	16.76	AV	122.00	100	Horizontal	Pass
3	5167.714	52.25	74.0	21.75	Peak	349.00	200	Horizontal	Pass
3**	5167.714	42.82	54.0	11.18	AV	349.00	200	Horizontal	Pass
4	6872.397	50.34	74.0	23.66	Peak	286.00	200	Horizontal	Pass
4**	6872.397	44.55	54.0	9.45	AV	286.00	200	Horizontal	Pass
5	13469.445	57.60	74.0	16.40	Peak	291.00	200	Horizontal	Pass
5**	13469.445	48.28	54.0	5.72	AV	291.00	200	Horizontal	Pass
6	17468.074	55.67	74.0	18.33	Peak	54.00	100	Horizontal	Pass
6**	17468.074	47.12	54.0	6.88	AV	54.00	100	Horizontal	Pass

GFSK (BLE 1Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1162.364	46.63	74.0	27.37	Peak	299.00	200	Vertical	Pass
1**	1162.364	30.46	54.0	23.54	AV	299.00	200	Vertical	Pass
2	2766.760	52.09	74.0	21.91	Peak	199.00	300	Vertical	Pass
2**	2766.760	40.63	54.0	13.37	AV	199.00	300	Vertical	Pass
3	5041.930	54.16	74.0	19.84	Peak	157.00	200	Vertical	Pass
3**	5041.930	45.24	54.0	8.76	AV	157.00	200	Vertical	Pass
4	6977.469	54.53	74.0	19.47	Peak	295.00	200	Vertical	Pass
4**	6977.469	46.96	54.0	7.04	AV	295.00	200	Vertical	Pass
5	13342.017	56.47	74.0	17.53	Peak	214.00	400	Vertical	Pass
5**	13342.017	49.65	54.0	4.35	AV	214.00	400	Vertical	Pass
6	17433.581	54.11	74.0	19.89	Peak	179.00	100	Vertical	Pass
6**	17433.581	43.93	54.0	10.07	AV	179.00	100	Vertical	Pass

GFSK (BLE 1Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1288.902	39.66	74.0	34.34	Peak	315.00	300	Horizontal	Pass
1**	1288.902	35.20	54.0	18.80	AV	315.00	300	Horizontal	Pass
2	1981.205	45.97	74.0	28.03	Peak	148.00	300	Horizontal	Pass
2**	1981.205	36.37	54.0	17.63	AV	148.00	300	Horizontal	Pass
3	5166.085	52.14	74.0	21.86	Peak	35.00	200	Horizontal	Pass
3**	5166.085	41.83	54.0	12.17	AV	35.00	200	Horizontal	Pass
4	6873.245	56.03	74.0	17.97	Peak	164.00	100	Horizontal	Pass
4**	6873.245	45.79	54.0	8.21	AV	164.00	100	Horizontal	Pass
5	13465.306	54.48	74.0	19.52	Peak	296.00	400	Horizontal	Pass
5**	13465.306	45.15	54.0	8.85	AV	296.00	400	Horizontal	Pass
6	17465.465	54.36	74.0	19.64	Peak	158.00	400	Horizontal	Pass
6**	17465.465	47.27	54.0	6.73	AV	158.00	400	Horizontal	Pass

GFSK (BLE 1Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1165.768	47.64	74.0	26.36	Peak	181.00	300	Vertical	Pass
1**	1165.768	34.12	54.0	19.88	AV	181.00	300	Vertical	Pass
2	2765.811	51.82	74.0	22.18	Peak	357.00	100	Vertical	Pass
2**	2765.811	43.20	54.0	10.80	AV	357.00	100	Vertical	Pass
3	5039.383	51.69	74.0	22.31	Peak	86.00	200	Vertical	Pass
3**	5039.383	43.54	54.0	10.46	AV	86.00	200	Vertical	Pass
4	6976.026	54.77	74.0	19.23	Peak	65.00	300	Vertical	Pass
4**	6976.026	44.90	54.0	9.10	AV	65.00	300	Vertical	Pass
5	13345.746	58.27	74.0	15.73	Peak	296.00	100	Vertical	Pass
5**	13345.746	46.84	54.0	7.16	AV	296.00	100	Vertical	Pass
6	17437.810	58.43	74.0	15.57	Peak	196.00	100	Vertical	Pass
6**	17437.810	45.90	54.0	8.10	AV	196.00	100	Vertical	Pass

GFSK (BLE 1Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1282.245	39.38	74.0	34.62	Peak	165.00	200	Horizontal	Pass
1**	1282.245	33.12	54.0	20.88	AV	165.00	200	Horizontal	Pass
2	1984.813	44.53	74.0	29.47	Peak	98.00	400	Horizontal	Pass
2**	1984.813	36.90	54.0	17.10	AV	98.00	400	Horizontal	Pass
3	5165.468	52.97	74.0	21.03	Peak	88.00	200	Horizontal	Pass
3**	5165.468	45.00	54.0	9.00	AV	88.00	200	Horizontal	Pass
4	6878.227	54.55	74.0	19.45	Peak	322.00	400	Horizontal	Pass
4**	6878.227	44.57	54.0	9.43	AV	322.00	400	Horizontal	Pass
5	13470.975	56.77	74.0	17.23	Peak	227.00	200	Horizontal	Pass
5**	13470.975	46.11	54.0	7.89	AV	227.00	200	Horizontal	Pass
6	17463.924	54.97	74.0	19.03	Peak	129.00	100	Horizontal	Pass
6**	17463.924	46.17	54.0	7.83	AV	129.00	100	Horizontal	Pass

GFSK (BLE 1Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1164.736	44.21	74.0	29.79	Peak	162.00	100	Vertical	Pass
1**	1164.736	30.72	54.0	23.28	AV	162.00	100	Vertical	Pass
2	2769.386	52.32	74.0	21.68	Peak	66.00	400	Vertical	Pass
2**	2769.386	43.64	54.0	10.36	AV	66.00	400	Vertical	Pass
3	5038.670	53.59	74.0	20.41	Peak	256.00	200	Vertical	Pass
3**	5038.670	39.70	54.0	14.30	AV	256.00	200	Vertical	Pass
4	6978.368	55.02	74.0	18.98	Peak	293.00	400	Vertical	Pass
4**	6978.368	43.86	54.0	10.14	AV	293.00	400	Vertical	Pass
5	13344.013	54.07	74.0	19.93	Peak	98.00	300	Vertical	Pass
5**	13344.013	46.34	54.0	7.66	AV	98.00	300	Vertical	Pass
6	17438.931	55.80	74.0	18.20	Peak	225.00	200	Vertical	Pass
6**	17438.931	43.85	54.0	10.15	AV	225.00	200	Vertical	Pass

GFSK (BLE 2Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1284.651	43.84	74.0	30.16	Peak	337.00	100	Horizontal	Pass
1**	1284.651	30.18	54.0	23.82	AV	337.00	100	Horizontal	Pass
2	2769.711	50.27	74.0	23.73	Peak	270.00	200	Horizontal	Pass
2**	2769.711	41.73	54.0	12.27	AV	270.00	200	Horizontal	Pass
3	5167.986	52.30	74.0	21.70	Peak	86.00	200	Horizontal	Pass
3**	5167.986	44.26	54.0	9.74	AV	86.00	200	Horizontal	Pass
4	6804.222	57.69	74.0	16.31	Peak	39.00	200	Horizontal	Pass
4**	6804.222	43.10	54.0	10.90	AV	39.00	200	Horizontal	Pass
5	13466.550	53.43	74.0	20.57	Peak	23.00	100	Horizontal	Pass
5**	13466.550	45.00	54.0	9.00	AV	23.00	100	Horizontal	Pass
6	17466.262	53.89	74.0	20.11	Peak	72.00	300	Horizontal	Pass
6**	17466.262	43.47	54.0	10.53	AV	72.00	300	Horizontal	Pass

GFSK (BLE 2Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1285.553	42.61	74.0	31.39	Peak	320.00	400	Vertical	Pass
1**	1285.553	35.06	54.0	18.94	AV	320.00	400	Vertical	Pass
2	2766.813	54.62	74.0	19.38	Peak	317.00	100	Vertical	Pass
2**	2766.813	44.52	54.0	9.48	AV	317.00	100	Vertical	Pass
3	5164.889	53.85	74.0	20.15	Peak	204.00	200	Vertical	Pass
3**	5164.889	45.53	54.0	8.47	AV	204.00	200	Vertical	Pass
4	6805.247	52.93	74.0	21.07	Peak	95.00	400	Vertical	Pass
4**	6805.247	45.28	54.0	8.72	AV	95.00	400	Vertical	Pass
5	13464.254	56.21	74.0	17.79	Peak	106.00	200	Vertical	Pass
5**	13464.254	47.01	54.0	6.99	AV	106.00	200	Vertical	Pass
6	17462.920	53.65	74.0	20.35	Peak	320.00	300	Vertical	Pass
6**	17462.920	46.95	54.0	7.05	AV	320.00	300	Vertical	Pass

GFSK (BLE 2Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1288.369	40.00	74.0	34.00	Peak	203.00	100	Horizontal	Pass
1**	1288.369	32.49	54.0	21.51	AV	203.00	100	Horizontal	Pass
2	2770.056	53.24	74.0	20.76	Peak	32.00	200	Horizontal	Pass
2**	2770.056	45.97	54.0	8.03	AV	32.00	200	Horizontal	Pass
3	5169.045	54.71	74.0	19.29	Peak	262.00	200	Horizontal	Pass
3**	5169.045	42.20	54.0	11.80	AV	262.00	200	Horizontal	Pass
4	6805.918	56.04	74.0	17.96	Peak	152.00	300	Horizontal	Pass
4**	6805.918	48.60	54.0	5.40	AV	152.00	300	Horizontal	Pass
5	13468.395	57.24	74.0	16.76	Peak	185.00	300	Horizontal	Pass
5**	13468.395	44.73	54.0	9.27	AV	185.00	300	Horizontal	Pass
6	17470.804	59.11	74.0	14.89	Peak	304.00	400	Horizontal	Pass
6**	17470.804	45.15	54.0	8.85	AV	304.00	400	Horizontal	Pass

GFSK (BLE 2Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1284.438	40.79	74.0	33.21	Peak	107.00	100	Vertical	Pass
1**	1284.438	32.11	54.0	21.89	AV	107.00	100	Vertical	Pass
2	2768.017	50.65	74.0	23.35	Peak	0.00	100	Vertical	Pass
2**	2768.017	40.48	54.0	13.52	AV	0.00	100	Vertical	Pass
3	5167.834	54.71	74.0	19.29	Peak	34.00	200	Vertical	Pass
3**	5167.834	43.75	54.0	10.25	AV	34.00	200	Vertical	Pass
4	6805.736	56.70	74.0	17.30	Peak	269.00	300	Vertical	Pass
4**	6805.736	46.10	54.0	7.90	AV	269.00	300	Vertical	Pass
5	13468.565	58.11	74.0	15.89	Peak	73.00	400	Vertical	Pass
5**	13468.565	44.36	54.0	9.64	AV	73.00	400	Vertical	Pass
6	17465.483	55.53	74.0	18.47	Peak	81.00	400	Vertical	Pass
6**	17465.483	45.84	54.0	8.16	AV	81.00	400	Vertical	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1281.909	41.15	74.0	32.85	Peak	315.00	300	Horizontal	Pass
1**	1281.909	31.11	54.0	22.89	AV	315.00	300	Horizontal	Pass
2	2769.021	49.91	74.0	24.09	Peak	234.00	300	Horizontal	Pass
2**	2769.021	41.35	54.0	12.65	AV	234.00	300	Horizontal	Pass
3	5171.089	54.92	74.0	19.08	Peak	172.00	200	Horizontal	Pass
3**	5171.089	44.61	54.0	9.39	AV	172.00	200	Horizontal	Pass
4	6808.276	57.61	74.0	16.39	Peak	1.00	400	Horizontal	Pass
4**	6808.276	43.13	54.0	10.87	AV	1.00	400	Horizontal	Pass
5	13470.074	54.64	74.0	19.36	Peak	108.00	100	Horizontal	Pass
5**	13470.074	44.30	54.0	9.70	AV	108.00	100	Horizontal	Pass
6	17468.779	57.58	74.0	16.42	Peak	297.00	200	Horizontal	Pass
6**	17468.779	45.70	54.0	8.30	AV	297.00	200	Horizontal	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1281.889	40.48	74.0	33.52	Peak	253.00	300	Vertical	Pass
1**	1281.889	35.89	54.0	18.11	AV	253.00	300	Vertical	Pass
2	2769.659	51.70	74.0	22.30	Peak	32.00	100	Vertical	Pass
2**	2769.659	44.11	54.0	9.89	AV	32.00	100	Vertical	Pass
3	5166.167	52.88	74.0	21.12	Peak	275.00	200	Vertical	Pass
3**	5166.167	42.63	54.0	11.37	AV	275.00	200	Vertical	Pass
4	6803.717	54.87	74.0	19.13	Peak	30.00	300	Vertical	Pass
4**	6803.717	46.90	54.0	7.10	AV	30.00	300	Vertical	Pass
5	13467.464	55.58	74.0	18.42	Peak	271.00	100	Vertical	Pass
5**	13467.464	45.88	54.0	8.12	AV	271.00	100	Vertical	Pass
6	17469.801	55.40	74.0	18.60	Peak	170.00	100	Vertical	Pass
6**	17469.801	47.69	54.0	6.31	AV	170.00	100	Vertical	Pass

Rod Antenna

GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1287.042	40.26	74.0	33.74	Peak	234.00	400	Horizontal	Pass
1**	1287.042	35.30	54.0	18.70	AV	234.00	400	Horizontal	Pass
2	2769.347	49.84	74.0	24.16	Peak	10.00	300	Horizontal	Pass
2**	2769.347	41.75	54.0	12.25	AV	10.00	300	Horizontal	Pass
3	5169.937	54.64	74.0	19.36	Peak	263.00	200	Horizontal	Pass
3**	5169.937	42.09	54.0	11.91	AV	263.00	200	Horizontal	Pass
4	6806.549	53.36	74.0	20.64	Peak	239.00	400	Horizontal	Pass
4**	6806.549	46.69	54.0	7.31	AV	239.00	400	Horizontal	Pass
5	13464.972	54.90	74.0	19.10	Peak	327.00	200	Horizontal	Pass
5**	13464.972	45.37	54.0	8.63	AV	327.00	200	Horizontal	Pass
6	17470.805	55.18	74.0	18.82	Peak	357.00	300	Horizontal	Pass
6**	17470.805	48.20	54.0	5.80	AV	357.00	300	Horizontal	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1283.214	45.28	74.0	28.72	Peak	259.00	300	Vertical	Pass
1**	1283.214	33.53	54.0	20.47	AV	259.00	300	Vertical	Pass
2	2768.616	53.71	74.0	20.29	Peak	229.00	400	Vertical	Pass
2**	2768.616	42.40	54.0	11.60	AV	229.00	400	Vertical	Pass
3	5169.706	54.58	74.0	19.42	Peak	272.00	200	Vertical	Pass
3**	5169.706	44.39	54.0	9.61	AV	272.00	200	Vertical	Pass
4	6806.731	55.00	74.0	19.00	Peak	211.00	100	Vertical	Pass
4**	6806.731	44.79	54.0	9.21	AV	211.00	100	Vertical	Pass
5	13464.358	57.09	74.0	16.91	Peak	353.00	100	Vertical	Pass
5**	13464.358	46.67	54.0	7.33	AV	353.00	100	Vertical	Pass
6	17468.781	53.73	74.0	20.27	Peak	205.00	200	Vertical	Pass
6**	17468.781	44.98	54.0	9.02	AV	205.00	200	Vertical	Pass

FPC Antenna

GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1285.502	42.87	74.0	31.13	Peak	122.00	100	Horizontal	Pass
1**	1285.502	34.65	54.0	19.35	AV	122.00	100	Horizontal	Pass
2	2770.634	53.67	74.0	20.33	Peak	80.00	100	Horizontal	Pass
2**	2770.634	43.21	54.0	10.79	AV	80.00	100	Horizontal	Pass
3	5167.637	52.32	74.0	21.68	Peak	198.00	200	Horizontal	Pass
3**	5167.637	45.49	54.0	8.51	AV	198.00	200	Horizontal	Pass
4	6804.947	57.71	74.0	16.29	Peak	152.00	400	Horizontal	Pass
4**	6804.947	48.77	54.0	5.23	AV	152.00	400	Horizontal	Pass
5	13469.887	57.60	74.0	16.40	Peak	118.00	200	Horizontal	Pass
5**	13469.887	45.72	54.0	8.28	AV	118.00	200	Horizontal	Pass
6	17463.495	54.76	74.0	19.24	Peak	214.00	200	Horizontal	Pass
6**	17463.495	47.95	54.0	6.05	AV	214.00	200	Horizontal	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1286.118	43.31	74.0	30.69	Peak	259.00	400	Vertical	Pass
1**	1286.118	34.13	54.0	19.87	AV	259.00	400	Vertical	Pass
2	2769.282	52.62	74.0	21.38	Peak	52.00	400	Vertical	Pass
2**	2769.282	41.20	54.0	12.80	AV	52.00	400	Vertical	Pass
3	5165.988	49.94	74.0	24.06	Peak	344.00	200	Vertical	Pass
3**	5165.988	41.94	54.0	12.06	AV	344.00	200	Vertical	Pass
4	6805.616	57.76	74.0	16.24	Peak	286.00	100	Vertical	Pass
4**	6805.616	46.05	54.0	7.95	AV	286.00	100	Vertical	Pass
5	13469.818	52.98	74.0	21.02	Peak	266.00	300	Vertical	Pass
5**	13469.818	45.26	54.0	8.74	AV	266.00	300	Vertical	Pass
6	17468.688	57.00	74.0	17.00	Peak	232.00	100	Vertical	Pass
6**	17468.688	48.35	54.0	5.65	AV	232.00	100	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: The Level (dBuV/m) has been corrected by factor.

Test Data

PCB Antenna

GFSK (BLE 1Mbps) LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2334.099	54.22	74.0	19.78	Peak	202.00	300	Horizontal	Pass
1**	2334.099	44.48	54.0	9.52	AV	202.00	300	Horizontal	Pass
2	2390.000	52.53	74.0	21.47	Peak	9.00	300	Horizontal	Pass
2**	2390.000	41.26	54.0	12.74	AV	9.00	300	Horizontal	Pass

GFSK (BLE 1Mbps) HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.02	74.0	20.98	Peak	216.00	200	Horizontal	Pass
1**	2483.500	44.04	54.0	9.96	AV	216.00	200	Horizontal	Pass
2	2484.296	56.35	74.0	17.65	Peak	335.00	200	Horizontal	Pass
2**	2484.296	44.54	54.0	9.46	AV	335.00	200	Horizontal	Pass

GFSK (BLE 2Mbps) LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2319.841	55.69	74.0	18.31	Peak	107.00	200	Horizontal	Pass
1**	2319.841	45.53	54.0	8.47	AV	107.00	200	Horizontal	Pass
2	2390.000	54.21	74.0	19.79	Peak	140.00	100	Horizontal	Pass
2**	2390.000	42.94	54.0	11.06	AV	140.00	100	Horizontal	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.74	74.0	19.26	Peak	18.00	100	Horizontal	Pass
1**	2483.500	45.6	54.0	8.40	AV	18.00	100	Horizontal	Pass
2	2484.317	56.52	74.0	17.48	Peak	228.00	200	Horizontal	Pass
2**	2484.317	44.83	54.0	9.17	AV	228.00	200	Horizontal	Pass

Rod Antenna

GFSK (BLE 2Mbps) HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.75	74.0	19.25	Peak	204.00	300	Horizontal	Pass
1**	2483.500	44.23	54.0	9.77	AV	204.00	300	Horizontal	Pass
2	2484.351	56.15	74.0	17.85	Peak	190.00	200	Horizontal	Pass
2**	2484.351	45.88	54.0	8.12	AV	190.00	200	Horizontal	Pass

FPC Antenna

GFSK (BLE 2Mbps) HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.46	74.0	20.54	Peak	118.00	100	Horizontal	Pass
1**	2483.500	44.88	54.0	9.12	AV	118.00	100	Horizontal	Pass
2	2484.818	53.36	74.0	20.64	Peak	353.00	300	Horizontal	Pass
2**	2484.818	45.27	54.0	8.73	AV	353.00	300	Horizontal	Pass

A.8 Power Spectral Density (PSD)

Test Data

GFSK (BLE 1Mbps)			
Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-7.56	8	Pass
Middle Channel	-7.57	8	Pass
High Channel	-7.82	8	Pass

GFSK (BLE 2Mbps)			
Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-11.87	8	Pass
Middle Channel	-12.10	8	Pass
High Channel	-19.34	8	Pass

Test Plots


GFSK (BLE 1Mbps) LOW CHANNEL



GFSK (BLE 1Mbps) MIDDLE CHANNEL




GFSK (BLE 1Mbps) HIGH CHANNEL

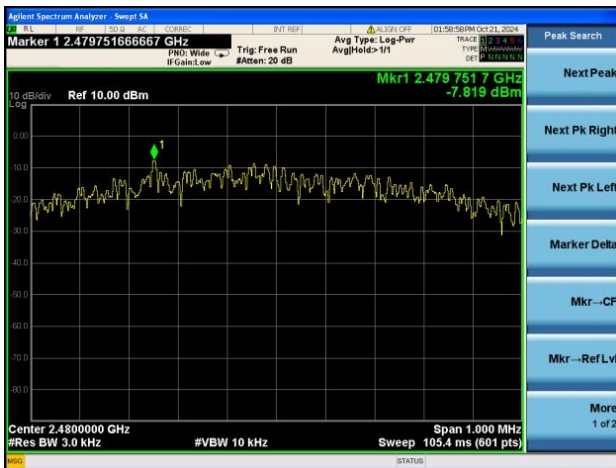


GFSK (BLE 2Mbps) LOW CHANNEL



GFSK (BLE 2Mbps) MIDDLE CHANNEL

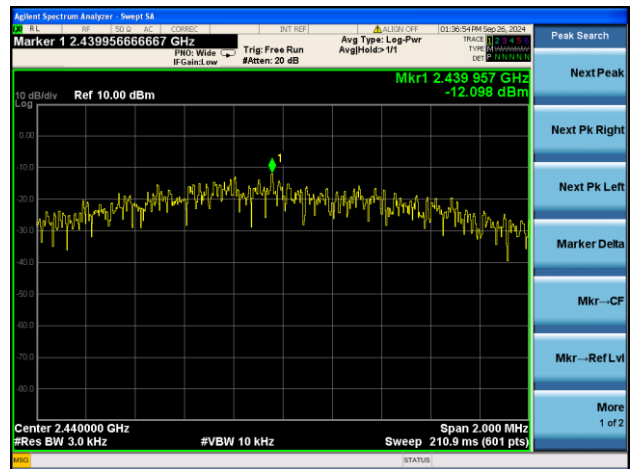

GFSK (BLE 2Mbps) HIGH CHANNEL

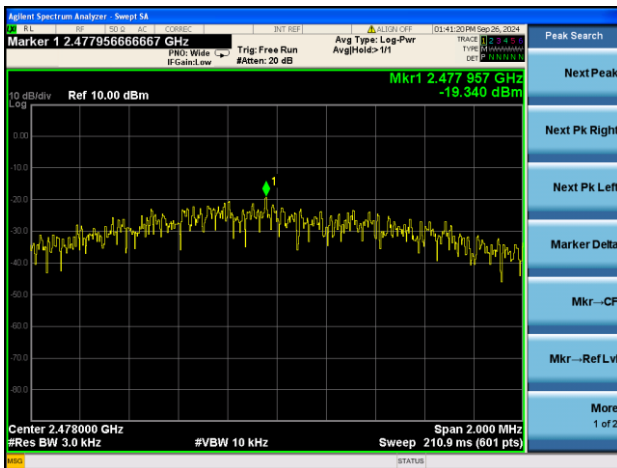

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2490059-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2490059-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2490059-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--