

Testing Tomorrow's Technology

Application for

**US Code Title 47, Part 2, Subpart J, Section 2.947, Certification
Per
Part 15, Subpart C, for Intentional Radiators, Section 15.249, Intentional Radiator
Operating within the Band 2400 MHz to 2483.5 MHz.**

And

**US Code Title 47, Part 2, Subpart J, Section 2.902, Verification
Per
Part 15, Subpart B, for Unintentional Radiators, section 15.101, 15.107 and 15.109**

For the

Acuity Brands Lighting

Model: DTL02

UST Project: 14-0273

Test Date(s): November 5-6, 2014

Issue Date: November 7, 2014

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**



Testing Tomorrow's Technology

I certify that I am authorized to sign for the test facility and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: 

Name: George Yang

Title: Laboratory Manager

Date: November 7, 2014

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided.

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

MEASUREMENT/TECHNICAL REPORT

COMPANY NAME: Acuity Brands Lighting

MODEL(S): DTL02
FCC ID: 2ADCB-DTL02
IC: 6715C-DTL02

DATE: November 7, 2014

This report concerns (check one): Original grant X
Class II change _____

Equipment type: Intentional Radiator Operating within the bands 2400-2483.5 MHz

Deferred grant requested per 47 CFR 0.457(d) (1) (ii)? yes _____ No X

If yes, defer until: _____
date

N.A. agrees to notify the Commission by N.A.
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

US Tech
3505 Francis Circle
Alpharetta, GA 30004

Phone Number: (770) 740-0717
Fax Number: (770) 740-1508

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

SUMMARY OF TEST REQUIREMENTS

<u>FCC Requirement</u>	<u>Title</u>	<u>Disposition</u>
15.205	Restricted Bands	Pass
15.207	Intentional Radiator Power Line Conducted Emissions	N/A
15.209	Intentional Radiator Radiated Emissions	Pass
15.249(a)	Fundamental Field Strength	Pass
15.107	Unintentional Radiator Power Line Conducted Emissions	N/A
15.109	Unintentional Radiator Radiated Emissions	Pass

N/A = Not applicable for this unit.

Table of Contents

1 General Information8

1.1 Purpose of this Report8

1.2 Product Description.....8

1.3 Related Submittal(s)/Grant(s)8

1.3.1 The EUT is subject to the following FCC authorizations:8

1.3.2 Certification of the Transmitter9

2 Tests and Measurements9

2.1 Configuration of Tested System.....9

2.2 EUT Characterization.....12

2.3 Test Facility.....12

2.4 Modifications to EUT.....12

2.5 Test Equipment.....13

2.6 Measurement Standards (CFR 15.31)14

2.7 Frequency Range of Radiated Measurements (CFR 15.33).....14

2.7.1 Frequency Range for Intentional Radiators.....14

2.7.2 Frequency Range for Unintentional Radiators14

2.7.3 Measurement Detector Function and Bandwidth (CFR 15.35).....14

2.8 Antenna Requirement (CFR 15.203)17

2.9 Restricted Bands of Operation (CFR 15.205)17

2.10 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207) ...17

2.11 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249 (a), (e)) 17

2.12 20 dB Bandwidth Measurement per CFR 15.249, 99% Occupied
Bandwidth (IC RSS 210, A8.1).....21

2.13 Band Edge Measurements (CFR15.249(d)).....25

2.13.1 High Band Edge.....26

2.13.2 Low Band Edge.....33

2.14 Unintentional Radiator, Power Conducted Emissions (CFR 15.107)40

2.15 Unintentional Radiator, Radiated Emissions (CFR 15.109)42

2.16 Measurement Uncertainty45

2.16.1 Conducted Emissions Measurement Uncertainty45

2.16.2 Radiated Emissions Measurement Uncertainty45

List of Tables

Table 1. EUT and Peripherals..... 11
Table 2. Details of I/O Cables Attached to EUT 11
Table 3 . Test Instruments used for Evaluation..... 13
Table 4 . Allowed Antenna(s)..... 17
Table 5 . Intentional Radiator, Peak Radiated Emissions (CFR 15.209),..... 18
Table 6 . Peak Fundamental and Harmonics, (CFR15.209, 15.249(a)), 19
Table 7 . AVERAGE Fundamental and Harmonics, (CFR15.209, 15.249(a)),.... 20
Table 8 . 20 dB Bandwidth and 99% Occupied Bandwidth 21
Table 9 . Radiated Restricted Band Measurements PK, 2.4835 GHz to 2.5 GHz
..... 30
Table 10 . Radiated Restricted Band Measurements AVG, 2.4835 GHz to 2.5
GHz..... 32
Table 11 . Radiated Restricted Band Measurements PK, 2.31 GHz to 2.39 GHz
..... 37
Table 12 . Radiated Restricted Band Measurements AVG, 2.31 GHz to 2.39 GHz
..... 39
Table 13 . Power line Conducted Emissions Data, Class B 41
Table 14. Unintentional Radiator, Peak Radiated Emissions (CFR 15.109), 43
Table 15. Unintentional Radiator, Peak Radiated Emissions (CFR 15.109), 44

List of Figures

Figure 1. Test Configuration for Normal use Mode 10
Figure 2. Test Configuration for continuous transition mode..... 10
Figure 3. Transmitter Pulse Width..... 15
Figure 4. Transmitter Pulse Train within 1s..... 16
Figure 5. Low Channel 20 dB Bandwidth 22
Figure 6. Mid Channel 20 dB Bandwidth..... 23
Figure 7. High Channel 20 dB Bandwidth 24
Figure 8. Radiated Band Edge – High Channel Delta PK 26
Figure 9. Radiated Band Edge – High Channel Delta AVG 27
Figure 10. Radiated Restricted Band Measurements PK, 2.4835 GHz to 2.5 GHz
..... 29
Figure 11. Radiated Restricted Band Measurements AVG, 2.4835 GHz to 2.5
GHz..... 31
Figure 12. Radiated Band Edge – Low Channel Delta PK..... 33
Figure 13. Radiated Band Edge – Low Channel Delta AVG 34
Figure 14. Radiated Restricted Band Measurements PK, 2.31 GHz to 2.39 GHz
..... 36
Figure 15. Radiated Restricted Band Measurements AVG, 2.31 GHz to 2.39 GHz
..... 38

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

List of Appendices

Appendix	Title
A	Agency Agreement
B	Application Forms
C	Letter of Confidentiality
D	Equipment Label
E	Block Diagram(s)
F	Schematic(s)
G	Test Configuration Photographs
H	External Photographs
I	Internal Photographs
J	Theory of Operation
K	User's Manual

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

1 General Information

1.1 Purpose of this Report

This report is prepared as a means of presenting test data to be used by a Telecom Certification Body in determination of whether this product is permitted for unlicensed dissemination to the general public according to the FCC Rules and Regulations for RF Devices Intentional Radiators.

1.2 Product Description

The Equipment Under Test (EUT) is the Acuity Brands Lighting Model DTL02. The EUT incorporates an ISM band transceiver operating in the 2400-2483.5 MHz frequency band. Per 47 CFR Part 15.31(m) the EUT was evaluated at the low, middle and high channels for operation in this band. Test data for these channels is provided herein.

The EUT is a handheld key fob device meant to communicate with Acuity Brands Radio Module DTL01. The EUT uses BTLE technology to transmit and receive data packets.

The EUT is powered through a 3 VDC coin cell battery, and has the following features:

Frequency Hopping: 40 channels, 1 MHz bandwidth, 2 MHz spacing, 1600 hops per seconds

Modulation: FHSS/GFSK

Data Packet: DH1, DH3, and DH5

Bluetooth rated maximum output power: 0 dBm

Frequency band of operation: 2400 MHz to 2483.5 MHz

1.3 Related Submittal(s)/Grant(s)

1.3.1 The EUT is subject to the following FCC authorizations:

- a) Certification under section 15.249 as a transmitter.
- b) Verification under 15.101 as a digital device and receiver.

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

1.3.2 Certification of the Transmitter

The EUT employs FHSS modulation, but is not being certified under CFR 15.247 because the field strength of the fundamental and its harmonics are within the limits specified in 47 CFR 15.249. Therefore the EUT is instead being presented under the requirements of CFR 15.249. The EUT will operate within the frequency band of 2400 MHz to 2483.5 MHz.

1.3.3 Verification of the Digital apparatus

The Verification requirement shares many common report elements with the Certification report. Therefore, though this report is mostly intended to provide data for the Certification process, the Verification authorization report (part 15.107 and 15.109) for the EUT is included herein.

2 Tests and Measurements

2.1 Configuration of Tested System

The sample was set up and tested per ANSI C63.4, Methods of Measurement from Low-Voltage Electrical and Electronic Equipment in the Frequency Range of 9 kHz to 40 GHz (2003). Conducted and radiated emissions data was taken with the EMC test receiver (or spectrum analyzer's) resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off throughout the evaluation process. A Block diagram of the tested system is shown in Figure 1. A listing of the EUT and its test peripherals is found in Table 1 below. Test configuration photographs for spurious and fundamental emissions measurements are in the attached appendices.

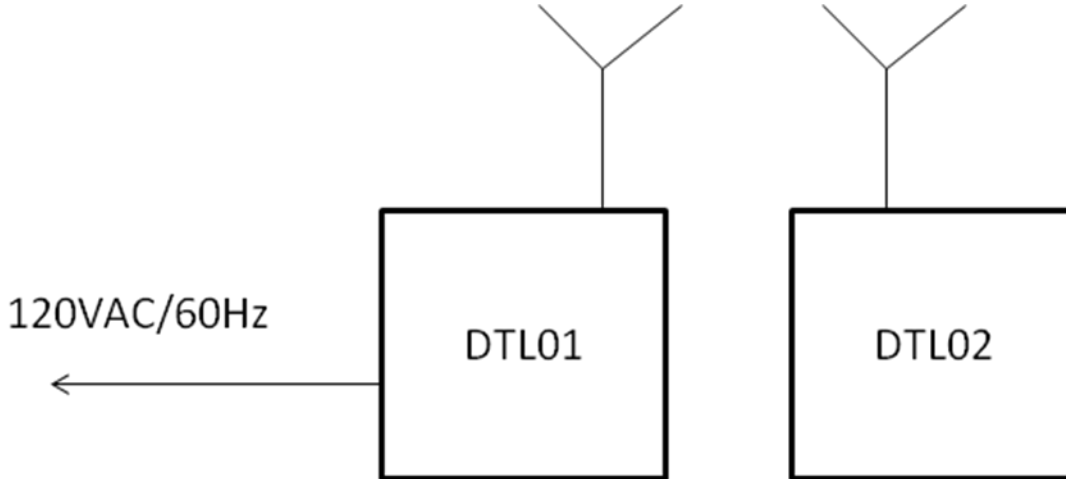


Figure 1. Test Configuration for Normal Use Mode

Note: EUT is DLT02

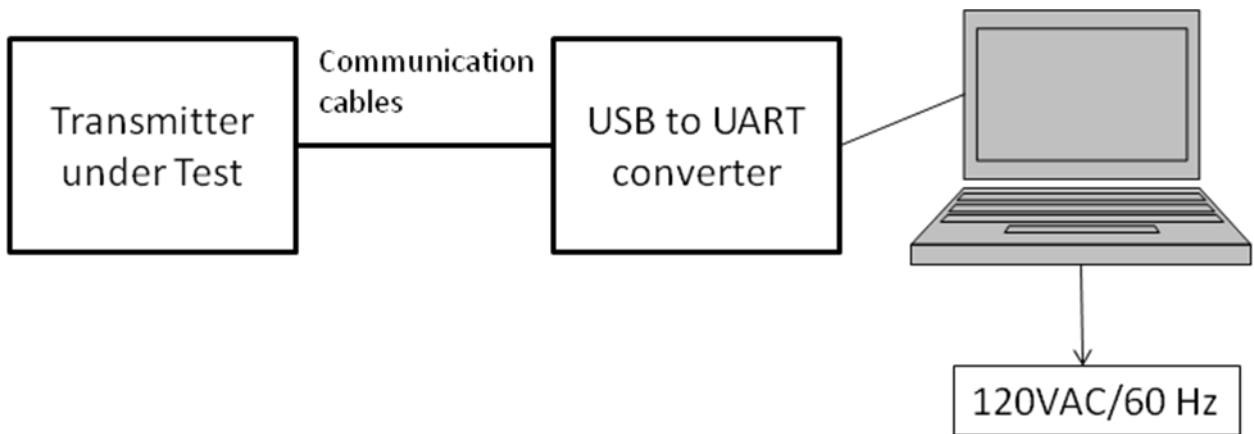


Figure 2. Test Configuration for Continuous Transmission Mode

US Tech Test Report:
 Report Number:
 Customer:
 FCC ID:
 IC:
 Issue Date:
 Model:

FCC Part 15.249/RSS 210
 14-0273
 Acuity Brands Lighting
 2ADCB-DTL02
 6715C-DTL02
 November 7, 2014
 DTL02

Table 1. EUT and Peripherals

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID/IC Number	CABLES P/D
(EUT) Acuity Brands Lighting	DTL02	Engineering Sample	Pending: FCC ID: 2ADCB-DTL02 IC: 6715C-DTL02	0.5 m UD (x2) 0.5 m UP (x2)
Acuity Brands Lighting	DTL01	Engineering Sample	Pending: FCC ID: 2ADCB-DTL01 IC: 6715C-DTL01	1.5 m UP
USB to Serial Cable	N/A	N/A	N/A	0.5 m UD (x3) 0.5 m UP (x2)
Laptop PC Hewlett Packard	Elite Book 8530p	2CE01000TG	N/A	1.0 m UP 0.5 m UD

S = Shielded P = Power
U = Unshielded D = Data

Table 2. Details of I/O Cables Attached to EUT

DESCRIPTION OF CABLE	DETAILS OF CABLE			CABLE LENGTH
Communication Cables (X4) (VCC, TX, RX and GND)	Manufacturer and Part Number			0.5 meters
	CND			
	Shield Type	Shield Termination	Type of Backshell	
	N/A	N/A	N/A	
Power Cable	Manufacturer and Part Number			1.5 m
	CND			
	Shield Type	Shield Termination	Type of Back Shell	
	N/A	N/A	N/A	

Shield Type

N/A = None
 F = Foil
 B = Braided
 2B = Double Braided
 CND = Could Not Determine

Shield Termination

N/A = None
 360 = 360 Degrees
 P = Pigtail/Drain Wire
 CND = Could Not Determine
 MU = Metal Unshielded

Type of Backshell

N/A = Not Applicable
 PS = Plastic Shielded
 PU = Plastic Unshielded
 MS = Metal Shielded

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

2.2 EUT Characterization

The sample used for testing was received by US Tech on November 5, 2014 in good operating condition.

2.3 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA. This site has been fully described and registered with the FCC under designation number 186022. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1.

2.4 Modifications to EUT

No modifications were made by US Tech to bring the EUT into compliance with FCC Part 15, Subpart B, Class B Limits for the receiver and digital portion of the EUT or the Subpart C, Transmitter requirements.

2.5 Test Equipment

Table 2 describes test equipment used to evaluate this product.

Table 3 . Test Instruments used for Evaluation

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	DATE OF LAST CALIBRATION
SPECTRUM ANALYZER	8566B	HEWLETT-PACKARD	2410A00109	2/3/2014
QUASI_PEAK ADAPTER	85650A	HEWLETT-PACKARD	2430A00523	2/3/2014
SPECTRUM ANALYZER	E4407B	Agilent	US41442935	11/8/2013
PREAMP	8447D	HEWLETT-PACKARD	2944A07436	2/6/2014
PREAMP	8449B	HEWLETT-PACKARD	3008A00480	2/6/2014
BICONICAL ANTENNA	3110B	EMCO	9307-1431	2/11/2013 2 yr.
LOG PERIODIC ANTENNA	3146	EMCO	9305-3600	7/1/2014 2 yr.
HORN ANTENNA	3115	EMCO	9107-3723	7/08/2014
HORN ANTENNA	SAS-571	A.H. SYSTEMS	605	7/23/2013 2 yrs
HORN ANTENNA	3116	EMCO	9505-2255	8/9/2012 2 yr with 90 day extension
LOOP ANTENNA	SAS-200/562	A. H. Systems	142	9/12/2013 2 yr cycle
LISN (X2)	9247-50-TS-50-N	Solar Electronics	955824 & 955826	3/20/2014

Note: The calibration interval of the above test instruments is 12 months unless stated otherwise, and all calibrations are traceable to NIST/USA.

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

2.6 Measurement Standards (CFR 15.31)

Intentional and unintentional radiators are to use the methods of ANSI C63.4:2003. Measurements were made on an Open Area Test Site (OATS) wherever possible. For battery powered equipment, new (or fully charged) batteries are used. Section 15.31(m) indicates that if the EUT System operates over the 2400 MHz to 2483.5 MHz ISM band, measurements must be made near the bottom of the band (around 2400 MHz for example) and in the middle of the band (2440 MHz) as well as near the top of the band (2483.5 MHz).

2.7 Frequency Range of Radiated Measurements (CFR 15.33)

The frequency range is detailed below for intentional and unintentional radiators.

2.7.1 Frequency Range for Intentional Radiators

The spectrum was investigated from the lowest RF signal generated without going below 9 kHz to the 10th harmonic of the highest fundamental transmitter frequency.

2.7.2 Frequency Range for Unintentional Radiators

The spectrum was investigated from the lowest RF signal generated without going below the lowest frequency for which an emissions limit is specified (30 MHz) to the 5th harmonic of the highest fundamental frequency of the digital device (12.5 GHz maximum).

2.7.3 Measurement Detector Function and Bandwidth (CFR 15.35)

On any frequency below 1000 MHz, the limits shown are based upon measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths. On frequencies above 1000 MHz, the radiation limits are based upon the use of measuring instrumentation employing an average detector function.

When average detector measurements are specified for use, including emission measurements below 1000 MHz, there is also a corresponding limit for Peak detector measurements having a limit of 20 dB above the corresponding average limit unless a different peak emission limit is specified. Measurements above 1000 MHz utilize a minimum resolution bandwidth of 1 MHz.

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

When radiated emissions limits are expressed in terms of the average value of the emission and pulsed operation is employed, the measurement field strength is determined by averaging over one complete pulse train (Duty Cycle) including blanking intervals for pulse trains up to 0.1 second in duration. The exact method of calculating the average field strength is included in paragraph 2.11 of this report. Refer to Figures 3 and 4 for duty cycle measurement data.

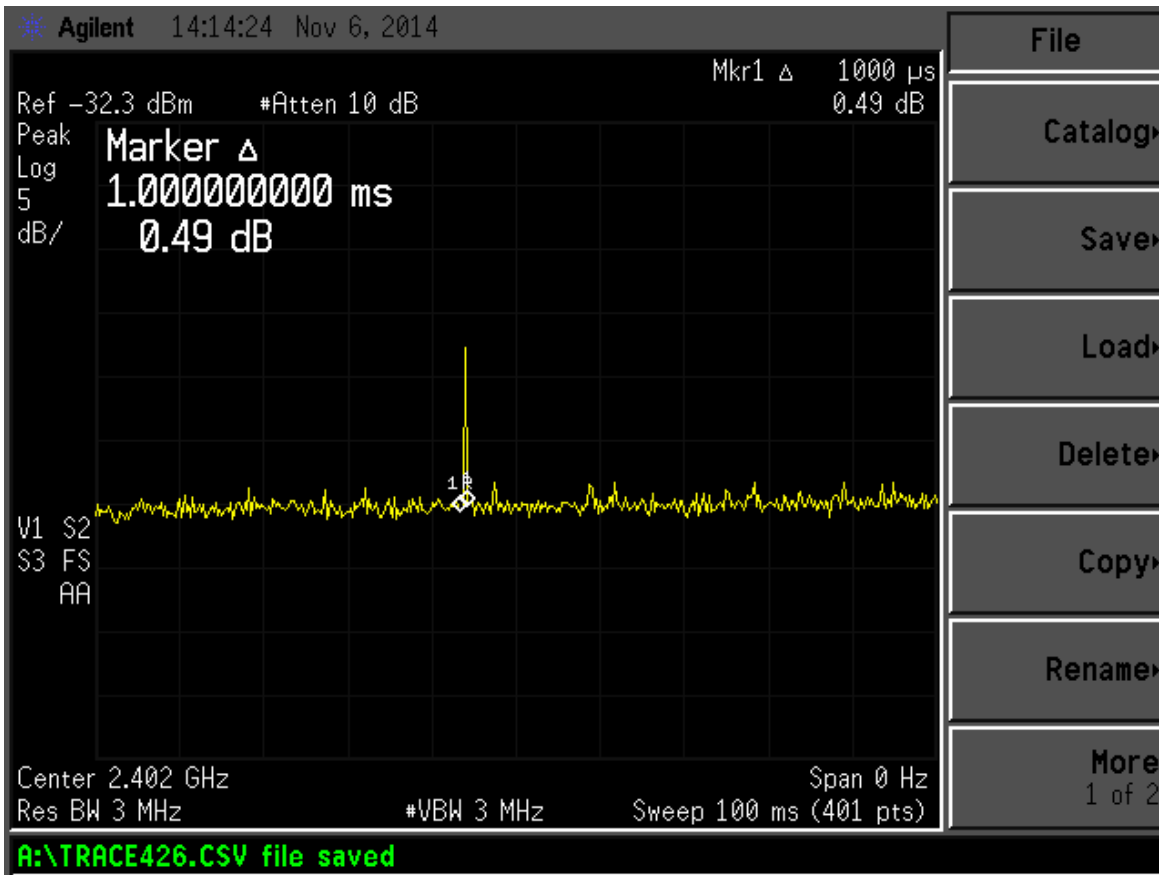


Figure 3. Transmitter Pulse Width

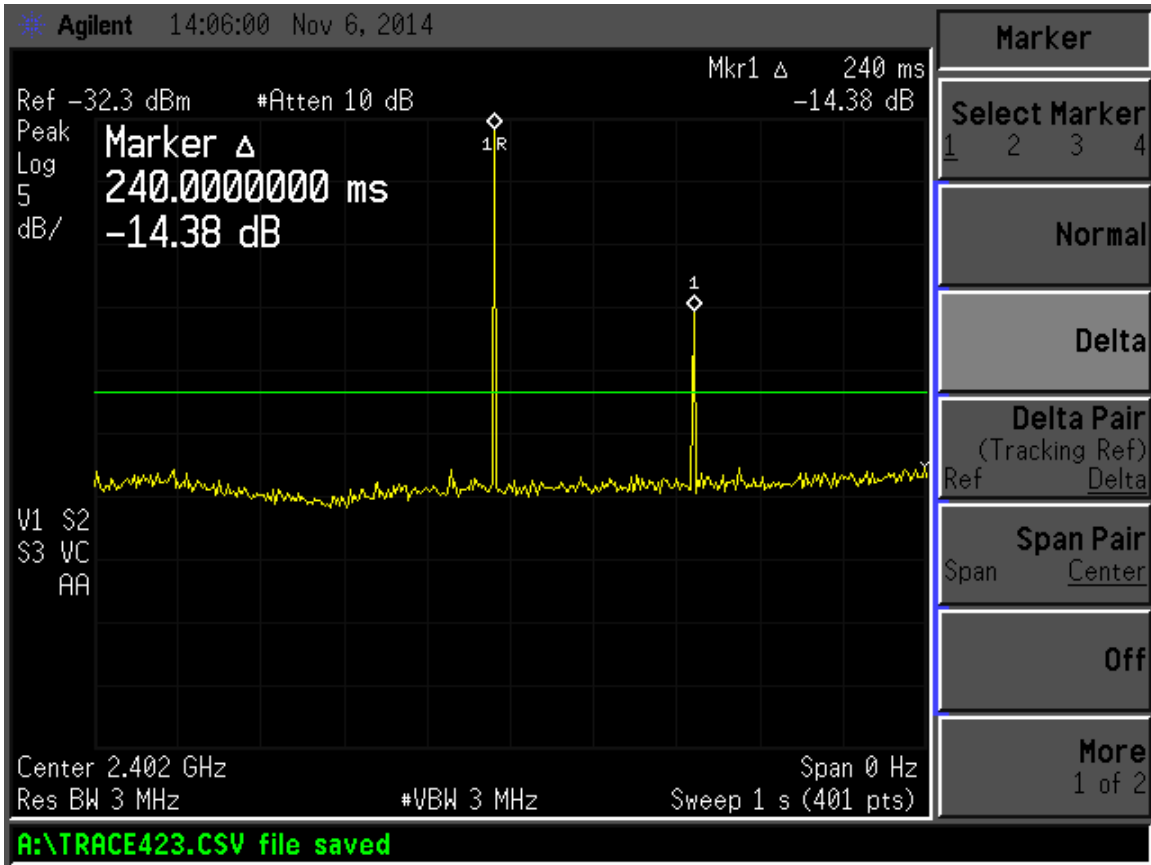


Figure 4. Transmitter Pulse Train within 1s

$$(1 \text{ ms})/240 \text{ ms} = 0.00416 = 0.416 \% \text{ percent}$$

$$\text{Duty Cycle} = 20 \text{ Log} (0.00416) = \boxed{\boxed{-48.0 \text{ dB}}}$$

The Duty Cycle factor applied in this test report is -20 dB.

2.8 Antenna Requirement (CFR 15.203)

The EUT has an integrated PIFA antenna; there are no external antenna ports.

Table 4 . Allowed Antenna(s)

MANUFACTURER	TYPE OF ANTENNA	MODEL	REPORT REFERENCE	GAIN dB _i	TYPE OF CONNECTOR
Acuity Brands Lighting	PIFA	Engineering Sample	Antenna	2.0	PIFA Antenna

2.9 Restricted Bands of Operation (CFR 15.205)

Only radiated harmonics and other spurious signals can be permitted to fall into the restricted bands of 15.205. All signals found in paragraph 2.7 above shall be examined for this requirement. Limits are based upon the limits of paragraph 15.209. Above 1 GHz, the limits are for Average value. See tables below for peak and average measurements. According to CFR 15.35, the peak limits can exceed the average limits by 20 dB.

2.10 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207)

The host device with the intentional radiation is DC powered; therefore this testing was deemed not applicable.

2.11 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249 (a), (e))

The EUT was placed into a continuous transmit mode of operation. A preliminary scan was performed on the EUT to find signal frequencies that were caused by the transmitter part of the product. To obtain the worse case results the EUT was tested in X, Y and Z axes to determine the worst case orientation. Radiated measurements below 30 MHz were tested with a RBW = 9 kHz; emissions below 1 GHz were tested with a RBW = 120 kHz and radiated measurements above 1 GHz were measured using a RBW =1 MHz. All VBW was set to three times the RBW value.

Test data is found in Tables 5-7.

US Tech Test Report:
 Report Number:
 Customer:
 FCC ID:
 IC:
 Issue Date:
 Model:

FCC Part 15.249/RSS 210
 14-0273
 Acuity Brands Lighting
 2ADCB-DTL02
 6715C-DTL02
 November 7, 2014
 DTL02

**Table 5 . Intentional Radiator, Peak Radiated Emissions (CFR 15.209),
 0.009 MHz to 30MHz**

Peak Radiated Emissions, Digital Device and Receiver							
Test By: CF	Test: Radiated Emissions- CFR15.209			Client: Acuity Brands Lighting			
	Project: 14-0273	Requirement 15.209		Model: DTL02			
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB)	Results (dBuV/m)	QP Limits (dBuV/m)	Distance / Polarity (meters)	Margin (dB)	Detector PK / QP
All emissions were at least 20 dB below the applicable limit.							

SAMPLE CALCULATION: N/A

Test Date: November 6, 2014

Tested by
 Signature: 

Name: Carrie Fincannon

US Tech Test Report:
 Report Number:
 Customer:
 FCC ID:
 IC:
 Issue Date:
 Model:

FCC Part 15.249/RSS 210
 14-0273
 Acuity Brands Lighting
 2ADCB-DTL02
 6715C-DTL02
 November 7, 2014
 DTL02

**Table 6 . Peak Fundamental and Harmonics, (CFR15.209, 15.249(a)),
 30 MHz to 25 GHz**


Radiated Fundamental and Harmonics Emissions								
Test By: JW	Test: Fundamental and Harmonics CFR 15.209, 15.249 (a)				Client: Acuity Brands Lighting			
	Project: 14-0273		Class: N/A		Model: DTL02			
Frequency (MHz)	Test Data (dBuV)	DF+FL*	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Peak Limits (dBuV/m)	Distance / Polarity (Meters)	Margin (dB)	Det PK / AVG
Low Channel								
2402	54.66	0	30.83	85.49	114	3.0m./VERT	28.5	PK
4804	53.40	1.5	2.04	56.94	74	3.0m./VERT	17.0	PK
Mid Channel								
2440	52.11	0	30.83	82.94	114	3.0m./VERT	31.1	PK
4880	52.84	1.5	2.17	56.51	74	3.0m./VERT	17.5	PK
High Channel								
2480	52.82	0	30.73	83.55	114	3.0m./VERT	30.4	PK
4960	49.24	1.5	2.54	51.78	74	3.0m./VERT	22.2	PK

All other emissions were at least 20 dB below the applicable limit.
 Note: The transmitter was programmed to transmit at >98% duty cycle

Sample Calculation at 2402 MHz:

Magnitude of Measured Frequency	54.66 dBuV
+Correction Factors	30.83 dB/m
Corrected Result	85.49 dBuV/m

Test Date: November 5, 2014

Tested by
 Signature: 

Name: John Wynn

US Tech Test Report:
 Report Number:
 Customer:
 FCC ID:
 IC:
 Issue Date:
 Model:

FCC Part 15.249/RSS 210
 14-0273
 Acuity Brands Lighting
 2ADCB-DTL02
 6715C-DTL02
 November 7, 2014
 DTL02

**Table 7 . AVERAGE Fundamental and Harmonics, (CFR15.209, 15.249(a)),
 30 MHz to 25 GHz**

Radiated Fundamental and Harmonics Emissions								
Test By: JW	Test: Fundamental and Harmonics CFR 15.249 (a)				Client: Acuity Brands Lighting			
	Project: 14-0273		Class: N/A		Model: DTL02			
Frequency (MHz)	Test Data (dBuV)	DF+FL	AF+CL- PA+DC (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarity (Meters)	Margin (dB)	Det PK / AVG
Low Channel								
2402	53.01	-20.0	30.83	63.84	94	3.0m./VERT	30.2	AVG
4804	49.23	-18.5	2.04	32.77	54	3.0m./VERT	21.2	AVG
Mid Channel								
2440	50.99	-20.0	30.83	61.82	94	3.0m./VERT	32.2	AVG
4960	49.31	-18.5	2.17	32.98	54	3.0m./VERT	21.0	AVG
High Channel								
2480	51.74	-20.0	30.73	62.47	94	3.0m./VERT	31.5	AVG
4960	49.24	-18.5	2.54	26.55	54	3.0m./VERT	27.4	AVG

All other emissions were at least 20 dB below the applicable limit.


*duty cycle factor = -20 dB

Note: The transmitter was programmed to transmit at >98% duty cycle

Sample Calculation at 2402 MHz:

Magnitude of Measured Frequency	53.01 dBuV
+Correction Factors	10.83 dB/m
Corrected Result	63.84 dBuV/m

Test Date: November 5, 2014

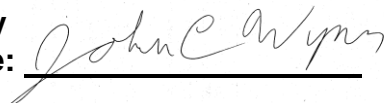Tested by
 Signature: 

Name: John Wynn

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

2.12 20 dB Bandwidth Measurement per CFR 15.249, 99% Occupied Bandwidth (IC RSS 210, A8.1)

These measurements were performed while the EUT was in a constant transmit mode. A method similar to the marker delta method was used to capture the points. The RBW was set to approximately 1/100 of the manufacturers claimed RBW and with the VBW \geq RBW.

Table 8 . 20 dB Bandwidth and 99% Occupied Bandwidth

Frequency (MHz)	20 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
2402.00	1.26	1.11
2440.00	1.27	1.15
2480.00	1.26	1.09

Test Date: November 6, 2014

Tested by
Signature: 

Name: Carrie Fincannon

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

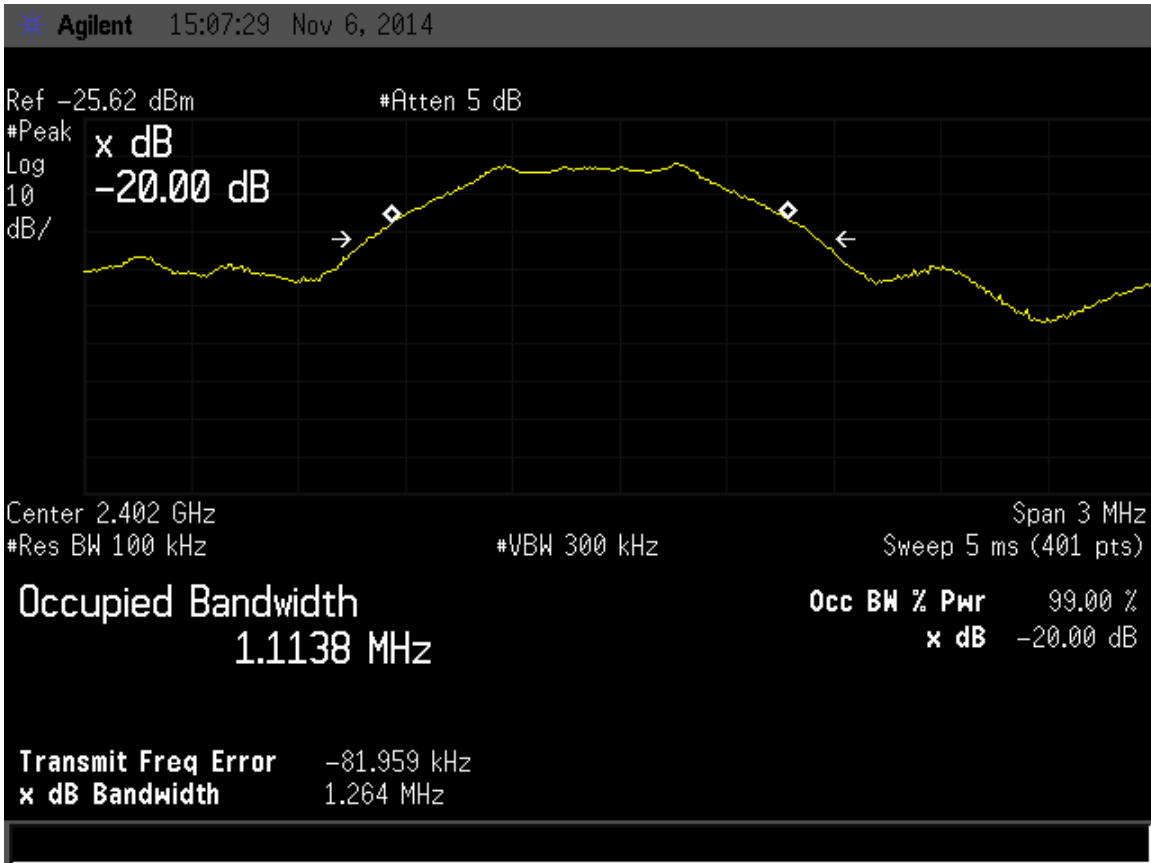


Figure 5. Low Channel 20 dB Bandwidth

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

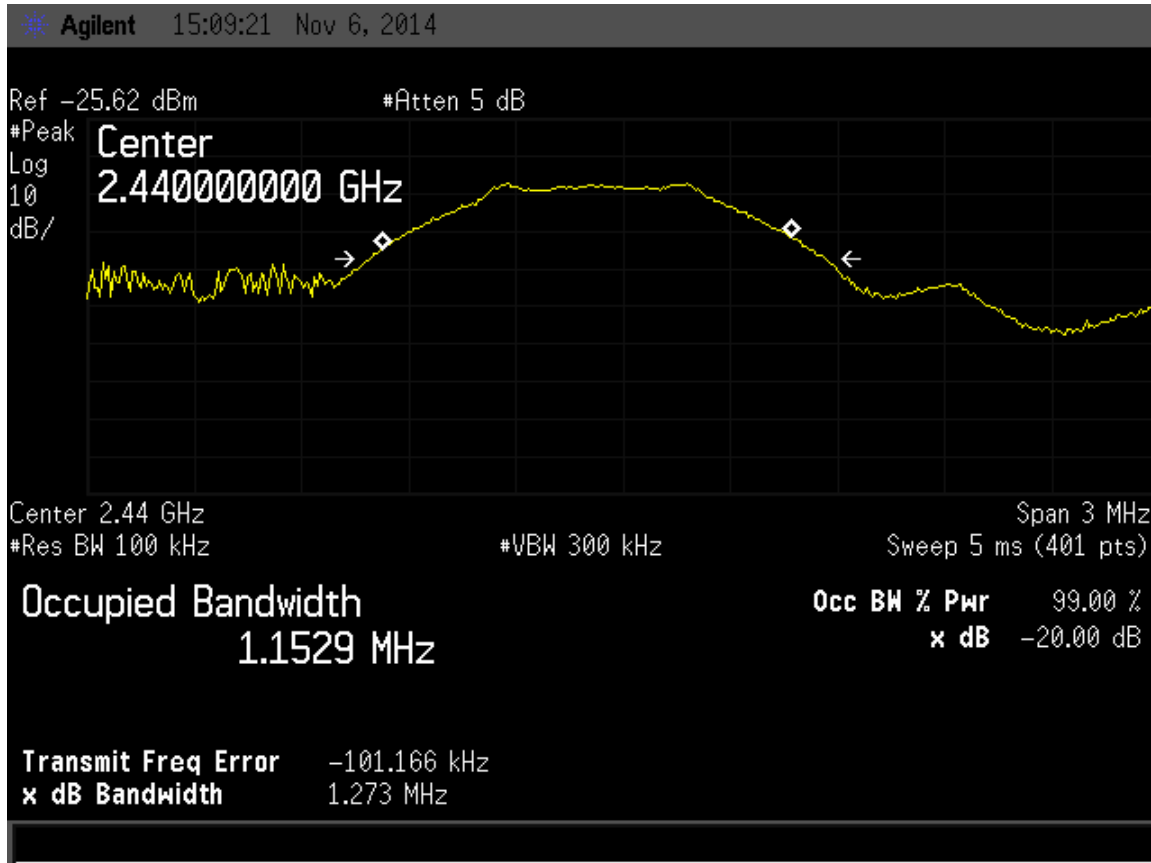


Figure 6. Mid Channel 20 dB Bandwidth

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

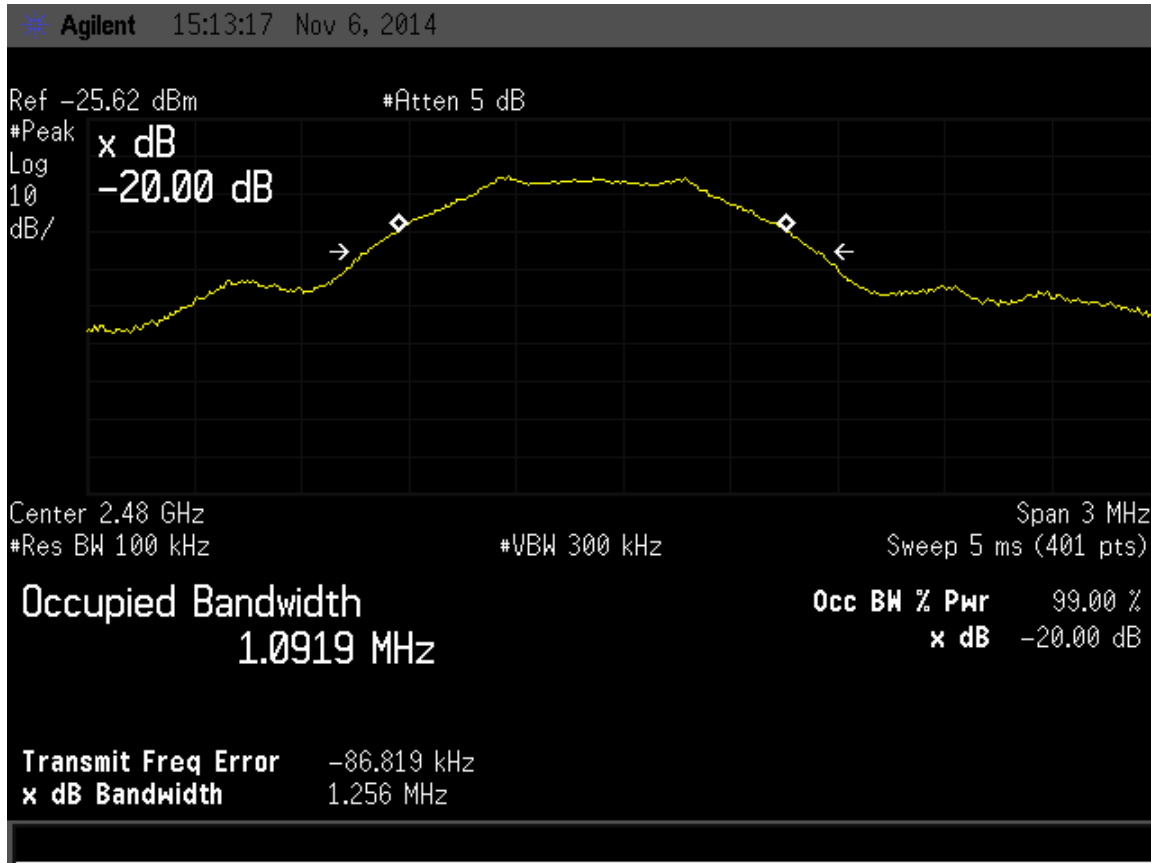


Figure 7. High Channel 20 dB Bandwidth

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

2.13 Band Edge Measurements (CFR15.249(d))

Band Edge measurements were made using the marker delta procedure is cited in ANSI C63.10:2009 section 6.9.3. Per the procedure the low and high channels were evaluated to show compliance to the band edge requires of this subpart. The peak at the highest EUT related emission outside the upper and lower occupied bandwidth was compared to the restricted band limits. A measurement was made of the fundamental and the emission was measured using a spectrum analyzer in peak detection mode. A Resolution Bandwidth of 1% to 5% of the total span was used. This procedure was repeated for both channels. The limits were derived as described in the following sections.

Note: The transmitter was programmed to transmit at >98% duty cycle

2.13.1 High Band Edge

Above 2483.5 MHz, the limit per section 15.249(d) is 50 dB below the fundamental or the value expressed by CFR 15.209 (54 dBuV/m) whichever is the lesser attenuation.

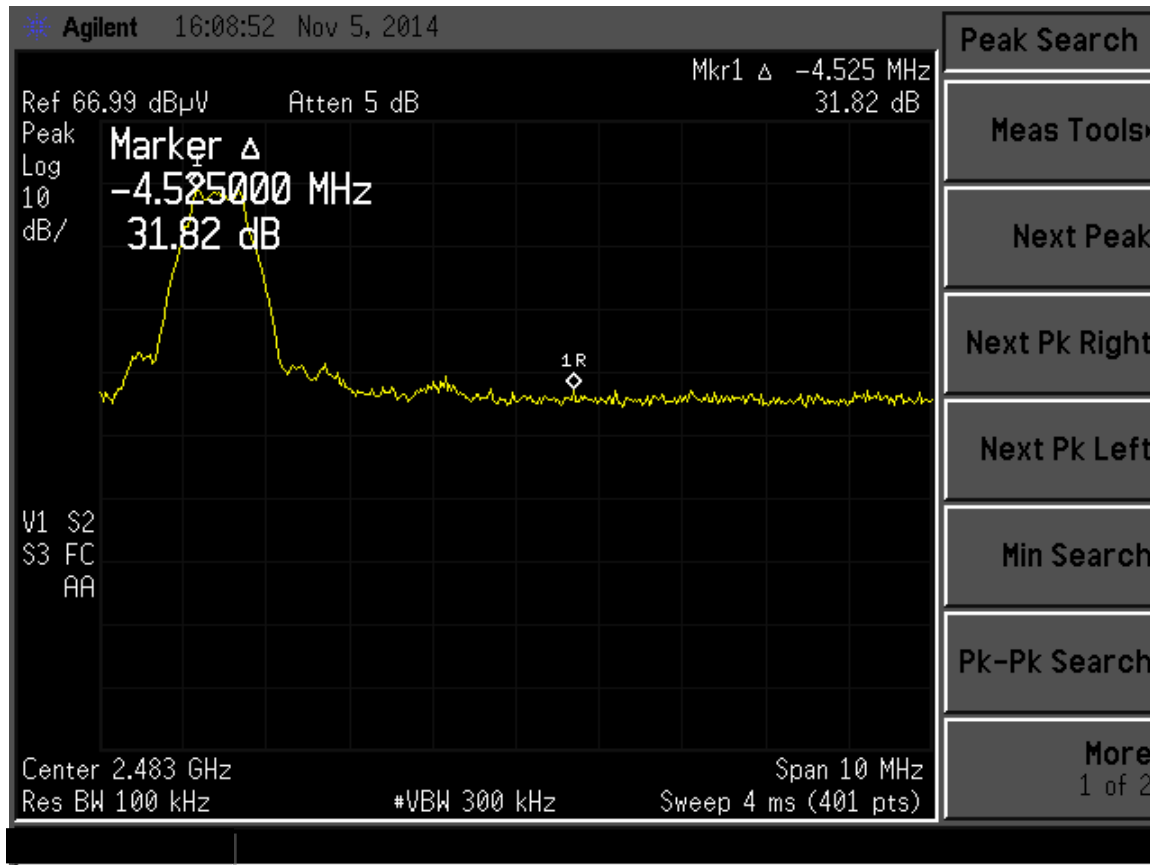


Figure 8. Radiated Band Edge – High Channel Delta PK

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

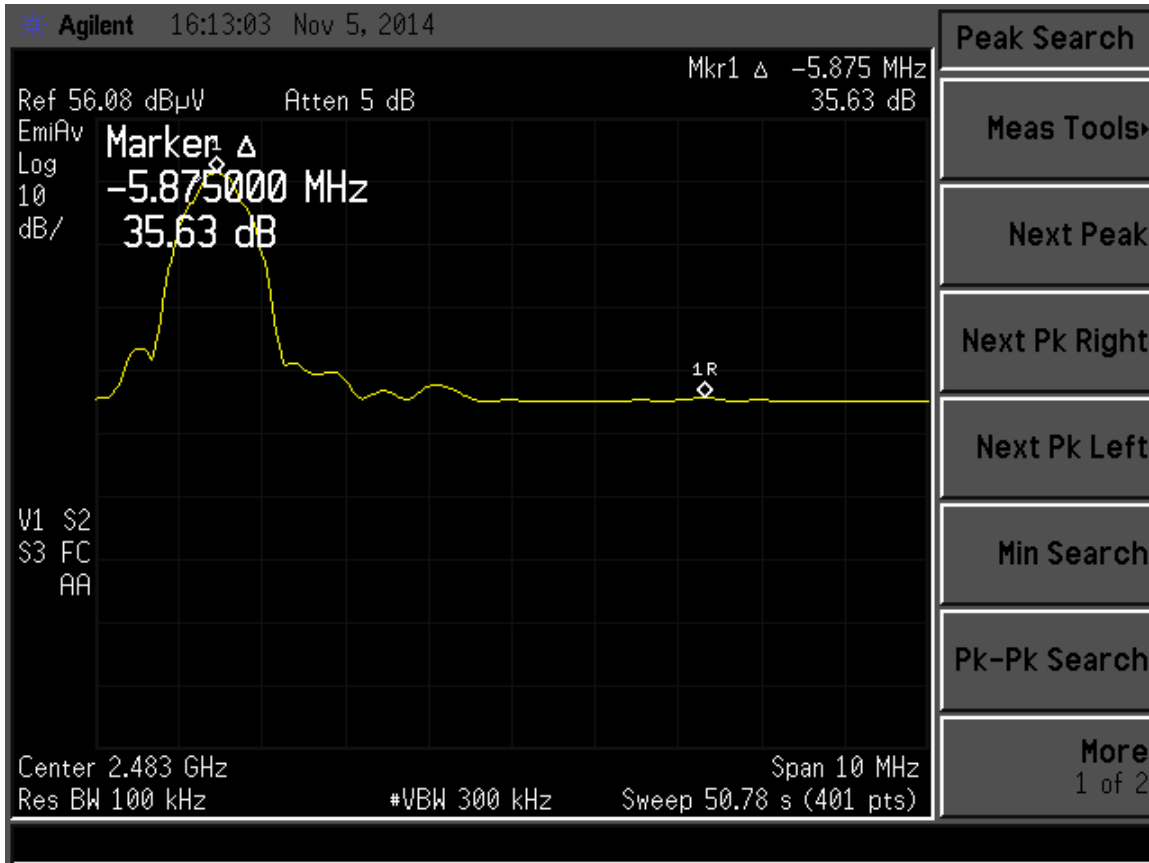


Figure 9. Radiated Band Edge – High Channel Delta AVG

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

The PEAK High Channel fundamental recorded in Table 6 is 83.55 dBuV/m:

Magnitude of Fundamental (PK)	83.55 dBuV/m
- Delta (from figure 8)	31.82 dB
Measured Difference	51.73 dBuV/m
Applied Limit	74.00 dBuV/m
-Measured Difference	51.73 dBuV/m
Passing Margin	22.27 dB

The AVG High Channel fundamental recorded in Table 7 is 62.47 dBuV/m;

Magnitude of Fundamental (AVG)	62.47 dBuV/m
- Delta (from figure 9)	35.63 dB
Measured Difference	26.84 dBuV/m
-Duty Factor	20.00 dB
Corrected Difference	6.84 dBuV/m
Applied Limit	54.00 dBuV/m
-Corrected Difference	6.84 dBuV/m
Passing Margin	47.16 dB

US Tech Test Report:
 Report Number:
 Customer:
 FCC ID:
 IC:
 Issue Date:
 Model:

FCC Part 15.249/RSS 210
 14-0273
 Acuity Brands Lighting
 2ADCB-DTL02
 6715C-DTL02
 November 7, 2014
 DTL02

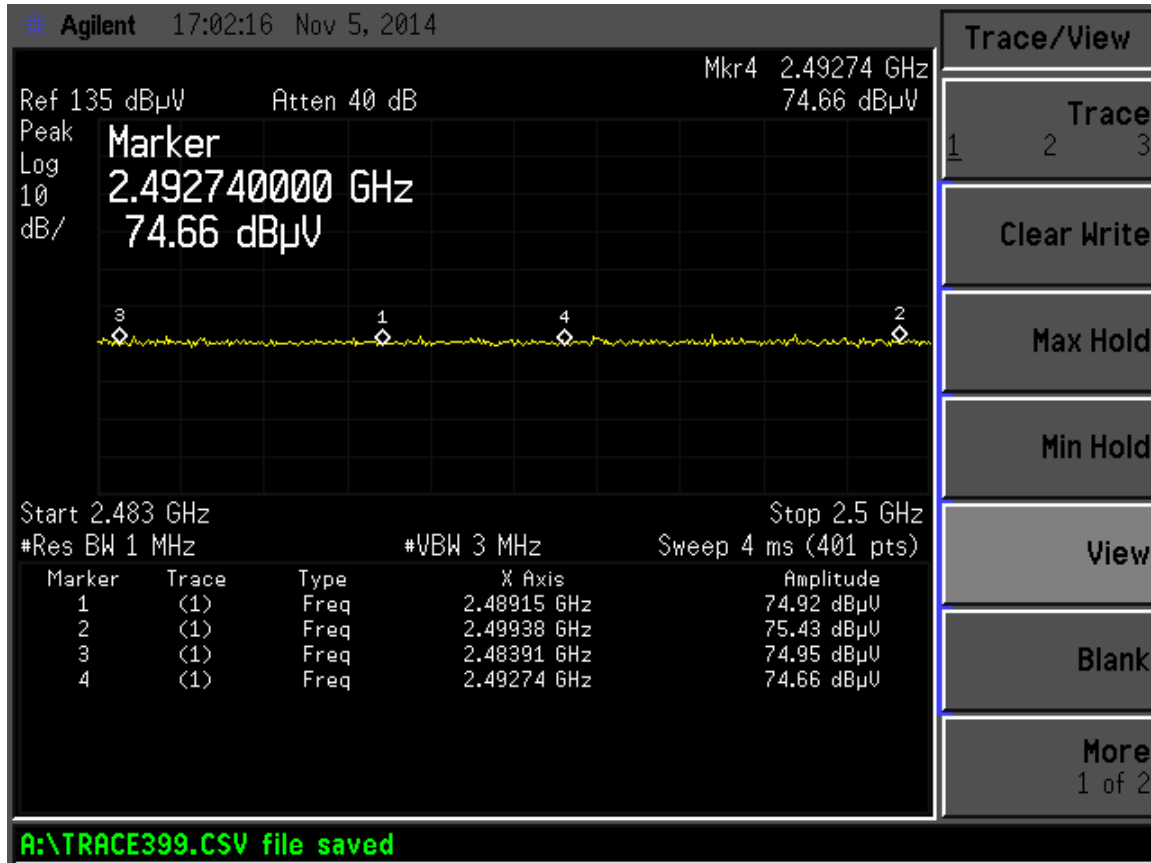


Figure 10. Radiated Restricted Band Measurements PK, 2.4835 GHz to 2.5 GHz

US Tech Test Report:
 Report Number:
 Customer:
 FCC ID:
 IC:
 Issue Date:
 Model:

FCC Part 15.249/RSS 210
 14-0273
 Acuity Brands Lighting
 2ADCB-DTL02
 6715C-DTL02
 November 7, 2014
 DTL02

Table 9 . Radiated Restricted Band Measurements PK, 2.4835 GHz to 2.5 GHz

Test By: CF	Client: Acuity Brands Lighting						
	Project: 14-0273				Model: DTL02		
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Peak Limits (dBuV/m)	Distance / Polarity (Meters)	Margin (dB)	Det PK / AVG
2489	74.92	-4.59	70.33	74	3m/VERT	3.7	PK
2499	75.43	-4.58	70.85	74	3m/VERT	3.2	PK
2494	74.95	-4.59	70.36	74	3m/VERT	3.6	PK
2493	74.66	-4.59	70.07	74	3m/VERT	3.9	PK

Sample Calculation at 2489.00 MHz:

Magnitude of Measured Frequency	74.92 dBuV
+Correction Factors	-4.59 dB/m
Corrected Result	70.33 dBuV/m

Test Date: November 5, 2014

Tested by Signature: 

Name: Carrie Fincannon

US Tech Test Report:
 Report Number:
 Customer:
 FCC ID:
 IC:
 Issue Date:
 Model:

FCC Part 15.249/RSS 210
 14-0273
 Acuity Brands Lighting
 2ADCB-DTL02
 6715C-DTL02
 November 7, 2014
 DTL02

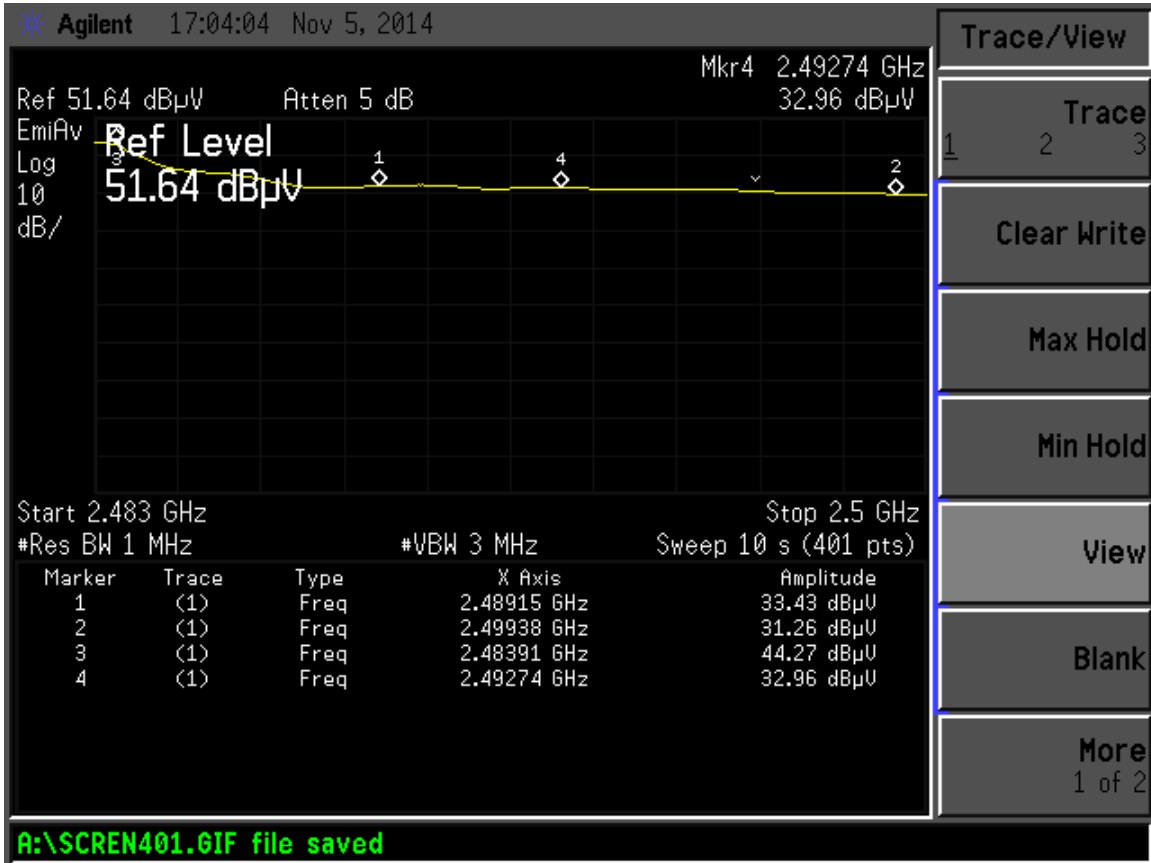


Figure 11. Radiated Restricted Band Measurements AVG, 2.4835 GHz to 2.5 GHz

US Tech Test Report:
 Report Number:
 Customer:
 FCC ID:
 IC:
 Issue Date:
 Model:

FCC Part 15.249/RSS 210
 14-0273
 Acuity Brands Lighting
 2ADCB-DTL02
 6715C-DTL02
 November 7, 2014
 DTL02

Table 10 . Radiated Restricted Band Measurements AVG, 2.4835 GHz to 2.5 GHz

Test By: CF	Client: Acuity Brands Lighting						
	Project: 14-0273				Model: DTL02		
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	AVG Limits (dBuV/m)	Distance / Polarity (Meters)	Margin (dB)	Det PK / AVG
2489	33.43	-4.59	28.84	54.0	3m/VERT	25.2	AVG
2499	31.26	-4.59	26.68	54.0	3m/VERT	27.3	AVG
2494	44.27	-4.59	39.68	54.0	3m/VERT	14.3	AVG
2493	32.96	-4.59	28.37	54.0	3m/VERT	25.6	AVG

Sample Calculation at 2489.00 MHz:

Magnitude of Measured Frequency	33.43 dBuV
+Correction Factors	-4.59 dB/m
Corrected Result	28.84 dBuV/m

Test Date: November 5, 2014

Tested by
Signature: 

Name: Carrie Fincannon

2.13.2 Low Band Edge

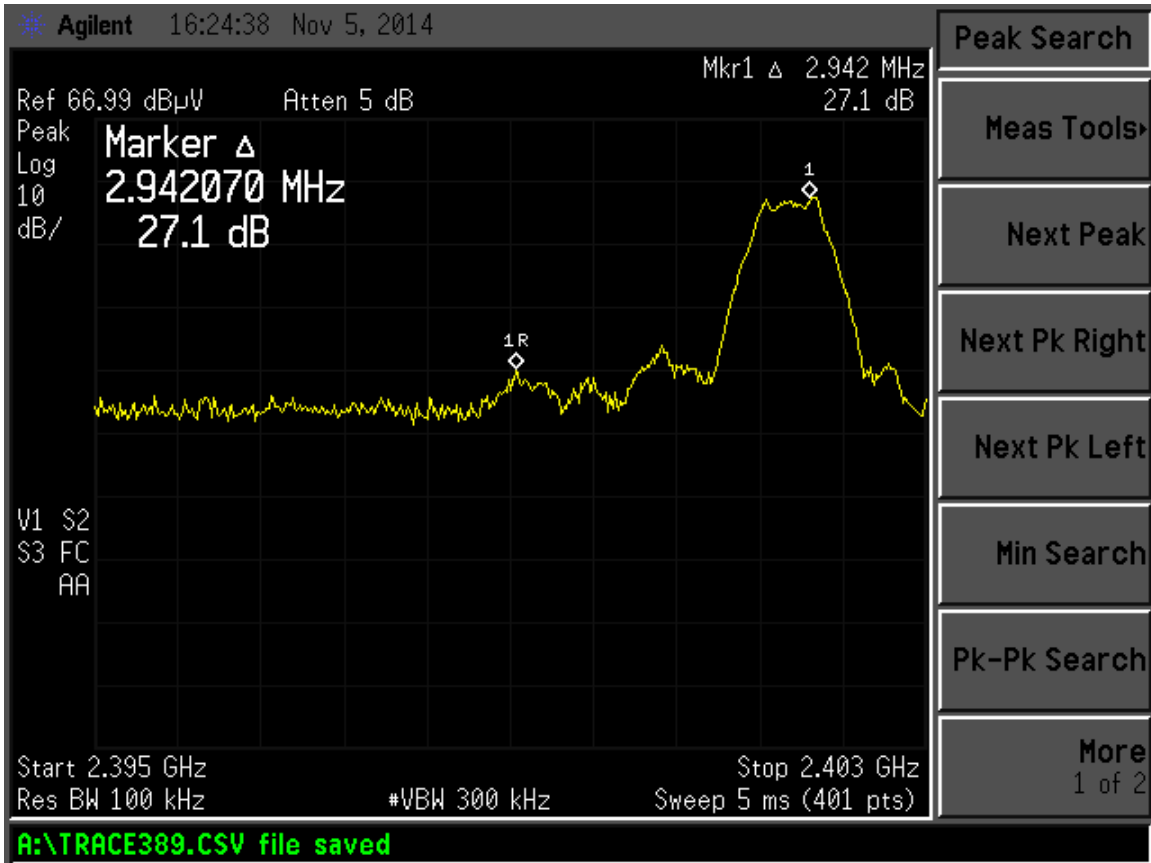


Figure 12. Radiated Band Edge – Low Channel Delta PK

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

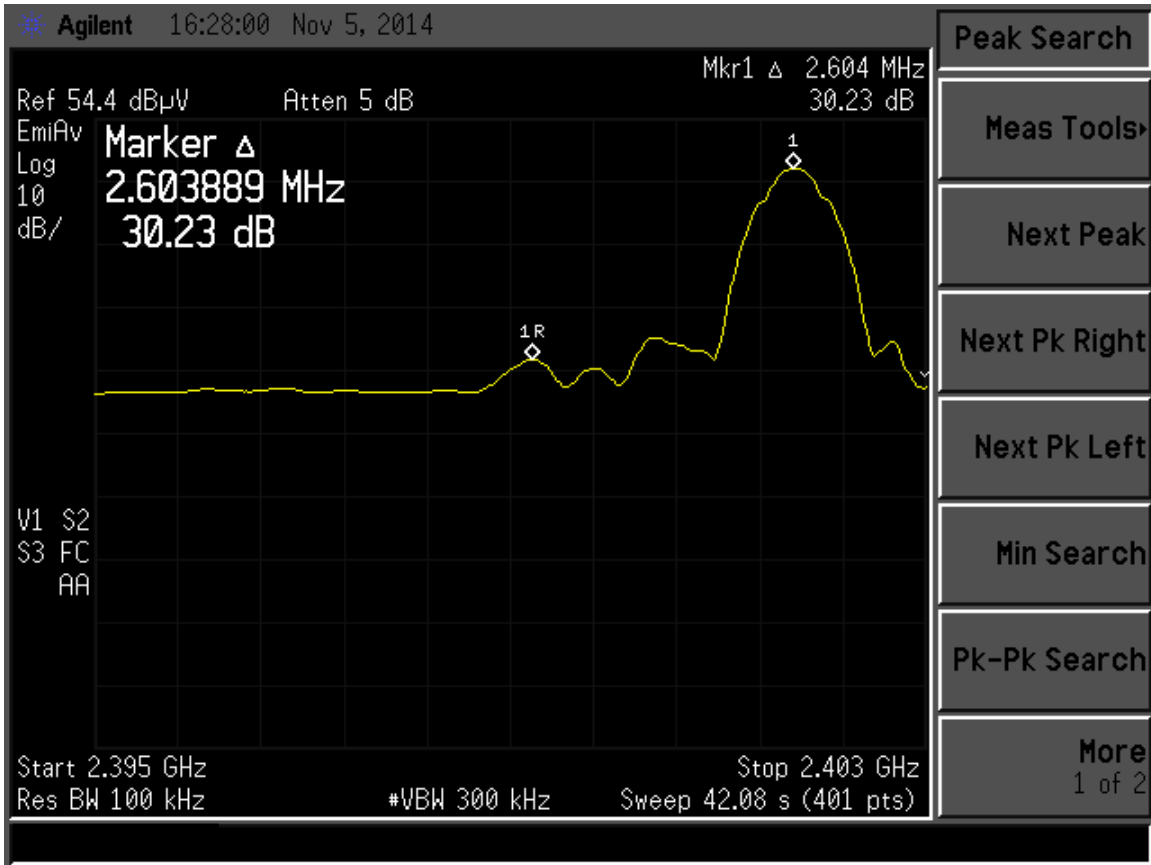


Figure 13. Radiated Band Edge – Low Channel Delta AVG

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

The PEAK Low Channel fundamental recorded in Table 6 is 85.49 dBuV/m:

Magnitude of Fundamental (PK)	85.49 dBuV/m
- Delta (from figure 12)	27.10 dB
Measured Difference	58.39 dBuV/m
Applied Limit	74.00 dBuV/m
-Measured Difference	58.39 dBuV/m
Passing Margin	15.61 dB

The AVG Low Channel fundamental recorded in Table 7 is 63.84 dBuV/m;

Magnitude of Fundamental (AVG)	63.84 dBuV/m
- Delta (from figure 13)	35.63 dB
Measured Difference	28.21 dBuV/m
-Duty Factor	20.00 dB
Corrected Difference	8.21 dBuV/m
Applied Limit	54.00 dBuV/m
-Corrected Difference	8.21 dBuV/m
Passing Margin	45.79 dB

US Tech Test Report:
 Report Number:
 Customer:
 FCC ID:
 IC:
 Issue Date:
 Model:

FCC Part 15.249/RSS 210
 14-0273
 Acuity Brands Lighting
 2ADCB-DTL02
 6715C-DTL02
 November 7, 2014
 DTL02

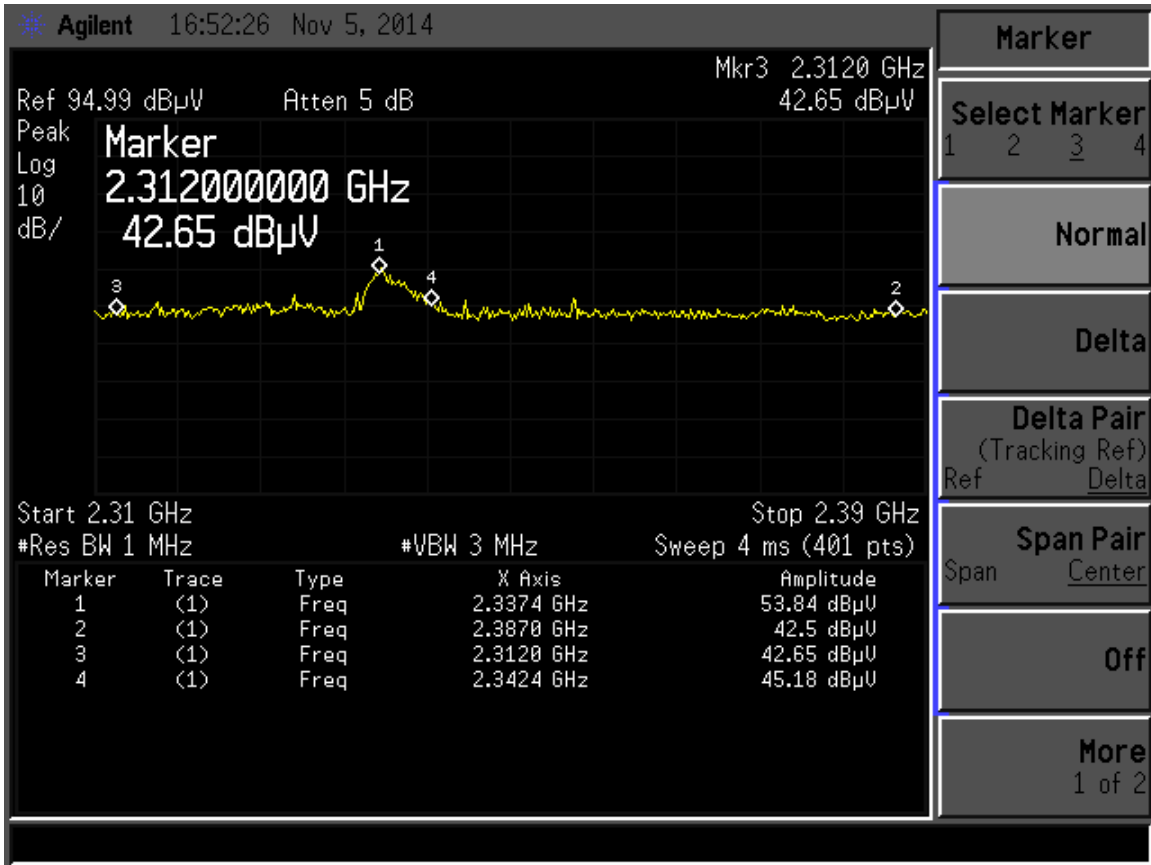


Figure 14. Radiated Restricted Band Measurements PK, 2.31 GHz to 2.39 GHz

US Tech Test Report:
 Report Number:
 Customer:
 FCC ID:
 IC:
 Issue Date:
 Model:

FCC Part 15.249/RSS 210
 14-0273
 Acuity Brands Lighting
 2ADCB-DTL02
 6715C-DTL02
 November 7, 2014
 DTL02

Table 11 . Radiated Restricted Band Measurements PK, 2.31 GHz to 2.39 GHz

Test By: CF	Client: Acuity Brands Lighting						
	Project: 14-0273				Model: DTL02		
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Peak Limits (dBuV/m)	Distance / Polarity (Meters)	Margin (dB)	Det PK / AVG
2337	53.84	-4.64	49.20	74.0	3.0m./VERT	24.8	PK
2387	42.50	-4.79	37.71	74.0	3.0m./VERT	36.3	PK
2312	42.65	-4.67	37.98	74.0	3.0m./VERT	36.0	PK
2342	45.18	-4.63	40.55	74.0	3.0m./VERT	33.5	PK

Sample Calculation at 2337.00 MHz:

Magnitude of Measured Frequency	53.84 dBuV
+Correction Factors	-4.64 dB/m
Corrected Result	49.20 dBuV/m

Test Date: November 5, 2014

Tested by
Signature: 

Name: Carrie Fincannon

US Tech Test Report:
 Report Number:
 Customer:
 FCC ID:
 IC:
 Issue Date:
 Model:

FCC Part 15.249/RSS 210
 14-0273
 Acuity Brands Lighting
 2ADCB-DTL02
 6715C-DTL02
 November 7, 2014
 DTL02

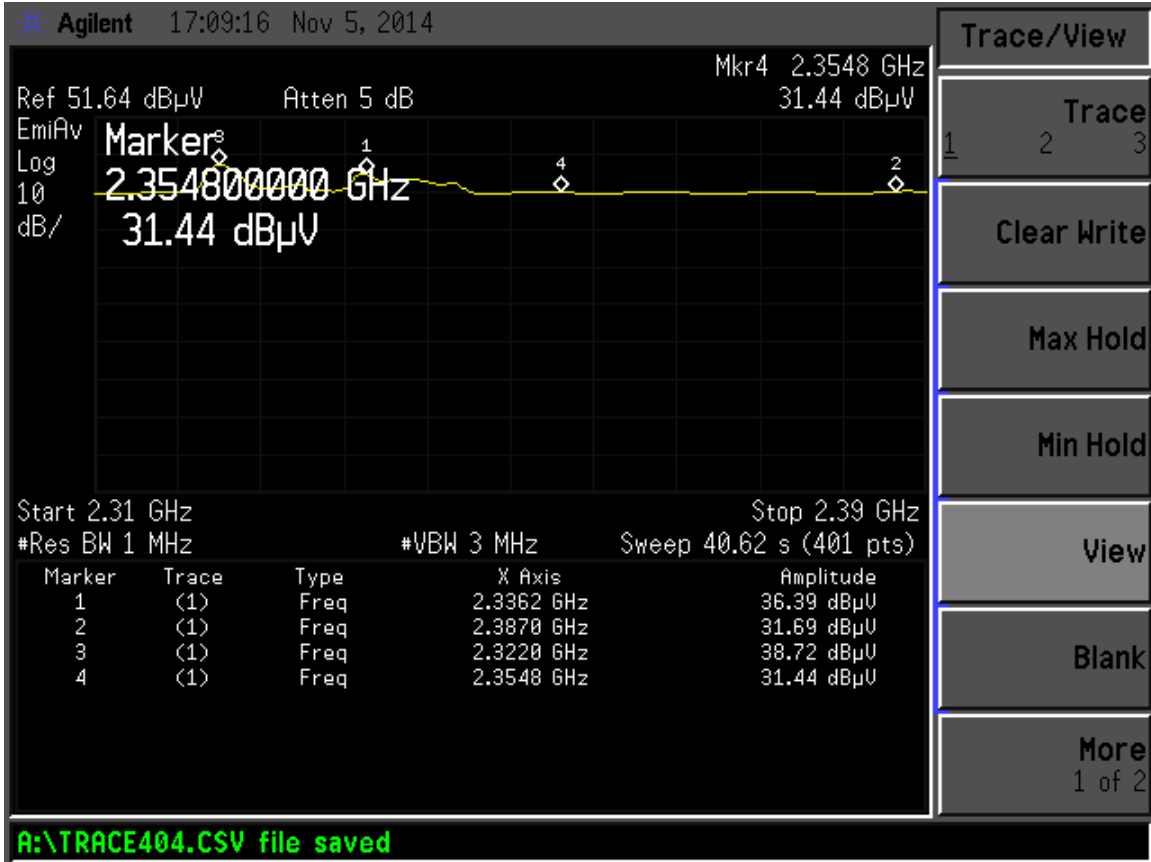


Figure 15. Radiated Restricted Band Measurements AVG, 2.31 GHz to 2.39 GHz

US Tech Test Report:
 Report Number:
 Customer:
 FCC ID:
 IC:
 Issue Date:
 Model:

FCC Part 15.249/RSS 210
 14-0273
 Acuity Brands Lighting
 2ADCB-DTL02
 6715C-DTL02
 November 7, 2014
 DTL02

Table 12 . Radiated Restricted Band Measurements AVG, 2.31 GHz to 2.39 GHz

Test By: CF	Client: Acuity Brands Lighting						
	Project: 14-0273				Model: DTL02		
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Peak Limits (dBuV/m)	Distance / Polarity (Meters)	Margin (dB)	Det PK / AVG
2336	36.39	-4.64	31.75	54.0	3.0m./VERT	22.2	AVG
2387	31.69	-4.79	26.90	54.0	3.0m./VERT	27.1	AVG
2322	38.72	-4.65	34.07	54.0	3.0m./VERT	19.9	AVG
2355	31.44	-4.90	26.54	54.0	3.0m./VERT	27.5	AVG

Sample Calculation at 2336.00 MHz:

Magnitude of Measured Frequency	36.39 dBuV
+Correction Factors	-4.64 dB/m
Corrected Result	31.75 dBuV/m

Test Date: November 5, 2014

Tested by
 Signature: 

Name: Carrie Fincannon

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

2.14 Unintentional Radiator, Power Conducted Emissions (CFR 15.107, 15.207)

The unit was set up and measured for conducted power line emissions. The measurement setup and test procedures were in accordance with ANSI C63.4:2003, paragraph 7. The EUT is connected to the power lines through the ac adaptor. This configuration is used to test and show compliance to CFR 15.207/CFR15.107 for powerline conducted emissions.

Measurements were made over the 150 kHz to 30 MHz frequency range for the unit. The measurement receiver was connected to the RF (receiver) Port on the LISN and each power lead was individually measured. Test results are shown on Table 13 for the unit.

The EUT was battery powered; therefore this test was deemed not applicable.

NOTE: The test data provided in this section is to support the Verification requirement for the digital apparatus.

US Tech Test Report:
 Report Number:
 Customer:
 FCC ID:
 IC:
 Issue Date:
 Model:

FCC Part 15.249/RSS 210
 14-0273
 Acuity Brands Lighting
 2ADCB-DTL02
 6715C-DTL02
 November 7, 2014
 DTL02

Table 13 . Power line Conducted Emissions Data, Class B

Tested By: JW	Test: FCC Power Line Conducted Emissions 150 KHz – 30 MHz			Client: Acuity Brands Lighting		
	Project: 14-0273			Model: DTL02		
Frequency (MHz)	Test Data (dBuV)	LISN+CL-PA (dB)	Results (dBuV)	Limits (dBuV)	Margin (dB)	DET PK/QP /AVG
The EUT was battery powered; therefore this test was deemed not applicable.						

Test Date: November 6, 2014

Tested by Signature: 

Name: Carrie Fincannon

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

2.15 Unintentional Radiator, Radiated Emissions (CFR 15.109, 15.209)

Radiated emissions disturbance Measurements were performed with an instrument having both peak and quasi-peak detectors over the frequency range of 30 MHz to 12.5 GHz. Measurements of the radiated emissions were made with the receiver antenna at a distance of 3 m from the boundary of the test unit.

For measurements from 30 MHz to 12.5 GHz, the test antenna was varied from 1 m to 4 m in height while watching the analyzers' display for the maximum magnitude of the signal at the test frequency. The antenna polarization (horizontal or vertical) and test sample azimuth were varied during the measurements to find the maximum field strength readings to record.

The worst-case radiated emission was 7.7 dB below the limit at 938.66 MHz. This signal is found in Table 14. All other radiated emissions were 11.4 dB or more below the limit.

The EUT was tested in normal operation mode alongside Acuity Brands Radio Module DTL01.

NOTE: The test data provided in this section is to support the Verification requirement for the digital apparatus.

US Tech Test Report:
 Report Number:
 Customer:
 FCC ID:
 IC:
 Issue Date:
 Model:

FCC Part 15.249/RSS 210
 14-0273
 Acuity Brands Lighting
 2ADCB-DTL02
 6715C-DTL02
 November 7, 2014
 DTL02

Table 14. Unintentional Radiator, Peak Radiated Emissions (CFR 15.109, 15.209), 30 MHz – 1000 MHz


Peak Radiated Emissions, Digital Device and Receiver							
Test By: JW	Test: CFR 15.109, 15.209 30 MHz to 1GHz			Client: Acuity Brands Lighting			
	Project: 14-0273	Requirement 15.109/15.209, Class: B		Model: DTL02			
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB)	Results (dBuV/m)	AVG Limits (dBuV/m)	Distance / Polarity (meters)	Margin (dB)	Detector PK / QP
938.70	36.58	-1.96	34.62	46.0	3m./HORZ	11.4	PK
368.30	42.95	-11.52	31.43	46.0	3m./VERT	14.6	PK
444.44	44.92	-10.47	34.45	46.0	3m./VERT	11.6	PK
935.12	36.96	-2.76	34.20	46.0	3m./VERT	11.8	PK
938.66	41.10	-2.76	38.34	46.0	3m./VERT	7.7	PK
All other emissions were greater than 20 dB from the limit.							

Tested from 30 MHz to 1 GHz

Sample Calculation at 938.66 MHz:

Magnitude of Measured Frequency	41.10 dBuV
+Correction Factors	-2.76 dB/m
Corrected Result	38.34 dBuV/m

Test Date: November 5, 2014

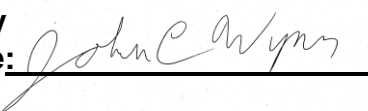Tested by
 Signature: 

Name: John C. Wynn

US Tech Test Report:
 Report Number:
 Customer:
 FCC ID:
 IC:
 Issue Date:
 Model:

FCC Part 15.249/RSS 210
 14-0273
 Acuity Brands Lighting
 2ADCB-DTL02
 6715C-DTL02
 November 7, 2014
 DTL02


Table 15. Unintentional Radiator, Peak Radiated Emissions (CFR 15.109, 15.209), 1 GHz – 12.5 GHz

Peak Radiated Emissions, Digital Device and Receiver							
Test By: JW	Test: Radiated Emissions- 1 GHz to 12.5 GHz			Client: Acuity Brands Lighting			
	Project: 14-0273	Requirement 15.109/15.209, Class: B		Model: DTL02			
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB)	Results (dBuV/m)	AVG Limits (dBuV/m)	Distance / Polarity (meters)	Margin (dB)	Detector PK / AVG
All emissions were greater than 20 dB from the limit.							

Tested from 1 GHz to 12.5 GHz

Sample Calculation at: N/A

Test Date: November 5, 2014

Tested by
 Signature: 

Name: John C. Wynn

US Tech Test Report:
Report Number:
Customer:
FCC ID:
IC:
Issue Date:
Model:

FCC Part 15.249/RSS 210
14-0273
Acuity Brands Lighting
2ADCB-DTL02
6715C-DTL02
November 7, 2014
DTL02

2.16 Measurement Uncertainty

The measurement uncertainties were calculated using the method detailed in CISPR 16-4. A coverage factor of $k=2$ was used to give a level of confidence of approximately 95%.

2.16.1 Conducted Emissions Measurement Uncertainty

Measurement Uncertainty (within a 95% confidence level) for this test is ± 2.8 dB.

The EU was battery-powered; therefore this test was not applicable.

2.16.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is ± 5.39 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is ± 5.18 dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is ± 5.21 dB.

The data listed in this test report does have sufficient margin to negate the effects of uncertainty; therefore, the EUT unconditionally meets this requirement.