

FCC REPORT

Applicant: Monoprice, Inc.
Address of Applicant: 1 Pointe Dr Suite# 400 Brea, CA92821, USA
Manufacturer/Factory: Guangzhou DSPPA Audio Co., Ltd.
Address of Manufacturer/Factory: No.1 Xiahe Rd, Jianggao Town, Baiyun District, Guangzhou, China
Equipment Under Test (EUT)
Product Name: 40W Wall Mount Music Amplifier
Model No.: 36374
Trade Mark: Monoprice
FCC ID: 2ADDH-36374
Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249
Date of sample receipt: December 17, 2018
Date of Test: December 17-December 24, 2018
Date of report issued: December 25, 2018
Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo

Laboratory Manager


This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	December 25, 2018	Original

Prepared By:  **Date:** December 25, 2018

Project Engineer

Check By:  **Date:** December 25, 2018

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION	7
5.6 ADDITIONAL INSTRUCTIONS.....	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA.....	9
7.1 ANTENNA REQUIREMENT.....	9
7.2 CONDUCTED EMISSIONS	10
7.3 RADIATED EMISSION METHOD.....	13
7.3.1 <i>Field Strength of The Fundamental Signal</i>	15
7.3.2 <i>Spurious emissions</i>	18
7.3.3 <i>Bandedge emissions</i>	29
7.4 20dB OCCUPY BANDWIDTH.....	38
8 TEST SETUP PHOTO.....	42
9 EUT CONSTRUCTIONAL DETAILS	44

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.4:2014 and ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	40W Wall Mount Music Amplifier
Model No.:	36374
Serial No.:	ADM835WAUAA240183
Test sample(s) ID:	GTS201812000141
Sample(s) Status	Engineered sample
Hardware Version:	HV1.0
Software Version:	SV1.0
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	PCB antenna
Antenna gain:	0dBi(declare by applicant)
Power supply:	AC 100-240V 50/60Hz
Test Voltage :	AC 120V/60Hz

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

Pre-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	95.11	96.96	96.42

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the "worst case" and "worst setup":

Y axis (see the test setup photo)

5.3 Description of Support Units

None.

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.6 Additional instructions

Software (Used for test) from client

Mode	Special test SW was built-in by manufacturer.
Power set	Default

6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2018	June 27 2019
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2018	June 27 2019
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2018	June 27 2019
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2018	June 27 2019
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2018	June 27 2019
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2018	June 27 2019
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2018	June 27 2019
11	Coaxial cable	GTS	N/A	GTS210	June 28 2018	June 27 2019
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2018	June 27 2019
13	40W Wall Mount Music Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2018	June 27 2019
14	40W Wall Mount Music Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2018	June 27 2019
15	40W Wall Mount Music Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2018	June 27 2019
16	Band filter	Amindeon	82346	GTS219	June 28 2018	June 27 2019
17	Power Meter	Anritsu	ML2495A	GTS540	June 28 2018	June 27 2019
18	Power Sensor	Anritsu	MA2411B	GTS541	June 28 2018	June 27 2019
19	Loop Antenna	Zhinan	ZN30900A	GTS215	June 28 2018	June 27 2019

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 28 2018	June 27 2019
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 28 2018	June 27 2019
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 28 2018	June 27 2019
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June 28 2018	June 27 2019

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 28 2018	June 27 2019

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<p>EUT Antenna:</p>	
<p><i>The antenna is PCB antenna, the best case gain of the antenna is 0dBi.</i></p> 	


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> 1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.2 for details														
Test results:	Pass														

Measurement data


The EUT was tested in GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation is the worst case.

EUT :	40W Wall Mount Music Amplifier	Model Name. :	36374
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC120V/60Hz	Test Mode :	Worst mode-GFSK

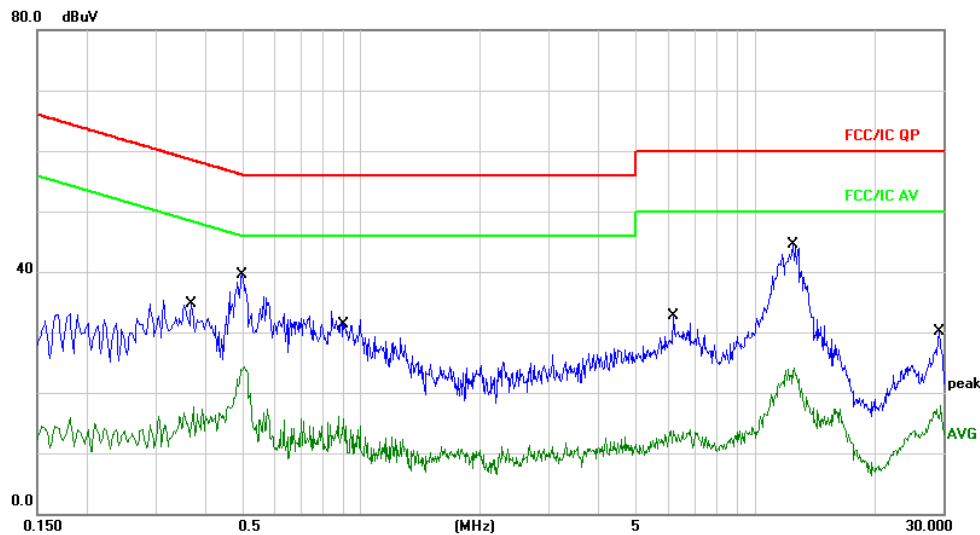

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.3700	25.06	9.66	34.72	58.50	-23.78	QP	
2		0.3700	8.05	9.66	17.71	48.50	-30.79	AVG	
3		0.4980	29.87	9.68	39.55	56.03	-16.48	QP	
4		0.4980	14.71	9.68	24.39	46.03	-21.64	AVG	
5		0.9020	22.38	9.70	32.08	56.00	-23.92	QP	
6		0.9020	5.98	9.70	15.68	46.00	-30.32	AVG	
7		6.2140	22.88	9.78	32.66	60.00	-27.34	QP	
8		6.2140	3.93	9.78	13.71	50.00	-36.29	AVG	
9	*	12.5620	34.59	9.88	44.47	60.00	-15.53	QP	
10		12.5620	14.29	9.88	24.17	50.00	-25.83	AVG	
11		29.2460	19.98	10.08	30.06	60.00	-29.94	QP	
12		29.2460	7.83	10.08	17.91	50.00	-32.09	AVG	

EUT :	40W Wall Mount Music Amplifier	Model Name. :	36374
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC120V/60Hz	Test Mode :	Worst mode-GFSK

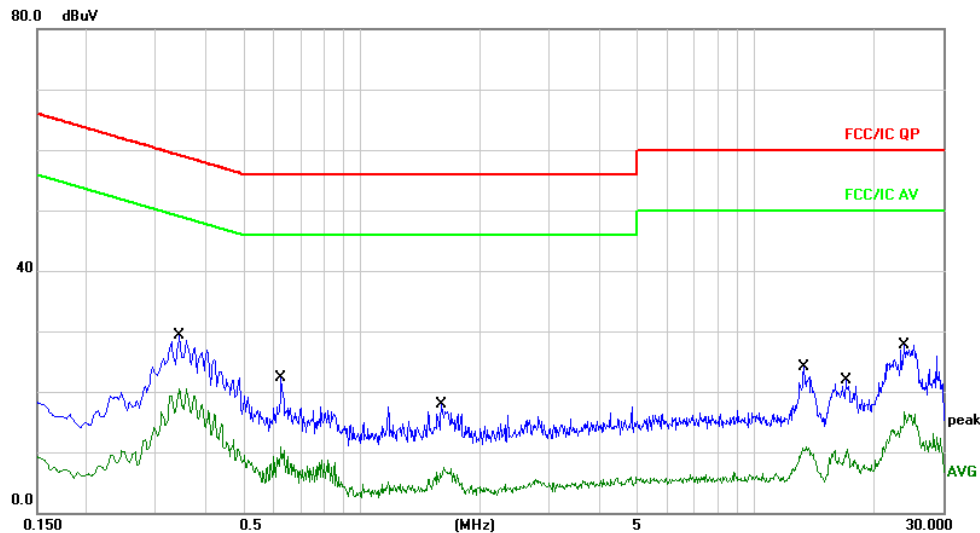



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3460	19.56	9.65	29.21	59.06	-29.85	QP	
2	*	0.3460	10.80	9.65	20.45	49.06	-28.61	AVG	
3		0.6260	12.57	9.67	22.24	56.00	-33.76	QP	
4		0.6260	1.28	9.67	10.95	46.00	-35.05	AVG	
5		1.5940	8.13	9.71	17.84	56.00	-38.16	QP	
6		1.5940	-2.12	9.71	7.59	46.00	-38.41	AVG	
7		13.2940	14.13	9.89	24.02	60.00	-35.98	QP	
8		13.2940	0.94	9.89	10.83	50.00	-39.17	AVG	
9		16.9660	11.88	9.95	21.83	60.00	-38.17	QP	
10		16.9660	0.58	9.95	10.53	50.00	-39.47	AVG	
11		24.0020	17.72	10.02	27.74	60.00	-32.26	QP	
12		24.0020	6.61	10.02	16.63	50.00	-33.37	AVG	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Radiated Emission Method

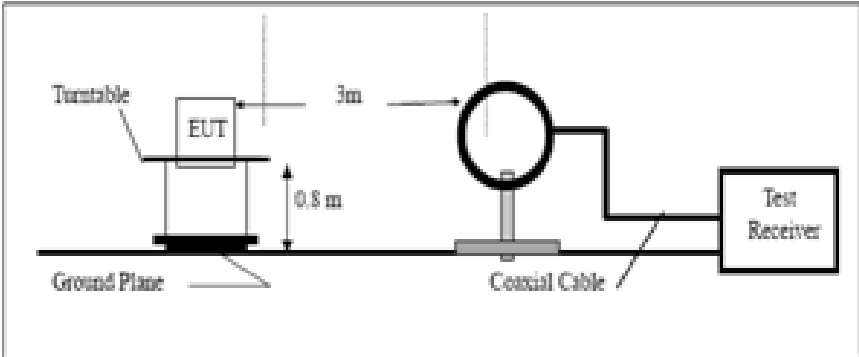Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.00		Average Value	
		114.00		Peak Value	
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)		Remark	
	0.009MHz-0.490MHz	2400/F(kHz) @300m		Quasi-peak Value	
	0.490MHz-1.705MHz	24000/F(kHz) @30m		Quasi-peak Value	
	1.705MHz-30.0MHz	30 @30m		Quasi-peak Value	
	30MHz-88MHz	100 @3m		Quasi-peak Value	
	88MHz-216MHz	150 @3m		Quasi-peak Value	
	216MHz-960MHz	200 @3m		Quasi-peak Value	
	960MHz-1GHz	500 @3m		Quasi-peak Value	
	Above 1GHz	500 @3m		Average Value	
5000 @3m		Peak Value			
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	Below 1GHz				
					

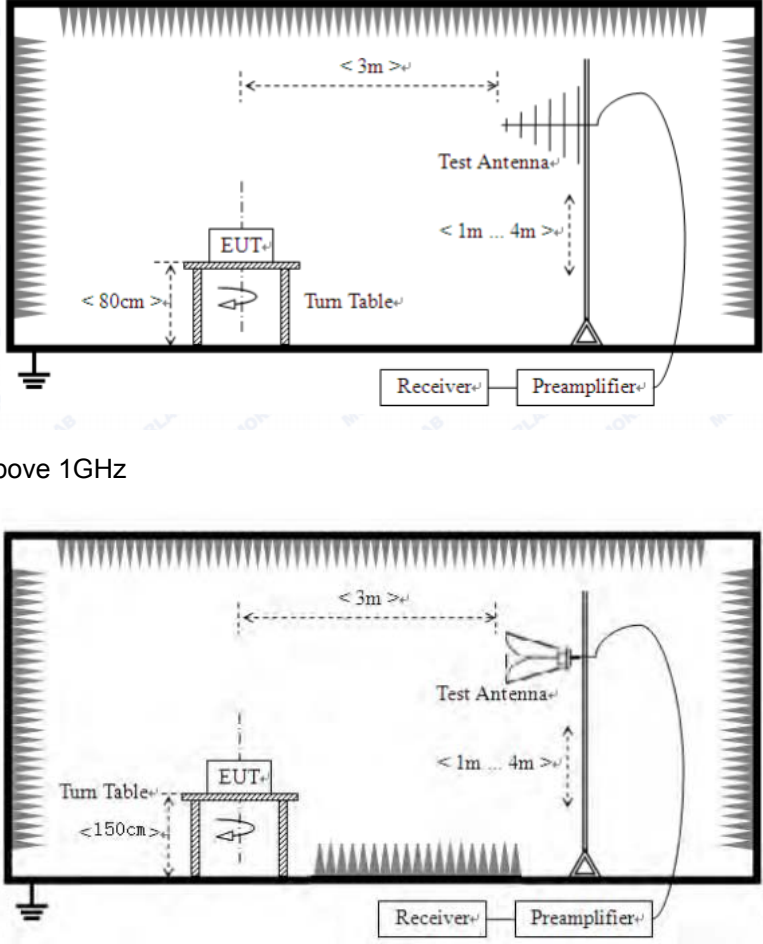	 <p>Above 1GHz</p>
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

GFSK

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	95.04	27.58	5.39	30.18	97.83	114.00	-16.17	Vertical
2402.00	93.57	27.58	5.39	30.18	96.36	114.00	-17.64	Horizontal
2441.00	93.09	27.55	5.43	30.06	96.01	114.00	-17.99	Vertical
2441.00	88.53	27.55	5.43	30.06	91.45	114.00	-22.55	Horizontal
2480.00	93.85	27.52	5.47	29.93	96.91	114.00	-17.09	Vertical
2480.00	91.67	27.52	5.47	29.93	94.73	114.00	-19.27	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	83.06	27.58	5.39	30.18	85.85	94.00	-8.15	Vertical
2402.00	81.35	27.58	5.39	30.18	84.14	94.00	-9.86	Horizontal
2441.00	79.48	27.55	5.43	30.06	82.40	94.00	-11.60	Vertical
2441.00	76.27	27.55	5.43	30.06	79.19	94.00	-14.81	Horizontal
2480.00	83.82	27.52	5.47	29.93	86.88	94.00	-7.12	Vertical
2480.00	80.67	27.52	5.47	29.93	83.73	94.00	-10.27	Horizontal

$\pi/4$ -DQPSK

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	92.07	27.58	5.39	30.18	94.86	114.00	-19.14	Vertical
2402.00	91.59	27.58	5.39	30.18	94.38	114.00	-19.62	Horizontal
2441.00	91.41	27.55	5.43	30.06	94.33	114.00	-19.67	Vertical
2441.00	88.52	27.55	5.43	30.06	91.44	114.00	-22.56	Horizontal
2480.00	91.62	27.52	5.47	29.93	94.68	114.00	-19.32	Vertical
2480.00	90.28	27.52	5.47	29.93	93.34	114.00	-20.66	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	83.39	27.58	5.39	30.18	86.18	94.00	-7.82	Vertical
2402.00	78.47	27.58	5.39	30.18	81.26	94.00	-12.74	Horizontal
2441.00	81.04	27.55	5.43	30.06	83.96	94.00	-10.04	Vertical
2441.00	76.63	27.55	5.43	30.06	79.55	94.00	-14.45	Horizontal
2480.00	83.34	27.52	5.47	29.93	86.40	94.00	-7.60	Vertical
2480.00	81.45	27.52	5.47	29.93	84.51	94.00	-9.49	Horizontal

8-DPSK

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	91.62	27.58	5.39	30.18	94.41	114.00	-19.59	Vertical
2402.00	88.07	27.58	5.39	30.18	90.86	114.00	-23.14	Horizontal
2441.00	88.36	27.55	5.43	30.06	91.28	114.00	-22.72	Vertical
2441.00	87.65	27.55	5.43	30.06	90.57	114.00	-23.43	Horizontal
2480.00	91.49	27.52	5.47	29.93	94.55	114.00	-19.45	Vertical
2480.00	90.28	27.52	5.47	29.93	93.34	114.00	-20.66	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	77.97	27.58	5.39	30.18	80.76	94.00	-13.24	Vertical
2402.00	76.55	27.58	5.39	30.18	79.34	94.00	-14.66	Horizontal
2441.00	76.54	27.55	5.43	30.06	79.46	94.00	-14.54	Vertical
2441.00	76.43	27.55	5.43	30.06	79.35	94.00	-14.65	Horizontal
2480.00	78.64	27.52	5.47	29.93	81.70	94.00	-12.30	Vertical
2480.00	77.52	27.52	5.47	29.93	80.58	94.00	-13.42	Horizontal

7.3.2 Spurious emissions


■ Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

■ Below 1GHz


■ The EUT was tested in GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation is the worst case.

Mode:	Transmitting mode	Test by:	Jason
Temp./Hum.(%RH):	26°C/56%RH	Polarization:	Horizontal

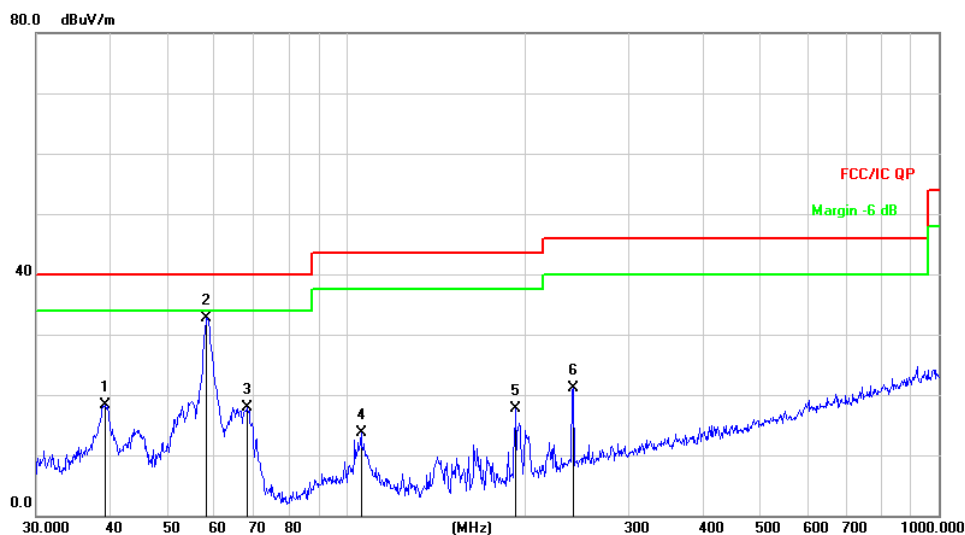

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		39.1616	34.32	-15.99	18.33	40.00	-21.67	QP
2	*	58.2030	48.73	-15.99	32.74	40.00	-7.26	QP
3		68.1514	35.91	-18.05	17.86	40.00	-22.14	QP
4		106.0126	29.98	-16.23	13.75	43.50	-29.75	QP
5		193.0945	33.96	-16.27	17.69	43.50	-25.81	QP
6		241.6763	35.08	-14.05	21.03	46.00	-24.97	QP

Mode:	Transmitting mode	Test by:	Jason
Temp./Hum.(%RH):	26°C/56%RH	Polarization:	Vertical

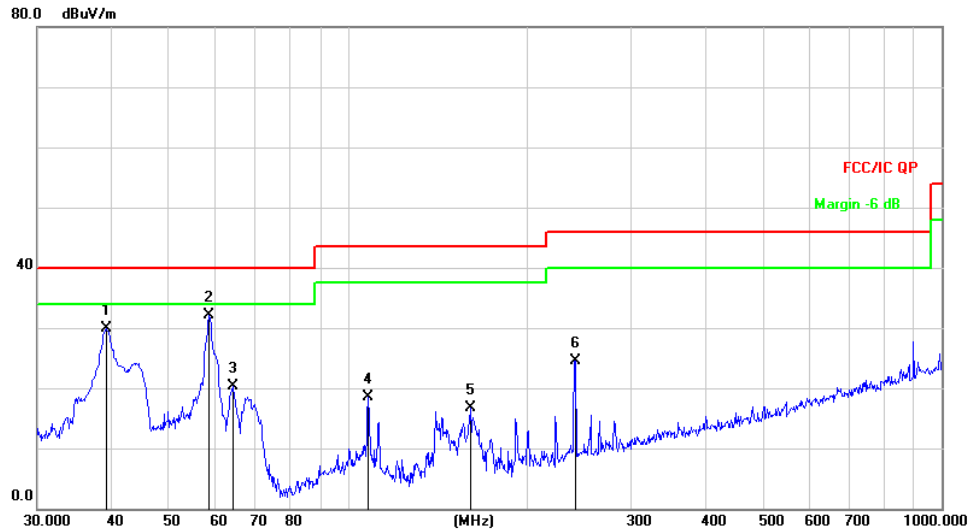

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment	dB/m	dB	Detector
			dBuV	dB	dBuV/m			
1		39.2991	45.85	-15.96	29.89	40.00	-10.11	QP
2	*	58.4074	48.21	-16.02	32.19	40.00	-7.81	QP
3		63.9828	36.89	-16.60	20.29	40.00	-19.71	QP
4		108.2667	34.87	-16.36	18.51	43.50	-24.99	QP
5		160.9089	35.60	-18.95	16.65	43.50	-26.85	QP
6		241.6763	38.59	-14.05	24.54	46.00	-21.46	QP

■ Above 1GHz

Test channel:	Lowest channel-GFSK
---------------	---------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	42.21	31.78	8.60	32.09	50.50	74.00	-23.50	Vertical
7206.00	34.54	36.15	11.65	32.00	50.34	74.00	-23.66	Vertical
9608.00	32.76	37.95	14.14	31.62	53.23	74.00	-20.77	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	45.94	31.78	8.60	32.09	54.23	74.00	-19.77	Horizontal
7206.00	38.88	36.15	11.65	32.00	54.68	74.00	-19.32	Horizontal
9608.00	35.62	37.95	14.14	31.62	56.09	74.00	-17.91	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	29.67	31.78	8.60	32.09	37.96	54.00	-16.04	Vertical
7206.00	24.40	36.15	11.65	32.00	40.20	54.00	-13.80	Vertical
9608.00	24.35	37.95	14.14	31.62	44.82	54.00	-9.18	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	33.25	31.78	8.60	32.09	41.54	54.00	-12.46	Horizontal
7206.00	24.59	36.15	11.65	32.00	40.39	54.00	-13.61	Horizontal
9608.00	23.93	37.95	14.14	31.62	44.40	54.00	-9.60	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle channel -GFSK
---------------	----------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	39.86	31.85	8.67	32.12	48.26	74.00	-25.74	Vertical
7323.00	33.24	36.37	11.72	31.89	49.44	74.00	-24.56	Vertical
9764.00	31.70	38.35	14.25	31.62	52.68	74.00	-21.32	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	41.84	31.85	8.67	32.12	50.24	74.00	-23.76	Horizontal
7323.00	33.26	36.37	11.72	31.89	49.46	74.00	-24.54	Horizontal
9764.00	31.11	38.35	14.25	31.62	52.09	74.00	-21.91	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	28.02	31.85	8.67	32.12	36.42	54.00	-17.58	Vertical
7323.00	23.64	36.37	11.72	31.89	39.84	54.00	-14.16	Vertical
9764.00	21.50	38.35	14.25	31.62	42.48	54.00	-11.52	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	34.14	31.85	8.67	32.12	42.54	54.00	-11.46	Horizontal
7323.00	25.27	36.37	11.72	31.89	41.47	54.00	-12.53	Horizontal
9764.00	22.84	38.35	14.25	31.62	43.82	54.00	-10.18	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel -GFSK
---------------	-----------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	38.76	31.93	8.73	32.16	47.26	74.00	-26.74	Vertical
7440.00	34.29	36.59	11.79	31.78	50.89	74.00	-23.11	Vertical
9920.00	31.94	38.81	14.38	31.88	53.25	74.00	-20.75	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	40.93	31.93	8.73	32.16	49.43	74.00	-24.57	Horizontal
7440.00	33.81	36.59	11.79	31.78	50.41	74.00	-23.59	Horizontal
9920.00	33.12	38.81	14.38	31.88	54.43	74.00	-19.57	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	29.92	31.93	8.73	32.16	38.42	54.00	-15.58	Vertical
7440.00	25.17	36.59	11.79	31.78	41.77	54.00	-12.23	Vertical
9920.00	22.51	38.81	14.38	31.88	43.82	54.00	-10.18	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	33.04	31.93	8.73	32.16	41.54	54.00	-12.46	Horizontal
7440.00	25.26	36.59	11.79	31.78	41.86	54.00	-12.14	Horizontal
9920.00	24.52	38.81	14.38	31.88	45.83	54.00	-8.17	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Lowest channel- $\pi/4$ -DQPSK
---------------	--------------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	39.52	31.78	8.60	32.09	47.81	74.00	-26.19	Vertical
7206.00	33.29	36.15	11.65	32.00	49.09	74.00	-24.91	Vertical
9608.00	30.02	37.95	14.14	31.62	50.49	74.00	-23.51	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	43.04	31.78	8.60	32.09	51.33	74.00	-22.67	Horizontal
7206.00	33.96	36.15	11.65	32.00	49.76	74.00	-24.24	Horizontal
9608.00	31.53	37.95	14.14	31.62	52.00	74.00	-22.00	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	30.52	31.78	8.60	32.09	38.81	54.00	-15.19	Vertical
7206.00	25.98	36.15	11.65	32.00	41.78	54.00	-12.22	Vertical
9608.00	24.74	37.95	14.14	31.62	45.21	54.00	-8.79	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	33.01	31.78	8.60	32.09	41.30	54.00	-12.70	Horizontal
7206.00	27.37	36.15	11.65	32.00	43.17	54.00	-10.83	Horizontal
9608.00	26.51	37.95	14.14	31.62	46.98	54.00	-7.02	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

4. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
5. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
6. *“*” , means this data is the too weak instrument of signal is unable to test.*

Test channel:	Middle channel - $\pi/4$ -DQPSK
---------------	---------------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	38.80	31.85	8.67	32.12	47.20	74.00	-26.80	Vertical
7323.00	35.75	36.37	11.72	31.89	51.95	74.00	-22.05	Vertical
9764.00	34.52	38.35	14.25	31.62	55.50	74.00	-18.50	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	42.39	31.85	8.67	32.12	50.79	74.00	-23.21	Horizontal
7323.00	35.92	36.37	11.72	31.89	52.12	74.00	-21.88	Horizontal
9764.00	31.68	38.35	14.25	31.62	52.66	74.00	-21.34	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	30.47	31.85	8.67	32.12	38.87	54.00	-15.13	Vertical
7323.00	24.83	36.37	11.72	31.89	41.03	54.00	-12.97	Vertical
9764.00	24.28	38.35	14.25	31.62	45.26	54.00	-8.74	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	33.85	31.85	8.67	32.12	42.25	54.00	-11.75	Horizontal
7323.00	27.06	36.37	11.72	31.89	43.26	54.00	-10.74	Horizontal
9764.00	24.53	38.35	14.25	31.62	45.51	54.00	-8.49	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

4. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
5. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
6. *“*” , means this data is the too weak instrument of signal is unable to test.*

Test channel:	Highest channel - $\pi/4$ -DQPSK
---------------	----------------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	39.41	31.93	8.73	32.16	47.91	74.00	-26.09	Vertical
7440.00	34.03	36.59	11.79	31.78	50.63	74.00	-23.37	Vertical
9920.00	31.79	38.81	14.38	31.88	53.10	74.00	-20.90	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	43.72	31.93	8.73	32.16	52.22	74.00	-21.78	Horizontal
7440.00	33.05	36.59	11.79	31.78	49.65	74.00	-24.35	Horizontal
9920.00	32.88	38.81	14.38	31.88	54.19	74.00	-19.81	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	29.39	31.93	8.73	32.16	37.89	54.00	-16.11	Vertical
7440.00	24.81	36.59	11.79	31.78	41.41	54.00	-12.59	Vertical
9920.00	22.03	38.81	14.38	31.88	43.34	54.00	-10.66	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	34.23	31.93	8.73	32.16	42.73	54.00	-11.27	Horizontal
7440.00	26.97	36.59	11.79	31.78	43.57	54.00	-10.43	Horizontal
9920.00	21.34	38.81	14.38	31.88	42.65	54.00	-11.35	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

4. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
5. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
6. *“*” means this data is too weak instrument of signal is unable to test.*

Test channel:	Lowest channel-8-DPSK
---------------	-----------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	40.92	31.78	8.60	32.09	49.21	74.00	-24.79	Vertical
7206.00	32.75	36.15	11.65	32.00	48.55	74.00	-25.45	Vertical
9608.00	30.04	37.95	14.14	31.62	50.51	74.00	-23.49	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	37.89	31.78	8.60	32.09	46.18	74.00	-27.82	Horizontal
7206.00	35.24	36.15	11.65	32.00	51.04	74.00	-22.96	Horizontal
9608.00	34.63	37.95	14.14	31.62	55.10	74.00	-18.90	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	30.05	31.78	8.60	32.09	38.34	54.00	-15.66	Vertical
7206.00	24.27	36.15	11.65	32.00	40.07	54.00	-13.93	Vertical
9608.00	21.85	37.95	14.14	31.62	42.32	54.00	-11.68	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	33.43	31.78	8.60	32.09	41.72	54.00	-12.28	Horizontal
7206.00	25.45	36.15	11.65	32.00	41.25	54.00	-12.75	Horizontal
9608.00	24.07	37.95	14.14	31.62	44.54	54.00	-9.46	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

7. $Final\ Level = Receiver\ Read\ level + Antenna\ Factor + Cable\ Loss - Preamp\ lifier\ Factor$
8. The emission levels of other frequencies are very lower than the limit and not show in test report.
9. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle channel -8-DPSK
---------------	------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	40.51	31.85	8.67	32.12	48.91	74.00	-25.09	Vertical
7323.00	35.27	36.37	11.72	31.89	51.47	74.00	-22.53	Vertical
9764.00	33.07	38.35	14.25	31.62	54.05	74.00	-19.95	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	37.93	31.85	8.67	32.12	46.33	74.00	-27.67	Horizontal
7323.00	30.65	36.37	11.72	31.89	46.85	74.00	-27.15	Horizontal
9764.00	30.34	38.35	14.25	31.62	51.32	74.00	-22.68	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	30.55	31.85	8.67	32.12	38.95	54.00	-15.05	Vertical
7323.00	24.81	36.37	11.72	31.89	41.01	54.00	-12.99	Vertical
9764.00	22.19	38.35	14.25	31.62	43.17	54.00	-10.83	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	35.20	31.85	8.67	32.12	43.60	54.00	-10.40	Horizontal
7323.00	27.27	36.37	11.72	31.89	43.47	54.00	-10.53	Horizontal
9764.00	24.48	38.35	14.25	31.62	45.46	54.00	-8.54	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

7. $Final\ Level = Receiver\ Read\ level + Antenna\ Factor + Cable\ Loss - Preamp\ lifier\ Factor$
8. The emission levels of other frequencies are very lower than the limit and not show in test report.
9. "*", means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel -8DPSK
---------------	------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	38.50	31.93	8.73	32.16	47.00	74.00	-27.00	Vertical
7440.00	35.79	36.59	11.79	31.78	52.39	74.00	-21.61	Vertical
9920.00	30.92	38.81	14.38	31.88	52.23	74.00	-21.77	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	41.47	31.93	8.73	32.16	49.97	74.00	-24.03	Horizontal
7440.00	36.52	36.59	11.79	31.78	53.12	74.00	-20.88	Horizontal
9920.00	35.05	38.81	14.38	31.88	56.36	74.00	-17.64	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	30.27	31.93	8.73	32.16	38.77	54.00	-15.23	Vertical
7440.00	26.35	36.59	11.79	31.78	42.95	54.00	-11.05	Vertical
9920.00	24.65	38.81	14.38	31.88	45.96	54.00	-8.04	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	35.11	31.93	8.73	32.16	43.61	54.00	-10.39	Horizontal
7440.00	27.76	36.59	11.79	31.78	44.36	54.00	-9.64	Horizontal
9920.00	23.49	38.81	14.38	31.88	44.80	54.00	-9.20	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

7. $Final\ Level = Receiver\ Read\ level + Antenna\ Factor + Cable\ Loss - Preamp\ lifier\ Factor$
8. The emission levels of other frequencies are very lower than the limit and not show in test report.
9. "*", means this data is the too weak instrument of signal is unable to test.

7.3.3 Bandedge emissions

Test channel:	Lowest channel -GFSK
---------------	----------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	43.28	27.59	5.38	30.18	46.07	74.00	-27.93	Horizontal
2400.00	55.64	27.58	5.39	30.18	58.43	74.00	-15.57	Horizontal
2390.00	45.03	27.59	5.38	30.18	47.82	74.00	-26.18	Vertical
2400.00	43.89	27.58	5.39	30.18	46.68	74.00	-27.32	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	33.53	27.59	5.38	30.18	36.32	54.00	-17.68	Horizontal
2400.00	33.37	27.58	5.39	30.18	36.16	54.00	-17.84	Horizontal
2390.00	33.64	27.59	5.38	30.18	36.43	54.00	-17.57	Vertical
2400.00	35.92	27.58	5.39	30.18	38.71	54.00	-15.29	Vertical

Test channel:	Highest channel -GFSK
---------------	-----------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	44.95	27.53	5.47	29.93	48.02	74.00	-25.98	Horizontal
2500.00	42.84	27.55	5.49	29.93	45.95	74.00	-28.05	Horizontal
2483.50	44.27	27.53	5.47	29.93	47.34	74.00	-26.66	Vertical
2500.00	45.01	27.55	5.49	29.93	48.12	74.00	-25.88	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	34.06	27.53	5.47	29.93	37.13	54.00	-16.87	Horizontal
2500.00	34.78	27.55	5.49	29.93	37.89	54.00	-16.11	Horizontal
2483.50	34.38	27.53	5.47	29.93	37.45	54.00	-16.55	Vertical
2500.00	34.57	27.55	5.49	29.93	37.68	54.00	-16.32	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

Test channel:	Lowest channel - $\pi/4$ -DQPSK
---------------	---------------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	42.15	27.59	5.38	30.18	44.94	74.00	-29.06	Horizontal
2400.00	58.67	27.58	5.39	30.18	61.46	74.00	-12.54	Horizontal
2390.00	43.02	27.59	5.38	30.18	45.81	74.00	-28.19	Vertical
2400.00	58.54	27.58	5.39	30.18	61.33	74.00	-12.67	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	31.19	27.59	5.38	30.18	33.98	54.00	-20.02	Horizontal
2400.00	41.82	27.58	5.39	30.18	44.61	54.00	-9.39	Horizontal
2390.00	30.63	27.59	5.38	30.18	33.42	54.00	-20.58	Vertical
2400.00	43.94	27.58	5.39	30.18	46.73	54.00	-7.27	Vertical

Test channel:	Highest channel - $\pi/4$ -DQPSK
---------------	----------------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	41.04	27.53	5.47	29.93	44.11	74.00	-29.89	Horizontal
2500.00	40.72	27.55	5.49	29.93	43.83	74.00	-30.17	Horizontal
2483.50	41.82	27.53	5.47	29.93	44.89	74.00	-29.11	Vertical
2500.00	41.90	27.55	5.49	29.93	45.01	74.00	-28.99	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	34.61	27.53	5.47	29.93	37.68	54.00	-16.32	Horizontal
2500.00	36.78	27.55	5.49	29.93	39.89	54.00	-14.11	Horizontal
2483.50	34.36	27.53	5.47	29.93	37.43	54.00	-16.57	Vertical
2500.00	32.52	27.55	5.49	29.93	35.63	54.00	-18.37	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Test channel:	Lowest channel -8-DPSK
---------------	------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	39.94	27.59	5.38	30.18	42.73	74.00	-31.27	Horizontal
2400.00	53.86	27.58	5.39	30.18	56.65	74.00	-17.35	Horizontal
2390.00	40.72	27.59	5.38	30.18	43.51	74.00	-30.49	Vertical
2400.00	53.60	27.58	5.39	30.18	56.39	74.00	-17.61	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	33.55	27.59	5.38	30.18	36.34	54.00	-17.66	Horizontal
2400.00	41.87	27.58	5.39	30.18	44.66	54.00	-9.34	Horizontal
2390.00	33.30	27.59	5.38	30.18	36.09	54.00	-17.91	Vertical
2400.00	44.24	27.58	5.39	30.18	47.03	54.00	-6.97	Vertical

Test channel:	Highest channel -8-DPSK
---------------	-------------------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	45.31	27.53	5.47	29.93	48.38	74.00	-25.62	Horizontal
2500.00	46.06	27.55	5.49	29.93	49.17	74.00	-24.83	Horizontal
2483.50	44.82	27.53	5.47	29.93	47.89	74.00	-26.11	Vertical
2500.00	42.59	27.55	5.49	29.93	45.70	74.00	-28.30	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	33.18	27.53	5.47	29.93	36.25	54.00	-17.75	Horizontal
2500.00	33.52	27.55	5.49	29.93	36.63	54.00	-17.37	Horizontal
2483.50	34.57	27.53	5.47	29.93	37.64	54.00	-16.36	Vertical
2500.00	35.61	27.55	5.49	29.93	38.72	54.00	-15.28	Vertical

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

GFSK


2402MHz Horizontal

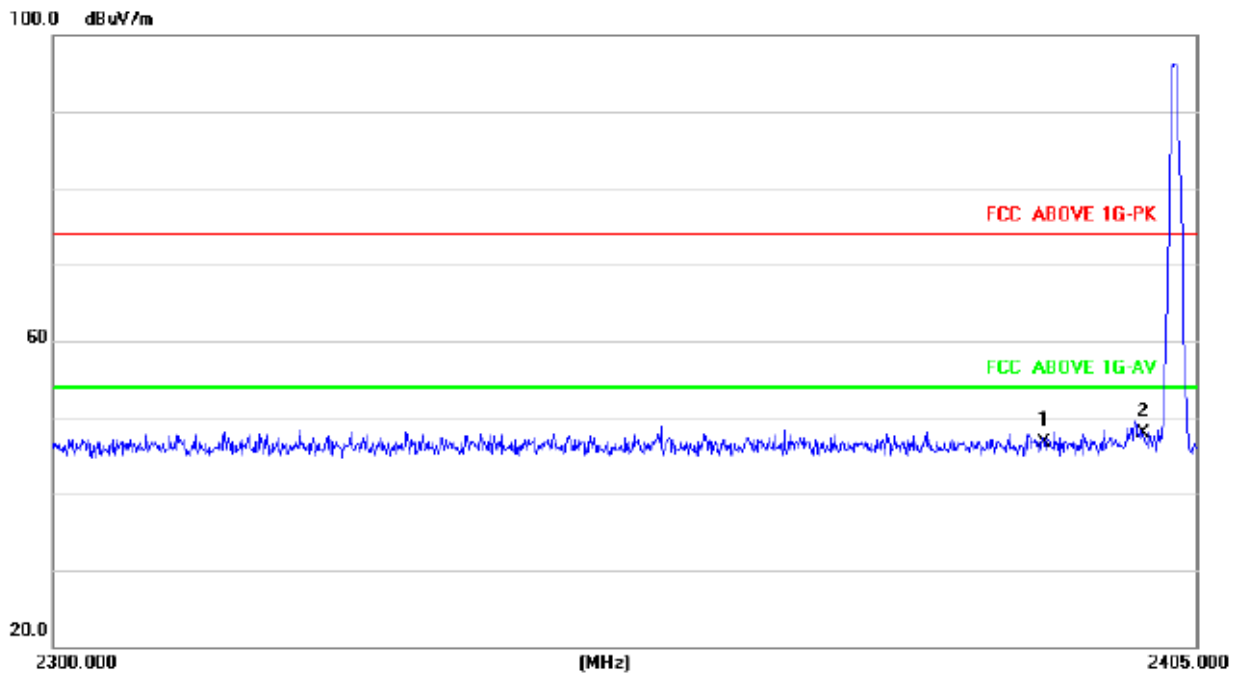


2402MHz Vertical

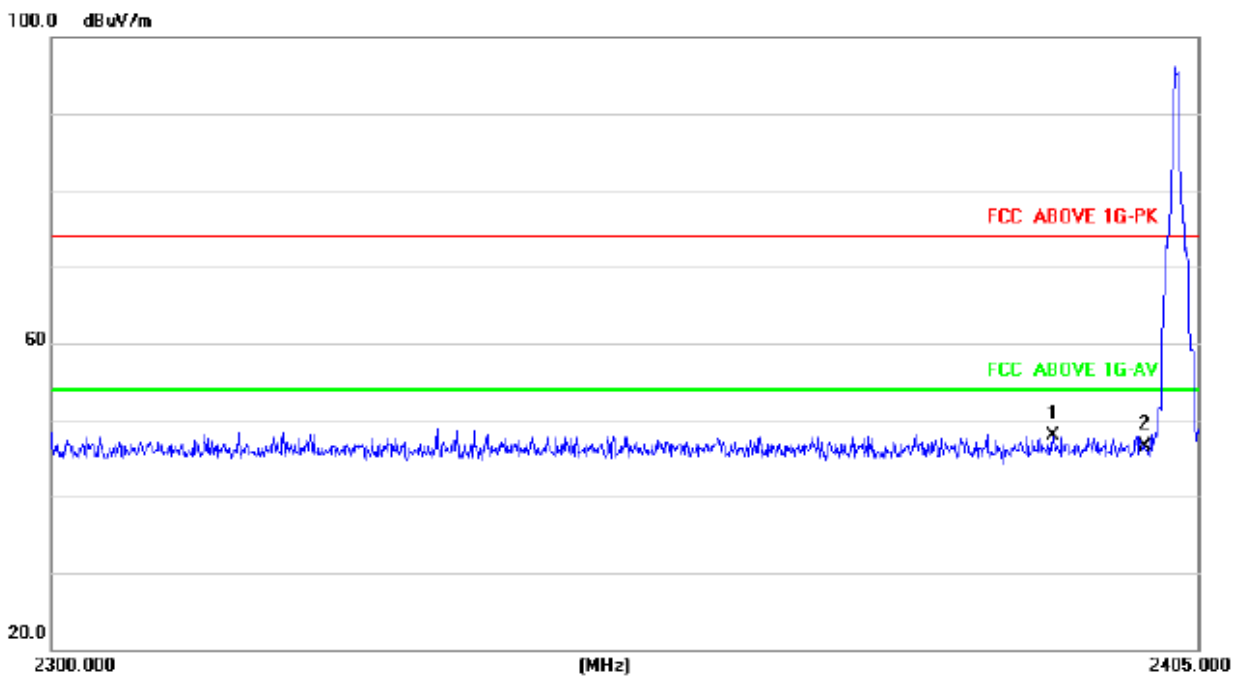

2480MHz Horizontal

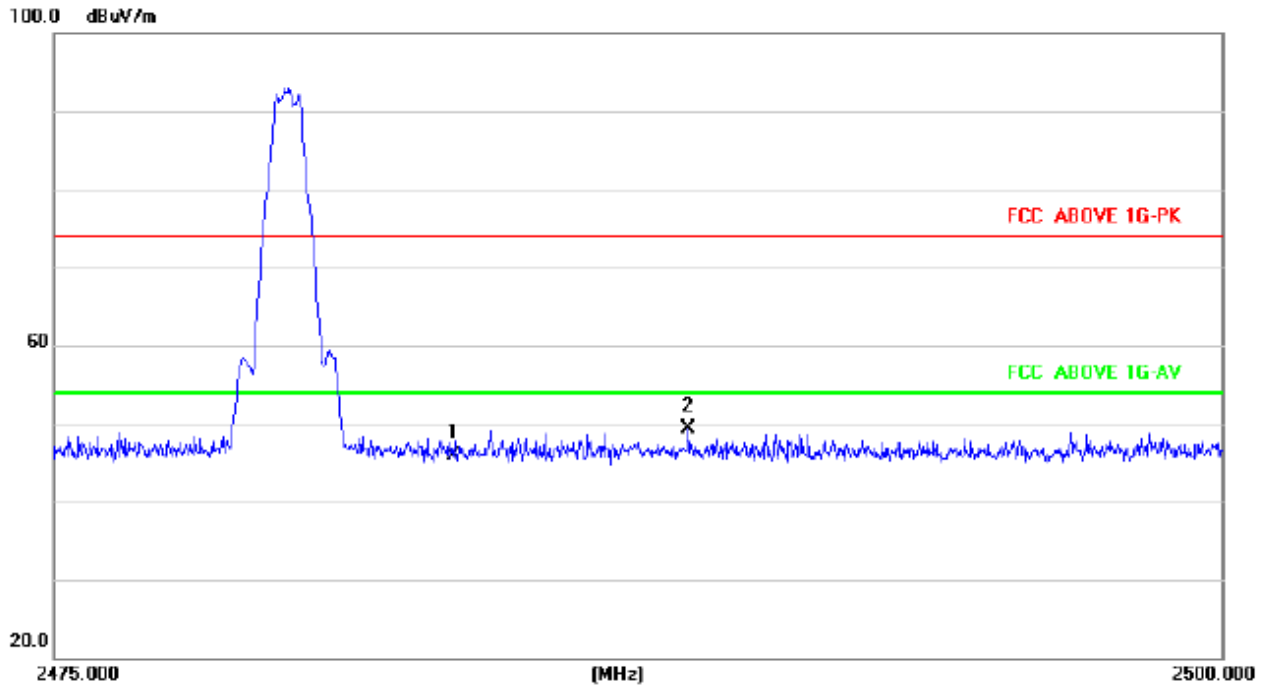


2480MHz Vertical

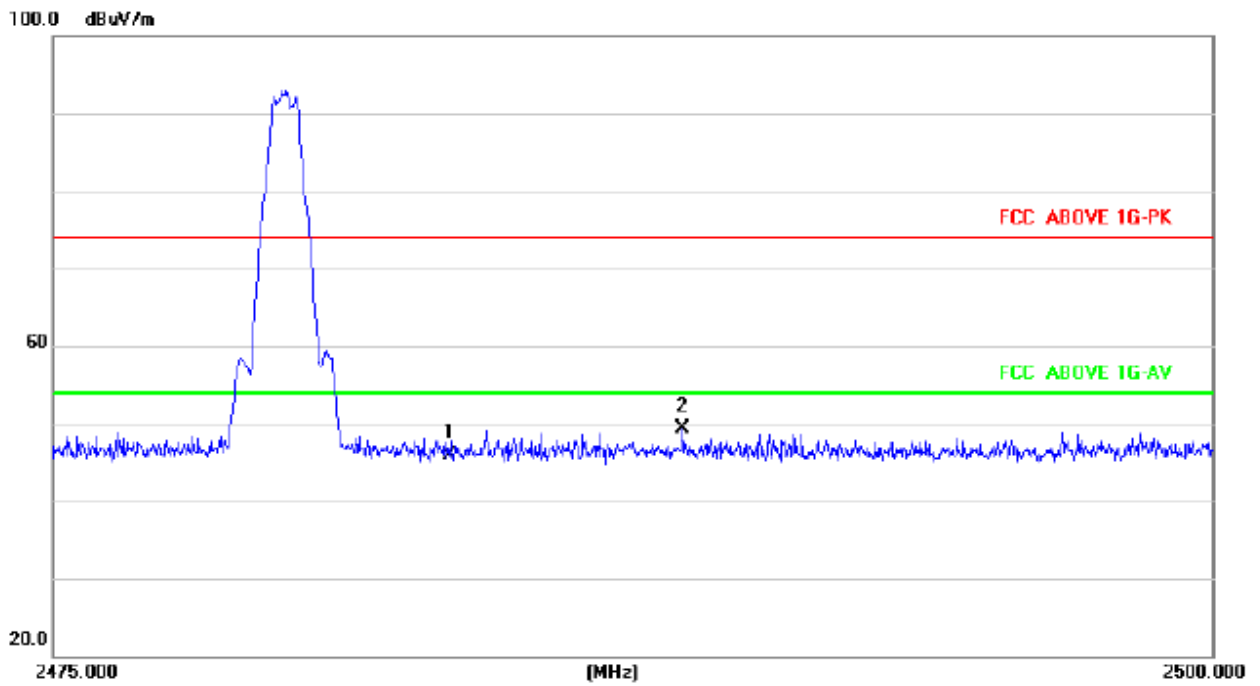


PI/4 DPSK


2402MHz Horizontal

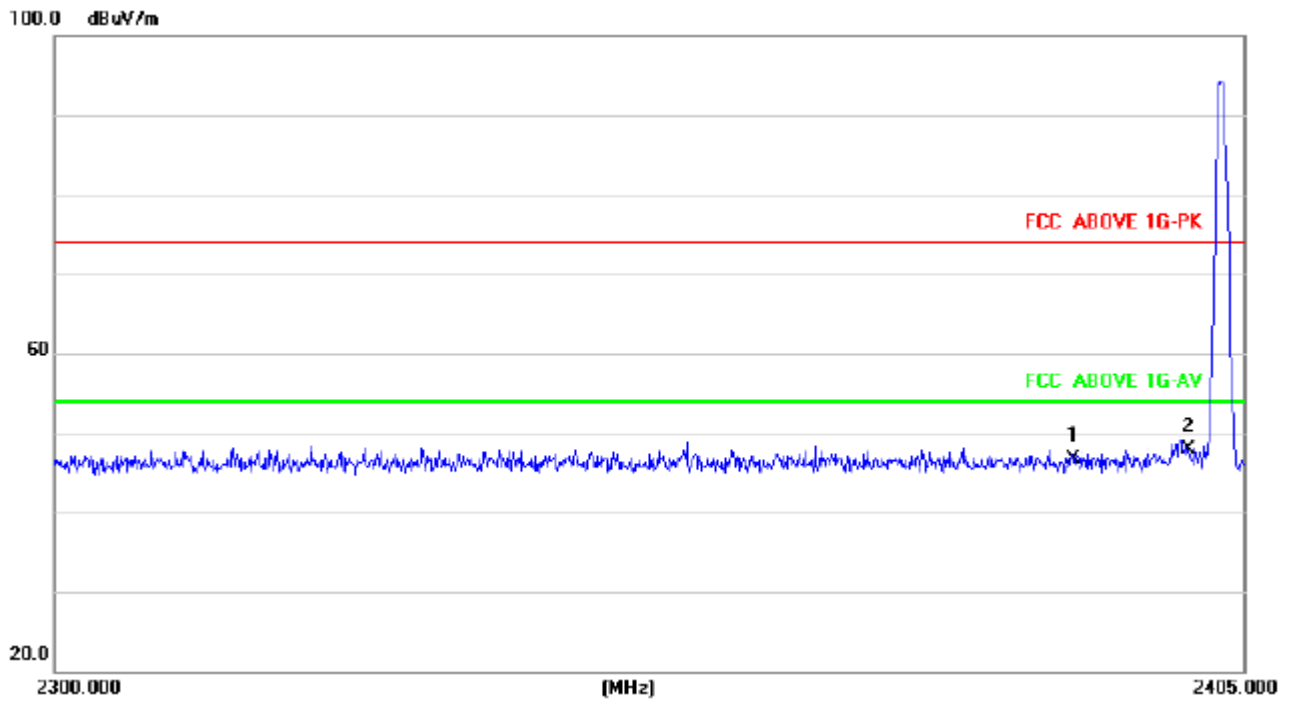


2402MHz Vertical

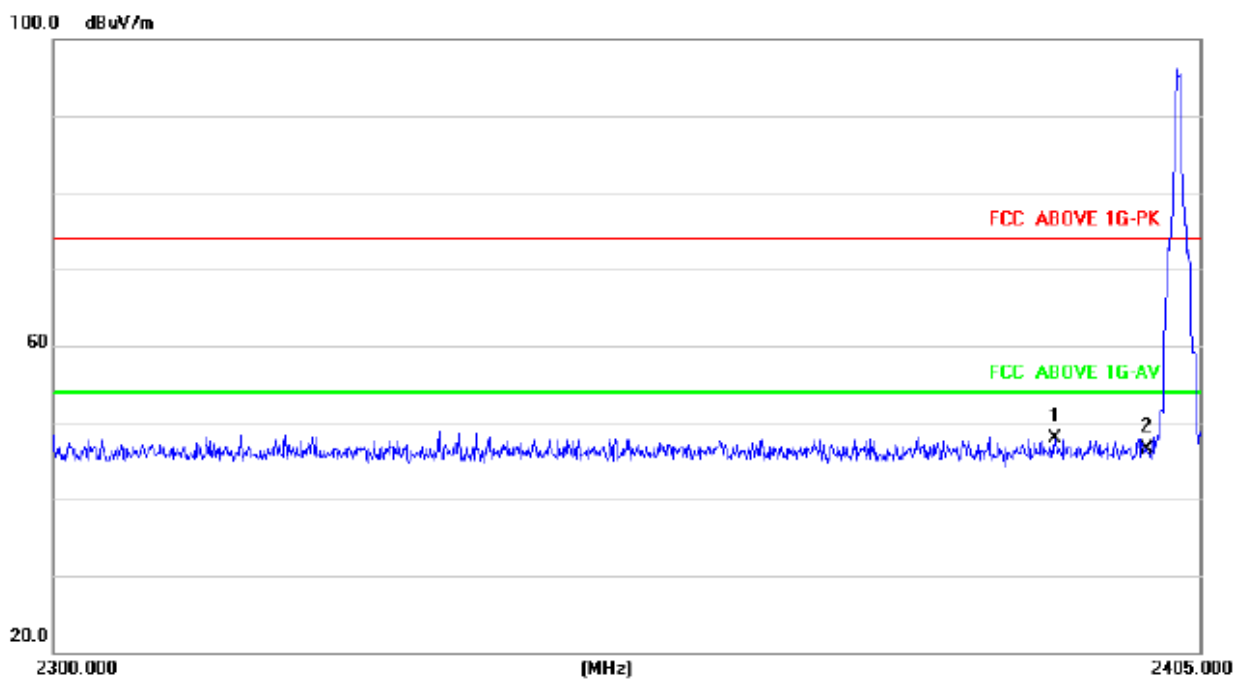

2480MHz Horizontal

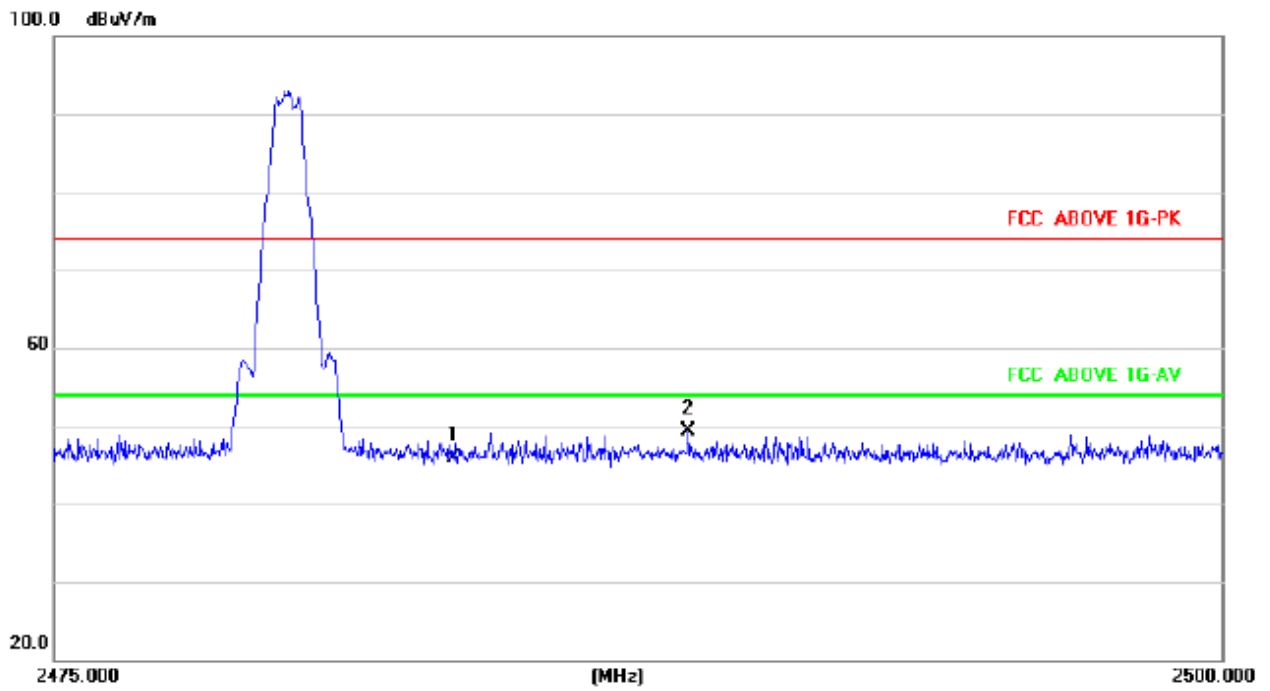


2480MHz Vertical

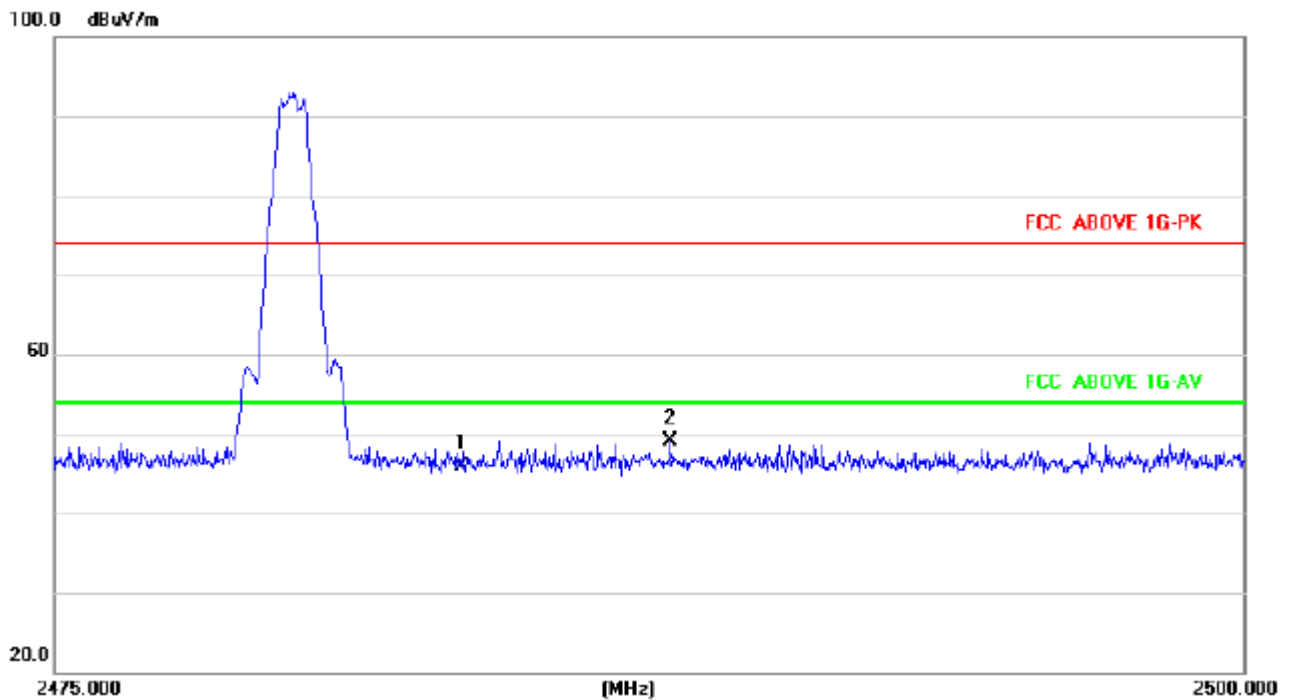


8DPSK


2402MHz Horizontal

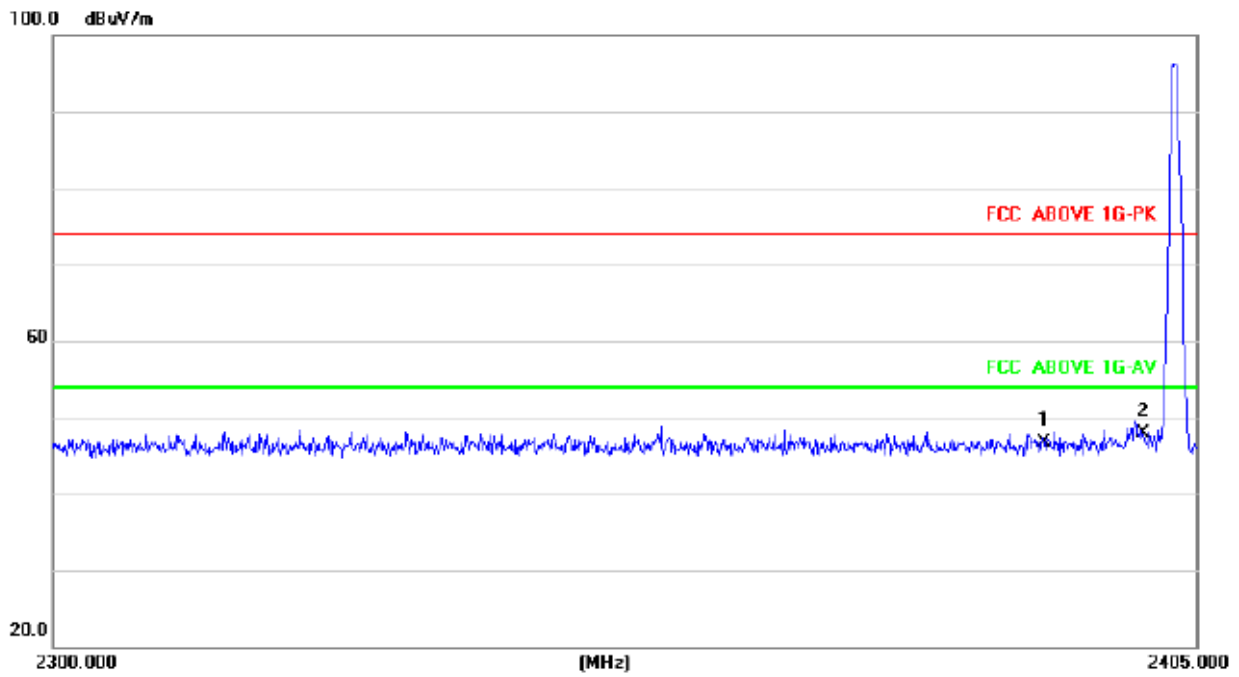


2402MHz Vertical

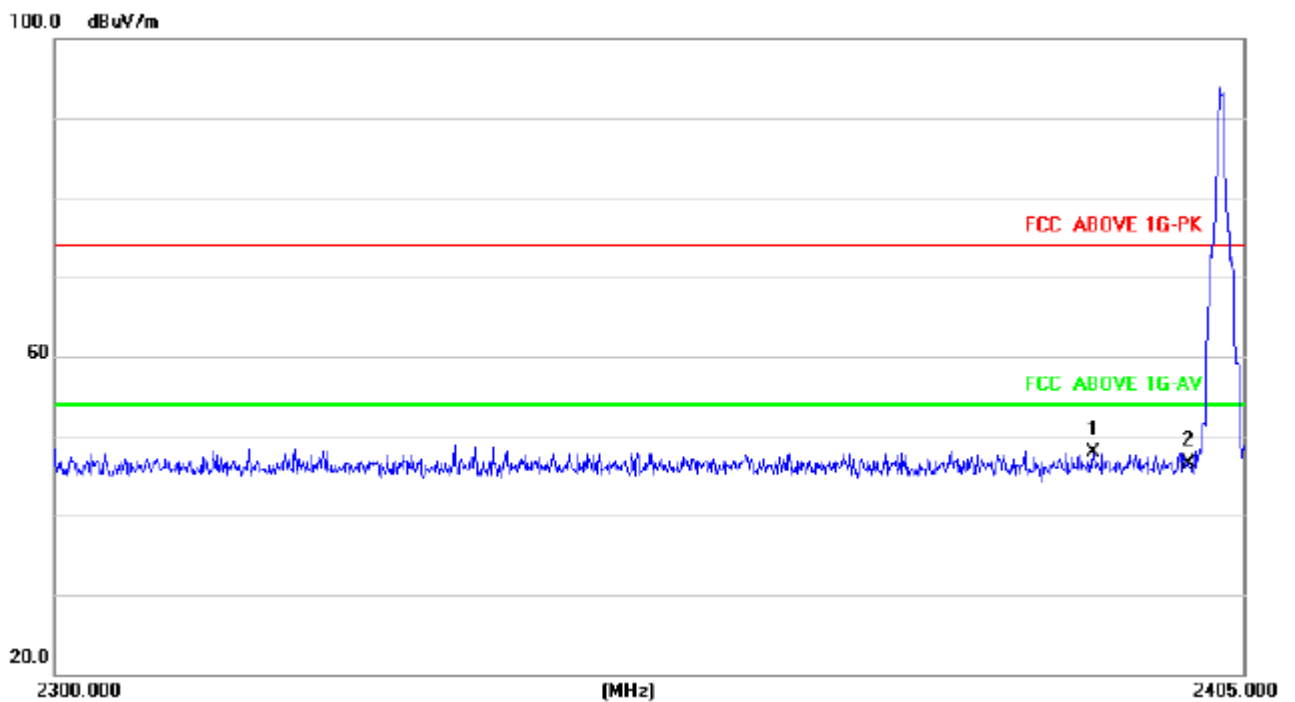


2480MHz Horizontal

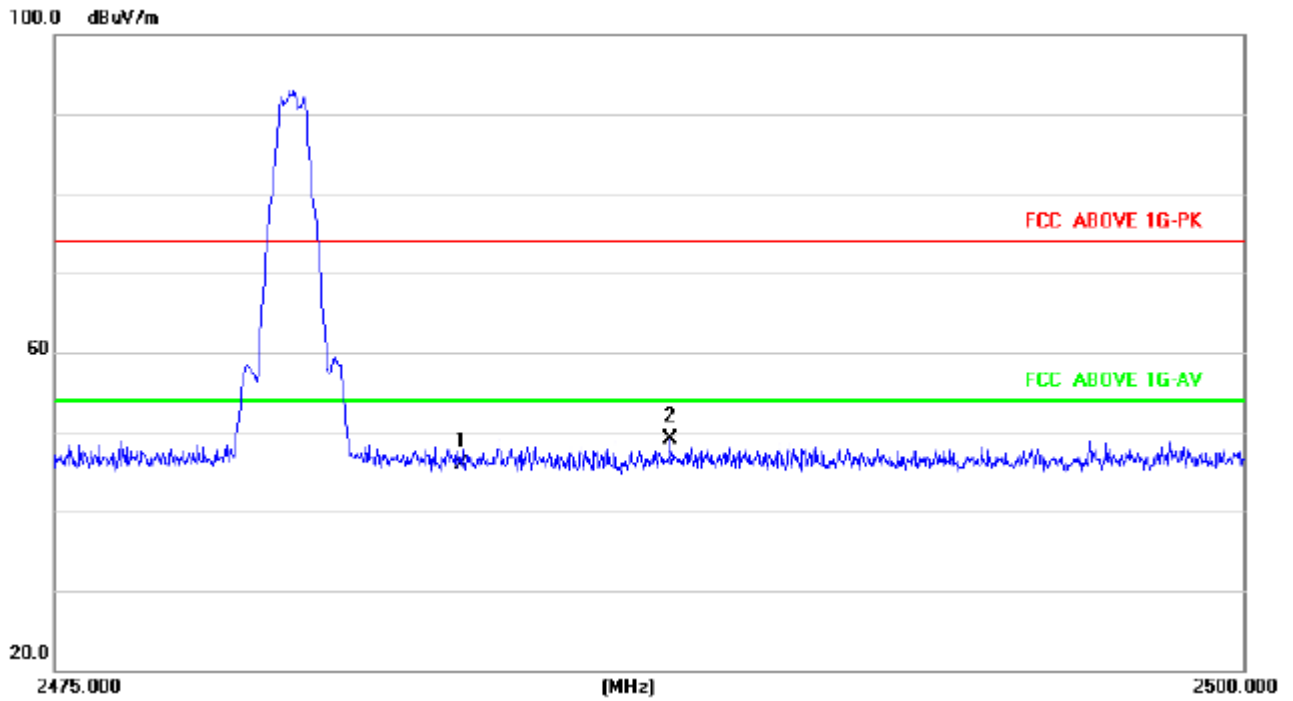

2480MHz Vertical

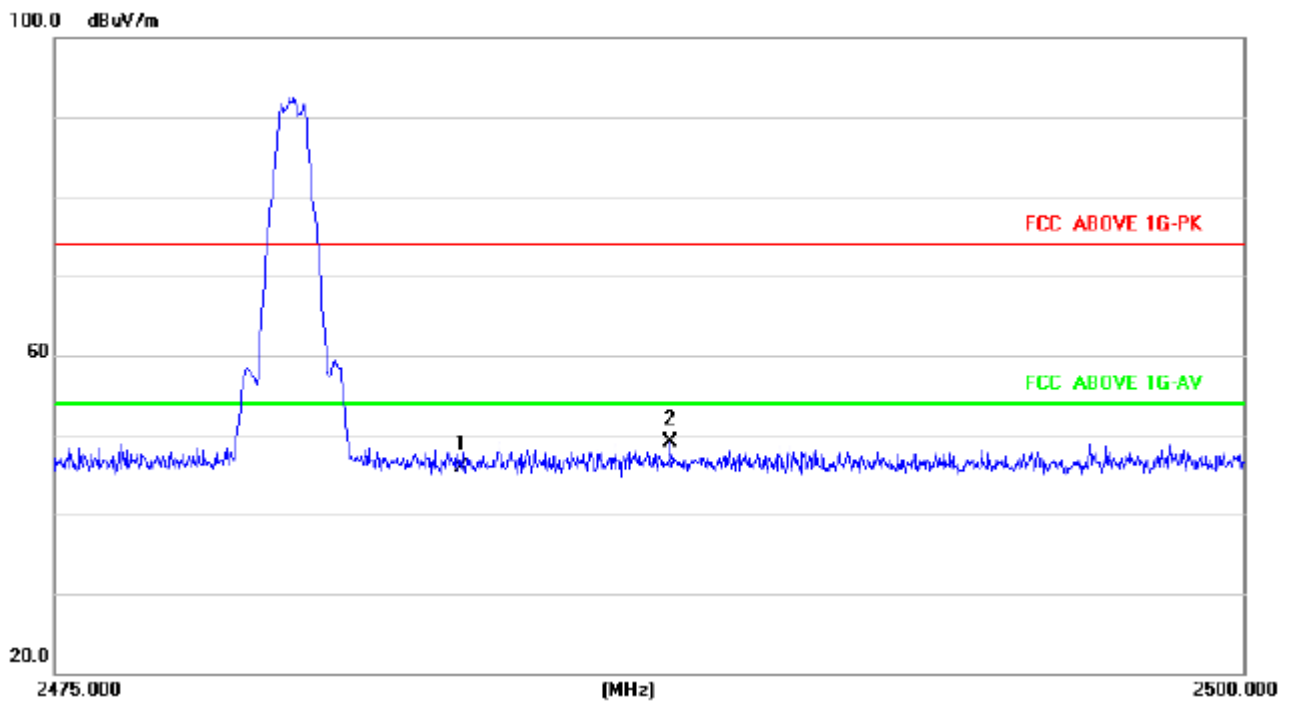

7.4 20dB Occupy Bandwidth

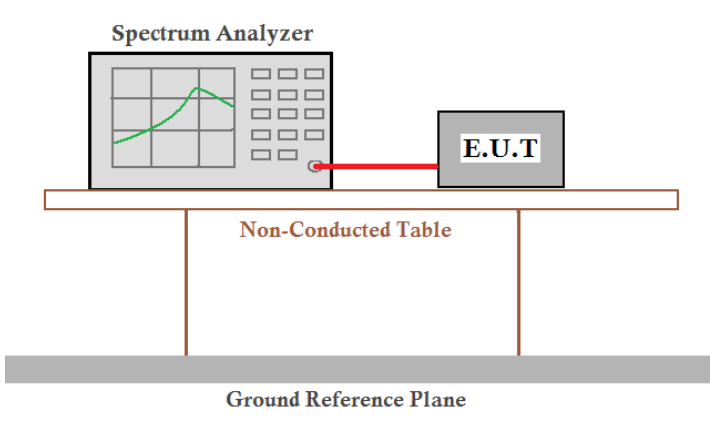Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

EUT :	40W Wall Mount Music Amplifier	Model Name. :	36374
Temperature :	26 °C	Relative Humidity :	54%
Test Voltage :	AC 120V/60Hz	Pressure :	1010hPa
Test Mode :	Transmitting mode(GFSK, $\pi/4$ -DQPSK, 8-DPSK)		


	Test channel	20dB bandwidth(MHz)	Result
GFSK	Lowest	1.121	Pass
	Middle	1.117	Pass
	Highest	1.115	Pass

	Test channel	20dB bandwidth(MHz)	Result
$\pi/4$ -DQPSK	Lowest	1.382	Pass
	Middle	1.395	Pass
	Highest	1.409	Pass


	Test channel	20dB bandwidth(MHz)	Result
8-DPSK	Lowest	1.366	Pass
	Middle	1.377	Pass
	Highest	1.384	Pass

Test plot as follows:


GFSK

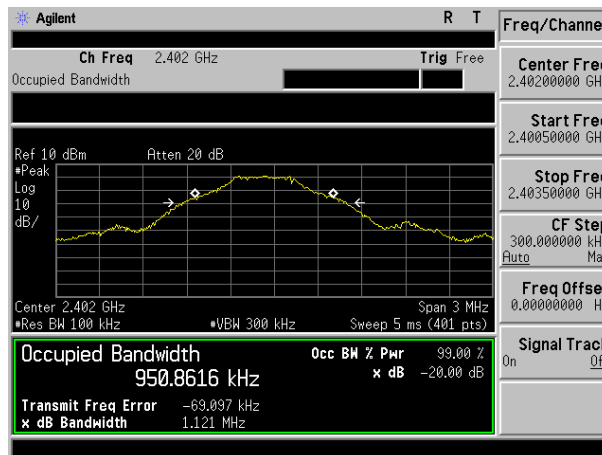

Lowest channel

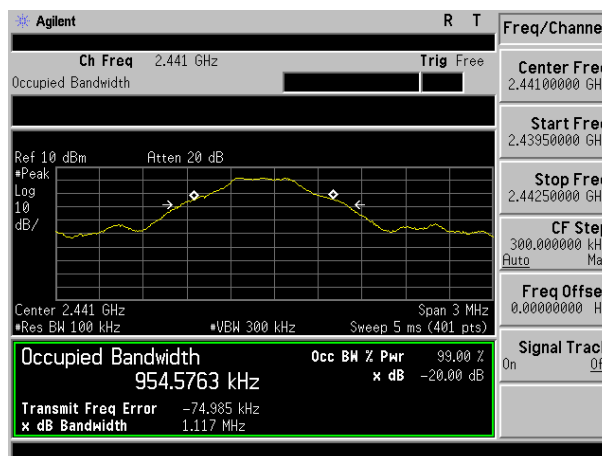


Middle channel

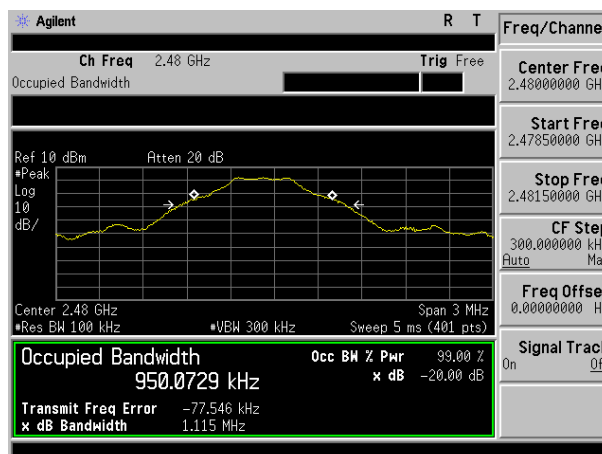


Highest channel


π /4-DQPSK

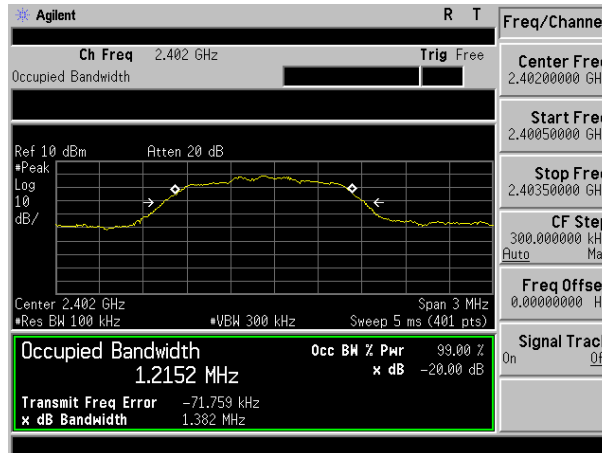

Lowest channel

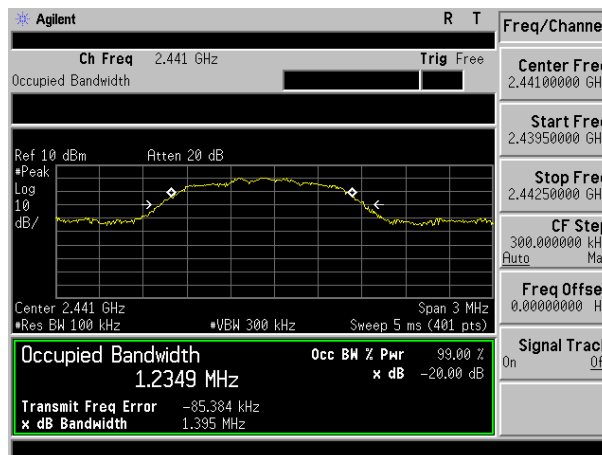


Middle channel

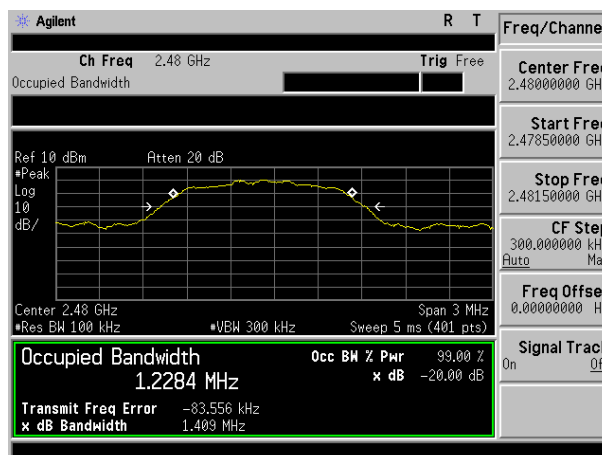


Highest channel


8-DPSK

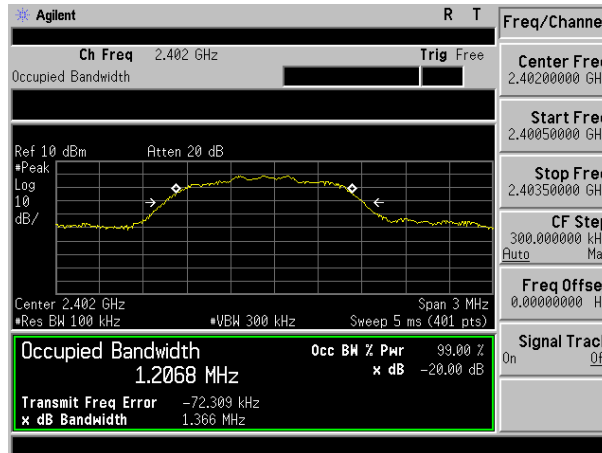

Lowest channel

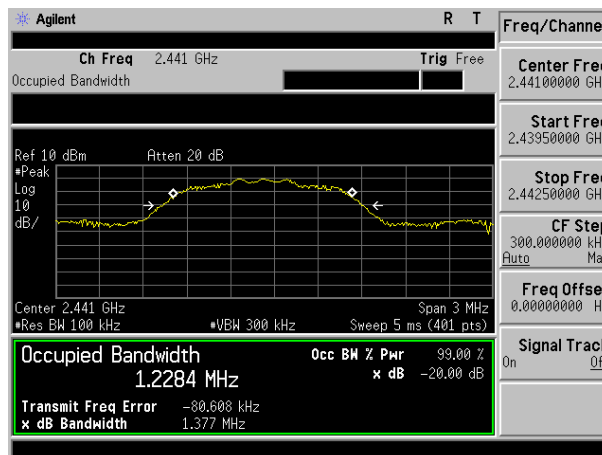


Middle channel

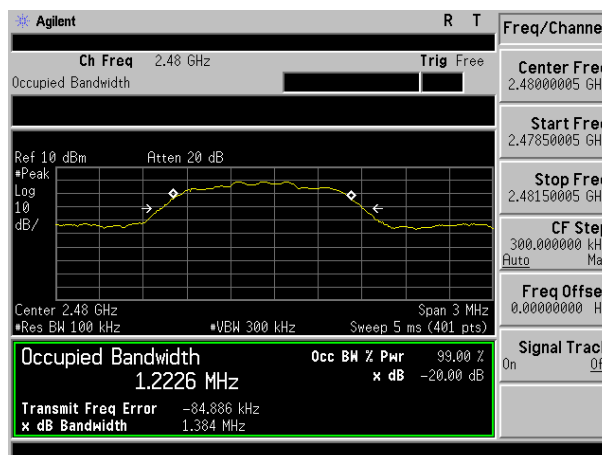

Highest channel

8 Test Setup Photo


Radiated Emission

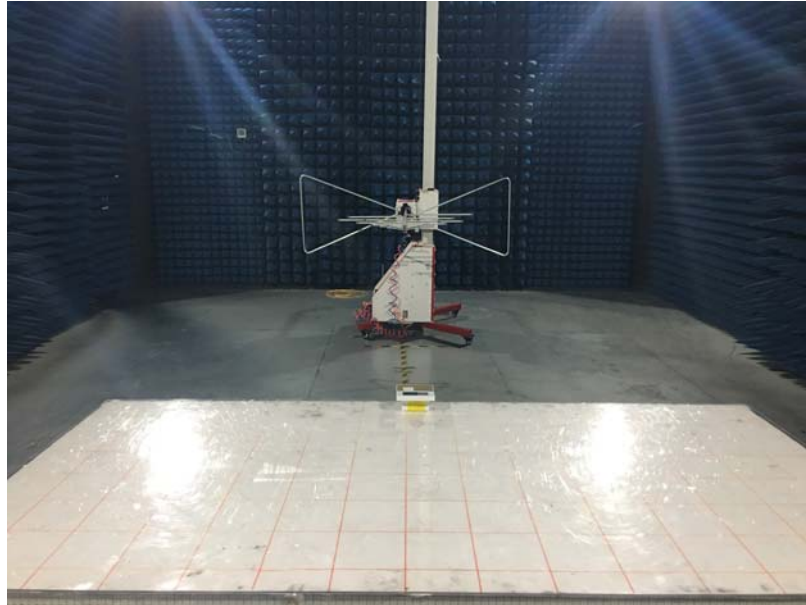


Conducted Emission






9 EUT Constructional Details


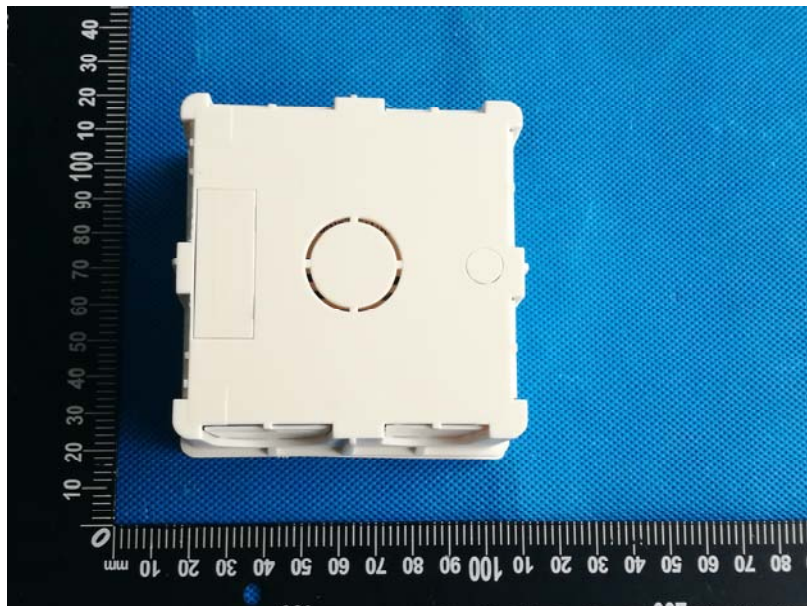


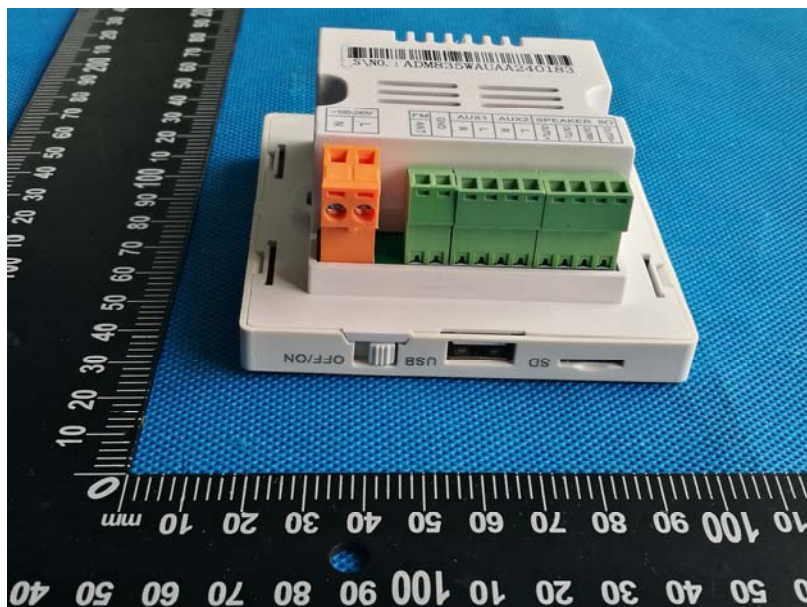




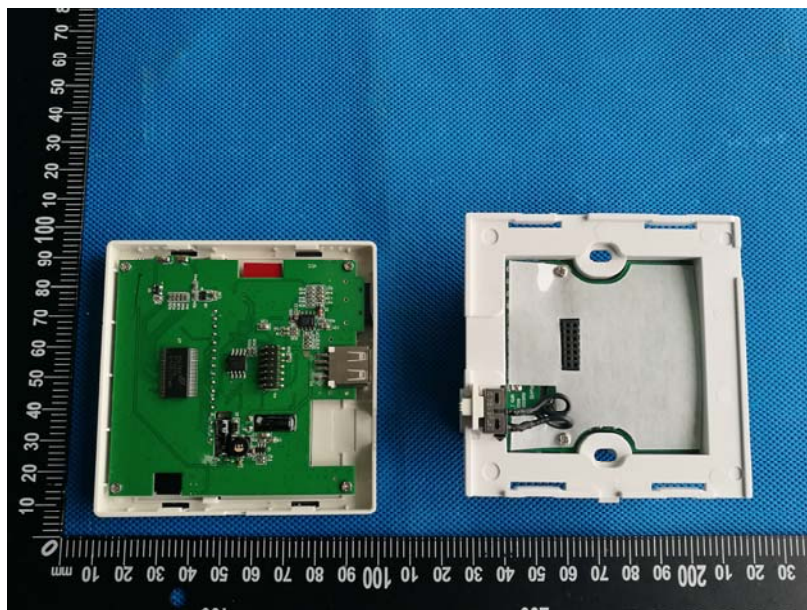

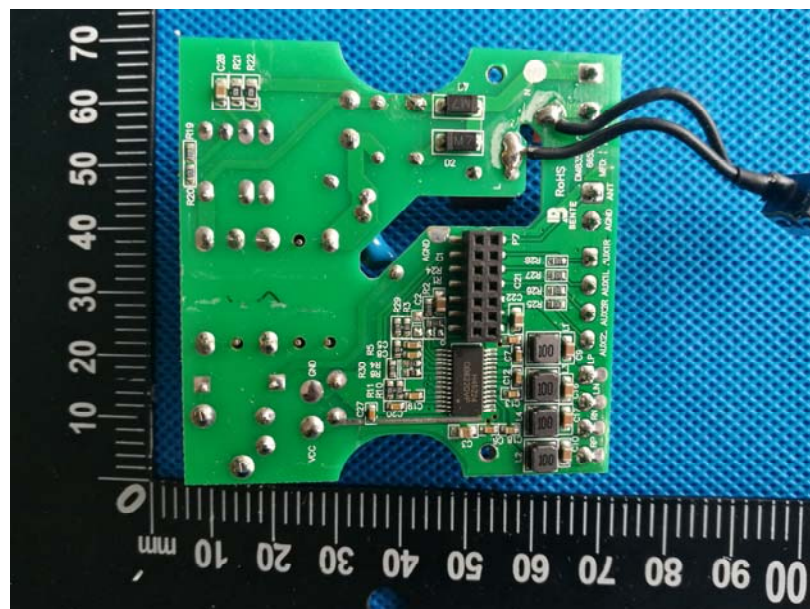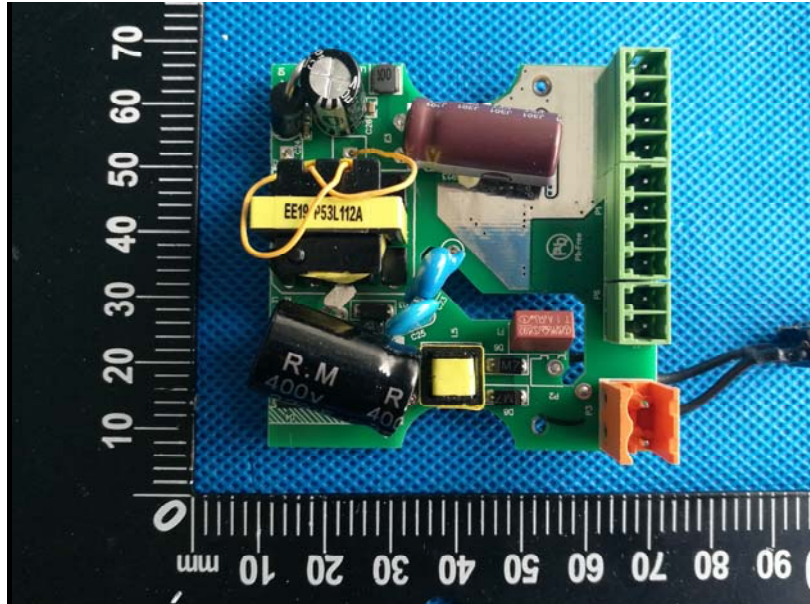

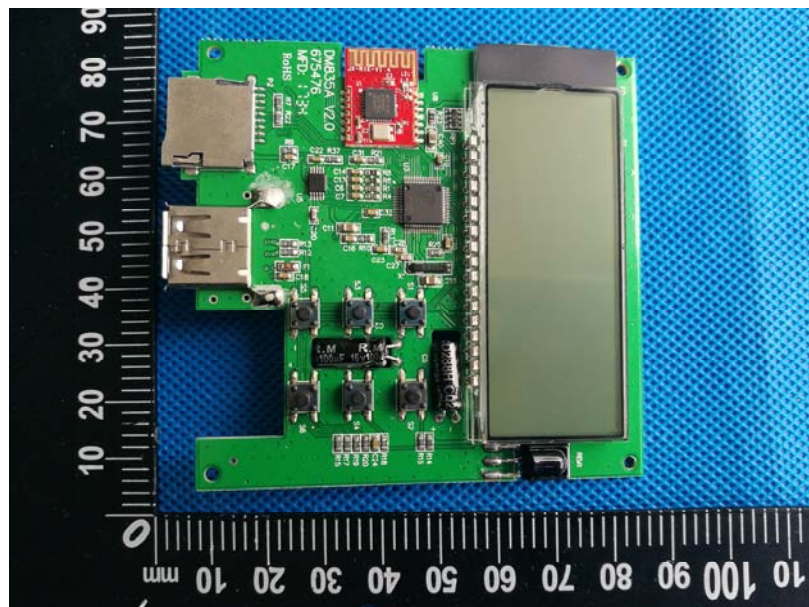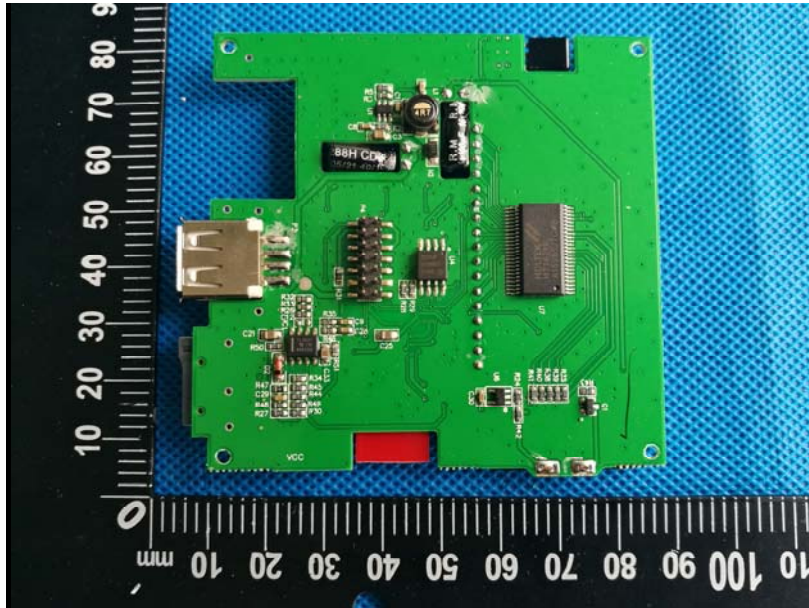

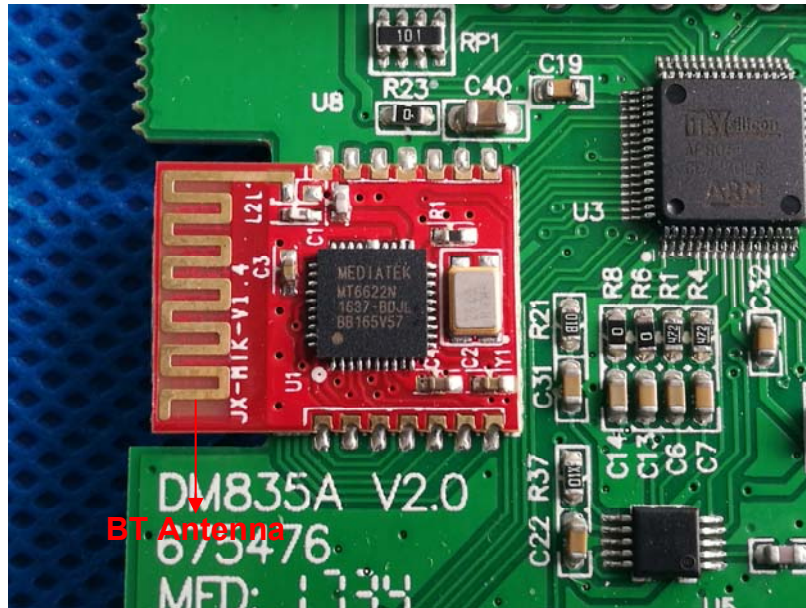

-----End-----