

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM150900579806

Email: ee.shenzhen@sgs.com Page: 1 of 22

## **FCC REPORT**

Application No.: SZEM1509005798HR

Applicant: WUXI IDATA TECHNOLOGY COMPANY LTD.

Manufacturer: WUXI IDATA TECHNOLOGY COMPANY LTD.

Factory WUXI IDATA TECHNOLOGY COMPANY LTD.

Product Name: New Mobile Computer

Model No.(EUT): iData 50
Trade Mark: iData

Operation Frequency: 13.56MHz

FCC ID: 2ADE3IDATA50

Standards: 47 CFR Part 15, Subpart C (2014)

**Date of Receipt:** 2015-09-18

**Date of Test:** 2015-11-23 to 2015-11-25

**Date of Issue:** 2015-11-26

Test Result : PASS \*

\*In the configuration tested, the EUT complied with the standards specified above.

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM150900579806

Page: 2 of 22

### 2 Version

	Revision Record				
Version	Chapter	Date	Modifier	Remark	
01		2015-11-26		Original	

Authorized for issue by:		
Tested By	Eric Fu	2015-11-23
	(Eric Fu) /Project Engineer	Date
Prepared By	Joyce Shi	2015-11-26
	(Joyce Shi) /Clerk	Date
Checked By	July	2015-11-26
	(Jim Huang) /Reviewer	Date



Report No.: SZEM150900579806

Page: 3 of 22

### 3 Contents

			Page
1	С	COVER PAGE	1
2	٧	/ERSION	2
3	С	CONTENTS	3
4	Т	EST SUMMARY	4
5	G	GENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT AND MODES	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.7	TEST FACILITY	
	5.8	EQUIPMENT LIST	
6	Т	EST RESULT & MEASUREMENT DATA	9
	6.1	Antenna Requirment	9
	6.2	RADIATED EMISSIONS	10
	6.3	CONDUCTED EMISSIONS	16
	6.4	Frequency Tolerance	
	6.5	OCCUPIED BANDWIDTH	20
7	Р	PHOTOGRAPHS - EUT TEST SETUP	21
	7.1	CONDUCTED EMISSION	
	7.2	RADIATED SPURIOUS EMISSION	21
8	Р	PHOTOGRAPHS - EUT CONSTRUCTION DETAILS	22



Report No.: SZEM150900579806

Page: 4 of 22

## 4 Test Summary

Test Item	Section in CFR 47	Result
Radiated Emission	Section 15.209;15.225(a)(b)(c)(d)	Pass
Conducted Emission (150KHz to 30MHz)	15.207	Pass
Frequency Tolerance	Section 15.225(e)	Pass
Occupied Bandwidth	Section 15.215	Pass

Remark: Pass: The EUT complies with the essential requirements in the standard.



Report No.: SZEM150900579806

Page: 5 of 22

### 5 General Information

### 5.1 Client Information

Applicant:	WUXI IDATA TECHNOLOGY COMPANY LTD.	
Address of Applicant:	Floor 11, Building B1, Wuxi (Binhu) National Sensing Information Center No.999 Gaolang East Road, Wuxi City, P.R.C.	
Manufacturer:	WUXI IDATA TECHNOLOGY COMPANY LTD.	
Address of Manufacturer:	Floor 11, Building B1, Wuxi (Binhu) National Sensing Information Center, No.999 Gaolang East Road, Wuxi City, P.R.C.	
Factory:	WUXI IDATA TECHNOLOGY COMPANY LTD.	
Address of Factory:	Floor 11, Building B1, Wuxi (Binhu) National Sensing Information Center, No.999 Gaolang East Road, Wuxi City, P.R.C.	

### 5.2 General Description of EUT

Product Name:	New Mobile Computer
Model No.:	iData 50
Trade Mark:	iData
Operation Frequency:	13.56MHz
Battery:	Lithium-ion battery:3.7V 3300mAh(charge by USB)
Power Supply:	MODEL:FJ-SW1260502000UU
	INPUT:AC 100-240V~ 50/60Hz 0.4A MAX
	OUTPUT:5.0V=2000mA

### 5.3 Test Environment and Modes

Operating Environment:	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	1020 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode.

### 5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
NFC Card	NXP	S70

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms e-document.htm">www.sgs.com/terms e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150900579806

Page: 6 of 22

### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

No tests were sub-contracted.

### 5.6 Other Information Requested by the Customer

None.

### 5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

### A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

#### FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

The 3m Semi-anechoic chambers and the 10m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2, 4620C-3.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms e-document.htm">www.sgs.com/terms e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150900579806

Page: 7 of 22

### 5.8 Equipment List

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-05-13	2016-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16	2016-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-11-15	2017-11-15
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-17	2016-10-17
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-11-24	2017-11-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-13	2016-05-13
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-17	2016-10-17
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-13	2016-05-13
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-13	2016-05-13
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-13	2016-05-13
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13
13	Band filter	Amindeon	82346	SEL0094	2015-05-13	2016-05-13
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-13	2016-05-13
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	2016-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-13	2016-05-13
18	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-05-13	2016-05-13



Report No.: SZEM150900579806

Page: 8 of 22

	Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-05-13	2016-05-13
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-09	2016-10-09
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-13	2016-05-13
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T8-02	SEL0162	2015-08-30	2016-08-30
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T4-02	SEL0163	2015-08-30	2016-08-30
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T2-02	SEL0164	2015-08-30	2016-08-30
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-13	2016-05-13
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-13	2016-05-13
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	2016-10-24
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-13	2016-05-13



Report No.: SZEM150900579806

Page: 9 of 22

### 6 Test Result & Measurement Data

### 6.1 Antenna Requirment

**Standard requirement:** FCC Part15 C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:



The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.



Report No.: SZEM150900579806

Page: 10 of 22

### 6.2 Radiated Emissions

Test Requirement:	FCC Part15 C Section 15.225		
Test Method:	ANSI C63.10: 2009		
Measurement Distance:	3m (Semi-Anechoic Chamber)		
Requirements:	(a) The field strength of any emissions within the band 13.553-13.567		
	MHz shall not exceed 15.848 microvolts/meter at 30 meters.		
	(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the		
	field strength of any emissions shall not exceed 334		
	microvolts/meter at 30 meters.		
	(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the		
	field strength of any emissions shall not exceed 106		
	microvolts/meter at 30 meters.		
	(d) The field strength of any emissions appearing outside of the 13.110-		
	14.010 MHz band shall not exceed the general radiated emission		
	limits in § 15.209.		
Detector:	0.009MHz to 30MHz QP RBW=9KHz VBW=30KHz		
	30MHz to 1000MHz QP RBW=100KHz VBW=300KHz		



Report No.: SZEM150900579806

Page: 11 of 22

Test Procedure:	1. The EUT is placed on a turntable, which is 0.8m above ground	
rest rocedure.	·	
	plane.	
	2. The turntable shall be rotated for 360 degrees to determine the	
	position of maximum emission level.	
	3. EUT is set 3m away from the receiving antenna, which is moved	
	from 1m to 4m to find out the maximum emissions.	
	4. Maximum procedure was performed on the six highest emissions to	
	ensure EUT compliance.	
	5. And also, each emission was to be maximized by changing the	
	polarization of receiving antenna both horizontal and vertical.	
	6. Repeat above procedures until the measurements for all	
	frequencies are complete.	
	7. The limit 1.705MHz to 30MHz in clause 4.3 are specified at 30	
	meters, and measurements were made at 3 meters, the limit is	
	translated to 3 meters by using a formula as follows:	
	Limit 3m = Limit 30m + 40log(30m/3)	
Test Instruments:	Refer to section 5.8 for details	
Test Result:	The unit does meet the FCC Part 15 C Section 15.225 requirements.	

### 1.705-30MHz Mode

Test Procedure: For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.4: 2009, section 8.2.1. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. Only the worst position of vertical was shown in the report.

#### Measurement Data

### Intentional emission

Test Frequency	Level (dBμV/m)	Limits	Margin
(MHz)		(dBμV/m)	(dB)
13.56	53.73	128	-74.27

Remark: 1. The EUT was tested at 3m in field chamber.

2. The EUT modulation type is BPSK modulation, and duty cycle is 100%.


3. Since the field strength of fundamental is lower than the spurious emission limit, so the emission mask was not shown in this report



Report No.: SZEM150900579806

Page: 12 of 22

30MHz-1GHz Horizontal

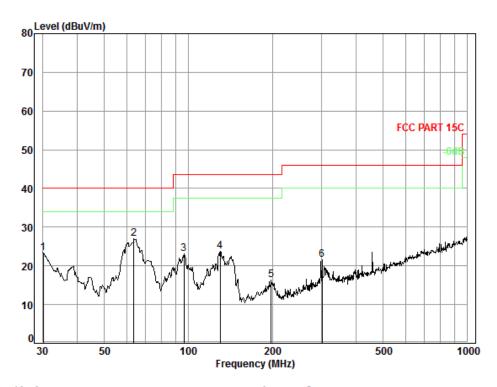

Condition: FCC PART 15C 3m 3142C Horizontal

Job No. : 5798HR Test mode: TX Mode

	Cable	Ant	Preamp	Read		Limit	0ver
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
		,					
30.11	0.60	18.93	27.36	31.16	23.33	40.00	-16.67
63.76	0.80	7.08	27.26	46.30	26.92	40.00	-13.08
96.44	1.17	9.00	27.21	40.07	23.03	43.50	-20.47
129.92	1.28	7.90	27.01	41.67	23.84	43.50	-19.66
197.89	1.40	10.18	26.70	31.38	16.26	43.50	-27.24
301.42	1.90	13.67	26.40	32.46	21.63	46.00	-24.37
	30.11 63.76 96.44 129.92 197.89	Freq Loss  MHz dB  30.11 0.60 63.76 0.80 96.44 1.17 129.92 1.28 197.89 1.40	Freq Loss Factor  MHz dB dB/m  30.11 0.60 18.93 63.76 0.80 7.08 96.44 1.17 9.00 129.92 1.28 7.90 197.89 1.40 10.18	Freq Loss Factor Factor  MHz dB dB/m dB  30.11 0.60 18.93 27.36 63.76 0.80 7.08 27.26 96.44 1.17 9.00 27.21 129.92 1.28 7.90 27.01 197.89 1.40 10.18 26.70	Freq Loss Factor Factor Level  MHz dB dB/m dB dBuV  30.11 0.60 18.93 27.36 31.16 63.76 0.80 7.08 27.26 46.30 96.44 1.17 9.00 27.21 40.07 129.92 1.28 7.90 27.01 41.67 197.89 1.40 10.18 26.70 31.38	Freq Loss Factor Factor Level Level  MHz dB dB/m dB dBuV dBuV/m  30.11 0.60 18.93 27.36 31.16 23.33 63.76 0.80 7.08 27.26 46.30 26.92 96.44 1.17 9.00 27.21 40.07 23.03 129.92 1.28 7.90 27.01 41.67 23.84 197.89 1.40 10.18 26.70 31.38 16.26	30.11 0.60 18.93 27.36 31.16 23.33 40.00 63.76 0.80 7.08 27.26 46.30 26.92 40.00 96.44 1.17 9.00 27.21 40.07 23.03 43.50 129.92 1.28 7.90 27.01 41.67 23.84 43.50 197.89 1.40 10.18 26.70 31.38 16.26 43.50


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms e-document.htm">www.sgs.com/terms e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150900579806

Page: 13 of 22

#### Vertical

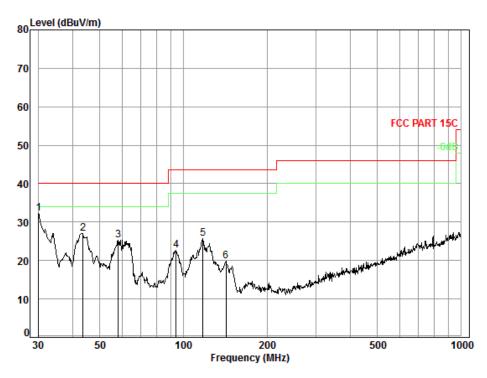

Condition: FCC PART 15C 3m 3142C Vertical

Job No. : 5799HR Test mode: TX Mode

	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	——dB	dBuV	dBuV/m	dBuV/m	dB
1	30.00	0.60	19.00	27.36	40.03	32.27	40.00	-7.73
2	43.51	0.68	11.58	27.31	42.14	27.09	40.00	-12.91
3	58.20	0.80	7.48	27.27	44.20	25.21	40.00	-14.79
4	94.10	1.14	8.93	27.21	39.79	22.65	43.50	-20.85
5	117.36	1.25	8.25	27.09	43.32	25.73	43.50	-17.77
6	142.32	1.30	8.61	26.94	36.96	19.93	43.50	-23.57


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms e-document.htm">www.sgs.com/terms e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150900579806

Page: 14 of 22

0.009-30MHz

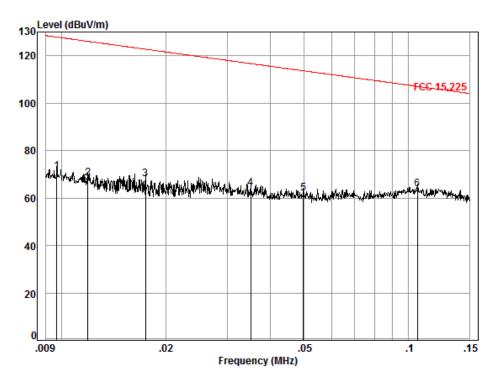

Condition: FCC 15.225 3m

Job No. : 5798HR Test Mode: NFC+TX


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	0.01	0.29	21.80	0.00	49.13	71.22	127.86	-56.64
2	0.01	0.27	20.56	0.00	47.64	68.47	126.06	-57.59
3	0.02	0.23	17.85	0.00	50.08	68.16	122.74	-54.58
4	0.04	0.16	14.32	0.00	49.57	64.05	116.68	-52.63
5	0.05	0.12	12.72	0.00	49.22	62.06	113.65	-51.59
6 рр	0.11	0.05	12.97	0.00	50.70	63.72	107.08	-43.36

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms e-document.htm">www.sgs.com/terms e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150900579806

Page: 15 of 22

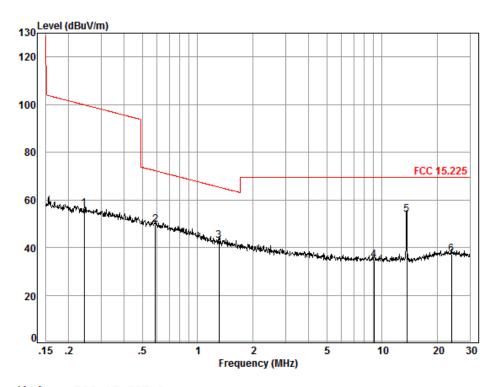

Condition: FCC 15.225 3m

Job No. : 5798HR Test Mode: NFC+TX

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
			40.00		43.00	56.47		42.70
1	0.24	0.08	12.80	0.00	43.29	56.1/	99.89	-43./2
2	0.59	0.14	12.54	0.00	36.86	49.54	72.21	-22.67
3	1.30	0.27	12.69	0.00	29.83	42.79	65.33	-22.54
4	9.01	0.48	10.66	0.00	23.62	34.76	69.50	-34.74
5 pp	13.62	0.57	10.37	0.00	42.79	53.73	69.50	-15.77
6	23.76	0.72	10.18	0.00	26.46	37.36	69.50	-32.14

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms e-document.htm">www.sgs.com/terms e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150900579806

Page: 16 of 22

### 6.3 Conducted Emissions

Test Requirement:	FCC Part 15.207				
Test Method:	ANSI C63.10: 2009				
Frequency Range:	150kHz to 30MHz				
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)				
	Quasi-Peak if maximized peak within 6dB of Quasi-Peak limit				
Plan View of Test Setup	AUX Equipment EUT 80cm Filter Power  To EMI Receiver  EUT: Equipment Under Test LISN: Line Impedence Stablilization Network  Test table height=0.8m				
Test Instruments:	Refer to section 5.8 for details				
Test Results:	Pass				

#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



Report No.: SZEM150900579806

Page: 17 of 22

### Live Line

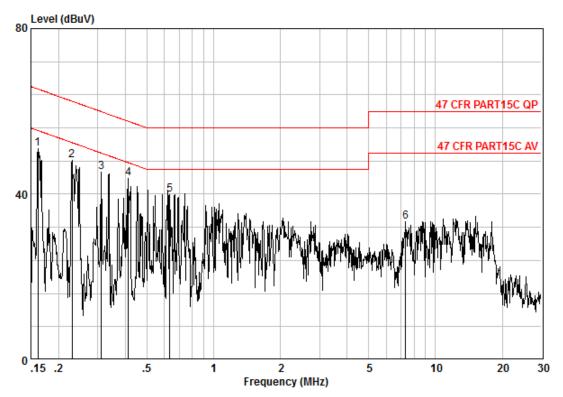

Site : Shielding Room

Condition : 47 CFR PART15C AV CE LINE

Job No. : 5798HR Test Mode : NFC TX

		Cable	LISN	Read		Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16155	0.02	9.60	41.35	50.96	55.38	-4.42	Peak
2	0.23040	0.02	9.60	38.53	48.15	52.44	-4.29	Peak
3	0.31163	0.01	9.59	35.73	45.33	49.93	-4.60	Peak
4 @	0.41266	0.01	9.60	34.18	43.79	47.59	-3.81	Peak
5	0.63383	0.02	9.61	30.34	39.96	46.00	-6.04	Peak
6	7.329	0.01	9.68	23.64	33.33	50.00	-16.67	Peak


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms e-document.htm">www.sgs.com/terms e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150900579806

Page: 18 of 22

#### **Neutral Line**

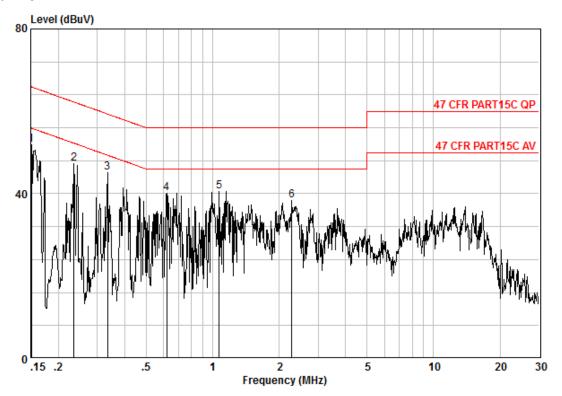

Site : Shielding Room

Condition : 47 CFR PART15C AV CE NEUTRAL

Job No. : 5798HR Test Mode : NFC TX

	Freq		LISN Factor			Limit Line		Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 @	0.15080	0.02	9.59	42.24	51.85	55.96	-4.10	Peak
2	0.23533	0.02	9.60	37.63	47.25	52.26	-5.01	Peak
3	0.33385	0.01	9.59	35.45	45.05	49.35	-4.31	Peak
4	0.62054	0.02	9.61	30.56	40.19	46.00	-5.81	Peak
5	1.071	0.02	9.62	30.91	40.55	46.00	-5.45	Peak
6	2.285	0.02	9.63	28.81	38.46	46.00	-7.54	Peak

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms e-document.htm">www.sgs.com/terms e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150900579806

Page: 19 of 22

### 6.4 Frequency Tolerance

Test Requirement:	FCC Part 15 C Section 15.225(e)
Test Method:	ANSI C63.10: 2009
Frequency Range:	Operation within the band 13.110-14.010 MHz
Requirements:	The frequency tolerance of the carrier signal shall be maintained within
	+/- 0.01% of the operating frequency over a temperature variation of
	-20 degrees to +50 degrees C at normal supply voltage, and for a
	variation in the primary supply voltage from 85% to 115% of the rated
	supply voltage at a temperature of 20 degrees C. For battery operated
	equipment, the equipment tests shall be performed using a new battery.
Method of Measurement:	The EUT was placed in an environmental test chamber and powered such that control element received normal voltage and the transmitter provided maximum RF output.
Test Result:	The unit does meet the FCC Part 15 C Section 15.225(e) requirements.

Test Frequency: 13.56MHz Temperature:20℃							
Supply Voltage	Test Result	Deviation	Limit	Result			
(V) DC	(MHz)	(kHz)	(kHz)				
3.5	13.5612912	1.2912	1.3560	Pass			
3.7	13.5612888	1.2888	1.3560	Pass			
4.2	13.5612905	1.2905	1.3560	Pass			

est Frequency: 13	.56MHz		Volt	age:3.7V
Temperature	Test Result	Deviation	Limit	Result
(℃)	(MHz)	(kHz)	(kHz)	
-20	13.5612901	1.2901	1.3560	
-10	13.5612933	1.2933	1.3560	
0	13.5612907	1.2907	1.3560	
10	13.5612886	1.2886	1.3560	Door
20	13.5612890	1.2890	1.3560	Pass
30	13.5612895	1.2895	1.3560	
40	13.5612912	1.2912	1.3560	
50	13.5612915	1.2915	1.3560	




Report No.: SZEM150900579806

Page: 20 of 22

### 6.5 Occupied Bandwidth

Test Requirement:	FCC Part 15 C Section 15.215 (C)
Test Method:	ANSI C63.10: 2009
Frequency Range:	Operation within the band 13.110 – 14.010 MHz
Requirements:	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through §15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.
Method of Measurement:	The useful radiated emission from the EUT was detected by the
	spectrum analyser with peak detector.
Test Result:	The unit does meet the FCC Part 15 C Section 15.215
	requirements.

The graph as below: represents the emissions take for this device.

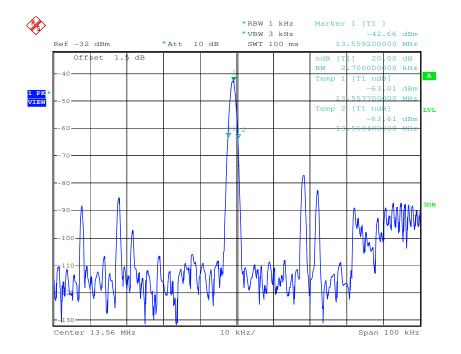



Report No.: SZEM150900579806

Page: 21 of 22

## 7 Photographs - EUT Test Setup

Test Model No.: iData 50

### 7.1 Conducted Emission



## 7.2 Radiated Spurious Emission







Report No.: SZEM150900579806

Page: 22 of 22

## 8 Photographs - EUT Construction Details

Refer to Appendix A – Photographs for EUT Constructional Details for SZEM1509005798HR.