



TEST REPORT

Report Reference No...... : **TRE1605009507** R/C.....: 59796

FCC ID..... : **2ADE3IDATA50A**

Applicant's name..... : **WUXI IDATA TECHNOLOGY COMPANY LTD.**

Address..... : Floor 11, Building B1, Wuxi Binhu National Sensing Information Center, No.999 Gaolang East Road, Wuxi City, P.R.C.

Manufacturer..... : **WUXI IDATA TECHNOLOGY COMPANY LTD.**

Address..... : Floor 11, Building B1, Wuxi Binhu National Sensing Information Center, No.999 Gaolang East Road, Wuxi City, P.R.C.

Test item description : **NEW MOBILE COMPUTER**

Trade Mark : iData

Model/Type reference..... : iData 50

Listed Model(s)..... : -

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.225**

Date of receipt of test sample..... : May.19, 2016

Date of testing..... : May.20, 2016 ~ Aug.13, 2016

Date of issue..... : Aug.14, 2016

Result..... : **PASS**

Compiled by
(position+printedname+signature)... : File administrators Candy Liu

Candy Liu

Supervised by
(position+printed name+signature)... : Project Engineer Lion Cai

Lion Cai

Approved by
(position+printed name+signature)... : RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd**

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Contents

1.	<u>APPLICABLE STANDARDS AND TEST DESCRIPTION</u>	3
1.1.	Applicable Standards	3
1.2.	Test Description	3
2.	<u>SUMMARY</u>	4
2.1.	Client Information	4
2.2.	Product Description	4
2.3.	Operation state	5
2.4.	EUT configuration	5
2.5.	Modifications	5
3.	<u>TEST ENVIRONMENT</u>	6
3.1.	Address of the test laboratory	6
3.2.	Test Facility	6
3.3.	Equipments Used during the Test	7
3.4.	Environmental conditions	8
3.5.	Statement of the measurement uncertainty	8
4.	<u>TEST CONDITIONS AND RESULTS</u>	9
4.1.	Antenna requirement	9
4.2.	Conducted Emission (AC Main)	10
4.3.	20dB bandwidth	13
4.4.	Radiated Emission	14
4.5.	Frequency stability	17
5.	<u>TEST SETUP PHOTOS OF THE EUT</u>	18
6.	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	19

1. APPLICABLE STANDARDS AND TEST DESCRIPTION

1.1. Applicable Standards

The tests were performed according to following standards:

[FCC Rules Part 15.225](#): Operation within the band 13.110-14.010 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2. Test Description

ReportSection	Test Item	FCC Rule	Result
4.1	Antenna requirement	15.203	Pass
4.2	Line Conducted Emission (AC Main)	15.207	Pass
4.3	20dB Bandwidth	2.1049	Pass
4.4	Radiated Emissions& Field Strength of Fundamental Emissions	15.225(a)(b)(c)(d)/15.209	Pass
4.5	Frequency Stability	15.225e	Pass

Remark: The measurement uncertainty is not included in the test result.

2. SUMMARY

2.1. Client Information

Applicant:	WUXI IDATA TECHNOLOGY COMPANY LTD.
Address:	Floor 11, Building B1, Wuxi Binhu National Sensing Information Center, No.999 Gaolang East Road, Wuxi City, P.R.C.
Manufacturer:	WUXI IDATA TECHNOLOGY COMPANY LTD.
Address:	Floor 11, Building B1, Wuxi Binhu National Sensing Information Center, No.999 Gaolang East Road, Wuxi City, P.R.C.

2.2. Product Description

Name of EUT	NEW MOBILE COMPUTER
Trade Mark:	iData
Model No.:	iData 50
Listed Model(s):	-
IMEI 1:	869881011800052
Power supply:	DC 3.7V From internal battery
Adapter information1:	Model:FJ-SW1260502000UN Input:AC 100-240V 50/60Hz 0.4A Max Output: 5Vd.c., 2000mA
Adapter information2:	Model:FJ-SW1202000N Input:AC 100-240V 50/60Hz 0.6A Max Output: 12Vd.c., 2000mA
NFC	
Modulation:	FSK
Operation frequency:	13.56MHz
Channel number:	1
Antenna type:	Internal Antenna
Antenna gain:	0.0dBi

2.3. Operation state

◆ **Test mode**

For RF test items:

The engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions:

The EUT was set to connect with the NFC under large package sizes transmission.

2.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

	Length (m) :	/
	Shield :	/
	Detachable :	/
	Manufacturer :	/
	Model No. :	/

2.5. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until December 31, 2016.

FCC-Registration No.: 317478

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

IC-Registration No.: 5377A&5377B

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Dec. 31, 2013, valid time is until Dec. 31, 2016.

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B on Dec.03, 2014, valid time is until Dec.03, 2017.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

VCCI

The 3m Semi-

anechoic chamber (12.2m×7.95m×6.7m) of Shenzhen Huatongwei International Inspection Co., Ltd.

has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 29, 2015.

Radiated disturbance above 1GHz measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2013. Valid time is until Dec. 23, 2016.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 19, 2015.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2013. Valid time is until May 06, 2016.

DNV

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2016.

3.3. Equipments Used during the Test

Conducted Emission (AC Main)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2015/11/02
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	100038	2015/11/02
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2015/11/02
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2015/11/02
2	EMI TEST RECEIVER	Rohde&Schwarz	ESI 26	100009	2015/11/02
3	EMI TEST Software	Audix	E3	N/A	N/A
4	TURNTABLE	ETS	2088	2149	N/A
5	ANTENNA MAST	ETS	2075	2346	N/A
6	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A
7	HORNANTENNA	ShwarzBeck	9120D	1011	2015/11/02
8	Amplifer	Sonoma	310N	E009-13	2015/11/02
9	JS amplifier	Rohde&Schwarz	JS4-00101800-28-5A	F201504	2015/11/02
10	High pass filter	Compliance Direction systems	BSU-6	34202	2015/11/02
11	HORNANTENNA	ShwarzBeck	9120D	1012	2015/11/02
12	Amplifer	Compliance Direction systems	PAP1-4060	120	2015/11/02
13	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2015/11/02
14	TURNTABLE	MATURO	TT2.0	----	N/A
15	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A

Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2015/11/02

The Cal.Interval was one year

3.4. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-40 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4. TEST CONDITIONS AND RESULTS

4.1. Antenna requirement


Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Result:

The antenna is integral antenna, the best case gain of the antenna is 0.0dBi

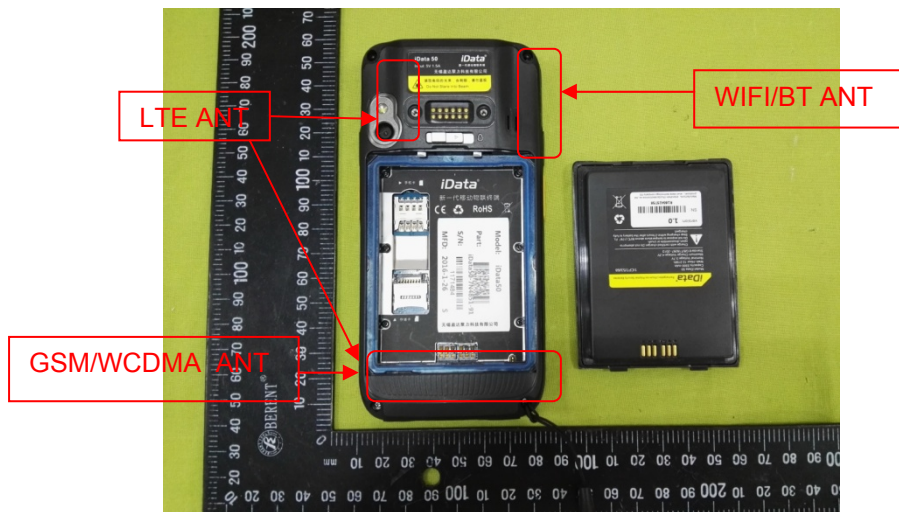

4.2. Conducted Emission (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

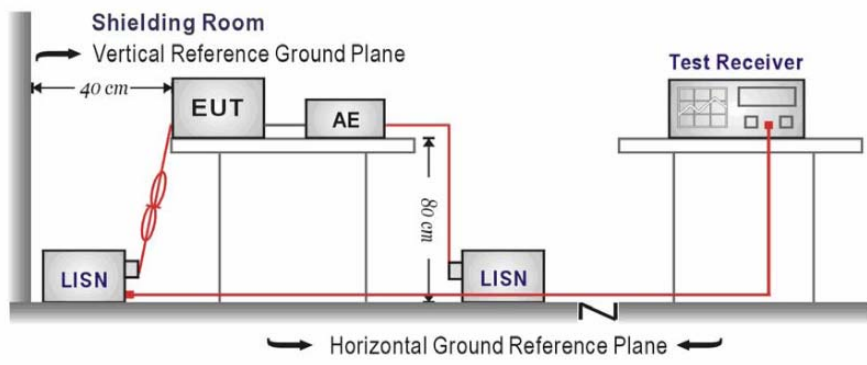


TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

TEST RESULTS

Test mode:AC 120V	NFC	Polarization	L
-------------------	-----	--------------	---

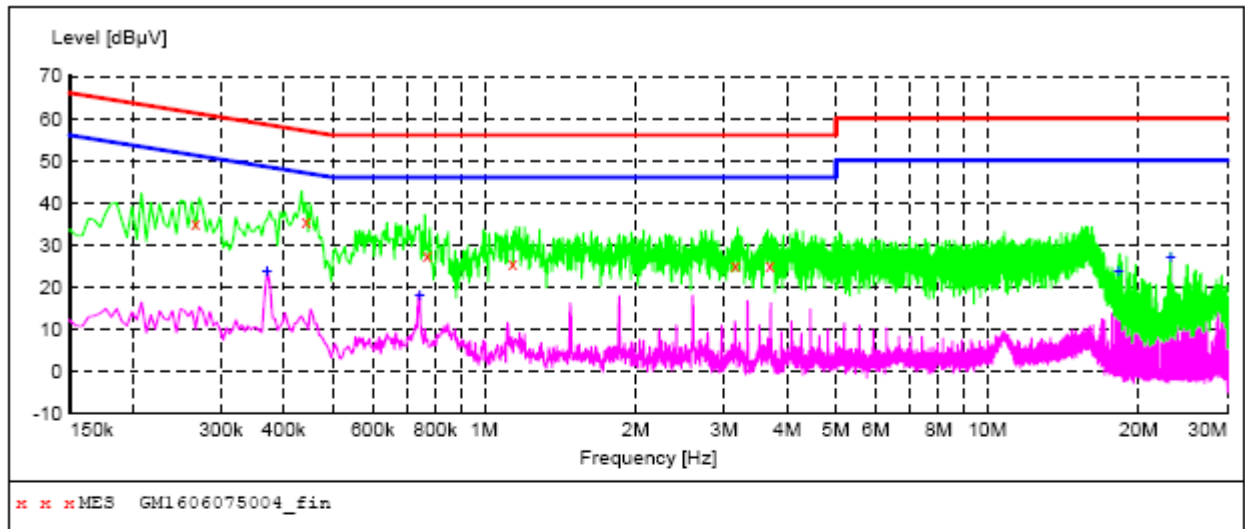

MEASUREMENT RESULT: "GM1606075004_fin"

6/7/2016 1:09PM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.267000	35.00	10.2	61	26.2	QP	L1	GND
0.442500	35.70	10.2	57	21.3	QP	L1	GND
0.771000	27.70	10.2	56	28.3	QP	L1	GND
1.140000	25.70	10.2	56	30.3	QP	L1	GND
3.156000	25.00	10.3	56	31.0	QP	L1	GND
3.696000	25.10	10.3	56	30.9	QP	L1	GND

MEASUREMENT RESULT: "GM1606075004_fin2"

6/7/2016 1:09PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.370500	23.70	10.2	49	24.8	AV	L1	GND
0.744000	18.20	10.2	46	27.8	AV	L1	GND
18.244500	23.80	10.9	50	26.2	AV	L1	GND
23.127000	26.80	11.0	50	23.2	AV	L1	GND

Test mode: AC 120V	NFC	Polarization	N
--------------------	-----	--------------	---

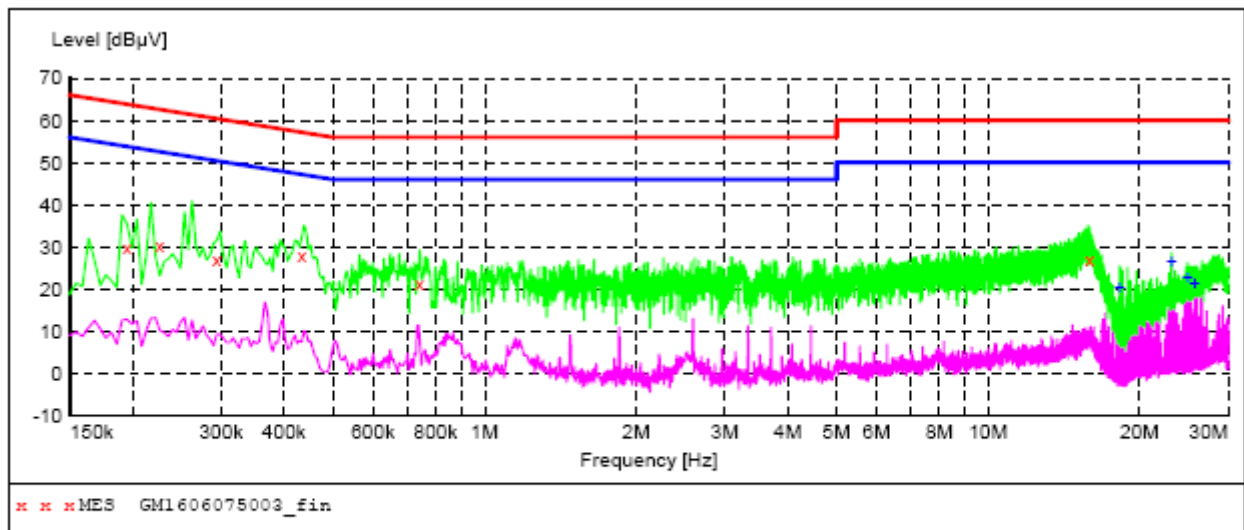

MEASUREMENT RESULT: "GM1606075003_fin"

6/7/2016 1:05PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	29.80	10.2	64	34.0	QP	N	GND
0.226500	30.30	10.2	63	32.3	QP	N	GND
0.294000	27.20	10.2	60	33.2	QP	N	GND
0.433500	27.90	10.2	57	29.3	QP	N	GND
0.744000	21.40	10.2	56	34.6	QP	N	GND
15.900000	27.10	10.8	60	32.9	QP	N	GND

MEASUREMENT RESULT: "GM1606075003_fin2"

6/7/2016 1:05PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
18.244500	20.40	10.9	50	29.6	AV	N	GND
23.127000	26.40	11.0	50	23.6	AV	N	GND
24.900000	22.70	11.0	50	27.3	AV	N	GND
25.692000	21.20	11.0	50	28.8	AV	N	GND


Remark: Transd=Cable lose+ PULSE LIMITER factor+ ARTIFICIAL MAINS factor; Margin= Limit -Level

4.3. 20dB bandwidth

LIMIT

Intentional radiators must be designed to ensure that the 20dB emission bandwidth in the specific band 13.553~13.567MHz.

TEST CONFIGURATION

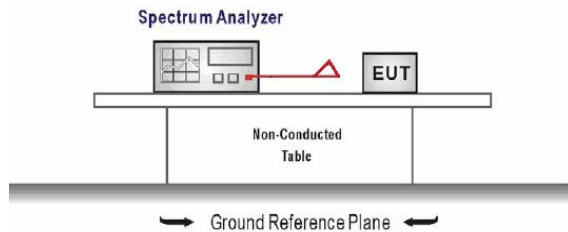

TEST PROCEDURE

Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Set the spectrum analyzer center frequency to the EUT nominal center frequency

RBW = 1 kHz, VBW ≥ 3 × RBW

Sweep time= auto couple

Detector = Peak


Trace mode = max hold

Measured the spectrum width with power higher than 20dB below carrier .

TEST RESULTS

Frequency	20dB Bandwidth(KHz)
13.56MHz	2.66

Test plot as follows:

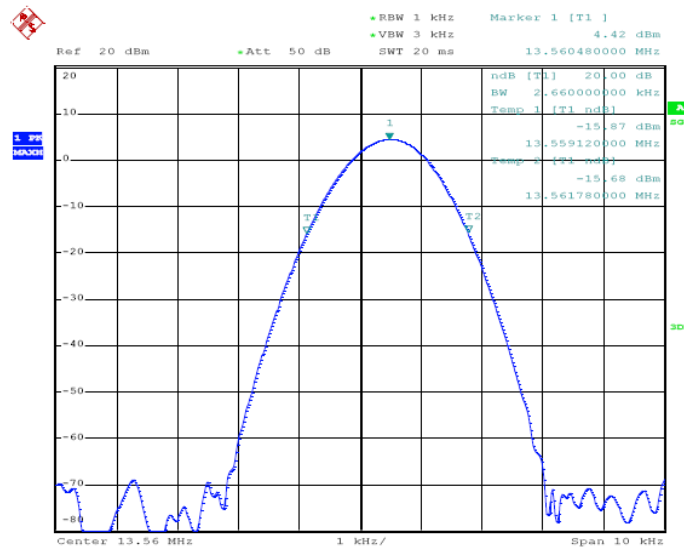

4.4. Radiated Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (uV/m)	Measurement Distance(meters)
0.009MHz-0.490MHz	2400/F(kHz)	300
0.490MHz-1.705MHz	24000/F(kHz)	30
1.705MHz-30MHz	30	30
30MHz-88MHz	100	3
88MHz-216MHz	150	3
216MHz- 960MHz	200	3
Above 960MHz	500	3

FCC CFR Title 47 Part 15 Subpart C Section 15.225


Field Strength of Fundamental Emissions Limit			
Frequency	Field Strength (uV/m)@30m	Field Strength (dBuV/m)@30m	Field Strength (dBuV/m)@3m
1.705MHz-13.110MHz	30	29.5	69.5
13.110MHz-13.410MHz	106	40.5	80.5
13.410MHz-13.553MHz	334	50.5	90.5
13.553MHz-13.567MHz	15848	84	124.0
13.567MHz-13.710MHz	334	50.5	90.5
13.710MHz-14.010MHz	106	40.5	80.5
14.010MHz-30MHz	30	29.5	69.5

$dB\mu V/m = 20\log(\mu V/m)$


$3m \text{ Limit}(dB\mu V/m) = 10m \text{ Limit}(dB\mu V/m) + 40\log(30/3)$

TEST CONFIGURATION

- 9KHz ~30MHz

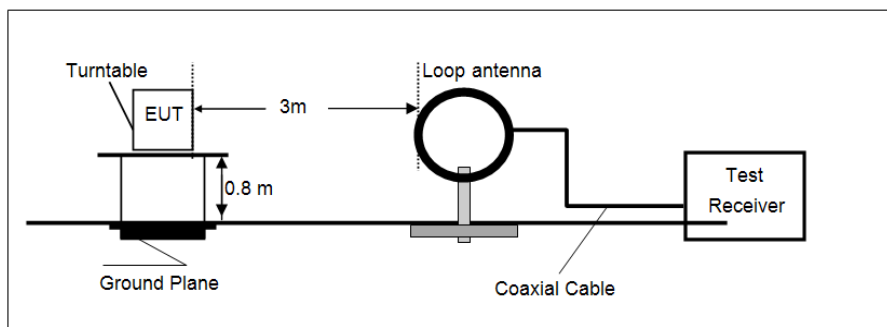

- 30MHz ~ 1GHz

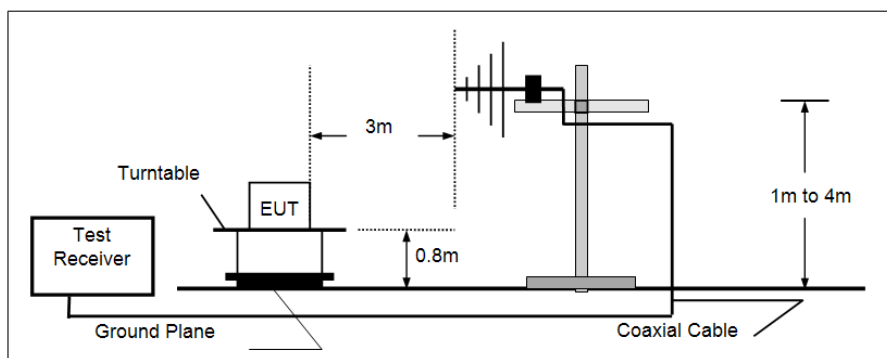

TEST PROCEDURE

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9kHz for below 30MHz, and 100kHz for 30MHz-1000MHz..

Note: Emission level (dB μ V/m) = 20 log Emission level (μ V/m).

TEST RESULTS

All Measurements were performed using a loop antenna. The antenna was positioned in three orthogonal positions (X front, Y side, Z top) and the position with the highest emission level was recorded (X).

Radiated Emission Measurement data:


Frequency MHz	Level dB μ V/m	Transd dB	Limit (dB μ V/m @3m)	Margin dB	Det.	Result
0.01	37.73	20.04	87.6	-49.87	Quasi	Pass
0.55	41.38	20.09	92.8	-51.42	Quasi	Pass
4.75	42.52	20.17	69.5	-26.98	Quasi	Pass
27.46	35.74	20.52	69.5	-33.76	Quasi	Pass

1. Level = Receiver Read level + Transd
2. Transd = Antenna Factor + Cable Loss

Field Strength of Fundamental Emissions Measurement data:

Frequency MHz	Mea. Frequency MHz	Test result (dB μ V/m @3m)	Limit (dB μ V/m @3m)	Margin dB	Det.	Result
13.110~13.410	13.40	48.74	80.5	-31.76	Quasi	Pass
13.410~13.553	13.551	64.52	90.5	-25.98	Quasi	Pass
13.553~13.567	13.56	96.38	124	-27.62	Quasi	Pass
13.567~13.710	13.568	62.74	90.5	-27.76	Quasi	Pass
13.710~14.010	13.71	69.25	85.5	-16.25	Quasi	Pass


Radiated Emission Measurement data:
30MHz ~ 1GHz

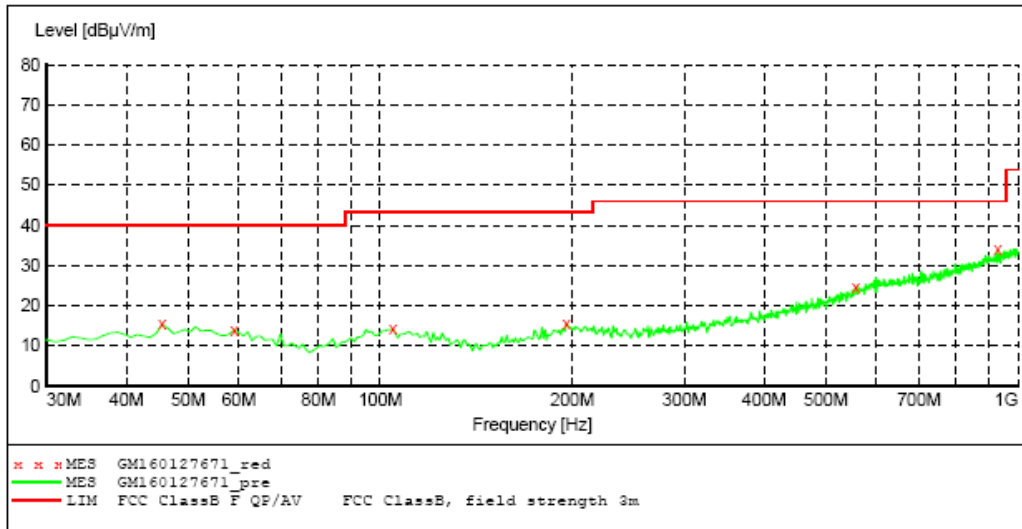

MEASUREMENT RESULT: "GM160127671_red"

7/27/2016 5:13PM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
45.520000	15.40	-14.7	40.0	24.6	QP	300.0	0.00	HORIZONTAL
59.100000	14.00	-15.0	40.0	26.0	QP	100.0	239.00	HORIZONTAL
104.690000	14.20	-14.7	43.5	29.3	QP	100.0	360.00	HORIZONTAL
195.870000	15.60	-14.0	43.5	27.9	QP	100.0	39.00	HORIZONTAL
556.710000	24.40	-4.6	46.0	21.6	QP	300.0	360.00	HORIZONTAL
930.160000	33.90	3.3	46.0	12.1	QP	300.0	360.00	HORIZONTAL

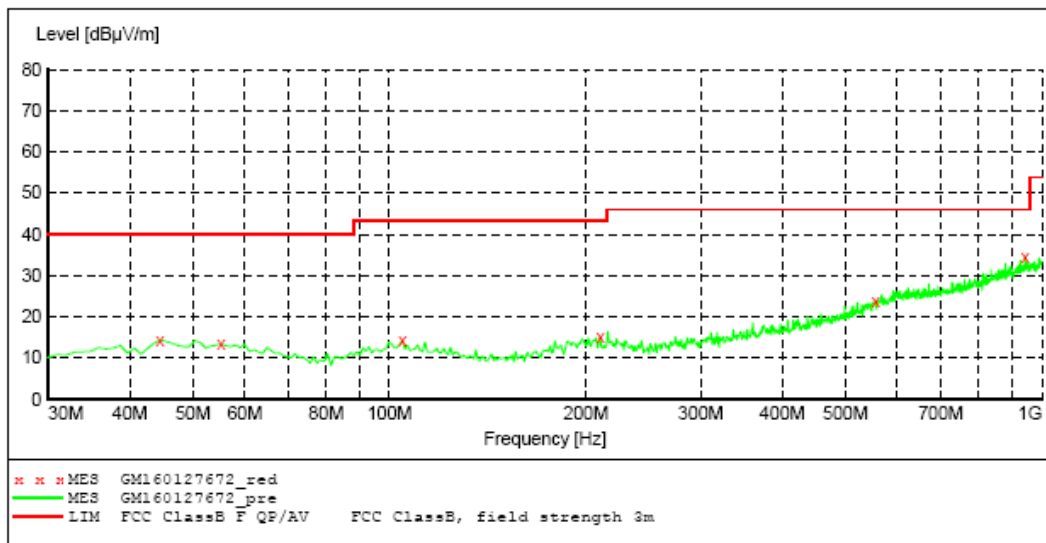

MEASUREMENT RESULT: "GM160127672_red"

7/27/2016 5:17PM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
44.550000	14.30	-14.8	40.0	25.7	QP	100.0	101.00	VERTICAL
55.220000	13.40	-14.7	40.0	26.6	QP	100.0	346.00	VERTICAL
104.690000	14.20	-14.7	43.5	29.3	QP	100.0	212.00	VERTICAL
210.420000	15.00	-14.0	43.5	28.5	QP	100.0	145.00	VERTICAL
555.740000	23.60	-4.6	46.0	22.4	QP	100.0	168.00	VERTICAL
942.770000	34.70	3.5	46.0	11.3	QP	100.0	168.00	VERTICAL


Remark: Transd=Cable lose+ Antenna factor- Pre-amplifier; Margin=Limit -Level

4.5. Frequency stability

LIMIT

2.5ppm

TEST CONFIGURATION

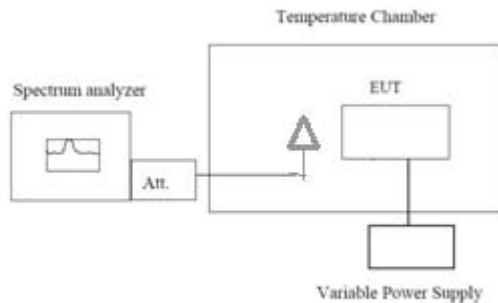

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE


1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.
5. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

TEST RESULTS

NFC 13.56MHz						
Voltage(%)	Power(VDC)	TEMP(°C)	Meas.Freq.(MHz)	Freq.Dev(Hz)	Deviation(ppm)	Limit(ppm)
100%	3.70	-30	13.560480	480	35.39823	-100< Deviation >100
100%		-20	13.560470	470	34.66077	
100%		-10	13.560490	490	36.13569	
100%		0	13.560480	480	35.39823	
100%		+10	13.560450	450	33.18584	
100%		+20	13.560470	470	34.66077	
100%		+30	13.560490	490	36.13569	
100%		+40	13.560450	450	33.18584	
100%		+50	13.560490	490	36.13569	
Low Battery power		3.50	+20	13.560440	440	
High Battery power	4.20	+20	13.560490	490	36.13569	

5. Test Setup Photos of the EUT

Radiated Emission

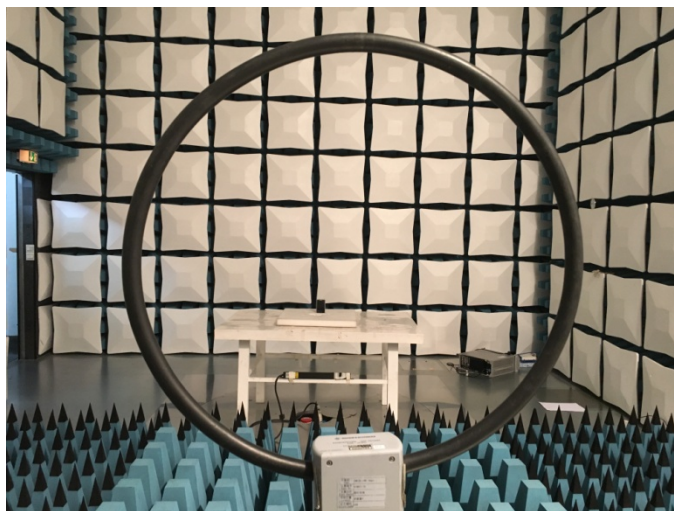

Conducted Emission (AC Mains)



6. External and Internal Photos of the EUT

Reference to Test Report TRE1605009501

.....End of Report.....