

Appendix B

Detailed Test Results

GSM850 for Head, Body&Hotspot
GSM1900 for Head, Body&Hotspot
WCDMA Band II for Head, Body&Hotspot
WCDMA Band IV for Head, Body&Hotspot
WCDMA Band V for Head, Body&Hotspot
LTE Band 2 for Head, Body&Hotspot
LTE Band 4 for Head, Body&Hotspot
LTE Band 5 for Head, Body&Hotspot
LTE Band 7 for Head, Body&Hotspot
LTE Band 12 for Head, Body&Hotspot
LTE Band 17 for Head, Body&Hotspot
LTE Band 38 for Head, Body&Hotspot
LTE Band 41 for Head, Body&Hotspot
WIFI 2.4G for Head, Body&Hotspot
WIFI 5G for Head, Body&Hotspot, Limbs
BT for Head, Body&Hotspot

T1 Pro GSM850 GPRS 4TS 190CH Right cheek**T1 Pro**

Communication System: GSM 850; Frequency: 836.600

Medium: HSL. Medium parameters used: $f=836.600$ MHz; $\sigma=0.928$ S/m; $\epsilon_r=42.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.4, 10.4, 10.4); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.458 W/kg; SAR (10g) = 0.313 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.480 W/kg; SAR (10g) = 0.359 W/kg;

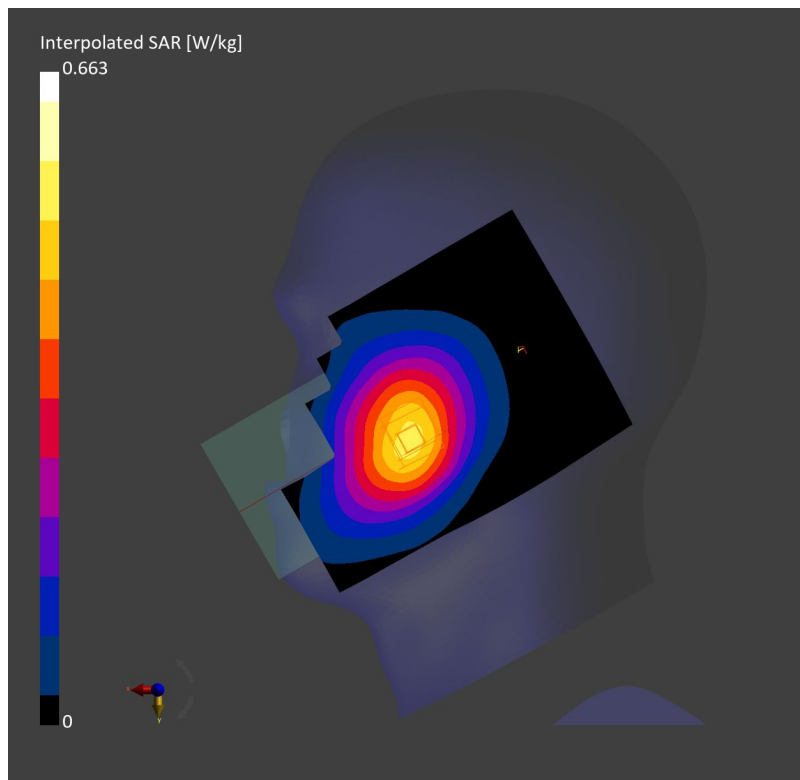

T1 Pro GSM850 GPRS 4TS 190CH Back side 10mm**T1 Pro**

Communication System: GSM 850; Frequency: 836.600

Medium: HSL. Medium parameters used: $f = 836.600$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.4, 10.4, 10.4); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.208 W/kg; SAR (10g) = 0.132 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.217 W/kg; SAR (10g) = 0.121 W/kg;

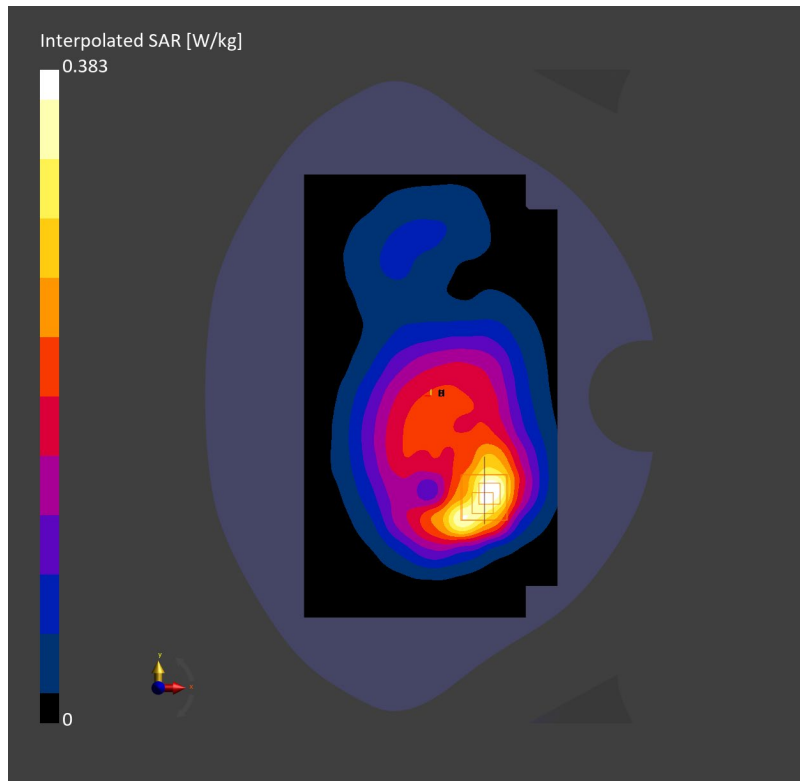

T1 Pro GSM1900 GPRS 4TS 661CH Right cheek**T1 Pro**

Communication System: PCS 1900; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f= 1880.000$ MHz; $\sigma= 1.42$ S/m; $\epsilon_r = 40.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.63, 8.63, 8.63); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.197 W/kg; SAR (10g) = 0.117 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.06 dB

SAR (1g) = 0.216 W/kg; SAR (10g) = 0.136 W/kg;

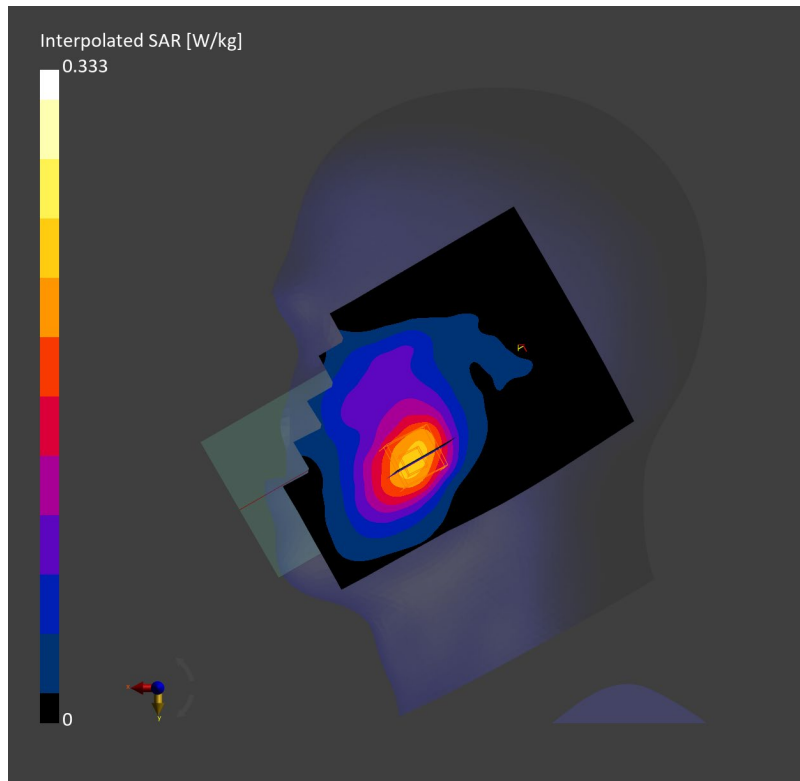

T1 Pro GSM1900 GPRS 4TS 661CH Bottom side 10mm**T1 Pro**

Communication System: PCS 1900; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f= 1880.000$ MHz; $\sigma= 1.42$ S/m; $\epsilon_r = 40.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.63, 8.63, 8.63); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (45.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.410 W/kg; SAR (10g) = 0.224 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.415 W/kg; SAR (10g) = 0.228 W/kg;

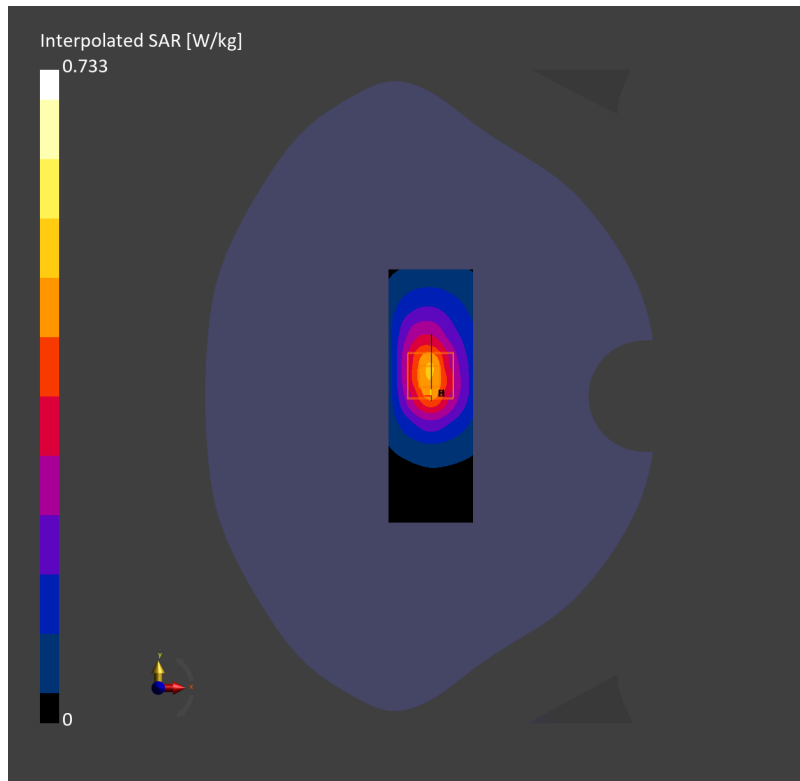

T1 Pro WCDMA Band II RMC 9262CH Right cheek**T1 Pro**

Communication System: Band 2; Frequency: 1852.400

Medium: HSL. Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.63, 8.63, 8.63); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.192 W/kg; SAR (10g) = 0.114 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.211 W/kg; SAR (10g) = 0.133 W/kg;

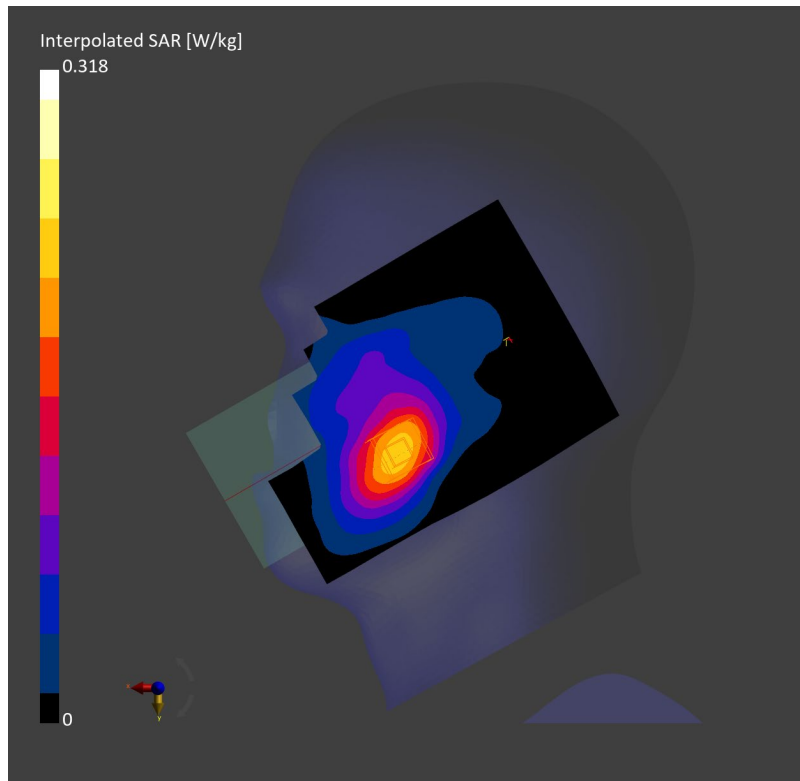

T1 Pro WCDMA Band II RMC 9262CH Back side 10mm**T1 Pro**

Communication System: Band 2; Frequency: 1852.400

Medium: HSL. Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.63, 8.63, 8.63); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.341 W/kg; SAR (10g) = 0.192 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 0.348 W/kg; SAR (10g) = 0.200 W/kg;

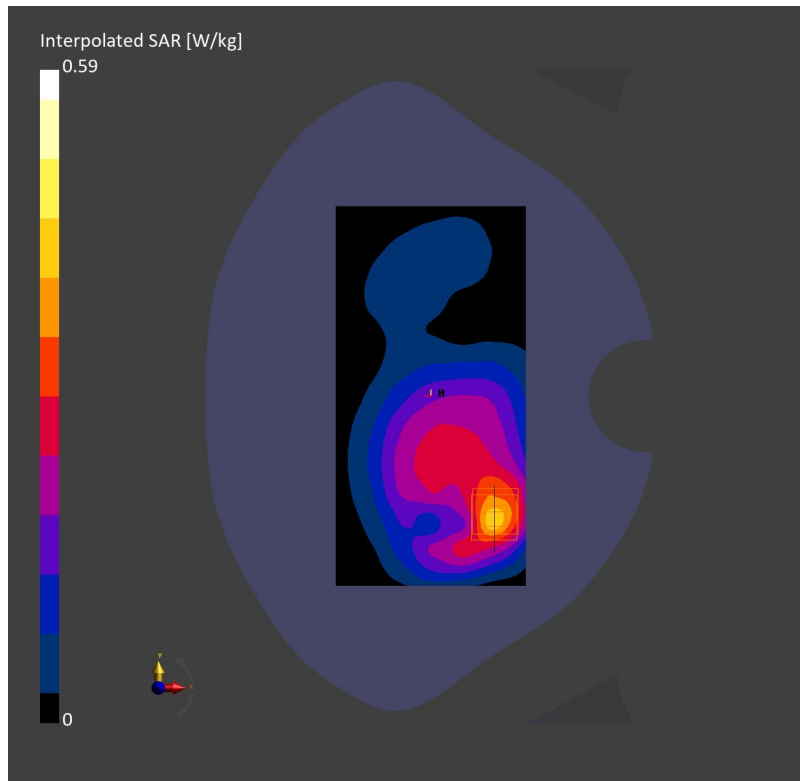

T1 Pro WCDMA Band IV RMC 1513CH Right cheek**T1 Pro**

Communication System: Band 4; Frequency: 1752.600

Medium: HSL. Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.251 W/kg; SAR (10g) = 0.150 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.279 W/kg; SAR (10g) = 0.177 W/kg;

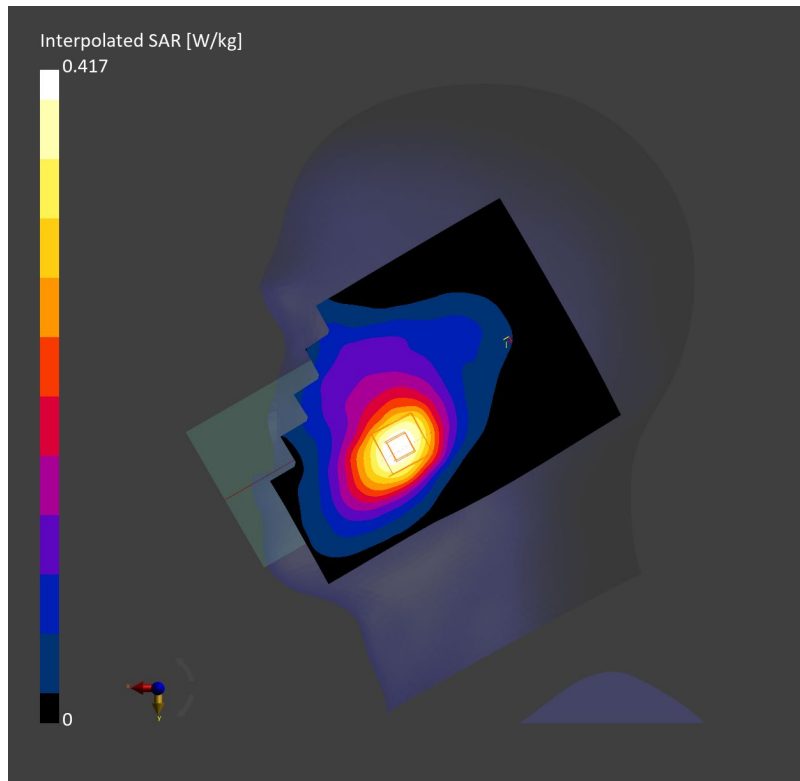

T1 Pro WCDMA Band IV RMC 1513CH Front side 10mm**T1 Pro**

Communication System: Band 4; Frequency: 1752.600

Medium: HSL. Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.282 W/kg; SAR (10g) = 0.178 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.02 dB

SAR (1g) = 0.293 W/kg; SAR (10g) = 0.194 W/kg;

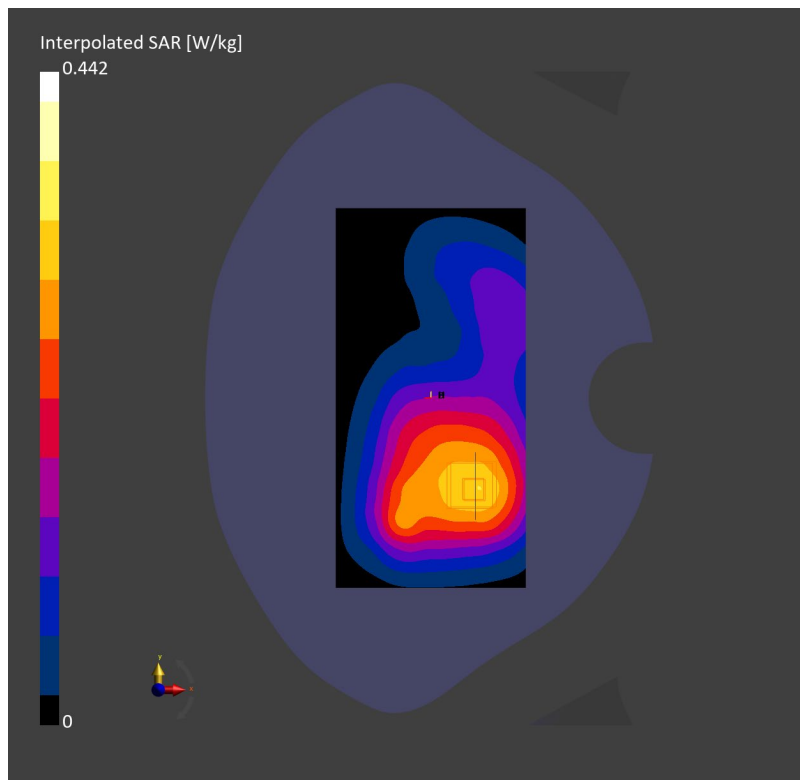

T1 Pro WCDMA Band V RMC 4182CH Right cheek**T1 Pro**

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.4, 10.4, 10.4); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.332 W/kg; SAR (10g) = 0.225 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.10 dB

SAR (1g) = 0.360 W/kg; SAR (10g) = 0.272 W/kg;

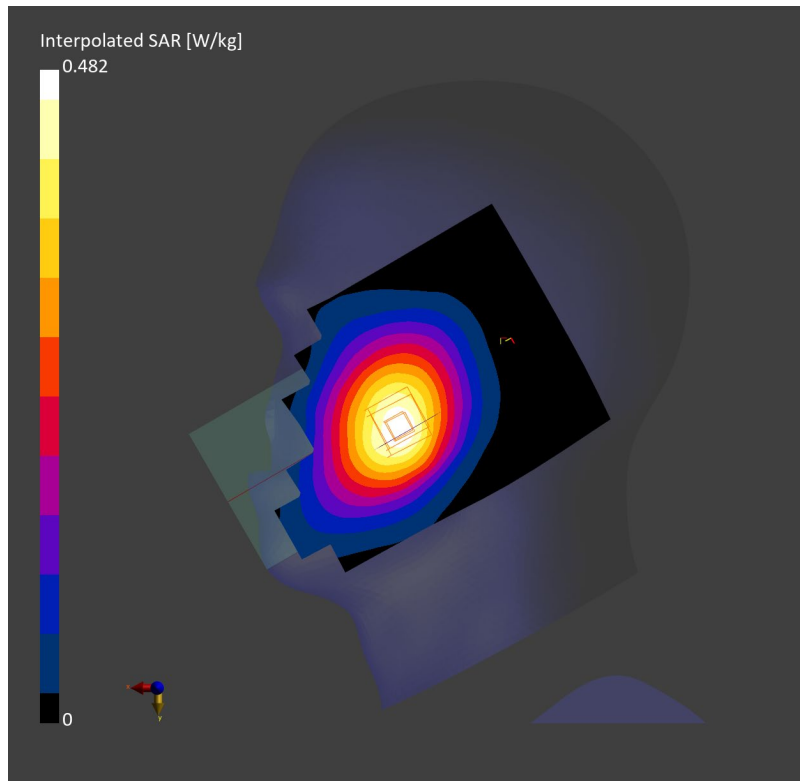

T1 Pro WCDMA Band V RMC 4182CH Back side 10mm**T1 Pro**

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.4, 10.4, 10.4); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.320 W/kg; SAR (10g) = 0.203 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.05 dB

SAR (1g) = 0.352 W/kg; SAR (10g) = 0.204 W/kg;

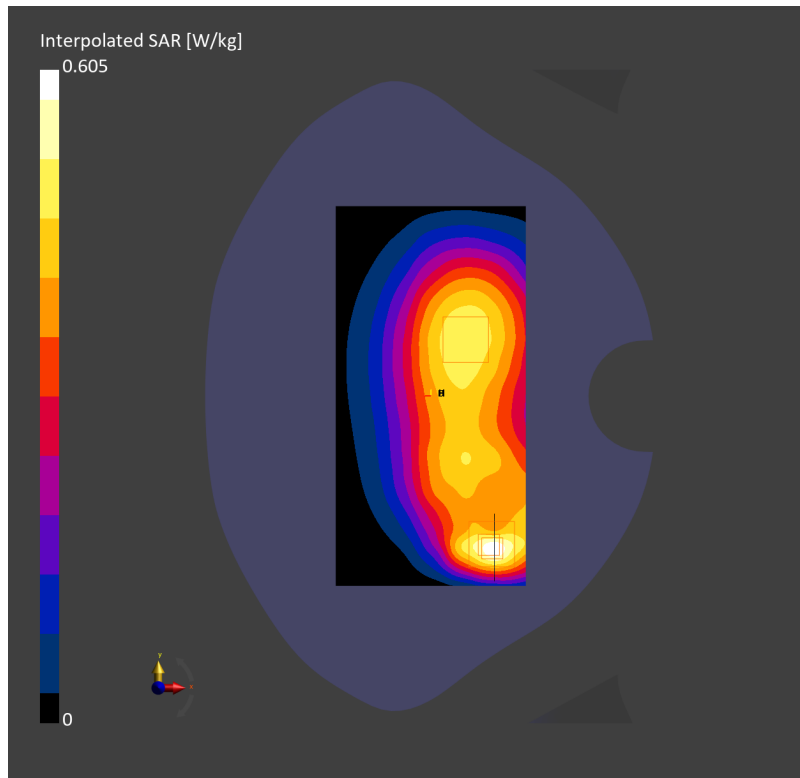

T1 Pro LTE Band 2 20M QPSK 1RB50 18900CH Right cheek**T1 Pro**

Communication System: Band 2; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f=1880.000$ MHz; $\sigma=1.42$ S/m; $\epsilon_r=40.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.63, 8.63, 8.63); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.194 W/kg; SAR (10g) = 0.112 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.07 dB

SAR (1g) = 0.211 W/kg; SAR (10g) = 0.130 W/kg;

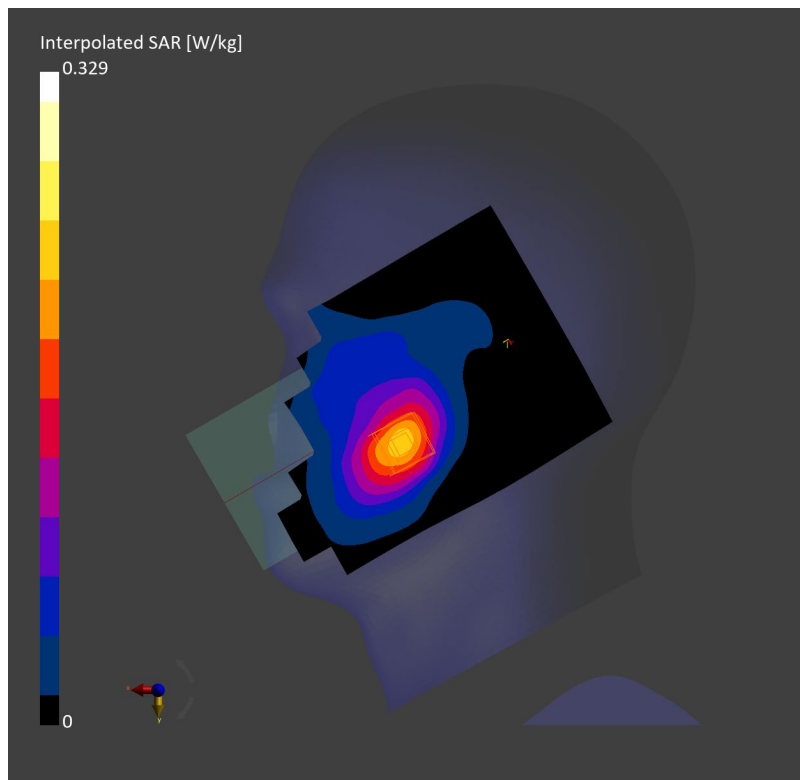

T1 Pro LTE Band 2 20M QPSK 1RB50 18900CH Back side 10mm**T1 Pro**

Communication System: Band 2; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f=1880.000$ MHz; $\sigma=1.42$ S/m; $\epsilon_r=40.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.63, 8.63, 8.63); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.360 W/kg; SAR (10g) = 0.212 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.13 dB

SAR (1g) = 0.362 W/kg; SAR (10g) = 0.208 W/kg;

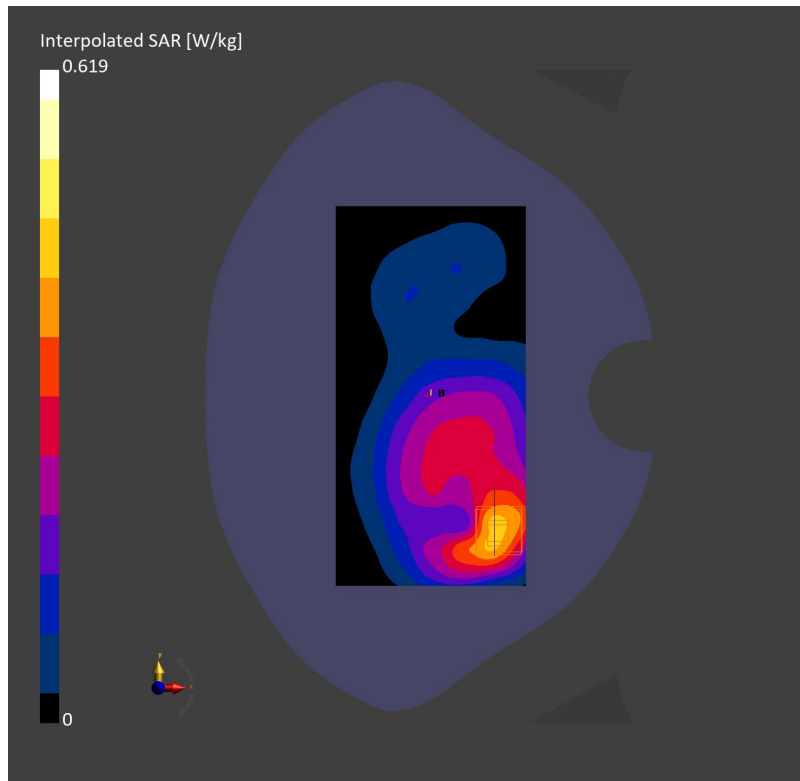

T1 Pro LTE Band 4 20M QPSK 1RB50 20175CH Right cheek**T1 Pro**

Communication System: Band 4; Frequency: 1732.500

Medium: HSL. Medium parameters used: $f=1732.500$ MHz; $\sigma=1.40$ S/m; $\epsilon_r=40.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.246 W/kg; SAR (10g) = 0.142 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.14 dB

SAR (1g) = 0.265 W/kg; SAR (10g) = 0.165 W/kg;

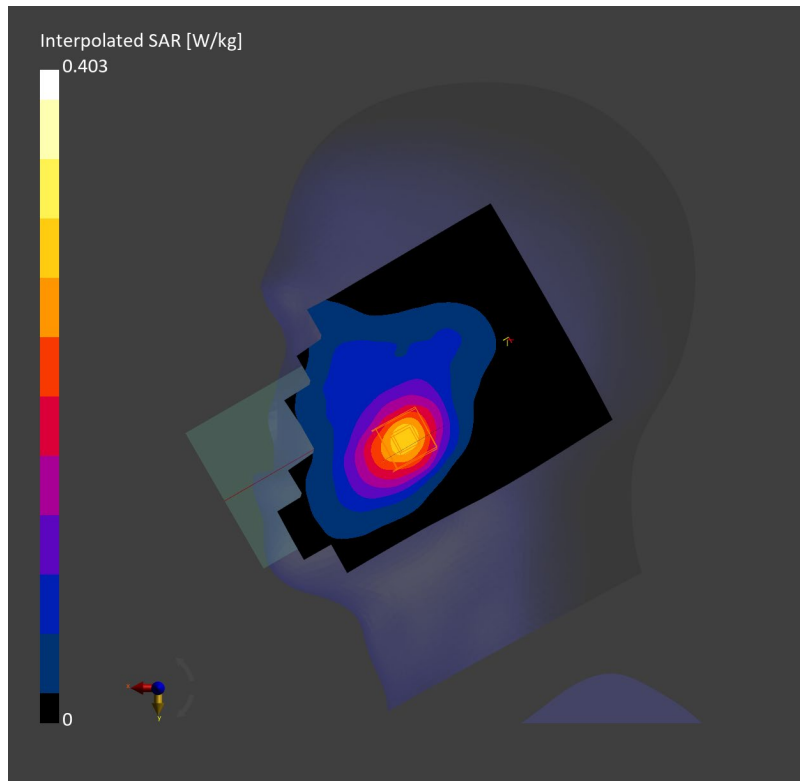

T1 Pro LTE Band 4 20M QPSK 1RB50 20175CH Front side 10mm**T1 Pro**

Communication System: Band 4; Frequency: 1732.500

Medium: HSL. Medium parameters used: $f = 1732.500$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 40.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.301 W/kg; SAR (10g) = 0.192 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.00 dB

SAR (1g) = 0.314 W/kg; SAR (10g) = 0.209 W/kg;

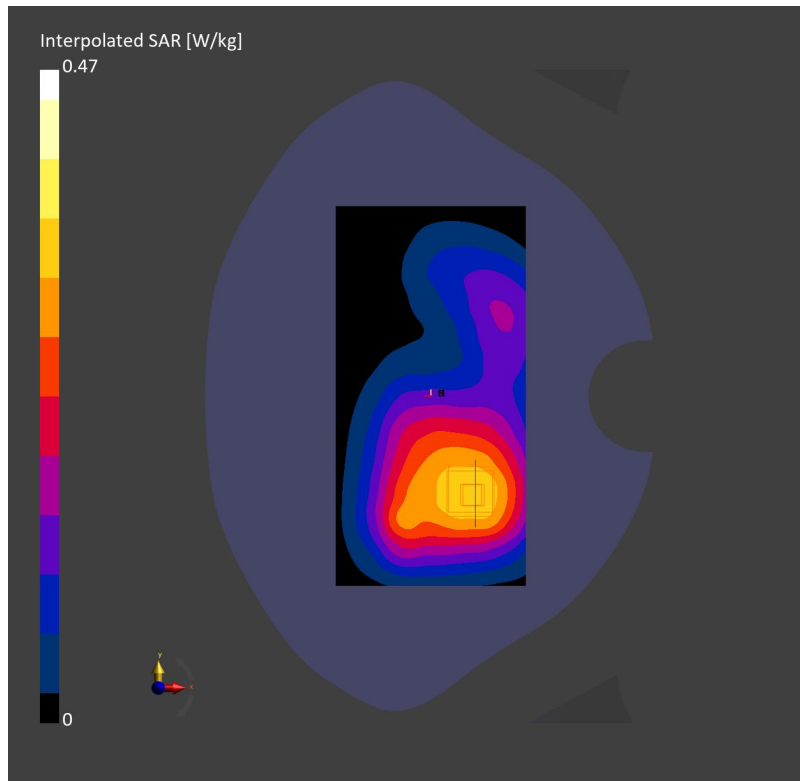

T1 Pro LTE Band 5 10M QPSK 1RB25 20525CH Right cheek**T1 Pro**

Communication System: Band 5; Frequency: 836.500

Medium: HSL. Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.4, 10.4, 10.4); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.333 W/kg; SAR (10g) = 0.225 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.05 dB

SAR (1g) = 0.366 W/kg; SAR (10g) = 0.278 W/kg;

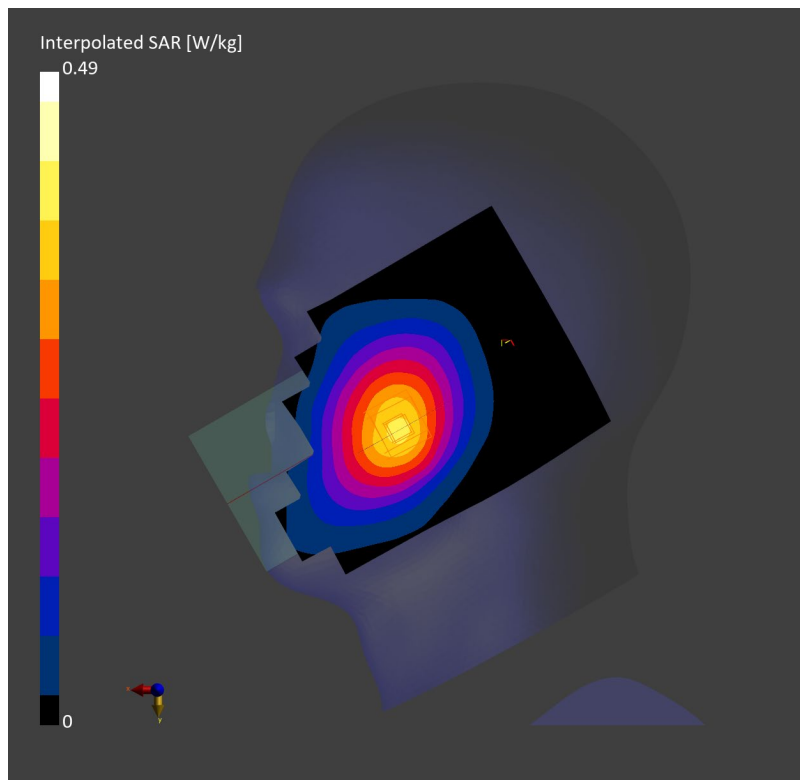

T1 Pro LTE Band 5 10M QPSK 1RB25 20525CH Back side 10mm**T1 Pro**

Communication System: Band 5; Frequency: 836.500

Medium: HSL. Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.4, 10.4, 10.4); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.342 W/kg; SAR (10g) = 0.214 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.04 dB

SAR (1g) = 0.377 W/kg; SAR (10g) = 0.216 W/kg;

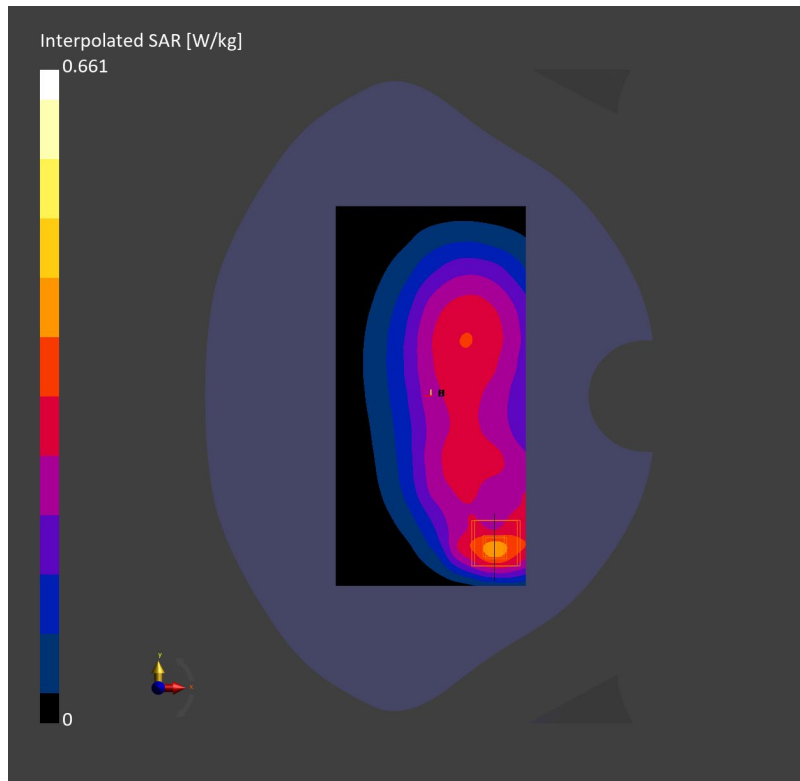

T1 Pro LTE Band 7 20M QPSK 1RB50 21100CH Left cheek**T1 Pro**

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 37.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.05, 8.05, 8.05); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.455 W/kg; SAR (10g) = 0.233 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.02 dB

SAR (1g) = 0.469 W/kg; SAR (10g) = 0.257 W/kg;

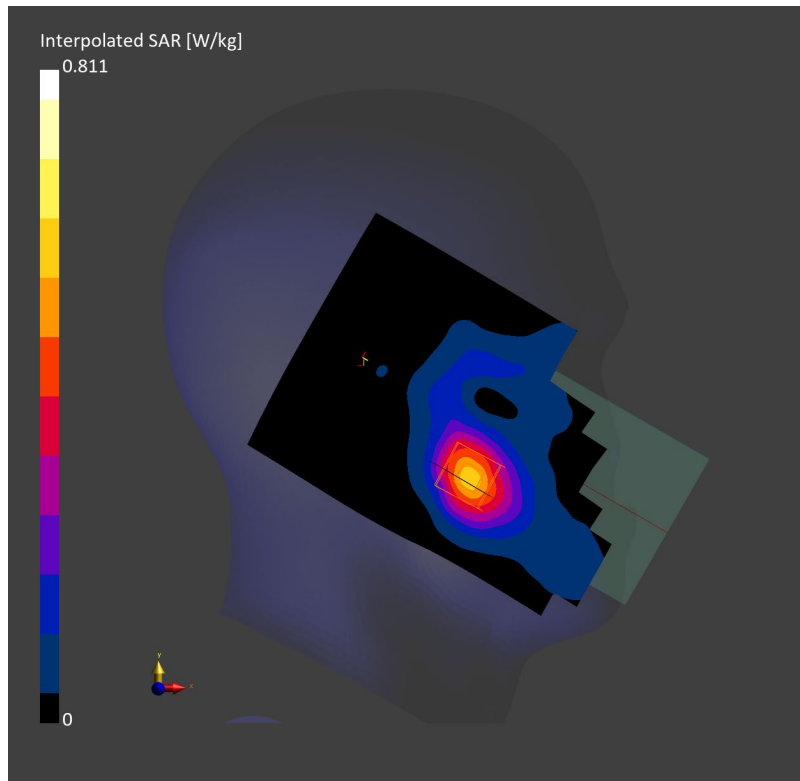

T1 Pro LTE Band 7 20M QPSK 1RB50 20850CH Bottom side 10mm**T1 Pro**

Communication System: Band 7; Frequency: 2510.000

Medium: HSL. Medium parameters used: $f = 2510.000$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 37.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.05, 8.05, 8.05); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (72.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.884 W/kg; SAR (10g) = 0.434 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.950 W/kg; SAR (10g) = 0.466 W/kg;

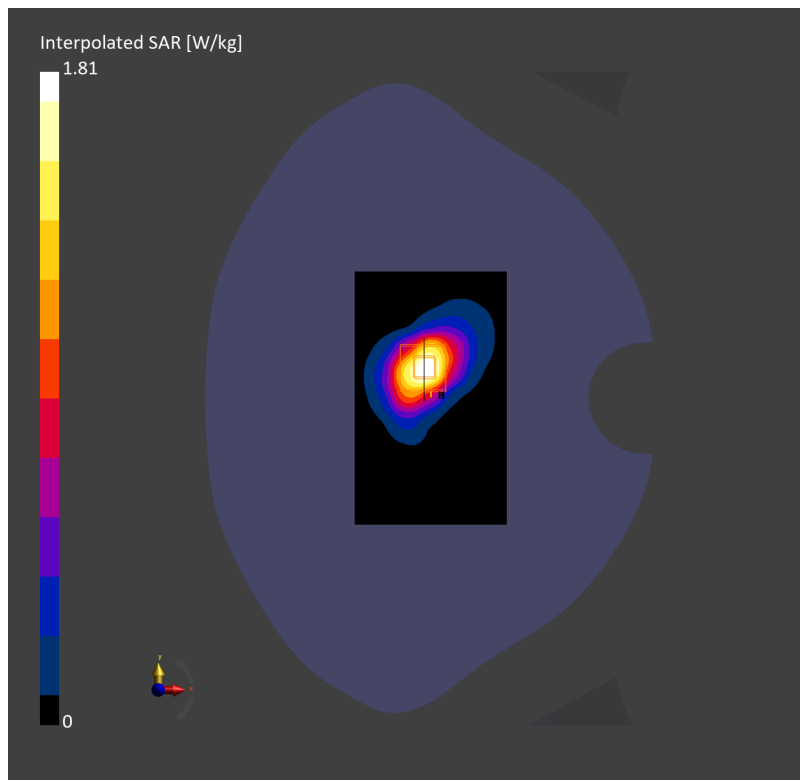

T1 Pro LTE Band 12 10M QPSK 1RB25 23060CH Right cheek**T1 Pro**

Communication System: Band 12; Frequency: 704.000

Medium: HSL. Medium parameters used: $f=704.000$ MHz; $\sigma=0.843$ S/m; $\epsilon_r=43.7$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.76, 10.76, 10.76); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.171 W/kg; SAR (10g) = 0.119 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.185 W/kg; SAR (10g) = 0.144 W/kg;

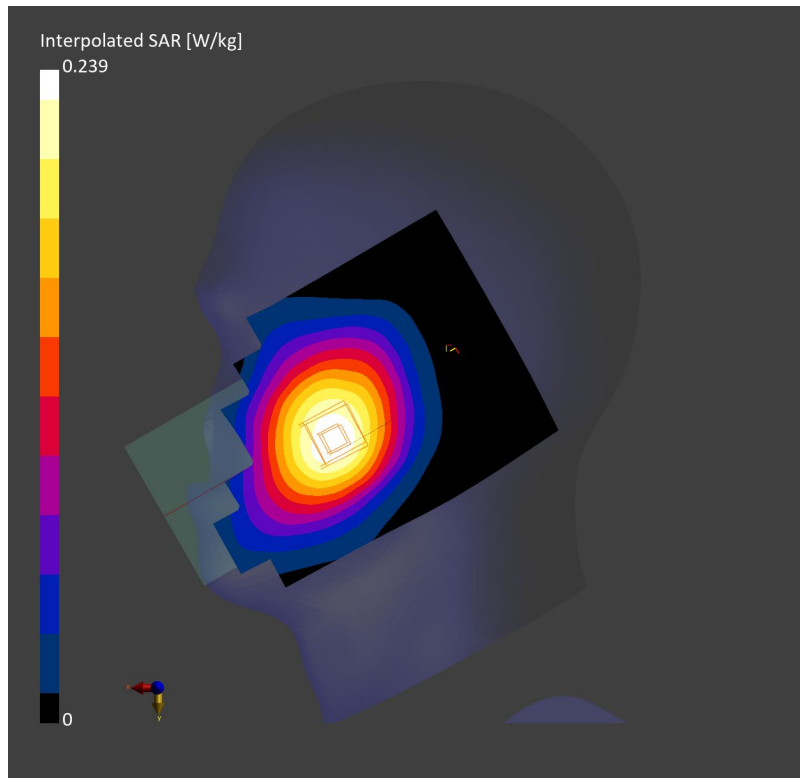

T1 Pro LTE Band 12 10M QPSK 1RB25 23060CH Back side 10mm**T1 Pro**

Communication System: Band 12; Frequency: 704.000

Medium: HSL. Medium parameters used: $f = 704.000$ MHz; $\sigma = 0.843$ S/m; $\epsilon_r = 43.7$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.76, 10.76, 10.76); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.293 W/kg; SAR (10g) = 0.208 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.314 W/kg; SAR (10g) = 0.238 W/kg;

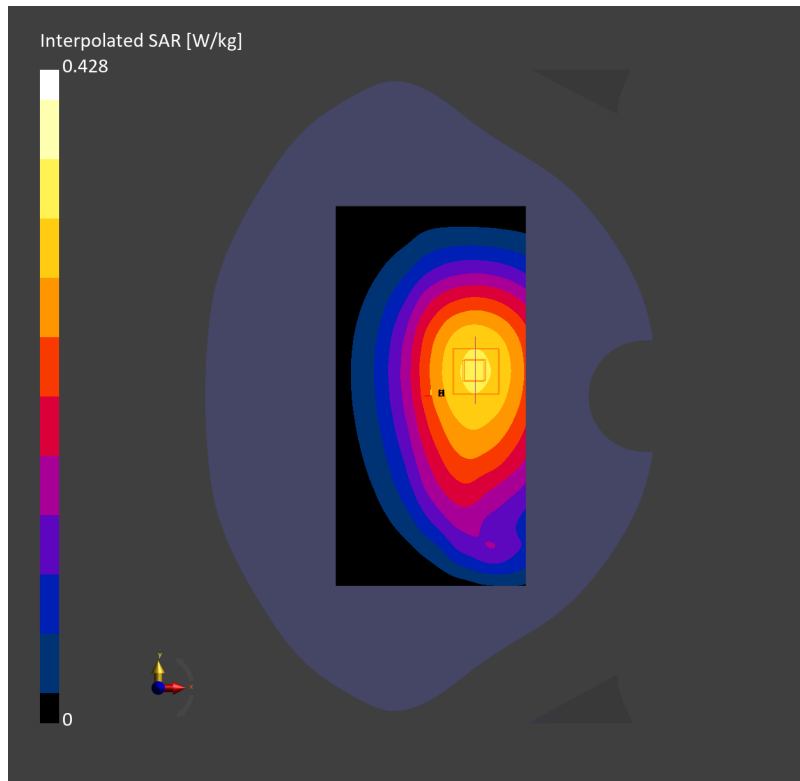

T1 Pro LTE Band 17 10M QPSK 1RB25 23780CH Right cheek**T1 Pro**

Communication System: Band 17; Frequency: 709.000

Medium: HSL. Medium parameters used: $f=709.000$ MHz; $\sigma=0.844$ S/m; $\epsilon_r=43.7$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.76, 10.76, 10.76); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.198 W/kg; SAR (10g) = 0.138 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.11 dB

SAR (1g) = 0.213 W/kg; SAR (10g) = 0.166 W/kg;

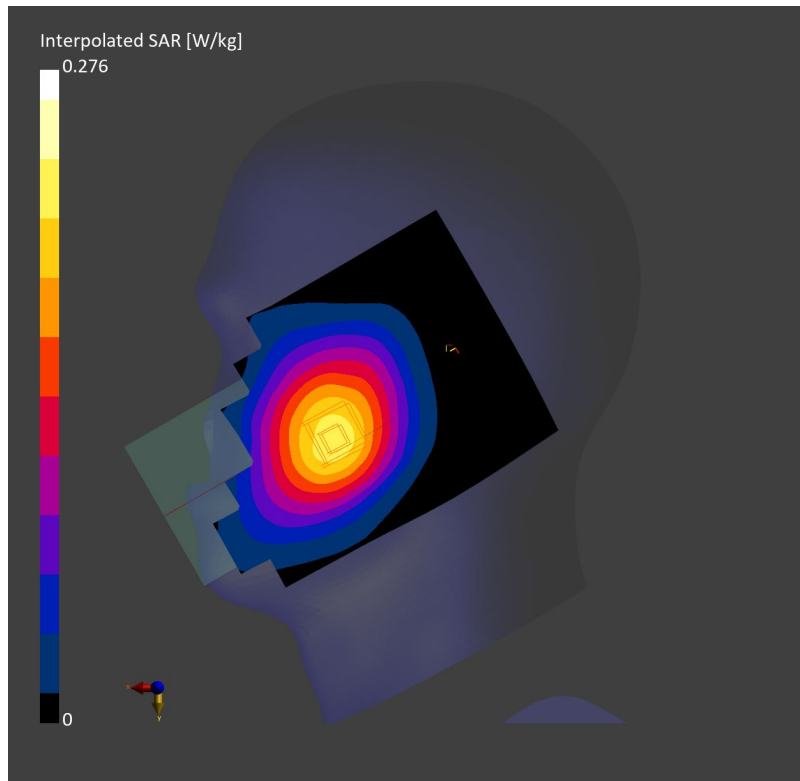

T1 Pro LTE Band 17 10M QPSK 1RB25 23780CH Back side 10mm**T1 Pro**

Communication System: Band 17; Frequency: 709.000

Medium: HSL. Medium parameters used: $f = 709.000$ MHz; $\sigma = 0.844$ S/m; $\epsilon_r = 43.7$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.76, 10.76, 10.76); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.329 W/kg; SAR (10g) = 0.235 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.00 dB

SAR (1g) = 0.354 W/kg; SAR (10g) = 0.267 W/kg;

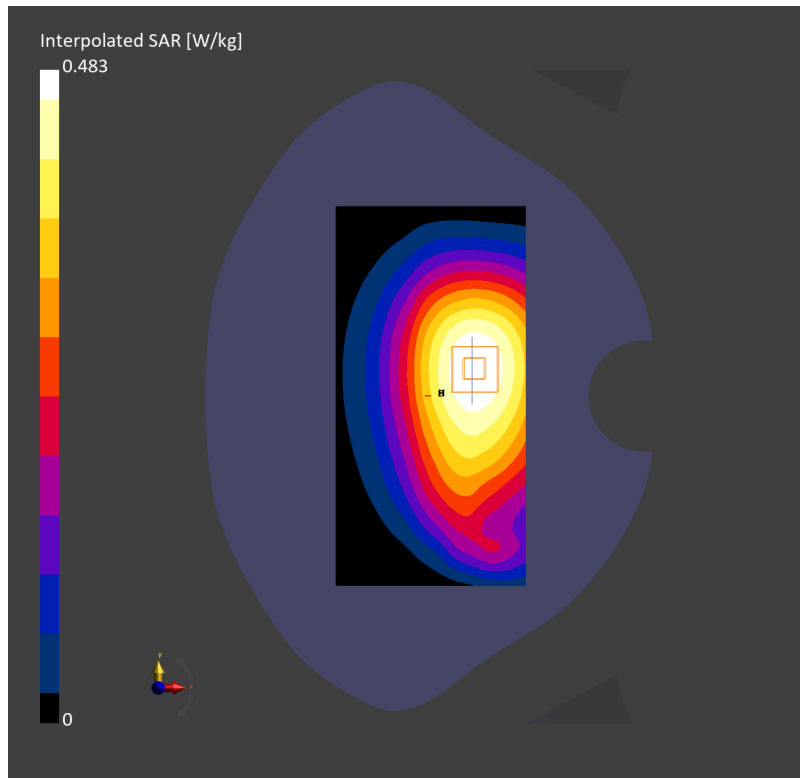

T1 Pro LTE Band 38 20M QPSK 1RB50 38000CH Left cheek**T1 Pro**

Communication System: Band 38; Frequency: 2595.000

Medium: HSL. Medium parameters used: $f = 2595.000$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 37.6$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.85, 7.85, 7.85); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.314 W/kg; SAR (10g) = 0.160 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.08 dB

SAR (1g) = 0.323 W/kg; SAR (10g) = 0.174 W/kg;

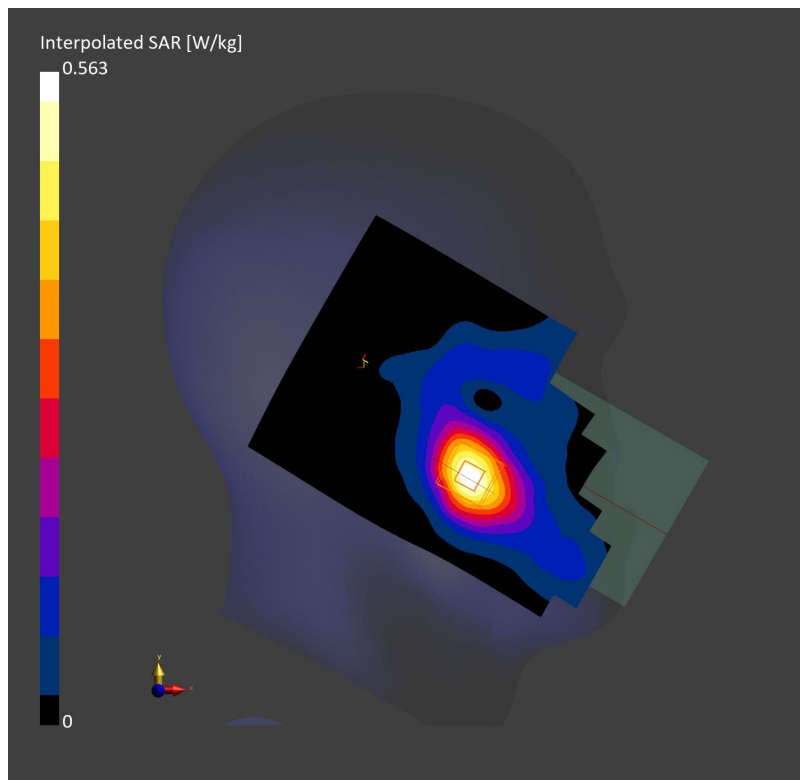

T1 Pro LTE Band 38 20M QPSK 1RB50 38000CH Bottom side 10mm**T1 Pro**

Communication System: Band 38; Frequency: 2595.000

Medium: HSL. Medium parameters used: $f = 2595.000$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 37.6$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.85, 7.85, 7.85); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (72.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.411 W/kg; SAR (10g) = 0.200 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 0.447 W/kg; SAR (10g) = 0.216 W/kg;

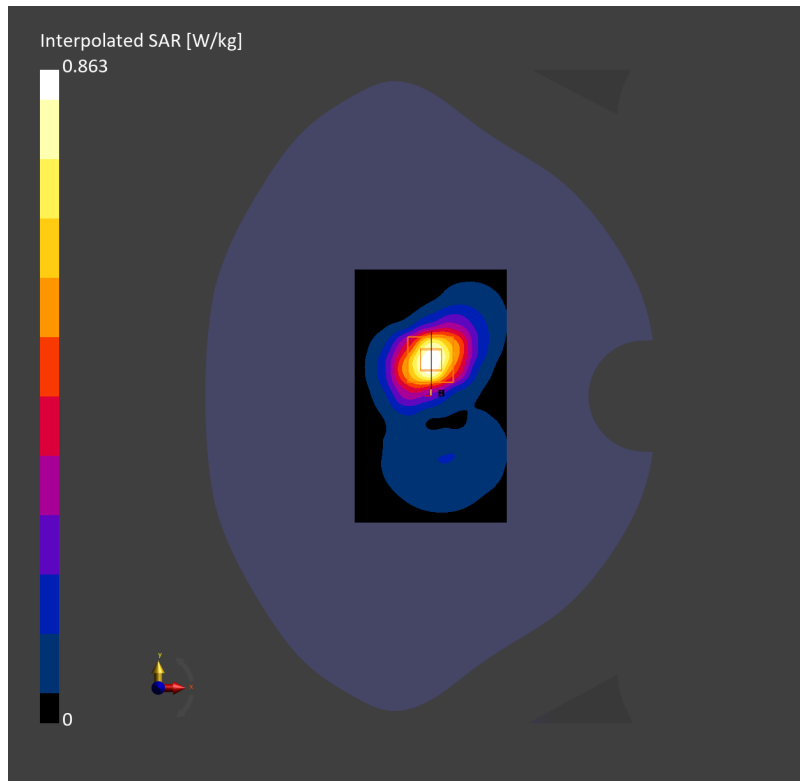

T1 Pro LTE Band 41 20M QPSK 1RB0 41055CH Left cheek**T1 Pro**

Communication System: Band 41; Frequency: 2636.500

Medium: HSL. Medium parameters used: $f = 2636.500$ MHz; $\sigma = 2.08$ S/m; $\epsilon_r = 37.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.85, 7.85, 7.85); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.283 W/kg; SAR (10g) = 0.144 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.09 dB

SAR (1g) = 0.294 W/kg; SAR (10g) = 0.158 W/kg;

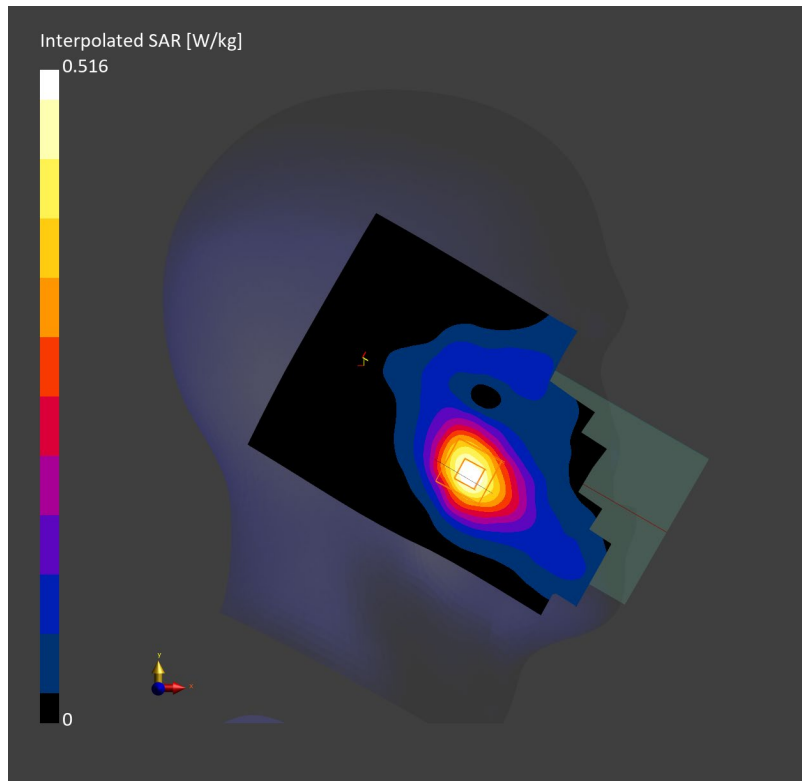

T1 Pro LTE Band 41 20M QPSK 1RB0 41055CH Left side 10mm**T1 Pro**

Communication System: Band 41; Frequency: 2636.500

Medium: HSL. Medium parameters used: $f = 2636.500$ MHz; $\sigma = 2.08$ S/m; $\epsilon_r = 37.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.85, 7.85, 7.85); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (72.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.262 W/kg; SAR (10g) = 0.136 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.269 W/kg; SAR (10g) = 0.141 W/kg;

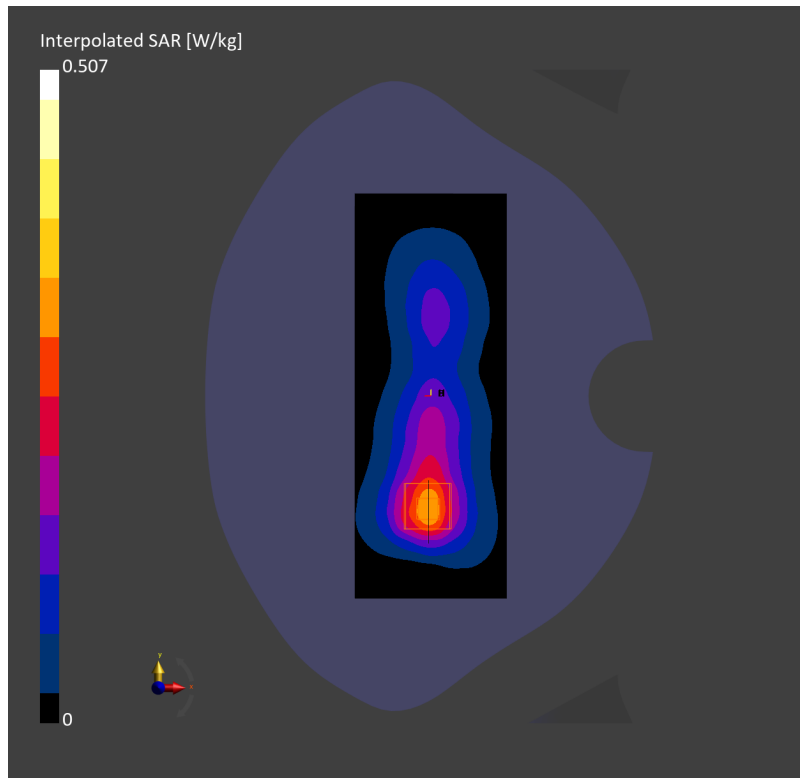

T1 Pro WIFI 2.4G 802.11b 1CH Left cheek**T1 Pro**

Communication System: WLAN 2.4GHz; Frequency: 2412.000

Medium: HSL. Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 38.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.05, 8.05, 8.05); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.428 W/kg; SAR (10g) = 0.207 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.473 W/kg; SAR (10g) = 0.213 W/kg;

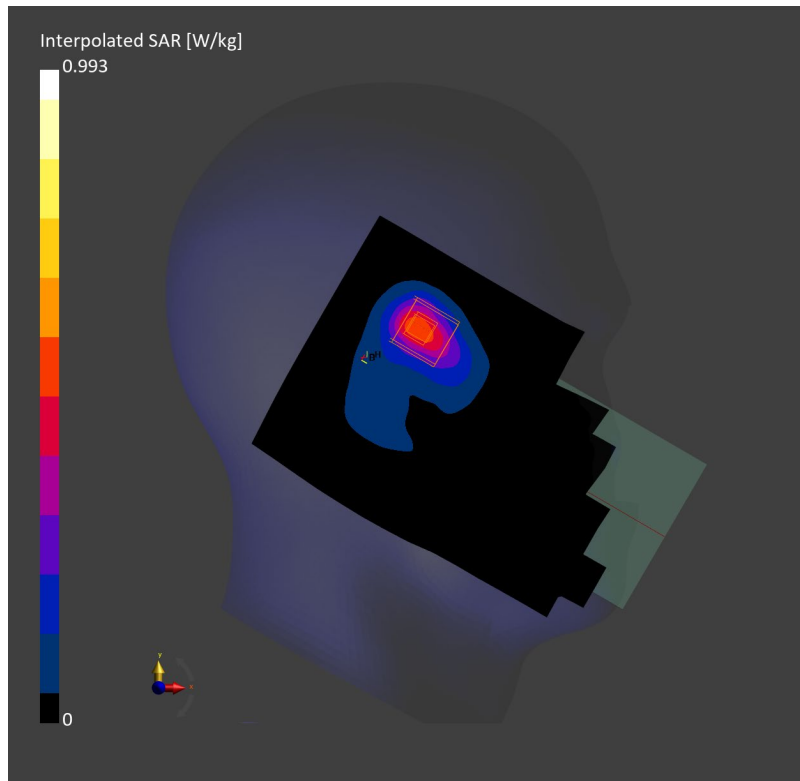

T1 Pro WIFI 2.4G 802.11b 1CH Back side 10mm**T1 Pro**

Communication System: WLAN 2.4GHz; Frequency: 2412.000

Medium: HSL. Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 38.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.05, 8.05, 8.05); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.121 W/kg; SAR (10g) = 0.067 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.124 W/kg; SAR (10g) = 0.067 W/kg;

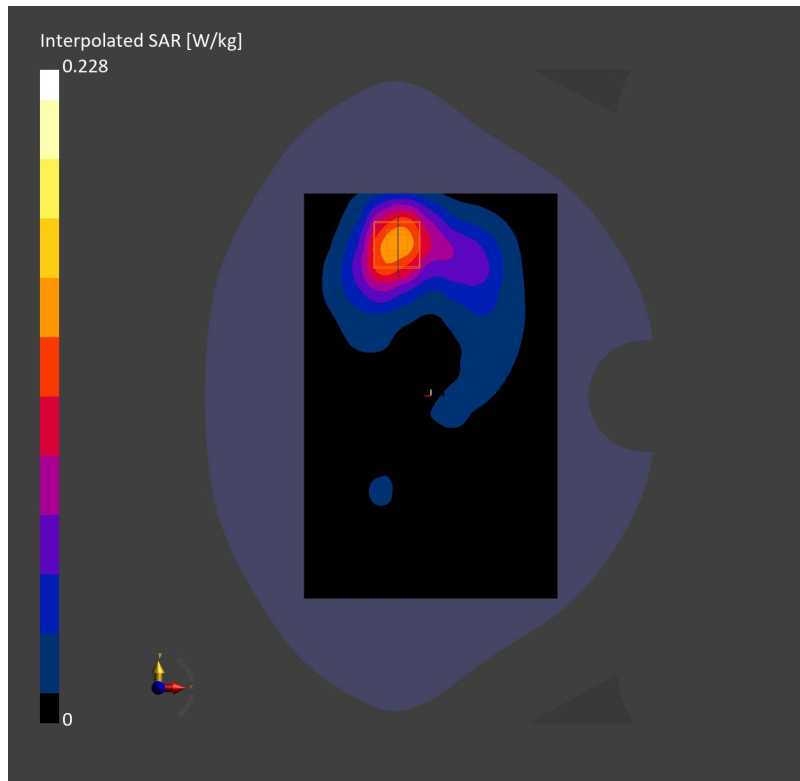

T1 Pro WIFI 5G 802.11a 157CH Left cheek**T1 Pro**

Communication System: WLAN 5GHz; Frequency: 5785.000

Medium: HSL. Medium parameters used: $f=5785.000$ MHz; $\sigma=5.52$ S/m; $\epsilon_r=35.6$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(4.6, 4.77, 4.91); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.495 W/kg; SAR (10g) = 0.175 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.585 W/kg; SAR (10g) = 0.223 W/kg;

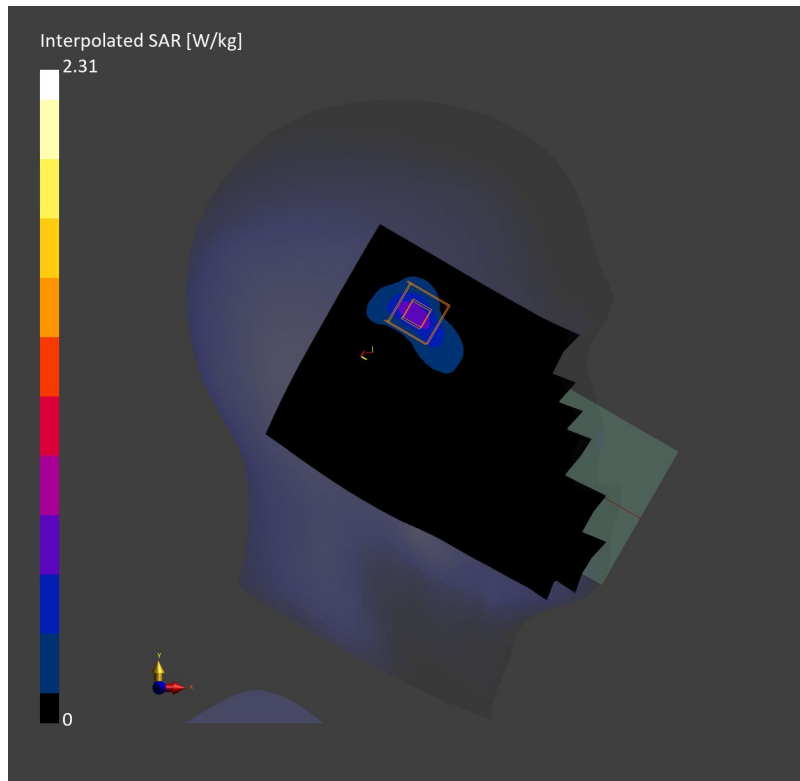

T1 Pro WIFI 5G 802.11a 60CH Front side 0mm**T1 Pro**

Communication System: WLAN 5GHz; Frequency: 5300.000

Medium: HSL. Medium parameters used: $f=5300.000$ MHz; $\sigma=4.65$ S/m; $\epsilon_r=36.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(5.5, 5.72, 5.86); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.570 W/kg; SAR (10g) = 0.200 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.634 W/kg; SAR (10g) = 0.200 W/kg;

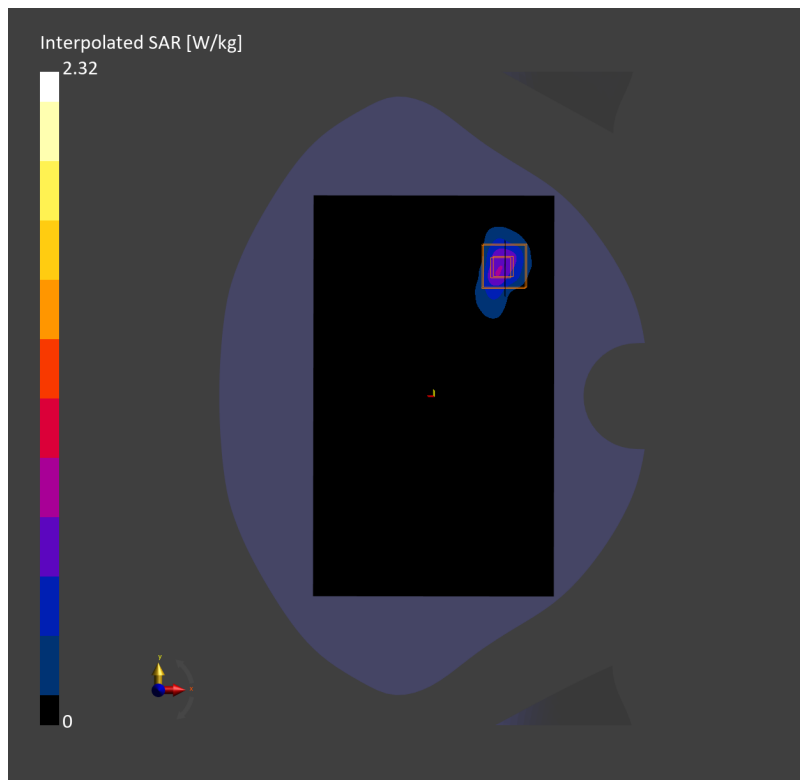

T1 Pro WIFI 5G 802.11a 157CH Front side 10mm**T1 Pro**

Communication System: WLAN 5GHz; Frequency: 5785.000

Medium: HSL. Medium parameters used: $f=5785.000$ MHz; $\sigma=5.52$ S/m; $\epsilon_r=35.6$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(4.6, 4.77, 4.91); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2023-09-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2256
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.164 W/kg; SAR (10g) = 0.067 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 0.155 W/kg; SAR (10g) = 0.075 W/kg;

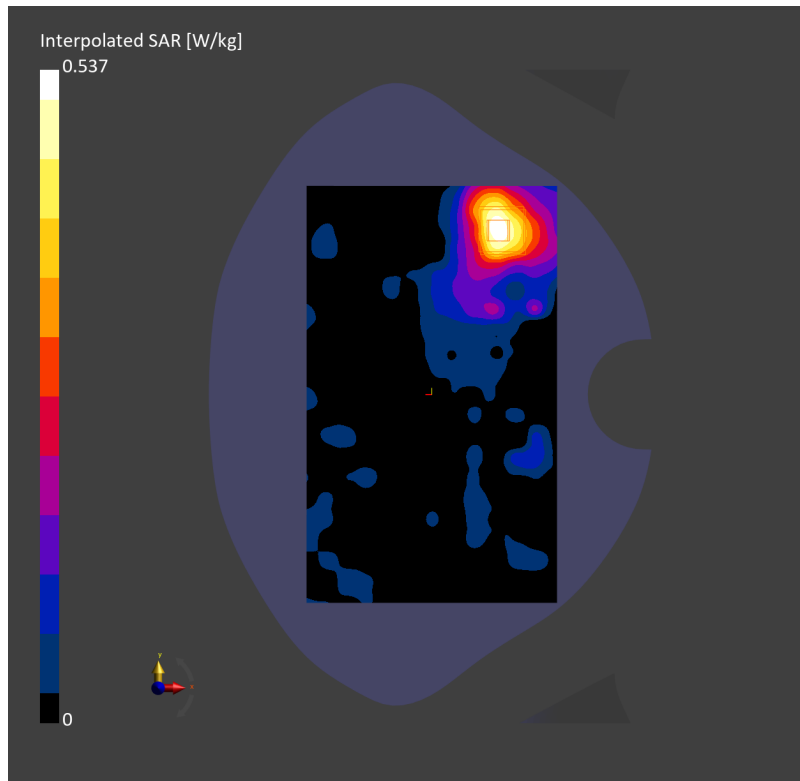

T1 Pro Bluetooth DH5 0CH Left cheek**T1 Pro**

Communication System: ISM 2.4 GHz Band; Frequency: 2402.000

Medium: HSL. Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 38.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.05, 8.05, 8.05); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.048 W/kg; SAR (10g) = 0.023 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.06 dB

SAR (1g) = 0.050 W/kg; SAR (10g) = 0.020 W/kg;

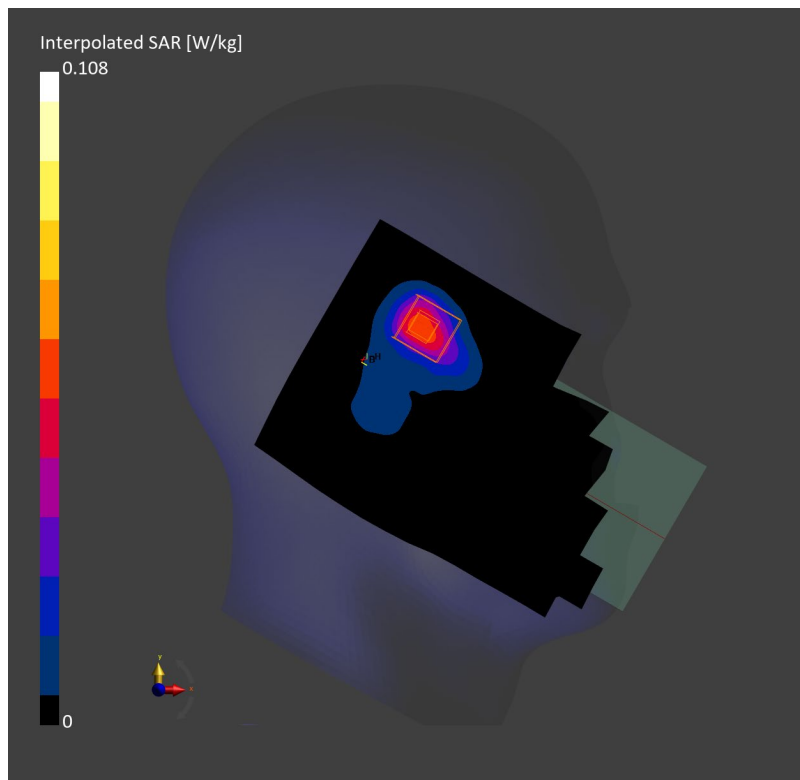

T1 Pro Bluetooth DH5 0CH Back side 10mm**T1 Pro**

Communication System: ISM 2.4 GHz Band; Frequency: 2402.000

Medium: HSL. Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 38.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.05, 8.05, 8.05); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.014 W/kg; SAR (10g) = 0.008 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.013 W/kg; SAR (10g) = 0.006 W/kg;

