

# Appendix B

## Detailed Test Results

1. GSM
GSM850 for Head & Body
GSM1900 for Head & Body
2. WCDMA
WCDMA Band II for Head & Body
WCDMA Band V for Head & Body
3. LTE
LTE Band 5 for Head & Body
LTE Band 7 for Head & Body
LTE Band 41 for Head & Body
4. WIFI
WIFI 2.4G for Head & Body
WIFI 5G for Head & Body
5. BT
BT for Head & Body

**Measurement Report for Device, CHEEK, GSM 850, GPRS-FDD (TDMA, GMSK, TN 0-4), Channel 190 (836.6 MHz)**

Communication System: GSM 850; Frequency: 836.6

Medium: HSL. Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.887$  S/m;  $\epsilon_r = 43.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.4,10.4,10.4); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.394 W/kg; SAR (10g) = 0.269 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.412 W/kg; SAR (10g) = 0.311 W/kg;

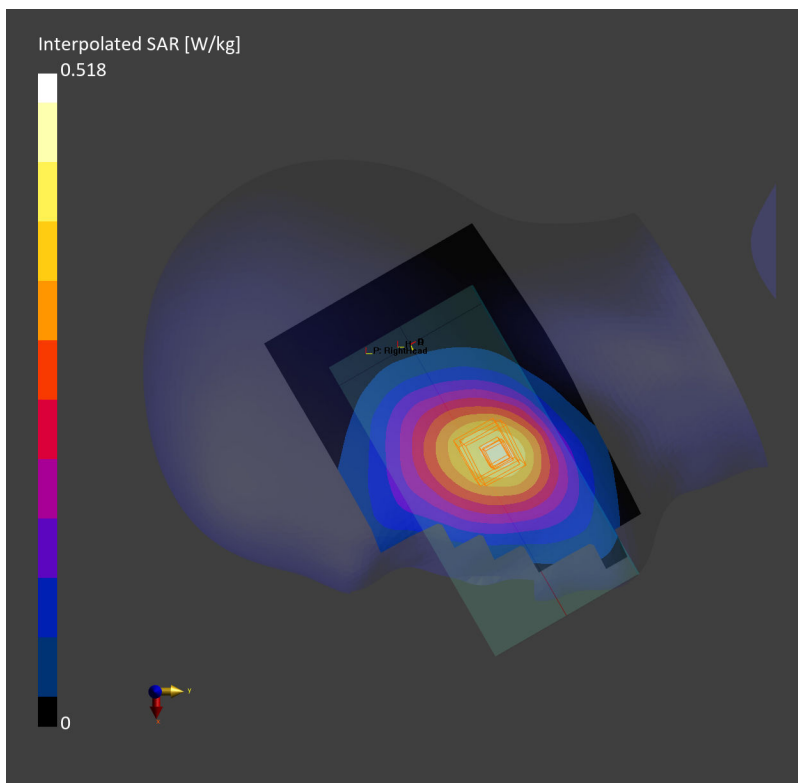

**Measurement Report for Device, BACK, GSM 850, GPRS-FDD (TDMA, GMSK, TN 0-4), Channel 190 (836.6 MHz)**

Communication System: GSM 850; Frequency: 836.6

Medium: HSL. Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.887$  S/m;  $\epsilon_r = 43.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.4,10.4,10.4); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.741 W/kg; SAR (10g) = 0.521 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.766 W/kg; SAR (10g) = 0.554 W/kg;

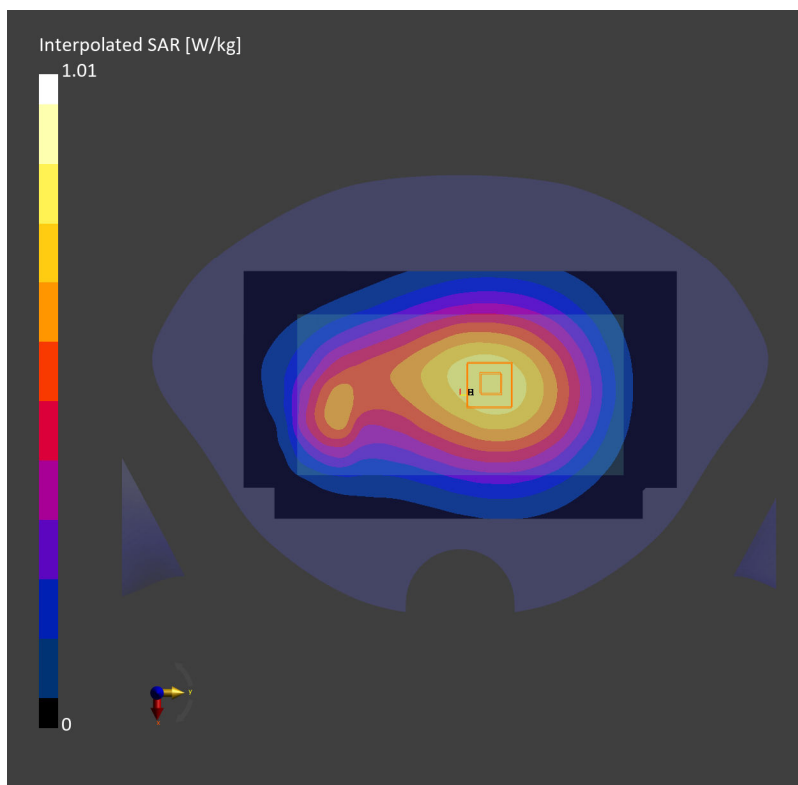

Date: 2023-10-31

**Measurement Report for Device, CHEEK, PCS 1900, GPRS-FDD (TDMA, GMSK, TN 0-4), Channel 661 (1880.0 MHz)**

Communication System: PCS 1900; Frequency: 1880.0

Medium: HSL. Medium parameters used:  $f = 1880.0$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.63, 8.63, 8.63); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.159 W/kg; SAR (10g) = 0.091 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.160 W/kg; SAR (10g) = 0.102 W/kg;

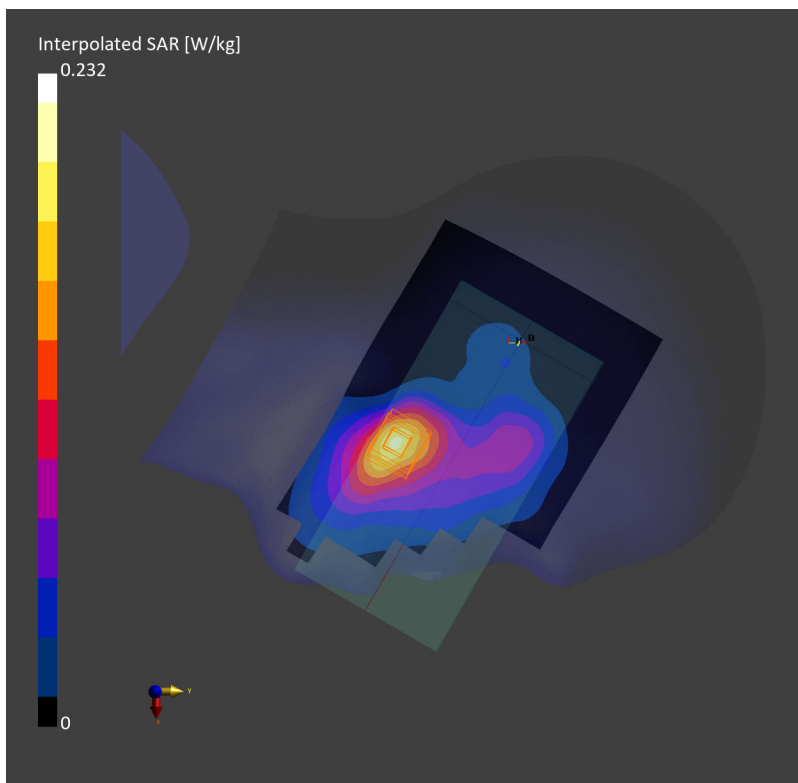

**Measurement Report for Device, BACK, PCS 1900, GPRS-FDD (TDMA, GMSK, TN 0-4), Channel 661 (1880.0 MHz)**

Communication System: PCS 1900; Frequency: 1880.0

Medium: HSL. Medium parameters used:  $f= 1880.0$  MHz;  $\sigma= 1.36$  S/m;  $\epsilon_r = 40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.63, 8.63, 8.63); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.312 W/kg; SAR (10g) = 0.190 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.325 W/kg; SAR (10g) = 0.197 W/kg;

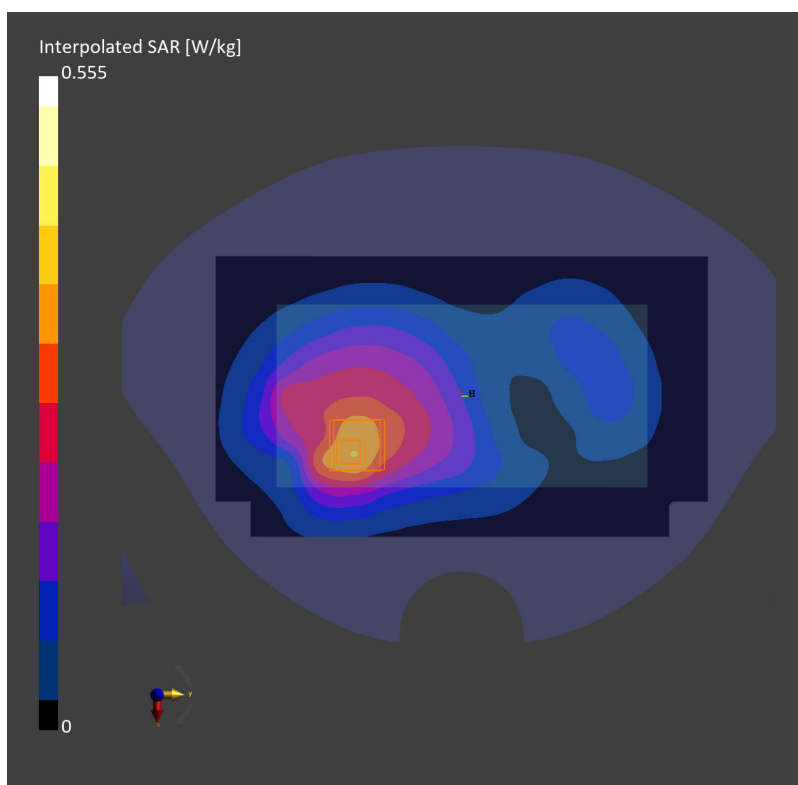

**Measurement Report for Device, CHEEK, Band 2, UMTS-FDD (DC-HSDPA), Channel 9400 (1880.0 MHz)**

Communication System: Band 2; Frequency: 1880.0

Medium: HSL. Medium parameters used:  $f=1880.0$  MHz;  $\sigma=1.36$  S/m;  $\epsilon_r=40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.63, 8.63, 8.63); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.192 W/kg; SAR (10g) = 0.111 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.202 W/kg; SAR (10g) = 0.129 W/kg;

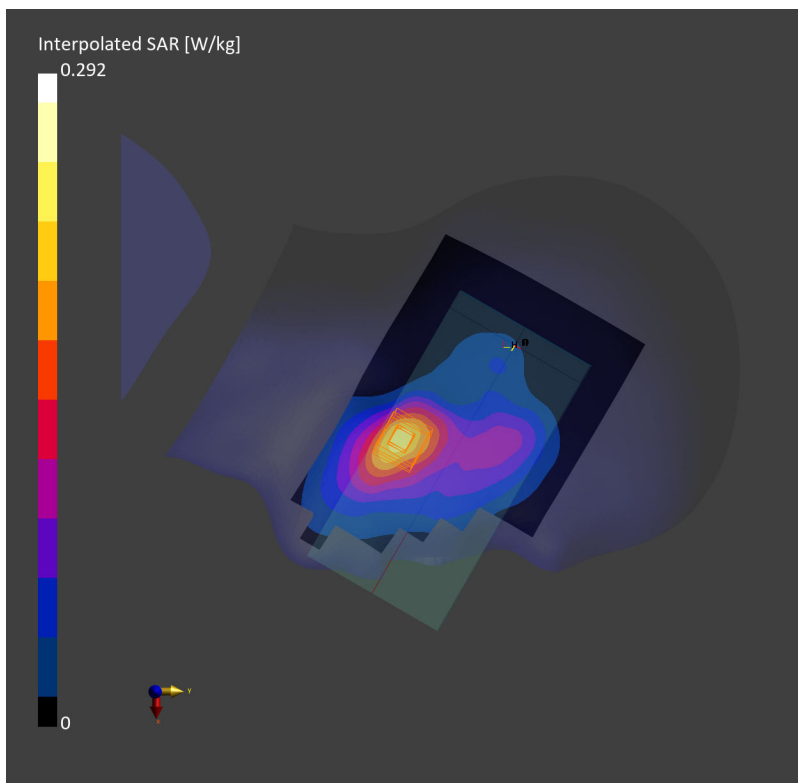

**Measurement Report for Device, BACK, Band 2, UMTS-FDD (DC-HSDPA), Channel 9400 (1880.0 MHz)**

Communication System: Band 2; Frequency: 1880.0

Medium: HSL. Medium parameters used:  $f= 1880.0$  MHz;  $\sigma= 1.36$  S/m;  $\epsilon_r = 40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.63, 8.63, 8.63); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.407 W/kg; SAR (10g) = 0.244 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.419 W/kg; SAR (10g) = 0.255 W/kg;

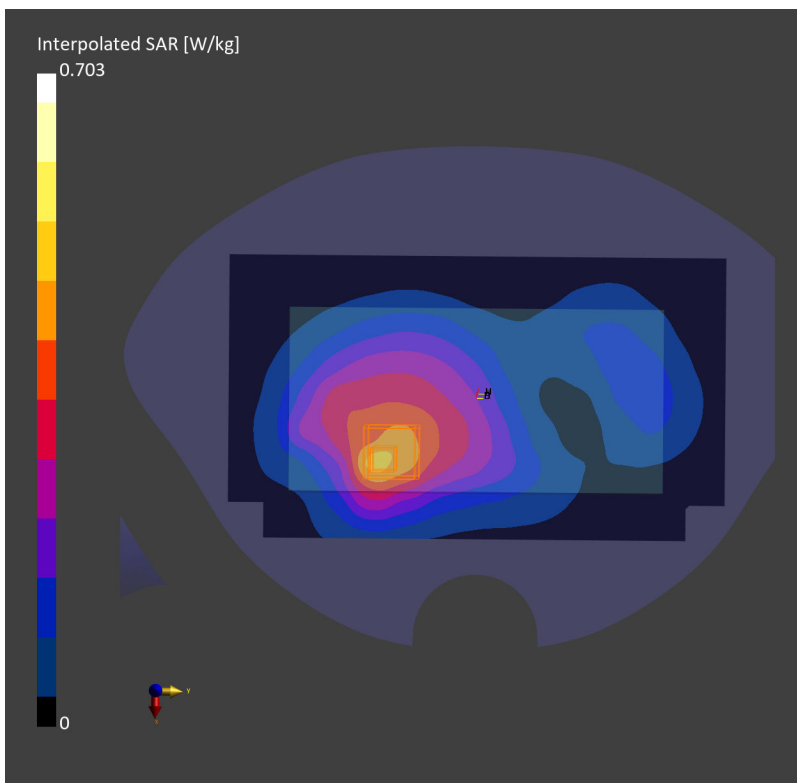

**Measurement Report for Device, CHEEK, Band 5, UMTS-FDD (DC-HSDPA), Channel 4182 (836.4 MHz)**

Communication System: Band 5; Frequency: 836.4

Medium: HSL. Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.886$  S/m;  $\epsilon_r = 43.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.4,10.4,10.4); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.155 W/kg; SAR (10g) = 0.106 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.157 W/kg; SAR (10g) = 0.123 W/kg;

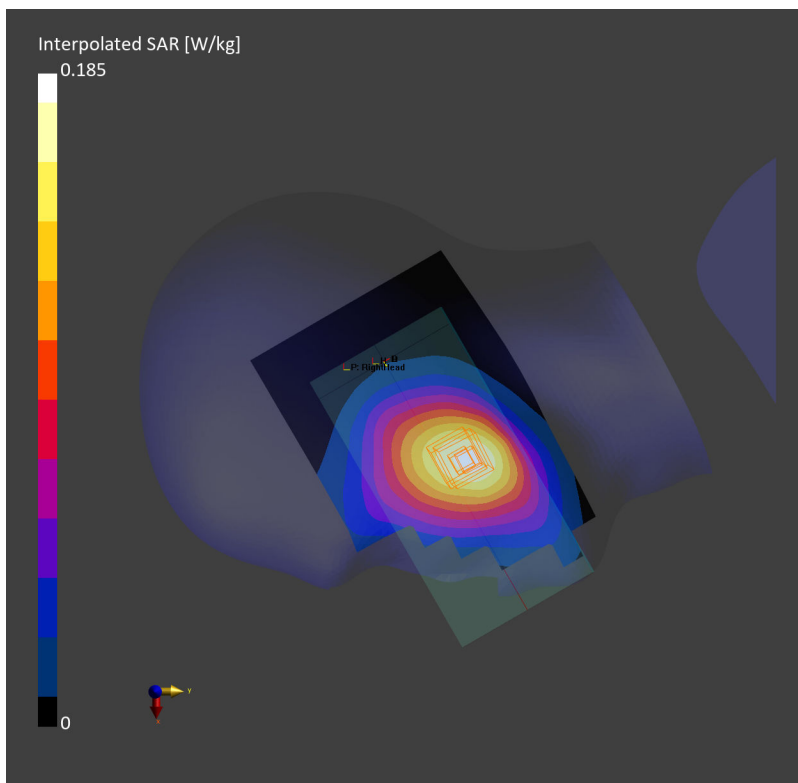



**Measurement Report for Device, BACK, Band 5, UMTS-FDD (DC-HSDPA), Channel 4182 (836.4 MHz)**

Communication System: Band 5; Frequency: 836.4

Medium: HSL. Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.886$  S/m;  $\epsilon_r = 43.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.4,10.4,10.4); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.317 W/kg; SAR (10g) = 0.223 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.330 W/kg; SAR (10g) = 0.250 W/kg;

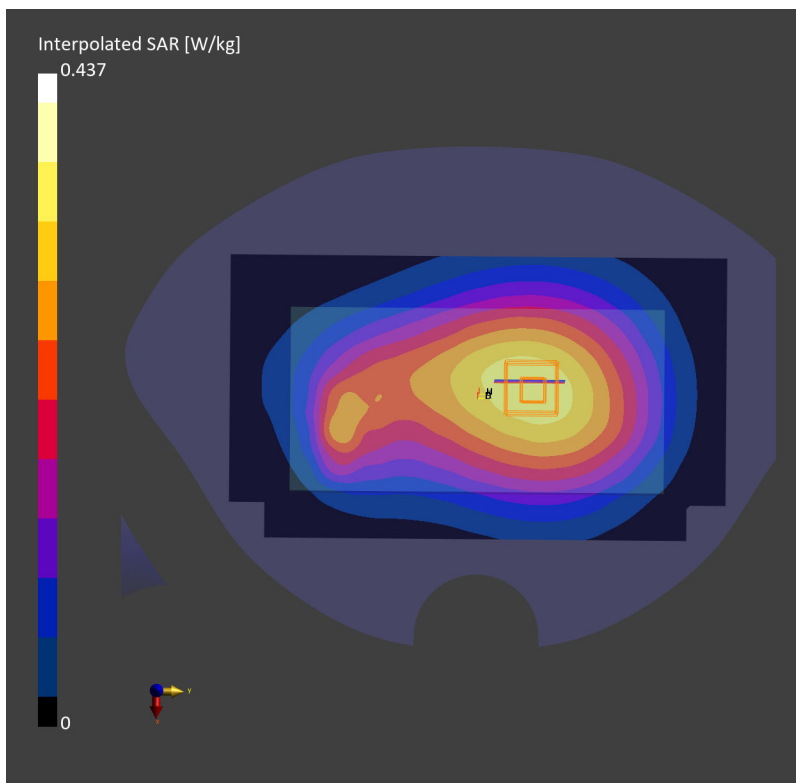

Date: 2023-10-28

**Measurement Report for Device, CHEEK, Band 5, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 20525 (836.5 MHz)**

Communication System: Band 5; Frequency: 836.5

Medium: HSL. Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.930$  S/m;  $\epsilon_r = 43.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.4,10.4,10.4); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.151 W/kg; SAR (10g) = 0.103 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.158 W/kg; SAR (10g) = 0.123 W/kg;

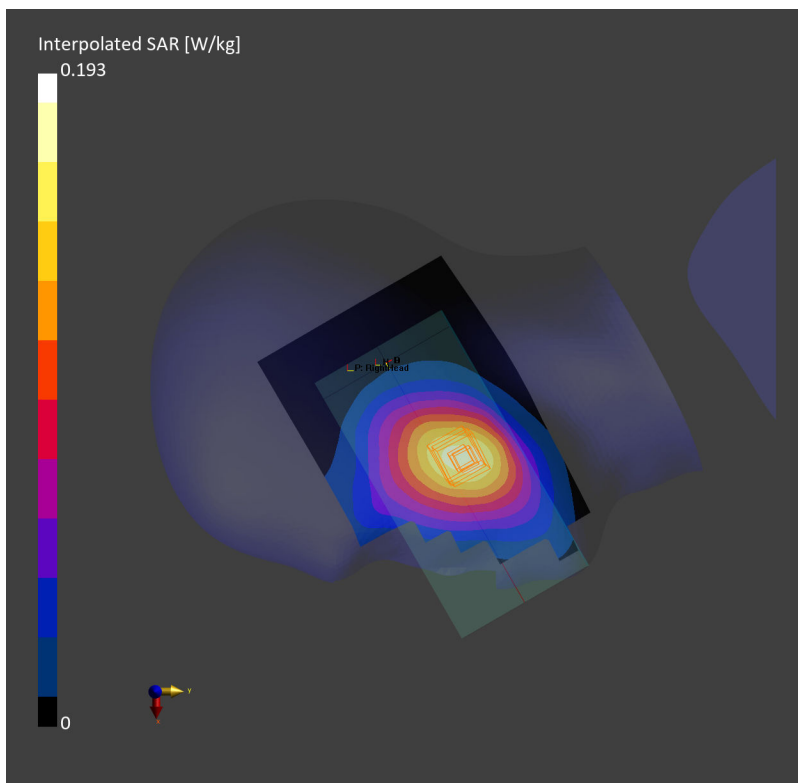

Date: 2023-10-28

**Measurement Report for Device, BACK, Band 5, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 20525 (836.5 MHz)**

Communication System: Band 5; Frequency: 836.5

Medium: HSL. Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.930$  S/m;  $\epsilon_r = 43.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.4,10.4,10.4); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.335 W/kg; SAR (10g) = 0.235 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.347 W/kg; SAR (10g) = 0.263 W/kg;

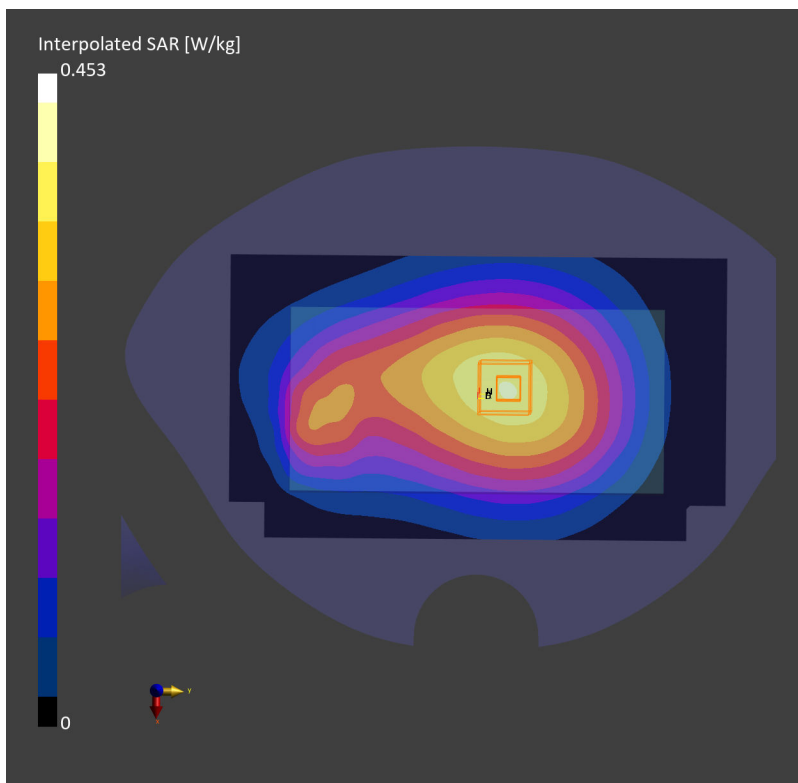

Date: 2023-11-16

**Measurement Report for Device, CHEEK, Band 7, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 21100 (2535.0 MHz)**

Communication System: Band 7; Frequency: 2535.0

Medium: HSL. Medium parameters used:  $f = 2535.0$  MHz;  $\sigma = 1.90$  S/m;  $\epsilon_r = 37.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.85, 7.85, 7.85); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.102 W/kg; SAR (10g) = 0.054 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.16 dB

SAR (1g) = 0.098 W/kg; SAR (10g) = 0.054 W/kg;

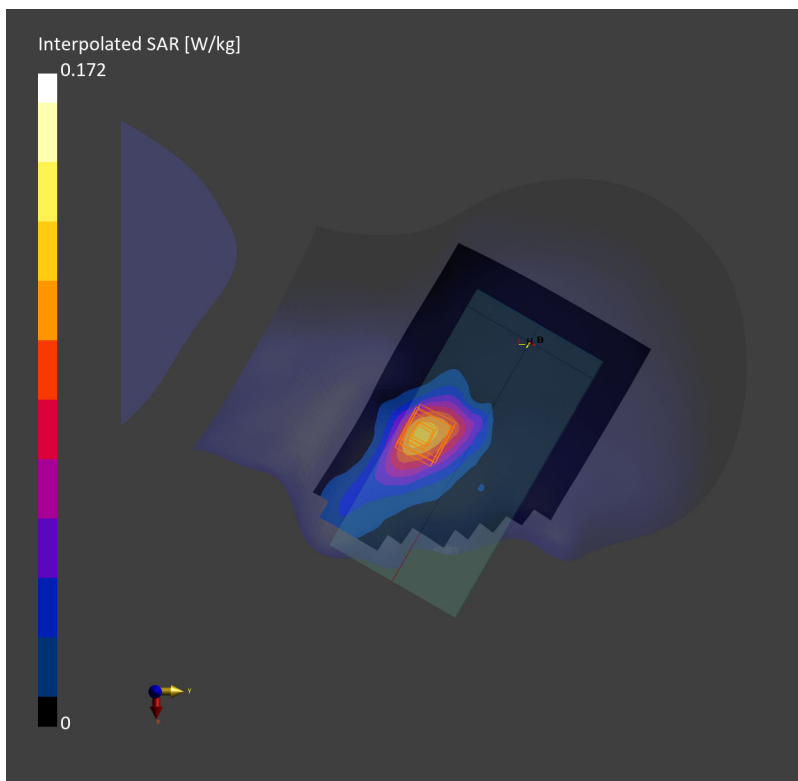

**Measurement Report for Device, BACK, Band 7, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 21350 (2560.0 MHz)**

Communication System: Band 7; Frequency: 2560.0

Medium: HSL. Medium parameters used:  $f = 2560.0$  MHz;  $\sigma = 1.92$  S/m;  $\epsilon_r = 37.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.85, 7.85, 7.85); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.10 W/kg; SAR (10g) = 0.569 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 1.08 W/kg; SAR (10g) = 0.597 W/kg;

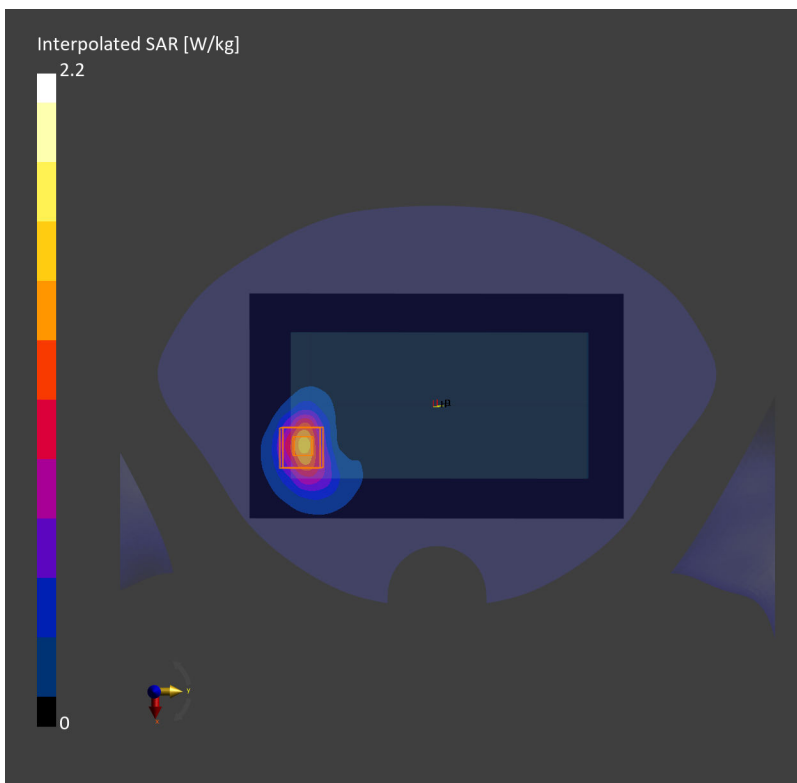

**Measurement Report for Device, CHEEK, Band 41, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 40600 (2591.0 MHz)**

Communication System: Band 41; Frequency: 2591.0

Medium: HSL. Medium parameters used:  $f = 2591.0$  MHz;  $\sigma = 1.96$  S/m;  $\epsilon_r = 37.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.85, 7.85, 7.85); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.061 W/kg; SAR (10g) = 0.032 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.10 dB

SAR (1g) = 0.070 W/kg; SAR (10g) = 0.038 W/kg;

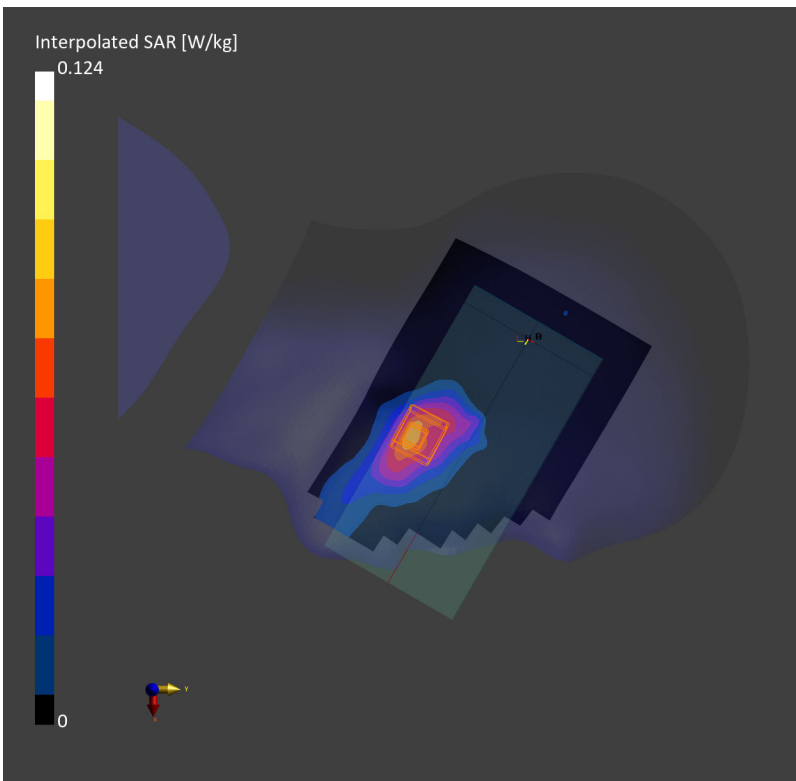

Date: 2023-12-01

**Measurement Report for Device, BACK, Band 41, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 40870 (2618.0 MHz)**

Communication System: Band 41; Frequency: 2618.0

Medium: HSL. Medium parameters used:  $f= 2618.0$  MHz;  $\sigma= 1.99$  S/m;  $\epsilon_r = 37.7$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.85, 7.85, 7.85); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.986 W/kg; SAR (10g) = 0.517 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 1.05 W/kg; SAR (10g) = 0.536 W/kg;

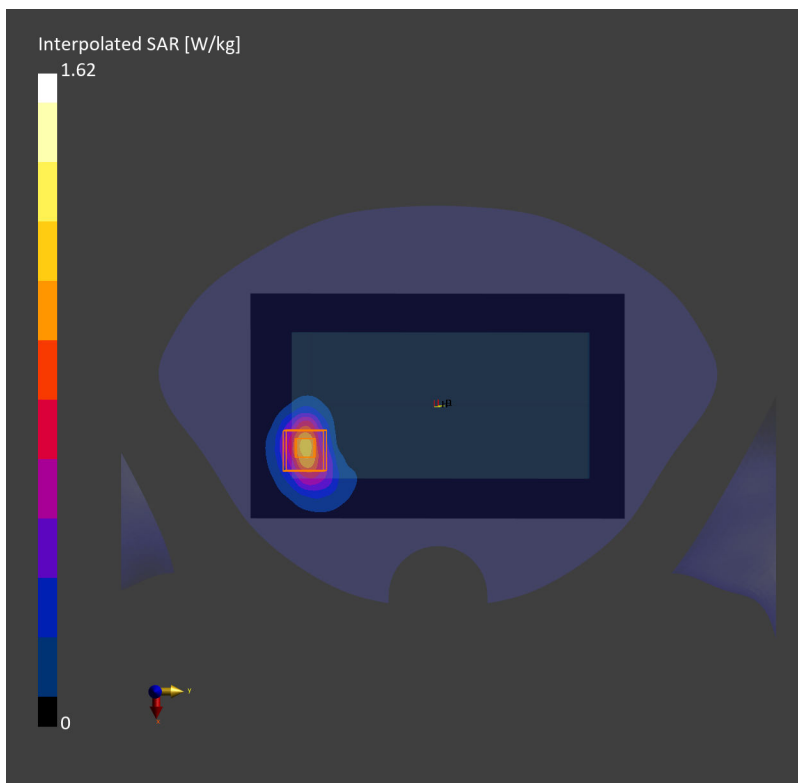

**Measurement Report for Device, CHEEK, WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps), Channel 6 (2437.0 MHz)**

Communication System: WLAN 2.4GHz; Frequency: 2437.0

Medium: HSL. Medium parameters used:  $f= 2437.0$  MHz;  $\sigma= 1.79$  S/m;  $\epsilon_r = 38.2$

**DASY8 Configuration:**

- Probe: EX3DV4 - SN7636; ConvF(8.05,8.05,8.05); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.517 W/kg; SAR (10g) = 0.271 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.554 W/kg; SAR (10g) = 0.285 W/kg;

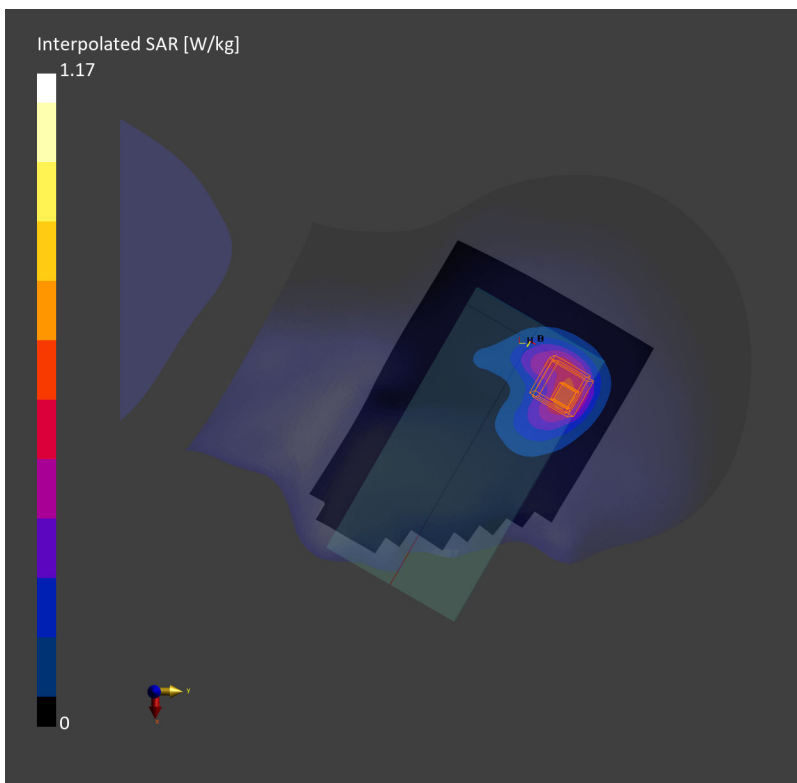



**Measurement Report for Device, EDGE TOP, WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps), Channel 6 (2437.0 MHz)**

Communication System: WLAN 2.4GHz; Frequency: 2437.0

Medium: HSL. Medium parameters used:  $f= 2437.0$  MHz;  $\sigma= 1.79$  S/m;  $\epsilon_r = 38.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.05,8.05,8.05); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (60.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.237 W/kg; SAR (10g) = 0.128 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.240 W/kg; SAR (10g) = 0.132 W/kg;

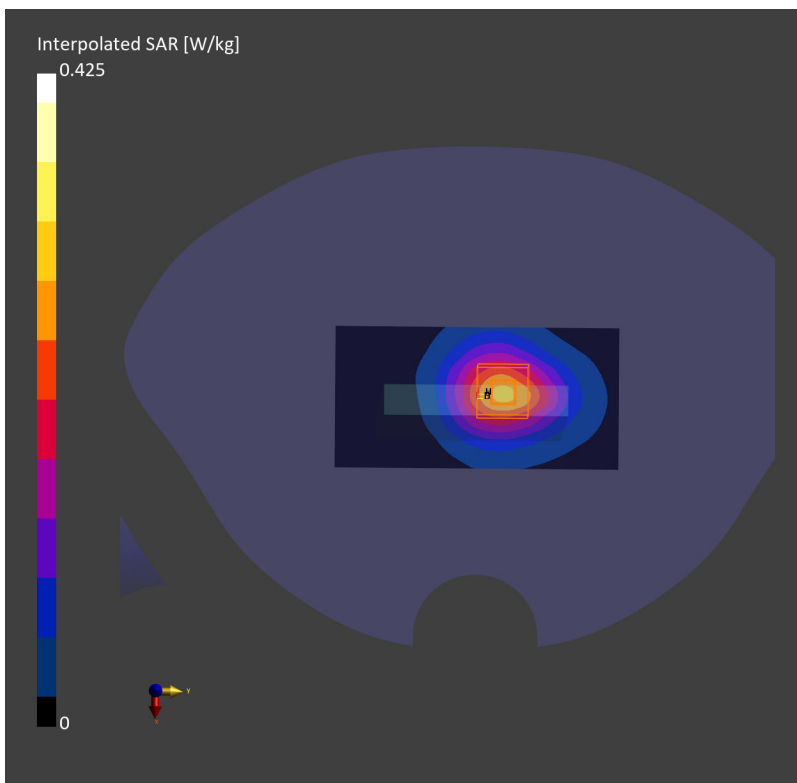

**Measurement Report for Device, TILT, WLAN 5GHz, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 62 (5310.0 MHz)**

Communication System: WLAN 5GHz; Frequency: 5310.0

Medium: HSL. Medium parameters used:  $f= 5310.0$  MHz;  $\sigma= 4.83$  S/m;  $\epsilon_r = 35.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(5.65, 5.65, 5.65); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.565 W/kg; SAR (10g) = 0.181 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.18 dB

SAR (1g) = 0.592 W/kg; SAR (10g) = 0.186 W/kg;

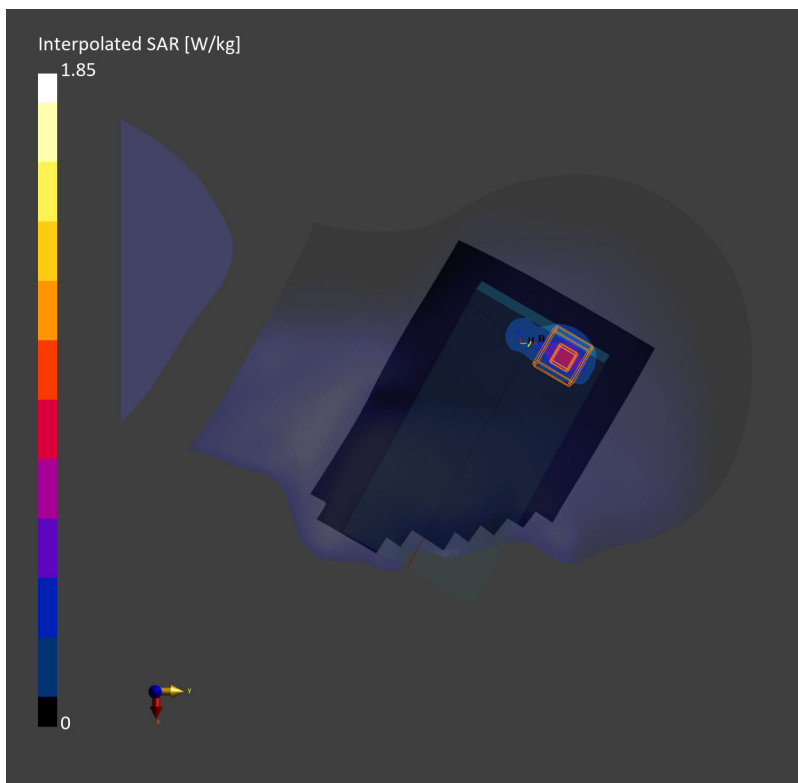

**Measurement Report for Device, TILT, WLAN 5GHz, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 126 (5630.0 MHz)**

Communication System: WLAN 5GHz; Frequency: 5630.0

Medium: HSL. Medium parameters used:  $f= 5630.0$  MHz;  $\sigma= 5.22$  S/m;  $\epsilon_r = 35.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(5.1,5.1,5.1); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.549 W/kg; SAR (10g) = 0.175 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.10 dB

SAR (1g) = 0.580 W/kg; SAR (10g) = 0.183 W/kg;

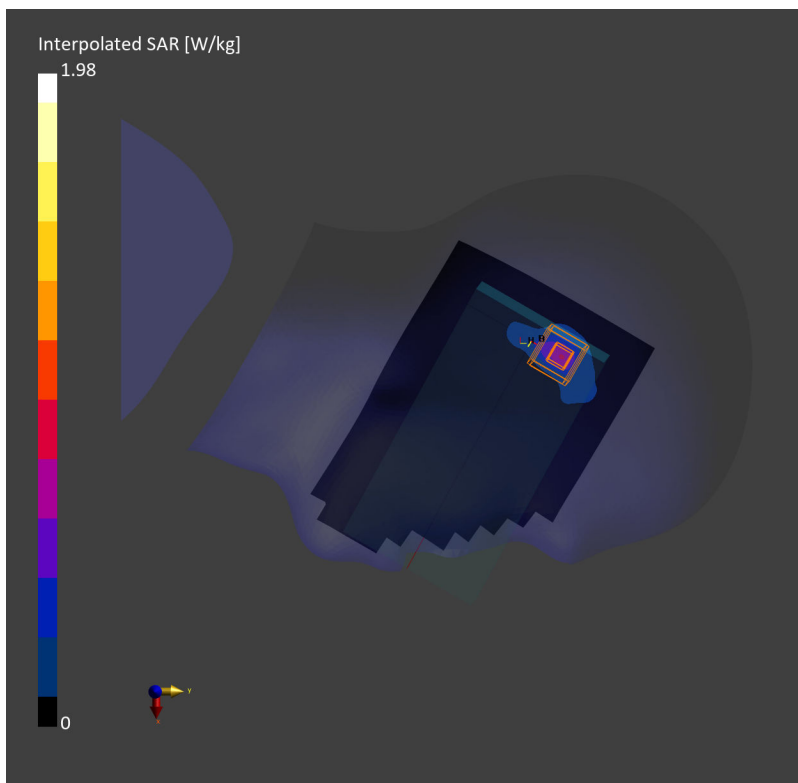

**Measurement Report for Device, TILT, WLAN 5GHz, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 159 (5795.0 MHz)**

Communication System: WLAN 5GHz; Frequency: 5795.0

Medium: HSL. Medium parameters used:  $f= 5795.0$  MHz;  $\sigma= 5.38$  S/m;  $\epsilon_r = 34.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(5.15,5.15,5.15); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.465 W/kg; SAR (10g) = 0.149 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 0.482 W/kg; SAR (10g) = 0.149 W/kg;

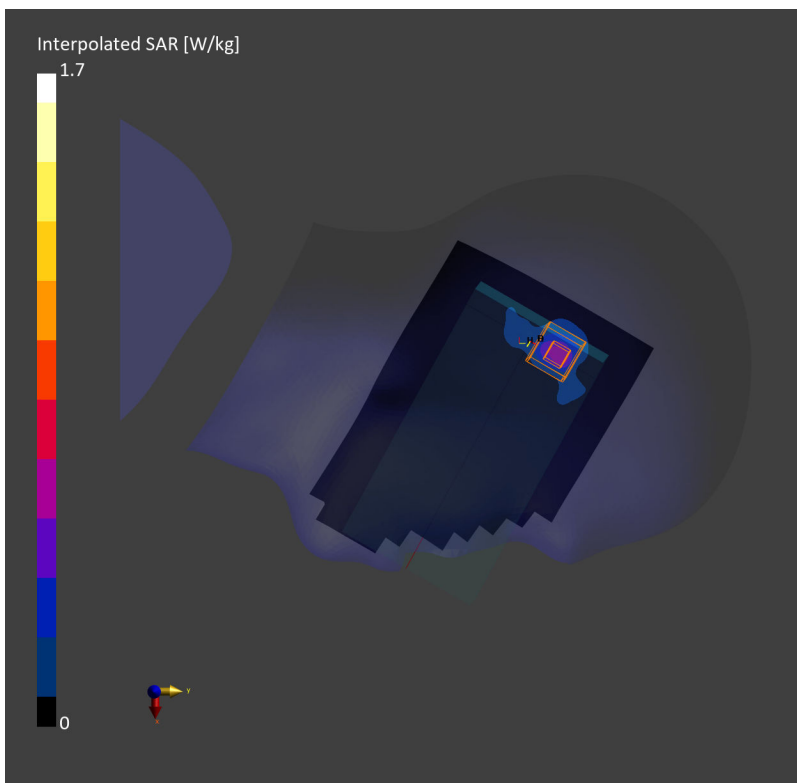

**Measurement Report for Device, BACK, WLAN 5GHz, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 38 (5190.0 MHz)**

Communication System: WLAN 5GHz; Frequency: 5190.0

Medium: HSL. Medium parameters used:  $f= 5190.0$  MHz;  $\sigma= 4.70$  S/m;  $\epsilon_r = 36.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(5.65, 5.65, 5.65); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.410 W/kg; SAR (10g) = 0.168 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.420 W/kg; SAR (10g) = 0.167 W/kg;

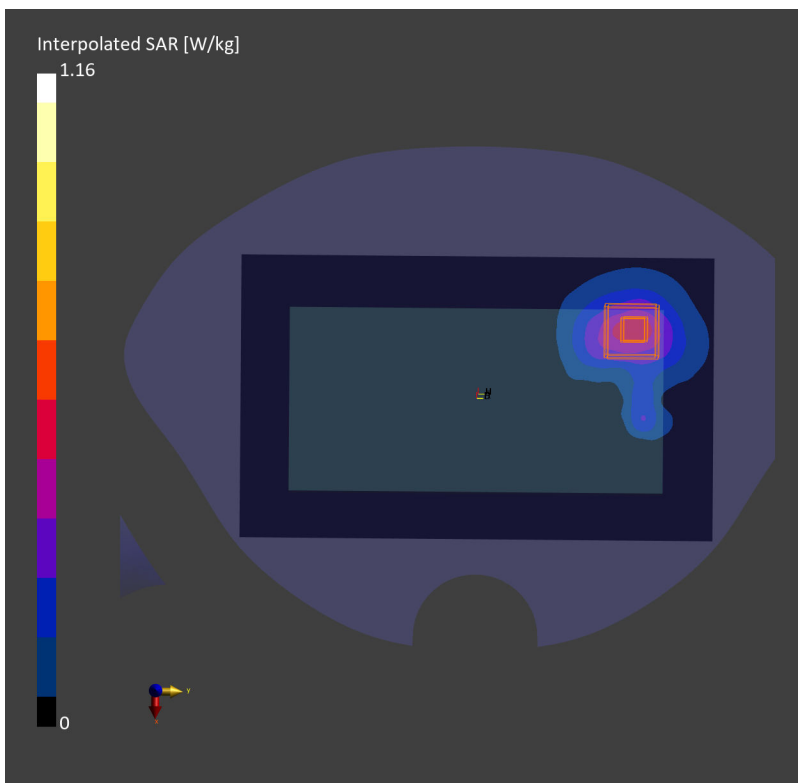

Date: 2023-11-09

**Measurement Report for Device, BACK, WLAN 5GHz, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 62 (5310.0 MHz)**

Communication System: WLAN 5GHz; Frequency: 5310.0

Medium: HSL. Medium parameters used:  $f= 5310.0$  MHz;  $\sigma= 4.83$  S/m;  $\epsilon_r = 35.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(5.65, 5.65, 5.65); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.409 W/kg; SAR (10g) = 0.229 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.07 dB

SAR (1g) = 0.419 W/kg; SAR (10g) = 0.235 W/kg;

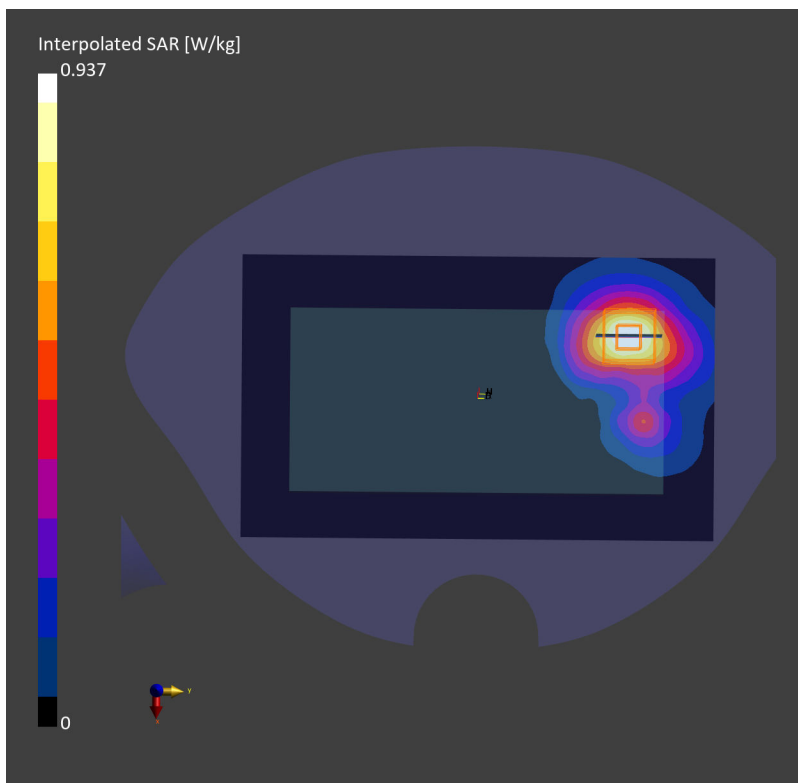

**Measurement Report for Device, BACK, WLAN 5GHz, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 126 (5630.0 MHz)**

Communication System: WLAN 5GHz; Frequency: 5630.0

Medium: HSL. Medium parameters used:  $f = 5630.0$  MHz;  $\sigma = 5.22$  S/m;  $\epsilon_r = 35.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(5.1,5.1,5.1); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.586 W/kg; SAR (10g) = 0.247 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.607 W/kg; SAR (10g) = 0.276 W/kg;

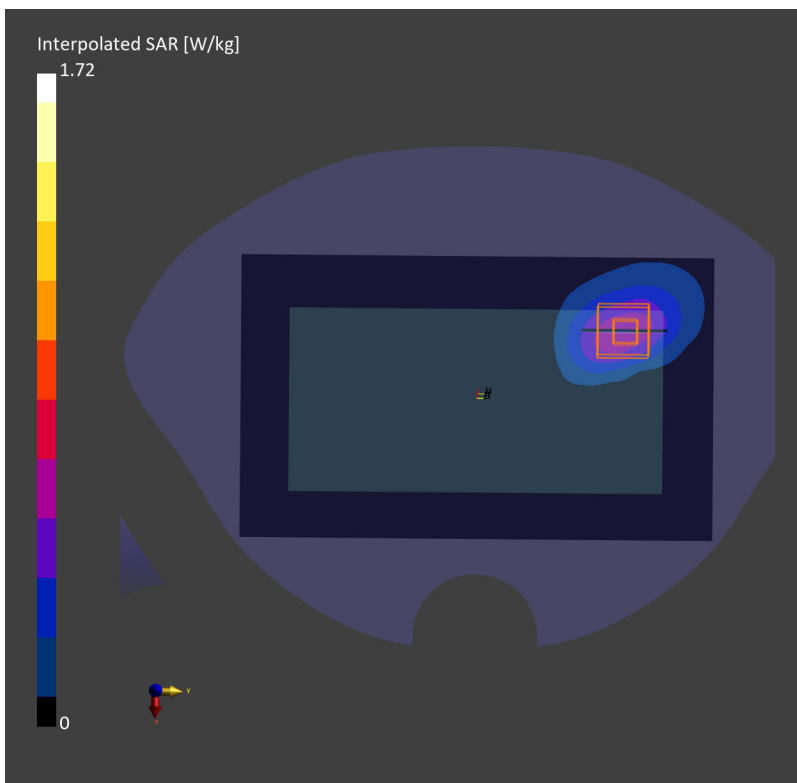

Date: 2023-11-11

**Measurement Report for Device, BACK, WLAN 5GHz, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 159 (5795.0 MHz)**

Communication System: WLAN 5GHz; Frequency: 5795.0

Medium: HSL. Medium parameters used:  $f= 5795.0$  MHz;  $\sigma= 5.38$  S/m;  $\epsilon_r = 34.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(5.15,5.15,5.15); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.778 W/kg; SAR (10g) = 0.316 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.07 dB

SAR (1g) = 0.792 W/kg; SAR (10g) = 0.318 W/kg;

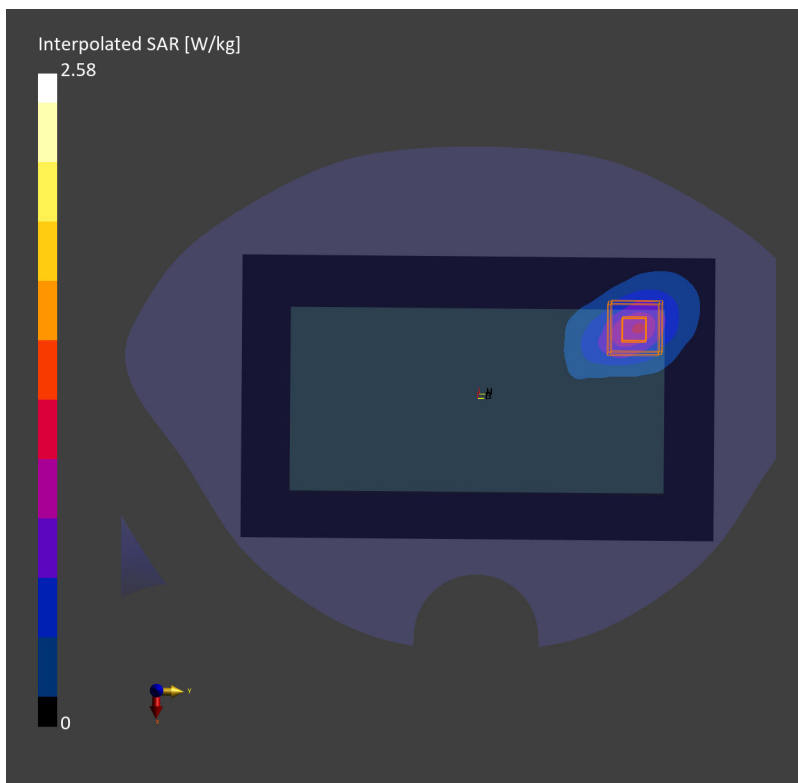



Date: 2023-11-09

**Measurement Report for Device, BACK, WLAN 5GHz, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 62 (5310.0 MHz)**

Communication System: WLAN 5GHz; Frequency: 5310.0

Medium: HSL. Medium parameters used:  $f= 5310.0$  MHz;  $\sigma= 4.83$  S/m;  $\epsilon_r = 35.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(5.65, 5.65, 5.65); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.405 W/kg; SAR (10g) = 0.162 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.418 W/kg; SAR (10g) = 0.162 W/kg;

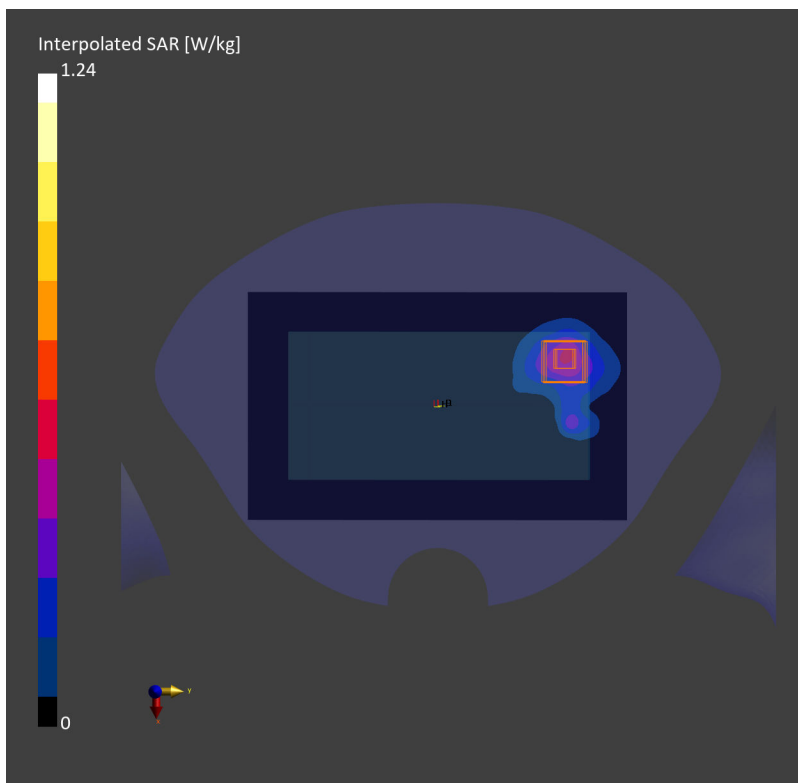

Date: 2023-11-10

**Measurement Report for Device, BACK, WLAN 5GHz, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 126 (5630.0 MHz)**

Communication System: WLAN 5GHz; Frequency: 5630.0

Medium: HSL. Medium parameters used:  $f= 5630.0$  MHz;  $\sigma= 5.22$  S/m;  $\epsilon_r = 35.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(5.1,5.1,5.1); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.665 W/kg; SAR (10g) = 0.253 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.682 W/kg; SAR (10g) = 0.256 W/kg;

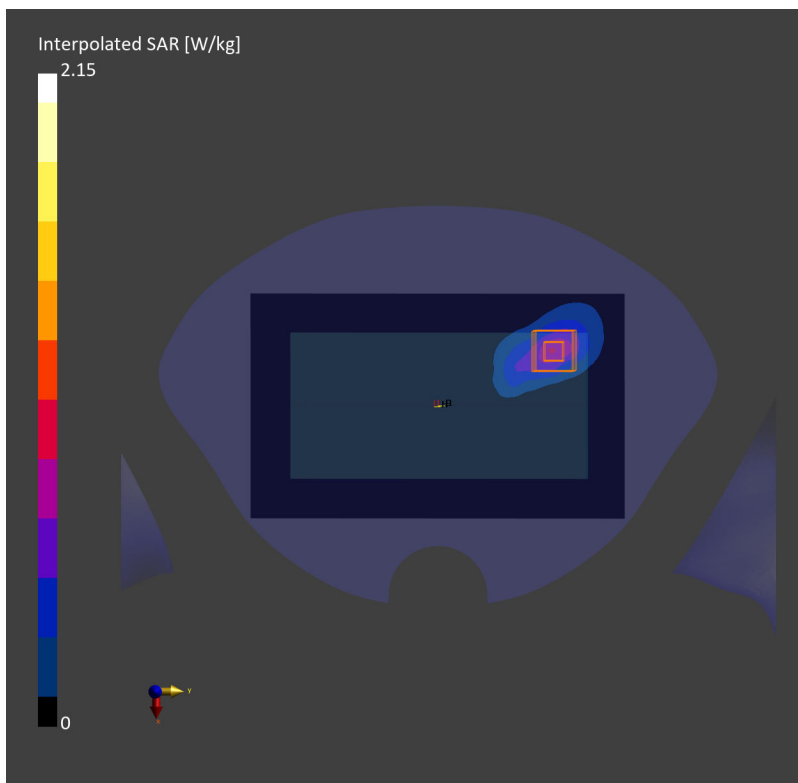

Date: 2023-11-07

**Measurement Report for Device, CHEEK, ISM 2.4 GHz Band, IEEE 802.15.1 Bluetooth (GFSK, DH5), Channel 0 (2402.0 MHz)**

Communication System: ISM 2.4 GHz Band; Frequency: 2402.0

Medium: HSL. Medium parameters used:  $f= 2402.0$  MHz;  $\sigma= 1.75$  S/m;  $\epsilon_r = 38.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.05,8.05,8.05); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.358 W/kg; SAR (10g) = 0.189 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.376 W/kg; SAR (10g) = 0.198 W/kg;

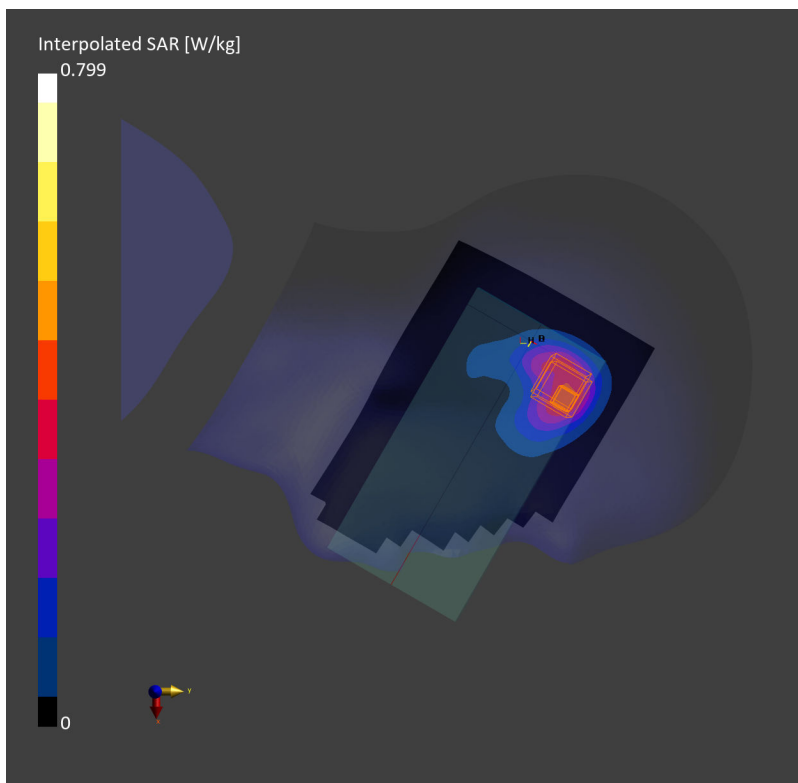

Date: 2023-11-07

**Measurement Report for Device, EDGE TOP, ISM 2.4 GHz Band, IEEE 802.15.1 Bluetooth (GFSK, DH5), Channel 0 (2402.0 MHz)**

Communication System: ISM 2.4 GHz Band; Frequency: 2402.0

Medium: HSL. Medium parameters used:  $f= 2402.0$  MHz;  $\sigma= 1.75$  S/m;  $\epsilon_r = 38.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.05,8.05,8.05); Calibrated: 2023-06-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1484; Calibrated: 2023-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425

**Area Scan (60.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.124 W/kg; SAR (10g) = 0.067 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.128 W/kg; SAR (10g) = 0.069 W/kg;

